PART NUMBER 415-0059-XXX	ITEM	QTY	DESCRIPTION	CUT LENGTH EACH FEET	CUT LENGTH EACH INCH
	1	1	SMA STRAIGHT PLUG, CRIMP TYPE		
	2	1	N STRAIGHT PLUG, CRIMP TYPE		
	3	1	CABLE, RG 58		PER TABLE
	4	2	HEAT SHRINK TUBING, 1/4 BLACK	.0833	1.00±.10
		0	ASSEMBLY INSTRUCTION, TO CABLE		
		0	ASSEMBLY INSTRUCTION, CABLE		

PART NUMBER	LENGTH	CUT LENGTH EACH FEET	CUT LENGTH EACH INCH
415-0059-012	12.00±.25	.9250	11.10±.10
415-0059-024	24.00±.25	1.9250	23.10±.10
415-0059-036	36.00±.50	2.9250	35.10±.20
415-0059-048	48.00±.50	3.9250	47.10±.20
415-0059-060	60.00±.50	4.9250	59.10±.20

DRAWING NO.
B - 415-0059-001/999

0	REVISIONS

ENGINEERING RELEASE

1	2-4-02	RJB			

* REVISION NUMBER FOLLOWED BY AN ALPHA *
* CHARACTER INDICATES DRAWING CLARIFI- *
* CATION OR PART NUMBER ADDITION ONLY. *

1a	2-2-03	RJB			

* REVISION NUMBER FOLLOWED BY AN ALPHA *
* CHARACTER INDICATES DRAWING CLARIFI- *
* CATION OR PART NUMBER ADDITION ONLY. *

1b	7-10-06	PAT	JDS	RJB	MJU

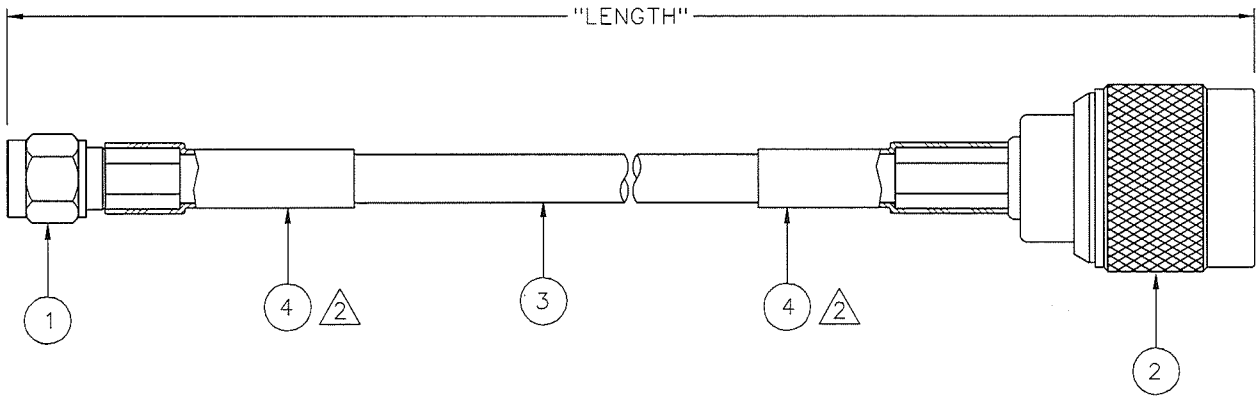

THIS DRAWING TO BE INTERPRETED PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

NOTES:

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS FOR A PERIOD OF ONE MINUTE.
2. POSITION AND SHRINK TUBING ONTO CABLE AND CRIMP SLEEVE.
3. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
4. ASSEMBLIES TO BE PACKAGED 1 PER BAG.

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY	DATE
DECIMALS	mm	RJB	2-3-02
.XX		CHECKED BY	DATE
.XXX			
MATL		APPROVED BY RJB	DATE 2-22-02
FINISH		RELEASE DATE	2-22-02
		U/M INCH	SCALE 2:1

EMERSON. Network Power
Connectivity Solutions
P.O. Box 1732
Waseca, MN 56093
1-800-247-8256

TITLE
CABLE ASSEMBLY, STR SMA PLUG TO STR N PLUG, RG 58

SHEET 1 OF 1

DRAWING NO.
B - 415-0059-001/999