

**Business Unit:** Electronics **PCN/17/014/C+N-US**  
**Product range:** SCRJ POF Products Date: 2017-08-31  
**Title:** SCRJ POF Tool Improvement of Cutting System Page 1/2

**Details of Product Changes**

**1. Concerned Part Numbers.**

- 09 35 000 9913 - SCRJ POF TOOL SET CUT
- 09 35 000 9914 - SCRJ POF TOOL SET CUT REPLACEMENT UNIT
- 09 35 000 9915 - SCRJ POF TOOL SET CUT CRIMP
- 09 35 000 9916 - SCRJ POF tool set replacement cutter
- 09 35 000 9917 - SCRJ POF tool set replacement crimp tool


**2. Description of the Changes**



**3. Impact on the Product Specification.**

All safety-cutting devices are supplied with an additional protective device (safety cover for cutting blade). This protection will increase work safety and decrease the risk of injury from the cutting blade. The cutting device is now designed for a capacity of 2500 cuts per cutting blade (the safety cutting device blocks automatically). The old cutting device had a maximum number of 1260 available cuts.


The use of the protective device without a change of this device by the manufacturer is not possible for SCRJ POF tools manufactured before May 2017. Therefore, the protective device needs to be removed prior to assembly with hexagon socket screw key 1.5mm (see photo 0). See the instruction manual below.

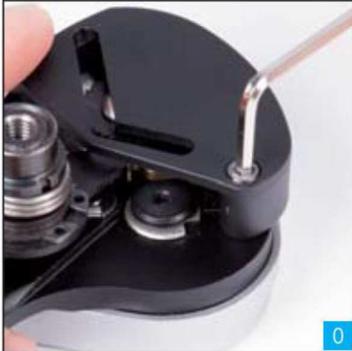

If the use of the additional safety device is desired, the new safety cutting system can also be retrofitted to the existing POF tools. Due to modifications of the technical design, this service has to be provided by HARTING. The tool needs to be send to HARTING for this modification since it is necessary to change specific parts on the tool.

Production date of SCRJ POF tool can be identified by checking the marking on the tool under the shell type handle. Therefore, please pull shell type handle from the tool carefully to view the date code. Please see picture A.

May 2017 = 0517

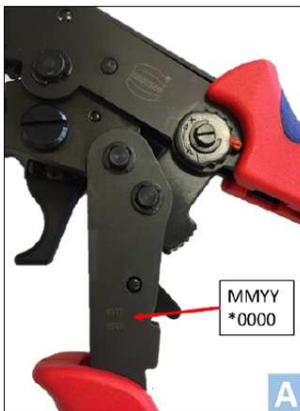

#### 4. Scheduled Date of Implementation.

**July 1<sup>st</sup> 2017**

In case of questions or concerns, please do not hesitate to contact our technical support.

Technical Support E-mail: [TechSupportUS@HARTING.com](mailto:TechSupportUS@HARTING.com)

Technical Support Phone Number: **866-278-0306** (Select option 3 for technical support).