

PRODUCT UPDATE

Written by

LEMO Product and Applications


7/23/18

#196


Subject: 4B Series: M Type Collet Reduction Cone Shape Change

Details: The shape of the reduction cone used in the 4B undersize collets will change slightly. The inner diameter remains the same, but the rear exterior section now has a different profile.

D and M type collets for B series

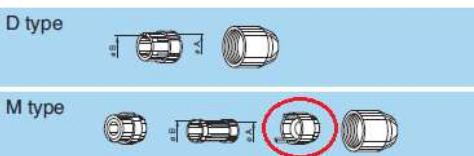

Reference		Collet ø		Cable ø	
Type	Code	ø A	ø B	max.	min.
4B	M 62	6.2	—	6.2	> 5.2
	M 72	7.2	—	7.2	> 6.2
	M 82	8.2	—	8.2	> 7.2
	M 92	9.2	8.6	9.2	> 8.2
	D 10	10.8	—	10.5	9.1
	D 12	12.3	—	12.0	10.6
	D 13	13.8	12.5	13.5	12.1
	D 15	15.3	12.5	15.0	13.6
	D 16	16.3	12.5	16.0	15.1

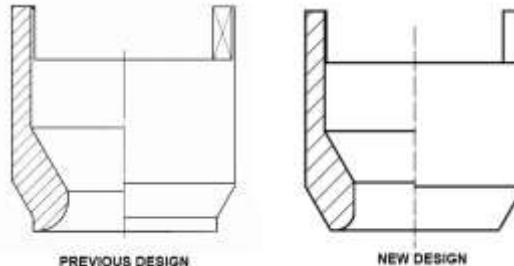

Timing of change:

New product will begin shipping as soon as inventory has been depleted!