


# GP Batteries


## Data Sheet

Model No.: GP14M


Type	Rechargeable Nickel Metal Hydride Prismatic Cell	
Nominal Dimension (with Sleeve)	T = 6.1 mm , W = 17.0 mm	L = 67.0 mm
Applications	Recommended discharge current 125 to 3750 mA	
Nominal Voltage	1.2V	
Capacity	Minimum: 1250 mAh Typical: 1400 mAh when discharge at 0.2C to 1.0V at 20°C	
Charging Condition	125 mA for 16hrs at 20°C	
Fast Charge	625 mA to 1250mA (0.5 to 1C) charge termination control recommended control parameters: -ΔV : 0 - 5mV DT/dt : 0.8°C/min (0.5 to 0.9C) : 0.8 - 1°C/min (1C) TCO : 45 - 50°C Timer : 110% nominal input	
Service Life	>500 cycles (IEC standard)	
Continuous Overcharge	125 mA maximum current for 7 days No conspicuous deformation and/or leakage	
Weight	About 23g	
Internal Resistance	About 35mΩ upon fully discharged at 1000Hz	
Max. Charging Voltage	1.5V at 125mA charging	
Ambient Temperature Range	Standard Charging	0 to 45°C
	Fast Charging	10 to 45°C
	Discharging	-20 to 50°C
	Storage	-20 to 35°C

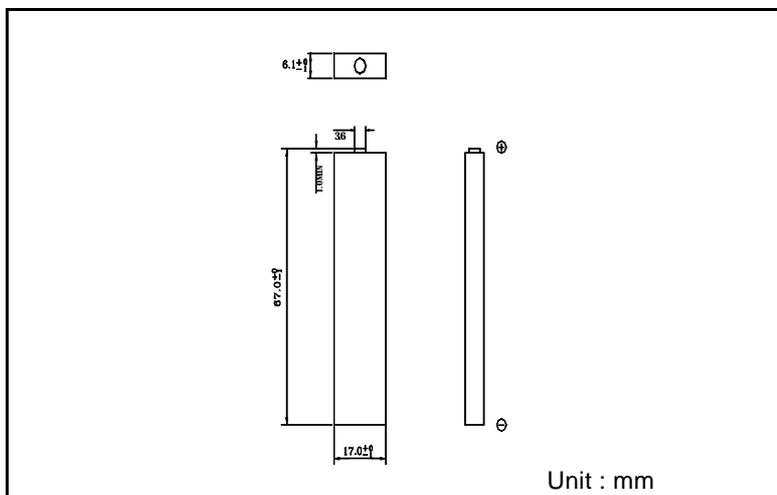


### Fast Charge (Charge control required)

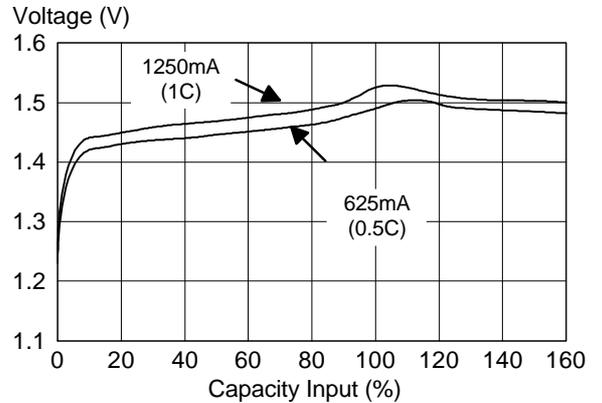

### Low Rate Discharge

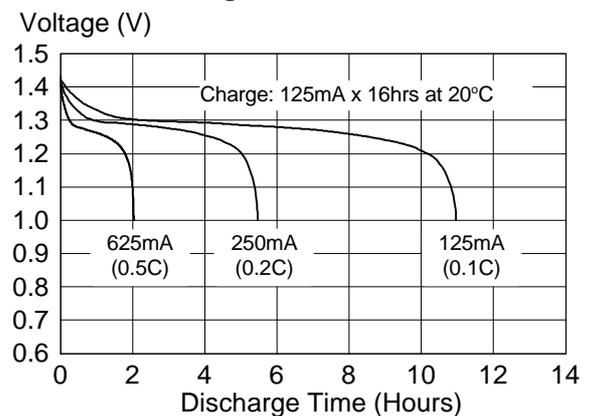

### High Rate Discharge

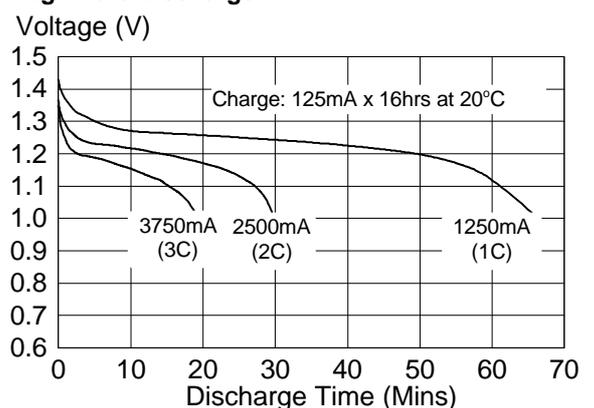

\* The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.