



3mm Round LEDs


■ Features :

- High luminous power.
- Can be driven at low current.
- 2.54mm lead spacing.
- Available on tape and reel.

■ Descriptions :

- The series is specially designed for applications requiring higher brightness.
- The LED lamps are available with different colors,intensities, epoxy colors, etc.

■ Package Dimensions:

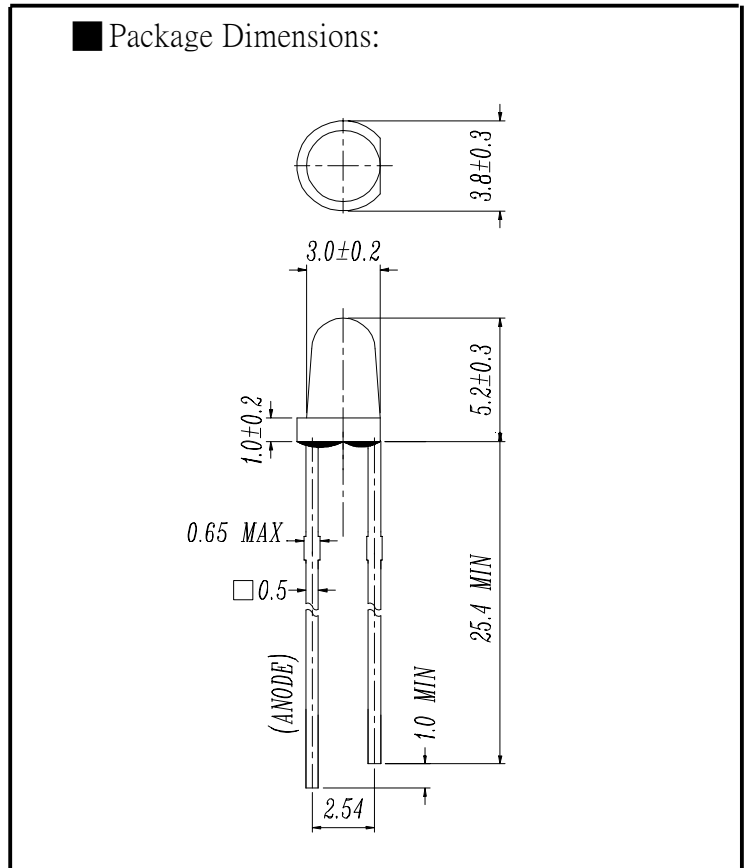

■ Applications :

- TV Set
- Monitor
- Telephone
- Computer

■ Notes :

- 1.All dimensions are in millimeters.
- 2.An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
- 3.Tolerances unless dimension ±0.25mm

PART NO	Chip		Lens Color
	Material	Emitted Color	
1224SUBC/C470/S400-A4	InGaN	Super Blue	Water Clear

B89102697.8910041

OFFICE : NO 25,Lane 76,Chung Yang Rd,Sec.3 Tucheng, Taipei 236, Taiwan, R.O.C.

TEL : 886-2-2267-2000,2267-9936 (22 Lines)







FAX : 886-2-2267-6189

http://www.everlight.com



3mm Round LEDs

■ Typical Electro-Optical Characteristic Curves

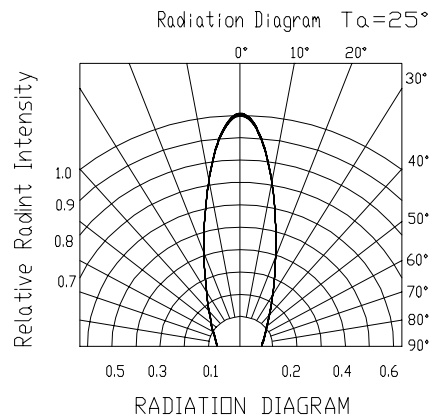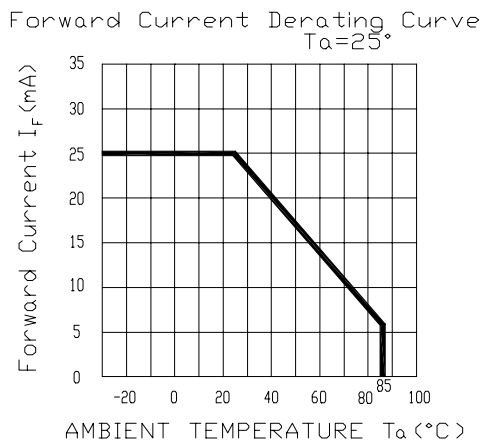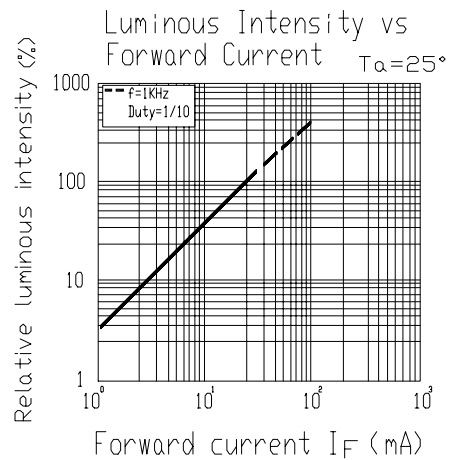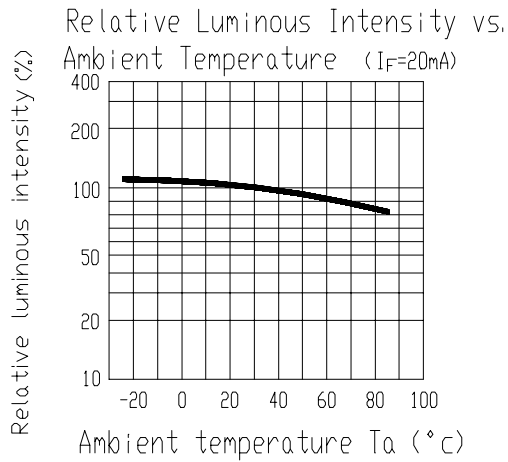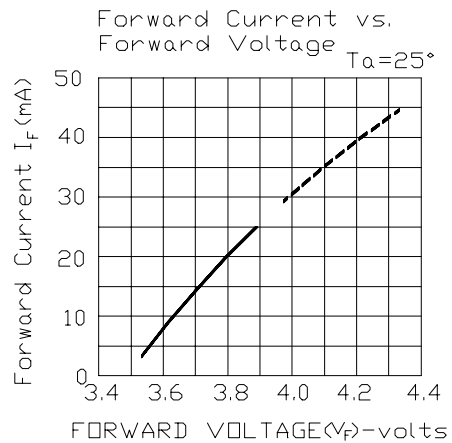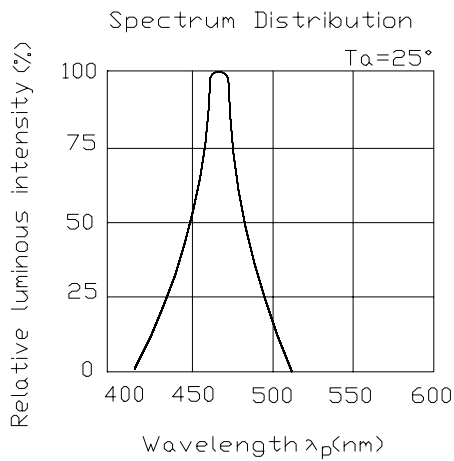



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : DLE-122-083 REV: 1.0

3mm Round LEDs

PART NO. : 1224SUBC/C470/S400-A4 ECN : _____ Page: 4/4

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C If=20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1