

ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY						
REV	DESCRIPTION	DATE	APPROVED			
-	DCN 38594	09/11	STW			

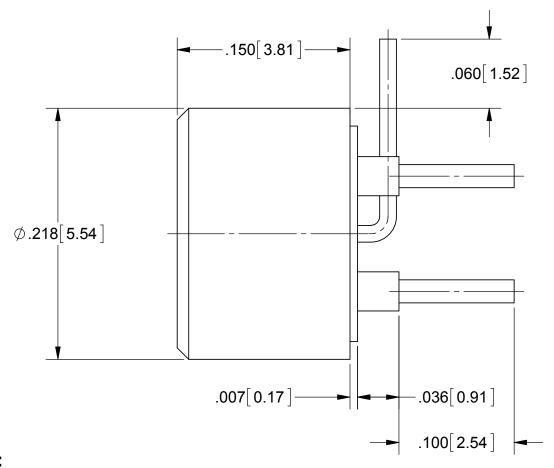

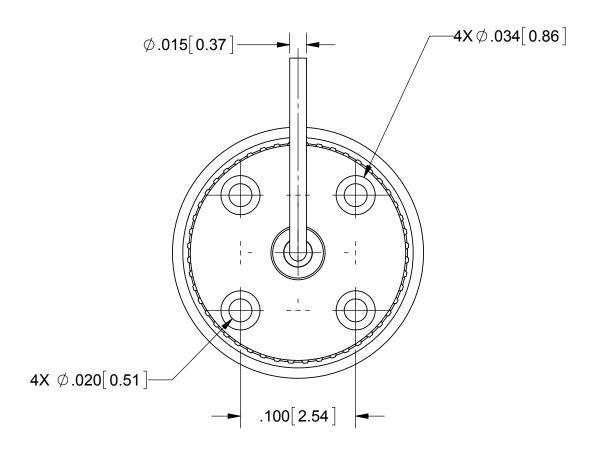

MATERIAL:

BODY:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

CONTACT: BRASS PER ASTM B16, ALLOY UNS No. C36000

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

BODY: PASSIVATED PER AMS-2700.

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN. CONTACT:

PERFORMANCE:

IMPEDANCE: 50 OHMS FREQ. RANGE: DC TO 20.0 GHz

NOTES:

1. FOR RECOMMENDED FOOTPRINT TO YOUR SPECIFIC PCB, CONTACT SV MICROWAVE SALES DEPARTMENT (sales@svmicro.com, 561-840-1800).

MATERIAL: SE	EE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′	UNLESS OTHERWISE SPECIFIED		SV Microwave, Inc.			
FINISH: SEE NOTES SURFACE AREA: N/A		DECIMAL: .X ±.030XX ±.010XX ±.010XXX ±.005XXX ±.005	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 15T & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA:S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS		2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409			
					TITLE: SMPM MALE FD 4-LEG PCB MOUNT WITH R/A CONTACT			
PROPRIETARY		PER ASME Y14.5M - 1994						
	ATION CONTAINED IN THIS DRAWING PROPERTY OF SV MICROWAVE, INC. IUCTION IN PART OR AS A WHOLE E WRITTEN PERMISSION OF VE, INC IS PROHIBITED.	THIRD ANGLE PROJECTION	DRAWN:	FSG 09/30/11				
ANY REPRODUCTION			CHECKED:	STW 09/30/11	B 95077	SI SI	F3211	-60033
			APPROVED:	STW 09/30/11	SCALE: 12:1			SHEET 1 OF 1