



CAVITY COAXIAL

Bandpass Filter

ZVBP-435-S+

50Ω 425 to 445 MHz SMA Female

KEY FEATURES

- Low Insertion Loss, 0.9dB Typ.
- Good Return Loss, 18dB Typ.
- High Rejection, 80dB Typ.
- Wide Stopband up to 1750MHz

APPLICATIONS

- ISM band - RFID, Low Power Communications.




Generic photo used for illustration purposes only

PRODUCT OVERVIEW

Mini-Circuits' ZVBP-435-S+ is a coaxial cavity filter designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications.

Mini-Circuits' coaxial cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical.

FUNCTIONAL DIAGRAM

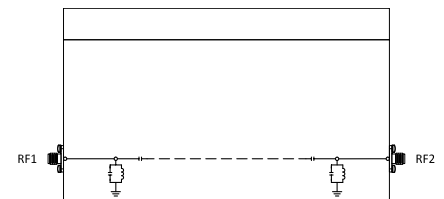

ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	—	—	—	435	—	MHz
	Insertion Loss	F1-F2	425 - 445	—	0.9	1.5	dB
	Return Loss	F1-F2	425 - 445	14	18	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 400	65	72	—	dB
		F3-F4	400 - 412	40	46	—	
		F4-F5	412 - 417	20	28	—	
Stop Band, Upper	Rejection	F6-F7	453 - 458	20	28	—	dB
		F7-F8	458 - 470	40	49	—	
		F8-F9	470 - 1750	65	80	—	

1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

ABSOLUTE MAXIMUM RATINGS^{2,3}


Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁴	50W at +25°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Input and output ports are DC short to ground.

4. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

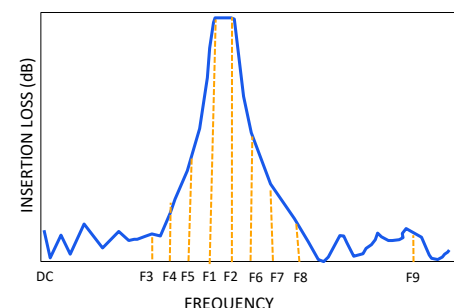

REV. OR
ECO-019638
ZVBP-435-S+
EDU4635
URJ
231219





CAVITY COAXIAL





Bandpass Filter

ZVBP-435-S+

Mini-Circuits

50Ω 425 to 445 MHz SMA Female

TYPICAL PERFORMANCE GRAPHS

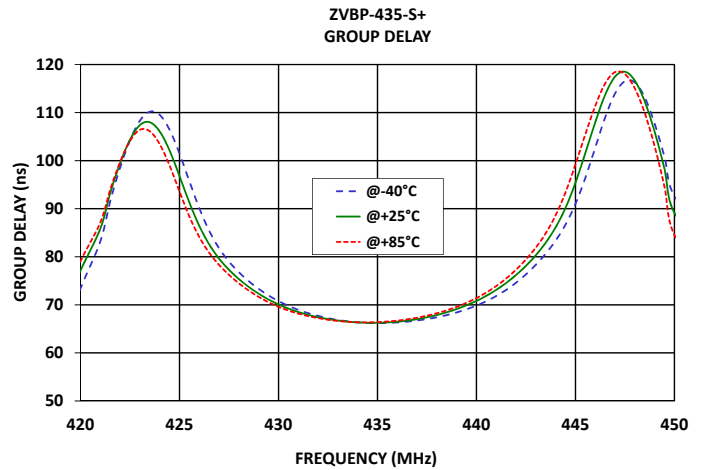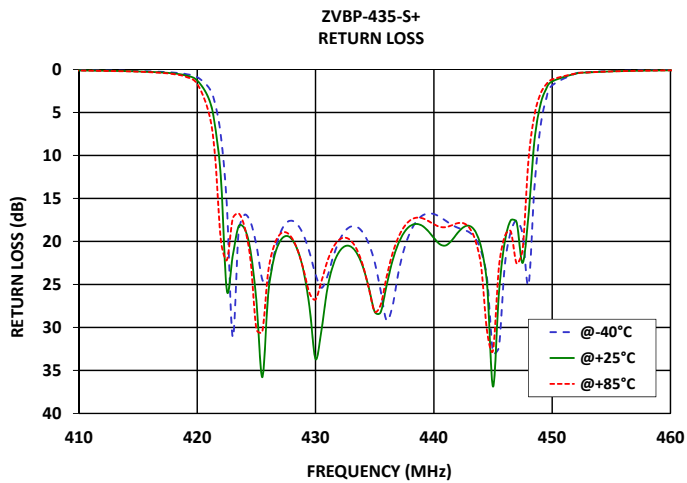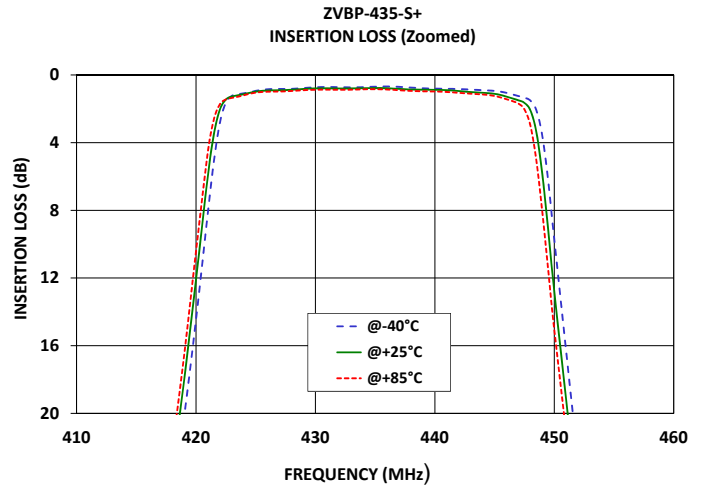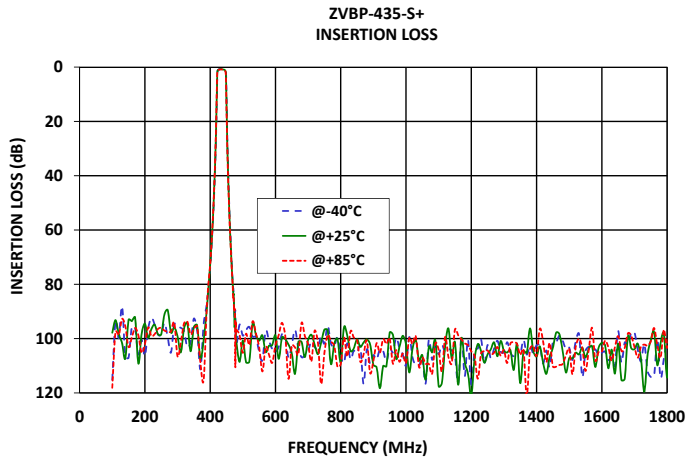



Bandpass Filter

50Ω 425 to 445 MHz SMA Female

Function	Marking on Unit	Connector
RF1 ¹	1	SMA Female
RF2 ¹	2	SMA Female

Technical drawing of a 12-pin D-sub connector showing front, side, and top views with dimensions in inches and millimeters.

Front View (Left):

- Pin specification: 4 X Ø.145 [Ø3.68]
- Pin style: THRU
- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .71 [18.0] TYP

Side View (Top):

- Pin diameter: .14 [3.4] TYP
- Pin spacing: .75 [19.1]
- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .14 [3.4] TYP

Top View (Bottom):

- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .71 [18.0] TYP
- Pin diameter: .14 [3.4] TYP
- Pin spacing: .75 [19.1]
- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .14 [3.4] TYP

Dimensions:

- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .71 [18.0] TYP
- Pin diameter: .14 [3.4] TYP
- Pin spacing: .75 [19.1]
- Pin diameter: .08 [2.4.9] TYP
- Pin spacing: .14 [3.4] TYP

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .100$; 3 Pl. $\pm .015$

*Marking may contain other features or characters for internal lot control.





CAVITY COAXIAL

Bandpass Filter

ZVBP-435-S+

50Ω 425 to 445 MHz SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	ZJ3545
RoHS Status	Compliant
Environmental Ratings	ENV77T1

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZVBP-435-S+](#)