



CAVITY COAXIAL

Bandpass Filter

ZVBP-7916R25-S+

Mini-Circuits

50Ω 7682.5 to 8150 MHz SMA Female

KEY FEATURES


- Low Insertion Loss, 0.5dB Typ.
- Good Return Loss, 20dB Typ.
- Great Rejection, 90dB Typ.
- Stopband up to 15GHz.

APPLICATIONS

- Test and Measurements.


PRODUCT OVERVIEW

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 3% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.



Generic photo used for illustration purposes only

FUNCTIONAL DIAGRAM



ELECTRICAL SPECIFICATIONS^{1,2} AT +25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	Center Frequency	Fc	—	—	7916.25	—	MHz
	1dB Bandwidth	—	—	467.5	—	—	MHz
	Insertion Loss	Fc	7916.25	—	0.5	0.9	dB
	Return Loss	F1-F2	7682.5 - 8150	15	20	—	dB
Stop Band, Lower	Rejection	DC-F3	DC - 6717.5	70	93	—	dB
		F3-F4	6717.5 - 7481.25	35	43	—	
		F4-F5	7481.25 - 7495	33	40	—	
		F5-F6	7495 - 7600	10	18	—	
Stop Band, Upper	Rejection	F7-F8	8230 - 8335	10	18	—	dB
		F8-F9	8335 - 8350	35	43	—	
		F9-F10	8350 - 9300	38	46	—	
		F10-F11	9300 - 15000	70	94	—	

1. This filter is bi-directional RF1 and RF2 ports may be interchanged, see S-Parameters for actual performance.

ABSOLUTE MAXIMUM RATINGS^{2,3}


Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Input Power ⁴	10W at 25°C

2. Permanent damage may occur if any of these limits are exceeded.

3. Input and output ports are DC short to ground.

4. Power rating applies only to signals within the passband.

TYPICAL FREQUENCY RESPONSE AT +25°C

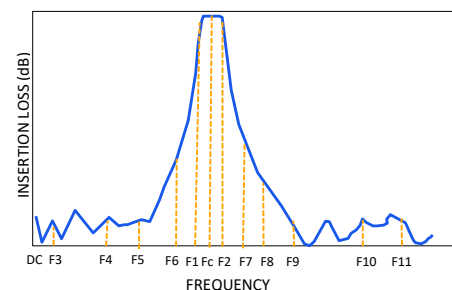

Mini-Circuits

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
ECO-020489
ZVBP-7916R25-S+
EDU4747
URJ
240104

PAGE 1 OF 4



CAVITY COAXIAL





Bandpass Filter

ZVBP-7916R25-S+

Mini-Circuits

50Ω 7682.5 to 8150 MHz SMA Female

TYPICAL PERFORMANCE GRAPHS

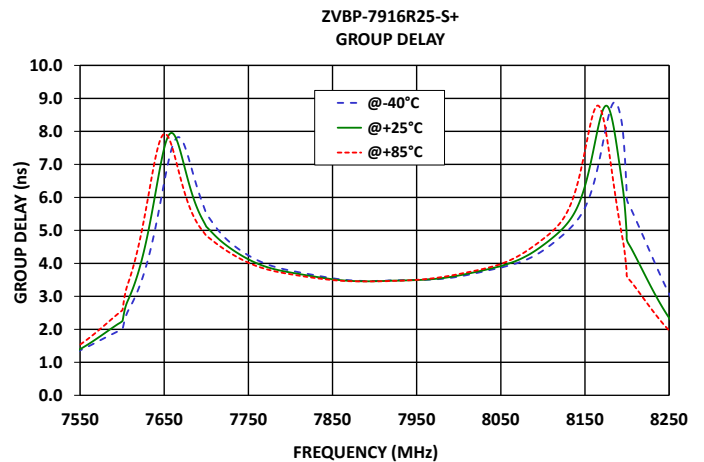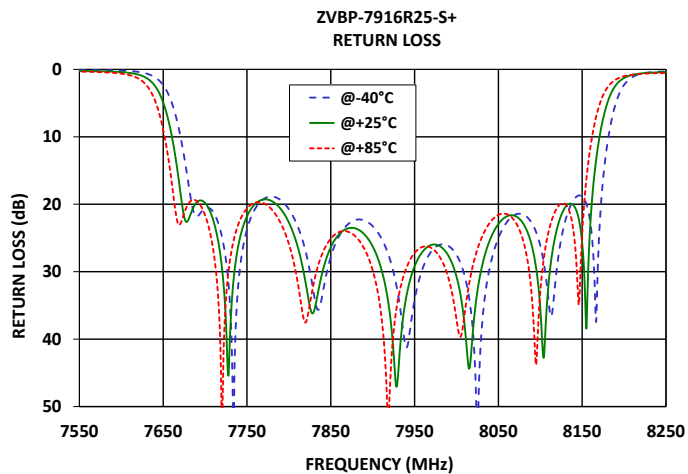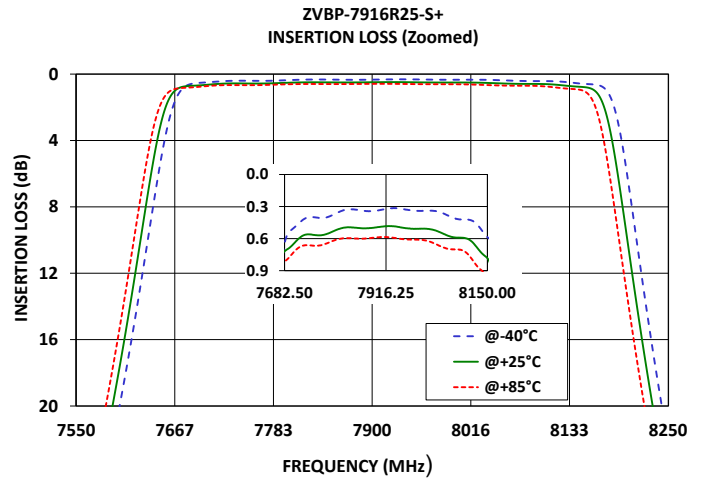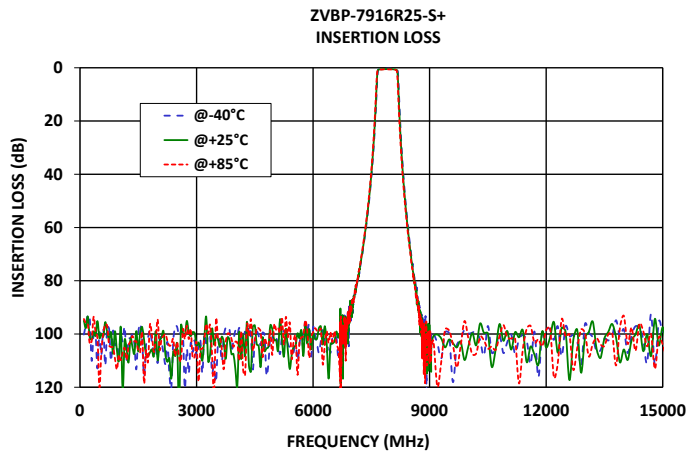



CAVITY COAXIAL

Bandpass Filter

ZVBP-7916R25-S+


Mini-Circuits

50Ω 7682.5 to 8150 MHz SMA Female

CONNECTOR DESCRIPTION

Function	Marking on Unit	Connector
RF1 ¹	1	SMA Female
RF2 ¹	2	SMA Female

CASE STYLE DRAWING

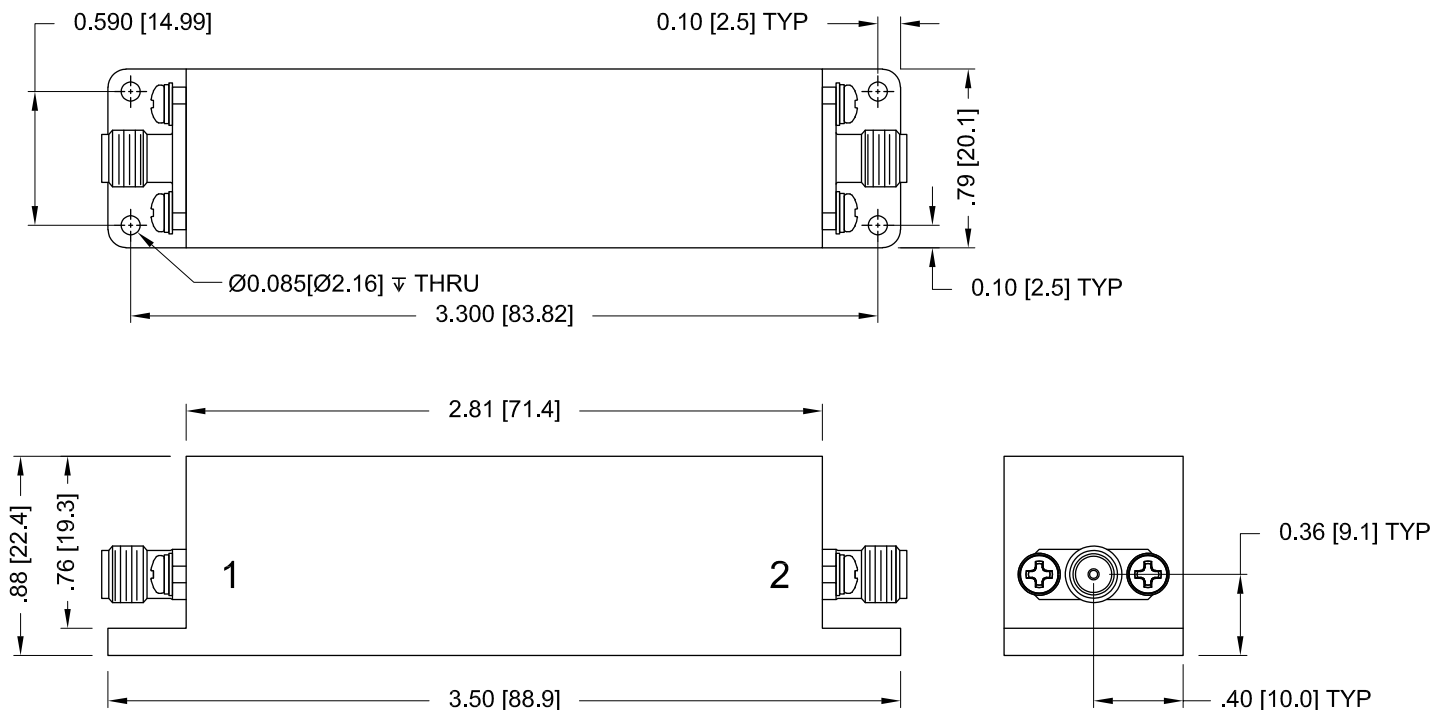

Unit Weight: 86 Grams.

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .100$; 3 Pl. $\pm .015$

PRODUCT MARKING*: ZVBP-7916R25-S+

*Marking may contain other features or characters for internal lot control.





Mini-Circuits

CAVITY COAXIAL

Bandpass Filter

ZVBP-7916R25-S+

50Ω 7682.5 to 8150 MHz SMA Female

ADDITIONAL INFORMATION IS AVAILABLE ON OUR DASHBOARD

[CLICK HERE](#)

Performance Data & Graphs	Data
	Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	ZU3551
RoHS Status	Compliant
Environmental Ratings	ENV46

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZVBP-7916R25-S+](#)