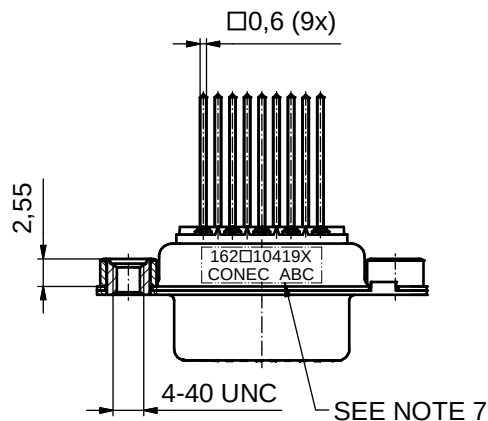
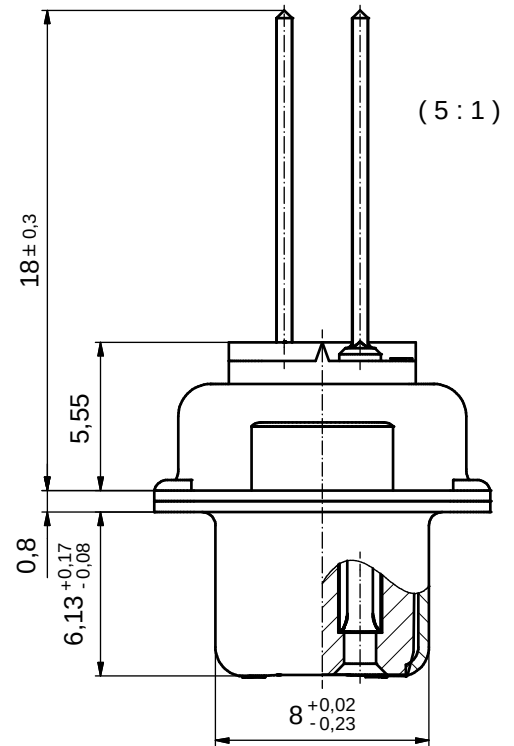
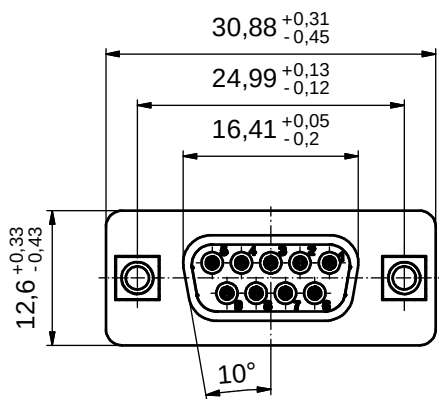


NOTES:

- METAL SHELLS: STEEL; 315µm-470µm ZINC; YELLOW CHROMATE
- INSULATORS: PBT GF UL 94 V-0; BLACK
- CONTACTS: COPPER ALLOY; PLATING: (SEE PART NO.):
☐ PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
☐ PLEASE ADD B for 20µm HARD GOLD over min. 50µm NICKEL
☐ PLEASE ADD C for 30µm HARD GOLD over min. 50µm NICKEL
- THREADED INSERTS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- COLLARS: COPPER ALLOY; min. 200µm TIN over 80µm NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: 162□10419X CONEC ABC (see note 3)

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND				tolerance		 dim. in mm	scale: 2:1 (5:1)					
							material: SEE NOTES					
								date	name	title: D-SUB FEMALE 9pos. WIRE WRAP with threaded insert		
								drawn	26.03.13			Lehmenkühler
								appd.	27.03.13			Fischer
								norm				
								d-old		dwg no: Inventor 10 16K1A3213 sh: 1		
												
a	Original											
rev.	description	date	name			part no: 162□10419X (see note 3)						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)
[162A10419X](#)