

# Photoelectrics

## Fork Sensor

### Type PF80 FNT .. BP .. T



- Slot width of 3 mm
- Settings: Standard and fine mode
- Teach-In: Push button or by wire
- Universal output: NPN, PNP, NO or NC
- Teach-In lock
- High speed of detection
- Detection of transparent material



## Product Description

Detection of labels, marks and double sheets, as well as holes and edges are typical applications for the PF80 fork sensor.

The sensor is made in a strong aluminium housing with 8 mm plug for fast disconnection.

## Ordering Key

**PF80FNT03BPM5T**

Type \_\_\_\_\_  
 Housing style \_\_\_\_\_  
 Housing size \_\_\_\_\_  
 Housing material \_\_\_\_\_  
 Housing length \_\_\_\_\_  
 Detection principle \_\_\_\_\_  
 Slot width (mm) \_\_\_\_\_  
 Output type \_\_\_\_\_  
 Output configuration \_\_\_\_\_  
 Connection type \_\_\_\_\_  
 Teach-In mode \_\_\_\_\_

## Type Selection

Housing W x H x D	Slot width	Ordering no. NPN, PNP, make or break switching
12 x 37.5 x 80 mm	3 mm	<b>PF 80 FNT 03 BPM5T</b>


## Specifications

<b>Fork width</b>	3 mm	<b>Response times</b>	OFF-ON ( $t_{ON}$ ) ON-OFF ( $t_{OFF}$ )	$\leq 50 \mu s$ $\leq 50 \mu s$
<b>Sensitivity</b>		<b>Power ON delay (<math>t_v</math>)</b>		$\leq 300 \text{ ms}$
Teach-In through switch or wire	ET to V+	<b>Output function</b>	NPN and PNP Make or break (light or dark)	Available (push-pull output) Programmed by reversing power supply
Standard setting	1 pulse 0.3 ... 4 s	<b>Indication (function)</b>	Uninterrupted light path	LED, red
Fine setting	1 pulse 0.3 ... 4 s + 1 pause 0.3 ... 1.3 s + 1 pulse 0.3 ... 4 s		Free light path	LED, yellow
<b>Temperature drift</b>	$\leq 0.4\text{ }^{\circ}\text{C}$	<b>Environment</b>	Installation category	I (IEC 60664/60664A; 60947-1)
<b>Rated operational volt. (<math>U_B</math>)</b>	10 to 30 VDC (ripple included)		Pollution degree	3 (IEC 60664/60664A; 60947-1)
<b>Ripple (<math>U_{pp}</math>)</b>	$\leq 10\%$		Degree of protection	IP 65 (IEC 60529; 60947-1)
<b>Output current</b>		<b>Ambient temperature</b>	Operating Storage	-20° to +60°C (-4° to +140°F) -20° to +80°C (-4° to +176°F)
Continuous ( $I_e$ )	$\leq 100 \text{ mA}$	<b>Vibration</b>		10 to 150 Hz, 0.5 mm/7.5 g (IEC 60068-2-6)
Short-time ( $I_l$ )	$\leq 100 \text{ mA}$	<b>Shock</b>		2 x 1 m and 100 x 0.5 m (IEC 60068-2-6, 60068-2-32)
<b>No load supply current (<math>I_o</math>)</b>	$\leq 40 \text{ mA}$			
<b>Voltage drop (<math>U_d</math>)</b>	$\leq 2 \text{ VDC} @ 100 \text{ mA}$ $\leq 1 \text{ VDC} @ 10 \text{ mA}$			
<b>Protection</b>	Short-circuit, transients			
<b>Light type</b>	Infrared, incandescent light			
<b>Ambient light</b>	$\leq 3,000 \text{ lux}$			
<b>Operating frequency</b>	10 kHz			

## Specifications (cont.)


Rated insulation voltage	50 VAC (rms)
Housing material	
Body	Aluminium, black
Connection	
Plug	M8 x 1, 4-pin, NPB
Weight	Approx. 60 g
CE-marking	Yes

## Dimensions

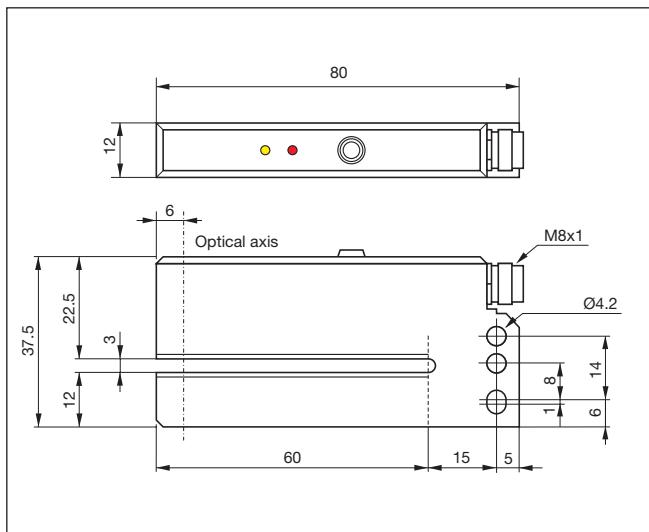


## Wiring Diagrams

### Light Switching

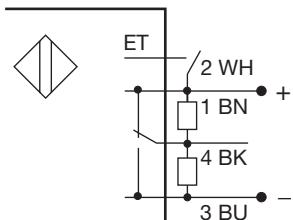


### Dark Switching

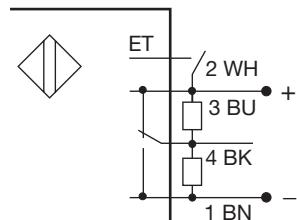


## Installation Hints

To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables

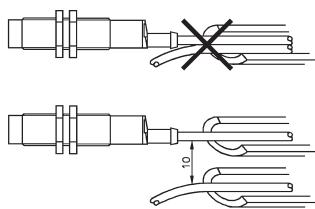


Relief of cable strain

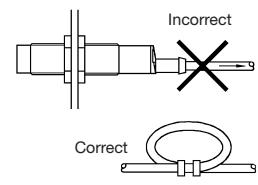


The cable should not be pulled

Protection of the sensing face

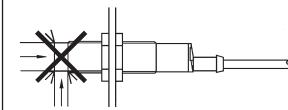

A proximity switch should not serve as mechanical stop

Switch mounted on mobile carrier

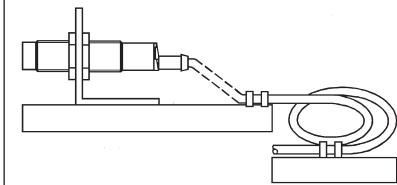

Any repetitive flexing of the cable should be avoided

## Delivery Contents

- Photoelectric switch: PF 80 FNT 03 BPM5T
- Packaging: Cardboard box

## Accessories

- Connector type CONG5A-.. series

## Teach-In Procedure


### Teach-in

The switching threshold is set as described in the following **Teach-in Procedure**. This can be done via the ET wire (External Teach) or by using the Teach-in button on the sensor.

### Fine setting:

Press twice and the yellow LED flashes.

*NB! The last taught settings are always stored in the sensor.*

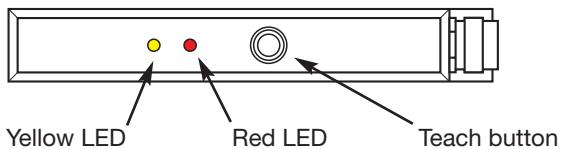

Yellow LED      Red LED      Teach button

### Lock and unlock Teach-in

Lock Teach-in function: Press the teach button for approximately 6 s until the red LED lights continuously. Unlock Teach-in function: Press teach button for approximately 6 s until the red LED goes off.

Red LED:	Teach-in lock
Red LED, flashing (2 s):	Standard Teach-in
Yellow LED:	ON
Yellow LED, flashing (2 s):	Fine Teach-in
Red + Yellow, flashing:	Short-circuit or object too opaque

### Teach-in Procedure

- 1) Place the object in the fork opening covering the light beam.
- 2) Activate Teach-in using the teach button or via the ET wire:

### Standard setting:

Press once and the red LED flashes (standard hysteresis).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi](#):

[PF80FNT03BPM5T](#)