

Material	High Conductivity Seamless Copper Tube						
Plating	Min .000050" Nickel underplate, Min .000200" Silver plating						
Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL				─ .42±.04	ļ	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric						
Wire Strip Length	7/16 in.	.36 RE	F   <del>(</del>	<del>                                     </del>	14-10 SILVER	$\left( \cdot \right)$	<del>)</del>
Stud Size	1/4 in.	<b>│</b>			· · · · · · · · · · · · · · · · · · ·		
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.25±.04 -		4	.75±.02	1.91±.06	<u>\</u>
UL Temperature Rating	90° C		7			1.91±.06	
C.S.A Certified Wire Connector	N/A						
Panduit Color Code on Barrel	N/A						
Panduit Die Index No. on Barrel	N/A		١٨	lira ins	oection v	vindow	
Alternate Industry Die Index No. ( ) on Barrel	N/A	_	<u> </u>		Jechon v		_



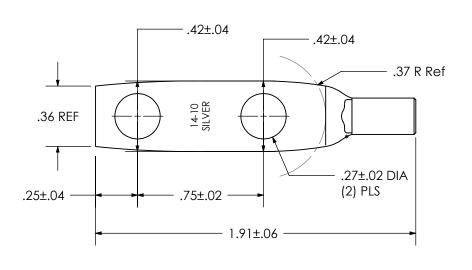

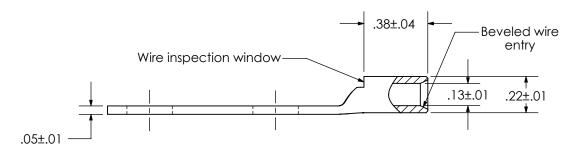

							NOTE: DIMENSIONS AND TOLERANCES ARE IN INCHES	
							CORP. TINLEY PARK, ILLINOIS	
							LCD10-14BNS-L	
06	6-23	JHNU	DAEI	MRWA	B. REVISED TONGUE SHAPE A. ADDED TONGUE WIDTH DIMENSIONS	129336	Copper Lug - Two-Hole, Standard Barrel	
REV	DATE	BY	СНК	APP	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCD10-14BNS-CUST	