

Juno® Family of Velocity & Torque Control ICs



The Juno Family of ICs provide advanced velocity and torque control for Brushless DC, DC Brush, and step motors. They are the industry's first family of compact ICs with full four quadrant motion control, direct input quadrature encoder, profile generation, and advanced current control.

Juno ICs are targeted for medical, scientific, industrial, and robotic applications that need to minimize motor noise, vibration and power consumption. Juno ICs are easy to deploy with embedded motion commands, on-board intelligence, and direct analog and digital amplifier signal interfacing.

Easy Integration

Juno ICs interface to external bridge-type switching amplifiers and utilize Performance Motion Device's proprietary current and switch-signal technology for ultra smooth operation. Depending on the type of motor controlled, Juno ICs provide motor commutation, microstep generation, pulse and direction input, internal profile generation, and much more.

Integrated Safety Features

Juno ICs are equipped with advanced amplifier management features such as overcurrent, over/undervoltage, and overtemperature sense. A special outer control loop allows a wide range of motor-related control applications, including pressure, flow rate and temperature control.

Flexible Offering

Juno ICs are offered in three major product groups:

- Juno Velocity Control ICs
- Juno Step Motor Control ICs
- Juno Torque Control ICs

No matter what your motor control application, there is a Juno IC that will take your application to a higher level.


MEET THE FAMILY

- **Velocity Control ICs:** Sophisticated velocity and torque control of 3-phase DC Brush and Brushless DC motors
- **Torque Control ICs:** Ultra precise torque control for 3-phase Brushless DC and DC Brush motors with direct analog or SPI command input
- **Step Motor Control ICs:** State of the art step motor control with pulse and direction or SPI command input

FEATURES


- Controls 3-phase DC Brush, Brushless DC, or step motors
- High performance digital current loop
- Velocity loop with encoder or tachometer feedback
- Internal profile generator
- Sinusoidal or 6-step commutation
- Field Oriented Control
- Hall sensor inputs
- PWM output with shoot-through protection
- Direct analog signal input
- Serial port up to 460 kBaud
- Quadrature encoder input up to 40 Mcounts/sec
- NVRAM configuration load and trace memory
- Compact 64-pin TQFP and ultra-compact 56-pin VQFN packages
- High speed index input and capture
- SPI (serial peripheral interface) command input
- Brake signal input
- 10 kHz velocity loop
- 20, 40, 80, 120 kHz PWM rate
- 20 or 40 kHz commutation and current loop rate
- i2t current foldback protection
- Over and under-voltage protection
- Pulse and direction input

CONFIGURATION

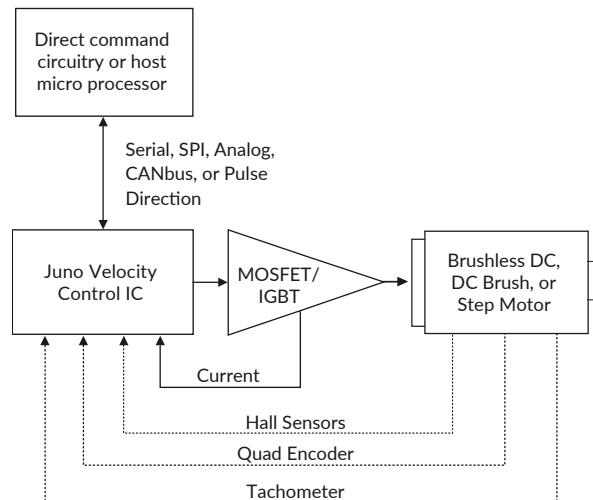

JUNO® VELOCITY CONTROL ICs

TECHNICAL OVERVIEW

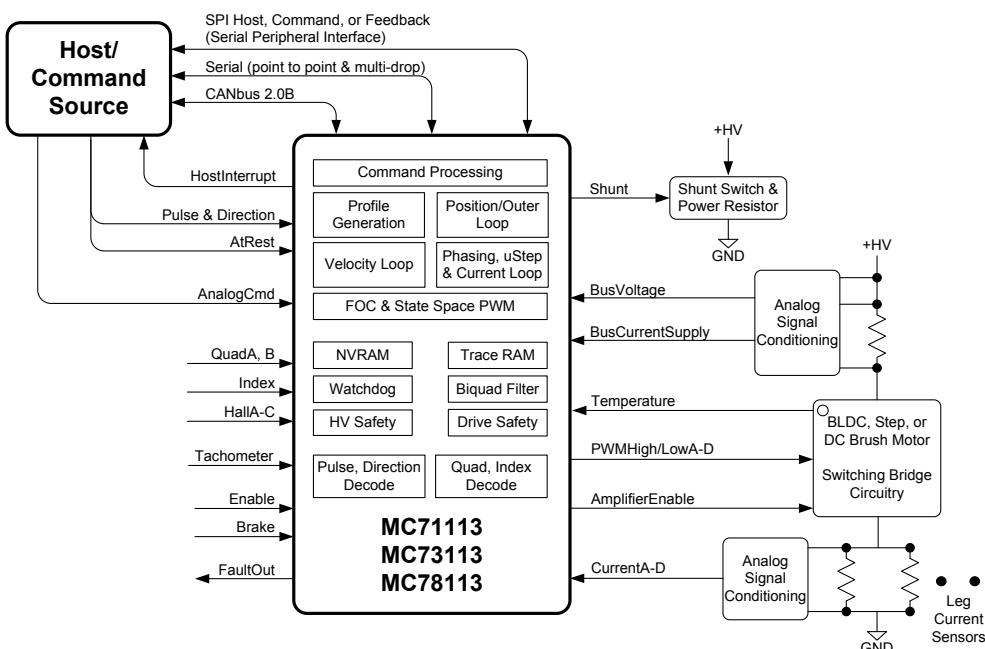

PART NUMBERS


MC71113	64-pin TQFP DC Brush
MC73113	64-pin TQFP Brushless DC
MC78113	64-pin TQFP DC Brush Brushless DC Step (motor type user set)

SPECIFICATIONS – JUNO VELOCITY CONTROL ICs

Parameters	Value	Parameters	Value
Motors supported	3-phase Brushless DC, DC Brush, 2-phase step motor	Velocity feedback options	Quadrature encoder, Hall sensors, analog tachometer signal (12-bit A/D resolution)
Operating modes	Standalone: direct command input via external circuitry (onboard NVRAM holds configuration), Host command: microprocessor command input	Position command options	Pulse and direction, Digital SPI (16-bit resolution), Internal profile generator
Control loops	Position/outer loop, velocity loop, current loop	Velocity and torque command options	Analog signal (12-bit A/D resolution), Digital SPI (16-bit resolution), Internal profile generator
Current control modes	FOC (field oriented control), Third leg floating, Single-phase, Voltage mode (no current control)	Control/status signals	Enable, FaultOut, Hostinterrupt, Brake
Commutation modes	6-step (using Hall sensors) Sinusoidal (with quadrature encoder input)	Motor drive signals	PWM High/LowA-D, AmplifierEnable, CurrentA-D
Motor output modes	Individual high/low PWM, Sign/Magnitude PWM	DC Bus safety signals	Shunt, BusVoltage, BusCurrentSupply, Temperature
Microstep per full step	Programmable up to 256 microsteps/full step	Motor feedback signals	QuadA, QuadB, Index, HallA-C, Tachometer, digital SPI
Profile generator parameters	Velocity, acceleration, deceleration	Max quadrature rate	40 Mcounts/second
Communication modes	Point-to-point asynchronous serial, Multi-drop asynchronous serial, SPI, or CANbus 2.0	Max SPI frequency	10 MHz
Serial baud rate range	1,200 to 460,800 baud	Position/outer loop rate	Programmable up to 10 kHz
CANbus baud rate range	10,000 to 1,000,000 baud	Velocity loop rate	Programmable up to 10 kHz
Internal trace RAM	6,144 16-bit words	Current loop rate	20 kHz
Internal NVRAM	1,024 16-bit words	Commutation rate	20 kHz
		PWM rate	20, 40, 80, 120 kHz
		Dimension	64-pin TQFP: 12 mm x 12 mm including leads

JUNO® TORQUE CONTROL ICs

TECHNICAL OVERVIEW

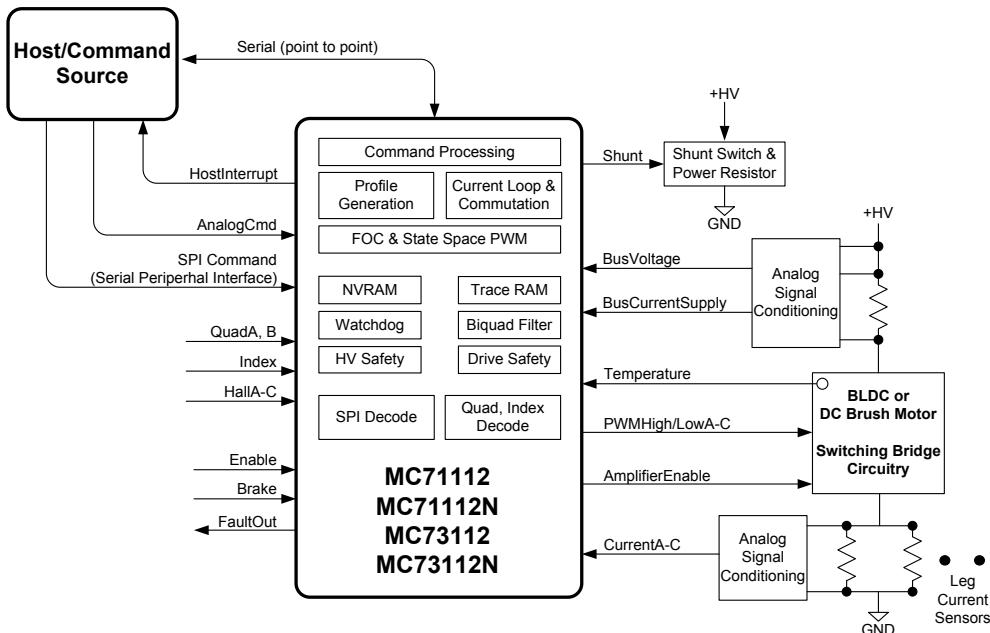

PART NUMBERS


MC71112	64-pin TQFP DC Brush
MC71112N	56-pin VQFN DC Brush
MC73112	64-pin TQFP Brushless DC
MC73112N	56-pin VQFN Brushless DC

SPECIFICATIONS – JUNO TORQUE CONTROL ICS

Parameters	Value	Parameters	Value
Motors supported	3-phase Brushless DC, DC Brush	Torque command options	Analog signal (12-bit A/D resolution), Digital SPI (16-bit resolution), Internal profile generator, Direct set register
Operating modes	Standalone: direct command input via external circuitry (onboard NVRAM holds configuration), Host command: microprocessor command input via serial	Control/status signals	Enable, FaultOut, Hostinterrupt, Brake
Control loops	Current loop	Motor drive signals	PWM High/LowA-C, AmplifierEnable, CurrentA-C
Commutation modes	6-step (using Hall sensors), Sinusoidal (with quadrature encoder input)	DC Bus safety signals	Shunt, BusVoltage, BusCurrentSupply, Temperature
Current control modes	FOC (field oriented control), Third leg floating, Single-phase, Voltage mode (no current control)	Motor feedback signals	QuadA, QuadB, Index, HallA-C
Motor output modes	Individual high/low PWM, Sign/Magnitude PWM	Max quadrature rate	40 Mcounts/second
Communication modes	Point-to-point asynchronous serial	Max SPI frequency	10 MHz
Serial baud rate range	1,200 to 460,800 baud	Current loop rate	20 kHz
Internal trace RAM	6,144 16-bit words	Commutation rate	40 kHz
Internal NVRAM	1,024 16-bit words	PWM rate	20, 40, 80, 120 kHz
		Dimension	64-pin TQFP: 12 mm x 12 mm including leads 56-pin VQFN: 7.2 mm x 7.2 mm

JUNO® STEP MOTOR CONTROL ICs

TECHNICAL OVERVIEW

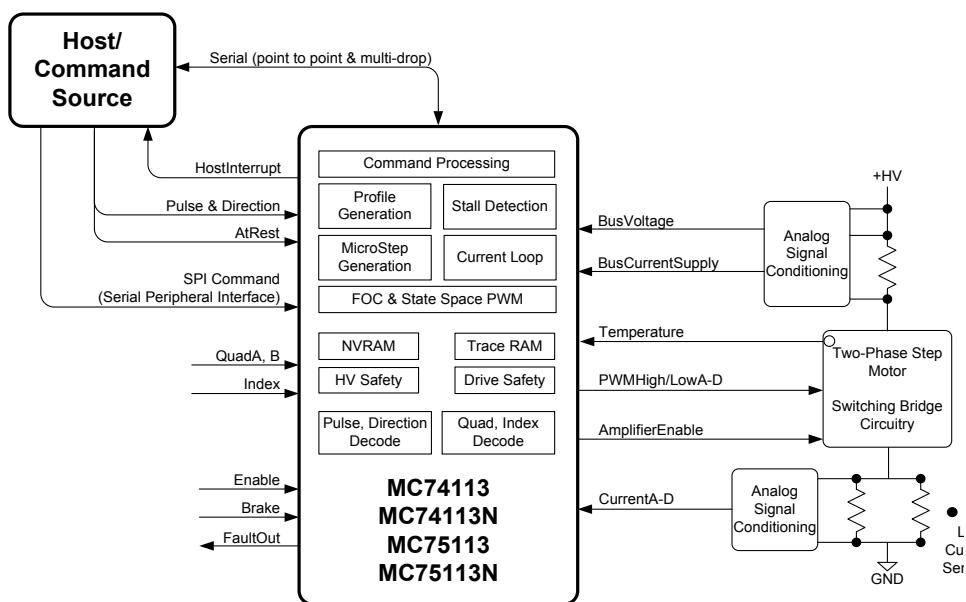

PART NUMBERS

MC74113	64-pin TQFP Step motor with encoder
MC74113N	56-pin VQFN Step motor with encoder
MC75113	64-pin TQFP Step motor
MC75113N	56-pin VQFN Step motor

SPECIFICATIONS – JUNO STEP MOTOR CONTROL ICs

Parameters	Value
Motors supported	2-phase step motor
Operating modes	Standalone: direct command input via external circuitry (onboard NVRAM holds configuration), Host command: microprocessor command input via serial
Control loops	Current loop
Current control modes	FOC (field oriented control), Voltage mode (no current control)
Motor output modes	Individual high/low PWM, Sign/Magnitude PWM
Microstep per full step	Programmable up to 256 microsteps/full step
Stall detection	Via encoder
Profile generator parameters	Velocity, acceleration, deceleration
Communication modes	Point-to-point asynchronous serial
Serial baud rate range	1,200 to 460,800 baud
Internal trace RAM	6,144 16-bit words
Internal NVRAM	1,024 16-bit words

Parameters	Value
Position command options (with AtRest signal)	Pulse and direction, Digital SPI (16-bit resolution), Internal profile generator
Control/status signals	Enable, FaultOut, Hostinterrupt, Brake
Motor drive signals	PWM High/LowA-D, AmplifierEnable, CurrentA-D
DC Bus safety signals	BusVoltage, BusCurrentSupply, Temperature
Motor feedback signals	QuadA, QuadB, Index
Max quadrature rate	40 Mcounts/second
Max SPI frequency	10 MHz
Current loop rate	20 kHz
Microstep synthesis rate	40 kHz
PWM rate	20, 40, 80, 120 kHz
Dimension	64-pin TQFP: 12 mm x 12 mm including leads 56-pin VQFN: 7.2 mm x 7.2 mm

Development Tools

1

EASY START-UP Developers Kit


INCLUDES

- MC78113, MC73112N, or MC74113N Developer Kit boards
- Pro-Motion software
- Software Development Kit (SDK) with C-Motion
- Complete manual set
- Complete cable connector set



2

TUNE & OPTIMIZE Pro-Motion GUI

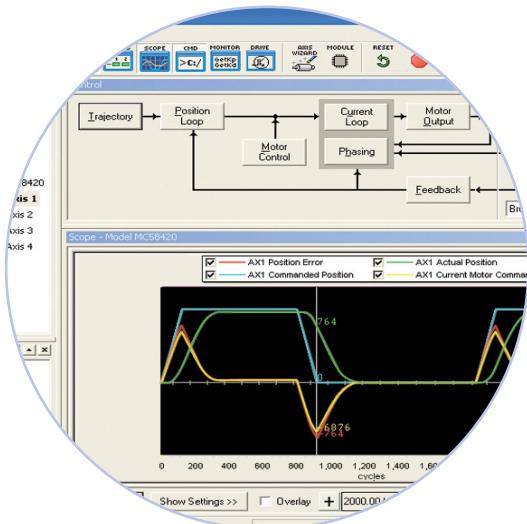

Pro-Motion is a sophisticated, easy-to-use Windows-based exerciser program for use with PMD motion control ICs, modules, and cards.

FEATURES

- Motion oscilloscope graphically displays processor parameters in real-time
- Autotuning
- Ability to save and load settings
- Axis wizard
- Distance and time units conversion
- Motor-specific parameter setup
- Axis shuttle performs programmable motion between two positions
- Communications monitor echoes all commands sent by Pro-Motion to the board
- Advanced Bode analysis for frequency machine response

3

BUILD THE APP C-Motion®

C-Motion is a complete, easy-to-use, motion programming language that includes a source library containing all the code required for communicating with PMD motion ICs, boards, and modules.

C-MOTION FEATURES INCLUDE:

- Extensive library of commands for virtually all motion design needs
- Develop embeddable C/C++ applications
- Complete, functional examples
- Supports PC/104, serial, CAN, Ethernet, and SPI communications

```
code for executing a profile and tracing
captured in this example could be used for tuning the
trace buffer wrap mode to a one time trace
TraceMode(hAxis1, PMDTraceOneTime);

set the processor variables that we want to capture
SetTraceVariable(hAxis1, PMDTraceVariable1, PMDAxis1,
SetTraceVariable(hAxis1, PMDTraceVariable2, PMDAxis1,
SetTraceVariable(hAxis1, PMDTraceVariable3, PMDAxis1,
// set the trace to begin when we issue the next update command
SetTraceStart(hAxis1, PMDTraceConditionNextUpdate);
// set the trace to stop when the MotionComplete event occurs
SetTraceStop(hAxis1, PMDTraceConditionEventStatus,
    PMDEventMotionCompleteBit, PMDTraceStateHigh);
SetProfileMode(hAxis1, PMDTrapezoidalProfile);


set the profile parameters
Position(hAxis1, 200000);
Velocity(hAxis1, 0x200000);
Acceleration(hAxis1, 0x1000);
Deceleration(hAxis1, 0x1000);

    
```

PMD PRODUCT FAMILY OVERVIEW

	JUNO® VELOCITY & TORQUE CONTROL ICS	MAGELLAN® MOTION CONTROL ICS	ATLAS® DIGITAL AMPLIFIERS	PRODIGY® MOTION BOARDS	ION® DIGITAL DRIVES
No. Axes	1	1,2,3,4	1	1,2,3,4	1
Motor Types	<ul style="list-style-type: none"> Brushless DC DC Brush Step Motor 	<ul style="list-style-type: none"> Brushless DC DC Brush Step Motor 	<ul style="list-style-type: none"> Brushless DC DC Brush Step Motor 	<ul style="list-style-type: none"> Brushless DC DC Brush Step Motor 	<ul style="list-style-type: none"> Brushless DC DC Brush Step Motor
Format	<ul style="list-style-type: none"> 64-pin TQFP 56-pin VQFN 	<ul style="list-style-type: none"> 144-pin TQFP 100-pin TQF 	<ul style="list-style-type: none"> 20-pin solderable module 19-pin solderable module 	<ul style="list-style-type: none"> PC/104 Standalone Machine Controller 	<ul style="list-style-type: none"> Fully enclosed module
Voltage	3.3 V	3.3 V	12-56 V	5 V: PC/104 and Standalone 12-56 V: Machine Controller	12-56 V / 20-195 V
Communication	<ul style="list-style-type: none"> Standalone RS232/485 CANbus SPI 	<ul style="list-style-type: none"> Parallel RS232/485 CANbus SPI 	<ul style="list-style-type: none"> SPI 	<ul style="list-style-type: none"> Ethernet RS232/485 CANbus PC/104 bus 	<ul style="list-style-type: none"> Ethernet RS232/485 CANbus
Features	<ul style="list-style-type: none"> Velocity control Torque/current control Field oriented control Multi-motor support 	<ul style="list-style-type: none"> Position control Torque/current control Field oriented control Profile generation Multi-motor support Network communications 	<ul style="list-style-type: none"> Torque/current control Field-oriented control Pulse and direction input Multi-motor support MOSFET amplifier 	<ul style="list-style-type: none"> Position control Torque/current control Field oriented control Profile generation Multi-motor support Downloadable user code 	<ul style="list-style-type: none"> Position control Torque/current control Field oriented control Profile generation Pulse and direction input MOSFET amplifier Downloadable user code
Motion Language	C-Motion® is the common motion language for all Performance Motion Devices products.				

FOR ORDERING

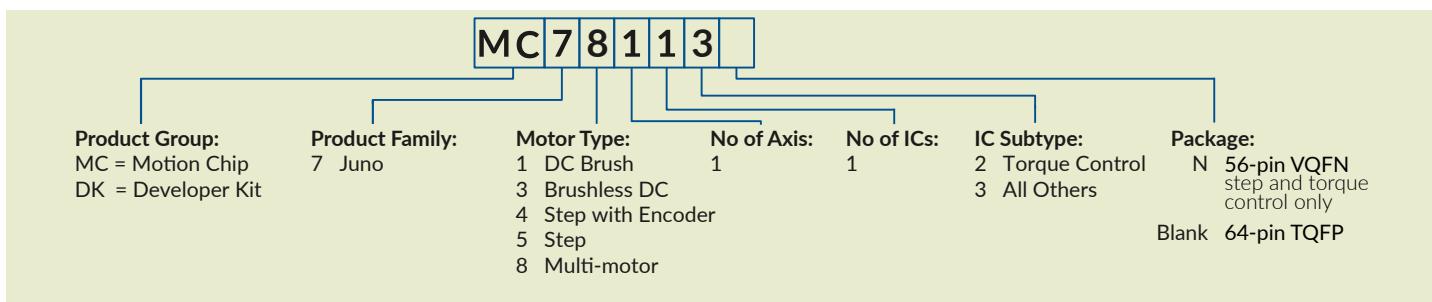

To place an order email purchaseorders@pmdcorp.com. For questions email support@pmdcorp.com

About Performance Motion Devices

Performance Motion Devices (PMD) is a worldwide leader in motion control ICs, boards and modules. Dedicated to providing cost-effective, high performance motion systems to OEM customers, PMD utilizes extensive in-house expertise to minimize time-to-market and maximize customer satisfaction.

ATLAS, ION, Juno, Magellan, Navigator, Pilot, Prodigy, C-Motion and Pro-Motion are trademarks of Performance Motion Devices, Inc. All other trade names, brand names and company names are the property of their respective owners. 2019 Performance Motion Devices, Inc.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Performance Motion Devices:

[DK71112](#) [DK71112N](#) [DK71113](#) [DK73112](#) [DK73112N](#) [DK73113](#) [MC75113](#) [MC75113N](#) [MC78113](#) [MC71113](#)
[MC73112](#) [MC73112N](#) [MC73113](#) [MC74113](#) [MC74113N](#) [DK74113](#) [DK74113N](#) [DK78113](#) [DK78113S](#) [MC71112](#)
[MC71112N](#)