



XM122 IoT Module

Datasheet v2.2



Abstract

The XM122 is a reference module with optimized formfactor that can be used to support customer in their own design for commercial use, for evaluation and development purpose.

The XM122 is built around the nRF52840 Bluetooth® 5 SoC (System on Chip) from Nordic Semiconductor and features an integrated antenna for Bluetooth connectivity.

The XM122 can be used as a stand-alone module where customer can embed their application on top of the Acconeer RSS (Radar System Software). It can also be used as with an external host controller where communication to the module is through a register command protocol.



Figure 1. XM122 Top view (left) and XM122 bottom view (right).



Table of Content

| | | |
|-----|--|----|
| 1 | Revision History | 4 |
| 2 | Functional description | 5 |
| 2.1 | Overview | 5 |
| 2.2 | Product features | 5 |
| 2.3 | Block diagram | 6 |
| 2.4 | Module board connector and pin description | 7 |
| 2.5 | Not mounted battery connector support | 8 |
| 2.6 | Software options | 9 |
| 2.7 | MAC addresses | 9 |
| 3 | Interfaces | 10 |
| 3.1 | Module supply input | 10 |
| 3.2 | System functions | 10 |
| 3.3 | Serial interfaces | 10 |
| 3.4 | Digital I/O interfaces | 10 |
| 3.5 | Analog I/O interfaces | 10 |
| 3.6 | Module reset | 10 |
| 3.7 | Debug interface | 10 |
| 4 | Electrical specifications | 11 |
| 4.1 | Absolute maximum ratings | 11 |
| 4.2 | Recommended operating conditions | 11 |
| 4.3 | Power consumption summary | 12 |
| 4.4 | RF specification | 13 |
| 5 | Reference design description XM122 R2C | 14 |
| 5.1 | Schematics & BOM | 14 |
| 5.2 | Component Placement Drawing | 20 |
| 6 | Reference design description XM122 R2D | 22 |
| 6.1 | Schematics & BOM | 22 |
| 6.2 | Component Placement Drawing | 28 |
| 7 | Mechanical specifications | 30 |
| 8 | Regulatory Approval | 32 |
| 8.1 | ETSI | 32 |
| 9 | Reference documents | 33 |
| 10 | Abbreviations | 34 |
| | Disclaimer | 35 |



1 Revision History

| Revision | Comment |
|----------|--|
| v1.0 | Released version. |
| v2.0 | Added chapter 6, Reference design description for XM122 R2D. Added chapter 2.5, No mounted battery connector support. |
| v2.1 | Added chapter 8, Regulatory approval, CE marking. |
| v2.2 | Updated Table 6.1. |

This document applies to the following product:

| Product name | Part number |
|--------------|-------------|
| XM122 | XM122 |

XM122 marking:



XM122 QR product code
& version number



2 Functional description

2.1 Overview

The XM122 comes with Nordic nRF52840 SoC and A111 Pulsed Coherent Radar (PCR) sensor, see ref [1]. The Nordic nRF52840 supports Bluetooth 5/Bluetooth Mesh/Thread/Zigbee/802.15.4/ANT/2.4 GHz.

The XM122 is delivered with a bootloader enabling customer to download Acconeer RSS software including SDK (Software Development Kit) for stand-alone usage where customer can embed their own application on top of Acconeer RSS software. Acconeer RSS software provides API to set A111 sensor configuration and to retrieve supported radar services and detector data.

XM122 offers support as well to act as controlled by external host through register command protocol on UART, SPI and I2C.

2.2 Product features

The XM122 is an IoT module based on Acconeer A111 pulsed coherent radar (PCR) and the Nordic nRF52840 SoC.

XM122 features:

- The A111 60 GHz Pulsed Coherent radar (PCR) with integrated baseband, RF front-end and Antenna in Package (AiP).
- Low power connected radar module.
- The nRF52840 protocol stack support for Bluetooth 5, Bluetooth mesh, Thread, Zigbee, 802.15.4, ANT and 2.4 GHz proprietary stacks and is built around the 64 MHz ARM® Cortex™-M4 CPU with 256 KB SRAM and 1 MB Flash.
- Integrated 2.4 GHz antenna with support for external 2.4 GHz antenna.
- Optional NFC antenna support for quick Bluetooth pairing via the PCB test points.
- Optimized circular form factor with a diameter of 33 mm.
- Wide single supply operating voltage range 2.0 V to 5.5 V.
- Operating temperature -40° to 85°C.
- External I/F support - SPI, UART, I2C, GPIO, Reset.
- SWD/JTAG for SW flash and debug.

The XM122 can be used for accurate distance measurement, tank level measurement, waste bin level measurement, parking space occupancy and presence detection:

- High precision distance measurements with configurable update frequency.
- Measures absolute range up to 7 m with an absolute accuracy in mm.
- Measures relative accuracy in 42 µm (using RSS software IQ service).
- Possible to recognize movement of multiple objects.

Easy integration:

- XM122 can be integrated behind plastic or glass without any need for a physical aperture. See ref [6] *User guide – Sensor Integration Electromagnetic Scattering* for more information.



2.3 Block diagram

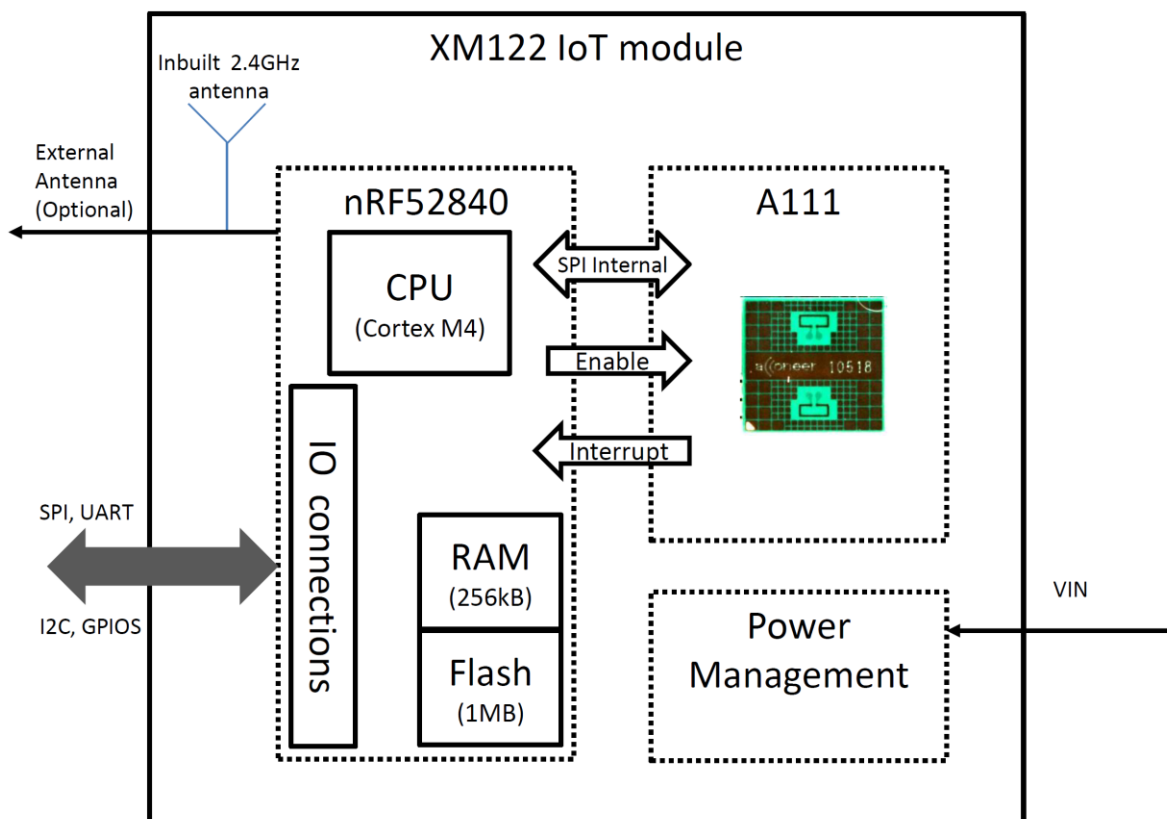


Figure 2.1. XM122 block diagram.

The XM122 block diagram shows the A111 60 GHz PCR radar connected to the nRF52840 microcontroller. The module provides a pin connector where the MCU external I/F are accessible including single voltage supply.



2.4 Module board connector and pin description

The board to board connector provides the external interface to the module. Figure 2.2 shows the connector footprint and Table 2.1 describes each signal.

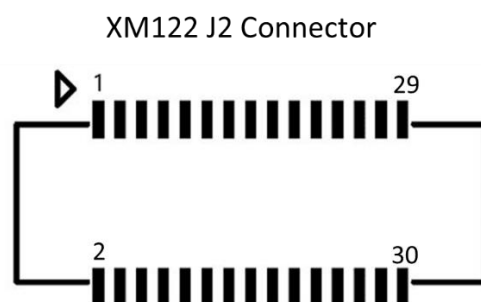


Figure 2.2. XM122 J2 connector footprint.

| Pin Number | Signal | Description | nRF52840* pin |
|------------|--------------|---|---------------------|
| 1 | GPIO | | P0.23 |
| 2 | GND | Ground | - |
| 3 | GND | Ground | - |
| 4 | VIN | 2.0-5.5 V external power supply. Pin 4 and Pin 6 are interconnected. | - |
| 5 | GPIO | | P0.21 |
| 6 | VIN | 2.0-5.5 V external power supply. Pin 4 and Pin 6 are interconnected. | - |
| 7 | GND | Ground | - |
| 8 | GND | Ground | - |
| 9 | GPIO | | P0.24 |
| 10 | GPIO | Configurable as Analog Input. | P0.04 |
| 11 | GND | Ground | - |
| 12 | GPIO | Configurable as JTAG Trace signal. | P0.11 TRACEDATA2 |
| 13 | GPIO | | P0.22 |
| 14 | GPIO | Configurable as JTAG Trace signal. | P0.12 TRACEDATA1 |
| 15 | GND | Ground | - |
| 16 | VDD | Regulated 1.8 V output voltage. | - |
| 17 | GPIO/UART_RX | Default configuration in Acconeer Module server SW is UART. Could also be used as miscellaneous GPIO. | P0.06 |
| 18 | GPIO, nRESET | nRF52840 reset pin. | P0.18 nRESET |



| | | | |
|----|---------------|---|---------------------|
| 19 | GPIO/UART_TX | Default configuration in Acconeer Module server SW is UART. Could also be used as miscellaneous GPIO. | P0.16 |
| 20 | SWDIO | SWD interface for flash and debug. | SWDIO |
| 21 | GND | Ground | - |
| 22 | GPIO, SWO | SWD interface for flash and debug. Configurable as JTAG Trace signal. | P1.00 TRACEDATA0 |
| 23 | GPIO | Configurable as JTAG Trace signal. | P0.07 TRACECLK |
| 24 | GND | Ground | - |
| 25 | GPIO | Configurable as JTAG Trace signal. | P1.09 TRACEDATA3 |
| 26 | SWDCLK | SWD interface for flash and debug. | SWDCLK |
| 27 | GPIO/UART_RTS | Default configuration in Acconeer Module server SW is UART. Could also be used as miscellaneous GPIO. | P0.20 |
| 28 | GND | Ground | - |
| 29 | GPIO/UART_CTS | Default configuration in Acconeer Module server SW is UART. Could also be used as miscellaneous GPIO. | P0.19 |
| 30 | GPIO, DFU | Device Firmware Upgrade. Set low during reset to enter bootloader mode. Could also be used as miscellaneous GPIO. | P0.25 |

Table 2.1. J2 connector pinout.

2.5 Not mounted battery connector support

Not mounted battery connector (Reference Designator J3) supported on XM122 R2D PCB. See chapter 6 schematics for further information. Example of compatible battery connectors:

- Vertical Amphenol 10114828-10102LF
- Horizontal Amphenol 10114828-10102LF
- Horizontal Molex 532617002



2.6 Software options

The XM122 module can be used in two regimes:

- **Stand-alone module:** The module operates as an independent system. The application is customized to a specific use case by the customer and runs on the embedded MCU. The customers application is accessing the RSS API.
- **Controlled module:** The module is connected to an external host where the customer runs their application software. The customers are accessing the RSS API via a hardware interface through the module server, that provides register command protocol. The module output is either detector output data or service radar data through the XM122 external interfaces such as SPI, UART and I2C.

Using the XM122 as stand-alone module Acconeer offers SDK that provides RSS, hardware abstraction layer, device drivers and build system. Based on SDK it is possible for the customer to develop their own application. Both RSS and applications runs on the embedded MCU.

Using the XM122 as Controlled module Acconeer provides SW image including RSS and module server application that provides hardware interface accessing the RSS API through a register command protocol, see ref [3].

For further software information, see XM122 IoT Module Evaluation Kit User guide, ref [2].

2.7 MAC addresses

The XM122 module comes with a Static Random Bluetooth Address provided by the Nordic nRF52840 SoC. This address is assigned randomly during manufacturing. This static address can be used for evaluation.



3 Interfaces

3.1 Module supply input

The XM122 support external single power supply for battery power applications, see table 4.2 recommended operating conditions.

Note that supply voltage conditions (E.g. slew rate) need to be taken into consideration according to nRF52840 datasheet, ref [5].

3.2 System functions

The XM122 IoT module supports system power states, see XM122 Module Software User guide, Ref [3] for further information.

Module RESET is supported by activating NRST pin (active low).

Module ERASE is used to reinitialize the MCU Flash content and some of its NVM (Non-Volatile Memory) bits to an erased state. See nRF52840 datasheet, ref [5] for further information.

3.3 Serial interfaces

The XM122 nRF52840 GPIO pins can be configured to support up to two UART, up to four SPI master or three SPI slave and up to two I2C compatible 2-wire master/slave external serial interfaces. See table 2.1 for HW configuration. See also nRF52840 datasheet, ref [5] for further information.

3.4 Digital I/O interfaces

The XM122 module support General Purpose IOs (GPIOs), 16 GPIOs are available. The GPIO pins are configurable for different functions, only the debug and RESET pins are fixed to specific GPIOs. See table 2.1 for HW configuration. See also nRF52840 datasheet, ref [5] for further information.

3.5 Analog I/O interfaces

The XM122 module support one analog input (pin 10 on XM122 connector J2) and up to four individual PWM outputs which can be assigned to any of the GPIO pins. See table 2.1 for HW configuration.

3.6 Module reset

The XM122 has an external reset option (Pin 18 on XM122 connector J2) that can be configured as a GPIO or RESET input.

3.7 Debug interface

The XM122 has 7 debug pins, SWDIO, SWDCLK and Trace signals. TRACE signals reuse GPIO pins. See table 2.1 for HW configuration.



4 Electrical specifications

4.1 Absolute maximum ratings

The below table shows the XM122 absolute maximum ratings over operating temperature range, unless otherwise noted:

| Parameter | Description | Min. | Max. | Unit |
|------------------|-----------------------------|------|------|------|
| VIN | power supply | -0.3 | 6.0 | V |
| I/O | Voltage on I/O pins | -0.3 | 2.1 | V |
| T _{OP} | Operating temperature range | -40 | 85 | °C |
| T _{STG} | High temperature storage | | 125 | °C |

Table 4.1. Absolute maximum ratings.

Stresses beyond those listed in table 5.1 may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these conditions or at any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods of time may affect device reliability.

4.2 Recommended operating conditions

The below table shows the XM122 recommended operating conditions:

| Parameter | Min. | Typ. | Max. | Unit |
|---|------|------|------|------|
| VIN, operating power supply voltage ¹⁾ | 2.0 | | 5.5 | V |
| I/O operating range | 0 | | 1.8 | V |
| Operating temperature ¹⁾ | -40 | | 85 | °C |

Table 4.2. Recommended operating conditions.

¹⁾ Minimum battery voltage depends on battery internal resistance and temperature.



4.3 Power consumption summary

The below table summarizes the XM122 power consumption, maximum current ratings and average current ratings at power terminal at $T_A = 25^\circ\text{C}$ and 2.0 V/3.0 V supply:

| Parameter | Min. | Typ. | Max. | Unit |
|---|------|---------------------|------|---------------|
| Average power consumption, 2.0 V supply, 0.1 Hz update rate | | 0.07 ⁽¹⁾ | | mW |
| Average power consumption, 3.0 V supply, 0.1 Hz update rate | | 0.08 ⁽¹⁾ | | mW |
| Average power consumption, 2.0 V supply, 1 Hz update rate | | 0.66 ⁽¹⁾ | | mW |
| Average power consumption, 3.0 V supply, 1 Hz update rate | | 0.67 ⁽¹⁾ | | mW |
| Average power consumption, 2.0 V supply, 10 Hz update rate | | 6.43 ⁽¹⁾ | | mW |
| Average power consumption, 3.0 V supply, 10Hz update rate | | 6.51 ⁽¹⁾ | | mW |
| Idle current | | 3.75 ⁽²⁾ | | μA |

Table 4.3. Average power dissipation ratings at power terminal.

¹ Measuring window set to 0.6m, configuration with Envelope service, maximize SNR profile used. Bluetooth advertisement according to given update rate.

² Sensor is powered off and nRF52840 is in sleep mode (System ON) with full RAM retention and wake-up on RTC enabled.



4.4 RF specification

The below table shows the XM122 A111 PCR RF specification:

| Parameter | Min. | Typ. | Max. | Unit |
|--|------|------|------|---------|
| Center frequency f_c | | 60.5 | | GHz |
| EIRP (Equivalent Isotropically Radiated Power) | | | 10 | dBm |
| TX HPBW (Half Power Beam Width), elevation plane ⁽¹⁾ | | 45 | | degrees |
| TX HPBW (Half Power Beam Width), horizontal plane ⁽¹⁾ | | 70 | | degrees |

Table 4.4. XM122 RF specification.

⁽¹⁾ Based on simulation

The XM122 support Bluetooth v5 including BLE, mesh, long range and advertising extensions.

The below table shows the XM122 Bluetooth radio performance:

| Parameter | Min. | Typ. | Max. | Unit |
|---------------------------------------|------|------|------|------|
| Frequency (40 channels) | 2.4 | | 2.48 | GHz |
| Data rate | | 2 | | Mbps |
| Total radiated power (TRP) | | 5.5 | | dBm |
| Conducted RX sensitivity (BLE) | | -97 | | dBm |
| Conducted RX sensitivity (Long range) | | -101 | | dBm |
| Conducted total link budget | | -109 | | dBm |

Table 4.5. XM122 Bluetooth radio performance.



5 Reference design description XM122 R2C


5.1 Schematics & BOM

The following pages include the module schematics and bill of materials:






XM122 IoT Module Datasheet, v2.2

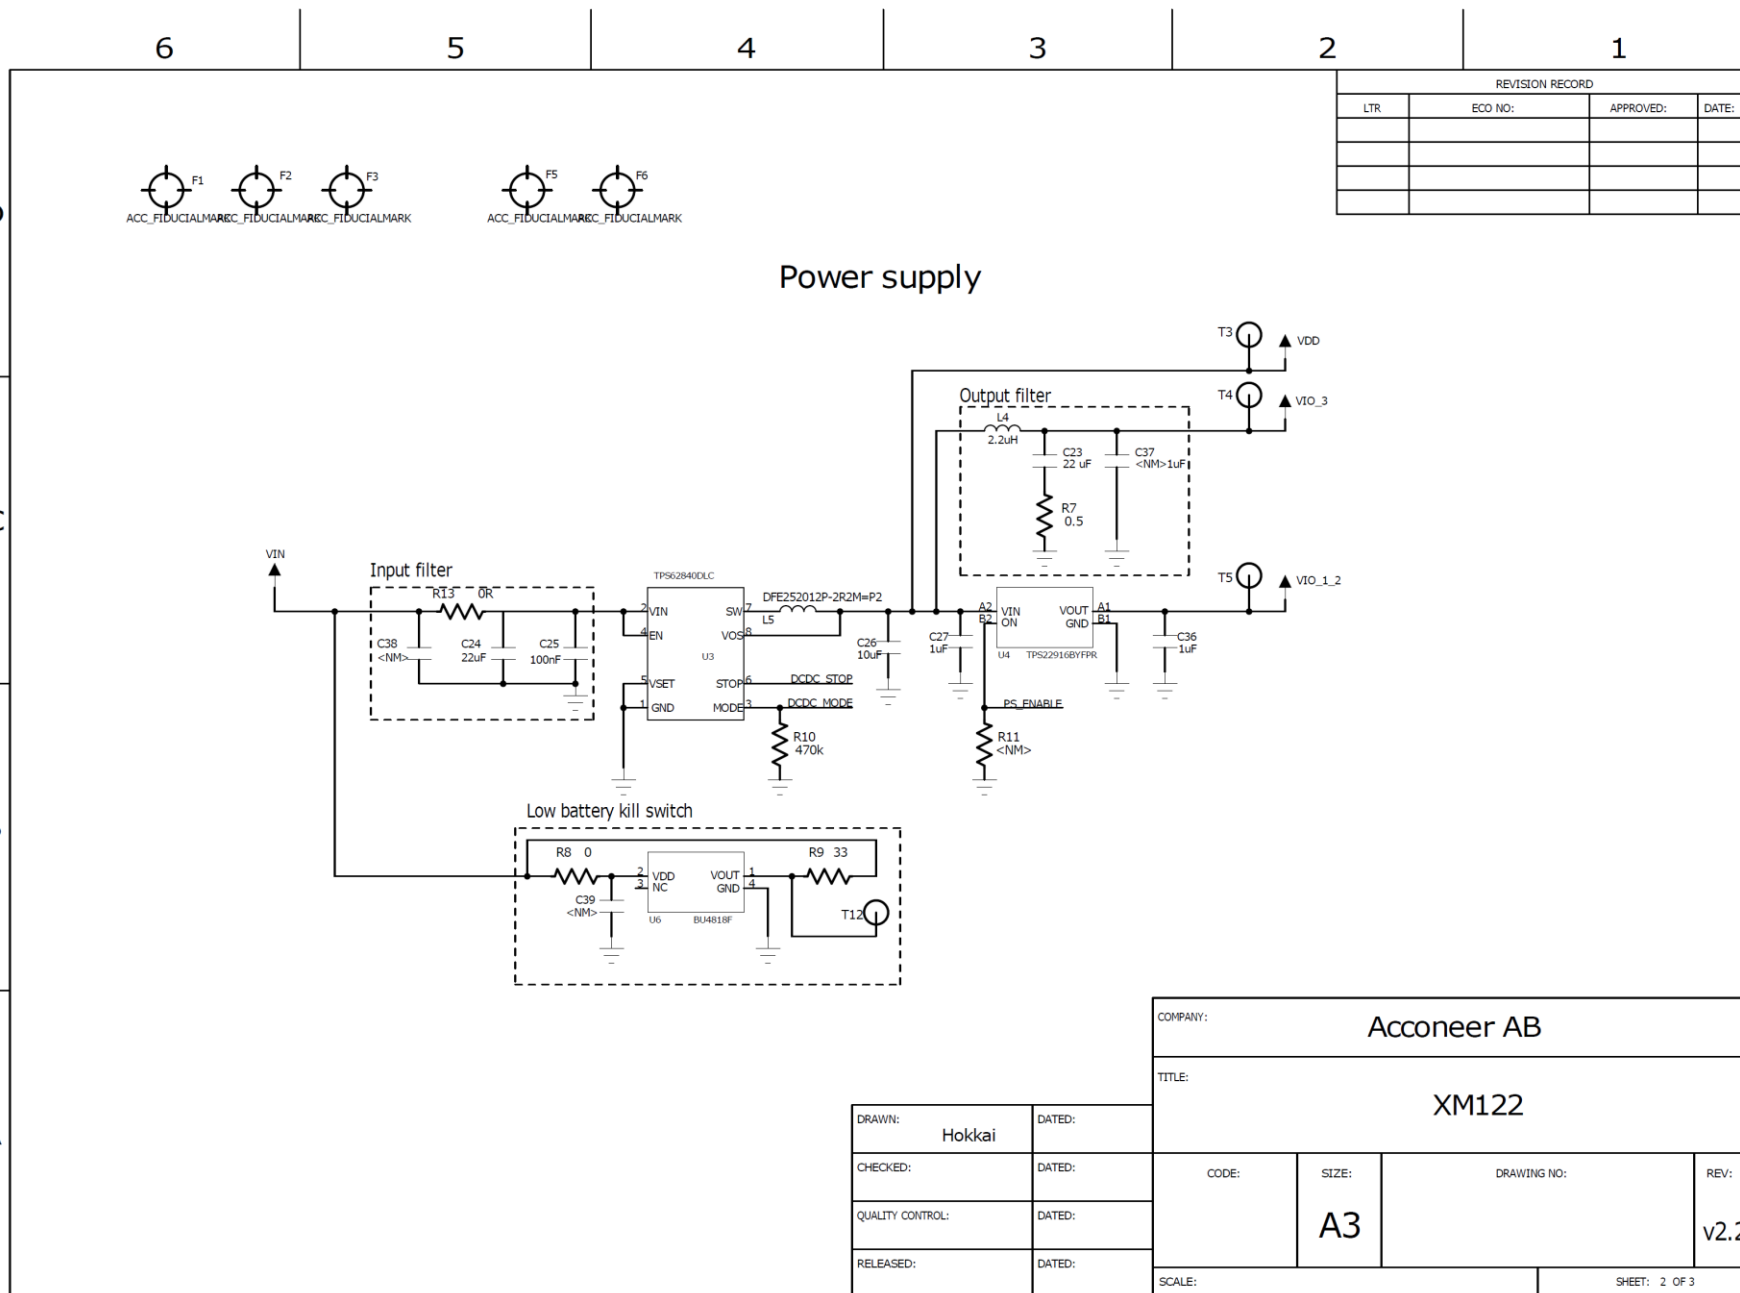



XM122 IoT Module Datasheet, v2.2

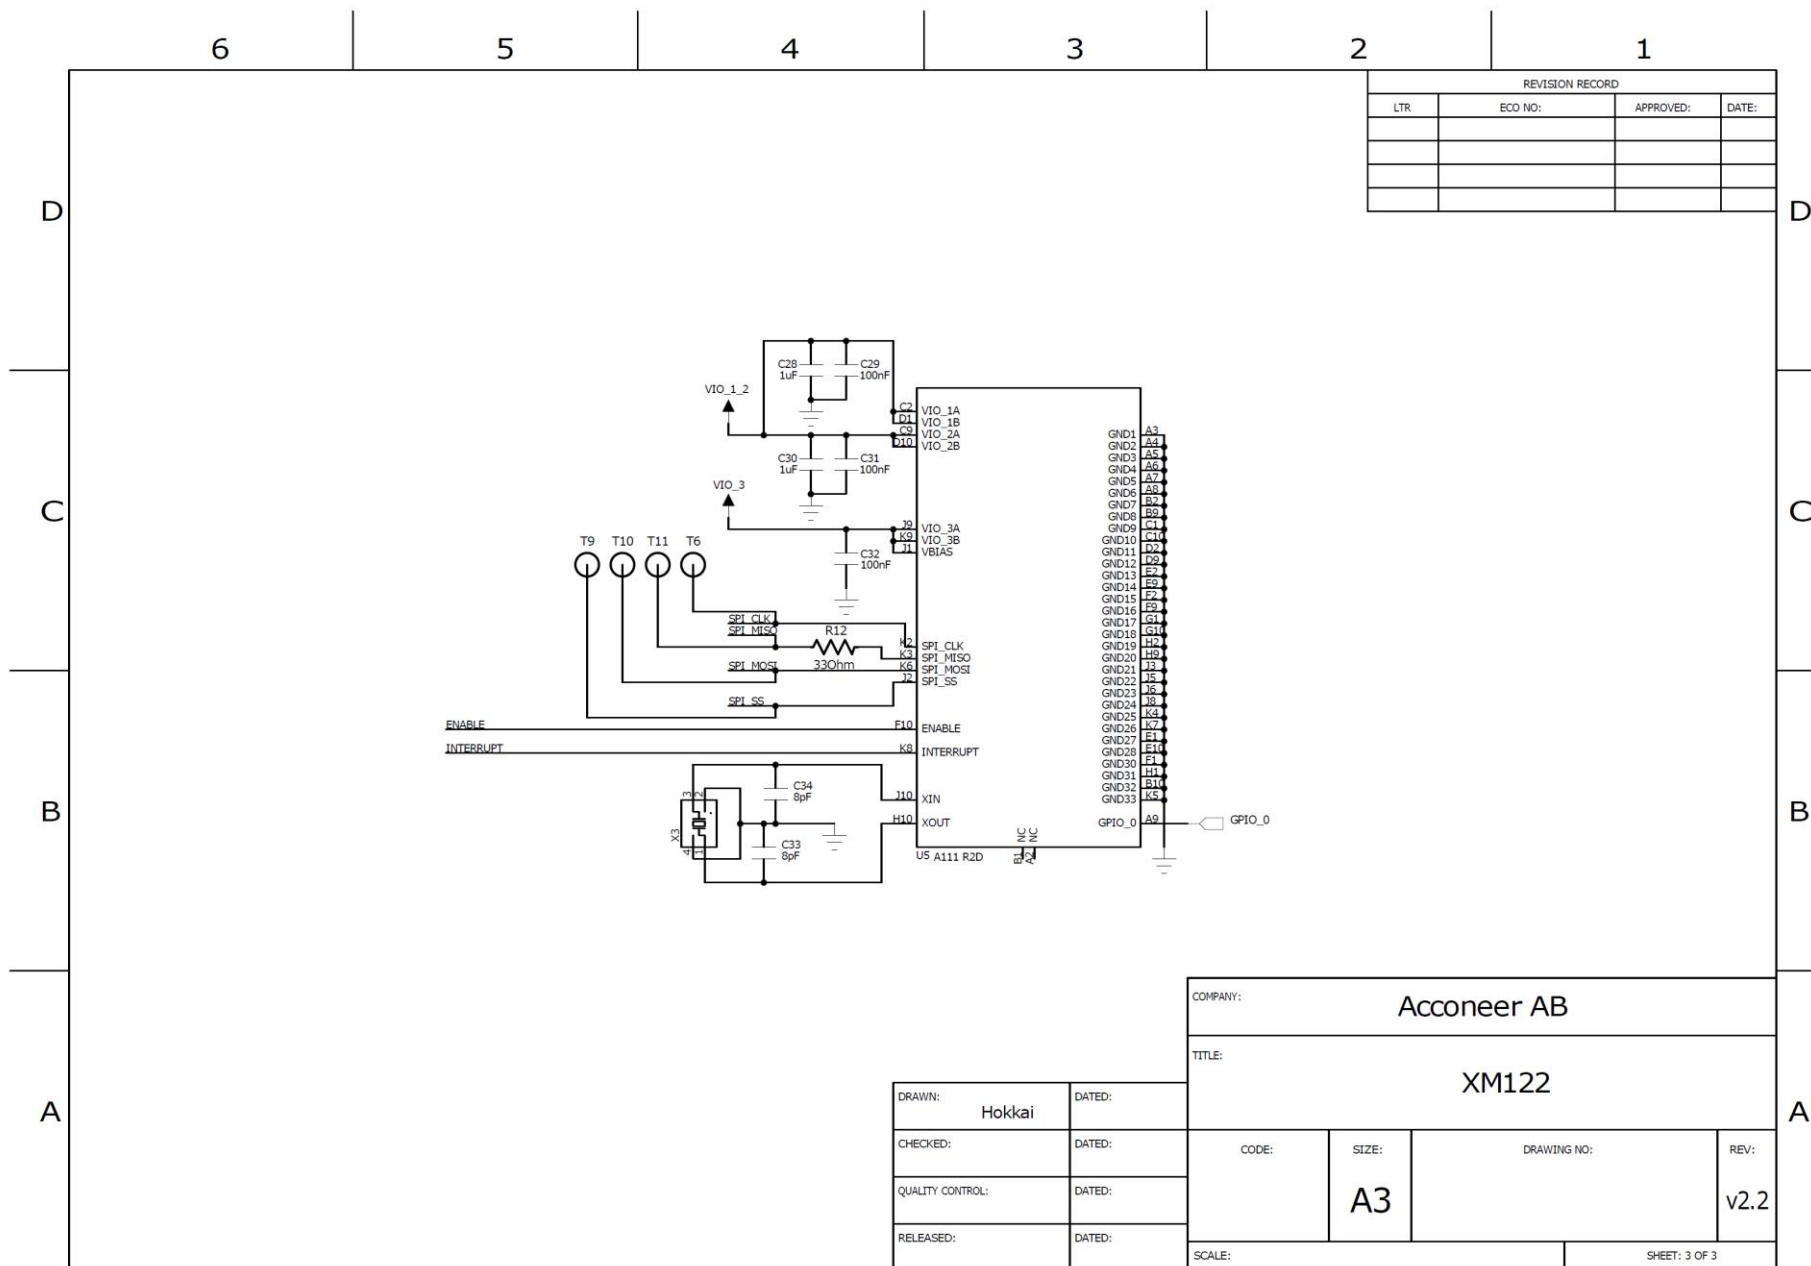



Bill of Material

Table 5.1 shows the BOM for XM122.

| Component Ref. | Specification | QTY | Value | Comment |
|--|--|-----|----------|-------------------|
| C10 | NP0,C0G/1005 | 1 | 100 pF | |
| C12, C13, C33, C34 | NP0,C0G/1005 | 4 | 8 pF | |
| C14 | C0G/1005 | 1 | 0.75 pF | |
| C15 | C0G/1005 | 1 | 0.5 pF | |
| C17 | X5R/1005 | 1 | 4.7 uF | |
| C19 | NP0/1005 | 1 | 820 pF | |
| C2,C7, C18, C22, C25, C29, C31, C32 | X7R/1005 | 8 | 100 nF | |
| C23, C24 | X5R/1608 | 2 | 22 uF | |
| C26 | X5R/1005 | 1 | 10 uF | |
| C3,C5, C27, C28, C30, C36 | X5R/1005 | 6 | 1 uF | |
| C4 | X5R/1005 | 1 | 47 nF | |
| C40 | N/A/1005 | 1 | 2pF | |
| C8, C9 | NP0/1005 | 2 | 15 pF | |
| D2 | LTST-C190CKT | 1 | N/A | |
| J1 | MM8130-2600 | 1 | N/A | |
| J2 | DF40HC(3.5)-30DS-0.4V(51) | 1 | J2 | |
| L1 | 15/NH/1005/J | 1 | 15 nH | |
| L2 | 10/UH/1608 | 1 | 10 uH | |
| L3 | 4.7/nH/1005/+0.3nH | 1 | 4.7 μH | |
| L4 | 2.2/uH/1608/M | 1 | 2.2 uH | Footprint 1608 |
| L5 | 2.2/UH/2520/M Murata DFE252012P- 2R2M=P2 | 1 | 2.2 uH | Footprint 2520 |
| R1 | | 1 | 360 Ohm | |
| R10 | | 1 | 470 KOhm | |
| R2 | | 1 | 180 kOhm | |
| R6, R9, R12 | | 3 | 33 Ohm | |
| R7 | | 1 | 0.5 Ohm | |
| R8, R13 | | 2 | 0 Ohm | |
| U1, U4 | TPS22916BYFPR | 2 | N/A | Regulator |
| U2 | NORDIC_BT5.0_LONGRANGE | 1 | N/A | MCU/BT |



| | _NRF5284 | | | module |
|----|---|---|-----------|------------|
| U3 | TPS62840DLCR | 1 | N/A | Regulator |
| U5 | A111 | 1 | N/A | PCR |
| U6 | | 1 | N/A | BU4818F-** |
| X1 | 32MHz/10ppm/10PF/50OH M/2520 | 1 | 32 MHz | |
| X2 | 32.768kHz/20ppm/9.5PF/90 KOHM/2 | 1 | 32.768kHz | |
| X3 | TSX-3225 24.0000MF20G- AC0/SMD(3225Size) | 1 | 24 MHz | |


Table 5.1. XM122 BOM list.



5.2 Component Placement Drawing


The component placement drawing of XM122 is found below:

Top side

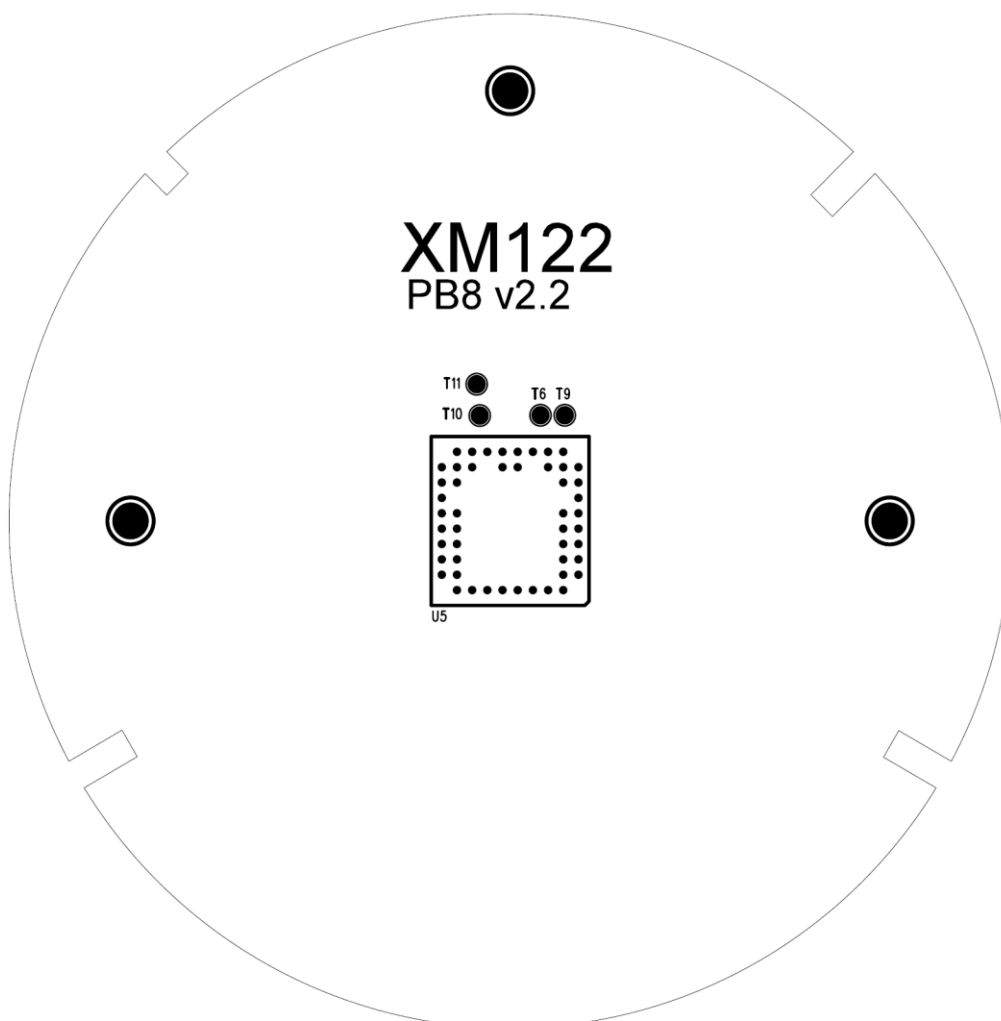



Bottom side:

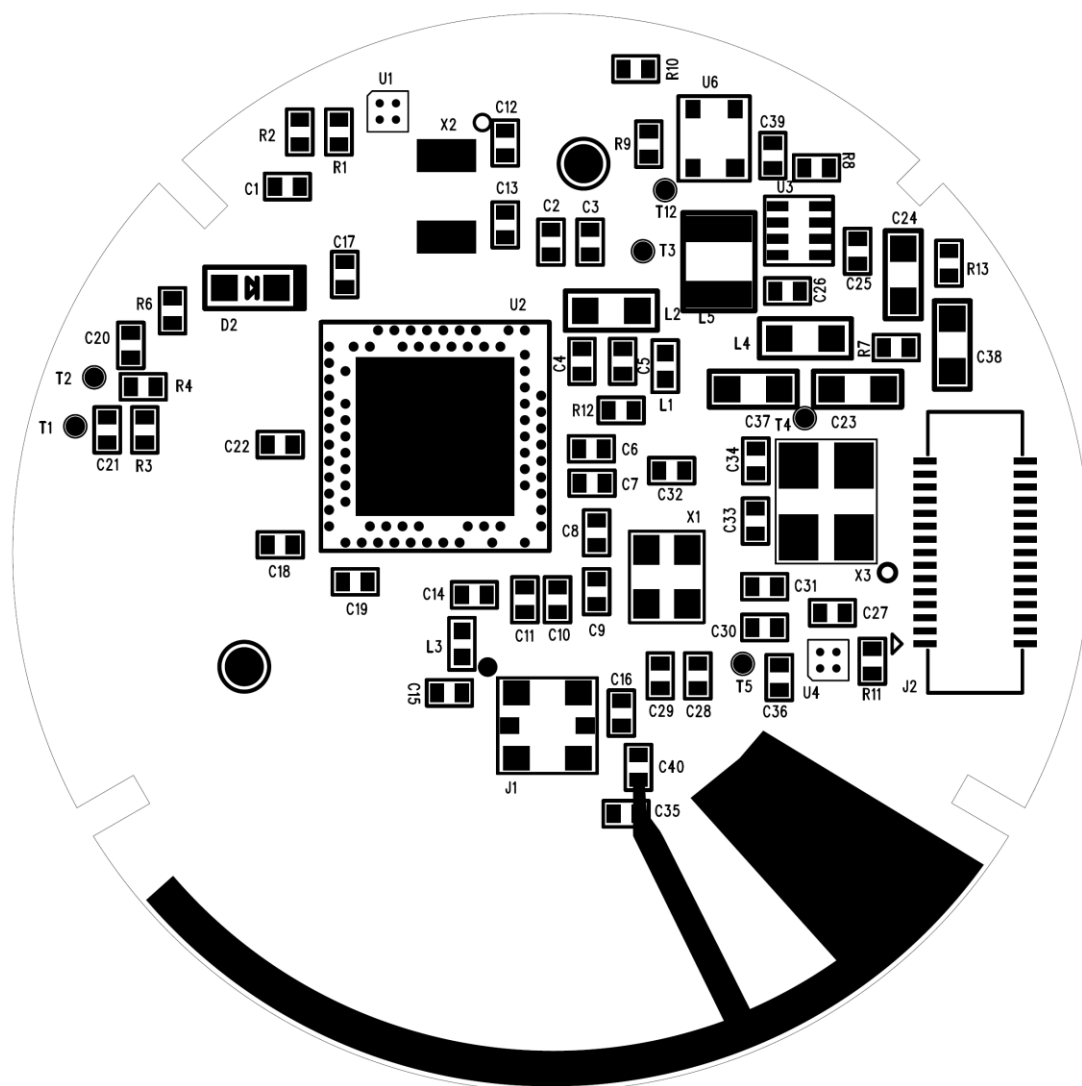



6 Reference design description XM122 R2D


6.1 Schematics & BOM

The following pages include the module schematics and bill of materials:





XM122 IoT Module Datasheet, v2.2

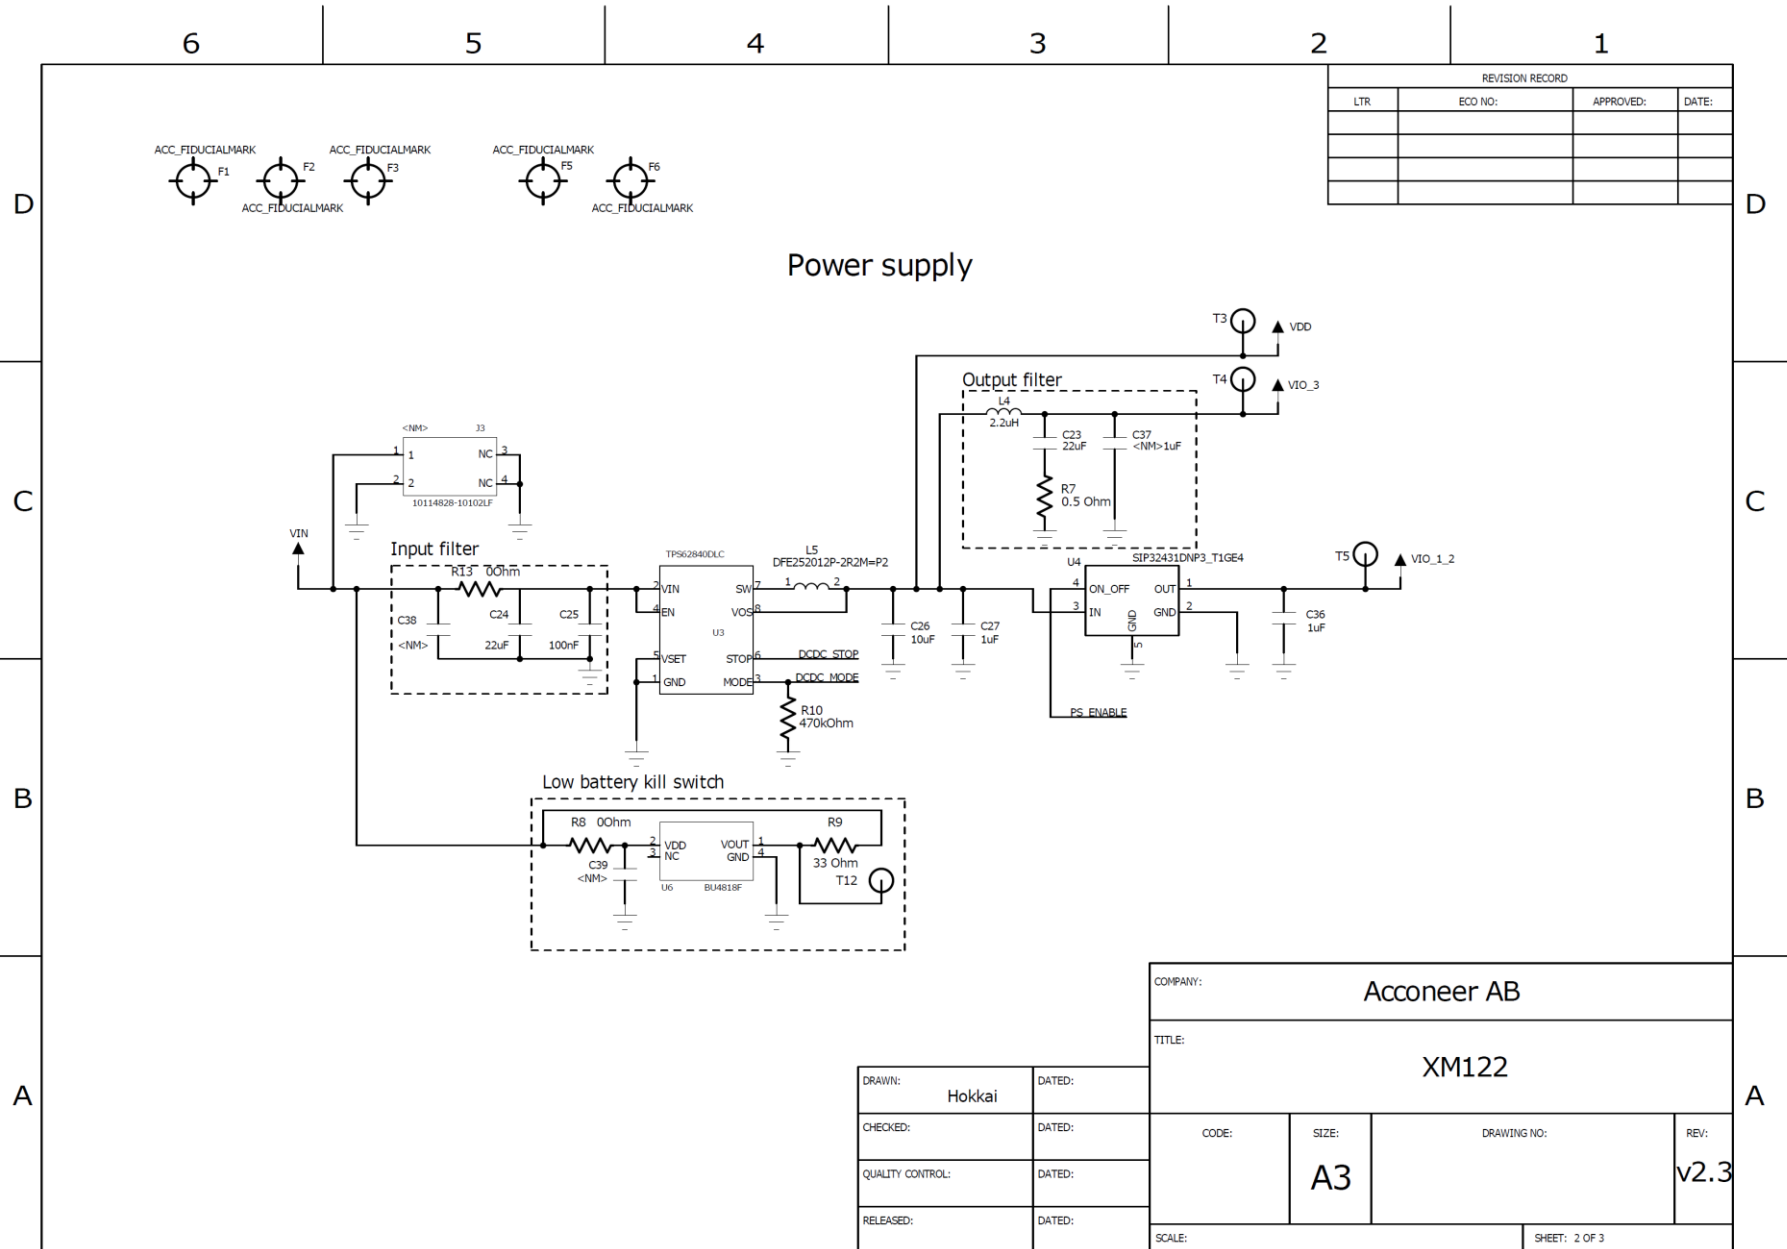



XM122 IoT Module Datasheet, v2.2

6

5

4


3

2

1

REVISION RECORD

| LTR | ECO NO: | APPROVED: | DATE: |
|-----|---------|-----------|-------|
| | | | |
| | | | |
| | | | |
| | | | |

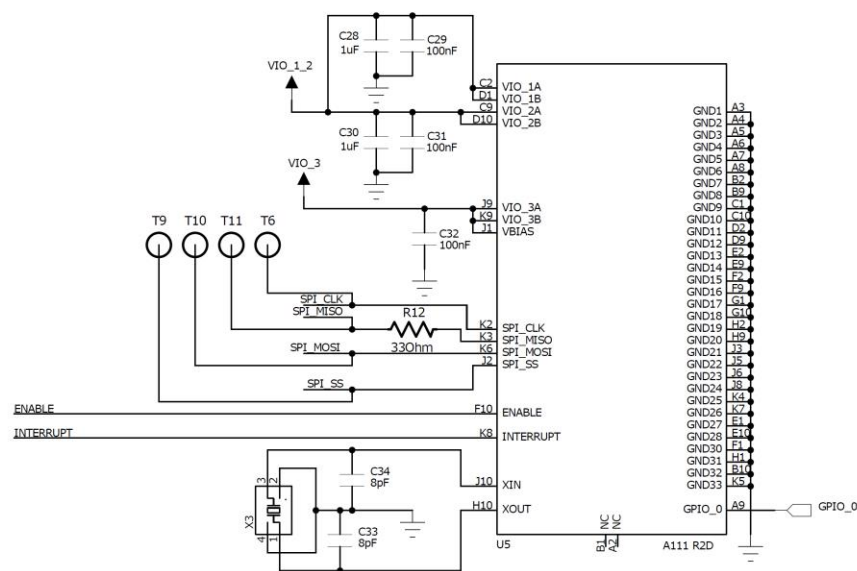

| | | | |
|----------------------|----------|---------------|-----------|
| COMPANY: Acconeer AB | | | |
| TITLE: XM122 | | | |
| CODE: | SIZE: A3 | DRAWING NO: | REV: v2.3 |
| SCALE: | | SHEET: 3 OF 3 | |

| | |
|------------------|--------|
| DRAWN: Hokkai | DATED: |
| CHECKED: | DATED: |
| QUALITY CONTROL: | DATED: |
| RELEASED: | DATED: |



Bill of Material

Table 6.1 shows the BOM for XM122.

| Component Ref. | Specification | QTY | Value | Comment |
|-------------------------------|------------------------------|-----|--------|---|
| C2,C7,C18,C22,C25,C29,C31,C32 | 100/NF/10%/50V/X7R/M1005 | 8 | 100 nF | |
| C3,C5,C27,C28,C30,C36 | 1/UF/10%/10V/X5R/M1005 | 6 | 1uF | |
| C4 | 47/NF/10%/50V/X5R/M1005 | 1 | 47nF | |
| C8,C9 | 15/PF/5%/50V/NP0/M1005 | 2 | 15pF | |
| C10 | 100/PF/5%/10V/NP0,C0G/M1005 | 1 | 100pF | |
| C12,C13,C33,C34 | 8/PF/0.25%/50V/NP0,C0G/M1005 | 4 | 8pF | |
| C14 | 0.75/PF/0.1%/50V/C0G/M1005 | 1 | 0.8pF | |
| C15 | 0.5/PF/0.25%/50V/C0G/M1005 | 1 | 0.5pF | |
| C17 | 4.7/UF/20%/10V/X5R/M1005 | 1 | 4.7uF | |
| C19 | 820/PF/1%/50V/NP0/M1005 | 1 | 820pF | |
| C23,C24 | 22/UF/20%/10V/X5R/M1608 | 2 | 22uF | |
| C26 | 10/UF/20%/10V/X5R/M1005 | 1 | 10uF | |
| C40 | 2/PF/0.25%/50V/N/A/M1005 | 1 | 2pF | |
| D2 | LTST-C190CKT | 1 | | 638nm LED RED CLEAR CHIP SMD |
| J1 | MM8130-2600 | 1 | | |
| J2 | DF40HC(3.5)-30DS-0.4V(51) | 1 | | Manufacturer: Hirose |
| L1 | 15/NH/5%/320mOhm/M1005/ | 1 | 15nH | Manufacturer: Murata Part number: LQG15HS15NJ02 |
| L2 | 10uH/20%/600mOhm/M1608 | 1 | 10uH | Manufacturer: TDK Part number: |



| | | | | |
|-------------|---------------------------------|---|----------|--|
| | | | | MLZ1608N100LT000 |
| L3 | 4.7nH/0.3nH/110mOhm/M1005 | 1 | 4.7nH | Manufacturer: TDK Part number: MHQ1005P4N7ST000 |
| L4 | 2.2uH/20%/180mOhm/M1608 | 1 | 2.2uH | Manufacturer: TDK Part number: MLZ1608N2R2LT000 |
| L5 | 2.2uH/20%/144mOhm/M2016 | 1 | 2.2uH | Manufacturer: Murata Part number: DFE252012P-2R2M=P2 |
| R1 | 360/Kohm/5%/M1005 | 1 | 360 kOhm | 0.0625W@70°C, 50V |
| R2 | 180/KOHM/1%/M1005 | 1 | 180kOhm | 0.0625W@70°C, 50V |
| R6, R9, R12 | 33/OHM/1%/M1005 | 3 | 33 Ohm | 0.0625W@70°C, 50V |
| R7 | 0.5/OHM/5%/M1005 | 1 | 0.5 Ohm | 0.0625W@70°C, 50V |
| R8, R13 | 0/OHM/5%/M1005 | 2 | 0 Ohm | 0.0625W@70°C, 50V |
| R10 | 470/KOHM/1%/M1005 | 1 | 470 kOhm | 0.0625W@70°C, 50V |
| U1, U4 | SIP32431DNP3_T1GE4 | 2 | | |
| U2 | NORDIC_BT5.0_LONGRANGE_NRF52840 | 1 | | NRF52840_QIAA |
| U3 | TPS62840DLCR | 1 | | |
| U5 | A111 R2D | 1 | | |
| U6 | BU4818F-TR | 1 | | |
| X1 | 32MHz/10ppm/10PF/50OHM/2520 | 1 | | |
| X2 | 32.768kHz/20ppm/9.5PF/90KOHM/2 | 1 | | |
| X3 | TSX-3225 24.0000MF20G-AC0/SMD | 1 | | |


Table 6.1. XM122 BOM list.



6.2 Component Placement Drawing


The component placement drawing of XM122 is found below:

Top side

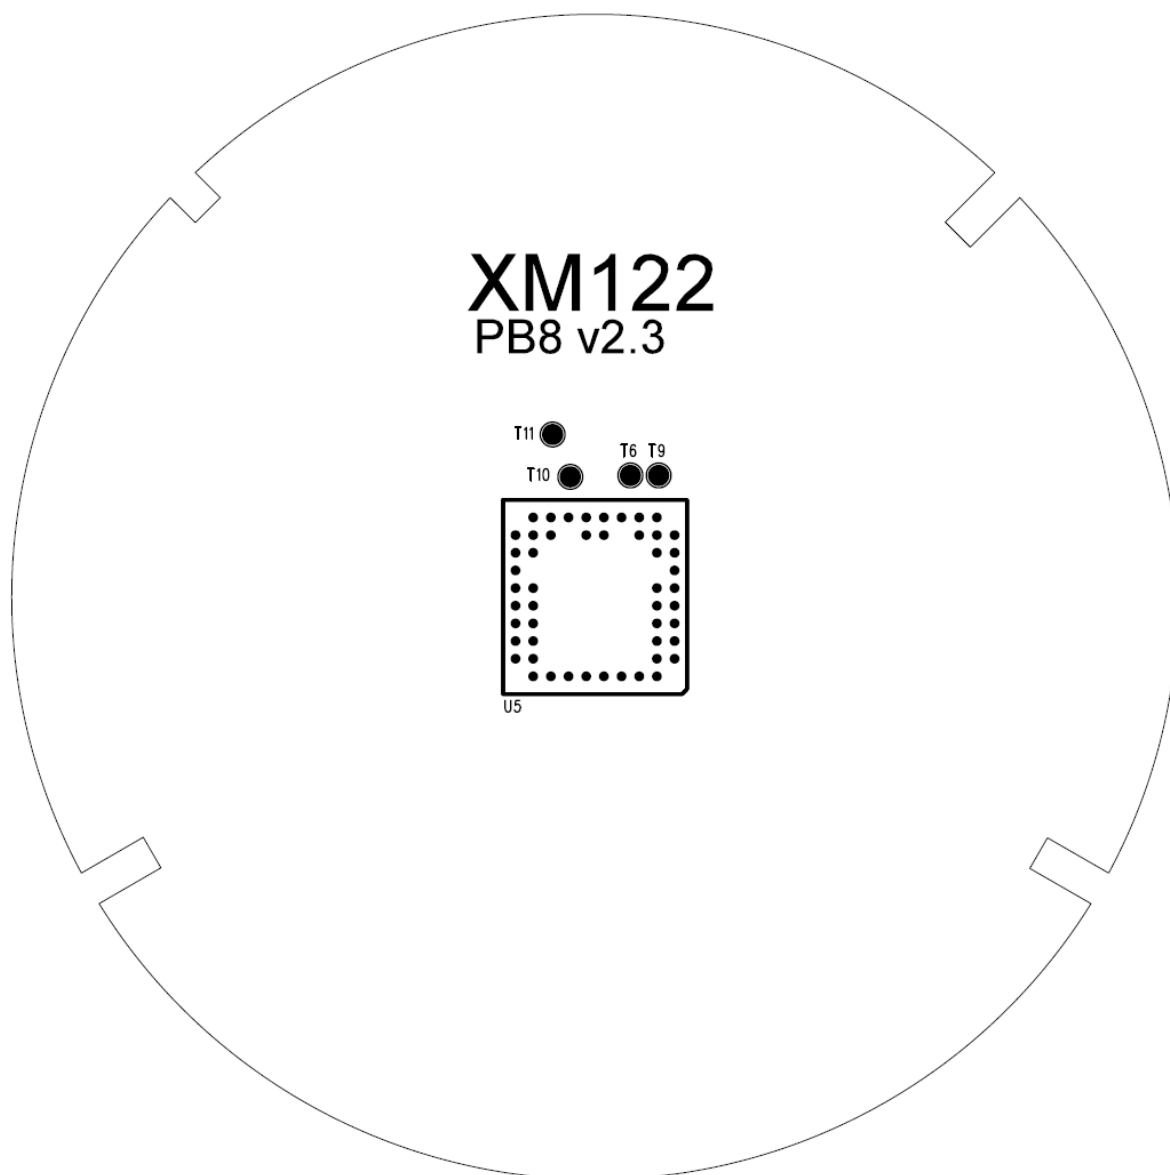




Bottom side:

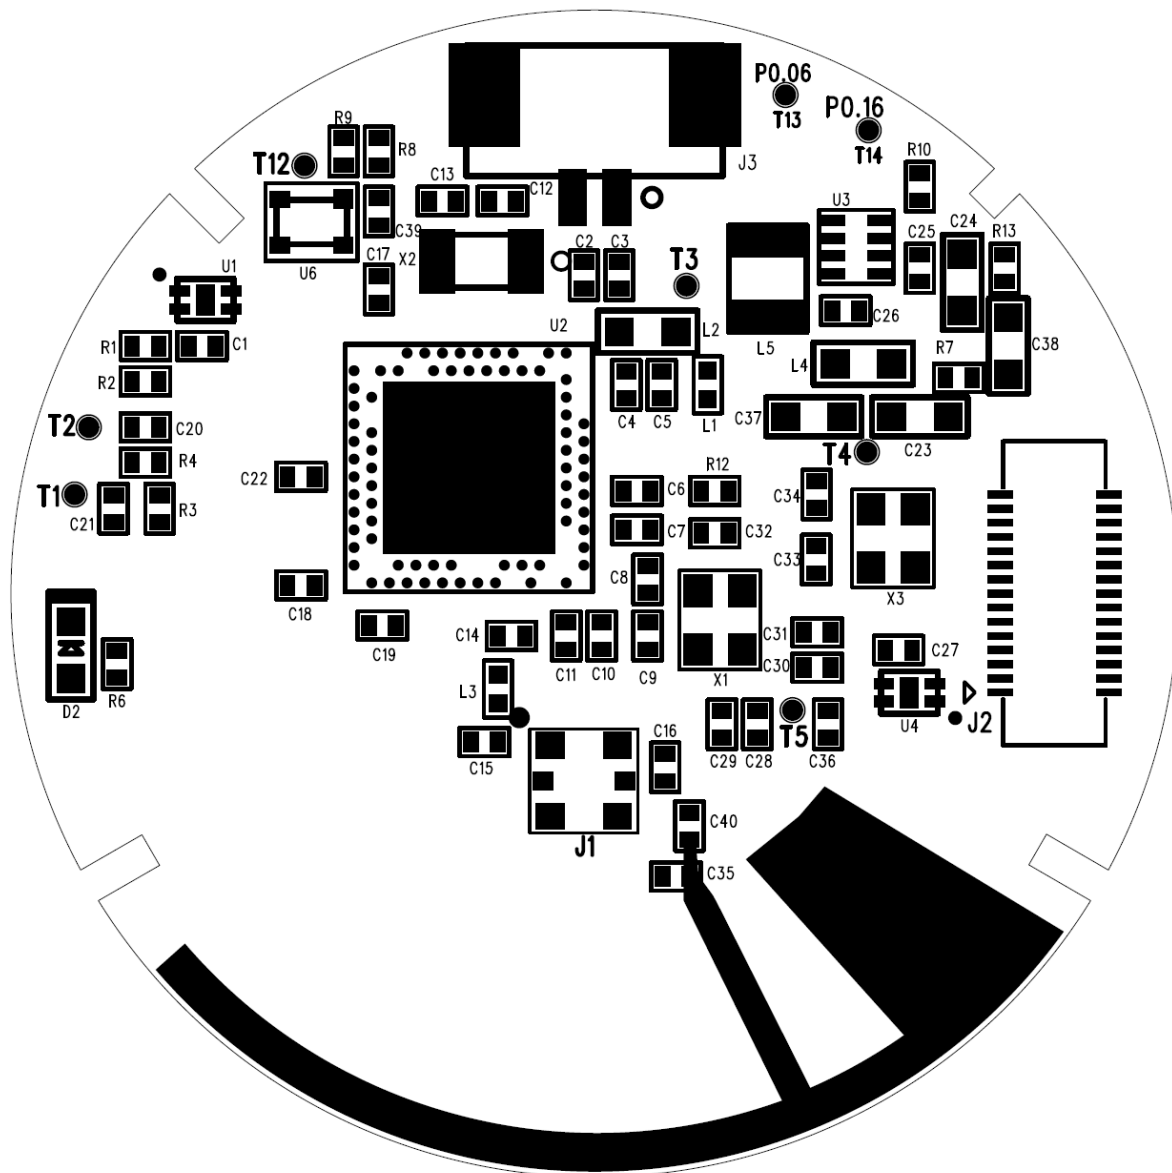




7 Mechanical specifications

XM122 Module outline – Top view

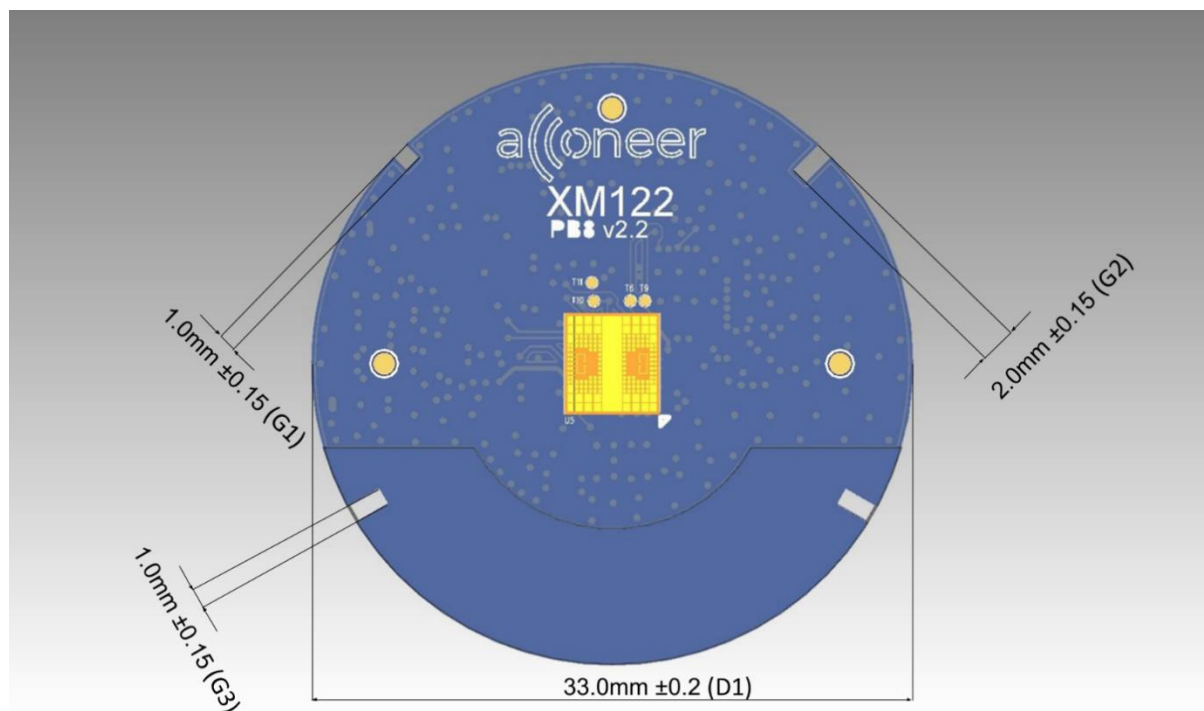



XM122 Module outline – Side view

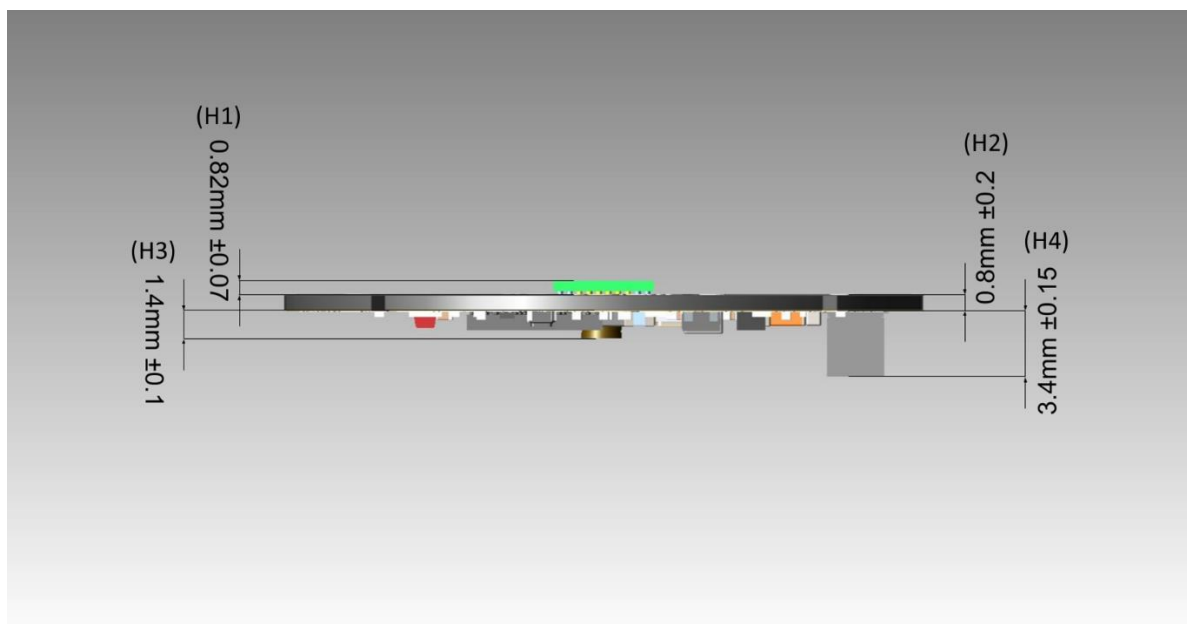

| Distance | Value | Tolerance |
|----------|---------|------------|
| D1 | 33.0 mm | +/-0.2 mm |
| H1 | 0.82 mm | +/-0.07 mm |
| H2 | 0.8 mm | +/-0.2 mm |
| H3 | 1.4 mm | +/-0.1 mm |
| H4 | 3.4 mm | +/-0.15 mm |
| G1 | 1.0 mm | +/-0.15 mm |
| G2 | 2.0 mm | +/-0.15 mm |
| G3 | 1.0 mm | +/-0.15 mm |



8 Regulatory Approval

To be noted is that some regulatory specifications also specify the usage of the module, so users of the module must check regulatory requirements for their own use case and determine if the regulatory approvals described below are sufficient.

8.1 ETSI

Hereby, Acconeer declares that the XM122 module is compliant with directive 2014/53/EU. The XM122 module fulfills the CE marking.

EU Type Examination Certificate

CTC advanced
member of RWTÜV group

Certificate Holder: Acconeer AB
Ideon Gateway, Scheelevägen 27
22370 Lund
Sweden

Product Manufacturer: see Certificate Holder

Product Designation: XM122

Product Description: IoT module

Conformity Assessment:

| Essential requirements | Examined documentation | Result |
|------------------------------------|---|---------|
| EMC RED, Article 3.1b | Technical documentation including test report | conform |
| Radio Spectrum RED, Article 3.2 | Technical documentation including test report | conform |

EU Type Examination Certificate:
In accordance with Annex III of the European Council Directive 2014/53/EU on radio equipment, our opinion is that this equipment type complies with the essential requirements stated above.

Marking:
The product shall be marked with the CE marking as required in the Council Directive 2014/53/EU.

Annexes:
The certificate is only valid in conjunction with the following number of annexes: 1

Validity:
Conformity is provided unless changes/modifications have been done to the standard and/or assessed type of equipment.

Certificate Registration No.: T818769M-01-TEC

CTC advanced GmbH

Authorized signature / title

Saarbrücken

GERMAN NOTIFIED BODY
EUROPEAN ID-NO. 0682

CTC advanced GmbH (formerly CETECOM ICT Services GmbH)
Unterkerkerker Str. 6-10 | 66117 Saarbrücken | Germany | www.ctcadvanced.com



9 Reference documents

- [1] A111 Pulsed Coherent Radar (PCR) Datasheet:
<https://www.acconeer.com/products>
- [2] XM122 IoT Module Evaluation Kit, User guide
<https://www.acconeer.com/products>
- [3] XM122 Module Software User guide
<https://www.acconeer.com/products>
- [4] XB122 IoT Module Breakout board, Product brief
<https://www.acconeer.com/products>
- [5] Nordic nRF50840:
[Nordic Semiconductor](#)
- [6] User Guide – Sensor Integration Electromagnetic Scattering
<https://www.acconeer.com/products>



10 Abbreviations

| | |
|------|---|
| AiP | Antenna in Package |
| API | Application Programming Interface |
| BLE | Bluetooth Low Energy |
| BOM | Bill of Materials |
| EIRP | Equivalent Isotropically Radiated Power |
| GND | Ground |
| GPIO | General Purpose Input/Output |
| HPBW | Half Power Beamwidth |
| HW | HardWare |
| I2C | Inter-Integrated Circuit |
| MAC | Media Access Control |
| MCU | MicroController Unit |
| NVM | Non-Volatile Memory |
| PCR | Pulse Coherent Radar |
| RF | Radio Frequency |
| RSS | Radar System Software |
| SDK | Software Development Kit |
| SoC | System on Chip |
| SPI | Serial Peripheral Interface |
| SW | SoftWare |
| SWD | Serial Wire Debug |
| UART | Universal Asynchronous Receiver/Transmitter |



Disclaimer

The information herein is believed to be correct as of the date issued. Acconeer AB ("**Acconeer**") will not be responsible for damages of any nature resulting from the use or reliance upon the information contained herein. Acconeer makes no warranties, expressed or implied, of merchantability or fitness for a particular purpose or course of performance or usage of trade. Therefore, it is the user's responsibility to thoroughly test the product in their particular application to determine its performance, efficacy and safety. Users should obtain the latest relevant information before placing orders.

Unless Acconeer has explicitly designated an individual Acconeer product as meeting the requirement of a particular industry standard, Acconeer is not responsible for any failure to meet such industry standard requirements.

Unless explicitly stated herein this document Acconeer has not performed any regulatory conformity test. It is the user's responsibility to assure that necessary regulatory conditions are met and approvals have been obtained when using the product. Regardless of whether the product has passed any conformity test, this document does not constitute any regulatory approval of the user's product or application using Acconeer's product.

Nothing contained herein is to be considered as permission or a recommendation to infringe any patent or any other intellectual property right. No license, express or implied, to any intellectual property right is granted by Acconeer herein.

Acconeer reserves the right to at any time correct, change, amend, enhance, modify, and improve this document and/or Acconeer products without notice.

This document supersedes and replaces all information supplied prior to the publication hereof.

© 2023 by Acconeer – All rights reserved



Acconeer AB
Västra Varvsgatan 19
211 77 Malmö
Sweden

www.acconeer.com
info@acconeer.com
+46 10 218 92 00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Acconeer:](#)

[XM122](#)