

LCD-Modul 4x20 - 6.45mm

INCL. CONTROLLER SSD1803

*no mounting
required*

EA DIP203B-6NLW



*EA DIP203J-6NLW:
Dimension 75 x 46 mm*

FEATURES

- * HIGH-CONTRAST LCD-SUPERTWIST DISPLAY
- * BLUE BACKGROUD WITH WHITE CHARACTERS
- * BLACK&WHITE FSTN
- * EXTREME COMPACT WITH 75mm WIDTH
- * BUILT-IN CONTROLLER SSD1803 (VERY SIMILAR TO HD44780)
- * 4- AND 8-BIT INTERFACE FOR DATABUS
- * SERIAL SPI-INTERFACE (SID, SOD, SCLK, CS)
- * POWER SUPPLY +3.3V / TYP. 4mA (w./o. B./L.)
- * OPERATING TEMP. RANGE -20..+70°C
- * AUTOMATIC TEMPERATURE COMPENSATION BUILT-IN
- * LED-BACKLIGHT WHITE, max. 75mA@+25°C
- * 16 ICONS (BATTERY, ARROWS ETC.) AT THE TOP EDGE
- * NO MONTING IS REQUIRED: JUST SOLDER INTO PCB
- * SINGLE ROW SOCKET AVAILABLE: EA B254-12 (1 PC.)
- * 128x64 GRAPHIC WITH SAME DIMENSION AND SAME PINOUT: EA DIP128

ORDERING INFORMATION

LCD-MODULE 4x20 - 6.45mm WITH LED-B./L. BLUE
FSTN BLACK ON WHITE
SOCKET 4.5mm HEIGHT, 12 POSITIONS (1 PC.)

EA DIP203B-6NLW
EA DIP203J-6NLW
EA B254-12

PINOUT

4-/8-Bit Mode (Factory Set)					
Pin	Symbol	Function	Pin	Symbol	Function
1	VSS	Power Supply 0V (GND)	13		not connected
2	VDD	Power Supply +3.3 V	14	VSS	Power Supply 0V (GND)
3	VCI	Contrast Adjustment	15	D0	Display Data, LSB
4	RES	L: Reset	16	D1	Display Data D1
5	RS	H=Data; L=Command	17	D2	Display Data D2
6	R/W	H=Read; L=Write	18	D3	Display Data D3
7	E	Enable	19	D4 (D0)	Display Data D4
8		not connected	20	D5 (D1)	Display Data D5
9		not connected	21	D6 (D2)	Display Data D6
10		not connected	22	D7 (D3)	Display Data, MSB
11		not connected	23	A	LED-B/L + (ext. Resistor requ)
12		not connected	24	C	LED-B/L -

SPI Mode (Solder link "SPI" closed)					
Pin	Symbol	Function	Pin	Symbol	Function
1	VSS	Power Supply 0V (GND)	13		not connected
2	VDD	Power Supply +3.3V	14	VSS	Power Supply 0V (GND)
3	VCI	Contrast Adjustment	15	SOD	Data Out
4	RES	L: Reset	16		not connected
5	CS	Chip Select	17		not connected
6	SID	Data In	18		not connected
7	SCLK	Shift Clock	19		not connected
8		not connected	20		not connected
9		not connected	21		not connected
10		not connected	22		not connected
11		not connected	23	A	LED-B/L + (ext. Resistor requ)
12		not connected	24	C	LED-B/L -

BACKLIGHT

Using the LED backlight requires a current source or external current-limiting resistor. Forward voltage for white LED backlight is 3.0~3.6V. Please take care of derating for $T_a > +25^\circ\text{C}$

Attention: Do never drive backlight directly to VDD; this may damage backlight immediately !

The blue display cannot be read without backlight. For direct sunlight we suggest to use the J-type.

TABLE OF COMMAND (SSD1803)

Instruction	C ode												Description	Execute Time (270kHz)
	RE Bit	RS	R/W	DB 7	DB 6	DB 5	DB 4	DB 3	DB 2	DB 1	DB 0			
Clear Display	*	0	0	0	0	0	0	0	0	0	1	Clears all display and returns the cursor to the home position (Address 0).	1.53ms	
Cursor At Home	0	0	0	0	0	0	0	0	0	1	*	Returns the Cursor to the home position (Address 0). Also returns the display being shifted to the original position. DD RAM contents remain unchanged.	1.53ms	
Power Down Mode	1	0	0	0	0	0	0	0	0	1	PD	Set Pow er dow n mode bit. PD=0: pow erdown mode disable PD=1: pow erdown mode enable	39µs	
Entry Mode Set	0	0	0	0	0	0	0	0	1	I/D	S	Cursor moving direction (I/D=0: dec; I/D=1: inc) shift enable bit (S=0: disable; S=1: enable shift)	39µs	
	0	0	0	0	0	0	0	0	1	1	BID	Segment bidirectional function (BID=0: Seg1->Seg60; BID=1: Seg60->Seg1)	39µs	
Display On/Off Control	0	0	0	0	0	0	0	1	D	C	B	D=0: display off; D=1: display on C=0: cursor off; C=1: cursor on B=0: blink off; B=1: blink on	39µs	
extended Function Set	1	0	0	0	0	0	0	1	FW	BW	NW	FW=0: 5-dot font w idth; FW=1: 6-dot font w idth BW=0: normal cursor; BW=1: inverting cursor NW=0: 1- or 2-line (see N); NW=1: 4-line display	39µs	
Cursor / Display Shift	0	0	0	0	0	0	1	S/C	R/L	*	*	Moves the Cursor or shifts the display S/C=0: Cursor Shift; S/C=1: display shift R/L=0: shift to left; R/L=1: shift to right	39µs	
Scroll Enable	1	0	0	0	0	0	1	H4	H3	H2	H1	Determine the line for horizontal scroll	39µs	
Function Set	0	0	0	0	0	1	DL	N	RE	DH	REV	sets interface data length (DL=0:4-bit; DL=1:8-bit) number of display lines (N=0: 1-line; N=1: 2-line) extension register (RE= 0/1) scroll/shift (DH=0: dot scroll; DH=1: display shift) reverse bit (REV=0:normal; REV=1:inverse display)	39µs	
	1	0	0	0	0	1	DL	N	RE	BE	LP	CG-/SEG-RAM blink (BE=0: disable; BE=1: enable) LP=0: normal mode; LP=1: low pow er mode	39µs	
CG RAM Address Set	0	0	0	0	1	AC						Sets the CG RAM address. CG RAM data is sent and received after this setting.	39µs	
SEG RAM Address Set	1	0	0	0	1	* *		AC				Sets the SEG RAM address. SEG RAM data is sent and received after this setting.	39µs	
DD RAM Address Set	0	0	0	1	AC							Sets the DD RAM address. DD RAM data is sent and received after this setting.	39µs	
Set Scroll Quantity	1	0	0	1	*	SQ						Sets the quantity of horizontal dot scroll (DH=0)	39µs	
Busy Flag / Address Read	*	0	1	BF	AC							Reads Busy flag (BF) indicating internal operation is being performed and reads address counter contents.	-	
Write Data	*	1	0	Write Data								Writes data into internal RAM (DD RAM / CG RAM / SEG RAM)	43µs	
Read Data	*	1	1	Read Data								Reads data from internal RAM (DD RAM / CG RAM / SEG RAM)	43µs	

SERIAL MODE SPI

Factory set for interface is parallel with 4 bit or 8 bit data bus. Alternative module can be programmed with serial data stream. For that solder link **SPI** has to be closed. Hardware specification for serial operation mode is written down in user manual for SSD1803: http://www.lcd-module.de/fileadmin/user_upload/pdf/zubehoer/ssd1803_2_0.pdf. Software for initialisation and programming keeps the same.

EA DIP203-6

Example of initialisation, 8 bit mode and SPI												
Command	RE Bit	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Hex Note
Function Set	0	0	0	0	0	1	1	0	0	0	0	\$30 8 bit data length, extension bit RE=0
Entry Mode Set	0	0	0	0	0	0	0	0	1	1	0	\$06 Cursor Auto-Increment
Function Set	0	0	0	0	0	1	1	0	1	1	0	\$36 8 bit data length, RE =1, blink enable BE =1
ext. Function Set	1	0	0	0	0	0	0	1	0	0	1	\$09 4 line mode
Set SEGRAM adr	1	0	0	0	1	0	0	0	0	0	0	\$40 Icon RAM address: \$00
16 x Write Data	1	1	0	0	0	0	0	0	0	0	0	\$00 to clear all icons: write 16x \$00
Function Set	1	0	0	0	0	1	1	0	0	0	0	\$30 8 bit data length, bit RE =0
Display ON/OFF	0	0	0	0	0	0	0	1	1	1	1	\$0F Display on, Cursor on, Cursor blink
Clear Display	0	0	0	0	0	0	0	0	0	0	1	\$01 Clear display, place cursor to 1st. col. /1st. row

Adress:

1st. line \$00..\$13
2nd. line \$20..\$33
3rd. line \$40..\$53
4th. line \$60..\$73


Please make shure that software will check busy-flag before writing any command !

CHARACTER SET

Beside there's a copy of built.in character set. In addition to that up to 8 individual character can be created.

CONTRAST ADJUSTMENT

Contrast will be set by pin 3 (VCI). Module EA DIP203 comes with built-in temperature compensation for -20..+70°C as a standard; any contrast adjustment during operation is no longer required.

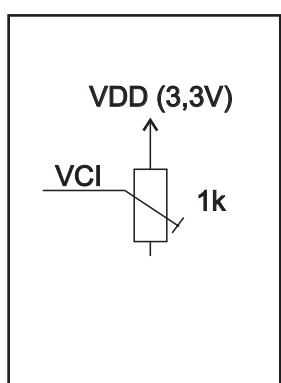

Upper bit	Lower bit	LLLL	LLH	LHL	LHH	LHLL	LHLH	LHHL	LHHH	HLLL	HLH	HLHL	HLHH	HHLH	HHHL	HHHH
CG RAM (1)	(1)	0	1	P	z	F	0	J	0	0	7	0	0	0	0	0
(2)	(2)	1	!	1	A	Q	a	1	J	0	0	0	0	0	0	0
(3)	(3)	2	"	2	B	R	b	r	2	1	0	0	0	0	0	0
(4)	(4)	3	#	3	C	S	c	s	3	0	0	0	0	0	0	0
(5)	(5)	4	x	4	D	T	d	t	4	0	0	0	0	0	0	0
(6)	(6)	5	%	5	E	U	e	u	5	0	0	0	0	0	0	0
(7)	(7)	6	&	6	F	U	f	u	6	0	0	0	0	0	0	0
(8)	(8)	7	'	7	G	W	g	w	7	0	0	0	0	0	0	0
(1)	(1)	8	~	8	H	X	h	x	8	0	0	0	0	0	0	0
(2)	(2)	9	>	9	I	Y	i	y	9	0	0	0	0	0	0	0
(3)	(3)	*	*	*	J	Z	j	z	*	0	0	0	0	0	0	0
(4)	(4)	+	+	+	K	A	k	a	+	0	0	0	0	0	0	0
(5)	(5)	<	<	<	L	O	l	o	<	0	0	0	0	0	0	0
(6)	(6)	=	=	=	M	N	m	n	=	0	0	0	0	0	0	0
(7)	(7)	.	.	.	N	O	n	o	.	0	0	0	0	0	0	0
(8)	(8)	/	/	/	?	Q	q	?	/	0	0	0	0	0	0	0

CREATING YOUR OWN CHARACTERS

All these character display modules got the feature to create 8 own characters (ASCII Codes 0..7) in addition to the 240 ROM fixed codes.

- 1.) The command "CG RAM Address Set" defines the ASCII code (Bit 3,4,5) and the dot line (Bit 0,1,2) of the new character. Example demonstrates creating ASCII code \$00.
- 2.) Doing 8 times the write command "Data Write" defines line by line the new character. 8th. byte stands for the cursor line.
- 3.) The newly defined character can be used as a "normal" ASCII code (0..7); use with "DD RAM Address Set" and "Data Write".


Set CG RAM Address				Data											
Adresse			Hex	Bit											
7	6	5	4	3	2	1	0	Hex							
0	1	0	0	0	0	0	1	0	0	\$04	X X X				
					0	0	1	0	0	\$04					
					0	1	0	0	0	\$04					
					0	1	1	0	0	\$04					
					1	0	0	0	0	\$15					
					1	0	1	0	0	\$0E					
					0	0	1	0	0	\$04					
					0	0	0	0	0	\$00					

DRIVING WITH 5V-SYSTEMS


The supply voltage of the display is necessarily 3.3V. If a 5V-system is used, the level have to be adapted. For example you can use a bidirectional levelshifter (e.g. PS 74LVC4245A), like shown in the opposite figure.

COMPATIBILITY WITH EA DIP204-6


The displays of EA DIP203 and EA DIP204 series are electrically and mechanically identical to each other running with 3.3V supply mode. Merely a 5V supply is not acceptable with the new EA DIP203 series.

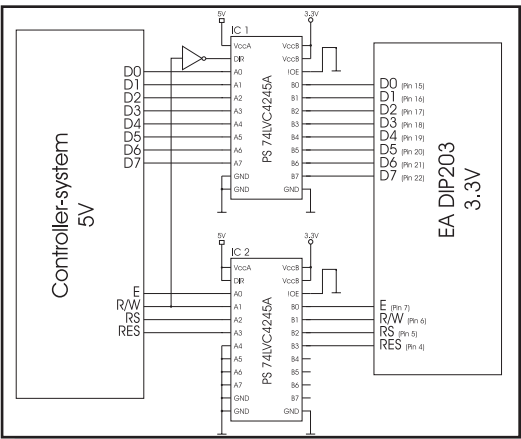

DIMENSIONS

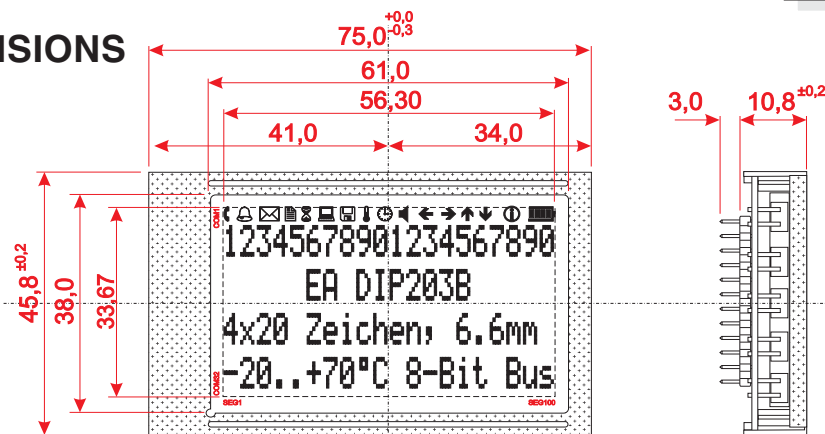

Note:
LC-Displays are generally not suited to wave or reflow soldering. Temperatures of over 80°C can cause lasting damage.

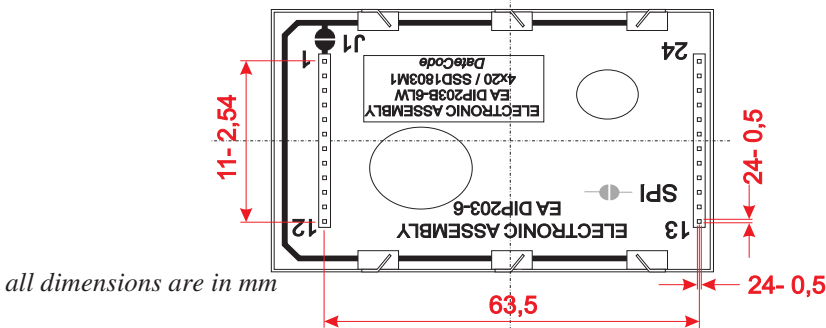

DRIVING THE SYMBOLS

After power-on symbols will be set accidental. To switch off them all please refer to the example of initializing on page 3. To display an individual symbol have a look at the program example at the right. Each symbol can be displayed in normal (solid) and blinking style.

Example program to display an icon (8 bit / SPI)														
Command	RE Bit	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Hex	Note	
Busy-Flag / Address read	0	0	1	BF	AC								perhaps store current DDRAM address: read AC and save as LASTADR=AC	
Function Set	0	0	0	0	0	1	1	0	1	1	0	\$36	Set to 8 bit data length, RE=1, Blink enable BE=1	
Set SEGRAM adr	1	0	0	0	1	0	0	0	0	1	0	\$42	Set Icon-RAM address to \$02 (letter symbol)	
Write Data	1	1	0	0	0	0	1	0	0	0	0	\$10	Write \$10 to display symbol	
Function Set	1	0	0	0	0	1	1	0	0	0	0	\$30	Set to 8 bit data length, extension bit RE=0	
Set DDRAM adr	0	0	0	1	LASTADR							\$80	Restore DDRAM address	

Icon - Symbols														
SEGRAM address	\$00	\$01	\$02	\$03	\$04	\$05	\$06	\$07	\$08	\$09	\$0A	\$0B	\$0C	\$0D
data solid	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10	\$10
data blink (BE=1)	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50	\$50

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Display Visions:](#)

[EA DIP203B-6NLW](#)