

UNIVERSAL FLASH STORAGE

(UFS 3.1)

UFS64G-CY14-02N01
UFS128-CY14-02N01
UFS256-CY14-02N01

Datasheet
v1.0

Kingston Digital Inc.

CONTENTS

| | |
|---|----|
| Product Features : | 3 |
| 1 Introduction..... | 4 |
| 2 Specification | 4 |
| 2.1 Device Summary | 4 |
| 2.2 System Performance | 4 |
| 2.3 Power Consumption | 5 |
| 2.4 Device Capacity According To Partition..... | 5 |
| 3 Mechanical Specification..... | 6 |
| 3.1 Ball Definition | 6 |
| 3.2 Package Dimension | 8 |
| 11mm*13mm*0.85mm Max. : For 64GB / 128GB..... | 8 |
| 11mm*13mm*0.95mm Max. : For 256GB | 8 |
| 3.3 UFS Block Diagram | 10 |
| 3.4 Reference Clock..... | 11 |
| 3.4.1 Reference Clock | 12 |
| 3.5 Power Mode | 13 |
| 3.5.2 Idle Power Mode..... | 14 |
| 3.5.3 Pre-Active Power Mode..... | 14 |
| 3.5.4 UFS-Sleep Power Mode..... | 15 |
| 3.5.5 Pre-Sleep Power Mode | 15 |
| 3.5.6 Pre-DeepSleep Power Mode | 16 |
| 3.5.7 UFS-PowerDown Power Mode..... | 16 |
| 3.5.8 Pre-PowerDown Power Mode | 17 |
| 3.5.9 Responses to SCSI commands | 18 |
| 3.5.10 Responses to SCSI commands (cont'd)..... | 19 |
| 4 UFS SCSI Domain | 20 |
| 4.1 UFS Logical Unit Definition | 20 |
| 4.2 SCSI Command..... | 21 |
| 5 UFS Supported Pages..... | 22 |
| 5.1 Control Mode Page..... | 23 |
| 5.2 Read-Write Error Recovery Mode Page | 25 |
| 5.3 Caching Mode Page..... | 27 |
| 5.4 Caching Mode Page Parameters..... | 28 |
| 5.5 Vital product data parameters | 28 |
| 5.5.1 Overview | 28 |
| 5.5.2 VPD page format | 29 |
| 5.5.3 Supported VPD Pages VPD page..... | 30 |
| 5.5.4 Mode Page Policy VPD page (cont'd)..... | 32 |
| 6 Device Marking..... | 33 |
| 7 Revision History..... | 34 |

Product Features :

<Common>

- Packaged NAND flash memory with UFS 3.1 interface
- Compliant with UFS Specification Ver.3.1
- Support for High Speed Gear Rates : Up to HS-GEAR4 (2 lane)
 - PWM : supports to Gear 1
 - HS-BURST: supports to Gear 1~4
- UFS layering :
 - UFS Command Set Layer (UCS)
 - UFS Transport Protocol Layer (UTP)
 - UFS Interconnect Layer (UIC)
- Temperature :
 - Operation : -25°C ~ 85°C , Storage : -40°C ~ 85°C
- Operating voltage :
 - VCCQ=1.14~1.26V, 1.2V (Typ) , VCC = 2.4~2.7V , 2.5V (Typ)
- Error free memory access
 - Internal error correction code (ECC) to protect data communication
 - Internal enhanced data management algorithm
 - Solid protection of sudden power failure safe-update operations for data content
- Security
 - Discard
 - Replay Protected Memory Block (RPMB)
 - Support secure bad block erase commands
 - Enhanced write Protection with permanent and partial protection options
- Performance
 - High Priority Interrupt
 - Background Operation
 - Command Queuing
 - Data tag
 - Context ID
 - Cache Operation
 - Write Booster
 - Host Performance Booster
- Reliability
 - Dynamic Capacity
 - Real Time Clock
 - Production State Awareness (PSA)
- Quality
 - RoHS compliant (for detailed RoHS declaration, please contact your KSI representative.)
- Similar functional features as eMMC.
 - Multiple logical units with configurable characteristics
 - Reliable write operation
 - Task management
 - Device Health (EOL)
 - Field Firmware Update(FFU)

1 Introduction

Kingston UFS products follow the JEDEC UFS 3.1 standard. It is an ideal universal storage solution for many electronic devices, including smartphones, camera, Tablets, Electronic toys , Smart home ,Wearable ,Automotive sensor ,Artificial intelligence robotics , Virtual reality (VR), Unmanned aerial vehicle that require mass storage. UFS encloses the 3D NAND and UFS controller inside as one JEDEC standard package, providing a standard interface to the host. The UFS controller directly manages NAND flash, including ECC, wear-leveling, IOPS optimization and read sensing.

2 Specification

2.1 Device Summary

| Product Part Number | NAND Density | Package | Operating voltage |
|---------------------|--------------|---------|---|
| UFS64G-CY14-02N01 | 64GB | FBGA153 | V _{CC} = 2.4~2.7 V V _{CCQ} = 1.14V~1.26V |
| UFS128-CY14-02N01 | 128GB | | |
| UFS256-CY14-02N01 | 256GB | | |

2.2 System Performance

| Products | Write Booster value | |
|-------------------|------------------------|-------------------------|
| | Sequential Read (MB/s) | Sequential Write (MB/s) |
| UFS64G-CY14-02N01 | 820 | 520 |
| UFS128-CY14-02N01 | 1650 | 950 |
| UFS256-CY14-02N01 | 1750 | 1150 |

Note 1: For performance number under other test conditions, please contact KSI representatives.

Note 2: Performance numbers might be subject to change without notice.

Note 3: Values given for an 2 lane bus width, a clock frequency of 26MHz(HS-Gear 4)

| Products | Typical value | |
|-------------------|------------------------|-------------------------|
| | Sequential Read (MB/s) | Sequential Write (MB/s) |
| UFS64G-CY14-02N01 | 820 | 100 |
| UFS128-CY14-02N01 | 1650 | 200 |
| UFS256-CY14-02N01 | 1750 | 390 |

Note 1: For performance number under other test conditions, please contact KSI representatives.

Note 2: Performance numbers might be subject to change without notice.

Note 3: Values given for an 2 lane bus width, a clock frequency of 26MHz(HS-Gear 4)

2.3 Power Consumption

| Products | Read(mA) | | Write(mA) | | Sleep(mA) | | Deep Sleep(mA) | |
|-------------------|-------------------------|------------------------|-------------------------|------------------------|-------------------------|------------------------|-------------------------|------------------------|
| | V _{CCQ} (1.2V) | V _{CC} (2.5V) | V _{CCQ} (1.2V) | V _{CC} (2.5V) | V _{CCQ} (1.2V) | V _{CC} (2.5V) | V _{CCQ} (1.2V) | V _{CC} (2.5V) |
| UFS64G-CY14-02N01 | 537 | 124 | 439 | 60 | 0.36 | 0.05 | 0.15 | 0.06 |
| UFS128-CY14-02N01 | 568 | 258 | 434 | 116 | 0.41 | 0.06 | 0.16 | 0.06 |
| UFS256-CY14-02N01 | 554 | 294 | 423 | 229 | 0.31 | 0.07 | 0.15 | 0.08 |

Note 1: Values given for an 2 lane bus width, a clock frequency of 26MHz(HS-Gear 4),100ms RMS current value,
V_{CC}= 2.5V±5%, V_{CCQ}=1.2V±5%, Ta = 25°C

Note 2: Deep Sleep = HIBERNATE_STATE+ Hibern8.

Note 3: Current numbers might be subject to change without notice.

2.4 Device Capacity According To Partition

| Capacity | User Density | Boot partition 1 (LUN1) | Boot partition 2 (LUN2) | RPMB |
|-------------------|--------------------|----------------------------|----------------------------|------|
| UFS64G-CY14-02N01 | 64013467648 Bytes | 4MB | 4MB | 16MB |
| UFS128-CY14-02N01 | 128026935296 Bytes | 4MB | 4MB | 16MB |
| UFS256-CY14-02N01 | 256053870592 Bytes | 4MB | 4MB | 16MB |

3 Mechanical Specification

3.1 Ball Definition

Table 3-1 FBGA153 Ball information

| Name | Type | Description |
|---|--------|--|
| VCC | Supply | Supply voltage for the memory devices |
| VCCQ | Supply | Supply voltage used typically for the memory controller and optionally for the PHY interface, the memory IO, and any other internal very low voltage block |
| VDDiQ | Input | Input terminal to provided bypass capacitor for VCCQ internal regulator |
| VDDi | Input | Input terminal to provide bypass capacitor for VCC internal regulator |
| VSS | Supply | Ground |
| RST_n | Input | Input hardware reset signal. This is an active low signal |
| REF_CLK | Input | Input reference clock. When not active, this signal should be pull-down or driven low by the host SoC. |
| Differential input signals into UFS device from the host | | |
| DIN_t or DIN0_t DIN_c or DIN0_c | Input | Downstream data lane 0 DIN_t is the positive node of the differential signal. |
| DIN1_t, DIN1_c | Input | Downstream data lane 1 |
| Differential output signals from the UFS device to the host | | |
| DOUT_t or DOUT0_t DOUT_c or DOUT0_c | Output | Downstream data lane 0 DOUT_t is the positive node of the differential signal. |
| DOUT1_c, DOUT1_c | Output | Upstream data lane 1 |
| NC | | No connect. Need Keep floating. |
| VSF | | Vendor Specific Function. Need Keep floating. |
| RFU | | No connect. Reserved for future use. Need Keep floating. |



Figure 3-1 Ball assignment for FBGA 153L


| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 |
|---|--------------------|--------------------|-------------------|-----------|------|------|------|-----|------|------|-----|-----|-----|-----|
| A | NC | NC | VDDI _Q | VCCQ | VCCQ | NC | NC | NC | VDDi | NC | NC | NC | NC | NC |
| B | NC | VSS | RFU | VCCQ | VCCQ | NC | NC | VCC | VCC | NC | VSS | VSS | RFU | NC |
| C | VSS | VSS | VSS | VCCQ | VCCQ | NC | NC | VCC | VCC | RFU | VSS | VSS | RFU | RFU |
| D | DIN1 _t | DIN1 _c | VSS | NC(Index) | | | | | | | | VSS | VSS | VSS |
| E | VSS | VSS | VSS | | VCCQ | VSF1 | VSF2 | VCC | VSF3 | VSF4 | | VSS | RFU | RFU |
| F | DINO _t | DINO _c | VSS | | VCCQ | | | | | VSF5 | | VSS | VSS | VSS |
| G | VSS | VSS | VSS | | VSF6 | | | | | VSS | | VSS | RFU | RFU |
| H | REF_CLK | RST _n | VSS | | VSS | | | | | VSS | | VSS | VSS | VSS |
| J | VSS | VSS | VSS | | VSS | | | | | VSF7 | | VSS | RFU | RFU |
| K | DOUT0 _c | DOUT0 _t | VSS | | VSS | NC | NC | VCC | NC | VSF8 | | VSS | VSS | VSS |
| L | VSS | VSS | VSS | | | | | | | | | VSS | RFU | RFU |
| M | DOUT1 _c | DOUT1 _t | VSS | VSS | VSS | RFU | RFU | NC | NC | RFU | NC | VSS | VSS | VSS |
| N | NC | VSS | VSS | VSS | VSS | RFU | RFU | VCC | VCC | RFU | VSS | VSS | RFU | NC |
| P | NC | NC | RFU | VSS | VSS | RFU | RFU | VCC | VCC | VSF9 | VSS | VSS | NC | NC |

3.2 Package Dimension

11mm*13mm*0.85mm Max. : For 64GB / 128GB

11mm*13mm*0.95mm Max. : For 256GB

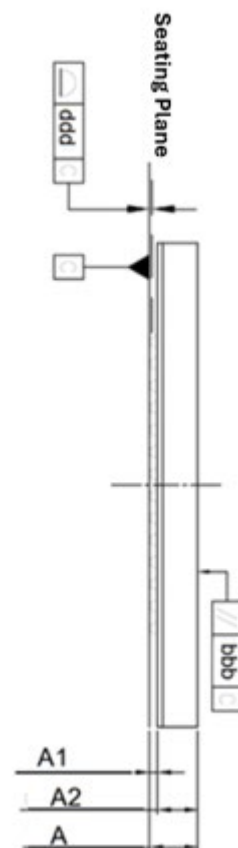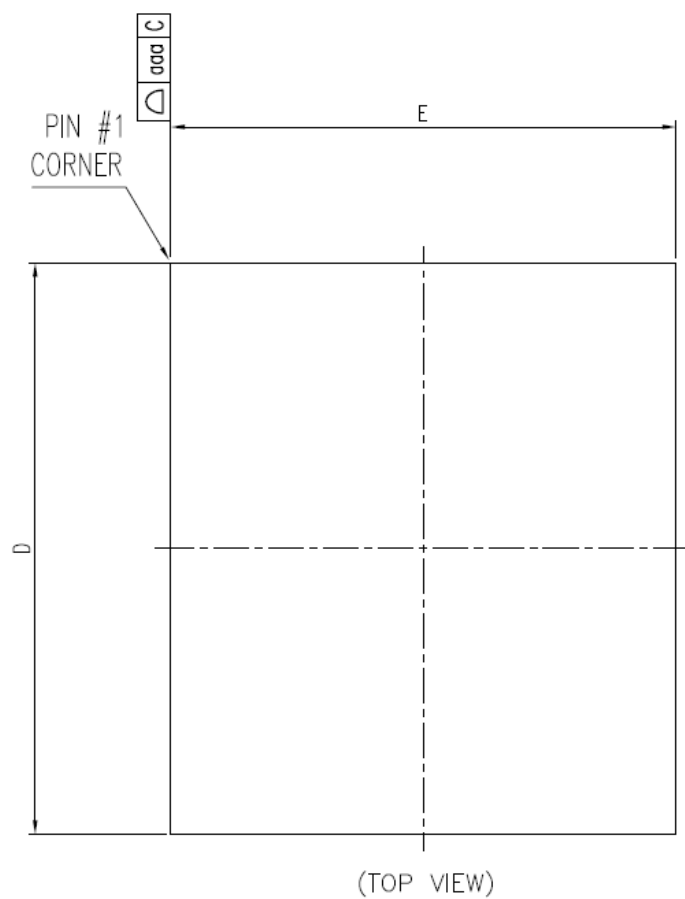

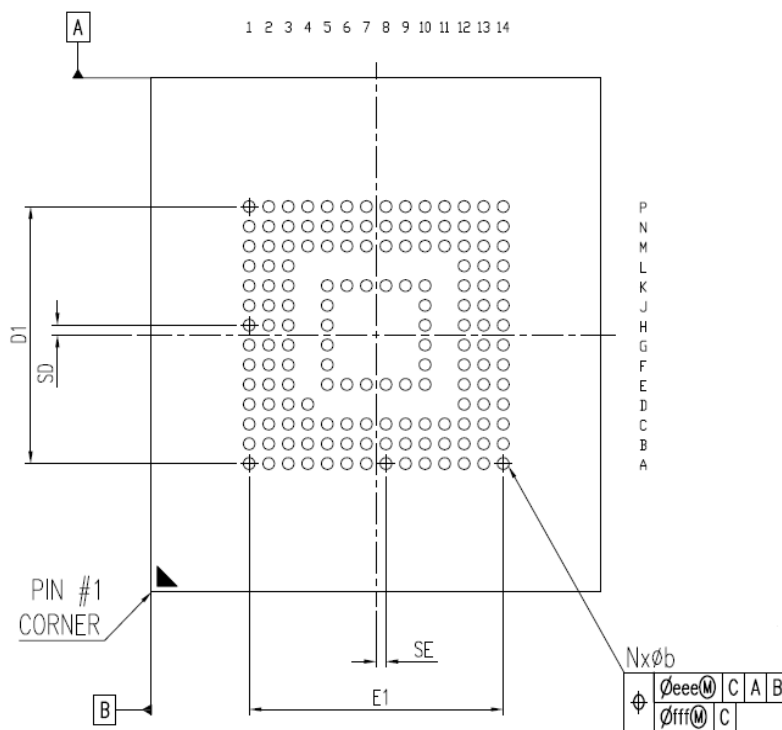

3.3 UFS Block Diagram

Figure 3.2 represents a conceptual drawing of UFS device. Utilization of internal regulators and Connection of those to different parts of the sub-system may differ per implementation.

Figure 3-2 Device Block diagram

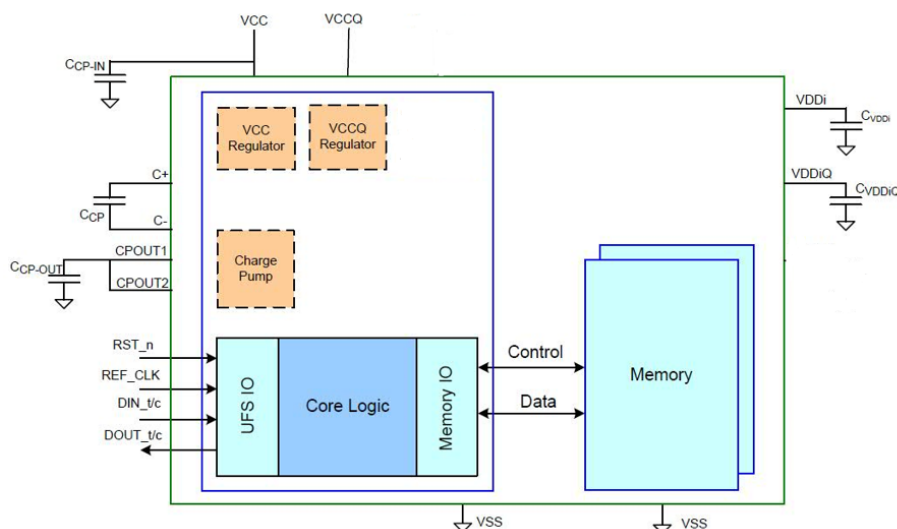


Table 3-2 - Power Supply Parameter

| Parameter | Symbol | Min | Max | Unit | Notes |
|---|--------|------|------|------|-------|
| VCC DC operating range | VCC | 2.4 | 2.7 | V | 3 |
| VCCQ DC operating range | VCCQ | 1.14 | 1.26 | V | 1,3 |
| Supply Voltage power up timing for 3.3 V | tPRUH | | 35 | ms | 2 |
| Supply Voltage power up timing for 2.5 V | tPRUH | | 35 | ms | 2 |
| Supply Voltage power up timing for 1.2 V | tPRUV | | 20 | Ms | 2 |
| VCC internal regulator capacitor | CVDDi | 1 | | μF | |
| VCCQ internal regulator capacitor | CVDDiQ | 1 | | uF | |
| <p>NOTE 1 See [JESD8-12A]</p> <p>NOTE 2 Power up timing starts when the supply voltage crosses 300 mV and ends when it reaches the minimum operating value</p> <p>NOTE 3 Depending on the vendor, valid power configuration may be defined in each UFS device vendor's data sheet. Refer to the vendor datasheet for the detail</p> | | | | | |

3.4 Reference Clock

The M-PHY specification defines the reference clock optional for the State Machine Type I [MIPI M-PHY]. As the PWM signaling is self-clocked the reference clock is not required for the data latching. Therefore, UFS devices shall be able to operate without reference clock in LS-MODE (LINE-CFG, SLEEP and PWM-BURST).


Still existence of the reference clock may be utilized to enable lower BER and faster HS-MODE PLL/DLL locking. Thus a UFS device shall implement a square wave single ended reference clock input and it requires the presence of a reference clock with the characteristics described in this section when operating in HS-MODE (STALL and HS-BURST). In order to avoid potential race conditions, it is recommended that such reference clock is already present when requesting a power mode change into Fast_Mode or FastAuto_Mode.

Table 3-3 – Reference Clock

| Parameter | Symbol | Nominal | | Unit | Notes |
|--|----------|------------------|-------------|-------|-------|
| Frequency | fref | 19.2 / 26 / 38.4 | | MHz | 1 |
| Parameter | Symbol | Min | Max | Unit | Notes |
| Frequency Error | fERROR | -150 | +150 | ppm | |
| Input High Voltage | VIH | 0.65 * VCCQ | | V | 2 |
| Input Low Voltage | VIL | | 0.35 * VCCQ | V | 2 |
| Input Clock Rise Time | tIRISE | | 2 | ns | 3 |
| Input Clock Fall Time | tIFALL | | 2 | ns | 3 |
| Duty Cycle | tDC | 45 | 55 | % | 4 |
| Phase Noise | N | | -66 | dBc | 5 |
| Noise Floor Density | Ndensity | | -140 | dBc/H | 6 |
| Input Impedance | RLRX | 100 | | kΩ | 7 |
| | CLRX | | 5 | pF | |
| NOTE 1 HS-BURST rates A and B are achieved with integer multipliers of fref. | | | | | |
| NOTE 2 Figure 3-3 shows the input levels VIL,MAX to VIH,MIN. | | | | | |
| NOTE 3 Clock rise time and clock fall time shall be measured from 20% to 80% of the window defined by VIL,MAX to VIH,MIN, see Figure 3-3. | | | | | |
| NOTE 4 Clock duty cycle shall be measured at the crossings of the REF_CLK signal with the midpoint VMID, defined as: VMID = (VIL,MAX + VIH,MIN) / 2, see Figure 3-3. | | | | | |
| NOTE 5 Integrated single side band phase noise from 50kHz to 10MHz. This parameter refers to the random jitter only. | | | | | |
| NOTE 6 White noise floor. This parameter refers to the random jitter only. | | | | | |
| NOTE 7 RLRX and CLRX include Rx package and Rx input impedance. | | | | | |

3.4.1 Reference Clock


Figure 3-3- Clock input levels, rise time and fall time

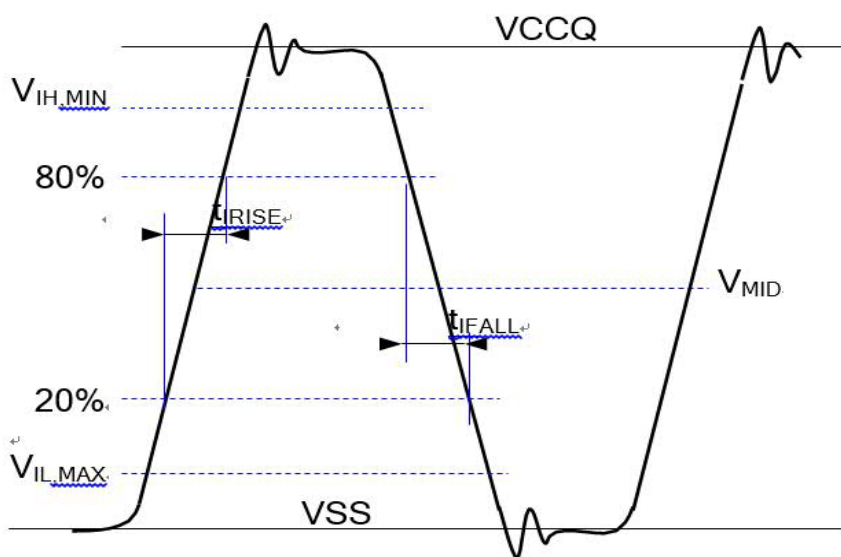

3.5 Power Mode

The UFS device support multiple power mode which controlled by the START STOP UNIT command and some attributes. UFS will support seven power mode(Active,Idle,Pre-active,UFS sleep,Pre-sleep,UFS-PowerDown,Pre-Power down) defined by JEDEC UFS 3.1 specification.

Figure 3-4- Power Mode state Machine

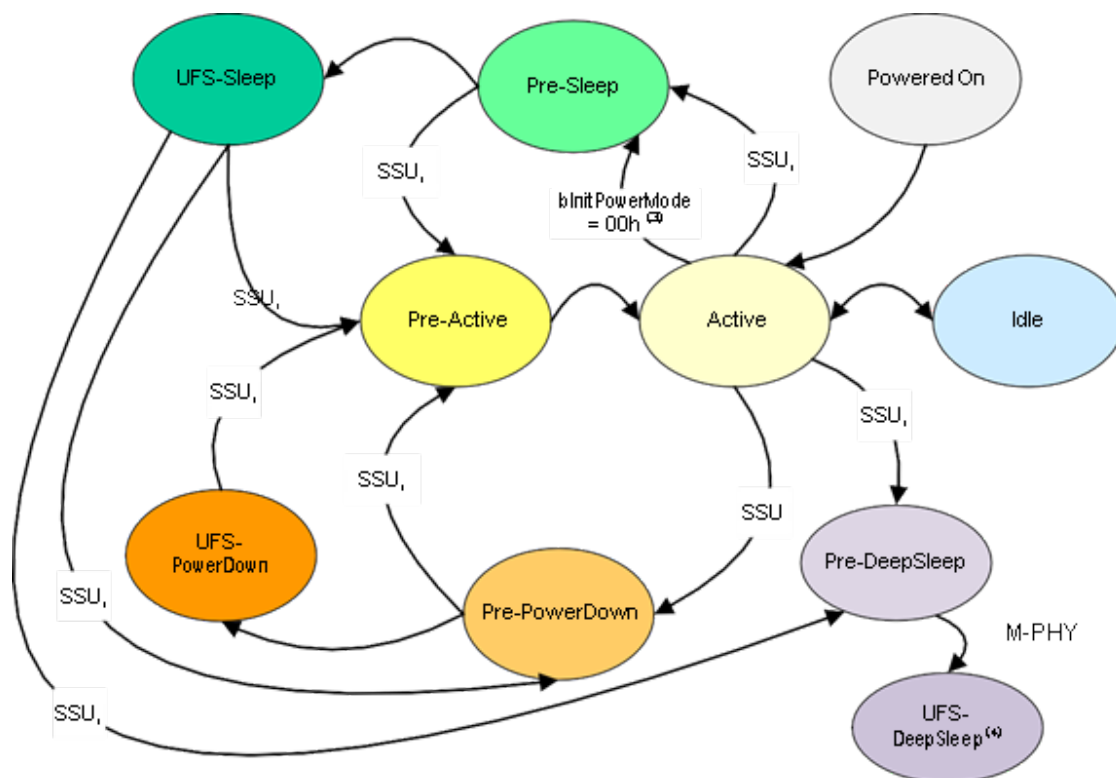

- (1) This transition may occur only if the SSU command that caused the transition to Pre-Sleep had IMMED set to one.
- (2) This transition may occur only if the SSU command that caused the transition to Pre-PowerDown had IMMED set to one.
- (3) This automatic transition shall occur at the end of device initialization if bInitPowerMode = 00h.
- (4) The only way to exit from UFS-DeepSleep power mode is using a hardware reset or a power cycle.

| UFS Power mode | Unipro Power Mode | M-phy Power Mode | VCC Power |
|----------------|-------------------|------------------|-----------|
| ACTIVE | FAST_STATE | HS-BURST | ON |
| IDLE | HIB_STATE | Hibern8 | ON |
| SLEEP | HIB_STATE | Hibern8 | OFF/ON |
| DEEP SLEEP | OFF_STATE | UNPOWERED | OFF/ON |
| POWER DOWN | HIB_STATE | Hibern8 | OFF/ON |

3.5.1 Active Power Mode

Valid values for the bActiveICCLLevel are from “00h” to “0Fh”, other values are reserved and should not be set. UFS devices should primarily use settings of “06h” and “0Ch”, for normal (battery) and high (plugged in) power operating modes.

The bInitActiveICCLLevel parameter in the Device Descriptor allows the user to configure the Active ICC level after power on or reset.

The bInitPowerMode parameter in the Device Descriptor defines the power mode to which the device shall transition to after completing the initialization phase (fDeviceInit cleared to zero). Active Mode can be entered from the Powered On mode or the Pre-Active mode after the completion of all setup necessary to handle commands.

The following power mode may be: Idle, Pre-Sleep, or Pre-PowerDown.
All supported commands are available in Active Mode.

3.5.2 Idle Power Mode

The Idle power mode is reached when the device is not executing any operation. In general, the M-PHY interface may be in STALL, SLEEP or HIBERN8 state. If background operations are continuing, the device should be considered Active power mode.

This mode can only be entered from an Active power mode, and the following state is always the Active power mode. The receipt of any command will transition the device into Active power mode.

3.5.3 Pre-Active Power Mode

The Pre-Active power mode is a transitional mode associated with Active power mode. The power consumed will be no more than that consumed in Active power mode. The device shall remain in this power mode until all of the preparation needed to accept commands has been completed.

Pre-Active power mode can be entered from Pre-Sleep, Sleep, Pre-PowerDown, or PowerDown. The following power mode is the Active power mode.

- a. The Device well known logical unit may successfully complete only: START STOP UNIT command and REQUEST SENSE command; other commands may be terminated with CHECK CONDITION status, with the sense key set to NOT READY, with the additional sense code set to LOGICAL UNIT IS IN PROCESS OF BECOMING READY. See table 3-4 for further detail.
- b. A REQUEST SENSE command shall be terminated with GOOD status and provide pollable sense data with the sense key set to NO SENSE, and the additional sense code set to LOGICAL UNIT TRANSITIONING TO ANOTHER POWER CONDITION.

3.5.4 UFS-Sleep Power Mode

The UFS-Sleep power mode allows to reduce considerably the power consumption of the device.

VCC powersupply can be removed in this state.

The UFS-Sleep power mode is entered from Pre-Sleep power mode.

While in UFS-Sleep power mode:

- a. the Device well known logical unit may successfully complete only: START STOP UNIT command and REQUEST SENSE command; other commands may be terminated with CHECK CONDITION status, with the sense key set to NOT READY and the additional sense code set to LOGICAL UNIT NOT READY, INITIALIZING COMMAND REQUIRED. See table 3-4 for further detail.
- b. REQUEST SENSE command shall be terminated with GOOD status and provide pollable sense data with the sense key set to NOT READY and the additional sense code set to LOGICAL UNIT NOT READY, INITIALIZING COMMAND REQUIRED.

It is recommended to put the link in HIBERN8 state, although it is actually under host control and can come up and down independently of the UFS power mode.

VCC power supply should be restored before issuing START STOP UNIT command to request transition to Active power mode or PowerDown power mode.

3.5.5 Pre-Sleep Power Mode

The Pre-Sleep Mode is a transitional mode associated with UFS-Sleep entry. The power consumed will be no more than that consumed in Active power mode. Pre-Sleep can be entered from Active power mode.

The device will automatically advance to Sleep power mode once any outstanding operations and management activities have been completed.

The device will transition from Pre-Sleep power mode to Pre-Active power mode if START STOP UNIT command with POWER CONDITION = 1h is issued.

While in Pre-Sleep power mode:

- a. The Device well known logical unit may successfully complete only: START STOP UNIT command, REQUEST SENSE command and task management functions; other commands may be terminated with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST. See table 3-4 for further detail.
- b. A REQUEST SENSE command shall be terminated with GOOD status and provide pollable sense data with the sense key set to NO SENSE and the additional sense code set to LOGICAL UNIT TRANSITIONING TO ANOTHER POWER CONDITION.

3.5.6 Pre-DeepSleep Power Mode

The Pre-DeepSleep power mode is a transitional mode associated with UFS-DeepSleep entry. The power consumed shall be no more than that consumed in Active power mode. Pre-DeepSleep may be entered from Active or UFS-Sleep power mode.

The device sends the response with GOOD status to START STOP UNIT command with the POWER CONDITION field set to 4h after any outstanding operations and management activities have been completed. Then the device waits for HIBERN8 state transition. The host is expected to put the link in HIBERN8 state after receiving the response to the START STOP UNIT command. The device shall transit to UFS-DeepSleep power mode after HIBERN8 state transition is completed.

While in Pre-DeepSleep power mode, the Device does not respond to any host commands

3.5.7 UFS-PowerDown Power Mode

The UFS-PowerDown power mode is the maximum power saving mode. All volatile data may be lost and VCC or all power supplies can be removed.

This mode is automatically entered from the Pre-PowerDown power mode, at the completion of the power mode transition.

While in UFS-PowerDown power mode:

- a. The Device well known logical unit may successfully complete only: START STOP UNIT command and REQUEST SENSE command; other commands may be terminated with CHECK CONDITION status, with the sense key set to NOT READY and the additional sense code set to LOGICAL UNIT NOT READY, INITIALIZING COMMAND REQUIRED. See table 3-4 for further detail.
- b. A REQUEST SENSE command shall be terminated with GOOD status and provide pollable sense data with the sense key set to NOT READY, and the additional sense code set to LOGICAL UNIT NOT READY, INITIALIZING COMMAND REQUIRED.

3.5.8 Pre-PowerDown Power Mode

The Pre-PowerDown power mode is a transitional mode associated with UFS-PowerDown entry. The power consumed will be no more than that consumed in Active power mode. Pre-PowerDown can be entered from Active or Sleep.

The device will automatically advance to PowerDown power mode once any outstanding operations and management activities have been completed.

The device will transition to Pre-Active mode if START STOP UNIT command with POWER CONDITION field set to 1h is issued.

The following power mode may be PowerDown or Pre-Active.

While in Pre-PowerDown power mode:

- a. The Device well known logical unit may successfully complete only: START STOP UNIT command REQUEST SENSE command and task management functions; other commands may be terminated with CHECK CONDITION status, with the sense key set to ILLEGAL REQUEST. See table 3-4 for further detail.
- b. A REQUEST SENSE command shall be terminated with GOOD status and provide pollable sense data with the sense key set to NO SENSE and the additional sense code set to LOGICAL UNITTRANSITIONING TO ANOTHER POWER CONDITION.

3.5.9 Responses to SCSI commands

Table 3-4 - defines the Device well known logical unit response to a START STOP UNIT command for a given power mode. It is assumed that the IMMED bit in START STOP UNIT commands is set to zero.

Table 3-4 – Device Well Known Logical Unit Responses to SSU command

| Current Power Mode | PC | STATUS | SENSE KEY | ASC, ASCQ |
|---|---|---------------------|-----------------|--|
| Pre-Active | 1h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | NOT READY | LOGICAL UNIT NOT READY, START STOP UNIT COMMAND IN |
| Active | 1h, 2h, 3h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | ILLEGAL REQUEST | INVALID FIELD IN CDB |
| Pre-Sleep | 2h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | NOT READY | LOGICAL UNIT NOT READY, START STOP UNIT COMMAND IN |
| UFS-Sleep | 1h, 2h, 3h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | ILLEGAL REQUEST | INVALID FIELD IN CDB |
| Pre-DeepSleep | Device is not able to accept START STOP UNIT command in this power mode | | | |
| UFS-DeepSleep | Device is not able to accept START STOP UNIT command in this power mode | | | |
| Pre-PowerDown | 3h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | NOT READY | LOGICAL UNIT NOT READY, START STOP UNIT COMMAND IN |
| UFS-PowerDown | 1h, 3h | GOOD ⁽¹⁾ | - | - |
| | Others | CHECK CONDITION | ILLEGAL REQUEST | INVALID FIELD IN CDB |
| NOTE 1 The START STOP UNIT command may not terminate with GOOD status for condition not due to CDB content. | | | | |

3.5.10 Responses to SCSI commands (cont'd)

Table 3-5 - summarizes the response that the Device well known logical unit may provide to a command other than START STOP UNIT for various device power modes.

Table 3-5 - Device Well Known Logical Unit Responses to commands other than SSU

| Power Mode | Command | STATUS | SENSE KEY | ASC, ASCQ |
|--|--|---------------------|-----------------|--|
| Pre-Active | REQUEST SENSE | GOOD ⁽¹⁾ | - | - |
| | Others ⁽¹⁾ | CHECK CONDITION | NOT READY | LOGICAL UNIT IS IN PROCESS OF BECOMING READY |
| Pre-Sleep, PrePowerDown | REQUEST SENSE | GOOD ⁽¹⁾ | - | - |
| | Others ⁽¹⁾ | CHECK CONDITION | ILLEGAL REQUEST | - |
| UFS-Sleep, UFS-PowerDown | REQUEST SENSE | GOOD ⁽¹⁾ | - | - |
| | Others ⁽¹⁾ | CHECK CONDITION | NOT READY | LOGICAL UNIT NOT READY, INITIALIZING COMMAND |
| Pre-DeepSleep UFS-DeepSleep | Device is not able to accept any command in this power mode. | | | |
| NOTE 1 Rows identified with “Others” define Device well known logical unit response to command other than START STOP UNIT command and REQUEST SENSE command. | | | | |

Table 3-6 defines the pollable sense data for various device power modes.


Table 3-6 Pollable Sense Data for each Power Modes

| Power Mode | SENSE KEY | ASC, ASCQ |
|--|-----------|---|
| Pre-Active, Pre-Sleep, Pre-PowerDown | NO SENSE | LOGICAL UNIT TRANSITIONING TO ANOTHER POWER CONDITION |
| UFS-PowerDown, UFS-Sleep | NOT READY | LOGICAL UNIT NOT READY, INITIALIZING COMMAND REQUIRED |

4 UFS SCSI Domain

4.1 UFS Logical Unit Definition

Figure 4-1- UFS SCSI Domain

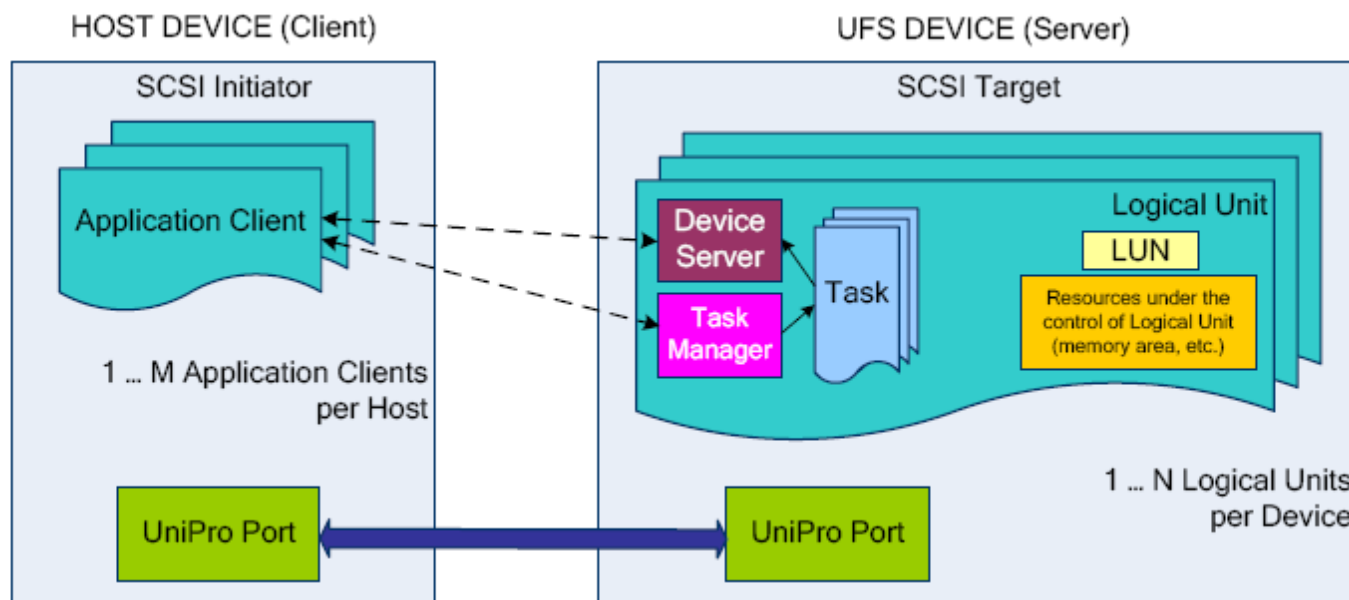

- **1. A logical unit (LU):**
It is an externally addressable, independent, processing entity that processes SCSI tasks (commands) and performs task management functions.
 - 1.1 Each logical unit is independent of other logical units in a device
 - 1.2 UFS shall support the amount of logical units specified by bMaxNumberLU, in addition to the well known logical units defined in JESD220D_10.8.5
 - 1.3 logical units may be used to store boot code, application code and mass storage data applications
- **2. DEVICE SERVER:** A conceptual object within a logical unit that processes SCSI commands.
- **3. TASK MANAGER:** A conceptual object within a logical unit that controls the sequencing of commands and performs task management functions.
- **4. TASK SET:** A conceptual group of 1 or more commands (a list, queue, etc.)
- **5. UniPro:**
It is responsible for management of the link, including the PHY.
The basic interface to the interconnect layer is UniPro definition of a CPort. CPort is used for all data transfer as well as all control and configuration messages. In general, multiple CPorts can be supported on a device and the number of CPorts is implementation dependent.

4.2 SCSI Command

Table 4-1 - UFS SCSI Command Set

| Command name | Opcode | Command Support | Support | Note |
|--|--------|-----------------|---------|------|
| FORMAT UNIT | 04h | M | Yes | |
| INQUIRY | 12h | M | Yes | |
| MODE SELECT (10) | 55h | M | Yes | |
| MODE SENSE (10) | 5Ah | M | Yes | |
| PRE-FETCH (10) | 34h | M | Yes | |
| PRE-FETCH (16) | 90h | O | Yes | |
| READ (6) | 08h | M | Yes | |
| READ (10) | 28h | M | Yes | |
| READ (16) | 88h | O | Yes | |
| READ BUFFER | 3Ch | M | Yes | |
| READ CAPACITY (10) | 25h | M | Yes | |
| READ CAPACITY (16) | 9Eh | M | Yes | |
| REPORT LUNS | A0h | M | Yes | |
| REQUEST SENSE | 03h | M | Yes | |
| SECURITY PROTOCOL IN | A2h | M | Yes | |
| SECURITY PROTOCOL OUT | B5h | M | Yes | |
| SEND DIAGNOSTIC | 1Dh | M | Yes | |
| START STOP UNIT | 1Bh | M | Yes | |
| SYNCHRONIZE CACHE (10) | 35h | M | Yes | |
| SYNCHRONIZE CACHE (16) | 91h | O | No | |
| TEST UNIT READY | 00h | M | Yes | |
| UNMAP | 42H | M | Yes | |
| VERIFY (10) | 2Fh | M | Yes | |
| WRITE (6) | 0Ah | M | Yes | |
| WRITE (10) | 2Ah | M | Yes | |
| WRITE(16) | 8Ah | O | Yes | |
| WRITE BUFFER | 3Bh | M | Yes | |
| M: mandatory, O: optional | | | | |
| NOTE 1 SECURITY PROTOCOL IN command and SECURITY PROTOCOL OUT command are supported by the RPMB well known logical unit. | | | | |

5 UFS Supported Pages

Table 5-1 shows the mode pages supported by UFS device. This standard does not define any additional subpages.

Table 5-1 — UFS Supported Pages

| PAGE NAME | PAGE CODE | SUBPAGE CODE | DESCRIPTION |
|---------------------------------|-----------|--------------|--|
| CONTROL | 0Ah | 00h | Return CONTROL mode page |
| READ-WRITE ERROR RECOVERY | 01h | 00h | Return READ-WRITE ERROR RECOVERY mode page |
| CACHING | 08h | 00h | Return CACHING mode page |
| ALL PAGES | 3Fh | 00h | Return all mode pages (not including subpages) |
| ALL SUBPAGES | 3Fh | FFh | Return all mode pages and subpages |

If the device has more than one logical unit, host should read Mode Page Policy VPD in order to know whether the logical unit maintains its own copy of the mode page and subpage or all logical units share the mode page and subpage.

5.1 Control Mode Page

The Control mode page provides controls over SCSI features that are applicable to all device types (e.g., task set management and error logging).

Table 5-2 defines the Control mode page default value (PC = 10b).

Table 5-2 — Control Mode Page default value

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|-------------------------------------|------------------------------------|-------------------------|-----------------|---------------|-------------------------|---------------|------------------|
| Byte | | | | | | | | |
| 0 | PS | SPF (0) | PAGE CODE (0Ah) | | | | | |
| 1 | PAGE LENGTH (0Ah) | | | | | | | |
| 2 | TST = 000b | | | TMF_ONLY =0b | DPICZ = 0b | D_SENSE =0b | GLTSD = 0b | RLEC = 0b |
| 3 | QUEUE ALGORITHM MODIFIER = 0001b | | | | NUAR = 0b | QERR = 00b | | Obsolete = 0b |
| 4 | VS = 0b | RAC = 0b | UA_INTLCK_CTRL = 00b | | SWP = 0b | Obsolete = 000b | | |
| 5 | ATO = 0b | TAS = 0b | ATMPE = 0b | RWWP = 0b | Reserv ed | AUTOLOAD MODE = 000b | | |
| 6 | Obsolete = 0000h | | | | | | | |
| 7 | | | | | | | | |
| 8 | (MSB) | BUSY TIMEOUT PERIOD | | | | | | |
| 9 | | | | | | | | (LSB) |
| 10 | (MSB) | EXTENDED SELF-TEST COMPLETION TIME | | | | | | |
| 11 | | | | | | | | (LSB) |
| NOTE 1 Default values for PS bit, BUSY TIMEOUT PERIOD field and EXTENDED SELF-TEST COMPLETION TIME field are device specific. | | | | | | | | |

The following Control mode page field shall be changeable: SWP. The following Control mode page fields are not changeable: TST and BUSY TIMEOUT PERIOD. Other fields may or may not be changeable, refer to the vendor datasheet for details.

Table 5-3 — Control Mode Page Parameters

| Byte | Bit | Description |
|--|-----|--|
| 1 | 7:5 | TST: Indicates Task Set Type. 000b indicates the logical unit maintains one task set for all I_T nexuses. Others: reserved. |
| 4 | 3:3 | SWP: A software write protect (SWP) bit set to one specifies that the logical unit shall inhibit writing to the medium after writing all cached or buffered write data, if any. When SWP is one, all commands requiring writes to the medium shall be terminated with CHECK CONDITION status, with the sense key set to DATA PROTECT |
| 8:9 | 7:0 | BUSY TIMEOUT PERIOD: The BUSY TIMEOUT PERIOD field specifies the maximum time, in 100 milliseconds increments, that the application client allows for the device server to return BUSY status for commands from the application client. A 0000h value in this field is undefined. An FFFFh value in this field is defined as an unlimited period. |
| NOTE 1 In addition to the software write protection, logical units may be configured as permanently write protected or power on write protected. A logical unit is writeable if all types of write protection are disabled. Logical units may be write protected setting SWP to one or using one of the methods described in 12.3, Device Data Protection. | | |

5.2 Read-Write Error Recovery Mode Page

The Read-Write Error Recovery mode page specifies the error recovery parameters the device server shall use during any command that performs a read or write operation to the medium (e.g., READ command, WRITE command, or VERIFY command)

Table 5-4 defines the Read-Write Error Recovery mode page default value (PC = 10b).

Table 5-4 — Read-Write Error Recovery Mode Page default value

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--|---------------------------|-------------------|-----------------|------------|-------------|-------------|-------------------------|-------------|
| 0 | PS | SPF (0b) | PAGE CODE (01h) | | | | | |
| 1 | PAGE LENGTH (0Ah) | | | | | | | |
| 2 | AWRE = 1b | ARRE = 0b | TB = 0b | RC = 0b | EER = 0b | PER = 0b | DTE = 0b | DCR = 0b |
| 3 | READ RETRY COUNT | | | | | | | |
| 4 | Obsolete = 00h | | | | | | | |
| 5 | Obsolete = 00h | | | | | | | |
| 6 | Obsolete = 00h | | | | | | | |
| 7 | TPERE = 0b | Reserved = 00000b | | | | | Restricted for MMC-6 | |
| 8 | WRITE RETRY COUNT | | | | | | | |
| 9 | Reserved = 00h | | | | | | | |
| 10 | (MSB) | | | | | | | |
| 11 | RECOVERY TIME LIMIT (LSB) | | | | | | | |
| NOTE 1 Default values for PS field, READ RETRY COUNT field, WRITE RETRY COUNT field and RECOVERY TIME LIMIT are device specific. | | | | | | | | |

This standard does not define which Read-Write Error Recovery mode page fields are changeable, refer to vendor datasheet for details.

Table 5-5 — Read-Write Error Recovery Parameters

| Byte | Bit | Description |
|-------|-----|---|
| 3 | 7:0 | READ RETRY COUNT: The READ RETRY COUNT field specifies the number of times that the device server shall attempt its recovery algorithm during read operations. |
| 8 | 7:0 | WRITE RETRY COUNT: The WRITE RETRY COUNT field specifies the number of times that the device server shall attempt its recovery algorithm during write operations. |
| 10:11 | 7:0 | RECOVERY TIME LIMIT: The RECOVERY TIME LIMIT field specifies in milliseconds the maximum time duration that the device server shall use for data error recovery procedures. When both a retry count and a recovery time limit are specified, the field that specifies the recovery action of least duration shall have priority. |

5.3 Caching Mode Page

The Caching mode page defines the parameters that affect the use of the cache. A UFS device shall implement support for following parameters.

Table 5-6 defines the Caching mode page default value (PC = 10b).

Table 5-6 — Caching Mode Page default value

| Bit | Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|-------|---|---------------|-----------------|--------------------------|-------------------------------------|-------------------|------------|----------------|
| 0 | | PS | SPF (0b) | PAGE CODE (08h) | | | | | |
| 1 | | PAGE LENGTH (12h) | | | | | | | |
| 2 | | IC = 0b | ABPF = 0b | CAP = 0b | DISC = 0b | SIZE = 0b | WCE =1b | MF = 0b | RCD =0b |
| 3 | | DEMAND READ RETENTION PRIORITY = 0000b | | | | WRITE RETENTION PRIORITY = 0000b | | | |
| 4 | (MSB) | DISABLE PRE-FETCH TRANSFER LENGTH | | | | | | | |
| 5 | | = 0000h (LSB) | | | | | | | |
| 6 | (MSB) | MINIMUM PRE-FETCH | | | | | | | |
| 7 | | = 0000h (LSB) | | | | | | | |
| 8 | (MSB) | MAXIMUM PRE-FETCH | | | | | | | |
| 9 | | = 0000h (LSB) | | | | | | | |
| 10 | (MSB) | MAXIMUM PRE-FETCH CEILING | | | | | | | |
| 11 | | = 0000h (LSB) | | | | | | | |
| 12 | | FSW = 0b | LBCSS = 0b | DRA = 0b | Vendor Specific = 00b | | Reserved = 00b | | NV_DIS = 0b |
| 13 | | NUMBER OF CACHE SEGMENTS = 00h | | | | | | | |
| 14 | (MSB) | CACHE SEGMENT SIZE | | | | | | | |
| 15 | | = 0000h (LSB) | | | | | | | |
| 16 | | Reserved = 00h | | | | | | | |
| 17 | | Obsolete = 000000h | | | | | | | |
| 18 | | | | | | | | | |
| 19 | | | | | | | | | |

The following Caching mode page fields shall be changeable: WCE and RCD. Other fields may or may not be changeable, refer to the vendor datasheet for details

5.4 Caching Mode Page Parameters

Table 5-7 — Caching Mode Page Parameters

| Byte | Bit | Description |
|--|-----|---|
| 2 | 2:2 | WCE: WRITE BACK CACHE ENABLE. A writeback cache enable bit set to zero specifies that the device server shall complete a WRITE command with GOOD status only after writing all of the data to the medium without error. A WCE bit set to one specifies that the device server may complete a WRITE command with GOOD status after receiving the data without error and prior to having written the data to the medium. |
| 2 | 0:0 | RCD: READ CACHE DISABLE. A read cache disable bit set to zero specifies that the device server may return data requested by a READ command by accessing either the cache or medium. A RCD bit set to one specifies that the device server shall transfer all of the data requested by a READ command from the medium (i.e., data shall not be transferred from the cache). |
| NOTE 1 Fields that are not supported by UFS should be set to zero, and are documented assigning a value of zero to them (e.g., PS=0b). The device may ignore values in fields that are not supported by UFS. | | |

5.5 Vital product data parameters

5.5.1 Overview

The vital product data (VPD) pages are returned by an INQUIRY command with the EVPD bit set to one and contain vendor specific product information about a logical unit and SCSI target device.

A UFS device shall support the following VPD pages:

- Supported VPD Pages
- Mode Page Policy

Support for other VPD pages is optional.

5.5.2 VPD page format

Table 5- shows the VPD page structure.

Table 5-8 — VPD page format

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|----------------------|---|---|------------------------|---|---|---|---|
| 0 | PERIPHERAL QUALIFIER | | | PERIPHERAL DEVICE TYPE | | | | |
| 1 | PAGE CODE | | | | | | | |
| 2 | (MSB) | | | | | | | |
| 3 | PAGE LENGTH (n-3) | | | | | | | |
| 4 | (MSB) | | | | | | | |
| N | VPD parameters | | | | | | | |
| | (LSB) | | | | | | | |

The PERIPHERAL QUALIFIER field and the PERIPHERAL DEVICE TYPE field are the same as defined for standard INQUIRY data (see 11.3.2.2 JESD220D_10.8.5).

The PAGE CODE field identifies the VPD page and contains the same value as in the PAGE CODE field in the INQUIRY CDB (see 11.3.2 JESD220D_10.8.5).

The PAGE LENGTH field indicates the length in bytes of the VPD parameters that follow this field. See [SPC] for further details.

5.5.3 Supported VPD Pages VPD page

The Supported VPD Pages VPD page contains a list of the VPD page codes supported by the logical unit (see Table 5-9).

Table 5-9— Supported VPD Pages VPD page

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|-------------------------|---|---|------------------------|---|---|---|-------|
| 0 | PERIPHERAL QUALIFIER | | | PERIPHERAL DEVICE TYPE | | | | |
| 1 | PAGE CODE (00h) | | | | | | | |
| 2 | (MSB) | | | | | | | |
| 3 | PAGE LENGTH (n-3) | | | | | | | (LSB) |
| 4 | | | | | | | | |
| N | Supported VPD page list | | | | | | | |

The supported VPD page list shall contain a list of all VPD page codes implemented by the logical unit in ascending order beginning with page code 00h.

The Mode Page Policy VPD page (see Table 5-10) indicates which mode page policy is in effect for each mode page supported by the logical unit.

Table 5-10 — Mode Page Policy VPD page

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|-------------------------------------|---|---|------------------------|---|---|---|---|
| 0 | PERIPHERAL QUALIFIER | | | PERIPHERAL DEVICE TYPE | | | | |
| 1 | PAGE CODE (87h) | | | | | | | |
| 2 | (MSB) | | | | | | | |
| 3 | PAGE LENGTH (n-3) | | | | | | | |
| | (LSB) | | | | | | | |
| | Mode page policy descriptor list | | | | | | | |
| 4 | | | | | | | | |
| 7 | Mode page policy descriptor [first] | | | | | | | |
| | ... | | | | | | | |
| n-3 | | | | | | | | |
| N | Mode page policy descriptor [last] | | | | | | | |

Each mode page policy descriptor (see Table 5-11) contains information describing the mode page policy for one or more mode pages or subpages.

Table 5-11 — Mode page policy descriptor

| Bit Byte | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------|---------------------|----------|------------------|---|---|---|---------------------|---|
| 0 | Reserved | | POLICY PAGE CODE | | | | | |
| 1 | POLICY SUBPAGE CODE | | | | | | | |
| 2 | MLUS | Reserved | | | | | MODE PAGE POLICY | |
| 3 | Reserved | | | | | | | |

The POLICY PAGE CODE field and POLICY SUBPAGE CODE field indicate the mode page and subpage to which the descriptor applies. See [SPC] for further details.

5.5.4 Mode Page Policy VPD page (cont'd)

If more than one logical unit are configured in the device, a multiple logical units share (MLUS) bit set to one indicates the mode page and subpage identified by the POLICY PAGE CODE field and POLICY SUBPAGE CODE field is shared by more than one logical unit.

A MLUS bit set to zero indicates the logical unit maintains its own copy of the mode page and subpage identified by the POLICY PAGE CODE field and POLICY SUBPAGE CODE field.

Table 5-12 describes the mode page policies.


| Code | Description |
|------|-----------------|
| 00b | Shared |
| 01b | Per target port |
| 10b | Obsolete |
| 11b | Per I_T nexus |

NOTE: This standard defines only one target port and one initiator port.

MODE PAGE POLICY field shall be set to zero (Shared).

See [SPC] for further details about Mode Page Policy VPD page

6 Device Marking

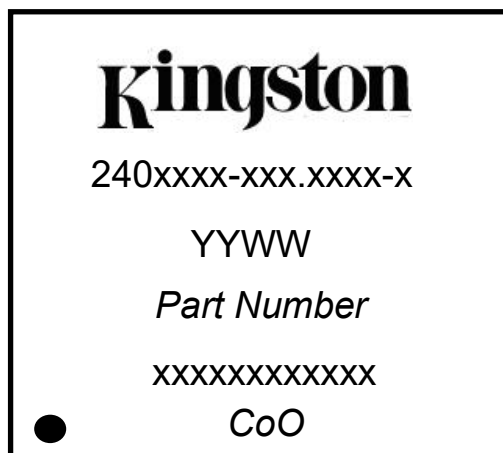

Line 1: Kingston logo

Line 2: 240xxxx-xxx.xxxx-x: Internal control number

Line 3: YYWW: Date code (YY- Last 2 digital of year, WW- Work week)

PPPPPPPPPPPP Internal control number (within 12 digits)

Line 4: Part Number: xxxxxx-xxxxxxx

Line 5: xxxxxxxxxxxx: Internal control number (within 12 digits)

Line 6: Country of Origin (CoO): TAIWAN or CHINA

7 Revision History

| Rev. | History | Date |
|------|-----------------|-----------|
| 1.0 | Initial Release | 02 / 2025 |

Appendix

UFS Descriptors

| Descriptor type | Descriptor IDN |
|-----------------|----------------|
| Device | 00h |
| Configuration | 00h |
| Unit | 02h |
| Interconnect | 04h |
| String | 05h |
| Geometry | 07h |
| Power | 08h |
| Device Health | 09h |

Device Descriptor (IDN=00h)

| DEVICE DESCRIPTOR | | | | | |
|-------------------|----------------|-----------------|--------------------|---------------|--|
| Offset | Size (Byte) | Name | MDV ⁽¹⁾ | User Conf. | Description |
| 00h | 1 | bLength | 59h | No | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 00h | No | Device Descriptor Type Identifier |
| 02h | 1 | bDevice | 00h | No | Device Type |
| 03h | 1 | bDeviceClass | 00h | No | UFS Device Class |
| 04h | 1 | bDeviceSubClass | 00h | No | UFS Mass Storage Subclass |
| 05h | 1 | bProtocol | 00h | No | Protocol supported by UFS Device |
| 06h | 1 | bNumberLU | 03h | Yes | Number of Logical Units |
| 07h | 1 | bNumberWLU | 04h | No | Number of Well Known Logical Units |
| 08h | 1 | bBootEnable | 01h | Yes | Boot Enable Indicate whether the device is enabled for boot. 00h: Boot feature disabled 01h: Bootable feature enabled Others: Reserved |
| 09h | 1 | bDescrAccessEn | 00h | Yes | Descriptor Access Enable 00h: Device Descriptor access disabled 01h: Device Descriptor access enabled Others: Reserved |

| | | | | | |
|-----|---|-----------------------|---|-----|---|
| 0Ah | 1 | bInitPowerMode | 01h | Yes | Initial Power Mode 00h: UFS-Sleep Mode / 01h: Active Mode Others: Reserved |
| 0Bh | 1 | bHighPriorityLUN | 7Fh | Yes | High Priority LUN Valid values are: from 0 to the number of LU specified by bMaxNumberLU. If this parameter value is 7Fh all logical units have the same priority. |
| 0Ch | 1 | bSecureRemovalType | 00h | Yes | Secure Removal Type (Also support 03h) |
| 0Dh | 1 | bSecurityLU | 01h | No | Support for security LU 00h: not supported 01h: RPMB Others: Reserved |
| 0Eh | 1 | bBackgroundOpsTermLat | 08h | No | Background Operations Termination Latency 01h(10ms)~FFh(2550ms) |
| 0Fh | 1 | bInitActiveICCLLevel | 00h | Yes | Initial Active ICC Level Valid range from 00h to 0Fh. |
| 10h | 2 | wSpecVersion | 0310h | No | Specification version |
| 12h | 2 | wManufactureDate | - | No | Manufacturing Date |
| 14h | 1 | iManufacturerName | - | No | Manufacturer Name |
| 15h | 1 | iProductName | 01h | No | ProductName |
| 16h | 1 | iSerialNumber | 02h | No | SerialNumber |
| 17h | 1 | iOemID | 03h | No | OEM ID |
| 18h | 2 | wManufacturerID | 0298h | No | Manufacturer ID |
| 1Ah | 1 | bUD0BaseOffset | 16h | No | Unit Descriptor 0 Base Offset |
| 1Bh | 1 | bUDConfigPLength | 1Ah | No | Unit Descr. Config. Param. Length |
| 1Ch | 1 | bDeviceRTTCap | 04h | No | RTT Capability of device |
| 1Dh | 2 | wPeriodicRTCUpdate | 0000h | Yes | Frequency and method of Real-Time Clock update. |
| 1Fh | 1 | bUFSFeaturesSup port | BFh | No | UFS Features Support |
| 20h | 1 | bFFUTimeout | 0Ah | No | Field Firmware Update Timeout (00h=no timeout) |
| 21h | 1 | bQueueDepth | 20h | No | Queue Depth |
| 22h | 2 | wDeviceVersion | 0010h | No | Device Version |
| 24h | 1 | bNumSecureWPArea | 20h | No | Number of Secure Write Protect Areas |
| 25h | 4 | dPSAMaxDataSize | 004F7555h-64G 009EF2AAh-128G 013DED55h-256G | No | PSA Maximum Data Size |

| | | | | | |
|-----|----|--|------|-----|---|
| 29h | 1 | bPSAStateTimeout | 12h | No | PSA State Timeout |
| 2Ah | 1 | iProductRevisionLevel | 04h | No | Product Revision Level |
| 2Bh | 5 | Reserved | - | - | |
| 30h | 16 | Reserved | - | - | |
| 40h | 3 | Reserved | - | - | |
| 43h | 12 | Reserved | - | - | |
| 4Fh | 4 | dExtendedUFSFeaturesSupport | 1BFh | No | Extended UFS Features Support bit[0]: Field Firmware Update (FFU) bit[1]: Production State Awareness (PSA) bit[2]: Device Life Span bit[3]: Refresh Operation bit[4]: TOO_HIGH_TEMPERATURE bit[5]: TOO_LOW_TEMPERATURE bit[6]: Extended Temperature bit[7]: Reserved for Host-aware Performance |
| 53h | 1 | bWriteBoosterBufferPreserveUserSpaceEn | 00h | Yes | |
| 54h | 1 | bWriteBoosterBufferType | 00h | Yes | |
| 55h | 4 | dNumSharedWriteBoosterBufferAllocUnits | 00h | Yes | |

NOTE 1 The column “MDV” (Manufacturer Default Value) specifies parameter values after device manufacturing. Some parameters may be configured by the user writing the Configuration Descriptor.

NOTE 2 “User Conf.” column specifies which fields can be configured by the user writing the Configuration Descriptor: “Yes” means that the field can be configured, “No” means that the field is a capability of the device and cannot be changed by the user. The desired value shall be set in the equivalent parameter of the Configuration Descriptor.

NOTE 3 bNumberLU field value is calculated by the device based on bLUEnable field value in the Unit Descriptors.

Configuration Descriptor (IDN=00h)

| Configuration Descriptor | | | | | |
|--------------------------|-------------|--|---------|------------|---|
| Offset | Size (Byte) | Name | MDV (1) | User Conf. | Description |
| 00h | 1 | bLength | E6h | No | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 01h | No | Configuration Descriptor Type Identifier |
| 02h | 1 | bConfDescContinue | 00h | No | 00h : This value indicates that this is the Configuration Descriptor in a sequence of write descriptor query requests. Device shall perform internal configuration based on received Configuration Descriptor(s). |
| 03h | 1 | bBootEnable | 01h | Yes | Boot Enable |
| 04h | 1 | bDescrAccessEn | 00h | Yes | Descriptor Access Enable |
| 05h | 1 | bInitPowerMode | 01h | Yes | Initial Power Mode |
| 06h | 1 | bHighPriorityLUN | 7Fh | Yes | High Priority LUN |
| 07h | 1 | bSecureRemovalType | 00h | Yes | Secure Removal Type |
| 08h | 1 | bInitActiveICCLLevel | 00h | Yes | Initial Active ICC Level |
| 09h | 2 | wPeriodicRTCUpdate | 0000h | Yes | Frequency and method of Real-Time Clock update |
| 0Bh | 5 | Reserved | 00h | No | Reserved for Host Performance Booster (HPB) Extension |
| 0Ch | 1 | bRPMBRegionEnable | 00h | Yes | RPMB Region Enable Configures which RPMB regions are enabled in RPMB well known logical unit. |
| 0Dh | 1 | bRPMBRegion1Size | 00h | Yes | RPMB Region 1 Size Configures the size of RPMB region 1 if RPMB region 1 is enabled. |
| 0Eh | 1 | bRPMBRegion2Size | 00h | Yes | RPMB Region 2 Size Configures the size of RPMB region 2 if RPMB region 2 is enabled. |
| 0Fh | 1 | bRPMBRegion3Size | 00h | Yes | RPMB Region 3 Size Configures the size of RPMB region 3 if RPMB region 3 is enabled. |
| 10h | 1 | bWriteBoosterBufferPreserveUserSpaceEn | 00h | Yes | Enable preserve user space when WriteBooster Buffer is configured. |
| 11h | 1 | bWriteBoosterBufferType | 00h | Yes | Configure the WriteBooster Buffer type |
| 12h | 1 | dNumSharedWriteBoosterBufferAllocUnits | 00h | Yes | Configure the WriteBooster Buffer size for a shared WriteBooster Buffer configuration. |

NOTE 1 The column "MDV" (Manufacturer Default Value) specifies parameter values after device manufacturing.

Some parameters may be configured by the user writing the Configuration Descriptor.

Unit Descriptor (IDN=02h)

LUN0

| Unit Descriptor configurable parameters | | | | | |
|---|-------------|------------------------------------|---------------------------------------|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLUEnable | 01h | Yes | Logical Unit Enable |
| 01h | 1 | bBootLunID | 00h | Yes | Boot LUN ID |
| 02h | 1 | bLUWriteProtect | 00h | Yes | Logical Unit Write Protect |
| 03h | 1 | bMemoryType | 00h | Yes | Memory Type |
| 04h | 4 | dNumAllocUnits | 3B98h-64G 7736h-128G EE72h-256G | Yes | Number of Allocation Units |
| 08h | 1 | bDataReliability | 00h | Yes | Data Reliability |
| 09h | 1 | bLogicalBlockSize | 0Ch | Yes | Logical Block Size |
| 0Ah | 1 | bProvisioningType | 02h | Yes | Provisioning Type |
| 0Bh | 2 | wContextCapabilities | 00h | Yes | Context Capabilities |
| 0Dh | 3 | Reserved | 00h | No | |
| 10h | 6 | Reserved1 | 00h | No | |
| 16h | 4 | dLUNumWriteBoosterBufferAllocUnits | 00h | Yes | The WriteBooster Buffer size for the Logical Unit. |

LUN 1

| Unit Descriptor configurable parameters | | | | | |
|---|-------------|------------------------------------|-----|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLUEnable | 01h | Yes | Logical Unit Enable |
| 01h | 1 | bBootLunID | 01h | Yes | Boot LUN ID |
| 02h | 1 | bLUWriteProtect | 00h | Yes | Logical Unit Write Protect |
| 03h | 1 | bMemoryType | 03h | Yes | Memory Type |
| 04h | 4 | dNumAllocUnits | 03h | Yes | Number of Allocation Units |
| 08h | 1 | bDataReliability | 01h | Yes | Data Reliability |
| 09h | 1 | bLogicalBlockSize | 0Ch | Yes | Logical Block Size |
| 0Ah | 1 | bProvisioningType | 02h | Yes | Provisioning Type |
| 0Bh | 2 | wContextCapabilities | 00h | Yes | Context Capabilities |
| 0Dh | 3 | Reserved | 00h | No | |
| 10h | 6 | Reserved1 | 00h | No | |
| 16h | 4 | dLUNumWriteBoosterBufferAllocUnits | 00h | Yes | The WriteBooster Buffer size for the Logical Unit. |

LUN 2

| Unit Descriptor configurable parameters | | | | | |
|---|-------------|------------------------------------|-----|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLUEnable | 01h | Yes | Logical Unit Enable |
| 01h | 1 | bBootLunID | 02h | Yes | Boot LUN ID |
| 02h | 1 | bLUWriteProtect | 00h | Yes | Logical Unit Write Protect |
| 03h | 1 | bMemoryType | 03h | Yes | Memory Type |
| 04h | 4 | dNumAllocUnits | 03h | Yes | Number of Allocation Units |
| 08h | 1 | bDataReliability | 01h | Yes | Data Reliability |
| 09h | 1 | bLogicalBlockSize | 0Ch | Yes | Logical Block Size |
| 0Ah | 1 | bProvisioningType | 02h | Yes | Provisioning Type |
| 0Bh | 2 | wContextCapabilities | 00h | Yes | Context Capabilities |
| 0Dh | 3 | Reserved | 00h | No | |
| 10h | 6 | Reserved1 | 00h | No | |
| 16h | 4 | dLUNumWriteBoosterBufferAllocUnits | 00h | Yes | The WriteBooster Buffer size for the Logical Unit. |

LUN 3~LUN31

| Unit Descriptor configurable parameters | | | | | |
|---|-------------|------------------------------------|-----|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLUEnable | 00h | Yes | Logical Unit Enable |
| 01h | 1 | bBootLunID | 00h | Yes | Boot LUN ID |
| 02h | 1 | bLUWriteProtect | 00h | Yes | Logical Unit Write Protect |
| 03h | 1 | bMemoryType | 00h | Yes | Memory Type |
| 04h | 4 | dNumAllocUnits | 00h | Yes | Number of Allocation Units |
| 08h | 1 | bDataReliability | 00h | Yes | Data Reliability |
| 09h | 1 | bLogicalBlockSize | 0Ch | Yes | Logical Block Size |
| 0Ah | 1 | bProvisioningType | 00h | Yes | Provisioning Type |
| 0Bh | 2 | wContextCapabilities | 00h | Yes | Context Capabilities |
| 0Dh | 3 | Reserved | 00h | No | |
| 10h | 6 | Reserved1 | 00h | No | |
| 16h | 4 | dLUNumWriteBoosterBufferAllocUnits | 00h | Yes | The WriteBooster Buffer size for the Logical Unit. |

RPMB Unit

| RPMB Unit Descriptor | | | | | |
|----------------------|----------------|----------------------|-----------|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLength | 23h | No | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 02h | No | Unit Descriptor Type Identifier |
| 02h | 1 | bUnitIndex | C4h | No | Unit Index |
| 03h | 1 | bLUEnable | 01h | Yes | Logical Unit Enable 01h: Logical Unit enabled |
| 04h | 1 | bBootLunID | 00h | No | Boot LUN ID 00h: Not bootable |
| 05h | 1 | bLUWriteProtect | 00h | No | |
| 06h | 1 | bLUQueueDepth | 00h | No | |
| 07h | 1 | bPSASensitive | 00h | No | |
| 08h | 1 | bMemoryType | 0Fh | No | |
| 09h | 1 | Reserved | 00h | No | |
| 0Ah | 1 | bLogicalBlockSize | 08h | No | |
| 0Bh | 8 | qLogicalBlockCount | 10000h | No | |
| 13h | 4 | dEraseBlockSize | 80000000h | No | |
| 17h | 1 | bProvisioningType | 00h | No | |
| 18h | 8 | qPhyMemResourceCount | 00h | No | |
| 20h | 3 | Reserved | 00h | | |

Interconnect Descriptor (IDN=04h)

| Interconnect Descriptor | | | | |
|-------------------------|------|------------------|-------|--|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 06h | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 04h | Interconnect Descriptor Type Identifier |
| 02h | 2 | bcdUniproVersion | 0180h | MIPI UniPro® version number in BCD format Example: version 3.21 = 0321h |
| 04h | 2 | bcdMphyVersion | 0410h | MIPI M-PHY® version number in BCD format Example: version 3.21=0321h |

String Descriptor (IDN=05h)

MANUFACTURER NAME STRING DESCRIPTOR

| MANUFACTURER NAME STRING | | | | |
|--------------------------|------|----------------|----------|-----------------------------------|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 12h | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 05h | String Descriptor Type Identifier |
| 02h-10h | 16 | UC[0]- UC[7] | KINGSTON | Unicode string character |

PRODUCT NAME STRING DESCRIPTOR

| PRODUCT NAME STRING DESCRIPTOR | | | | |
|--------------------------------|------|----------------|----------------------------------|-----------------------------------|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 22h | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 05h | String Descriptor Type Identifier |
| 02h-10h | 16 | UC[0]- UC[7] | CY14-64G CY14-128 CY14-256 | Unicode string character |

PRODUCT REVISION LEVEL STRING DESCRIPTOR

| PRODUCT REVISION LEVEL STRING DESCRIPTOR | | | | |
|--|------|----------------|-------|-----------------------------------|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 0Ah | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 05h | String Descriptor Type Identifier |
| 02h-08h | 8 | UC[0]- UC[3] | 0002 | Unicode string character |

OEM ID STRING DESCRIPTOR

| OEM ID STRING DESCRIPTOR | | | | |
|--------------------------|------|----------------|-------|-----------------------------------|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 40h | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 05h | String Descriptor Type Identifier |
| 02h-3Eh | 62 | UC[0]- UC[30] | - | Unicode string character |

SERIAL NUMBER STRING DESCRIPTOR

| SERIAL NUMBER STRING DESCRIPTOR | | | | |
|---------------------------------|------|----------------|-------|-----------------------------------|
| Offset | Size | Name | Value | Description |
| 00h | 1 | bLength | 20h | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 05h | String Descriptor Type Identifier |
| 02h-1Eh | 30 | UC[0]- UC[14] | - | Unicode string character |

Geometry Descriptor (IDN=07h)

| Geometry Descriptor | | | | | |
|---------------------|----------------|--------------------------------|---|------------|--|
| Offset | Size (Byte) | Name | MDV | User Conf. | Description |
| 00h | 1 | bLength | 57h | No | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 07h | No | Geometry Descriptor Type Identifier |
| 02h | 1 | bMediaTechnology | 00h | No | Reserved |
| 03h | 1 | Reserved | 00h | No | Reserved |
| 04h | 8 | qTotalRawDeviceCapacity | 0773C000h -64G 0EE78000h -128G 1DCF0000h-256G | No | Total Raw Device Capacity |
| 0Ch | 1 | bMaxNumberLU | 01h | No | Maximum number of Logical Unit supported by the UFS device |
| 0Dh | 4 | dSegmentSize | 02000h | No | Segment Size |
| 11h | 1 | bAllocationUnitSize | 01h | No | Allocation Unit Size |
| 12h | 1 | bMinAddrBlockSize | 08h | No | Minimum addressable block size |
| 13h | 1 | bOptimalReadBlockSize | 00h | No | Optimal Read Block Size |
| 14h | 1 | bOptimalWriteBlockSize | 80h | No | Optimal Write Block Size |
| 15h | 1 | bMaxInBufferSize | 40h | No | Max. data-in buffer size |
| 16h | 1 | bMaxOutBufferSize | 40h | No | Max. data-out buffer size |
| 17h | 1 | bRPMB_ReadWriteSize | 20h | No | Maximum number of RPMB frames |
| 18h | 1 | bDynamicCapacityResourcePolicy | 00h | No | Dynamic Capacity Resource Policy |
| 19h | 1 | bDataOrdering | 00h | No | |
| 1Ah | 1 | bMaxContextIDNumber | 05h | No | |

| | | | | | |
|-----|---|--|-------|----|--|
| 1Bh | 1 | bSysDataTagUnitSize | 00h | No | |
| 1Ch | 1 | bSysDataTagResSize | 00h | No | |
| 1Dh | 1 | bSupportedSecRTypes | 09h | No | |
| 1Eh | 2 | wSupportedMemoryTypes | 8009h | No | |
| 20h | 4 | dSystemCodeMaxNAllocU | 00h | No | |
| 24h | 2 | wSystemCodeCapAdjFac | 00h | No | |
| 26h | 4 | dNonPersistMaxNAllocU | 00h | No | |
| 2Ah | 2 | wNonPersistCapAdjFac | 00h | No | |
| 2Ch | 4 | dEnhanced1MaxNAllocU | 773C | No | |
| 30h | 2 | wEnhanced1CapAdjFac | 300h | No | |
| 32h | 4 | dEnhanced2MaxNAllocU | 00h | No | |
| 36h | 2 | wEnhanced2CapAdjFac | 00h | No | |
| 38h | 4 | dEnhanced3MaxNAllocU | 00h | No | |
| 3Ch | 2 | wEnhanced3CapAdjFac | 00h | No | |
| 3Eh | 4 | dEnhanced4MaxNAllocU | 00h | No | |
| 42h | 2 | wEnhanced4CapAdjFac | 00h | No | |
| 44h | 4 | dOptimalLogicalBlockSize | 00h | No | |
| 48h | 5 | Reserved | 00h | No | |
| 4Dh | 2 | Reserved | 00h | No | |
| 4Fh | 4 | dWriteBoosterBufferMaxN AllocUnits | 0C00h | No | |
| 53h | 1 | bDeviceMaxWriteBoosterL Us | 01h | No | |
| 54h | 1 | bWriteBoosterBufferCapA djFac | 03h | No | |
| 55h | 1 | bSupportedWriteBoosterB ufferUserSpaceReduction | 01h | No | |
| 56h | 1 | bSupportedWriteBoosterB ufferTypes | 01h | No | |

POWER PARAMETERS DESCRIPTOR (IDN=08h)

| POWER PARAMETERS DESCRIPTOR | | | | | |
|-----------------------------|------|-------------------------------|-------|------------|---|
| Offset | Size | Name | Value | User conf. | Description |
| 00h | 1 | bLength | 62h | No | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 08h | No | Power Parameters Descriptor Type Identifier |
| 02h~20h | 32 | wActiveICCLevelsVCC[0]~[15] | 8226h | No | |
| 22h~40h | 32 | wActiveICCLevelsVCCQ[0]~[15] | 8226h | No | |
| 42h~60h | 32 | wActiveICCLevelsVCCQ2[0]~[15] | 8226h | No | |

Device Health Descriptor (IDN=09h)

| Device Health Descriptor | | | | |
|--------------------------|----------------|---------------------|-------|--|
| Offset | Size (Byte) | Name | Value | Description |
| 00h | 1 | bLength | 2Dh | Size of this descriptor |
| 01h | 1 | bDescriptorIDN | 09h | Device Health Descriptor Type Identifier |
| 02h | 1 | bPreEOLInfo | 01h | Pre End of Life Information This field provides indication about device life time |
| 03h | 1 | bDeviceLifeTimeEstA | 01h | This field provides an indication of the device life time based on the amount of performed program/erase cycles. |
| 04h | 1 | bDeviceLifeTimeEstB | 01h | This field provides an indication of the device life time based on the amount of performed program/erase cycles. |
| 05h | 32 | VendorPropInfo | - | |
| 25h | 4 | dRefreshTotalCount | 00h | Total Refresh Count Indicate how many times the device complete refresh for |
| 29h | 4 | dRefreshProgress | 00h | Refresh Progress Indicate the refresh progress in %. |

UFS Flags

| FLAGS | | | | | |
|-------|-----------------------|-----------------------|---------------------|---------|--|
| IDN | Name | Type | Type ¹ | Default | Description |
| | | | # Ind. ² | | |
| | | | # Sel. ³ | | |
| 00h | Reserved | - | - | - | |
| 01h | fDeviceInit | Read / Set only | D | 00h | Device Initialization 0b: Device initialization completed or not started yet. 1b: Device initialization in progress. |
| 02h | fPermanentWPEn | Read / Write once | D | 00h | Permanent Write Protection Enable 00h: Permanent write protection disabled 01h: Permanent write protection enabled |
| 03h | fPowerOnWPEn | Read / Power on reset | D | 00h | Power On Write Protection Enable 0b: Power on write protection disabled. 1b: Power on write protection enabled. |
| 04h | fBackgroundOpsEn | Read /Volatile | D | 01h | Background Operations Enable 0b: Device is not permitted to run background operations. 1b: Device is permitted to run background operations. |
| 05h | fDeviceLifeSpanModeEn | Read /Volatile | D | 00h | Device Life Span Mode 0b: Device Life Span Mode is disabled. 1b: Device Life Span Mode is enabled. |
| 06h | fPurgeEnable | Write only /Volatile | D | 00h | Purge Enable 0b: Purge operation is disabled. 1b: Purge operation is enabled. |

| | | | | | |
|-----|---|-------------------------|----------------|-----|--|
| 07h | fRefreshEnable | Write only /Volatile | D | 00h | Refresh Enable 0b: Refresh operation is disabled. 1b: Refresh operation is enabled. |
| 08h | fPhyResourceRemoval | Read /Persistent | D | 00h | Physical Resource Removal |
| 09h | fBusyRTC | Read Only | D | 00h | Busy Real Time Clock 0b : Device is not executing internal operation related to RTC 1b: Device is executing internal operation related to RTC |
| 0Ah | Reserved | - | - | - | |
| 0Bh | fPermanentlyDisableFw Update | Read /Write once | D | 00h | Permanently Disable Firmware Update 0b: The UFS device firmware may be modified 1b: The UFS device shall permanently disallow future firmware updates to the UFS device |
| 0Ch | Reserved | - | - | - | |
| 0Dh | Reserved | - | - | - | |
| 0Eh | fWriteBoosterEn | Read /Volatile | A/LU/0 Or D | 00h | WriteBooster Enable 0b: WriteBooster is not enabled. 1b: WriteBooster is enabled. |
| 0Fh | fWriteBoosterBufferFlushEn | Read /Volatile | A/LU/0 Or D | 00h | Flush the data in WriteBooster Buffer to the user area of storage. 0b: Flush operation is not performed. |
| 10h | fWriteBoosterBufferFlushDuringHibernate | Read /Volatile | A/LU/0 Or D | 00h | Flush WriteBooster Buffer during hibernate state. 0b: Device is not allowed to flush the WriteBooster Buffer during link hibernate state. 1b: Device is allowed to flush the |

NOTE 1 The type “D” identifies a device level flag, while the type “A” identifies an array of flags. If Type = “D”, the flag is addressed setting INDEX = 00h and SELECTOR = 00h.

NOTE 2 For array of flags, “# Ind.” specifies the amount of valid values for the INDEX field in QUERY REQUEST/RESPONSE UPIU. If # Ind = 0, the flag is addressed setting INDEX = 00h.

NOTE 3 For array of flags, “# Sel.” specifies the amount of valid values for the SELECTOR field in QUERY REQUEST/RESPONSE UPIU. If # Sel = 0, the flag is addressed setting SELECTOR = 00h.

UFS Attributes

| ATTRIBUTES | | | | | | | |
|------------|-------------------|-------------------|-------------|---------------------|------|---|-------|
| IDN | Name | Access Property | Size (byte) | Type ¹ | MDV4 | Description | Notes |
| | | | | # Ind. ² | | | |
| | | | | # Sel. ³ | | | |
| 00h | bBootLunEn | Read / Persistent | 1 | D | 00h | Boot LUN Enable 00h: Boot disabled 01h: Enabled boot from Boot LU A 02h: Enabled boot from Boot LU B All others: Reserved | |
| 01h | Reserved | - | - | - | - | | |
| 02h | bCurrentPowerMode | Read only | 1 | D | 11h | Current Power Mode 00h: Idle power mode 10h: Pre-Active power mode 11h: Active power mode 20h: Pre-Sleep power mode 22h: UFS-Sleep power mode 30h: Pre-PowerDown power mode 33h: UFS-PowerDown power mode Others: Reserved | 5 |
| 03h | bActiveICCLLevel | Read / Volatile | 1 | D | 00h | Active ICC Level bActiveICCLLevel defines the maximum current consumption allowed during Active Mode. 00h: Lowest Active ICC level ... 0Fh: Highest Active ICC level Others: Reserved Valid range from 00h to 0Fh. | 6 |
| 04h | bOutOfOrderDataEn | Read / Write once | 1 | D | 00h | Out of Order Data transfer Enable 00h: Out-of-order data transfer is disabled. 01h: Out-of-order data transfer is enabled. Others: Reserved This bit shall have effect only when bDataOrdering = 01h | |

| | | | | | | | |
|-----|---------------------|-------------------|---|---|-----|--|------|
| 05h | bBackgroundOpStatus | Read only | 1 | D | 00h | Background Operations Status Device health status for background operation 00h: Not required 01h: Required, not critical 02h: Required, performance impact 03h: Critical. Others: Reserved | |
| 06h | bPurgeStatus | Read only | 1 | D | 00h | Purge Operation Status 00h: Idle (purge operation disabled) 01h: Purge operation in progress 02h: Purge operation stopped prematurely 03h: Purge operation completed successfully 04h: Purge operation failed due to logical unit queue not empty 05h: Purge operation general failure. Others: Reserved. | |
| 07h | bMaxDataInSize | Read / Persistent | 1 | D | 40h | Maximum Data In Size Maximum data size in a DATA IN UPIU. Value expressed in number of 512- byte units. bMaxDataInSize shall not exceed the bMaxInBufferSize parameter. bMaxDataInSize = bMaxInBufferSize when the UFS device is shipped. This parameter can be written by the host only when all LU task queues are empty. | 7, 8 |
| 08h | bMaxDataOutSize | Read / Persistent | 1 | D | 40h | Maximum Data-Out Size bMaxDataOutSize = bMaxOutBufferSize when the UFS device is shipped. This parameter can be written by the host only when all LU task queues are empty. | 8 |

| | | | | | | | |
|-----|------------------------|-------------------|---|---|--------------------------------|--|---|
| 09h | dDynCapNeeded | Read only | 4 | A Number of LU specified by bMaxNumberLU (LUN) | 0000 0000h (Not support) | Dynamic Capacity Needed The amount of physical memory needed to be removed from the physical memory resources pool of the particular logical unit, in units of bOptimalWriteBlockSize. | 9 |
| 0Ah | bRefClkFreq | Read / Persistent | 1 | D | 01h | Reference Clock Frequency value 0h:19.2MHz 1h: 26MHz 2h: 38.4MHz 3h: 52MHz Others: Reserved | |
| 0Bh | bConfigDescrLock | Read / Write once | 1 | D | 00h | Configuration Descriptor Lock 0h: Configuration Descriptor not locked 1h: Configuration Descriptor locked Others: Reserved | |
| 0Ch | bMaxNumOfRTT | Read / Persistent | 1 | D | 04h | Maximum current number of outstanding RTTs in device that is allowed. bMaxNumOfRTT shall not exceed the bDeviceRTTCap parameter. This parameter can be written by the host only when all LU task queues are empty. | |
| 0Dh | wExceptionEventControl | Read / Volatile | 2 | D | 0000h | Exception Event Control Bit 0: DYNCAP_EVENT_EN Bit 1: SYSPPOOL_EVENT_EN Bit 2: URGENT_BKOPS_EN | |
| 0Eh | wExceptionEventStatus | Read only | 2 | D | 0000h | Each bit represents an exception event. Bit 0: DYNCAP_NEEDED Bit 1: SYSPPOOL_EXHAUSTED Bit 2: URGENT_BKOPS Bit 3: TOO_HIGH_TEMP Bit 4: TOO_LOW_TEMP Bit 5: WRITEBOOSTER_FLUSH_NEEDED Bit 6: PERFORMANCE_THROTTLING Bit 7 -15: Reserved | |

| | | | | | | | |
|-----|------------------------------|---------------------|---|---|------------|--|--|
| 0Fh | dSecondsPassed | Write only/Volatile | 4 | D | 00h | Bits[31:0]: Seconds passed from TIME BASELINE (see wPeriodicRTCUpdate in Device Descriptor) | |
| 10h | wContextConf | Read / Volatile | 2 | <div>A</div> <hr/> <div>8(LUN)</div> <hr/> <div>15 (ID)</div> | 0000h | INDEX specifies the LU number. SELECTOR specifies the Context ID within the LU. | |
| 11h | Obsolete | - | - | - | - | - | |
| 12h | Reserved | - | - | - | - | | |
| 13h | Reserved | - | - | - | - | | |
| 14h | bDeviceFFUStatus | Read Only | 1 | D | 00h | Device FFU Status 00h: No information 01h: Successful microcode update 02h: Microcode corruption error 03h: Internal error 04h: Microcode version mismatch 05h-FEh: Reserved 0FFh: General Error | |
| 15h | bPSAState | Read / Persistent | 1 | D | 00h | 00h: 'Off'. PSA feature is off. 01h: 'Pre-soldering'. PSA feature is on, device is in the pre-soldering state. 02h: 'Loading Complete' PSA feature is on. The host will set to this value after the host finished writing data during pre-soldering state. 03h: 'Soldered'. PSA feature is no longer available. Set by the Device to indicate it is in post- soldering state. This attribute unchangeable after it is in 'Soldered'state. | |
| 16h | dPSADDataSize | Read / Persistent | 4 | D | 00 ... 00h | The amount of data that the host plans to load to all logical units with bPSASensitive set to 1. | |
| 17h | bRefClkGatingWaitTime | Read only | 1 | D | 00h | Minimum time for which the reference clock is required by device during transition to LSMODE or HIBERN8 state. | |
| 18h | bDeviceCaseRough Temperature | Read only | 1 | D | 78h | Device's rough package case surface temperature. | |

| | | | | | | | |
|-----|--------------------------------|-----------|---|-------------|-----|--|--|
| 19h | bDeviceTooHighTempBoundary | Read only | 1 | D | 00h | High temperature boundary | |
| 1Ah | bDeviceTooLowTempBoundary | Read only | 1 | D | 00h | Low temperature boundary | |
| 1Bh | bThrottlingStatus | Read only | 1 | D | 00h | Each set bit represents an existing situation resulting in performance throttling. Bit 0: Temperature Others: Reserved | |
| 1Ch | bWriteBoosterBufferFlushStatus | Read only | 1 | A/LU/0 or D | 00h | <p>Flush operation status of WriteBooster Buffer.</p> <p>00h: idle.</p> <p>Device is not flushing the WriteBooster Buffer: either the WriteBooster Buffer is empty or a flush has not been initiated</p> <p>01h: Flush operation in progress.</p> <p>The WriteBooster Buffer is not yet empty and a flush has been initiated.</p> <p>02h: Flush operation stopped prematurely. The WriteBooster Buffer is not empty and the host stopped the in-progress flush.</p> <p>03h: Flush operation completed successfully.</p> <p>04h: Flush operation general failure</p> <p>Others : Reserved</p> <p>When the bWriteBoosterBufferFlushStatus is equal to the one of values 02h, 03h or 04h, value of the bWriteBoosterBufferFlushStatus is automatically cleared as 00h right after the bWriteBoosterBufferFlushStatus is read. A write to the WriteBooster Buffer when the status is 03h will cause automatic transition to either 00h or 01h.</p> | |

| | | | | | | | |
|-----|----------------------------------|-----------|---|-------------|-----|---|--|
| 1Dh | bAvailableWriteBoosterBufferSize | Read only | 1 | A/LU/0 or D | 00h | <p>Available WriteBooster Buffer Size</p> <p>This available buffer size is decreased by WriteBooster operation and increased by flush operation.</p> <p>Value expressed in unit of 10% granularity</p> <p>00h: 0% buffer remains.</p> <p>01h: 10% buffer remains.</p> <p>02h~09h: 20%~90% buffer remains</p> <p>0Ah: 100% buffer remains</p> <p>Others : Reserved</p> <p>The % reported by the attributes is remaining portion of the current WriteBooster Buffer size indicated by the dCurrentWriteBoosterBufferSize attribute.</p> | |
| 1Eh | bWriteBoosterBufferLifetimeEst | Read only | 1 | A/LU/0 or D | 00h | <p>This field provides an indication of the WriteBooster Buffer lifetime based on the amount of performed program/erase cycles. In cases of preserve user space configuration for WriteBooster Buffer, this lifetime will be reduced by writing on normal user level space, since WriteBooster Buffer is shared with the user level space.</p> <p>The detailed calculation method is vendor specific.</p> <p>00h: Information not available (WriteBooster Buffer is disabled)</p> <p>01h: 0% - 10% WriteBooster Buffer life time used</p> <p>02h: 10% - 20% WriteBooster Buffer life time used</p> <p>03h: 20% - 30% WriteBooster Buffer life time used</p> <p>04h: 30% - 40% WriteBooster Buffer life time used</p> <p>05h: 40% - 50% WriteBooster Buffer life time used</p> <p>06h: 50% - 60% WriteBooster Buffer life time used</p> <p>07h: 60% - 70% WriteBooster Buffer life time used</p> <p>08h: 70% - 80% WriteBooster Buffer life time used</p> <p>09h: 80% - 90% WriteBooster Buffer life time used</p> <p>0Ah: 90% - 100% WriteBooster Buffer life time used</p> <p>0Bh: Exceeded its maximum estimated WriteBooster Buffer life time (write commands are processed as if WriteBooster feature was disabled)</p> <p>Others: Reserved</p> | |

| | | | | | | | |
|-----|--------------------------------|---------------------|---|-------------|-----|---------------------------------------|--|
| 1Fh | dCurrentWriteBoosterBufferSize | Read only | 4 | A/LU/0 or D | 00h | The current WriteBooster Buffer size. | |
| 2Ch | bRefreshStatus | Read only | 1 | D | 00h | | |
| 2Dh | bRefreshFreg | Read/ Persistent | 1 | D | 00h | | |
| 2Eh | bRefreshUnit | Read/ Persistent | 1 | D | 00h | | |
| 2Fh | bRefreshMethod | Read/ Persistent | 1 | D | 00h | | |

NOTE 1 The type “D” identifies a device level attribute, while the type “A” identifies an array of attributes. If Type = “D”, the attribute is addressed setting INDEX = 00h and SELECTOR = 00h.

NOTE 2 For array of attributes, “# Ind.” specifies the amount of valid values for the INDEX field in QUERY REQUEST/RESPONSE UPIU. If # Ind = 0, the attribute is addressed setting INDEX = 00h.

NOTE 3 For array of attributes, “# Sel.” specifies the amount of valid values for the SELECTOR field in QUERY REQUEST/RESPONSE UPIU. If # Sel = 0, the attribute is addressed setting SELECTOR = 00h.

NOTE 4 The column “MDV” (Manufacturer Default Value) specifies attribute values after device manufacturing.

NOTE 5 bCurrentPowerMode value after device initialization may be: 20h (Pre-Sleep mode) or 22h (UFS-Sleep mode) if bInitPowerMode = 00h, or 11h (Active Mode) if bInitPowerMode = 01h.

NOTE 6 After power on or reset, bActiveICCLLevel is equal to bInitActiveICCLLevel parameter value included in the Device Descriptor. bInitActiveICCLLevel is equal to 00h after device manufacturing and it can be configured by writing the ConfigurationDescriptor.

NOTE 7 bMaxDataInSize = bMaxInBufferSize when the UFS device is shipped.

NOTE 8 If the host attempts to write this Attribute when there is at least one logical unit with command queue not empty, the operation shall fail, and Response field in the QUERY RESPONSE UPIU shall be set to FFh (“General failure”).

NOTE 9 dDynCapNeeded is composed by eight elements, one for each logical unit. The desired element shall be selected assigning the LUN to INDEX field of QUERY REQUEST UPIU.

Contact Kingston



For more information, visit us at: <https://www.kingston.com/en/solutions/embedded-and-industrial>

For direct support, please contact us at: <https://www.kingston.com/en/form/embedded>

For quick questions, please email us at: emmc@kingston.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kingston:](#)

[UFS64G-CY14-02N01](#) [UFS128-CY14-02N01](#)