SIEMENS

Data sheet

3RK1395-6LS71-3AD3



SIRIUS motor starter M200D Technology module Reversing starter Electronic switching AC-3, 5.5 kW / 400 V 1.5 A...12.00 A Electronic overload protection Thermistor: THERMOCLICK / PTC with brake contact 400 V AC 4 DI / 2 DO Han Q4/2 - Han Q8/0 with manual on-site operation and key-operated switch via communication module 3RK1305* can be used on PROFIBUS or PROFINET

product brand name	SIRIUS			
product designation	Motor starters			
design of the product	reversing starter			
product type designation	M200D			
product function				
• on-site operation	Yes			
control circuit interface to parallel wiring	No			
insulation voltage rated value	500 V			
degree of pollution	3			
surge voltage resistance rated value	6 000 V			
maximum permissible voltage for protective separation				
between main and auxiliary circuit	400 V			
between control and auxiliary circuit	24 V			
shock resistance	12g / 11 ms			
vibration resistance	7 mm / 2g			
type of assignment	1			
Substance Prohibitance (Date)	07/01/2006			
SVHC substance name	Lead - 7439-92-1			
	Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5			
Weight	4.25 kg			
product function				
direct start	No			
reverse starting	Yes			
product component motor brake output	Yes			
product feature				
 brake control with 230 V AC 	Yes			
 brake control with 400 V AC 	Yes			
 brake control with 24 V DC 	No			
 brake control with 180 V DC 	No			
 brake control with 500 V DC 	No			
product extension braking module for brake control	No			
product function short circuit protection	Yes			
design of short-circuit protection	circuit-breakers			
maximum short-circuit current breaking capacity (Icu)				
• at 400 V rated value	50 000 A			
• at 500 V rated value	20 000 A			
EMC emitted interference according to IEC 60947-1	CISPR11, ambience A (group 2)			
EMC immunity according to IEC 60947-1	corresponds to degree of severity 3, ambience A (industrial sector)			
conducted interference				
 due to burst according to IEC 61000-4-4 	2 kV network connection / 1 kV control connection			

• due to conductor-earth surge according to IEC 61000-4-5	2 kV				
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV				
Safety related data					
proportion of dangerous failures					
with low demand rate according to SN 31920	50 %				
-	75 %				
with high demand rate according to SN 31920					
B10 value with high demand rate according to SN 31920 failure rate [FIT] with low demand rate according to SN	1 000 000				
31920	100 FIT				
IEC 61508					
T1 value for proof test interval or service life according to IEC 61508	20 a				
Electrical Safety					
touch protection against electrical shock	finger-safe				
Main circuit					
number of poles for main current circuit	3				
design of the switching contact	solid-state / thyristor / 2 phases				
adjustable current response value current of the current-	1.5 12 A				
dependent overload release	full mater materia				
type of the motor protection	full motor protection				
operating voltage rated value	200 440 V				
operational current					
• at AC at 400 V rated value	12 A				
at AC-3 at 400 V rated value	12 A				
operating power					
• at AC-3					
— at 400 V rated value	5.5 kW				
— at 500 V rated value	5 500 W				
• at AC-3e					
— at 400 V rated value	6 kW				
— at 500 V rated value	5.5 kW				
product function					
 digital inputs parameterizable 	Yes				
digital outputs parameterizable	Yes				
	Yes 4				
digital outputs parameterizable					
digital outputs parameterizable number of digital inputs					
digital outputs parameterizable number of digital inputs number of sockets	4				
digital outputs parameterizable number of digital inputs number of sockets o for digital output signals	4 2				
digital outputs parameterizable number of digital inputs number of sockets • for digital output signals • for digital input signals	4 2 4				
digital outputs parameterizable number of digital inputs number of sockets • for digital output signals • for digital input signals number of digital outputs	4 2 4				
digital outputs parameterizable number of digital inputs number of sockets • for digital output signals • for digital input signals number of digital outputs Supply voltage	4 2 4 2				
digital outputs parameterizable number of digital inputs number of sockets • for digital output signals • for digital input signals number of digital outputs Supply voltage type of voltage of the supply voltage	4 2 4 2				
digital outputs parameterizable number of digital inputs number of sockets • for digital output signals • for digital input signals • for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control	4 2 4 2 DC				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage 	4 2 4 2 DC				
digital outputs parameterizable number of digital inputs number of sockets of r digital output signals of r digital input signals of r digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value	4 2 4 2 DC DC 20.4 28.8 V				
digital outputs parameterizable number of digital inputs number of sockets e for digital output signals e for digital input signals e for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC	4 2 4 2 DC DC 20.4 28.8 V				
digital outputs parameterizable number of digital inputs number of sockets e for digital output signals e for digital input signals e for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control current at DC	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V				
digital outputs parameterizable number of digital inputs number of sockets e for digital output signals e for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control current at DC e in standby mode of operation	4 2 4 2 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital output signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage 1 at DC rated value control supply voltage 1 at DC in standby mode of operation during operation 	4 2 4 2 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital output signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control current at DC in standby mode of operation during operation power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit 	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A				
digital outputs parameterizable number of digital inputs number of sockets e for digital output signals e for digital input signals e for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC e in standby mode of operation e during operation power loss [W] in auxiliary and control circuit e in switching state OFF with bypass circuit e in switching state ON with bypass circuit	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control current at DC 	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC in standby mode of operation e during operation power loss [W] in auxiliary and control circuit e in switching state OFF with bypass circuit e in switching state ON with bypass circuit Response times ON-delay time	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital output signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control current at DC in standby mode of operation during operation during operation on events of the supply and control circuit in switching state OFF with bypass circuit in switching state ON with bypass circuit on-delay time OFF-delay time	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC in standby mode of operation e during operation for supticate OFF with bypass circuit in switching state OFF with bypass circuit in switching state OFF with bypass circuit in switching state OFF with bypass circuit oFF-delay time OFF-delay time mounting position	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms vertical, horizontal, flat				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital output signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC 	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms vertical, horizontal, flat horizontal				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC control current at DC in standby mode of operation during operation power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit in switching state OFF with bypass circuit on switching state OFF with bypass circuit for switching state OFF with bypass circuit for switching state OFF with bypass circuit 	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital output signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC control current at DC in standby mode of operation eduring operation power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit ein switching state ON with bypass circuit for switching state ON with bypass circuit for switching state ON with bypass circuit for switching state ON with bypass circuit mounting position mounting position recommended fastening method height	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing 215 mm				
digital outputs parameterizable number of digital inputs number of sockets for digital output signals for digital input signals for digital outputs Supply voltage type of voltage of the supply voltage Control circuit/ Control type of voltage of the control supply voltage control supply voltage 1 at DC rated value control supply voltage 1 at DC control current at DC in standby mode of operation during operation power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit in switching state OFF with bypass circuit on switching state OFF with bypass circuit for switching state OFF with bypass circuit for switching state OFF with bypass circuit 	4 2 4 2 DC DC 20.4 28.8 V 20.4 28.8 V 20.4 28.8 V 100 mA 0.6 A 2.7936 W 9.216 W 25 ms 35 ms vertical, horizontal, flat horizontal screw fixing				

Ambient conditions							
installation altitude a	at height above sea level maximum			2 000 m			
ambient temperatu	re						
 during operation 	ion		-25	+55 °C			
 during storage 	9		-40	-40 +70 °C			
 during transport 	ort		-40	+70 °C			
relative humidity dur	dity during operation		10 95 %				
protocol is support	ted						
 PROFIBUS D 	P protocol		No				
 PROFINET pr 	rotocol		No				
design of the interf	ace						
 AS-Interface 	protocol		No				
 PROFINET pr 	rotocol		No				
PROFIBUS D	P protocol		No	No			
product function b	us communication		Yes				
protocol is supported	d AS-Interface protocol		No				
product function con	trol circuit interface with IO lin	nk	No				
type of electrical co	onnection						
 for main curre 	ent circuit		plug according to ISO 23570, HAN Q4/2				
 for auxiliary a 	nd control circuit		connector				
type of electrical co	onnection						
 1 for digital in 	put signals		M12 s	ocket			
 1 for digital out 	utput signals		M12 s	ocket			
 2 for digital in 	put signals		M12 s	ocket			
 3 for digital input signals 		M12 socket					
• 4 for digital input signals		M12 socket					
full-load current (FLA) for 3-phase AC motor at 480 V rated value		80 V rated	11 A				
yielded mechanica	l performance [hp]						
 for 3-phase A 	C motor						
— at 220/230 V rated value		3 hp					
— at 460/480 V rated value			7.5 hp				
operating voltage at AC at 60 Hz according to CSA and UL rated value		480 V					
Approvals Certificate	es						
General Product A							
	UK CA	<u>Confirmatio</u>	<u>n</u>	CE EG-Konf.		EHC	
EMV	Test Certificates	other		Environment	Industrial Communic	ation	
RCM	<u>Type Test Certific-</u> ates/Test Report	<u>Confirmatio</u>	<u>nc</u>	Environmental Con- firmations	Profibus		

Further information

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1395-6LS71-3AD3


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1395-6LS71-3AD3

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1395-6LS71-3AD3

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1395-6LS71-3AD3&lang=en





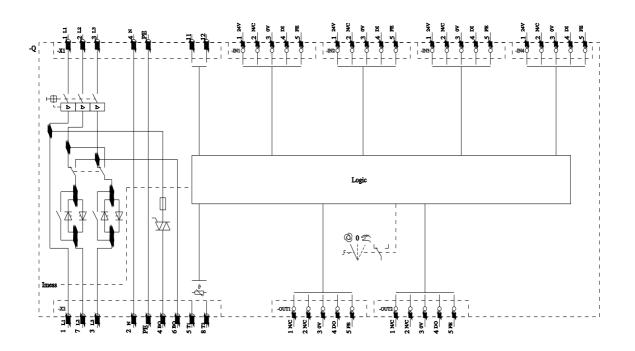

last modified:

3/11/2024 🖸

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RK13956LS713AD3