SIEMENS

Data sheet 3RW5554-2HA14



SIRIUS soft starter 200-480 V 840 A, 110-250 V AC Spring-type terminals

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFINET high-feature usable 	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
• of circuit breaker usable at 400 V at inside-delta circuit	3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V at inside-delta circuit 	3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, lq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NB3351-1KK26; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NC3343-1U: Type of coordination 2, Iq = 65 kA
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class	5 (based on IEC 61557-12)
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	Yes

• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	02/11/2019
product function	
ramp-up (soft starting)	Yes
ramp-down (soft stop)	Yes
breakaway pulse	Yes
 adjustable current limitation 	Yes
 creep speed in both directions of rotation 	Yes
pump ramp down	Yes
DC braking	Yes
motor heating	Yes
 slave pointer function 	Yes
trace function	Yes
 intrinsic device protection 	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
• auto-RESET	Yes
• manual RESET	Yes
• remote reset	Yes
• communication function	Yes
 operating measured value display 	Yes
• event list	Yes
• error logbook	Yes
 via software parameterizable 	Yes
 via software configurable 	Yes
screw terminal	No
spring-loaded terminal	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules
firmware update	Yes
 removable terminal for control circuit 	Yes
voltage ramp	Yes
• torque control	Yes
combined braking	Yes
analog output	Yes; 4 20 mA (default) / 0 10 V
 programmable control inputs/outputs 	Yes
 condition monitoring 	Yes

 automatic parameterisation 	Yes
 application wizards 	Yes
 alternative run-down 	Yes
 emergency operation mode 	Yes
 reversing operation 	Yes
 soft starting at heavy starting conditions 	Yes
Power Electronics	
operational current	
 at 40 °C rated value 	840 A
at 40 °C rated value minimum	168 A
at 50 °C rated value	748 A
at 60 °C rated value	670 A
operational current at inside-delta circuit	OTOA
at 40 °C rated value	1 454 A
at 50 °C rated value	1 295 A
at 60 °C rated value	1 160 A
operating voltage	000 400 14
• rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
• at 230 V at 40 °C rated value	250 kW
 at 230 V at inside-delta circuit at 40 °C rated value 	450 kW
 at 400 V at 40 °C rated value 	450 kW
 at 400 V at inside-delta circuit at 40 °C rated value 	800 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
minimum load [%]	10 %; Relative to set le
power loss [W] for rated value of the current at AC	
	252 W
power loss [W] for rated value of the current at AC	252 W 205 W
power loss [W] for rated value of the current at AC • at 40 °C after startup	
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup	205 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 %	205 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup	205 W 164 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup	205 W 164 W 14 441 W 12 187 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup	205 W 164 W 14 441 W 12 187 W 10 405 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection	205 W 164 W 14 441 W 12 187 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage	205 W 164 W 14 441 W 12 187 W 10 405 W
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 % 10 % -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 % 10 % -15 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency relative positive tolerance of the control supply voltage frequency	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 % 10 % 50 60 Hz
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz • at 60 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz relative positive tolerance of the control supply voltage at AC at 60 Hz control supply voltage frequency relative negative tolerance of the control supply voltage frequency	205 W 164 W 14 441 W 12 187 W 10 405 W Electronic, tripping in the event of thermal overload of the motor AC 110 250 V 110 250 V -15 % 10 % 50 60 Hz -10 %

	040
holding current in bypass operation rated value	210 mA
inrush current by closing the bypass contacts maximum	1 A
inrush current peak at application of control supply voltage maximum	44 A
duration of inrush current peak at application of control supply voltage	1.7 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
 number of digital outputs 	4
 number of digital outputs parameterizable 	3
 number of digital outputs not parameterizable 	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	764 mm
width	478 mm
depth	241 mm
required spacing with side-by-side mounting	40
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	45 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	55 mm
wire length for thermistor connection	
• with conductor cross-section = 0.5 mm² maximum	50 m
• with conductor cross-section = 1.5 mm² maximum	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
for DIN cable lug for main contacts stranded	2x (50 240 mm²)
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
for control circuit solid	2x (0.25 1.5 mm²)
for control circuit finely stranded with core end processing	2x (0.25 1.5 mm²)
for AWG cables for control circuit solid	2x (24 16)
for AWG cables for control circuit solid for AWG cables for control circuit finely stranded with	2x (24 16)
core end processing	Z. (Z 10)
wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
for main contacts with screw-type terminals	20 35 N·m
for auxiliary and control contacts with screw-type terminals	0.8 1.2 N·m
tightening torque [lbf·in]	
for main contacts with screw-type terminals	177 310 lbf·in

 for auxiliary and control contacts with screw-type terminals 	7 10.3 lbf·in
Ambient conditions	
installation altitude at height above sea level maximum	5 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 $$
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
PROFINET high-feature	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	165
manufacturer's article number	
 of the fuse usable for Standard Faults up to 575/600 V according to UL 	Type: Class J / L, max. 2500 A; Iq = 42 kA
— usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 2500 A; Iq = 100 kA
 usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class J / L, max. 2500 A; Iq = 42 kA
 usable for High Faults at inside-delta circuit up to 575/600 V according to UL 	Type: Class J / L, max. 2500 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
 at 200/208 V at 50 °C rated value 	250 hp
 at 220/230 V at 50 °C rated value 	300 hp
 at 460/480 V at 50 °C rated value 	600 hp
 at 200/208 V at inside-delta circuit at 50 °C rated value 	450 hp
 at 220/230 V at inside-delta circuit at 50 °C rated value 	550 hp
 at 460/480 V at inside-delta circuit at 50 °C rated value 	1 150 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	1,000 2000
protection class IP on the front according to IEC 60529	IP00
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	400. to IEO 00041-4-2
certificate of suitability	V
• ATEX	Yes
• IECEX	Yes
according to ATEX directive 2014/34/EU	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 a
Certificates/ approvals	
General Product Approval	EMC



Confirmation









For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Type Test Certificates/Test Report





Marine / Shipping

other





Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5554-2HA14

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5554-2HA14}}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5554-2HA14

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5554-2HA14&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5554-2HA14/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5554-2HA14&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)


https://support.industry.siemens.com/cs/ww/en/view/101494917

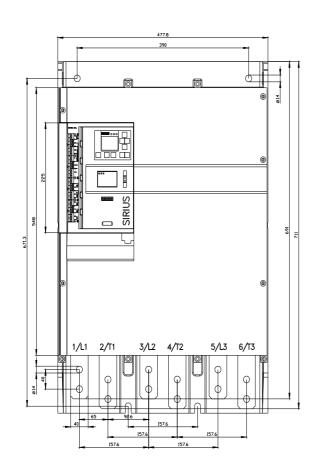

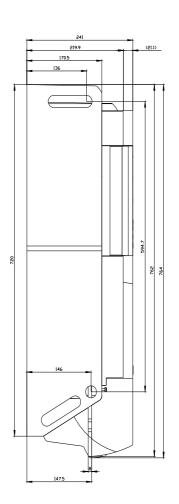

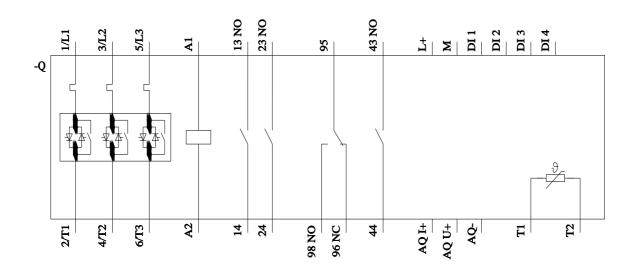

last modified: 8/15/2023 🖸

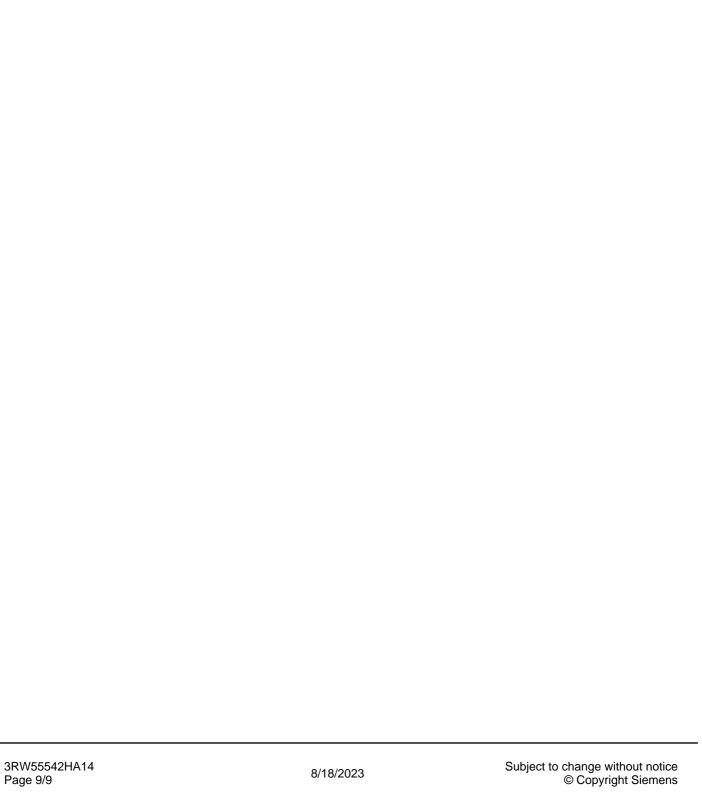

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Siemens:

3RW55542HA14