

International
IOR Rectifier

32CTQ030SPbF
32CTQ030-1PbF

SCHOTTKY RECTIFIER

32 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 30\text{V}$$

Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM}	30	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	900	A
V_F @ 15Apk , $T_J = 125^\circ\text{C}$	0.40	V
T_J range	-55 to 150	$^\circ\text{C}$


Description/ Features

The 32CTQ030.. Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 150°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150°C T_J operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)


Case Styles

32CTQ030SPbF



D²PAK

32CTQ030-1PbF



TO-262

32CTQ030SPbF, 32CTQ030-1PbF

Bulletin PD-21034 rev. A 07/06

International
IOR Rectifier

Voltage Ratings

Part number	32CTQ030SPbF, 32CTQ030-1PbF
V_R Max. DC Reverse Voltage (V)	30
V_{RWM} Max. Working Peak Reverse Voltage (V)	

Absolute Maximum Ratings

Parameters	32CTQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	30	A	50% duty cycle @ $T_C = 115^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	900	A	5 μs Sine or 3 μs Rect. pulse
	250		10ms Sine or 6ms Rect. pulse
E_{AS} Non-Repetitive Avalanche Energy	13	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 1.20\text{ Amps}$, $L = 11.10\text{ mH}$
I_{AR} Repetitive Avalanche Current	3	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical

Electrical Specifications

Parameters	32CTQ	Units	Conditions
V_{FM} Max. Forward Voltage Drop (1) * See Fig. 1	0.49	V	@ 15A
	0.58	V	@ 30A
	0.40	V	@ 15A
	0.53	V	@ 30A
I_{RM} Max. Reverse Leakage Current (1) * See Fig. 2	1.75	mA	$T_J = 25^\circ\text{C}$
	97	mA	$T_J = 125^\circ\text{C}$
$V_{F(TO)}$ Threshold Voltage	0.233	V	$T_J = T_J \text{ max.}$
r_f Forward Slope Resistance	9.09	m Ω	
C_T Max. Junction Capacitance Per Leg	1300	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) 25°C
L_S Typical Series Inductance Per Leg	8.0	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/ μs	(Rated V_R)

(1) Pulse Width < 300 μs , Duty Cycle < 2%

Thermal-Mechanical Specifications

Parameters			32CTQ	Units	Conditions	
T _J	Max. Junction Temperature Range		-55 to 150	°C		
T _{stg}	Max. Storage Temperature Range		-55 to 150	°C		
R _{thJC}	Max. Thermal Resistance Junction to Case Per Leg		3.25	°C/W	DC operation * See Fig. 4	
R _{thCS}	Typical Thermal Resistance, Case to Heatsink		0.50	°C/W	Mounting surface, smooth and greased	
wt	Approximate Weight		2 (0.07)	g (oz.)		
T	Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)		
		Max.	12 (10)			
Marking Device			32CTQ030S	Case style D ² Pak		
			32CTQ030-1	Case style TO-262		

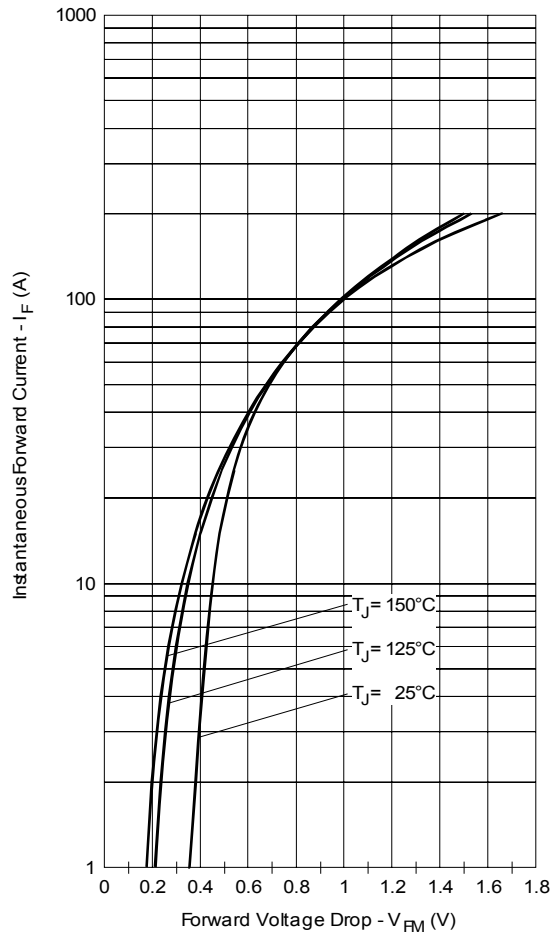


Fig. 1 - Maximum Forward Voltage Drop Characteristics

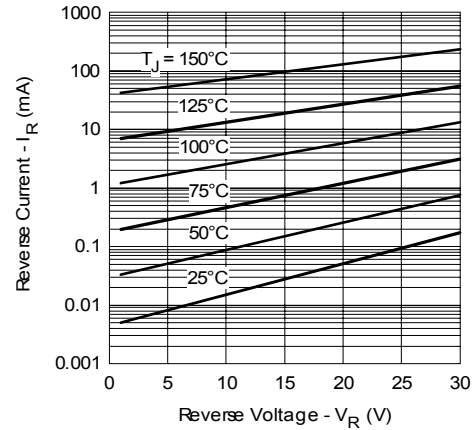


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

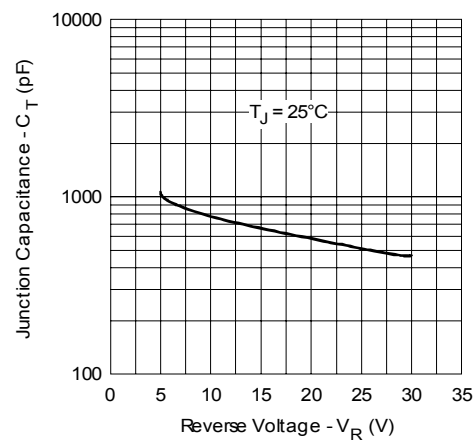


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

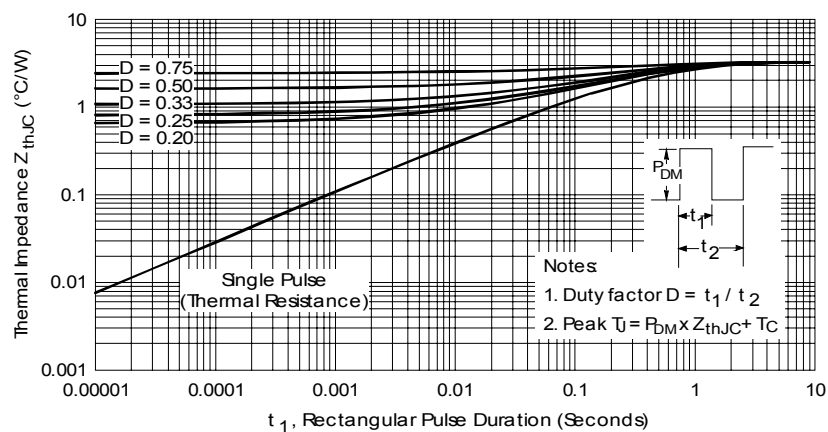


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics

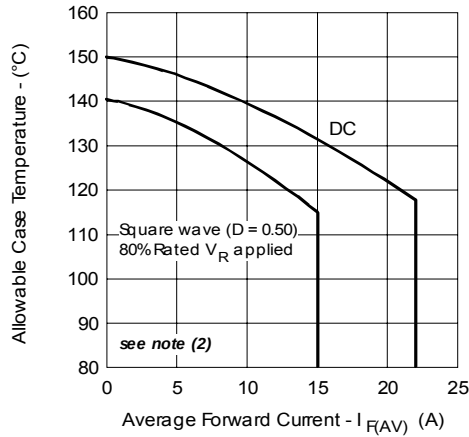


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

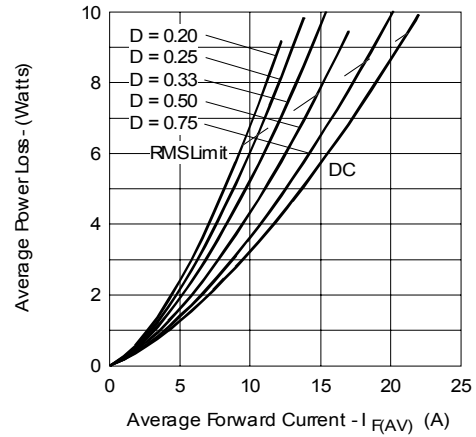


Fig. 6 - Forward Power Loss Characteristics

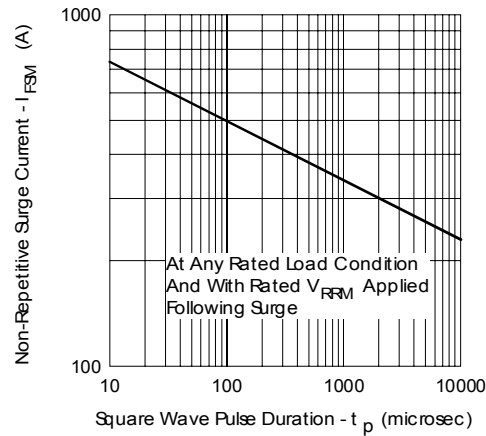


Fig. 7 - Maximum Non-Repetitive Surge Current

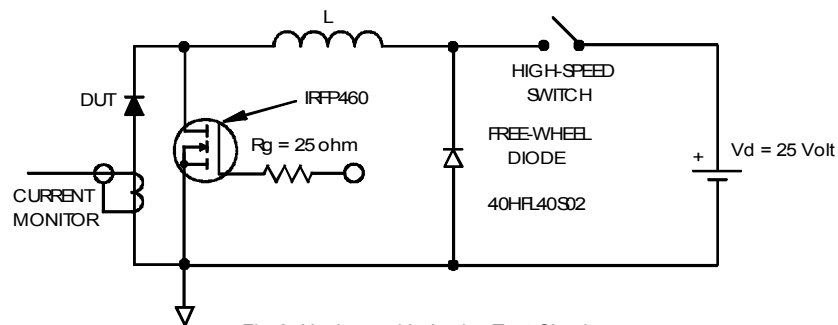




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;

$P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);

$P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_{R1} (1 - D)$; $I_{R1} @ V_{R1} = 80\% \text{ rated } V_R$

Outlines Table

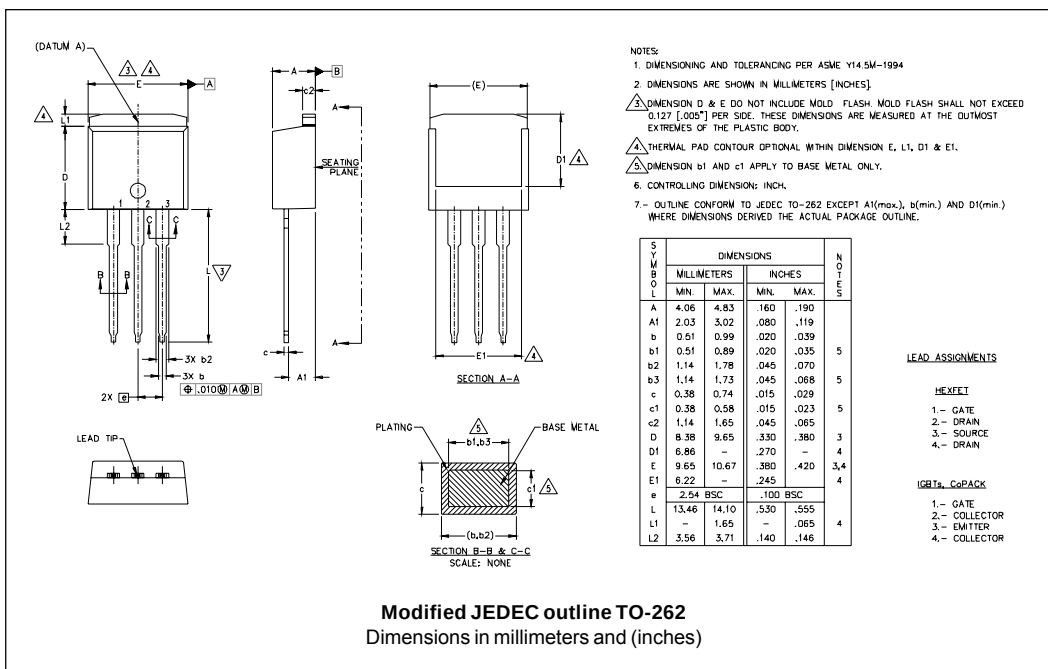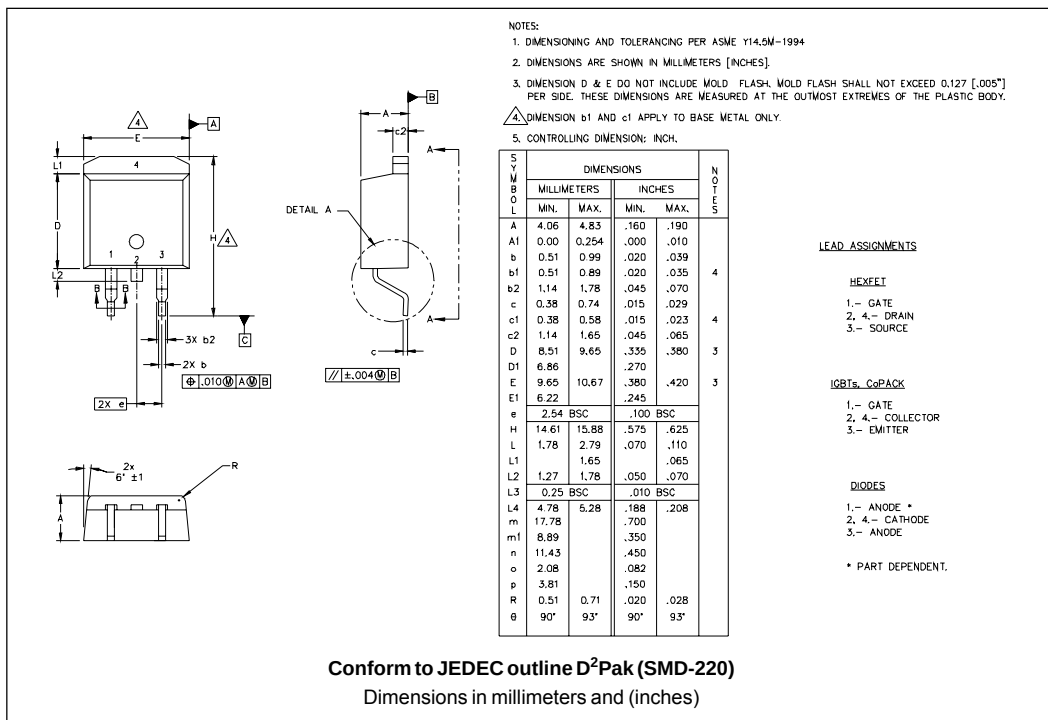


Part Marking Information

D²PAK

EXAMPLE: THIS IS A 32CTQ030S
LOT CODE 8024
ASSEMBLED ON WW 02, 2000


Note: "P" in assembly line position indicates "Lead-Free"

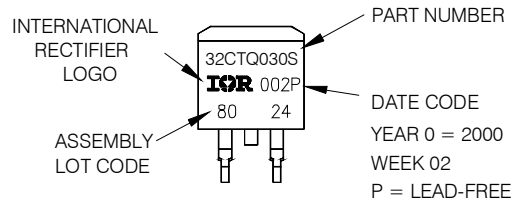


TO-262

EXAMPLE: THIS IS A 32CTQ030-1
LOT CODE 1789
ASSEMBLED ON WW 19, 2002

Note: "P" in assembly line position indicates "Lead-Free"

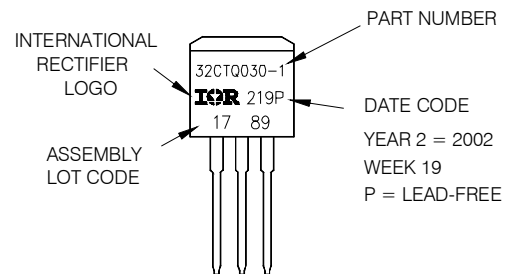

Tape & Reel Information

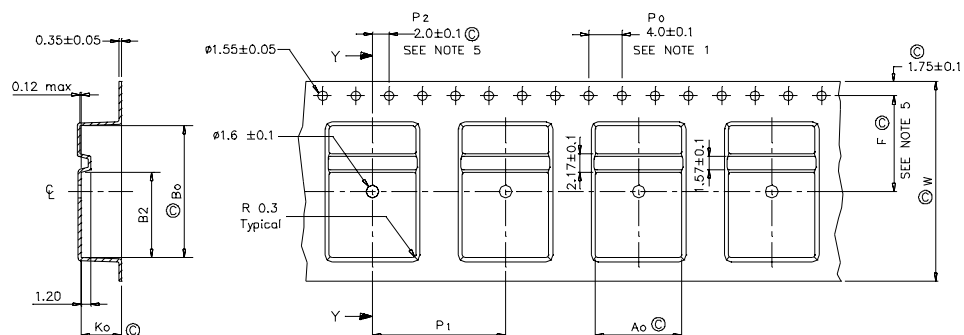

SECTION Y-Y

Ao	10.50	+/-	0.1
Bo	15.80	+/-	0.1
B2	10.25	+/-	0.1
Ko	4.90	+/-	0.1
F	11.50	+/-	0.1
P ₁	16.00	+/-	0.1
W	24.00	+/-	0.3

NOTES:

- 1.0 1.0 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.02
2.0 CAMBER NOT TO EXCEED 1mm in 100mm
3.0 MATERIAL: CONDUCTIVE BLACK STYRENIC ALLOY
4.0 K_0 MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
6.0 VENDOR: (OPTIONAL)
7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
8.0 SURFACE RESISTIVITY OF MOLDED MATH MUST MEASURE LESS OR EQUAL TO 10^6 OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
10.0 © CRITICAL

Dimensions in millimeters and (inches)

Ordering Information Table

Device Code							
	32	C	T	Q	030	S	TRL PbF
	1	2	3	4	5	6	7 8
1	-	Current Rating (30A)					
2	-	Circuit Configuration					
		C = Common Cathode					
3	-	T = TO-220					
4	-	Schottky "Q" Series					
5	-	Voltage Rating (030 = 30V)					
6	-	- S = D²Pak -1= TO-262					
7	-	- none = Tube (50 pieces) - TRL = Tape & Reel (Left Oriented - for D²Pak only) - TRR = Tape & Reel (Right Oriented - for D²Pak only)					
8	-	- none = Standard Production - PbF = Lead-Free					

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level and Lead-Free.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
07/06



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.