

International  
**IOR** Rectifier

**42CTQ030SPbF**  
**42CTQ030-1PbF**

**SCHOTTKY RECTIFIER**

**40 Amp**

$$I_{F(AV)} = 40\text{Amp}$$

$$V_R = 30\text{V}$$

#### Major Ratings and Characteristics

| Characteristics                                     | Values     | Units            |
|---|------------|------------------|
| $I_{F(AV)}$ Rectangular waveform                    | 40         | A                |
| $V_{RRM}$   | 30         | V                |
| $I_{FSM}$ @ $t_p = 5\mu\text{s}$ sine               | 1100       | A                |
| $V_F$ @ 20 Apk, $T_J = 125^\circ\text{C}$ (per leg) | 0.38       | V                |
| $T_J$ range   | -55 to 150 | $^\circ\text{C}$ |


#### Description/ Features

This center tap Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to  $150^\circ\text{C}$  junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- $150^\circ\text{C}$   $T_J$  operation
- Center tap configuration
- Very low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead- Free ("PbF" suffix)



#### Case Styles

**42CTQ030SPbF**



**D²PAK**

**42CTQ030-1PbF**



**TO-262**

## Voltage Ratings

| Parameters                                      | 42CTQ030SPbF, 42CTQ030-1PbF |
|---|-----------------------------|
| $V_R$ Max. DC Reverse Voltage (V)               | 30                          |
| $V_{RWM}$ Max. Working Peak Reverse Voltage (V) |                             |

## Absolute Maximum Ratings

| Parameters   | Values      | Units | Conditions   |
|--|-------------|-------|--|
| $I_{F(AV)}$ Max. Average Forward (Per Leg)<br>Current * See Fig. 5 (Per Device)      | 20<br>40    | A     | 50% duty cycle @ $T_C = 121^\circ\text{C}$ , rectangular wave form   |
| $I_{FSM}$ Max. Peak One Cycle Non-Repetitive<br>Surge Current (Per Leg) * See Fig. 7 | 1100<br>360 | A     | 5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse<br>10ms Sine or 6ms Rect. pulse<br>Following any rated load condition and with rated $V_{RRM}$ applied |
| $E_{AS}$ Non-Repetitive Avalanche Energy<br>(Per Leg)                                | 13          | mJ    | $T_J = 25^\circ\text{C}$ , $I_{AS} = 3\text{ Amps}$ , $L = 2.90\text{ mH}$   |
| $I_{AR}$ Repetitive Avalanche Current<br>(Per Leg)                                   | 3           | A     | Current decaying linearly to zero in 1 $\mu\text{sec}$<br>Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical                                   |

## Electrical Specifications

| Parameters  | Values | Units            | Conditions  |
|---|--------|------------------|---|
| $V_{FM}$ Max. Forward Voltage Drop<br>(Per Leg) * See Fig. 1 (1)    | 0.48   | V                | @ 20A<br>$T_J = 25^\circ\text{C}$                                     |
|   | 0.57   | V                | @ 40A   |
|   | 0.38   | V                | @ 20A<br>$T_J = 125^\circ\text{C}$                                    |
|   | 0.51   | V                | @ 40A   |
| $I_{RM}$ Max. Reverse Leakage Current<br>(Per Leg) * See Fig. 2 (1) | 3      | mA               | $T_J = 25^\circ\text{C}$  |
|   | 183    | mA               | $T_J = 125^\circ\text{C}$<br>$V_R = \text{rated } V_R$                |
| $V_{F(TO)}$ Threshold Voltage                                       | 0.22   | V                | $T_J = T_J \text{ max.}$  |
| $r_t$ Forward Slope Resistance                                      | 6.76   | m $\Omega$       |   |
| $C_T$ Max. Junction Capacitance (Per Leg)                           | 2840   | pF               | $V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$ |
| $L_S$ Typical Series Inductance (Per Leg)                           | 8.0    | nH               | Measured lead to lead 5mm from package body                           |
| dv/dt Max. Voltage Rate of Change                                   | 10000  | V/ $\mu\text{s}$ | (Rated $V_R$ )  |

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

| Parameters   | Values       | Units              | Conditions                           |
|--|--------------|--------------------|--------------------------------------|
| $T_J$ Max. Junction Temperature Range                                | -55 to 150   | $^\circ\text{C}$   |                                      |
| $T_{stg}$ Max. Storage Temperature Range                             | -55 to 150   | $^\circ\text{C}$   |                                      |
| $R_{thJC}$ Max. Thermal Resistance Junction<br>to Case (Per Leg)     | 2.0          | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thJC}$ Max. Thermal Resistance Junction<br>to Case (Per Package) | 1.0          | $^\circ\text{C/W}$ | DC operation                         |
| $R_{thCS}$ Typical Thermal Resistance, Case<br>to Heatsink           | 0.50         | $^\circ\text{C/W}$ | Mounting surface, smooth and greased |
| wt Approximate Weight  | 2 (0.07)     | g (oz.)            |                                      |
| T Mounting Torque  | Min. 6 (5)   | kg-cm<br>(lbf-in)  |                                      |
|  | Max. 12 (10) |                    |                                      |
| Marking Device   | 42CTQ030S    |                    | Case style D <sup>2</sup> Pak        |
|  | 42CTQ030-1   |                    | Case style TO-262                    |

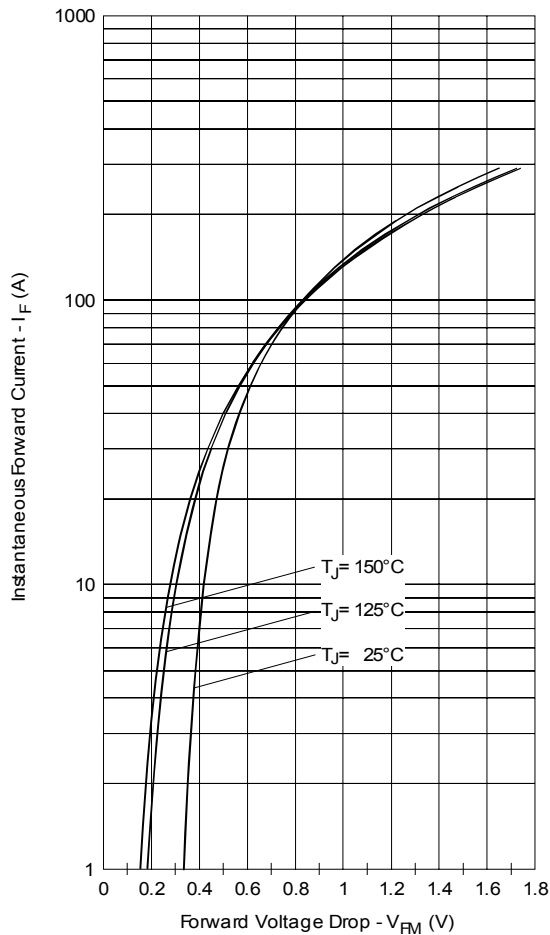


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

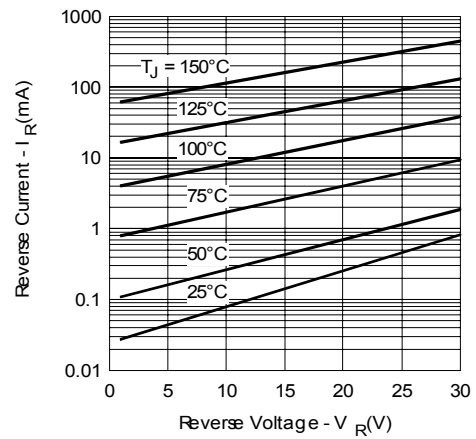


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

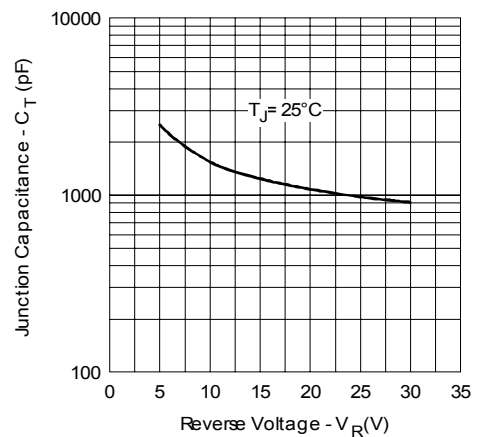


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

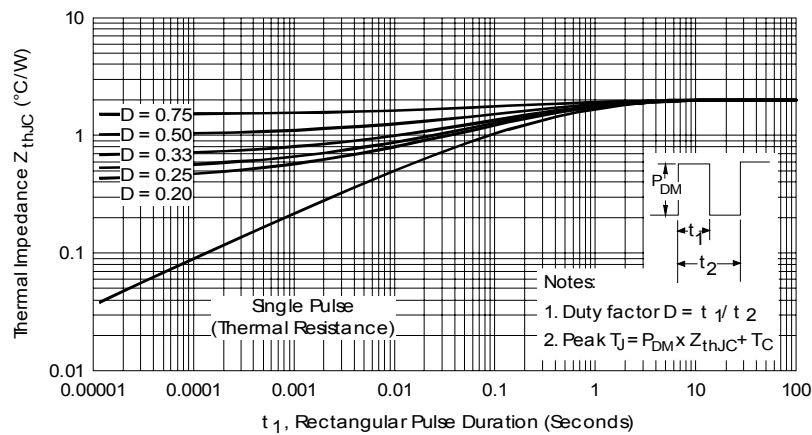


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

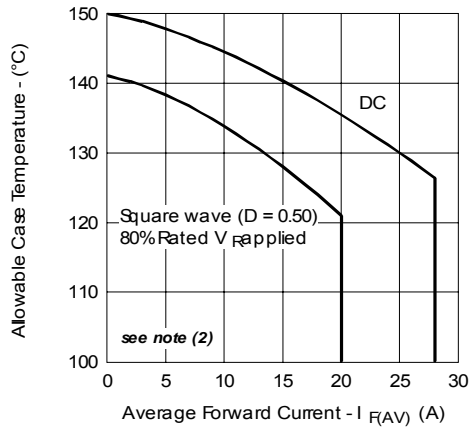


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

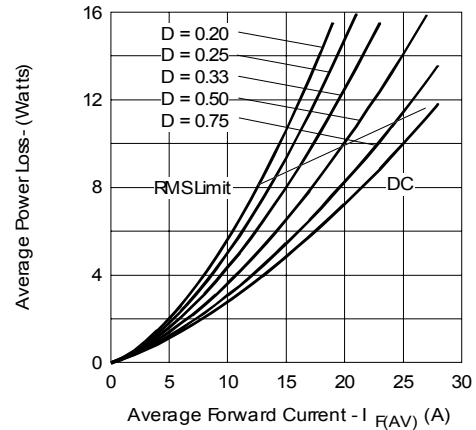


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

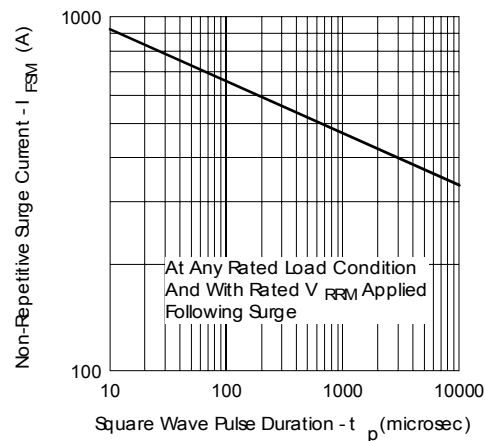


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)

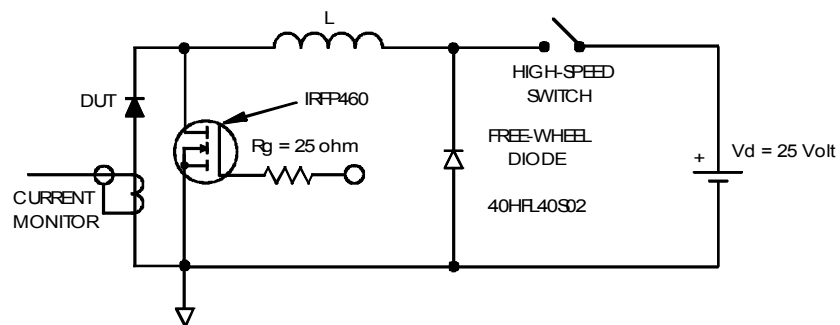




Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;

$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1} @ V_{R1} = 10$  V

Outlines Table

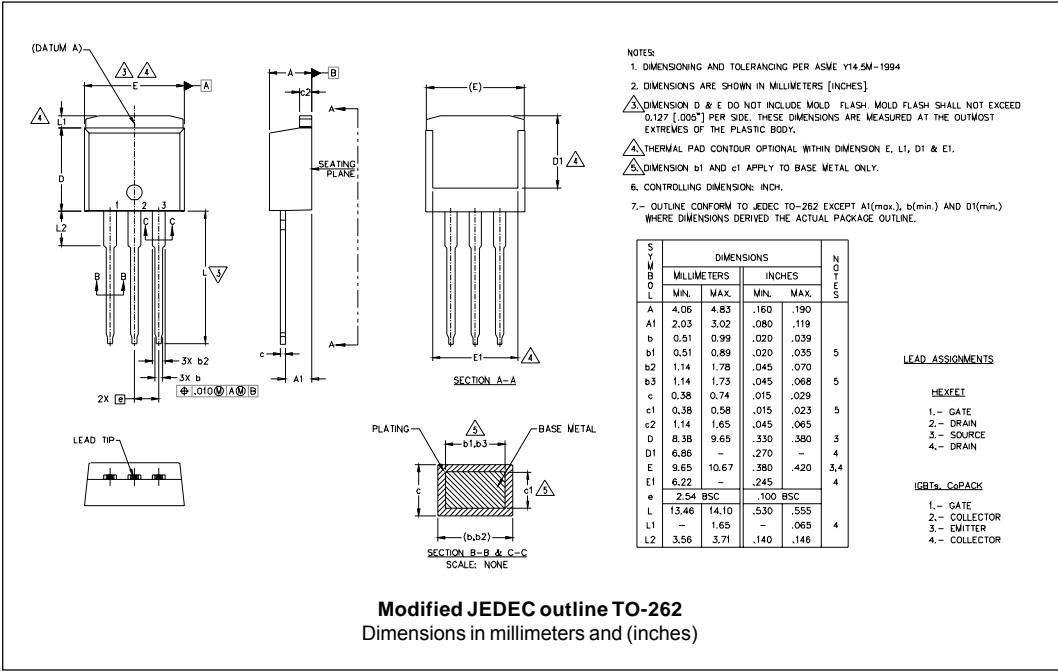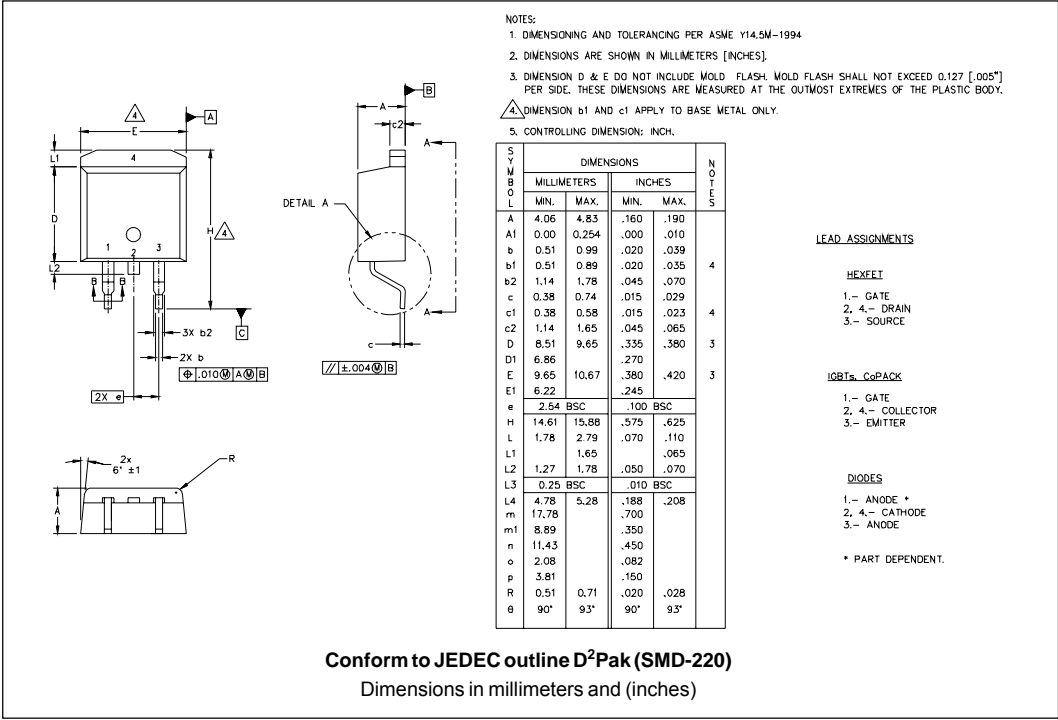


## Part Marking Information

D<sup>2</sup>PAK

EXAMPLE: THIS IS A 42CTQ030S  
LOT CODE 8024  
ASSEMBLED ON WW 02, 2000

Note: "P" in assembly line  
position indicates "Lead-Free"

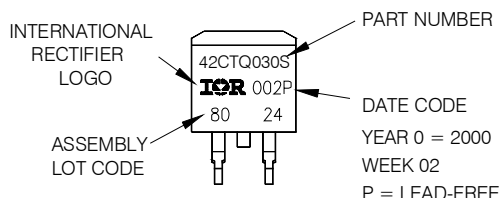

PART NUMBER

DATE CODE

YEAR 0 = 2000


WEEK 02

P = LEAD-FREE

## TO-262

EXAMPLE: THIS IS A 42CTQ030-1  
LOT CODE 1789  
ASSEMBLED ON WW 19, 1999

Note: "P" in assembly line  
position indicates "Lead-Free"

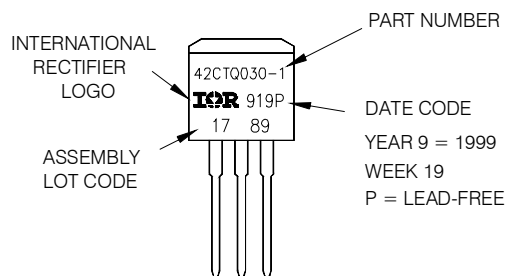

PART NUMBER


DATE CODE

YEAR 9 = 1999

WEEK 19

P = LEAD-FREE

## Tape &amp; Reel Information

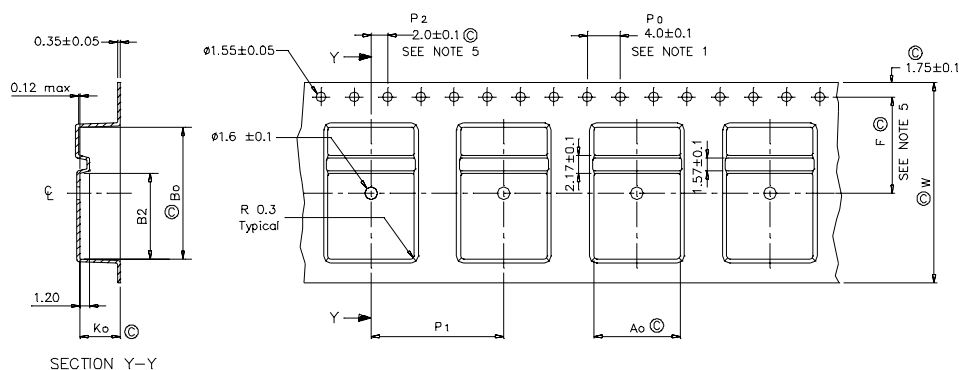

|                |       |     |     |
|----------------|-------|-----|-----|
| A <sub>0</sub> | 10.50 | +/- | 0.1 |
| B <sub>0</sub> | 15.80 | +/- | 0.1 |
| B <sub>2</sub> | 10.25 | +/- | 0.1 |
| K <sub>0</sub> | 4.90  | +/- | 0.1 |
| F              | 11.50 | +/- | 0.1 |
| P <sub>1</sub> | 16.00 | +/- | 0.1 |
| W              | 24.00 | +/- | 0.3 |

- 1.0 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±.02
- 2.0 CAMBER NOT TO EXCEED 1mm in 100mm
- 3.0 MATERIAL: CONDUCTIVE BLACK STYRENE ALLOY
- 4.0 K<sub>0</sub> MEASURED FROM A PLANE ON THE INSIDE BOTTOM OF THE POCKET TO THE TOP SURFACE OF THE CARRIER
- 5.0 MEASURED FROM CENTRELINE OF SPROCKET HOLE TO CENTRELINE OF POCKET
- 6.0 VENDOR: (OPTIONAL)
- 7.0 MUST ALSO MEET REQUIREMENTS OF EIA STANDAR #EIA-481A TAPING OF SURFACE MOUNT COMPONENTS FOR AUTOMATIC PLACEMENT
- 8.0 SURFACE RESISTIVITY OF MOLDED MATL. MUST MEASURE LESS OR EQUAL TO 10<sup>6</sup> OHMS PER SQUARE. MEASURED IN ACCORDANCE TO PROCEDURE GIVEN IN ASTM D-257 & ASTM D-991
- 9.0 TOTAL LENGTH PER REEL MUST BE 45 METERS
- 10.0 © CRITICAL

Dimensions in millimeters and (inches)

## Ordering Information Table

| Device Code |    |  |   |   |     |   |         |
|-------------|----|--|---|---|-----|---|---------|
|             | 42 | C  | T | Q | 030 | S | TRL PbF |
|             | 1  | 2  | 3 | 4 | 5   | 6 | 7 8     |
| 1           | -  | Current Rating (40A)   |   |   |     |   |         |
| 2           | -  | Circuit Configuration  |   |   |     |   |         |
|             |    | C = Common Cathode   |   |   |     |   |         |
| 3           | -  | T = TO-220   |   |   |     |   |         |
| 4           | -  | Schottky "Q" Series  |   |   |     |   |         |
| 5           | -  | Voltage Rating (030 = 30V)   |   |   |     |   |         |
| 6           | -  | <ul style="list-style-type: none"> <li>S = D<sup>2</sup>Pak</li> <li>-1= TO-262</li> </ul>   |   |   |     |   |         |
| 7           | -  | <ul style="list-style-type: none"> <li>none = Tube (50 pieces)</li> <li>TRL = Tape &amp; Reel (Left Oriented - for D<sup>2</sup>Pak only)</li> <li>TRR = Tape &amp; Reel (Right Oriented - for D<sup>2</sup>Pak only)</li> </ul> |   |   |     |   |         |
| 8           | -  | <ul style="list-style-type: none"> <li>none = Standard Production</li> <li>PbF = Lead-Free</li> </ul>  |   |   |     |   |         |

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
07/06



### Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.