

0.7 dB NF Low Noise Amplifier, Operating From 2 GHz to 4 GHz with 40 dB Gain, 14 dBm P1dB and SMA

FMAM1041 is a low noise RF coaxial amplifier operating in the 2 GHz to 4 GHz frequency range. The amplifier offers 0.7 dB typical noise figure, 14 dBm typical P1dB and high 40 dB minimum small signal gain. This performance is achieved through the use of hybrid MIC design and advanced SiGe Bipolar devices. The amplifier desing input/output ports are internally matched to 50 ohms and are DC blocked. The low noise amplifier requires typically a +12V DC power supply. The connectorized SMA module is unconditionally stable and includes built-in voltage regulation. This low noise amplifier requires only a single positive supply, is unconditionally stable and operates over the temperature range of -40°C and +75°C.

Electrical Specifications (TA = +25°C , DC Voltage = +12Vdc , DC Current = 100mA)

Description	Min	Typ	Max	Unit
Frequency Range	2		4	GHz
Small Signal Gain	37	40	43	dB
Gain Flatness		±1	±1.25	dB
Gain Variance at OTR*		1.5		dB
Output at 1 dB Compression Point	+12	+14		dBm
Noise Figure		0.7	0.9	dB
Input VSWR		1.5:1	2:1	
Output VSWR		1.6:1	2:1	
Reverse Isolation	55	60		dB
Spurious			-60	dBc
Input Power (CW)			+10	dBm
Operating DC Voltage	+10	+12	+15	Volts
Operating DC Current	80	100	150	mA
Operating Temperature Range	-40		+75	°C

*OTR= Base Plate Operating Temperature Range

Absolute Maximum Rating

Parameter	Rating	Units
Supply Voltage	+18	Volts
RF Input Power	+10	dBm
Operating Temperature	-55 to +125	°C
Storage Temperature	-40 to +75	°C



ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.



Features:

- 2 GHz to 4 GHz Frequency Range
- P1dB: 14 dBm
- High Small Signal Gain: 40 dB typical
- Noise Figure: 0.7dB typ
- 50 Ohm Input and Output Matched
- -40 to 75°C Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in Voltage Regulator

Applications:

- Laboratory Applications
- R&D Labs
- Radar Systems
- Telecom Infrastructure
- Test Instrumentation
- Communication Systems
- Wireless Communication
- Microwave Radio Systems
- Cellular Base Stations
- Low Noise Amplifier
- General Purpose Amplification
- General Purpose Wireless
- Wideband Gain Block
- IF Amplifier/RF Driver Amplifier
- RF Wideband Front Ends
- RF Pre-amplification
- Fixed and Land Mobile

Fairview Microwave
 301 Leora Ln., Suite 100
 Lewisville, TX 75056
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com

Mechanical Specifications

Size	
Length	1.5 in [38.1 mm]
Width	0.85 in [21.59 mm]
Height	0.375 in [9.53 mm]
Weight	0.21 lbs [95.25 g]
Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature	
Operating Range	-40 to +75 deg C
Storage Range	-55 to +125 deg C

Compliance Certifications (see product page for current document)


Plotted and Other Data

- Notes:
- Values at 25 °C, sea level
 - ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Typical Performance Data

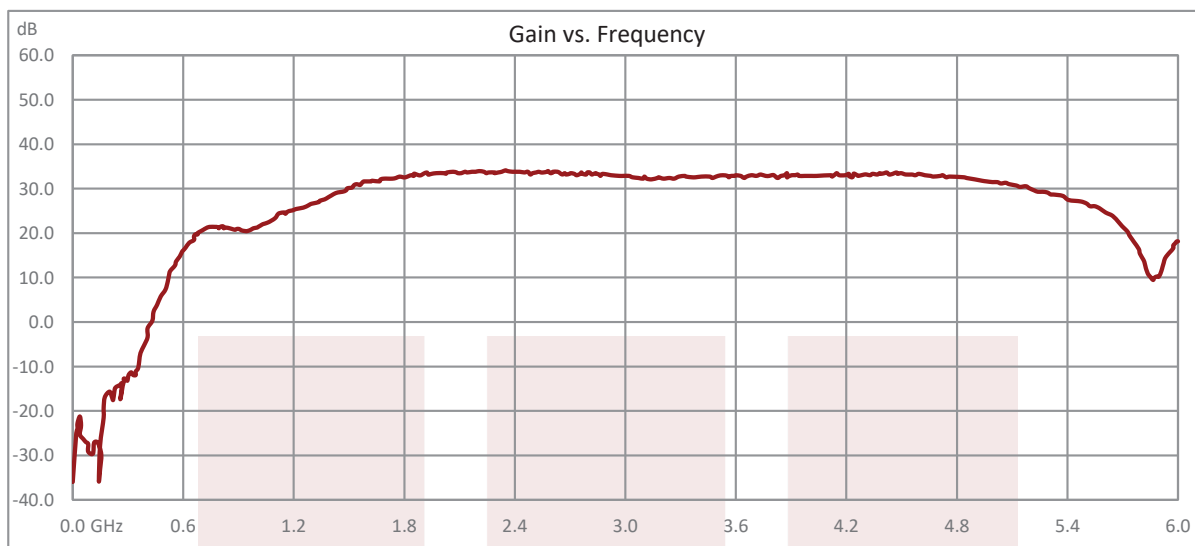


0.7 dB NF Low Noise Amplifier, Operating From 2 GHz to 4 GHz with 40 dB Gain, 14 dBm P1dB and SMA from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Lewisville, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [0.7 dB NF Low Noise Amplifier, Operating From 2 GHz to 4 GHz with 40 dB Gain, 14 dBm P1dB and SMA FMAM1041](https://www.fairviewmicrowave.com/0.7db-nf-low-noise-amplifier-40db-fmam1041-p.aspx)

URL: <https://www.fairviewmicrowave.com/0.7db-nf-low-noise-amplifier-40db-fmam1041-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.

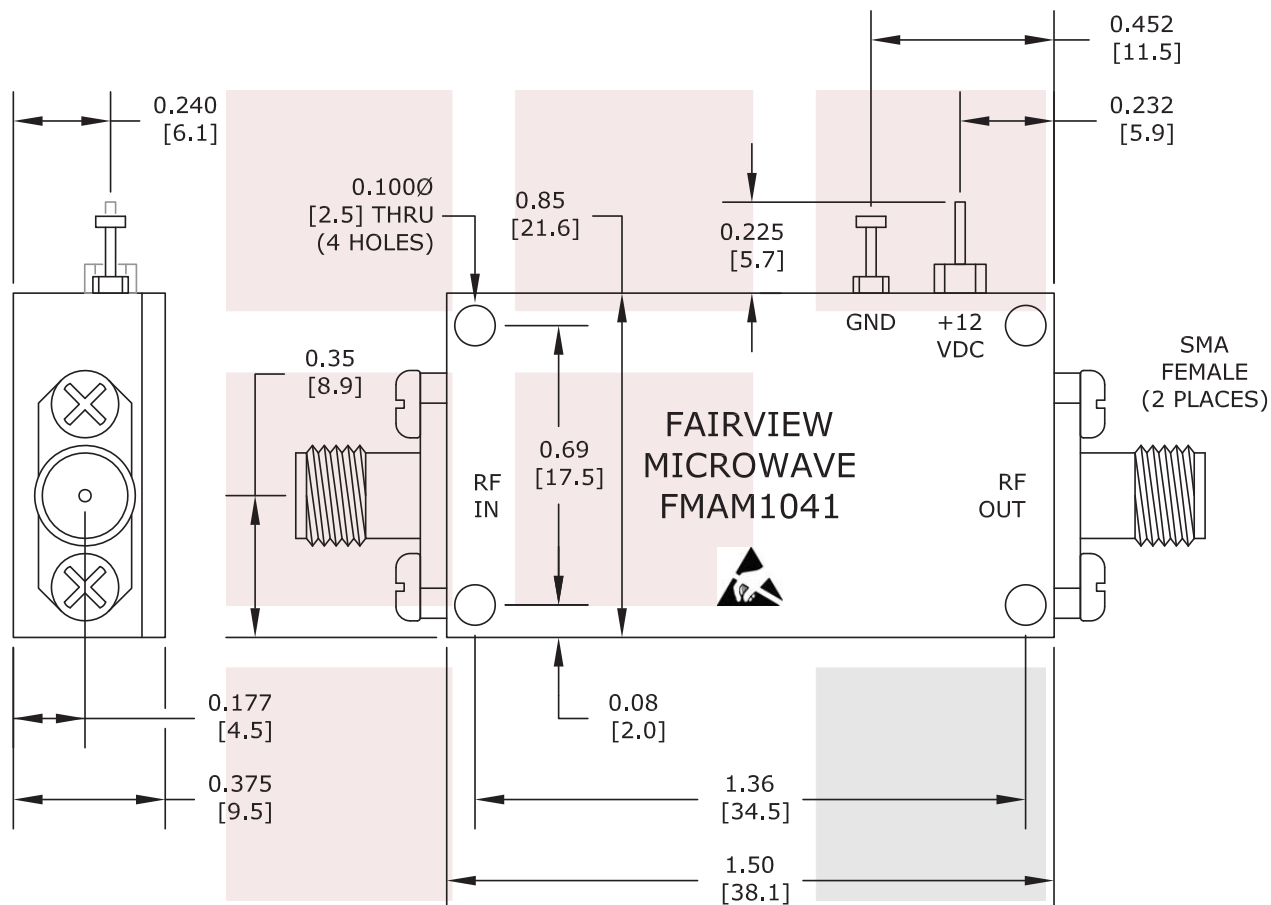

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE 0.7 dB NF Low Noise Amplifier, Operating From 2 GHz to 4 GHz with 40 dB Gain, 14 dBm P1dB and SMA		DWG NO FMAM1041		CAGE CODE 3FKR5	
CAD FILE	071816	SHEET	SCALE	N/A	SIZE A 2233

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fairview Microwave:](#)

[FMAM1041](#)