





1

Configuration of
DF22-2P-7.92DS(06) DF22-4P-7.92DS(06)

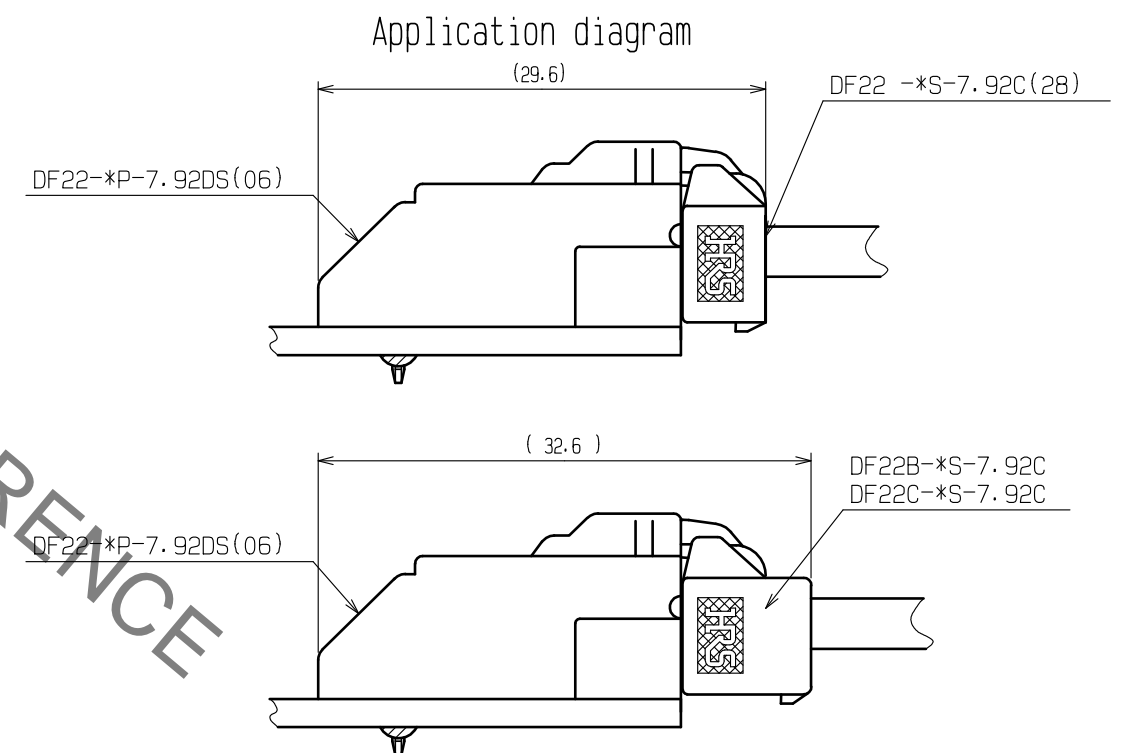

UL 

				2		Copper alloy		Contact area:Gold plating 0.2μm min Lead area:Tin-copper plating 1μm min Under plating:Nickel platig 1μm min Other:Nickel plating 1μm min	
1	Polyamide	Natural (beige)・UL94V-0							
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00003735		DESIGNED TO. KUROMATSU	CHECKED TS. FUKUSHIMA	DATE 18. 04. 11
 HIROSE ELECTRIC CO., LTD.		APPROVED	・KI. AKIYAMA	14. 05. 26	DRAWING NO. EDC-163718-06-04				
		CHECKED	・TS. FUKUSHIMA	14. 05. 26	PART NO. DF22- * P-7. 92DS (06)				
		DESIGNED	・HT. SATO	14. 05. 26	CODE NO. CL680-				
		DRAWN	・MI. SAKIMURA	14. 05. 23	 				

Aug.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





Precautions

Notification for Insertion Extraction

- 1) Please insert(extract) the crimping socket straight to the mating connector.
Insertion(extraction) at tilted angles applies load concentration to the connetor end and may cause deformation (at connection area, socket and header case, etc). There is firing risk using this kind of deformed connector.



Insertion(Extraction)

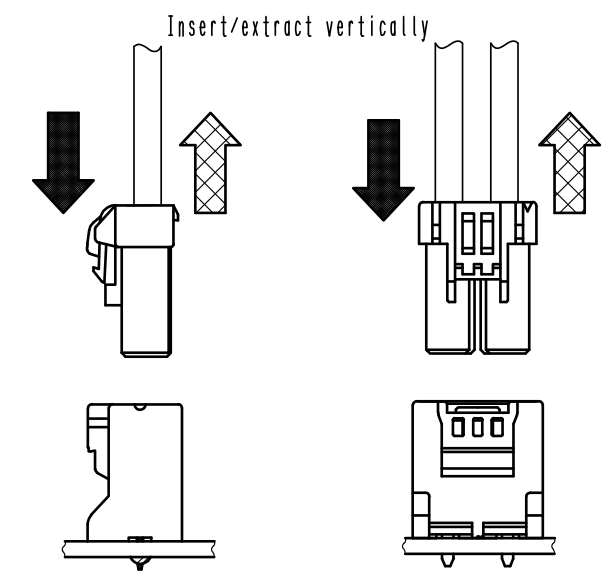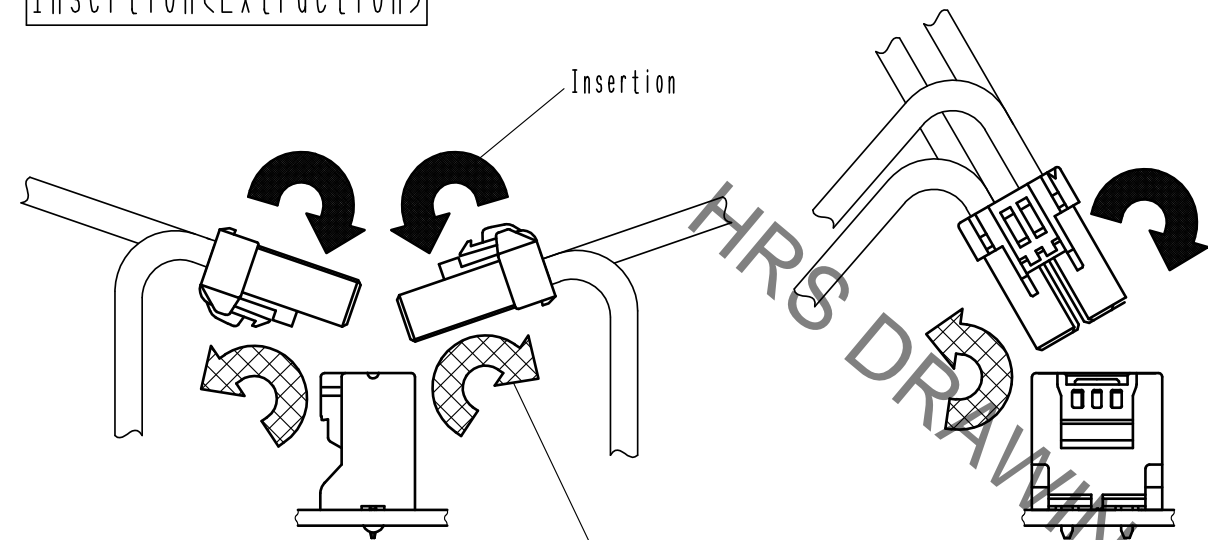

- 2) When it is hard to extract, please lightly insert the connector beforehand and then pull it with releasing the lock.
Forced extraction has a risk of connector breakage.

Notification of wiring

- 1) When using a thick cable, short cable length and bending close to the connector end, these load concentration may cause deformation.
Please note that there is firing risk using deformed connector.
When installing, please refrain from stress concentration such as cable bending close to the connector end or cable twisting.

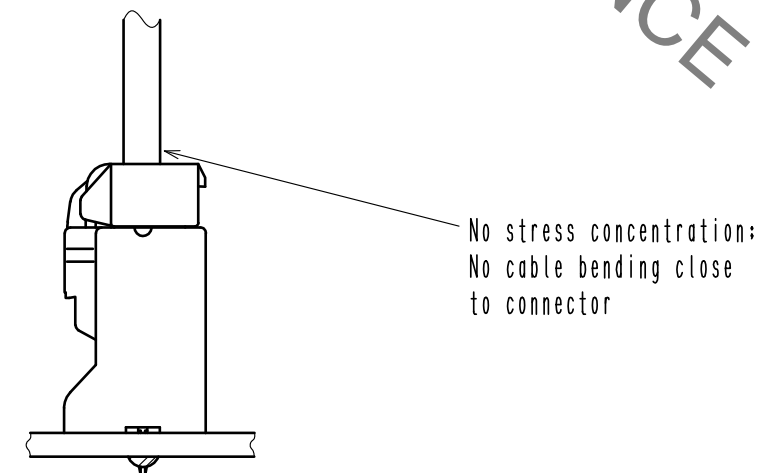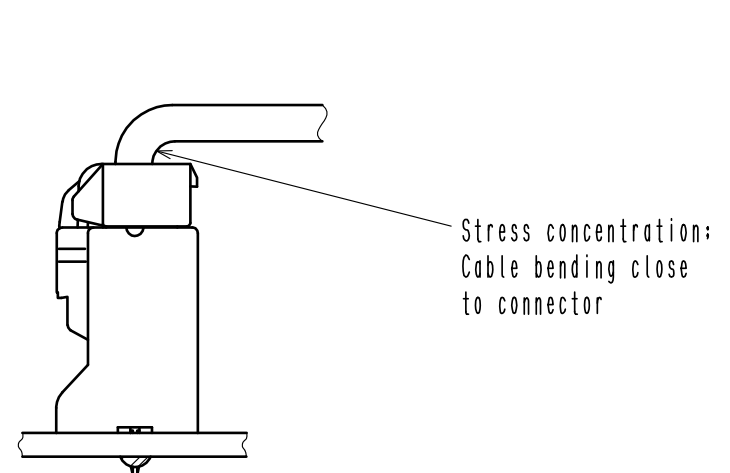

- 2) When applying load to connector end, please use the retainer for reducing the stress affection on the connector.
Retainer shall be installed after inserted crimping contact completely. It might be impossible to insert it when terminal installation is incompleated.



DRAWING NO.	EDC-163718-06-04
PART NO.	DF22-*P-7. 92DS<06>
CODE NO.	CL680-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[DF22-3P-7.92DS\(06\)](#)