

EVAL_TDA38812_1VOUT user guide

User guide for TDA38812 evaluation board

About this document

Scope and purpose

The TDA38812 is a synchronous buck regulator, providing a compact, high-performance, and flexible solution in a small 3 mm x 4 mm QFN package.

Key features offered by the TDA38812 include internal soft-start, precision 0.6 V reference voltage, Power Good, thermal protection, programmable switching frequency in the range of 600 kHz to 1 MHz, enable input, input undervoltage lockout (UVLO) for proper start-up, latched-off overvoltage protection (OVP), overcurrent protection (OCP) and pre-bias start-up.

This user guide contains the schematic and bill of materials for the EVAL_TDA38812_1VOUT engineering evaluation board. It describes operation and use of the evaluation board itself. Detailed application information for TDA38812 is available in the TDA38812 datasheet.

Intended audience

This document is intended as a guide for design engineers evaluating TDA38812 performance with the engineering EVAL_TDA38812_1VOUT demo board.

Important notice

Important notice

“Evaluation Boards and Reference Boards” shall mean products embedded on a printed circuit board (PCB) for demonstration and/or evaluation purposes, which include, without limitation, demonstration, reference and evaluation boards, kits and design (collectively referred to as “Reference Board”).

Environmental conditions have been considered in the design of the Evaluation Boards and Reference Boards provided by Infineon Technologies. The design of the Evaluation Boards and Reference Boards has been tested by Infineon Technologies only as described in this document. The design is not qualified in terms of safety requirements, manufacturing and operation over the entire operating temperature range or lifetime.

The Evaluation Boards and Reference Boards provided by Infineon Technologies are subject to functional testing only under typical load conditions. Evaluation Boards and Reference Boards are not subject to the same procedures as regular products regarding returned material analysis (RMA), process change notification (PCN) and product discontinuation (PD).

Evaluation Boards and Reference Boards are not commercialized products, and are solely intended for evaluation and testing purposes. In particular, they shall not be used for reliability testing or production. The Evaluation Boards and Reference Boards may therefore not comply with CE or similar standards (including but not limited to the EMC Directive 2004/EC/108 and the EMC Act) and may not fulfill other requirements of the country in which they are operated by the customer. The customer shall ensure that all Evaluation Boards and Reference Boards will be handled in a way which is compliant with the relevant requirements and standards of the country in which they are operated.

The Evaluation Boards and Reference Boards as well as the information provided in this document are addressed only to qualified and skilled technical staff, for laboratory usage, and shall be used and managed according to the terms and conditions set forth in this document and in other related documentation supplied with the respective Evaluation Board or Reference Board.

It is the responsibility of the customer’s technical departments to evaluate the suitability of the Evaluation Boards and Reference Boards for the intended application, and to evaluate the completeness and correctness of the information provided in this document with respect to such application.

The customer is obliged to ensure that the use of the Evaluation Boards and Reference Boards does not cause any harm to persons or third party property.

The Evaluation Boards and Reference Boards and any information in this document is provided "as is" and Infineon Technologies disclaims any warranties, express or implied, including but not limited to warranties of non-infringement of third party rights and implied warranties of fitness for any purpose, or for merchantability.

Infineon Technologies shall not be responsible for any damages resulting from the use of the Evaluation Boards and Reference Boards and/or from any information provided in this document. The customer is obliged to defend, indemnify and hold Infineon Technologies harmless from and against any claims or damages arising out of or resulting from any use thereof.

Infineon Technologies reserves the right to modify this document and/or any information provided herein at any time without further notice.

Safety precautions

Safety precautions

Note: Please note the following warnings regarding the hazards associated with development systems

Table 1 Safety precautions

	Caution: The heat sink and device surfaces of the evaluation or reference board may become hot during testing. Hence, necessary precautions are required while handling the board. Failure to comply may cause injury.
	Caution: The evaluation or reference board contains parts and assemblies sensitive to electrostatic discharge (ESD). Electrostatic control precautions are required when installing, testing, servicing or repairing the assembly. Component damage may result if ESD control procedures are not followed. If you are not familiar with electrostatic control procedures, refer to the applicable ESD protection handbooks and guidelines.

Table of contents

About this document.....	1
Important notice	2
Safety precautions.....	3
Table of contents.....	4
1 TDA38812 features	5
2 Board information.....	6
2.1 Evaluation board	6
2.2 Board features	6
2.3 Connections and operating instructions.....	7
2.4 Layout	7
2.5 PCB layout	8
2.6 Schematic.....	11
2.7 Bill of materials.....	12
3 Evaluation board test results.....	15
3.1 Typical efficiency and power loss curves	15
3.2 Typical operating waveforms	16
3.3 TDA38812 thermal images with no air flow and 25°C ambient	21
Revision history.....	22

1 TDA38812 features

Features

- Wide input voltage range: 4 V to 16 V with internal bias and 2.7 V to 16 V with external V_{CC} (3.3 V)
- Precision reference voltage ($0.6\text{ V} \pm 0.5\text{ percent}$)
- Stable with ceramic output capacitors
- No external compensation
- Optional forced continuous conduction mode and diode emulation for enhanced light load efficiency
- Selectable switching frequency from 600 kHz, 800 kHz, and 1 MHz
- Programmable soft-start time with a minimum of 1 ms and enhanced pre-bias start-up
- Voltage tracking with external reference input
- Programmable OCP limit with internal thermal compensation
- Enable input with voltage monitoring capability
- Power Good output
- Non-latch OCP, undervoltage protection (UVP), thermal shutdown, and latch-off OVP
- Operating temperature: -40°C less than T_J < less than 125°C
- Small size: 3 mm x 4 mm QFN-21
- Lead-free, halogen-free and RoHS compliant

Potential applications

- Server applications
- Storage applications
- Telecom and datacom applications
- Distributed point-of-load (PoL) power architectures

2 Board information

2.1 Evaluation board

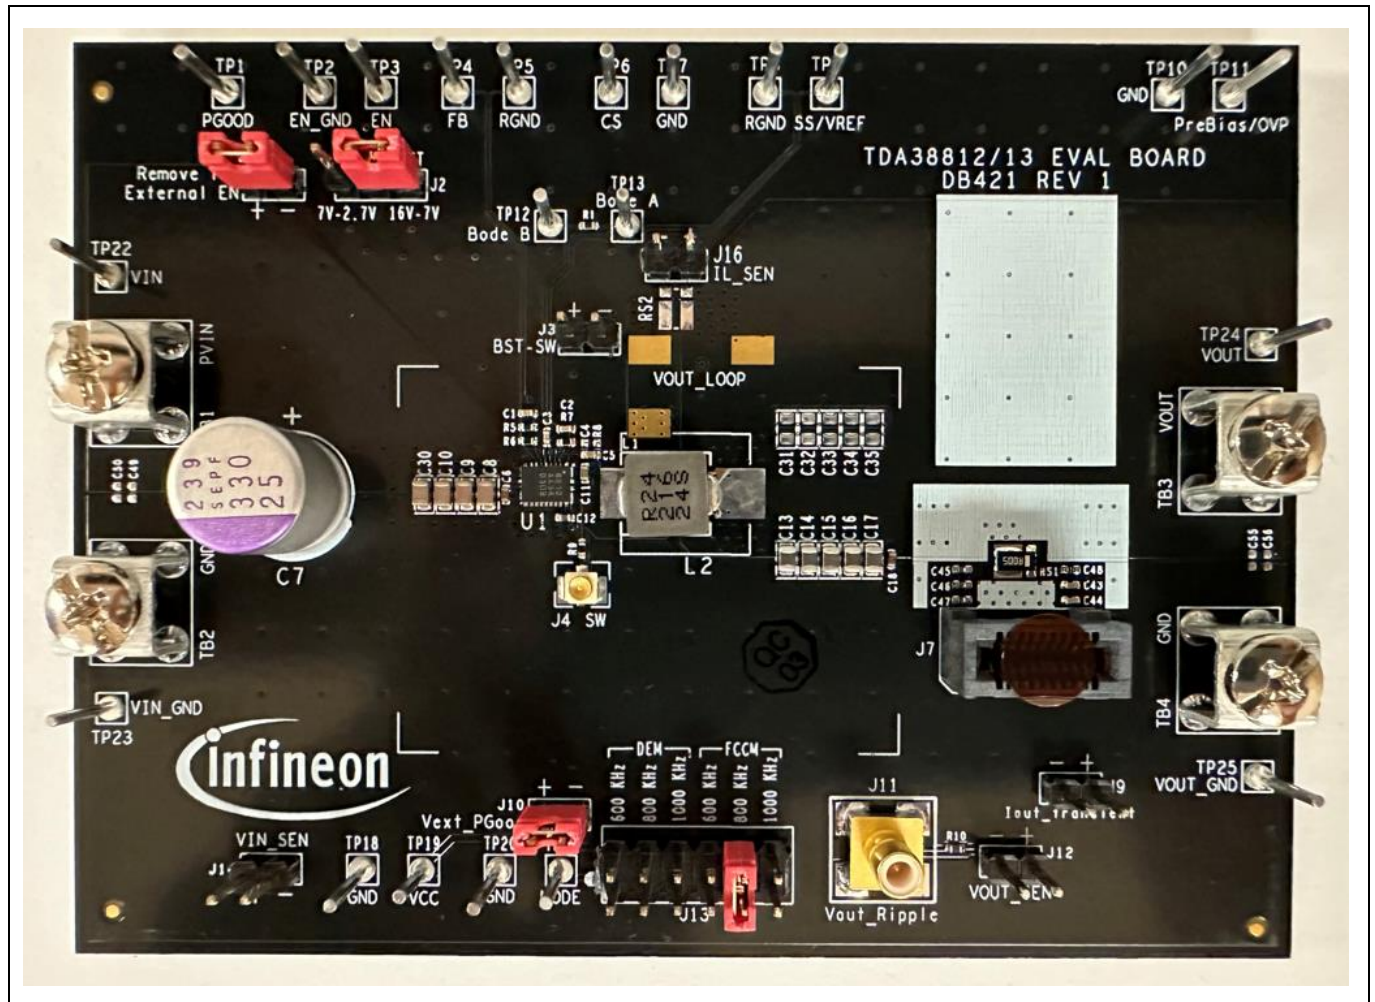


Figure 1 Evaluation board

2.2 Board features

$V_{IN} = +12\text{ V}$, $V_{OUT} = +1\text{ V}$ at 0 to 12 A

$F_{SW} = 600\text{ kHz}/800\text{ kHz}/1000\text{ kHz}$

$L = 240\text{ nH}$

$C_{IN} = 10 \times 22\text{ }\mu\text{F}$ (25 V, ceramic 0805) + 1 x 2.2 μF (25 V, ceramic 0805) + 1 x 330 μF (25 V, electrolytic, optional)

$C_{OUT} = 10 \times 47\text{ }\mu\text{F}$ (6.3 V, ceramic 0805) + 1 x 2.2 μF (6.3 V, ceramic 0805)

2.3 Connections and operating instructions

The TDA38812 demo board requires a single +12 V for the input power and can deliver up to 12 A load current. The operation modes and OCP limits can be selected through jumpers.

Table 2 Connections

Label		Description
Input	PVIN	Connect input power (+12 V) to this pin
	GND	Return of input power
	PVIN, PGND_SNS	Sense pins for the input voltage
Output	VOUT	V_{OUT} (+1 V), connect a DC load (12 A max.) to this pin
	PGND	Return of V_{OUT}
	VOUT, PGND_SNS	Sense pins for the output voltage
Enable	EN	Connect a scope probe to this pin to monitor enable signal.
	GND	Or, an external enable signal can be applied to this pin to overdrive the onboard enable signal.
Bode	BODE_A	For bode plot measurement
	BODE_B	
Soft-start	SS/VREF	Connect a capacitor to this pin to get different soft-start times
Mode	FCCM	Use a jumper to select FCCM or DEM, and switching frequency. Three preset switching frequencies are: 600 kHz, 800 kHz, 1000 kHz.
	DEM	
CS		Use a resistor to connect to CS to configure the current limit
P _{GOOD}	PGOOD	Connect a scope probe to this pin to monitor Power Good signal
	GND	GND
R _{GND}	RGND	Differential remote sense negative input. Connect this pin directly to the negative side of the voltage sense point. Short to GND if remote sense is not used.
V _{CC}	VCC	Standard demo board is configured to use the internal low-dropout regulator (LDO). Connect a scope probe to this pin to monitor the output of the internal LDO.
	GND	

2.4 Layout

The PCB is a six-layer board using FR4 material. Top and bottom layers use 2 oz. copper and inner layers use 1 oz. copper. The PCB thickness is 1.6 mm. The TDA38812 and other major power components are mounted on the top side of the board.

2.5 PCB layout

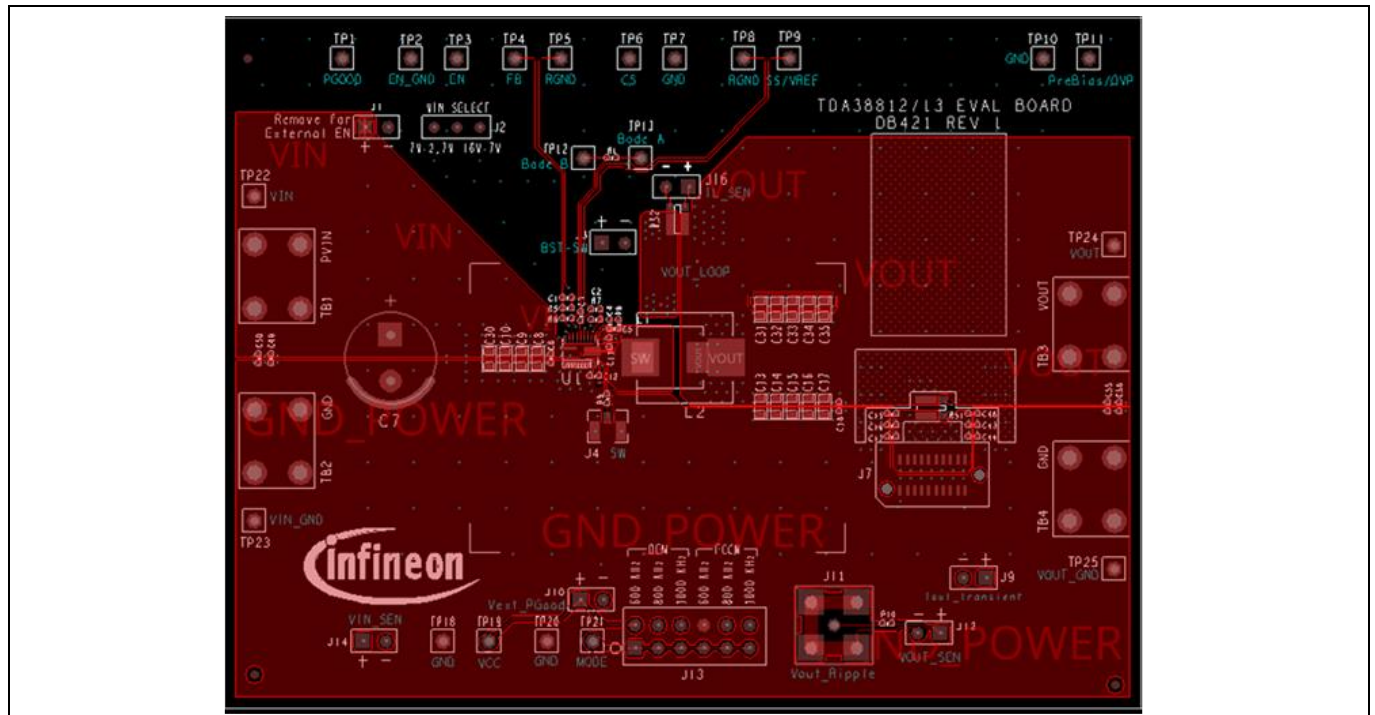


Figure 2 Top layer

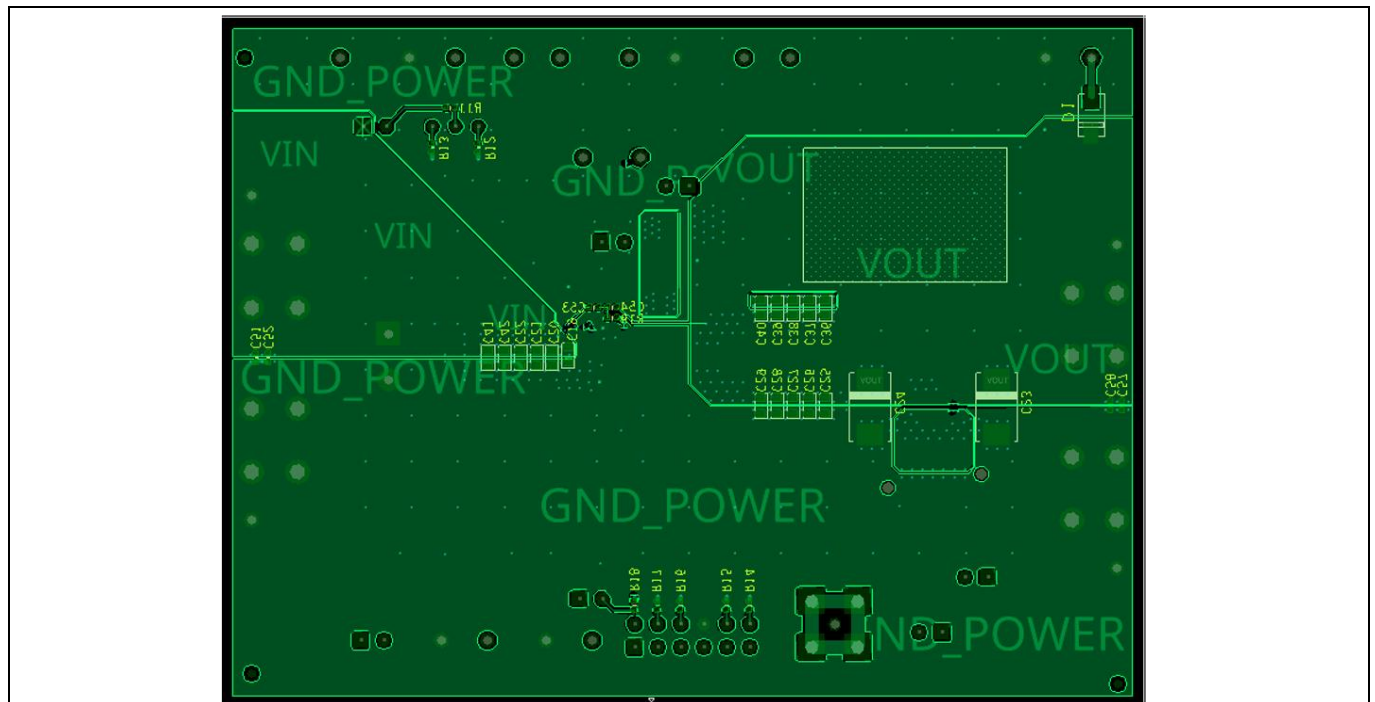


Figure 3 Bottom layer

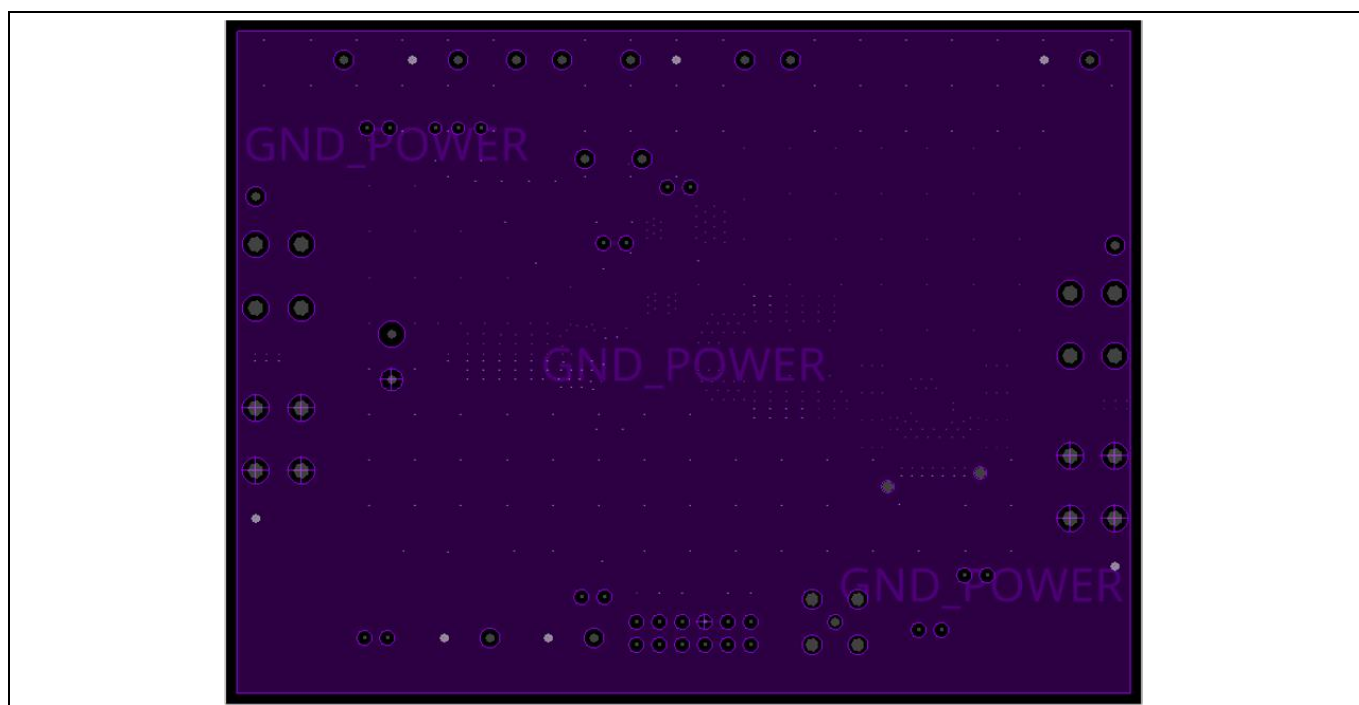


Figure 4 Inner layer 1

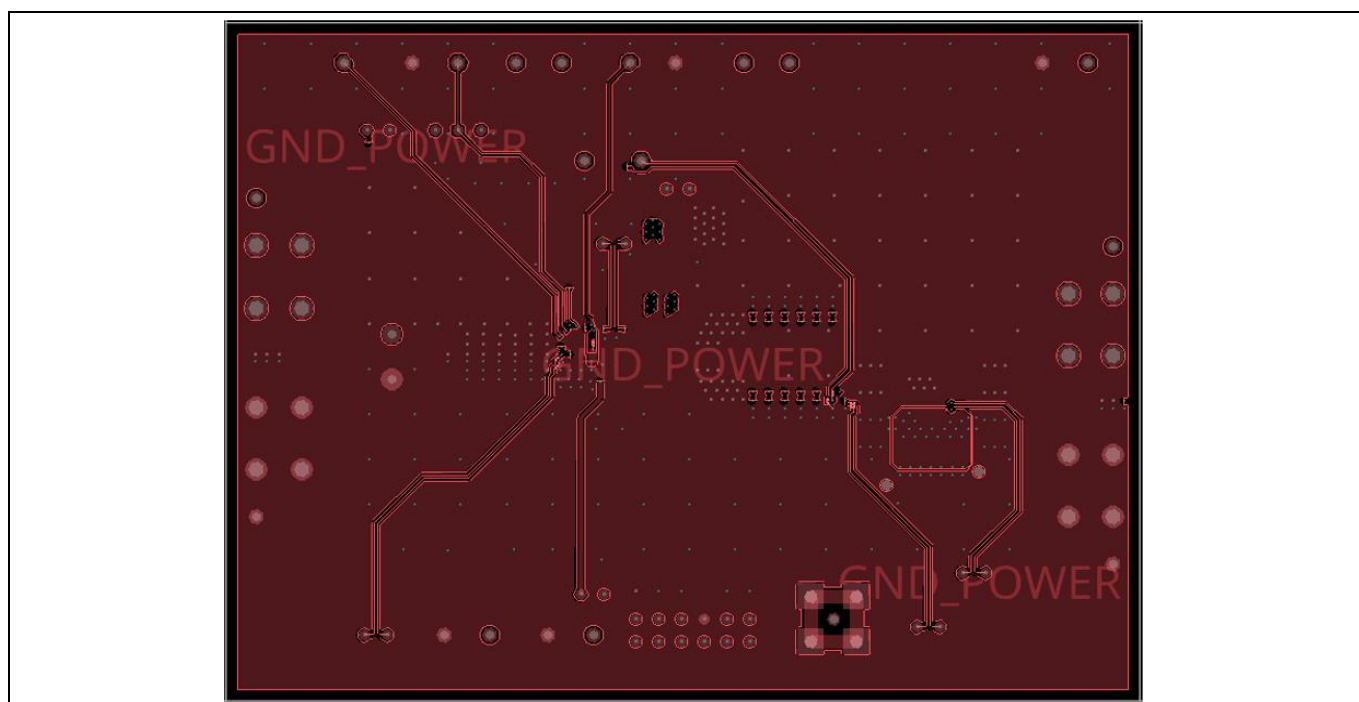


Figure 5 Inner layer2

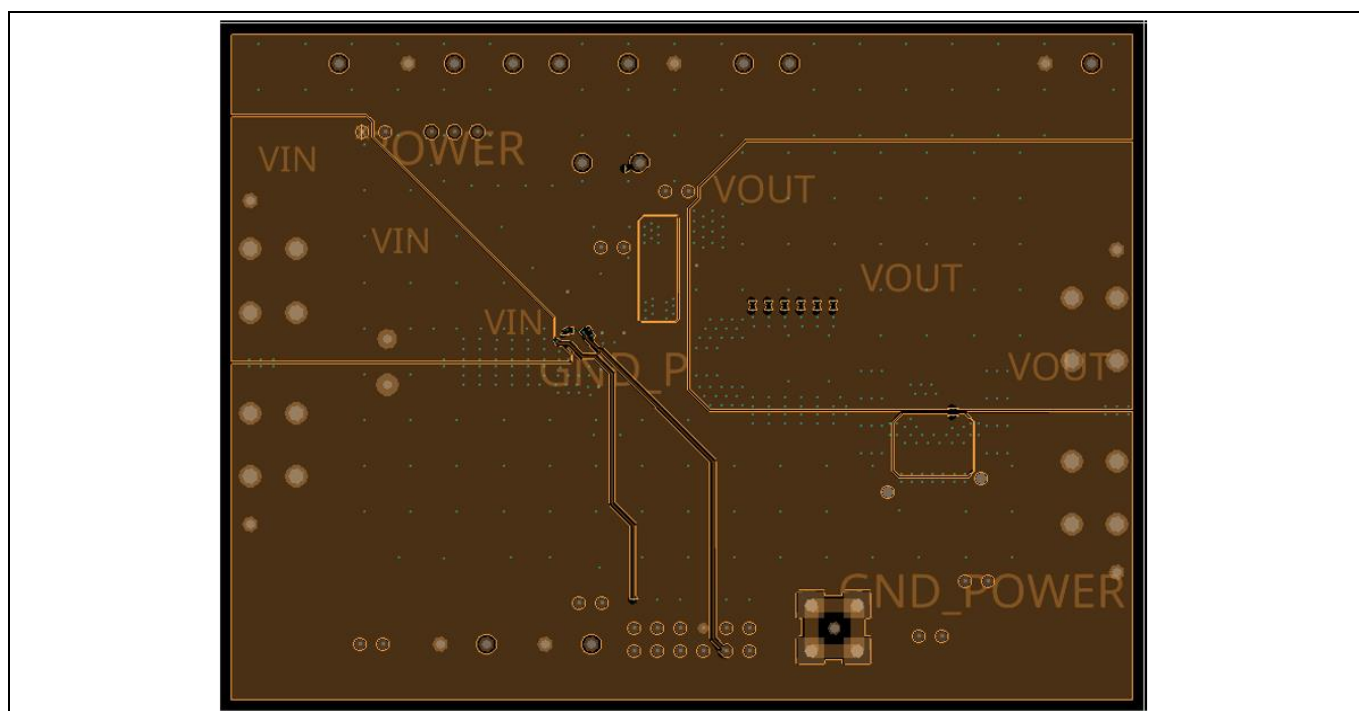


Figure 6 Inner layer 3

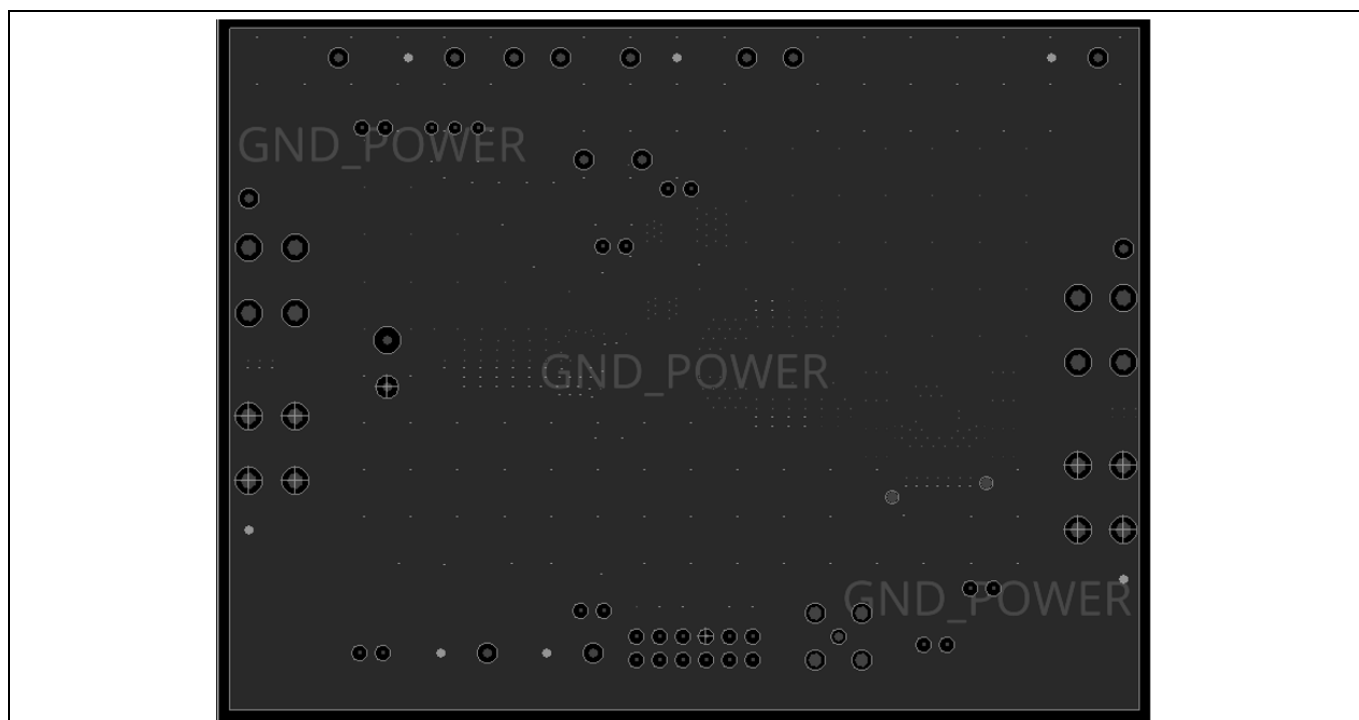


Figure 7 Inner layer 4

Figure 8 Schematic of the TDA38812 evaluation board $V_{IN} = 12\text{ V}$, $V_{OUT} = 1\text{ V}$, $I_{OUTmax} = 12\text{ A}$

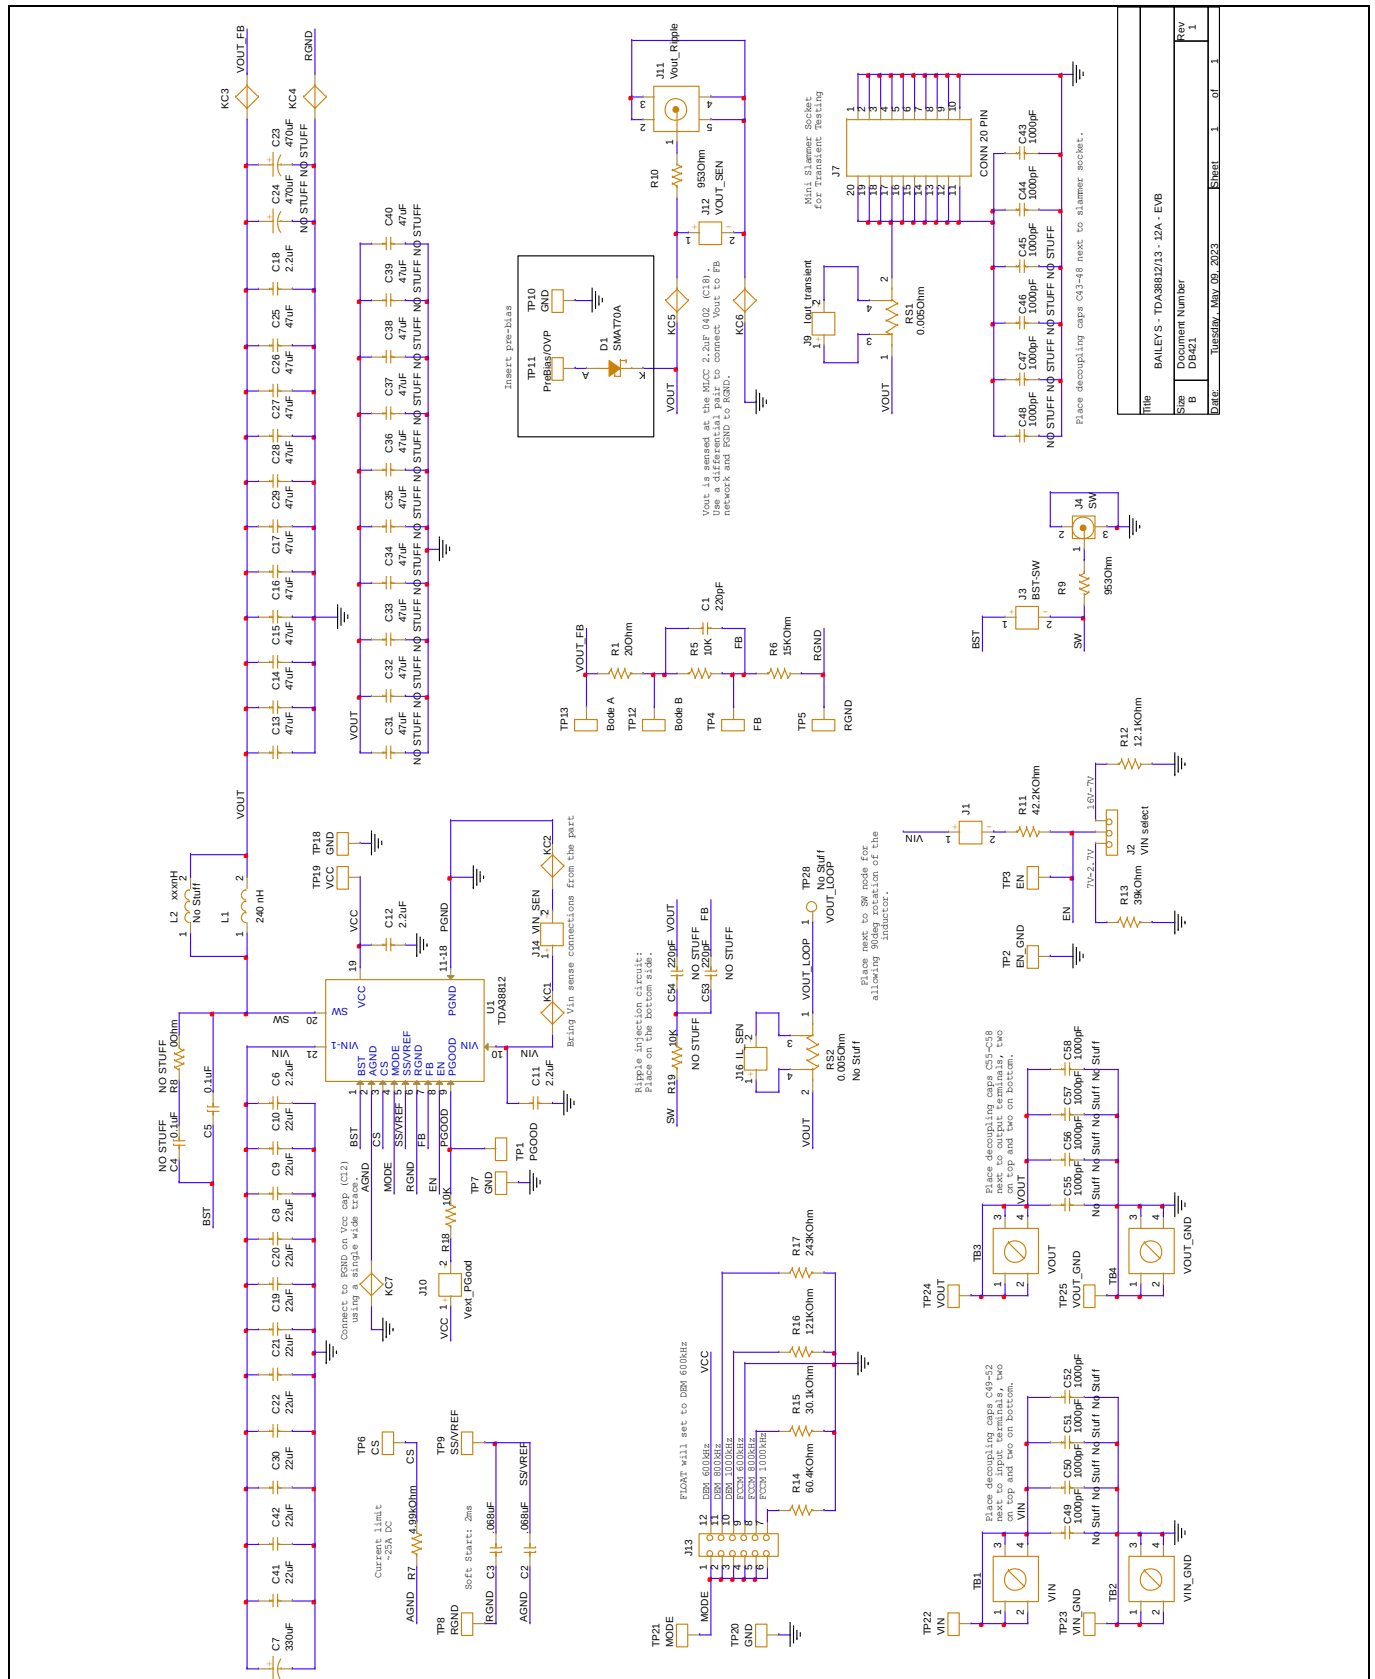


Figure 8 Schematic of the TDA38812 evaluation board $V_{IN} = 12\text{ V}$, $V_{OUT} = 1\text{ V}$, $I_{OUTmax} = 12\text{ A}$

2.7 Bill of materials

Table 3 Bill of materials

Item no.	Qty	Value	Part reference	Description	Manufacturer	Part number
1	1	220 pF	C1	Ceramic capacitor 220 pF 50 V X7R 0402 10%	TDK Corporation	C1005X7R1H221 K050BA
2	1	2.2 μ F	C12	Ceramic capacitor 2.2 μ F 16 V X5R 0402 10%	TDK Corporation	C1005X5R1C225 K050BC
3	10	47 μ F	C13, C14, C15, C16, C17, C25, C26, C27, C28, C29	Ceramic capacitor 47 μ F 6.3 V X5R 0805 20%	TDK Corporation	C2012X5R0J476 M
4	2	0.068 μ F	C2, C3	Ceramic capacitor 0.068 μ F 16 V X7R 0402 10%	Yageo	CC0402KRX7R7 BB683
5	2	1000 pF	C43, C44	Ceramic capacitor 1000 pF 50 V X7R 0402 10%	Kemet	C0402C102K5R AC7867
6	1	0.1 μ F	C5	Ceramic capacitor 0.1 μ F 16V X7R 0402 10%	Murata	GRM155R71C10 4KA88D
7	3	2.2 μ F	C6, C11, C18	Ceramic capacitor 2.2 μ F 25 V X5R 0402 10%	Murata	GRM155R61E22 5KE11D
8	1	330 μ F	C7	Aluminum polyester capacitor 330 μ F 20% 25 V T/H	Panasonic Electronic Components	25SEPF330M
9	10	22 μ F	C8, C9, C10, C19, C20, C21, C22, C30, C41, C42	Ceramic capacitor 22 μ F 25 V X5R 0805 20%	Murata	GRM21BR61E22 6ME44L
10	1	SMAT 70 A	D1	TVS diode 70 VWM 100VC SMA	Diodes Incorporated	SMAT70A-13-F
11	7	–	J1, J3, J9, J10, J12, J14, J16	Vertical header connector 2- position 2.54 mm	Harwin Inc.	M20-9990246

Board information

12	1	–	J11	SMB straight jack connector 50 Ω PCB	Cinch Connectivity Solutions/ Johnson	131-3701-261
13	1	–	J13	Vertical header connector 12- position 2.54 mm	Adam Tech	PH2-12-UA
14	1	–	J2	Header connector R/A 3- position 2.54 mm	Harwin Inc.	M20-9960345
15	1	–	J4	UMCC straight jack connector 50 Ω SMD	TE Connectivity/ AMP Connectors	1909763-1
16	1	20-pin conne ctor	J7	Dual female edge connector 20- position 0.031	Samtec Inc.	HSEC8-110-01- S-DV-A-K-TR
17	1	240 nH	L1	Fixed inductor 240 nH 35 A 1.19 m Ω SMD	Delta Electronics/ Cyntec	CMLE063T- R24MS1R197
18	1	20 Ω	R1	Thick film resistor 20.0 Ω 1/16 W 1% SMD 0402	Yageo	RE0402FRE0720 RL
19	1	42.2 k Ω	R11	Thick film resistor 42.2 k Ω 1/16 W 1% 0402	Yageo	RC0402FR- 0742K2L
20	1	12.1 k Ω	R12	Thick film resistor 12.1 k Ω 1/10 W 1% 0402	Panasonic	ERJ-2RKF1212X
21	1	39 k Ω	R13	Thick film resistor 39 k Ω 5.0 % 1/16 W SMD 0402	Panasonic	ERJ-2GEJ393X
22	1	60.4 k Ω	R14	Thick film resistor 60.4 k Ω 1/10W 1% 0402	Yageo	RC0402FR- 0760K4L
23	1	30.1 k Ω	R15	Thick film resistor 30.1 k Ω 1.0 % 1/16 W SMD 0402	Vishay	CRCW040230K1 FKED
24	1	121 k Ω	R16	Thick film resistor 121 k Ω 1/10 W 1% 0402	Yageo	RC0402FR- 07121KL

Board information

25	1	243 kΩ	R17	Thick film resistor 243 kΩ 1/16 W 1% 0402	Yageo	RC0402FR-07243KL
26	2	10k	R5, R18	SMD resistor 10 KΩ 1% 1/16 W 0402	Yageo	AC0402FR-0710KL
27	1	15 kΩ	R6	Thick film resistor 15.0 kΩ 1/16 W 1% 0402	Yageo	RC0402FR-0715KL
28	1	4.99 kΩ	R7	Thick film resistor 4.99 kΩ 1/16 W 1% 0402	Yageo	RC0402FR-074K99L
29	2	953Ω	R9, R10	Thick film resistor 953 Ω 1/10W 1% 0402	Yageo	RC0402FR-07953RL
30	1	0.005 Ω	RS1	Thick film resistor 0.005 Ω 1 W 1% SMD 1632	Delta Electronics	RL1632T4F-R005-FNH
31	4	–	TB1, TB2, TB3, TB4	Terminal screw 6-32 4-pin PCB	Keystone Electronics	7693
32	21	–	TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP13, TP18, TP19, TP20, TP21, TP22, TP23, TP24, TP25	Inboard pin .042" hole 1000/PKG	Vector Electronics	K30C/M
33	1	TDA38812	U1	TDA38812 12 A single-voltage synchronous buck regulator	Infineon	TDA38812

3 Evaluation board test results

3.1 Typical efficiency and power loss curves

$V_{IN} = 12\text{ V}$, $V_{CC} = \text{internal LDO}$, $I_{OUT} = 0\text{ A} - 12\text{ A}$, $F_{SW} = 800\text{ kHz}$, room temperature, natural convection. Note that the efficiency and power loss curves include losses of the TDA38812, inductor losses, losses of the input and output capacitors, and PCB trace losses. [Table 4](#) shows the inductors used for each of the output voltages in the efficiency measurement.

Table 4 Inductors for $V_{IN} = 12\text{ V}$, $F_{SW} = 800\text{ kHz}$

V_{OUT} (V)	L_{OUT} (nH)	P/N	DCR (m Ω)	Size (mm)
1.0	240 nH	CMLE063T-R24MS	1.19	6.95 x 6.6 x 2.8
3.3	820 nH	CMLE063T-R82MS	4.7	7.25 x 6.6 x 2.8
5.0	1000 nH	CMLE063T-1R0MS	5.6	7.25 x 6.6 x 2.8

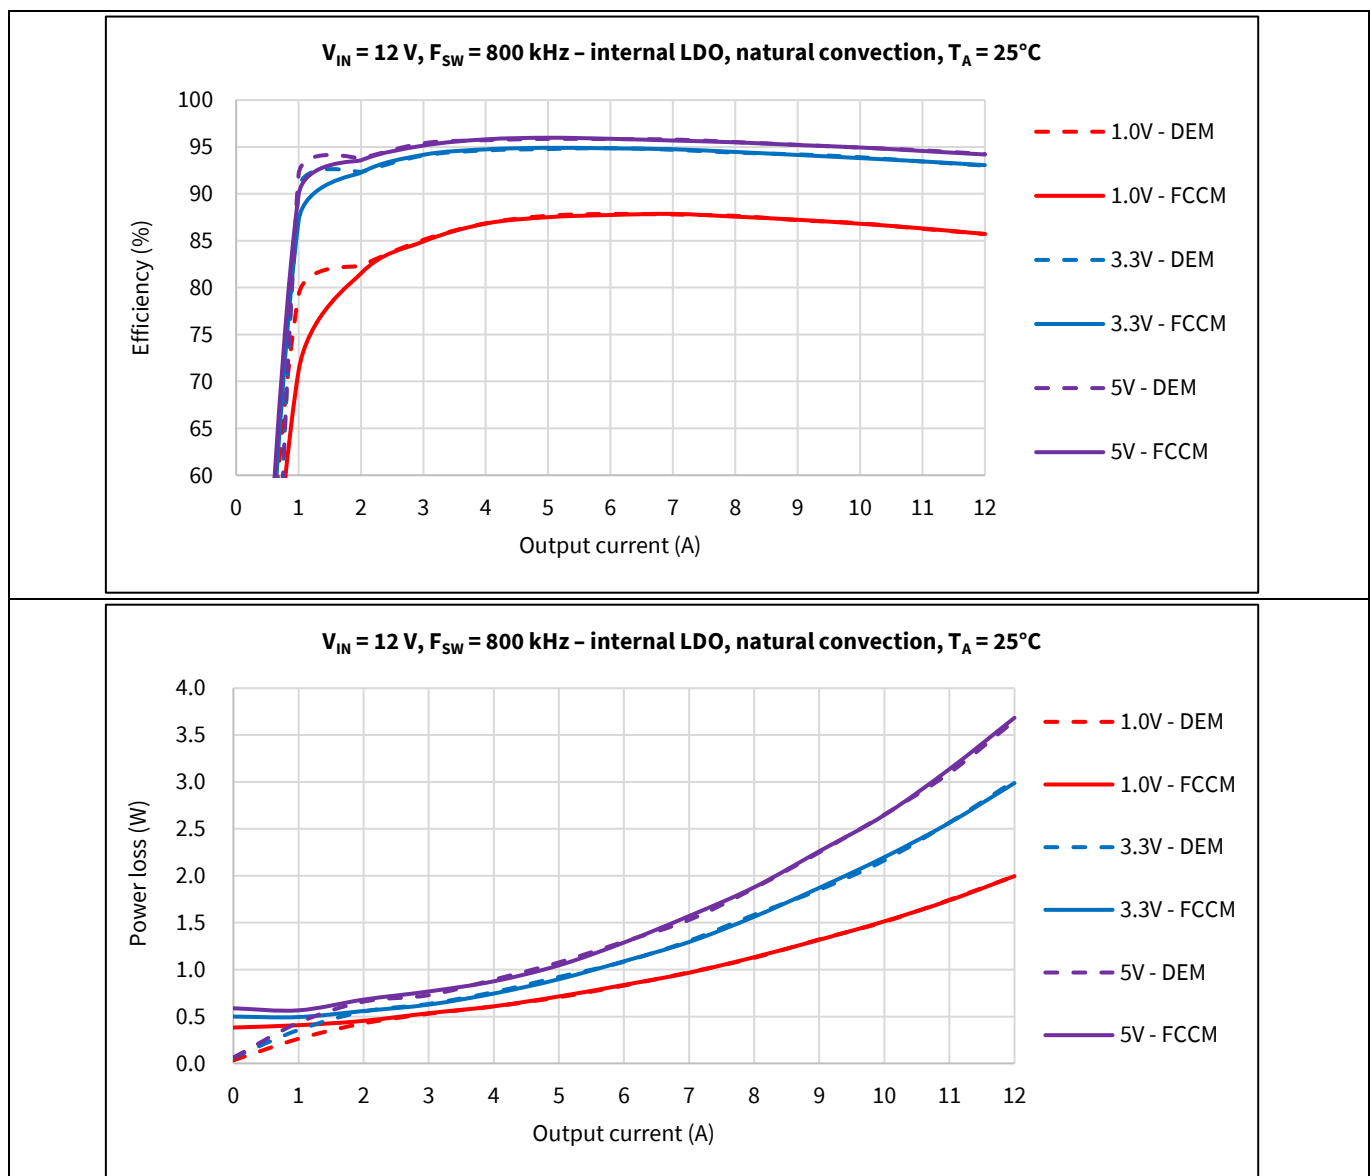


Figure 9 Efficiency and power loss

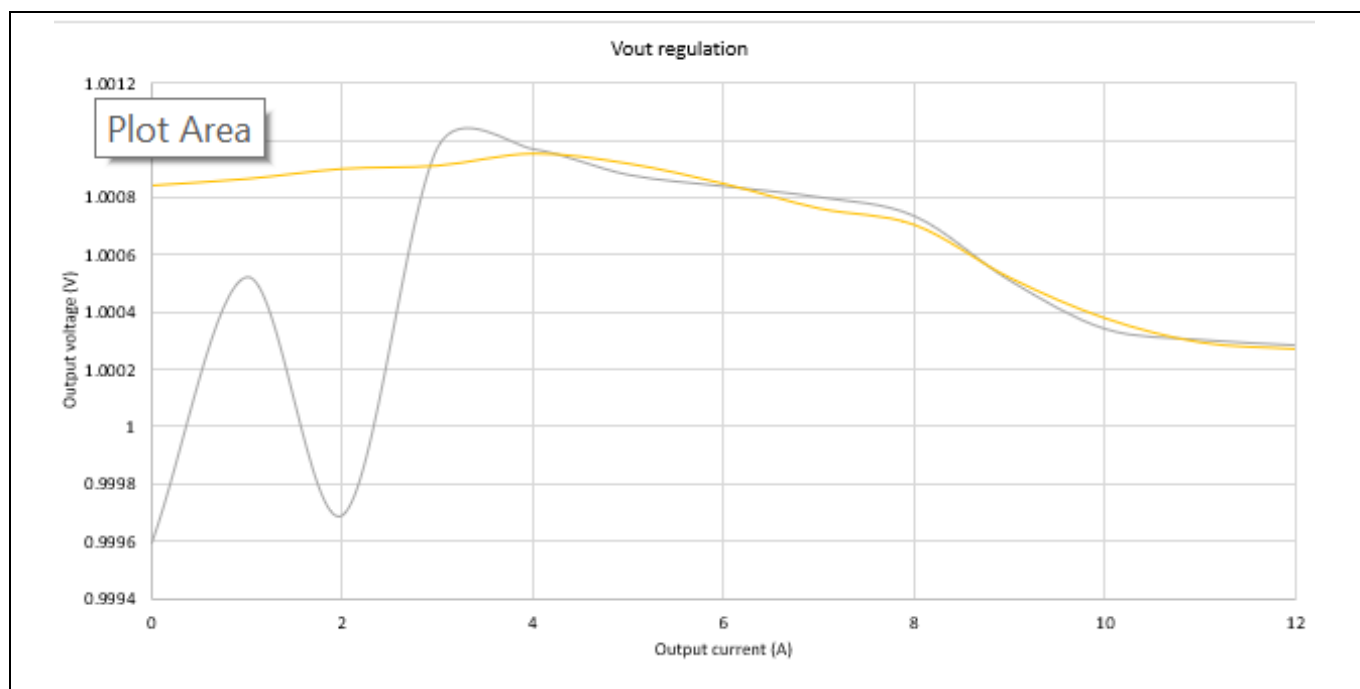


Figure 10 Output voltage regulation

3.2 Typical operating waveforms

$PV_{IN} = V_{IN} = 12.0\text{ V}$, $V_{OUT} = 1\text{ V}$, $I_{OUT} = 12\text{ A}$, $F_{SW} = 800\text{ kHz}$, room temperature, no air flow

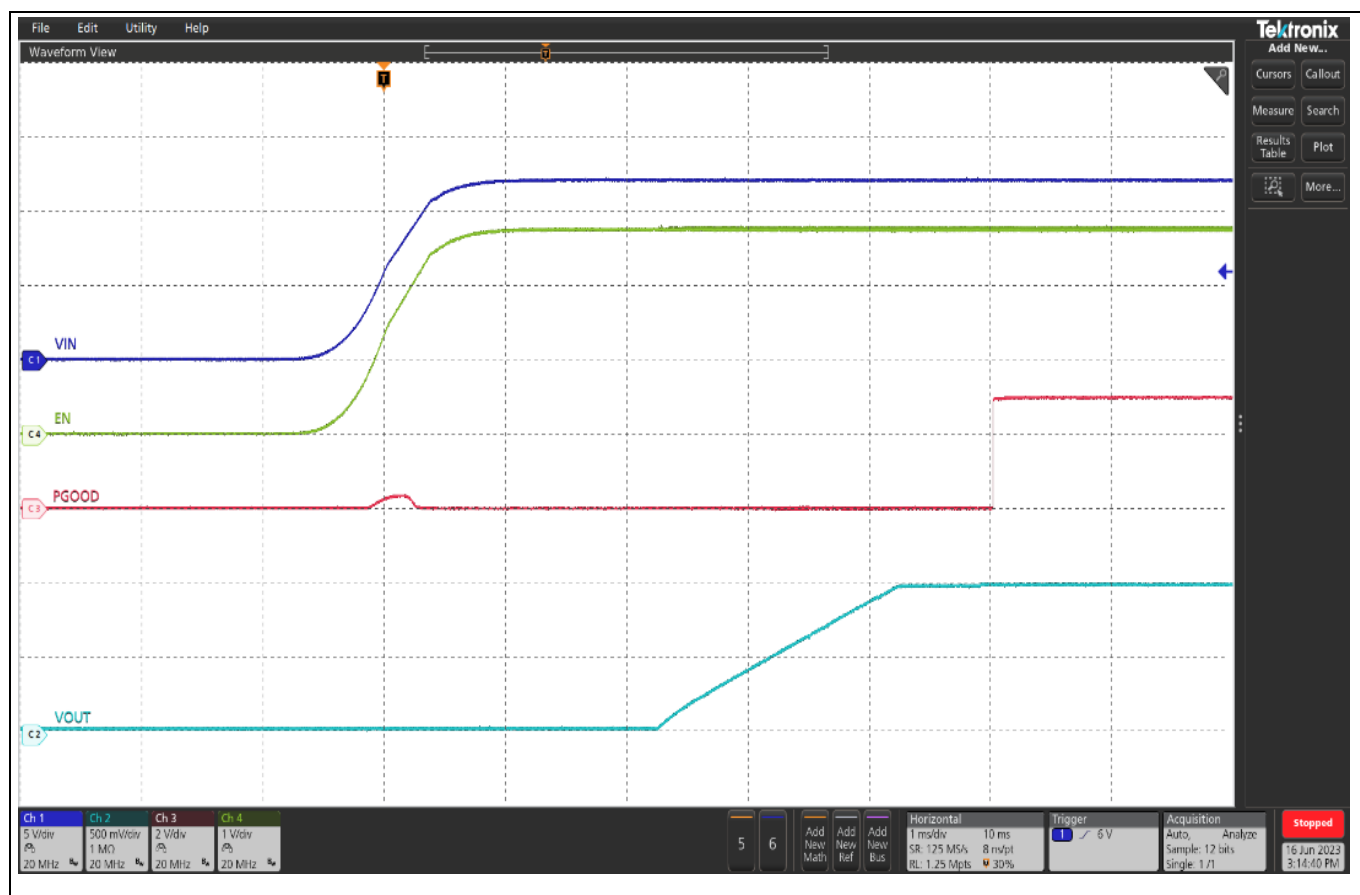


Figure 11 Start-up at 12 A load, (Ch1: V_{IN} , Ch2: V_{OUT} , Ch3: P_{GOOD} , Ch4: enable)

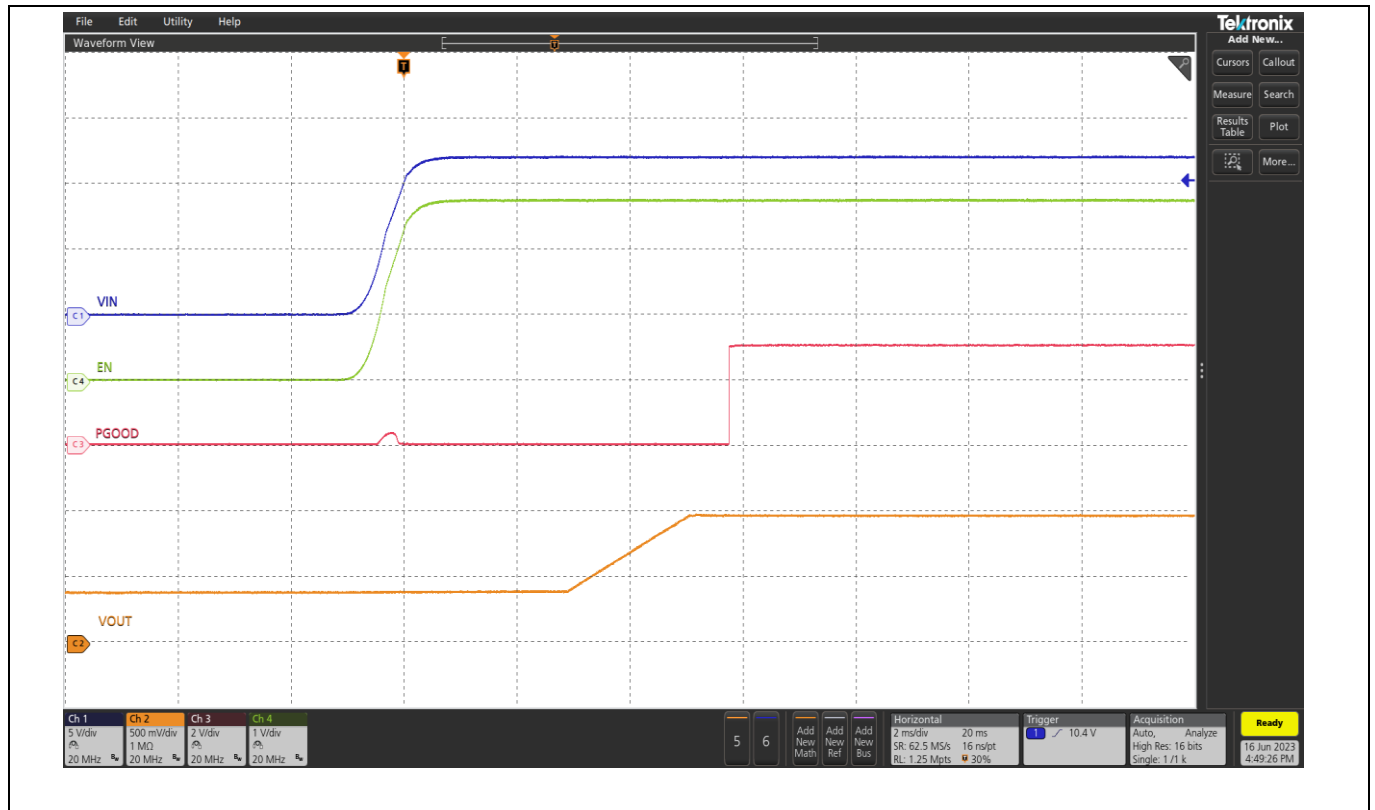


Figure 12 Pre-bias start-up at 0 A load, (Ch1: V_{IN} , Ch2: V_{OUT} , Ch3: P_{GOOD} , Ch4: enable)

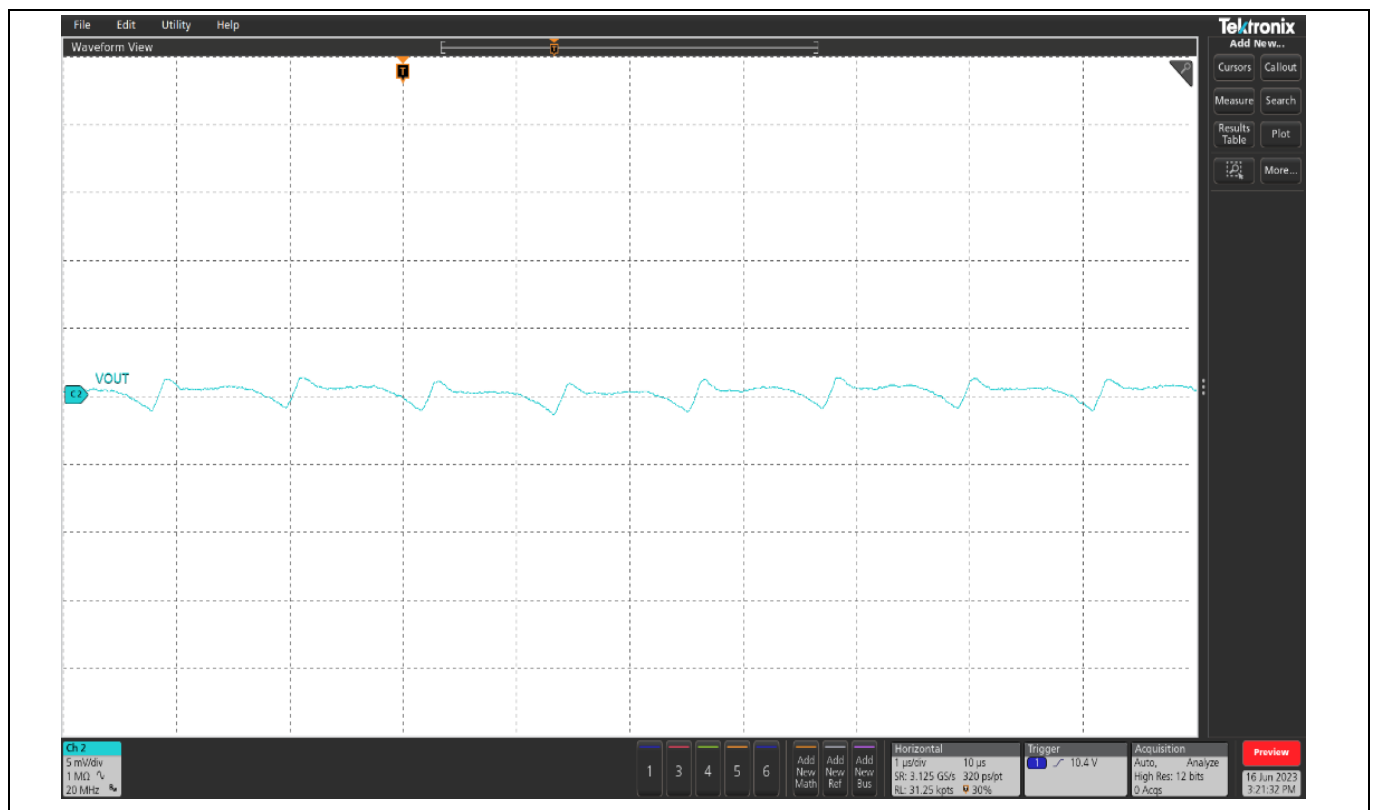


Figure 13 V_{OUT} ripple at 12 A load, $F_{SW} = 800$ kHz, (Ch2: V_{OUT})

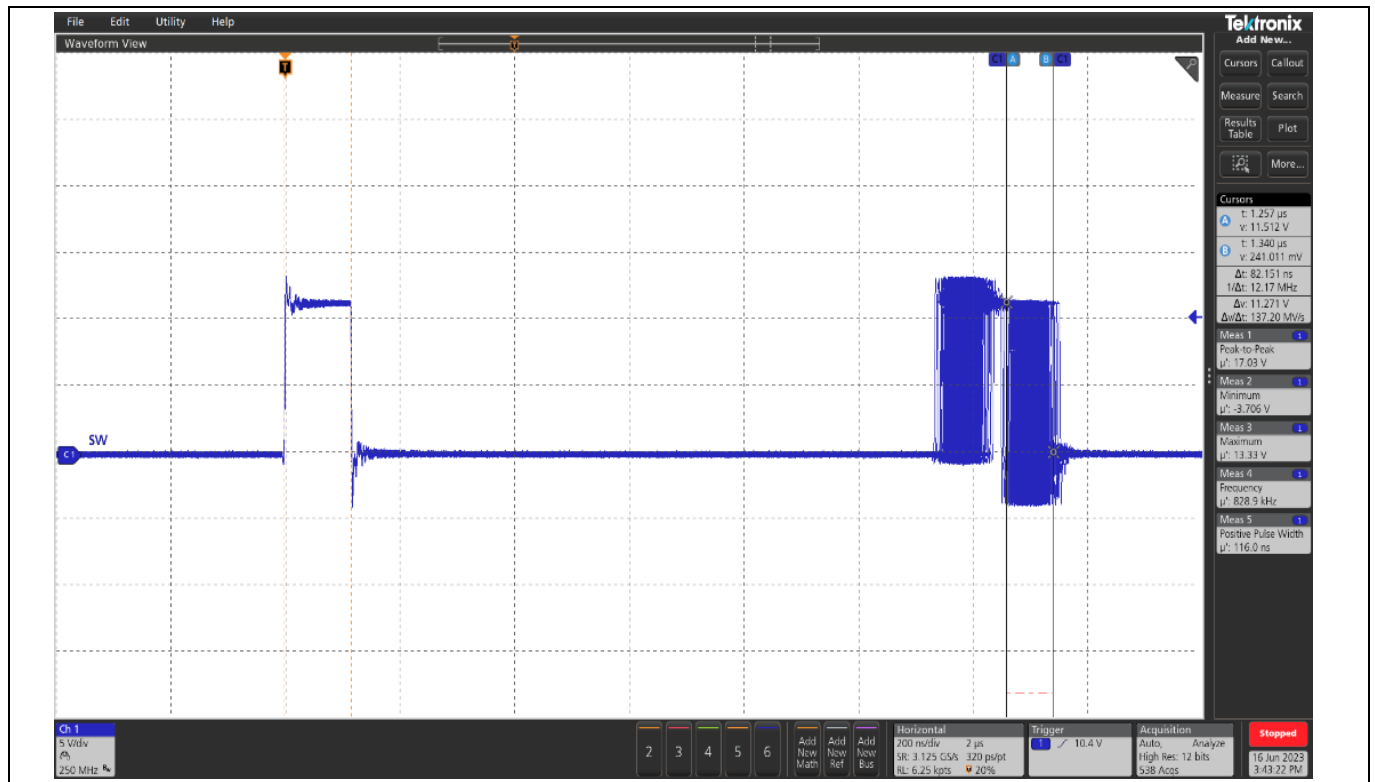


Figure 14 SW node jitter, 12 A load, $F_{SW} = 800$ kHz

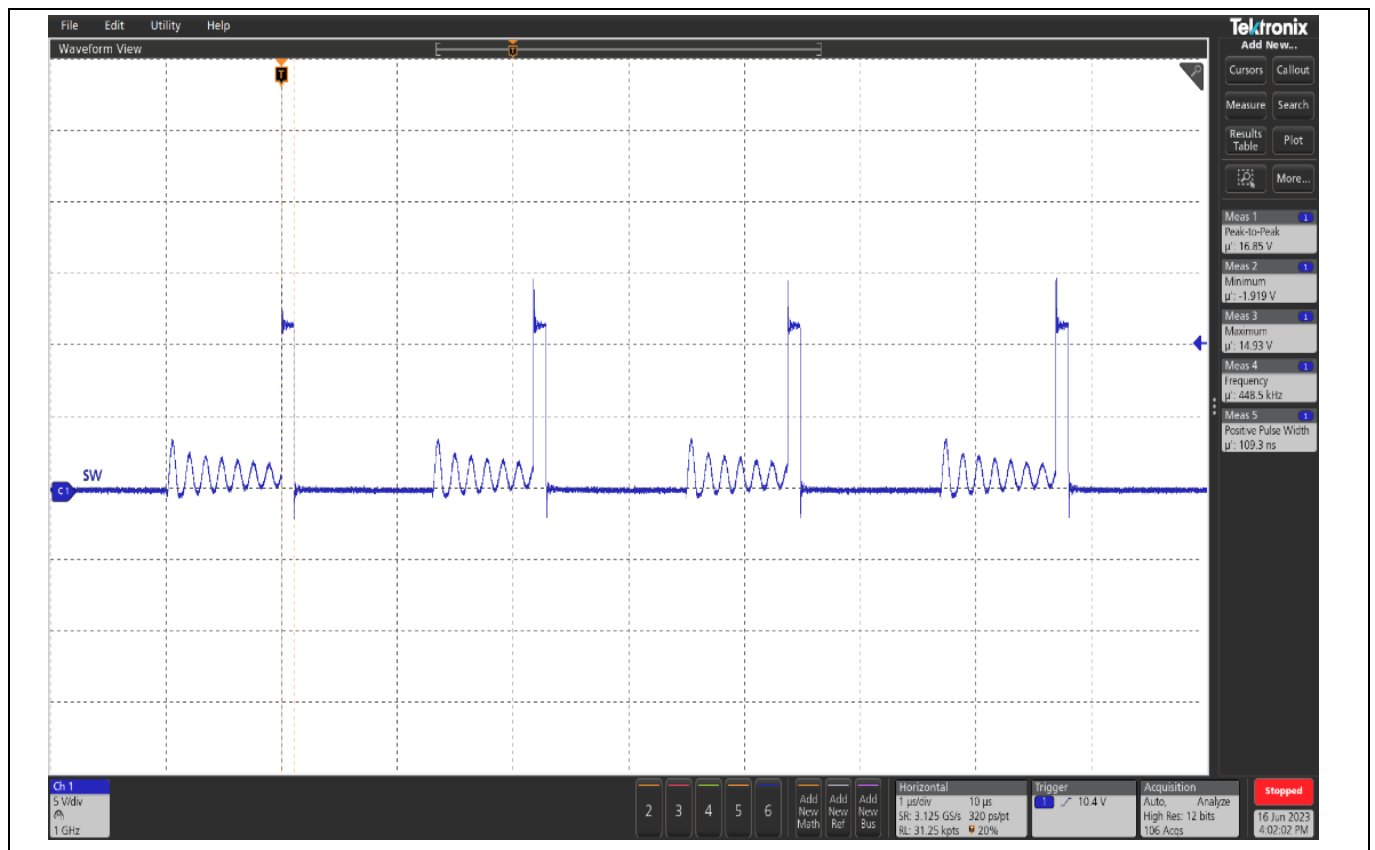


Figure 15 SW node (in DEM), 1 A load

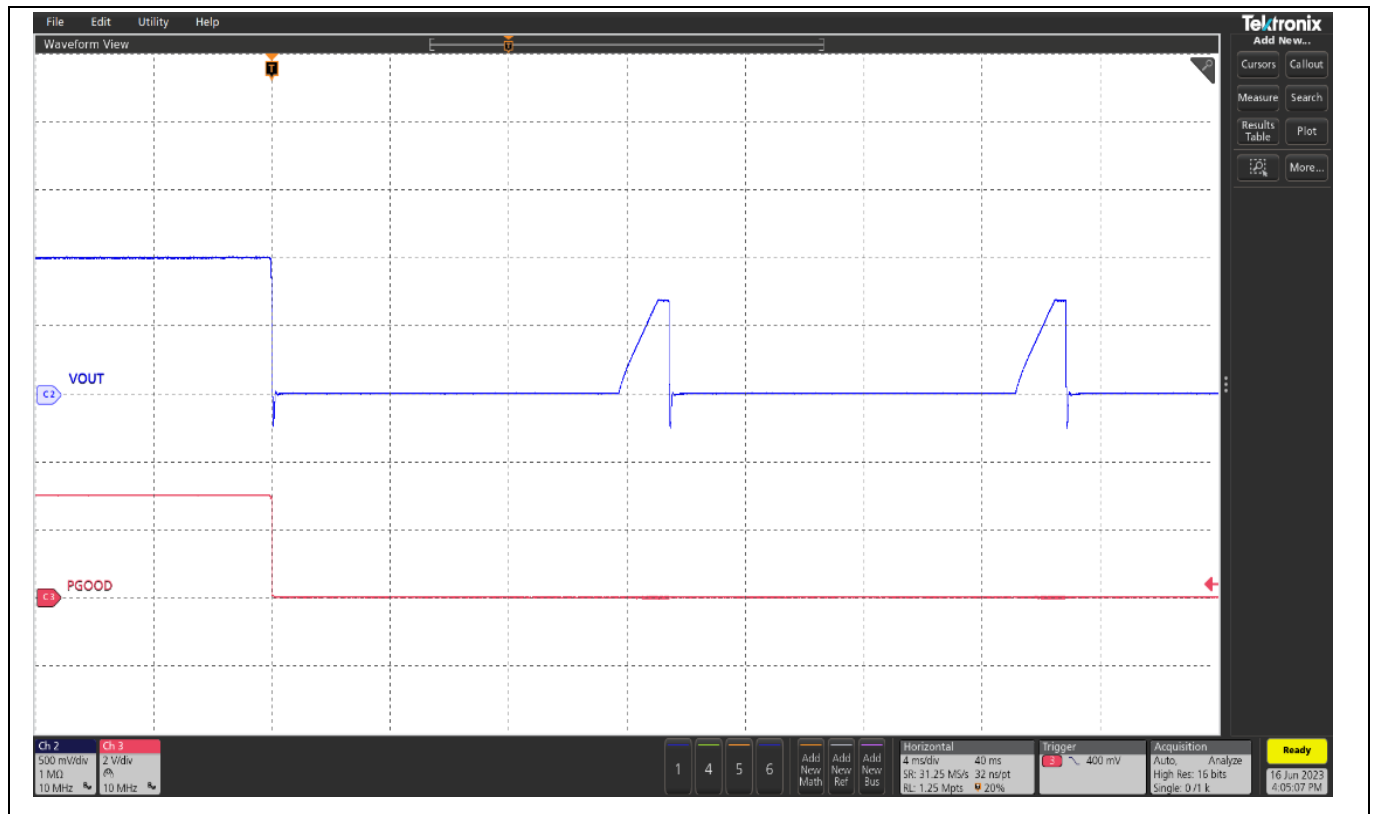


Figure 16 Short-circuit and UVP (hiccup), (Ch2: V_{OUT}, Ch3: P_{GOOD})

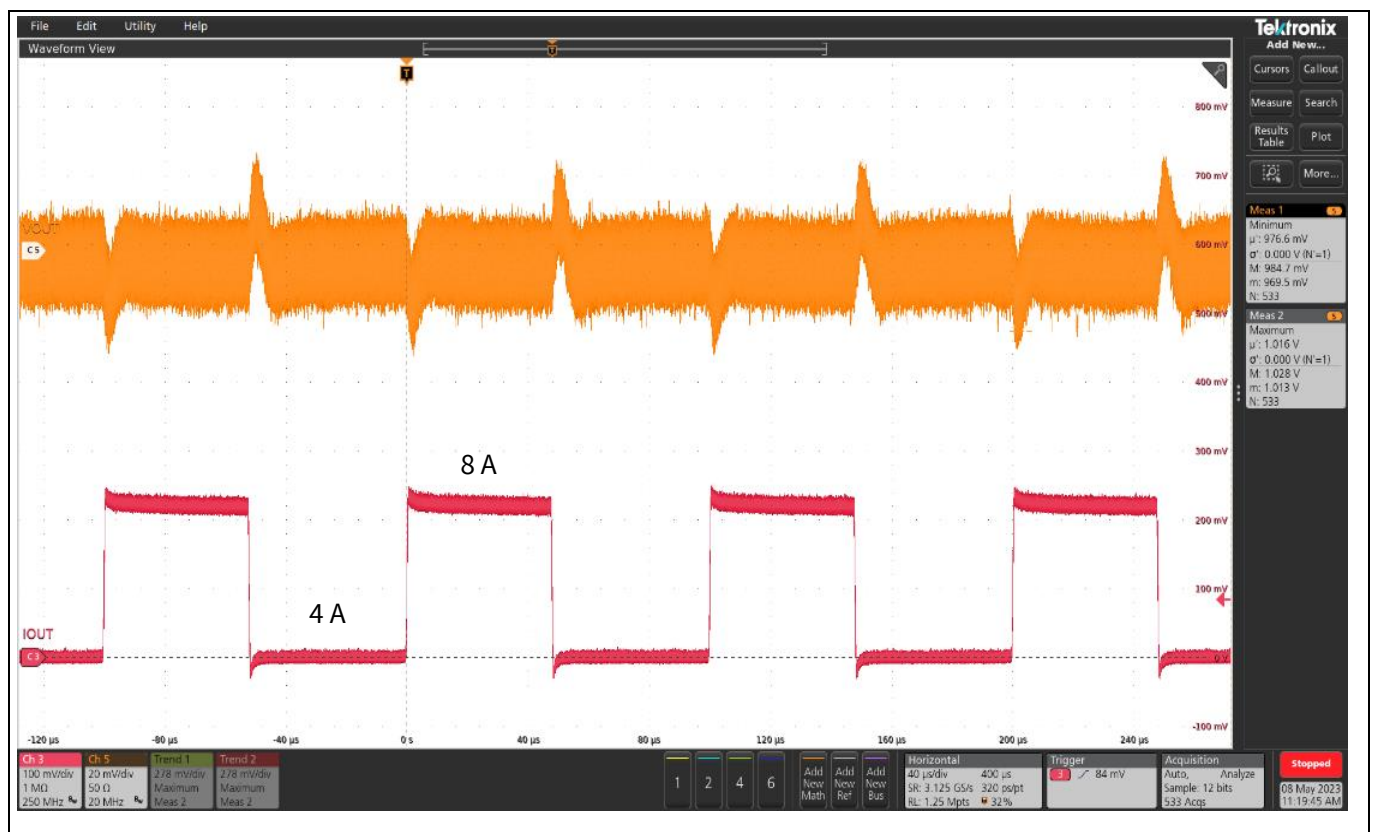
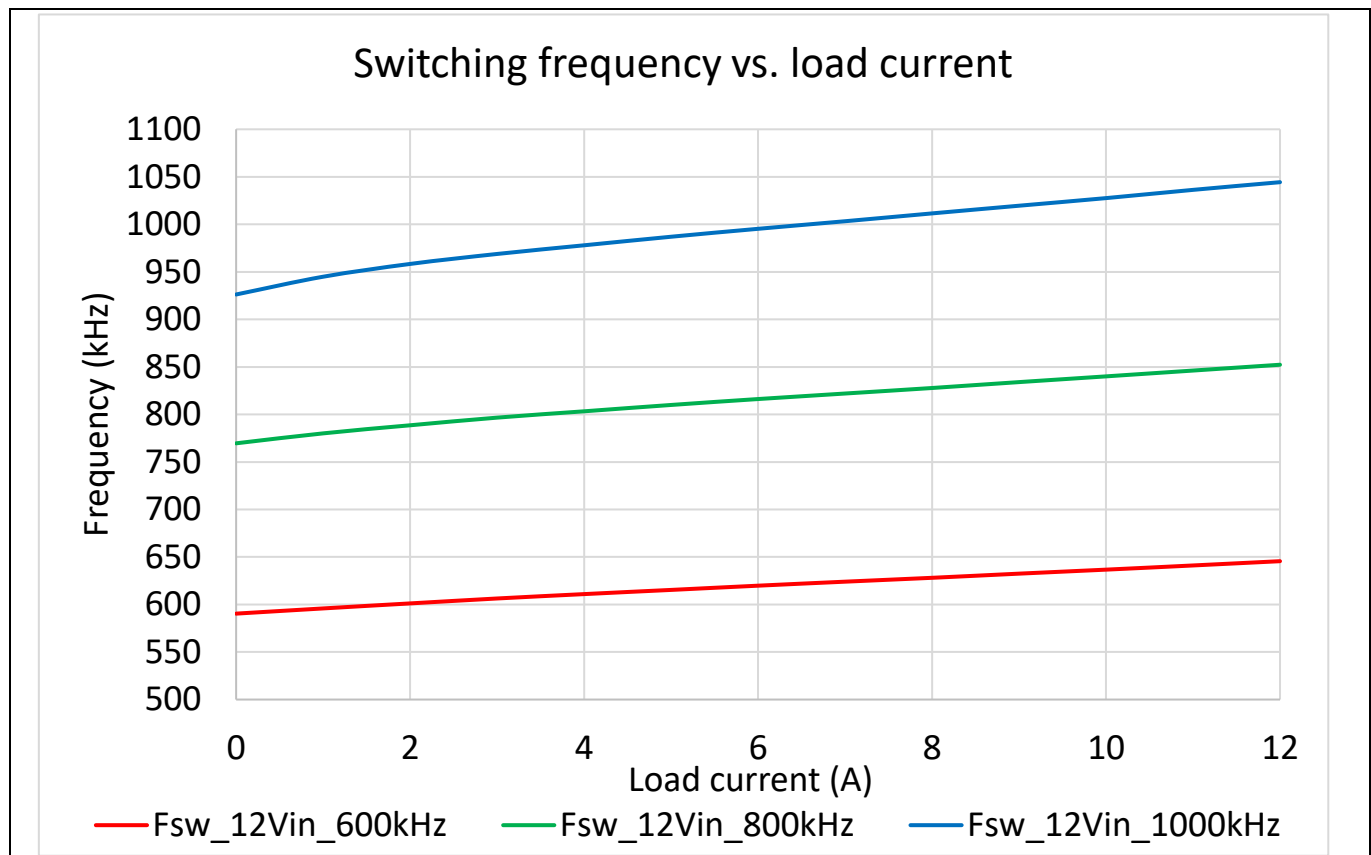
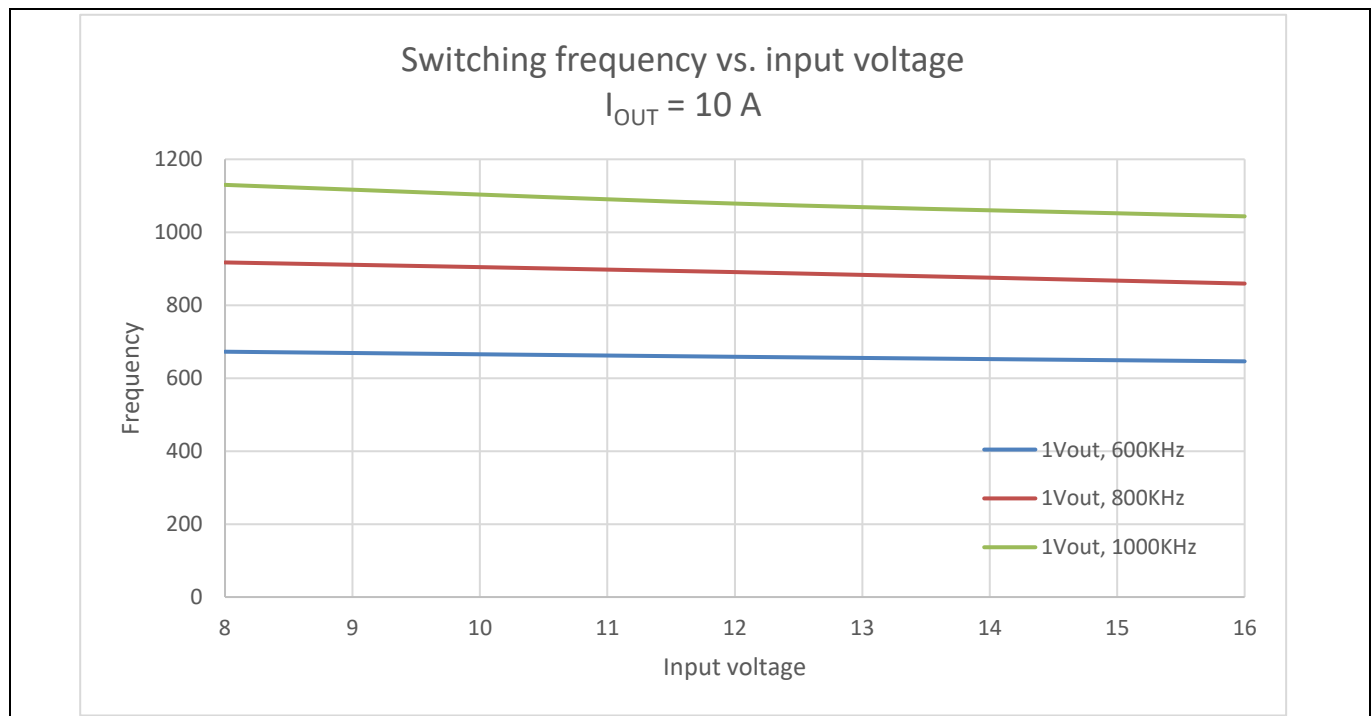


Figure 17 Transient response at 4 A step load current at 10 A/μs slew rate: I_{OUT} = 4 A – 8 A, (Ch5: V_{OUT}, Ch3: I_{OUT}), pk-pk: 39.4 mV, F_{SW} = 800 kHz

**Figure 18** Switching frequency vs. load current**Figure 19** Switching frequency vs. input voltage

3.3 TDA38812 thermal images with no air flow and 25°C ambient

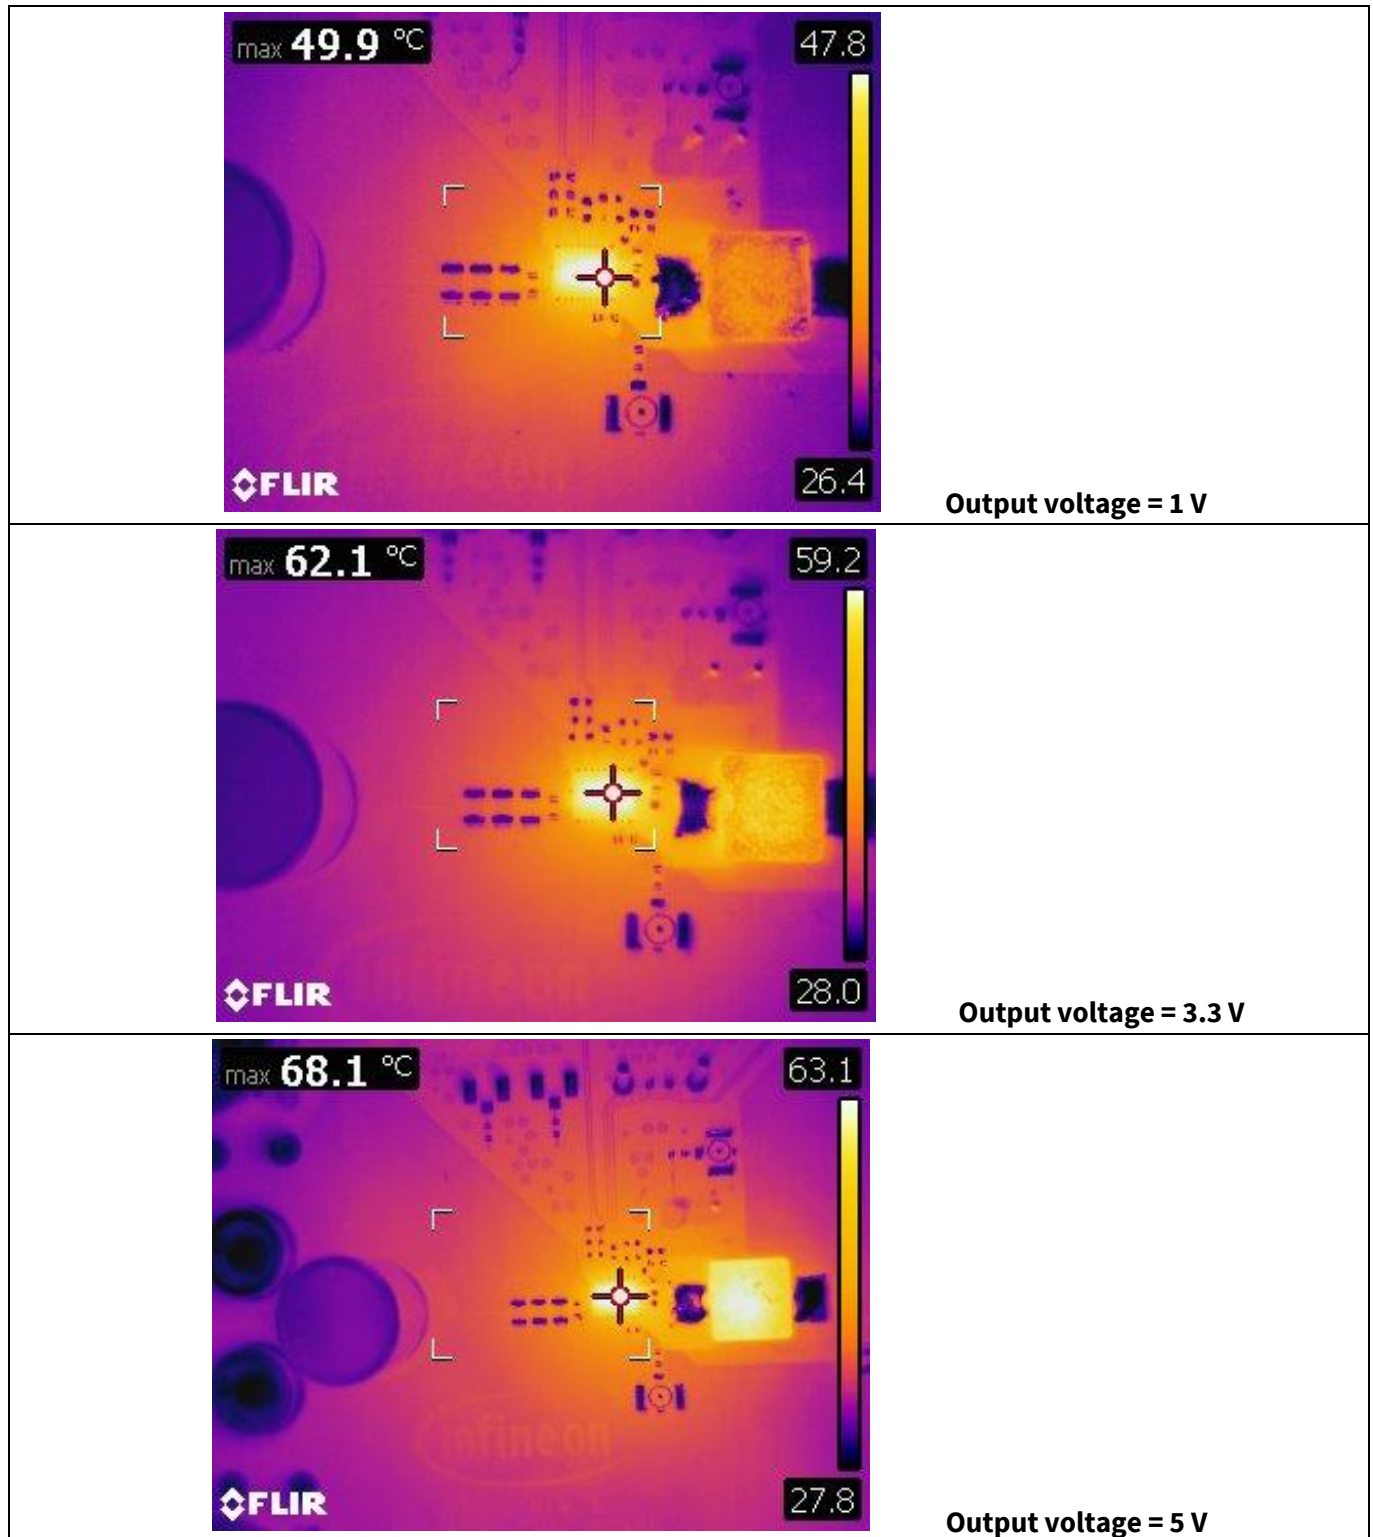


Figure 20 Thermal performance of TDA38812 for 1 V, 3.3 V and 5 V output voltages, 12 A load, FCCM mode, 800 kHz switching frequency, 12 V V_{IN}

Revision history

Document version	Date of release	Description of changes
V 1.0	2023-07-21	Initial release

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2023-07-21

Published by

Infineon Technologies AG

81726 Munich, Germany

**© 2023 Infineon Technologies AG.
All Rights Reserved.**

**Do you have a question about this
document?**

Email: erratum@infineon.com

Document reference

UM_2307_PL12_2307_172957

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[EVALTDA388121VOUTTOBO1](#)