

OPTIREG™ linear voltage regulator TLS850A4TEV50

Ultra low quiescent current linear voltage regulator



Order now



Technical documents



Simulation



Family overview




Support



RoHS

Features

- Ultra low quiescent current, typically 4.3 μ A at light loads
- Wide input voltage range from 3.7 V to 40 V
- Output voltage 5 V
- Output voltage accuracy $\pm 2\%$
- Output current capability up to 500 mA
- Low dropout voltage, typically 190 mV, at output current below 100 mA
- Stable with ceramic output capacitor of 4.7 μ F
- Overtemperature shutdown
- Output current limitation
- Wide temperature range
- Green Product (RoHS compliant)



Potential applications

- Automotive supply systems or other supply systems that are connected to the battery permanently
- Automotive systems that need to operate in cranking condition
- General automotive applications

Product validation

Qualified for automotive applications. Product validation according to AEC-Q100.

Description

The OPTIREG™ linear voltage regulator TLS850A4TEV50 is a linear voltage regulator with high performance, low dropout voltage and ultra low quiescent current. With only 4.3 μ A typical quiescent current at light load and an input voltage range of 3.7 V to 40 V the device is perfectly suitable for automotive supply systems or other supply systems that are permanently connected to the battery.

The loop concept combines fast regulation and very high stability while requiring only one small ceramic capacitor of 4.7 μ F at the output. The operating range starts at an input voltage of 3.7 V (extended operating range). This makes the device suitable for automotive systems that need to operate in cranking condition.

Internal protection features, such as output current limitation and overtemperature shutdown, are designed to protect the device from immediate damage caused by failures such as

- output shorted to GND
- overcurrent condition
- overtemperature condition

OPTIREG™ linear voltage regulator TLS850A4TEV50

Ultra low quiescent current linear voltage regulator



Description

The thermally conductive package enables sustained operation despite significant dissipation across the device.

Type	Package	Marking
TLS850A4TEV50	PG-TO252-3	850A4V5

Table of contents

	Features	1
	Potential applications	1
	Product validation	1
	Description	1
	Table of contents	3
1	Block diagram	4
2	Pin configuration	5
2.1	Pin assignment	5
2.2	Pin definitions and functions	5
3	General product characteristics	6
3.1	Absolut maximum ratings	6
3.2	Functional range	7
3.3	Thermal resistance	8
4	Voltage regulation	9
4.1	Functional description voltage regulation	9
4.2	Electrical characteristics voltage regulation	11
4.3	Typical performance characteristics voltage regulation	12
5	Current consumption	15
5.1	Electrical characteristics current consumption	15
5.2	Typical performance characteristics current consumption	16
6	Application information	17
6.1	Application diagram	17
6.2	Selection of external components	17
6.2.1	Input pin	17
6.2.2	Output pin	17
6.3	Thermal considerations	18
6.4	Reverse polarity protection	18
6.5	Further application information	18
7	Package information	19
8	Revision history	20
	Disclaimer	21

1 Block diagram

1 Block diagram

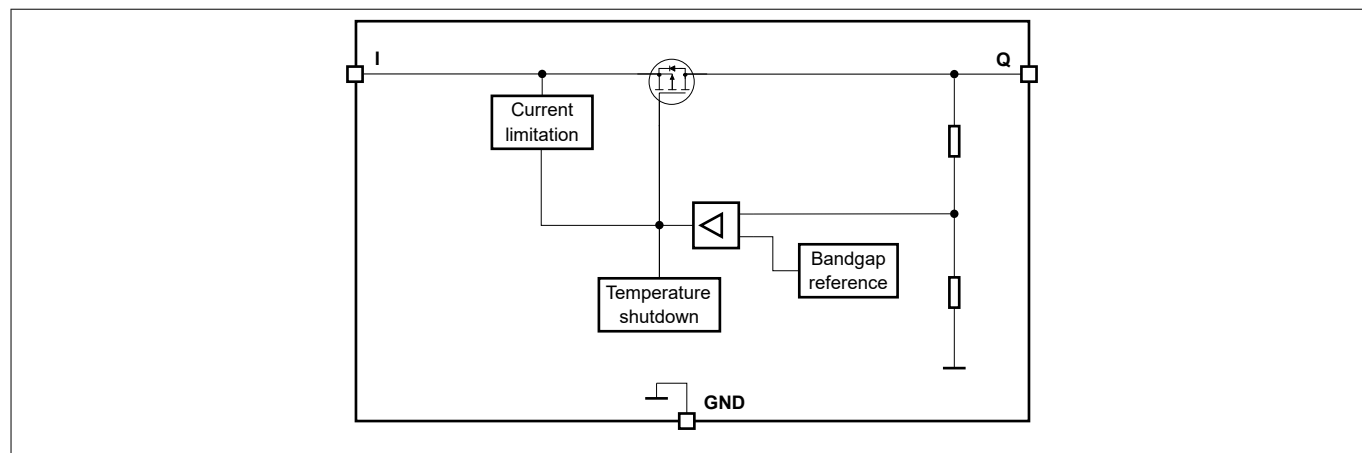


Figure 1 **Block diagram**

2 Pin configuration

2 Pin configuration

2.1 Pin assignment

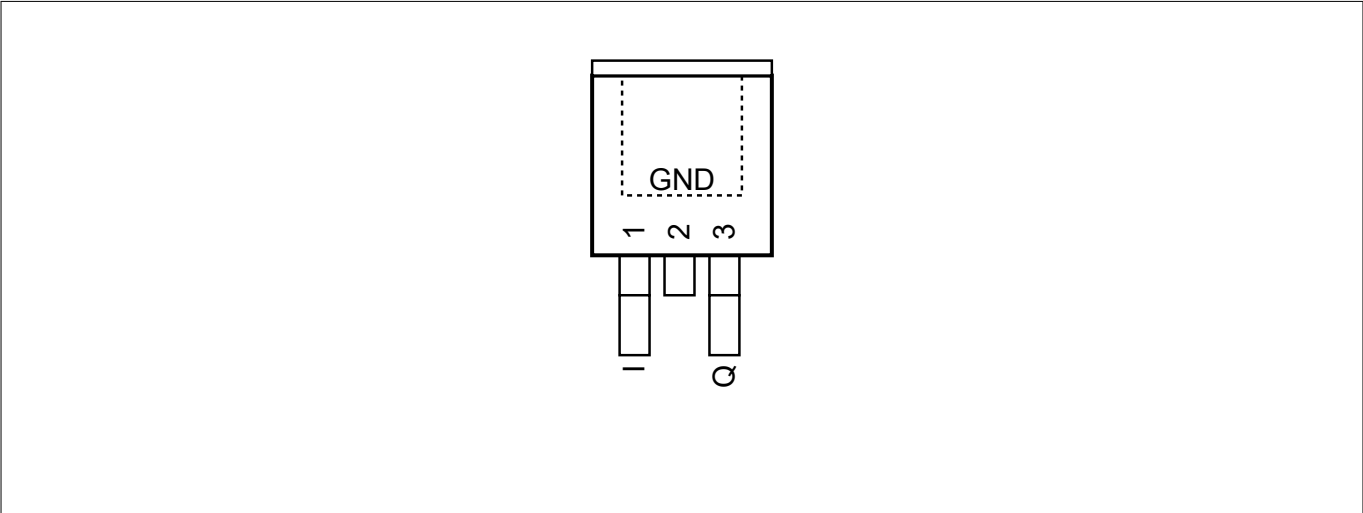


Figure 2 Pin assignment

2.2 Pin definitions and functions

Table 1 Pin definitions and functions

Pin	Symbol	Function
1	I	Input It is recommended to place a small ceramic capacitor to GND, close to the pins, in order to compensate line influences.
2	GND	Ground
3	Q	Output voltage Connect output capacitor C_Q to GND close to the pin, respecting the values specified for its capacitance and ESR in Table 3 .
Heat slug	GND	Heat slug Connect to heatsink area; Connect to GND

3 General product characteristics

3 General product characteristics

3.1 Absolut maximum ratings

Table 2 Absolute maximum ratings

$T_j = -40^{\circ}\text{C}$ to $+150^{\circ}\text{C}$; all voltages with respect to ground (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Voltage on input I	V_I	-0.3	–	45	V	¹⁾	PRQ-35
Voltage on output Q	V_Q	-0.3	–	7	V	¹⁾	PRQ-36
Junction temperature	T_j	-40	–	150	$^{\circ}\text{C}$	¹⁾	PRQ-39
Storage temperature	T_{stg}	-55	–	150	$^{\circ}\text{C}$	¹⁾	PRQ-40

ESD robustness

ESD robustness all pins (HBM)	$V_{\text{ESD_HBM}}$	-2	–	2	kV	¹⁾ ²⁾	PRQ-41
ESD robustness all pins (CDM)	$V_{\text{ESD_CDM}}$	-750	–	750	V	¹⁾ ³⁾	PRQ-194

1) Not subject to production test, specified by design.

2) Human body model (HBM) robustness according to AEC-Q100-002.

3) Charged device model (CDM) robustness according to AEC-Q100-011 Rev-D; voltage level refers to test condition (TC) mentioned in the standard.

Note: Stresses above the ones listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods of time may affect device reliability. Integrated protection functions are designed to prevent IC destruction under fault conditions described in the datasheet. Fault conditions are considered as outside the normal operating range. Protection functions are not designed for continuous repetitive operation.

3 General product characteristics

3.2 Functional range

Table 3 Functional range

$T_j = -40^{\circ}\text{C}$ to $+150^{\circ}\text{C}$; all voltages with respect to ground (unless otherwise specified)

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Input voltage range	V_I	$V_{Q,nom} + V_{dr}$	–	40	V	1)	PRQ-43
Extended input voltage range	$V_{I,ext}$	3.7	–	40	V	2)	PRQ-203
Capacitance of output capacitor for stability	C_Q	4.7	–	–	μF	3) 4)	PRQ-201
Equivalent series resistance of output capacitor	ESR_{CQ}	–	–	40	Ω	3)	PRQ-46
Junction temperature	T_j	-40	–	150	$^{\circ}\text{C}$	–	PRQ-47

1) Output current is limited internally and depends on the input voltage, see electrical characteristics for more details.

2) If $V_{I,ext,min} \leq V_I \leq V_{Q,nom} + V_{dr}$, then $V_Q = V_I - V_{dr}$. If $V_I < V_{I,ext,min}$, then V_Q can drop to 0 V.

3) Not subject to production test, specified by design.

4) The minimum output capacitance requirement is applicable for a worst case capacitance tolerance of 30%.

Note: Within the functional range, the IC operates as described in the circuit description. The electrical characteristics are specified within the conditions given in the electrical characteristics table.

3 General product characteristics

3.3 Thermal resistance

Table 4 Thermal resistance

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Junction to case	R_{thJC}	–	4	–	K/W	¹⁾	PRQ-210
Junction to ambient	R_{thJA}	–	28	–	K/W	¹⁾ ²⁾ 2s2p board	PRQ-212
Junction to ambient	R_{thJA}	–	123	–	K/W	¹⁾ ³⁾ 1s0p board, footprint only	PRQ-213
Junction to ambient	R_{thJA}	–	58	–	K/W	¹⁾ ³⁾ 1s0p board, 300 mm ² heatsink area on PCB	PRQ-214
Junction to ambient	R_{thJA}	–	46	–	K/W	¹⁾ ³⁾ 1s0p board, 600 mm ² heatsink area on PCB	PRQ-215

1) Not subject to production test, specified by design.

2) Specified R_{thJA} value is according to JEDEC JESD51-2,-5,-7 at natural convection on FR4 2s2p board; the product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with two inner copper layers (2 × 70 μm Cu, 2 × 35 μm Cu). Where applicable, a thermal via array next to the package contacted the first inner copper layer.

3) Specified R_{thJA} value is according to JEDEC JESD51-3 at natural convection on FR4 1s0p board; the product (chip and package) was simulated on a 76.2 × 114.3 × 1.5 mm³ board with one copper layer (1 × 70 μm Cu).

Note: This thermal data was generated in accordance with JEDEC JESD51 standards. For more information visit www.jedec.org.

4 Voltage regulation

4 Voltage regulation

4.1 Functional description voltage regulation

The output voltage V_O is internally divided by a resistor network. The device compares this fractional voltage to an internal voltage reference and drives the pass transistor accordingly.

The control loop stability depends on the following factors:

- output capacitor C_O
- load current
- chip temperature
- internal circuit design

Output capacitor

To ensure stable operation, the capacitance of the output capacitor and its equivalent series resistor (ESR) requirements as specified in [Table 3](#) must be maintained. The output capacitor must be sized according to the requirements of the application to be able to buffer load steps.

Input capacitors, reverse polarity protection diode

An input capacitor C_I is recommended to compensate for line influences.

In order to block influences such as pulses and high frequency distortion at the input, an additional reverse polarity protection diode and a combination of several capacitors for filtering should be used. Connect the capacitors close to the component's terminals.

Smooth ramp-up

In order to prevent overshoots during startup, a smooth ramp-up function is implemented. This ensures a reduced output voltage overshoot during startup, mostly independent from load and output capacitance.

Output current limitation

If the load current exceeds the specified limit, due to a short-circuit for example, then the device limits the output current and the output voltage decreases.

Overtemperature shutdown

The overtemperature shutdown circuit prevents the device from immediate destruction by switching off the power stage in the case of a fault condition, which could occur due to a permanent short-circuit at the output, for example. After the device cools down, the regulator restarts. This leads to an oscillatory behavior of the output voltage until the fault condition is removed.

However, any junction temperature above the maximum junction temperature T_J is outside the maximum ratings and therefore significantly reduces the lifetime of the device.

4 Voltage regulation

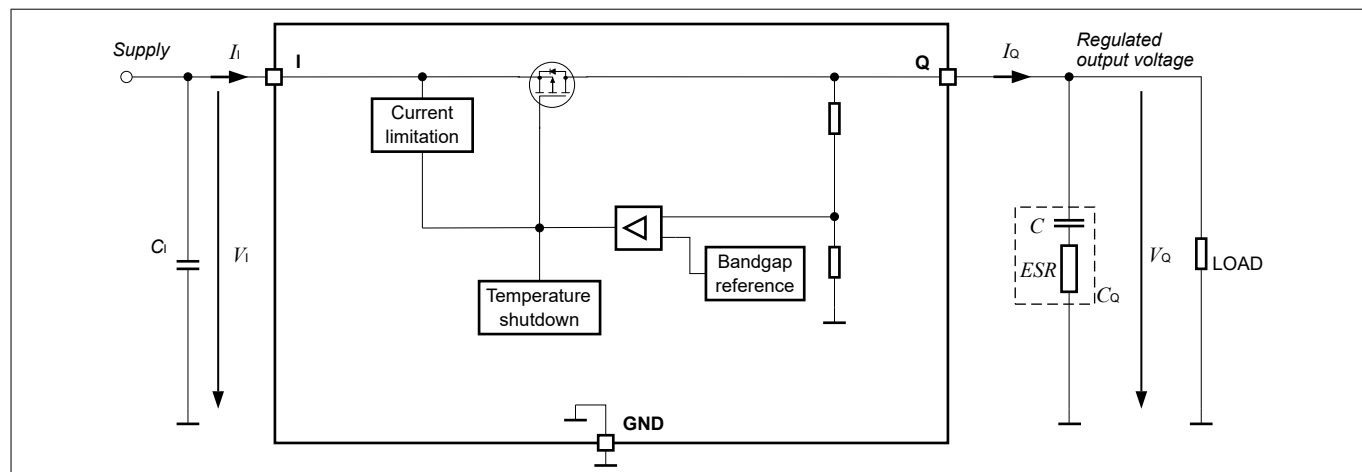


Figure 3 Voltage regulation

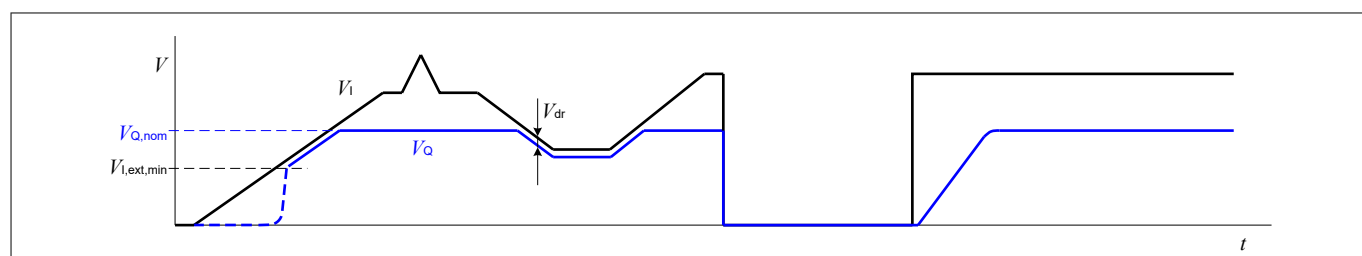


Figure 4 Output voltage versus input voltage

4 Voltage regulation

4.2 Electrical characteristics voltage regulation

Table 5 Electrical characteristics voltage regulation

$T_j = -40\text{ °C}$ to $+150\text{ °C}$, $V_I = 13.5\text{ V}$, all voltages with respect to ground (unless otherwise specified)

Typical values are given at $T_j = 25\text{ °C}$

Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Output voltage accuracy	V_Q	4.9	5.0	5.1	V	$0.05\text{ mA} \leq I_Q \leq 500\text{ mA}$; $7.1\text{ V} \leq V_I \leq 28\text{ V}$	PRQ-48
Output voltage accuracy	V_Q	4.9	5.0	5.1	V	$0.05\text{ mA} \leq I_Q \leq 250\text{ mA}$; $6.0\text{ V} \leq V_I \leq 40\text{ V}$	PRQ-49
Dropout voltage	V_{dr}	–	450	950	mV	¹⁾ $V_{dr} = V_I - V_Q$; $I_Q = 250\text{ mA}$	PRQ-55
Power supply ripple rejection	$PSRR$	–	55	–	dB	²⁾ $f_{\text{ripple}} = 100\text{ Hz}$; $V_{\text{ripple}} = 0.5\text{ V}_{pp}$; $I_Q = 10\text{ mA}$	PRQ-57

Output current limitation

Output current limitation	$I_{Q,max}$	501	750	1100	mA	$0\text{ V} < V_Q < V_{Q,nom} - 0.1\text{ V}$;	PRQ-59
---------------------------	-------------	-----	-----	------	----	---	--------

Line regulation, load regulation

Load regulation steady-state	$\Delta V_{Q,load}$	-30	-5	–	mV	$I_Q = 0.05\text{ mA}$ to 500 mA ; $V_I = 7.5\text{ V}$	PRQ-61
Line regulation steady-state	$\Delta V_{Q,line}$	–	1	10	mV	$V_I = 8\text{ V}$ to 32 V ; $I_Q = 5\text{ mA}$	PRQ-62

Overtemperature shutdown

Overtemperature shutdown threshold	$T_{j,sd}$	151	175	200	°C	²⁾ T_j increasing	PRQ-63
Overtemperature shutdown threshold hysteresis	$T_{j,sdh}$	–	10	–	°C	²⁾ T_j decreasing	PRQ-64


1) Measured when the output voltage V_Q has dropped by 100 mV while input voltage was gradually decreased.

2) Not subject to production test, specified by design.


4 Voltage regulation

4.3 Typical performance characteristics voltage regulation


Output voltage V_Q versus
junction temperature T_j

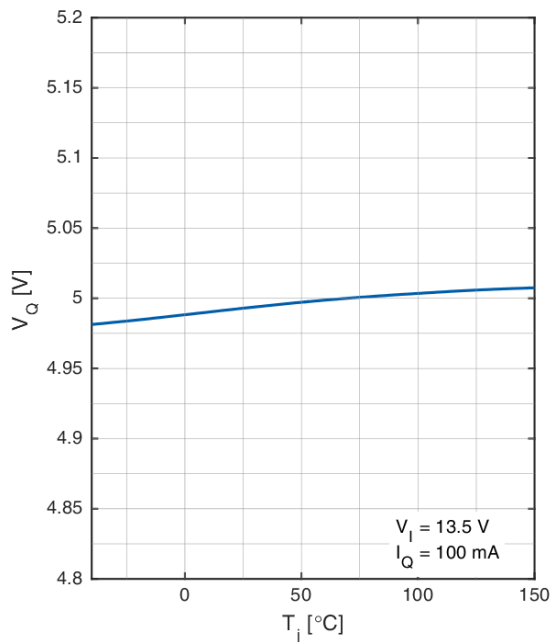


Output voltage V_Q versus
input voltage V_I

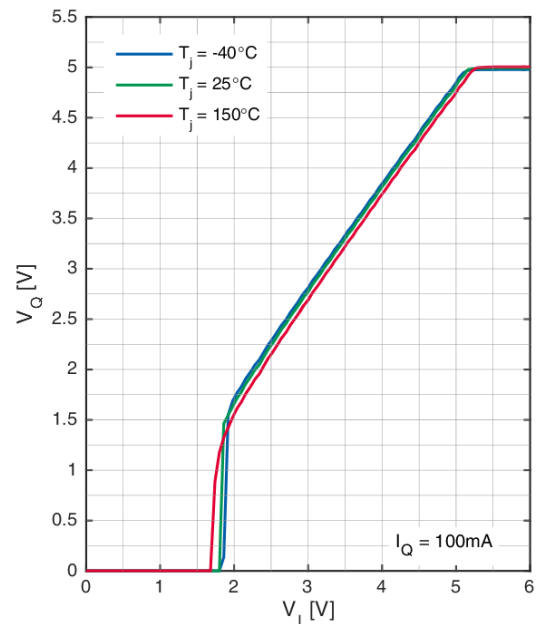

Dropout voltage V_{dr} versus
output current I_Q

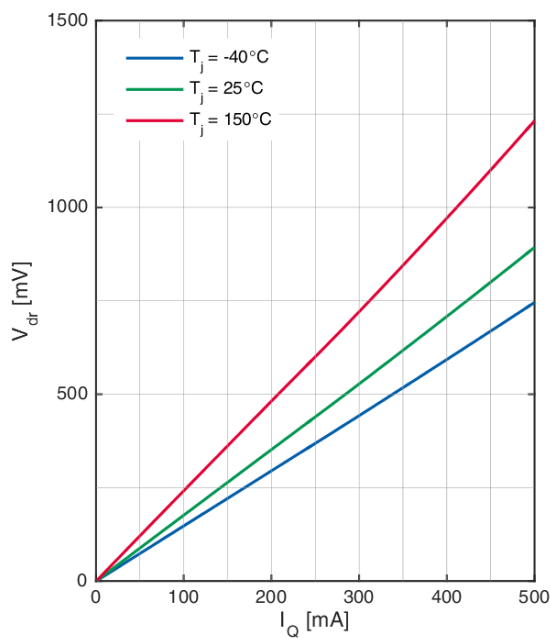


Dropout voltage V_{dr} versus
junction temperature T_j

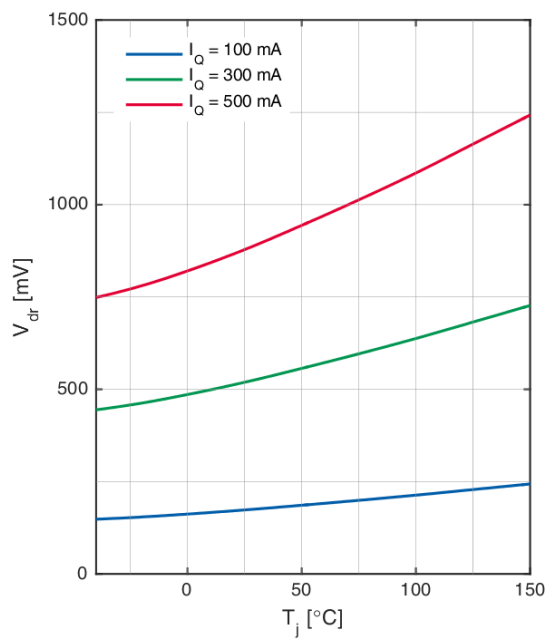


4 Voltage regulation


Line regulation $\Delta V_{Q,line}$ versus
input voltage V_I

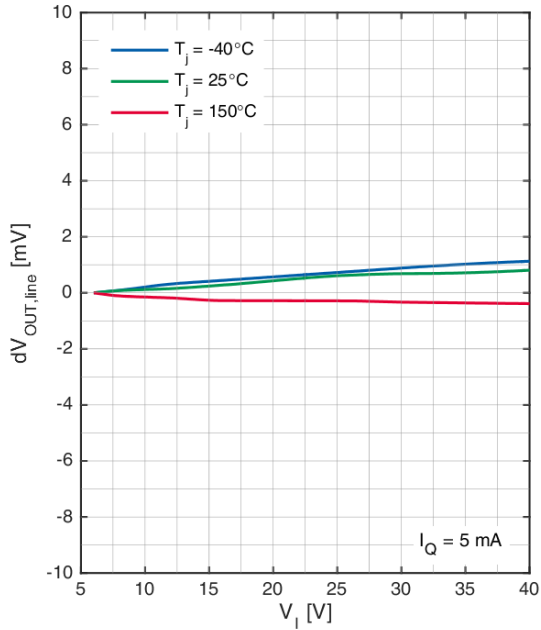


Load regulation $\Delta V_{Q,load}$ versus
output current change ΔI_Q

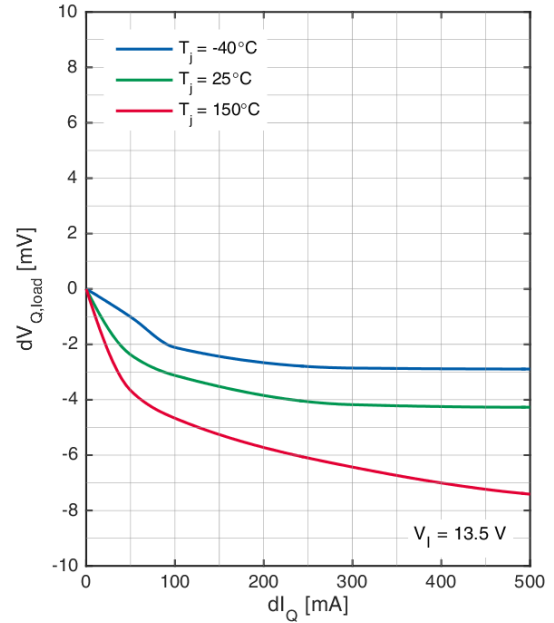

Maximum output current $I_{Q,max}$ versus
input voltage V_I

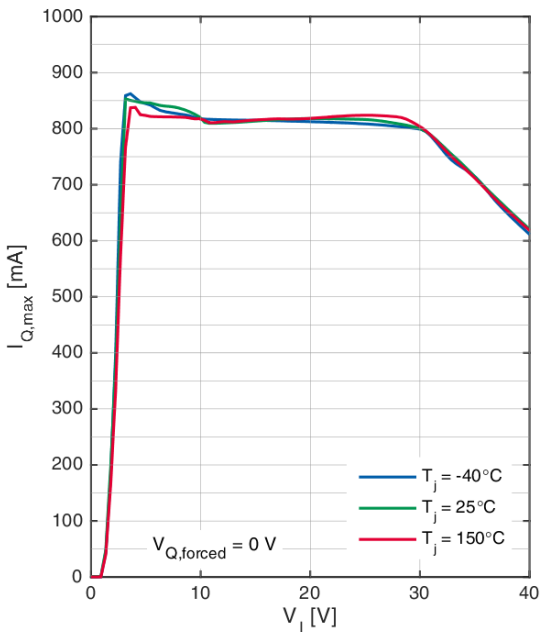


Power supply rejection ratio $PSRR$ versus
ripple frequency f

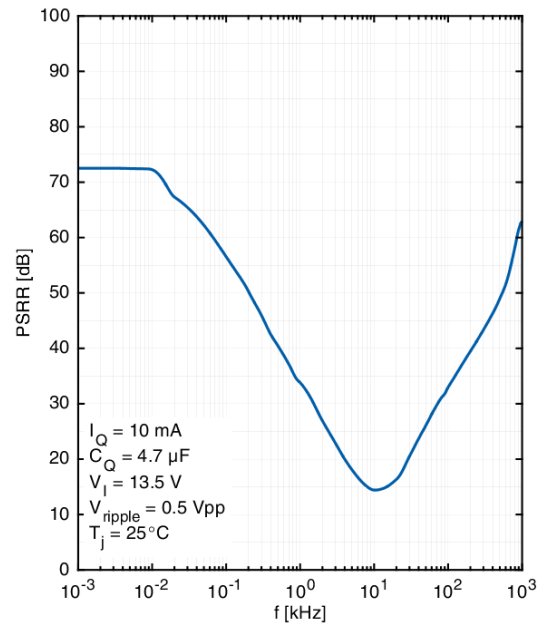

4 Voltage regulation

Equivalent series resistance ESR_{C_Q} versus
output current I_Q

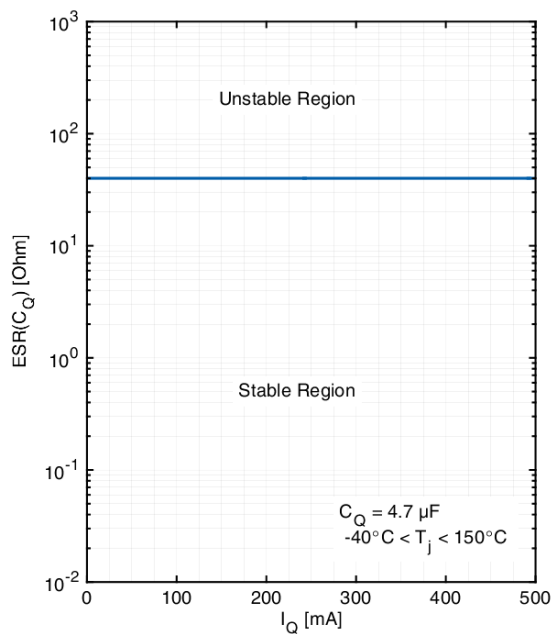

5 Current consumption

5 Current consumption

5.1 Electrical characteristics current consumption

Table 6 Electrical characteristics current consumption

$T_j = -40\text{ °C}$ to $+150\text{ °C}$, $V_I = 13.5\text{ V}$, all voltages with respect to ground (unless otherwise specified)

Typical values are given at $T_j = 25\text{ °C}$


Parameter	Symbol	Values			Unit	Note or condition	P-Number
		Min.	Typ.	Max.			
Current consumption	I_q	–	4.3	8	μA	$I_q = I_I - I_Q$; $I_Q = 0.05\text{ mA}$; $T_j < 125\text{ °C}$	PRQ-66
Current consumption	I_q	–	8	12	μA	$I_q = I_I - I_Q$; $I_Q = 1\text{ mA}$; $T_j < 125\text{ °C}$	PRQ-202
Current consumption	I_q	–	16	21	μA	$I_q = I_I - I_Q$; $I_Q = 10\text{ mA}$; $T_j < 125\text{ °C}$	PRQ-190
Current consumption	I_q	–	140	210	μA	¹⁾ $I_q = I_I - I_Q$; $I_Q = 500\text{ mA}$; $T_j < 125\text{ °C}$	PRQ-67

1) Not subject to production test, specified by design.


5 Current consumption

5.2 Typical performance characteristics current consumption


Current consumption I_q versus
output current I_Q

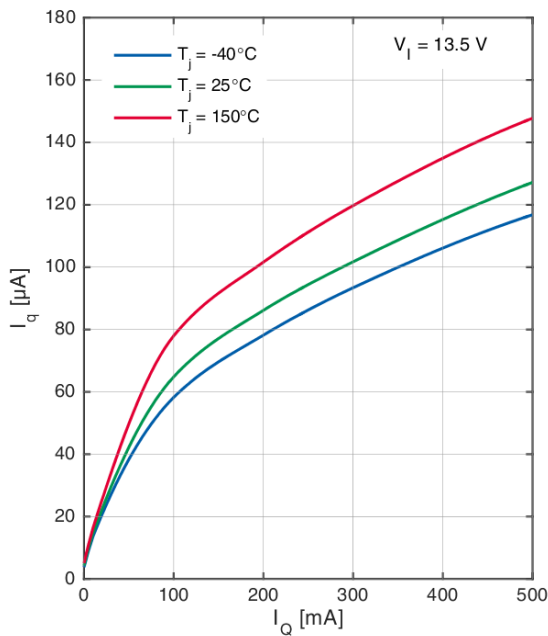


Current consumption I_q versus
input voltage V_I

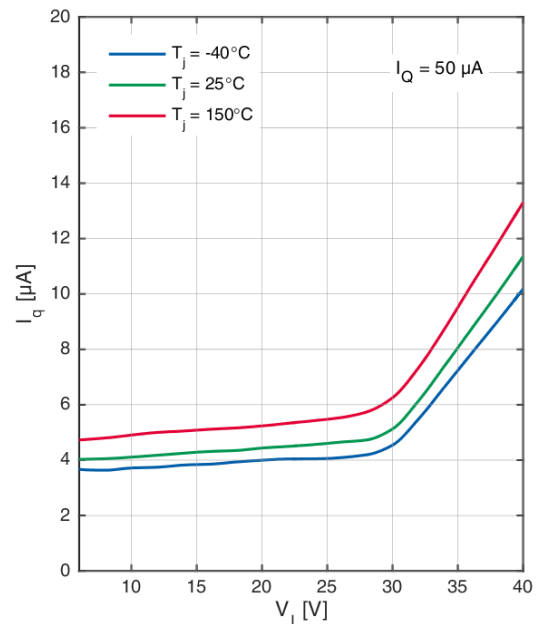

Current consumption I_q versus
junction temperature T_j

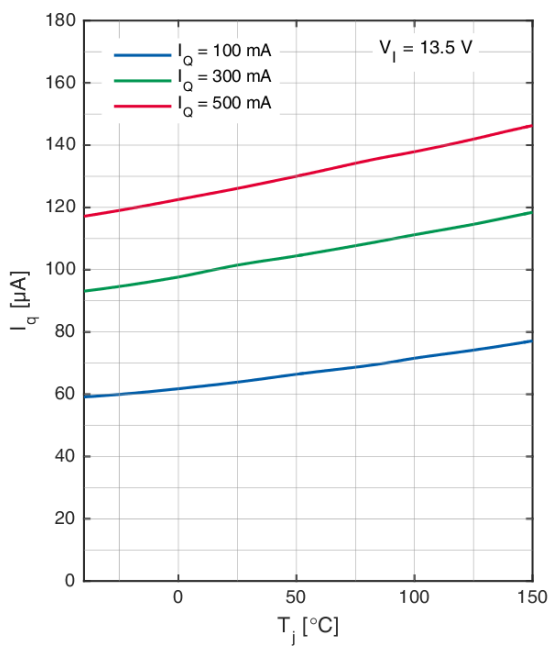

Current consumption I_q versus
junction temperature T_j

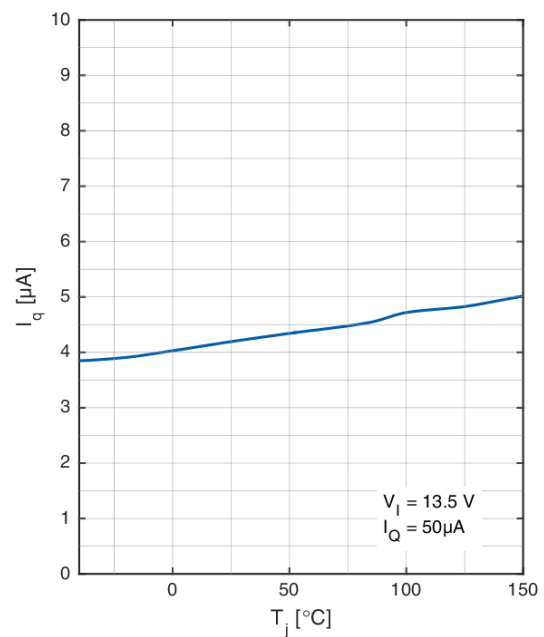

6 Application information

6 Application information

6.1 Application diagram

Note: The following information is given as an example for the implementation of the device only and shall not be regarded as a description or warranty of a certain functionality, condition or quality of the device.

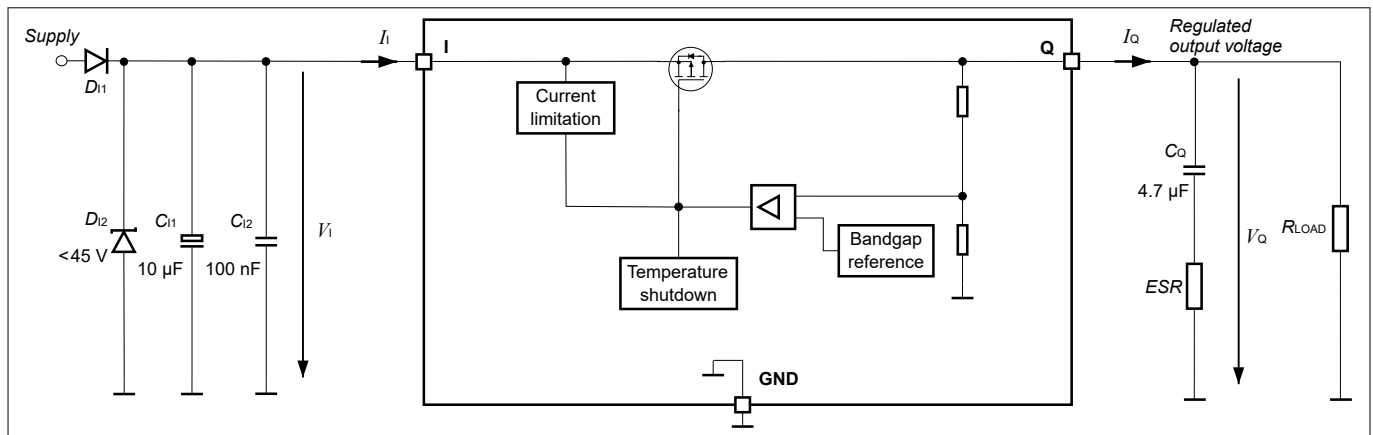


Figure 5 Application diagram

Note: This figure is a simplified example of an application circuit. The function must be verified in the application.

6.2 Selection of external components

6.2.1 Input pin

Figure 5 shows an example of the input circuitry for a linear voltage regulator. A ceramic capacitor at the input, in the range of 100 nF to 470 nF, is recommended to filter out the high frequency disturbances imposed by the line, for example ISO pulses 3a/b. This capacitor must be placed very close to the input pin of the linear voltage regulator on the PCB.

An aluminum electrolytic capacitor in the range of 10 µF to 470 µF is recommended as an input buffer to smooth out high energy pulses, such as ISO pulse 2a. This capacitor must be placed close to the input pin of the linear voltage regulator.

An overvoltage suppressor diode can be used to further suppress any high voltage beyond the maximum rating of the linear voltage regulator and to protect the device from damage due to overvoltage.

The external components at the input pin are optional, but they are recommended to deal with possible external disturbances.

6.2.2 Output pin

An output capacitor is mandatory for the stability of linear voltage regulators. Furthermore, it serves as an energy buffer during load jumps, to compensate and maintain a constant output voltage potential. It must be dimensioned according to the specific requirements of the application. The requirements for the output capacitor are given in Table 3.

The device is designed to be stable with low ESR capacitors as well. According to automotive requirements, ceramic capacitors with X5R or X7R dielectrics are recommended.

The output capacitor should be placed as close as possible to the voltage regulator's output and GND pin and on the same side of the PCB as the regulator itself.

6 Application information

In case of a possible transient voltage on the input or a transient load current, the capacitance should be dimensioned accordingly.

The configuration must be verified in the real application to ensure that the output stability requirements are fulfilled.

6.3 Thermal considerations

From the known input voltage, the output voltage and the load profile of the application, the total power dissipation can be calculated as follows:

$$P_D = (V_I - V_Q) \times I_Q + V_I \times I_q$$

Equation 1

with

- P_D : continuous power dissipation
- V_I : input voltage
- V_Q : output voltage
- I_Q : output current
- I_q : quiescent current

The maximum acceptable thermal resistance R_{thJA} is given by:

$$R_{thJA} = \frac{T_{j,max} - T_a}{P_D}$$

Equation 2

with

- $T_{j,max}$: maximum allowed junction temperature
- T_a : ambient temperature

Based on the above calculation the proper PCB type and the necessary heat sink area can be determined by referring to the specification for thermal resistance in [Table 4](#).

6.4 Reverse polarity protection

The device has no internal protection against reverse polarity and thus requires an external reverse polarity protection diode against negative supply voltage.

The absolute maximum ratings of the device as specified in [Table 2](#) must be maintained.

6.5 Further application information

For further information, you may contact www.infineon.com.

7 Package information

7 Package information

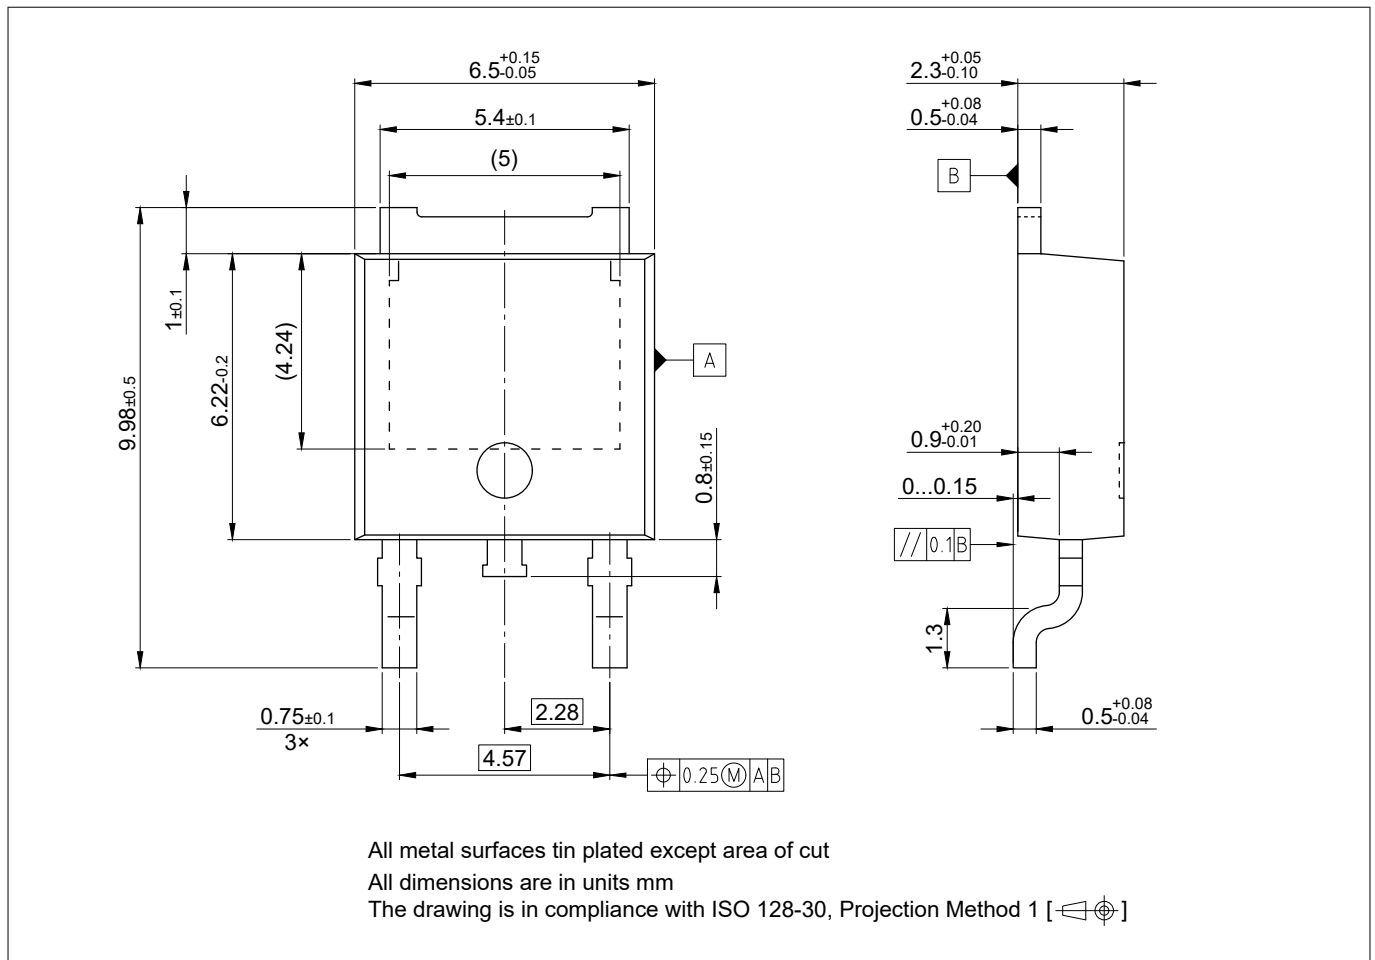


Figure 6 PG-T0252-3

Green Product (RoHS compliant)

To meet the world-wide customer requirements for environmentally friendly products and to be compliant with government regulations the device is available as a Green Product. Green Products are RoHS compliant (Pb-free finish on leads and suitable for Pb-free soldering according to IPC/JEDEC J-STD-020).

Information on alternative packages

Please visit www.infineon.com/packages.

8 Revision history

8 Revision history

Revision	Date	Changes
1.0	2023-05-25	Datasheet created

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

Edition 2023-05-25

Published by

Infineon Technologies AG
81726 Munich, Germany

© 2023 Infineon Technologies AG
All Rights Reserved.

Do you have a question about any aspect of this document?

Email: erratum@infineon.com

Document reference
IFX-Z8F68807945

Important notice

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenhheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Warnings

Due to technical requirements products may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by Infineon Technologies in a written document signed by authorized representatives of Infineon Technologies, Infineon Technologies' products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[TLS850A4TEV50ATMA1](#)