


General Purpose Power Metal Glaze™ Resistor



PWRG Series


- 3 and 5 watts
- 1Ω to 1MΩ range
- TC's from +100 ppm/°C
- Radial leads for PC mount

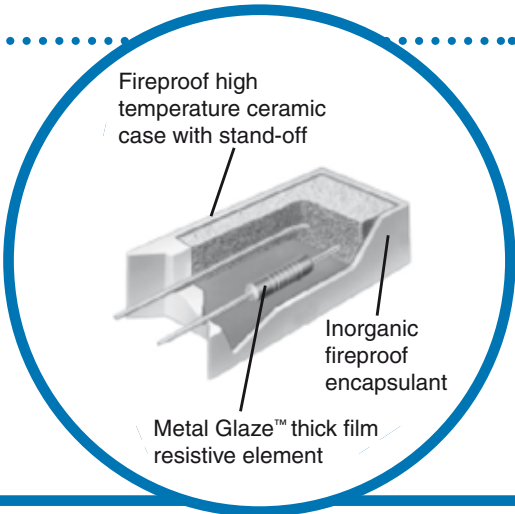

Specifications

- Power Rating: 3 and 5 watts
- Resistance Range: 1Ω to 1MΩ
- Tolerance: ±1%, ±2%, ±5%, and ±10%,
- Flameproof inorganic construction

Physical Data

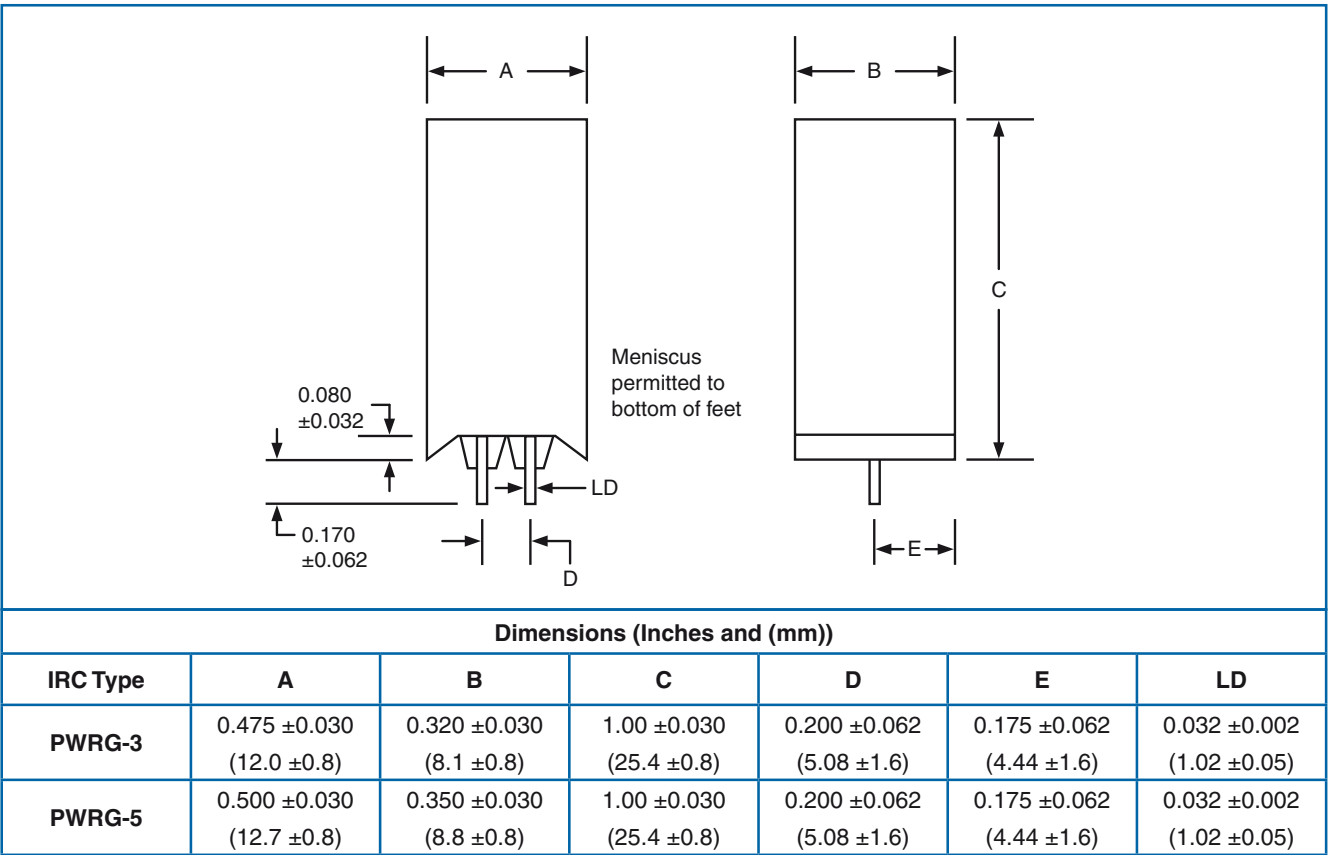


General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.




www.bitechnologies.com www.irctt.com www.welwyn-tt.com

Temperature Rise Chart

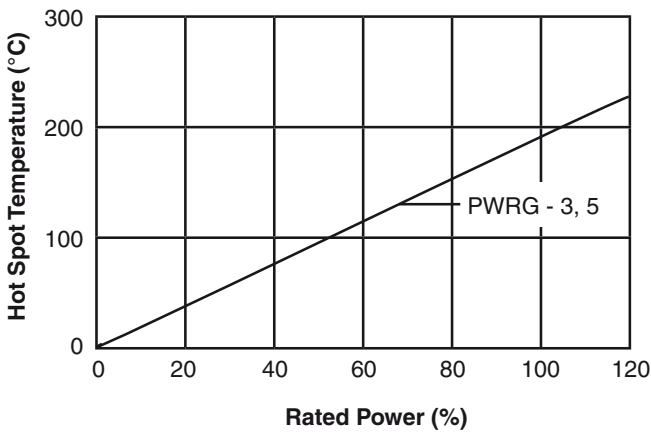

Power Derating Curve

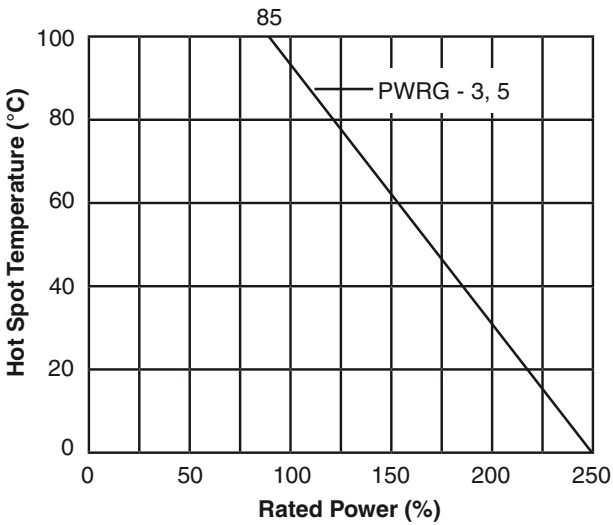

Ordering Data

Sample Part No.	PWRG	5	1202	K
IRC Type	PWRG			
Power				
Resistance Range				
Tolerance				

J = ±5%, K = ±10%

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.