

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### General Description

The MAX8971 is a compact, high-frequency, high-efficiency switch-mode charger for a one-cell lithium-ion (Li+) battery. It delivers up to 1.55A of current to the battery from inputs up to 7.5V and withstands transient inputs up to 22V. The 4MHz switch-mode charger is ideally suited for small portable devices, such as headsets and ultra-portable media players. It minimizes component size and heat.

Battery-protection features include: low-voltage prequalification, charge fault timer, die temperature monitoring, and battery temperature monitoring. The battery temperature monitoring adjusts the charge current and termination voltage for safe use of secondary lithium-ion batteries.

The IC accepts either a general DC input or USB. It has programmable automatic input-current limiting to protect upstream charging sources such as USB.

Charge parameters are easily adjustable through an I<sup>2</sup>C interface. Charge is terminated based on user-selectable minimum current level. A safety timer with reset control provides a safety backup for I<sup>2</sup>C interface. Charge status is provided to the application processor through an interrupt pin.

The IC is available in a space-saving, 20-bump, 2.18mm x 1.62mm WLP package.

### Applications

USB Charging  
 Headsets and Media Players  
 Smartphones  
 Digital Cameras  
 GPS, PDAs

### Benefits and Features

- ◆ **Switch-Mode Charger**
  - ✧ High-Efficiency
  - ✧ Low Heat
  - ✧ Fast Charge Time
- ◆ **Small and Simple**
- ◆ **Precise**
  - ✧ Up to ±5% Current Regulation and 0.5% Voltage Regulation
- ◆ **Safe**
  - ✧ JEITA Battery Temperature Monitor
  - ✧ Over/Undervoltage Protection, Safety Timers, Temperature Regulation
  - ✧ USB Friendly
- ◆ **Flexible**
  - ✧ Programmable Voltage/Current
  - ✧ Status/Interrupts Through I<sup>2</sup>C
  - ✧ Automatic Input Current Limit
- ◆ **I<sup>2</sup>C Interface**
  - ✧ Input Current Limit (100mA to 1500mA)
  - ✧ Fast-Charge/Termination Current (250mA to 1550mA)
  - ✧ Charge Voltage (4.1V, 4.15V, 4.2V, 4.35V)
  - ✧ Safety Timer
  - ✧ Termination Enable
- ◆ **+22V Absolute Maximum Input Voltage Rating**
- ◆ **Up to 7.5V Maximum Operating Input Voltage**
- ◆ **5V USB/Safeout LDO for USB PHY**
- ◆ **2.3A GSM RF Test Mode (Factory Testing)**
- ◆ **Charge Current to Voltage Conversion (V<sub>ICHG</sub>) for Baseband ADC**
- ◆ **Reverse Battery Leakage Protection**
- ◆ **Input/Output Overvoltage Protection**
- ◆ **Interrupt Status Output**

[Ordering Information](#) appears at end of data sheet.

For related parts and recommended products to use with this part, refer to [www.maxim-ic.com/MAX8971.related](http://www.maxim-ic.com/MAX8971.related).

*Simplified Applications Circuit appears at end of data sheet.*

**Industry's Smallest 1.55A  
1-Cell Li+ DC-DC Charger**

---

**TABLE OF CONTENTS**

---

Absolute Maximum Ratings . . . . .	4
Package Thermal Characteristics . . . . .	4
Electrical Characteristics . . . . .	4
Typical Operating Characteristics . . . . .	9
Typical Operating Characteristics . . . . .	11
Typical Operating Characteristics . . . . .	12
Typical Operating Characteristics . . . . .	13
Bump Configuration . . . . .	14
Bump Description . . . . .	14
Detailed Description . . . . .	16
DC Input—Fast-Hysteretic Step-Down Regulator . . . . .	16
Soft-Start . . . . .	16
PVL and AVL . . . . .	16
Thermistor Input (THM) . . . . .	16
Thermal Foldback . . . . .	17
Charger States . . . . .	17
Charger-Disabled State . . . . .	20
Dead-Battery State . . . . .	20
Dead-Battery + Prequalification State . . . . .	20
Prequalification State . . . . .	20
Fast-Charge Constant-Current State . . . . .	20
Fast-Charge Constant Voltage State . . . . .	20
Top-Off State . . . . .	20
Done State . . . . .	20
Timer Fault State . . . . .	21
Overvoltage and Protection . . . . .	21
Automatic Input Current Limit Protection . . . . .	21
V <sub>ICHG</sub> Charging Current Monitor . . . . .	22
SAFEOUT . . . . .	22
JEITA Description . . . . .	22
Maxim Model Gauge M3 Support . . . . .	22
Factory-Mode GSM Test Mode Support . . . . .	22
Applications Information . . . . .	23
Inductor Selection . . . . .	23
Input Capacitor Selection . . . . .	23

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### TABLE OF CONTENTS (continued)

Output Capacitor Selection . . . . .	23
Charge Current Resistor Selection . . . . .	23
I <sup>2</sup> C Registers . . . . .	26
Charger Interrupt Requests . . . . .	26
Charger Interrupt Masks . . . . .	27
Charger Status . . . . .	28
DETAILS1 . . . . .	29
DETAILS2 . . . . .	30
USB Suspend . . . . .	31
Input Voltage Disable . . . . .	31
Fast-Charge Current and Timer Control . . . . .	31
Input-Current Limit and Charger Restart Threshold . . . . .	32
Done Current, Timer, GSM Test Mode, and Battery Regulation Voltage . . . . .	35
Temperature Regulation . . . . .	36
Charger Protection . . . . .	36
Simplified Applications Circuit . . . . .	37
Ordering Information . . . . .	37
Chip Information . . . . .	37
Package Information . . . . .	38
Revision History . . . . .	39

### LIST OF TABLES

Table 1. Trip Temperatures for Different Thermistors . . . . .	17
Table 2. Suggested Inductors . . . . .	23
Table 3. Charge Current Settings for 47m $\Omega$ and 68m $\Omega$ Sense Resistors . . . . .	24
Table 4. Topoff Current Settings for 47m $\Omega$ and 68m $\Omega$ Sense Resistors . . . . .	24
Table 5. High-Level I <sup>2</sup> C Register Map . . . . .	24
Table 6. CHGCC[4:0] Decoding . . . . .	32
Table 7. DCILMT[5:0] Bit Code . . . . .	33

### LIST OF FIGURES

Figure 1. Typical Application Circuit . . . . .	15
Figure 2. Li/Li-Poly Charge Profile . . . . .	18
Figure 3. Functional State Diagram . . . . .	19
Figure 4. JEITA Safety Region . . . . .	22
Figure 5. MAX8971 with MAX17047 . . . . .	22

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ABSOLUTE MAXIMUM RATINGS

BYP to PG_	-0.3V to +22V
DC_ to BYP	-6V to +0.3V
I2CIN, V <sub>ICHG</sub> , IRQB, SDA, SCL to GND	-0.3V to +6V
BST to AVL	-0.3V to +16V
BST to LX_	-0.3V to +6V
PVL, SFO, BAT, CS to PG_	-0.3V to +6V
AVL, THM to GND	-0.3V to +6V
PG_ to GND	-0.3V to +0.3V
DC_, LX_, CS, BAT, BYP Continuous Current	1.6A <sub>RMS</sub>

Continuous Power Dissipation (T <sub>A</sub> = +70°C)	
WLP derate 21.7mW/°C above +70°C	1736mW
Operating Temperature Range	-40°C to +85°C
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Soldering Temperature (reflow)	+260°C

\*This device is constructed using a unique set of packaging techniques that impose a limit on the thermal profile the device can be exposed to during board-level solder attach and rework. This limit permits only the use of the solder profiles recommended in the industry-standard specification, JEDEC 020A, paragraph 7.6, Table 3 for IR/VPR and Convection reflow. Preheating is required. Hand or wave soldering is not allowed.

### PACKAGE THERMAL CHARACTERISTICS (Note 1)

WLP

Junction-to-Ambient Thermal Resistance (θ <sub>JA</sub> )	46°C/W	Junction-to-Case Thermal Resistance (θ <sub>JC</sub> )	2°C/W
---	--------	--	-------

**Note 1:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ELECTRICAL CHARACTERISTICS

(V<sub>DC</sub> = 5V, C<sub>BYP</sub> = 1μF, I<sub>FCHG</sub> = 500mA, C<sub>AVL</sub> = 4.7μF, V<sub>THM</sub> = AVL/2, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 2)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>DC INPUT</b>					
DC Operating Voltage Range		4.0		V <sub>OVP</sub>	V
DC Undervoltage Lockout	DC rising, 500mV hysteresis	3.6	3.8	4.0	V
DC Overvoltage Threshold (V <sub>OVP</sub> )*	DC rising, 250mV hysteresis	7.25	7.5	7.75	V
DC OVP Interrupt Delay			16		ms
DC to BAT Shutdown Threshold	When charging stops, V <sub>DC</sub> falling, 150mV hysteresis	0	50	100	mV
DC Supply Current	Charger enabled, V <sub>DC</sub> = 5.5V		2		mA
BST Leakage Current	V <sub>BST</sub> = 5.5V, LX_ = PG_	T <sub>A</sub> = +25°C	0.01	10	μA
		T <sub>A</sub> = -40°C to +85°C	0.1		
LX_ Leakage Current	V <sub>LX_</sub> = 0 or 5.5V	T <sub>A</sub> = +25°C	0.01	10	
		T <sub>A</sub> = -40°C to +85°C	0.1		
BAT Reverse Leakage Current	V <sub>DC</sub> = 0V, V <sub>BAT</sub> = 4.2V		1	5	μA
Input-Current Limit Range		0.1		1.5	A

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $I_{FCHG} = 500mA$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = AVL/2$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input-Current Limit Accuracy	USB 100mA mode	90	95	100	mA
	USB 500mA mode	450	475	500	
	Input limit programmed to 1.5A, $I_{FCHG} = 1500mA$	1350	1500	1650	
Adaptive Input-Current Limit (AICL) (Note 4)	DC voltage where charge current is regulated		4.5		V
	DC voltage where charge current is set to 75mA		4.4		
Input Limit Switch	$V_{DC} = 5.5V$ , $I_{BYP} = 100mA$		35	80	m $\Omega$
<b>BUCK OPERATION</b>					
Switching Frequency	$V_{BAT} = 3.6V$		4		MHz
Maximum Duty Cycle			99.5		%
Minimum On-Time			55		ns
Maximum On-Time			10		$\mu s$
Minimum Off-Time			65		ns
Soft-Start Time			1.5		ms
High-Side Resistance	$I_{LX} = 100mA$ , $V_{DC} = 5.5V$		120	250	m $\Omega$
Low-Side Resistance	$I_{LX} = 100mA$ , $V_{DC} = 5.5V$		150	220	m $\Omega$
Thermal Regulation Temperature ( $T_{REG}$ )	I <sup>2</sup> C programmable 2-bits (90, 105, 120, and disable selections, 105 default)		105		$^{\circ}C$
Thermal Regulation Gain	Percentage decrease in $I_{FCHG}$ above the thermal regulation temperature		5		%/ $^{\circ}C$
<b>BATTERY CHARGER PRECHARGE</b>					
Battery-Prequalification Lower Threshold ( $V_{PQLTH}$ )	$V_{BAT}$ rising, 130mV hysteresis		2.1		V
Dead-Battery Charge Current ( $I_{DBAT}$ )	$0V \leq V_{BAT} \leq 2.1V$		45		mA
Battery-Prequalification Upper Threshold ( $V_{PQUTH}$ )**	$V_{BAT}$ rising, 150mV hysteresis		2.5		V
Prequalification Charge Current ( $I_{PQ}$ )	Percentage of fast-charge current programmed		10		%
<b>CONSTANT-CURRENT MODE</b>					
BAT Fast-Charge Current Range ( $I_{FC}$ )	5 bits–50mA steps, $R_{CS} = 47m\Omega$	250		1550	mA
Fast-Charge Current Accuracy	$T_A = +15^{\circ}C$ to $+45^{\circ}C$	-5		+5	%
	JEITA safety region (Figure 6)	-65	-50	-35	%

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $I_{FCHG} = 500mA$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = AVL/2$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
<b>CONSTANT VOLTAGE MODE</b>					
Battery Regulation Voltage ( $V_{BATREG}$ )	$I_{BAT} = 100mA$ , operating in voltage-regulation mode, I <sup>2</sup> C-programmable 4.1V, 4.15V, 4.2V, and 4.35V selection	$T_A = +25^{\circ}C$	-0.5	+0.5	%
		$T_A = -40^{\circ}C$ to $+85^{\circ}C$	-1	+1	
		JEITA safety region, percentage of battery regulation voltage (Note 6)	96	97	98
Battery Refresh Threshold	(Below regulation point), 100mV and 150mV selection, default 150mV (Note 5)	120	150	185	mV
Battery Overvoltage Protection	$V_{BAT}$ threshold over regulation voltage to turn off charger during charge (% of regulation voltage) (Note 7)	102	103.5	105	%
	Hysteresis ( $V_{BAT}$ falling) at 4.2V		1.4		
Charge-Current Termination Threshold ( $I_{TOPOFF}$ )	Programmable toff current independent of JEITA functionality, default 50mA, 200mA hysteresis	50		200	mA
	Degitch time		16		ms
Charge-Current Termination Accuracy	$I_{TOPOFF} = 200mA$	-20		+20	%
<b>GSM TEST MODE</b>					
GSM Test-Mode Output Pulse Current	$V_{BAT}$ capacitance $\geq 60\mu F$ , peak current pulse frequency = 217Hz, on-duty cycle 12.5%		2.3		A
GSM Test-Mode Minimum Output	$V_{BAT}$ capacitance $\geq 60\mu F$ , current pulse frequency = 217Hz, on-duty cycle 12.5% (Note 3)	3.7			V
<b>CHARGER TIMER</b>					
Prequalification Time ( $t_{PQ}$ )	$V_{BAT} < V_{BATPQ\_UT}$		45		Mins
Fast-Charge Time ( $t_{FC}$ )	Default 5 hours, I <sup>2</sup> C programmable (4–10 hours and disabled selection)		5		hrs
Timer Accuracy			20		%
Top-Off Time ( $t_{TOPOFF}$ )	I <sup>2</sup> C programmable 0 to 70 mintues, 10-minute steps, default 30 mintues	0		70	Mins
Top-Off Timer Accuracy			20		%
Timer-Extend Current Threshold (Note 3)	Percentage of fast-charge current below which the timer clock operates at half speed		50		%

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $I_{FCHG} = 500mA$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = AVL/2$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
THERMISTOR MONITOR						
THM Threshold, Cold, No Charge (0°C)	V <sub>THM</sub> /AVL rising, 1% hysteresis (thermistor temperature falling)		71.06	74.56	78.06	%
THM Threshold, Cold, Current Foldback (+15°C)	V <sub>THM</sub> /AVL rising, 1% hysteresis (thermistor temperature falling)		57.00	60.00	63.00	%
THM Threshold, Hot, Voltage Foldback (+45°C)	V <sub>THM</sub> /AVL falling, 1% hysteresis (thermistor temperature rising)		32.68	34.68	36.68	%
THM Threshold, Hot, No Charge (+60°C)	V <sub>THM</sub> /AVL falling, 1% hysteresis (thermistor temperature rising)		21.24	22.54	23.84	%
THM Input Bias Current	V <sub>THM</sub> = V <sub>AVL</sub> or 0V	T <sub>A</sub> = +25°C	-0.2	0.01	+0.2	μA
		T <sub>A</sub> = +85°C		0.01		
V <sub>ICHG</sub>						
V <sub>ICHG</sub> Output Voltage	I <sub>BAT</sub> = 100mA			150		mV
	I <sub>BAT</sub> = 1000mA		1260	1400	1540	mV
	I <sub>BAT</sub> = 1500mA			2100		mV
IRQB OUTPUT						
Low-Level Output Saturation Voltage	I <sub>IRQB</sub> =10mA, sinking current				0.4	V
High-Level Leakage Current	V <sub>IRQB</sub> = 5V	T <sub>A</sub> = +25°C	-1	0.01	+1	μA
		T <sub>A</sub> = +85°C		0.1		μA
SAFEOUT OUTPUT						
Regulated Output	I <sub>SFO</sub> = 30mA, V <sub>DC</sub> = 5.5V		4.75	5	5.25	V
Dropout Voltage	I <sub>SFO</sub> = 30mA			45		mV
Current Limit				590		mA
Maximum Output Current			100			mA
POK Output Threshold				2.7		V
PVL/AVL OUTPUT						
PVL Output Voltage	5.5V < V <sub>DC</sub> < 7.5V, no load			5.05		V
AVL Output Voltage	5.5V < V <sub>DC</sub> < 7.5V, no load			5.05		V
LOGIC LEVELS AND TIMING CHARACTERISTICS (SCL, SDA)						
Output Low Threshold	I <sub>O</sub> = 3mA, sink current (SDA)				0.4	V
Input Low Threshold	V <sub>I2CIN</sub> = 1.8V				0.4	V
Input High Threshold	V <sub>I2CIN</sub> = 1.8V		1.4			V

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ELECTRICAL CHARACTERISTICS (continued)

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $I_{FCHG} = 500mA$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = AVL/2$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Bias Current	$V_{I2CIN} = 1.8V$ , $T_A = +25^{\circ}C$			1	$\mu A$
SCL Clock Frequency		100		400	kHz
Bus Free Time Between START and STOP (Note 3)		1.3			$\mu s$
Hold Time REPEATED START Condition (Note 3)		0.6			$\mu s$
SCL Low Period (Note 3)		1.3			$\mu s$
SCL High Period (Note 3)		0.6			$\mu s$
Setup Time REPEATED START Condition (Note 3)		0.6			$\mu s$
SDA Hold Time (Note 3)		0			$\mu s$
SDA Setup Time (Note 3)		100			ns
Maximum Pulse Width of Spikes (must be suppressed by the input filter of both SDA and SCL signals) (Note 3)			50		ns
Setup Time for STOP Condition (Note 3)		0.6			$\mu s$
<b>THERMAL REGULATION AND SHUTDOWN</b>					
Thermal Shutdown Temperature (Note 3)			+160		$^{\circ}C$
Thermal Shutdown Hysteresis (Note 3)			15		$^{\circ}C$

**Note 2:** Parameters are production tested at  $T_A = +25^{\circ}C$ . Limits over the operating temperature range are guaranteed through correlation using statistical quality control (SQC) methods.

**Note 3:** Guaranteed by design, not production tested.

**Note 4:** Voltage for 4.35V battery mode increases by 100mV.

**Note 5:** Refresh voltage for 4.15V increases by 50mV.

**Note 6:** JEITA decreases by 1% for 4.15V termination voltage.

**Note 7:** Battery overvoltage increases by 1% for 4.15V termination voltage.

\* = Contact factory for alternate thresholds (6.7V, 9.7V, and 14V available).







\*\* = Contact the factory for 3.0V.



## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Typical Operating Characteristics







( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = 2.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

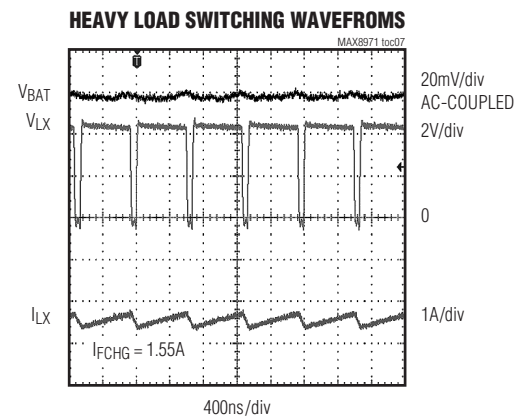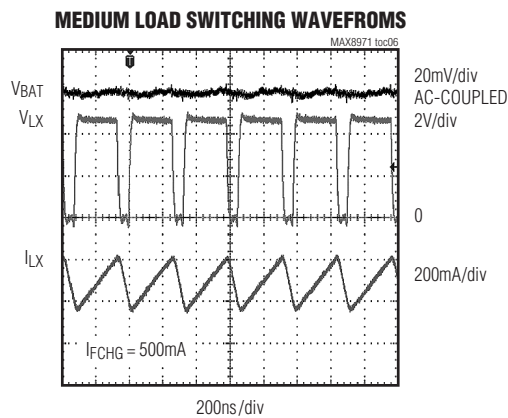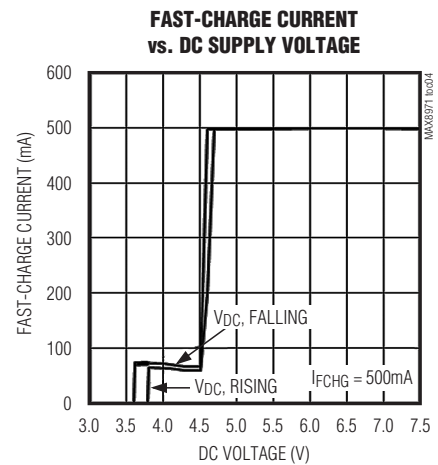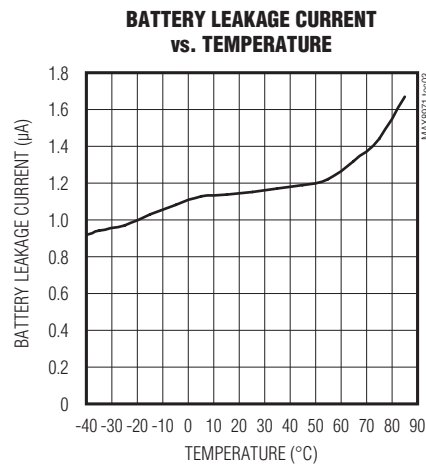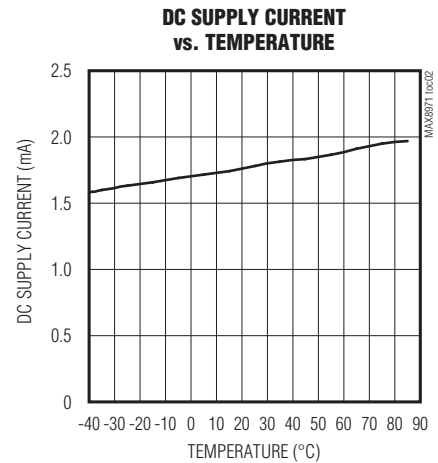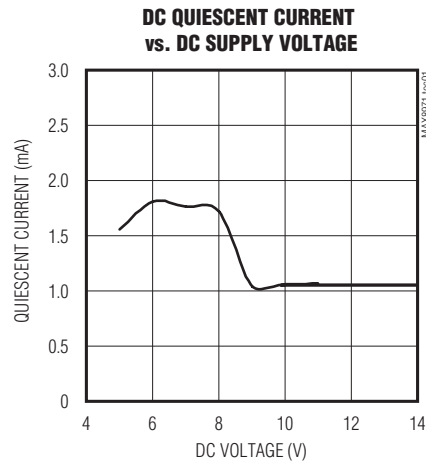

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Typical Operating Characteristics (continued)

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = 2.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

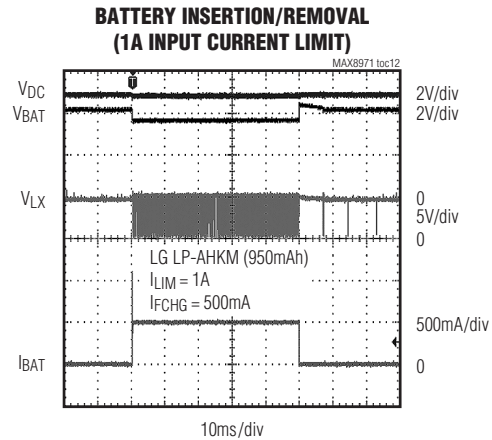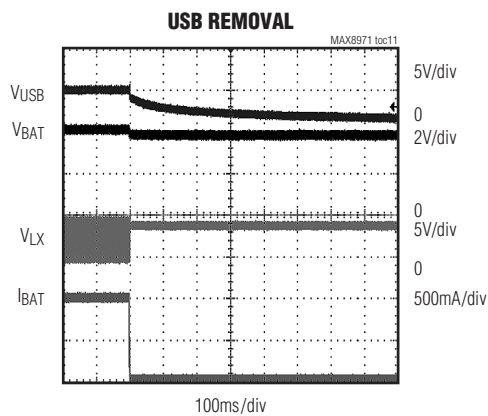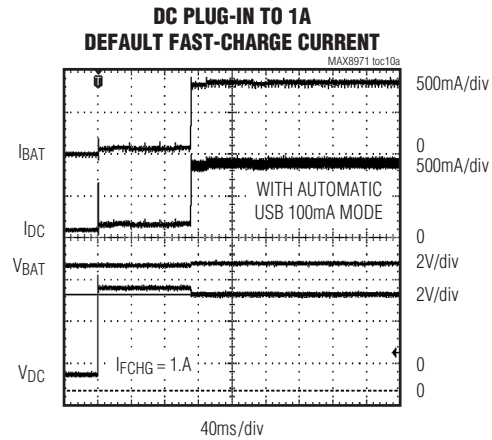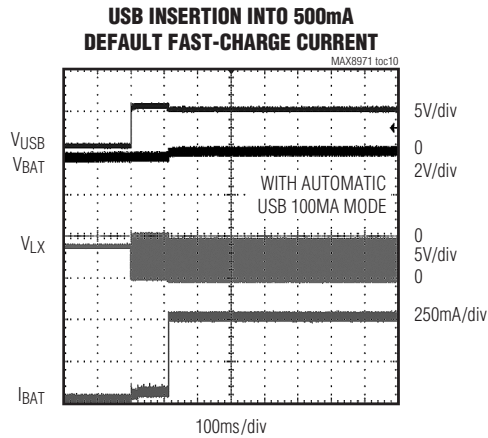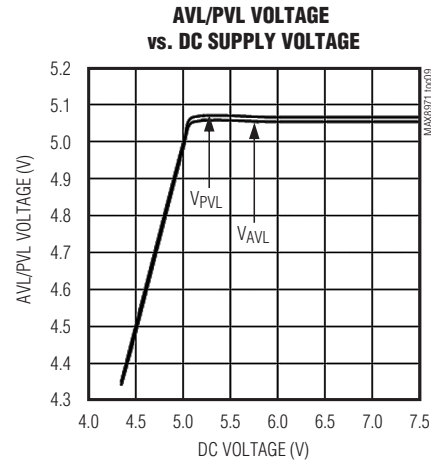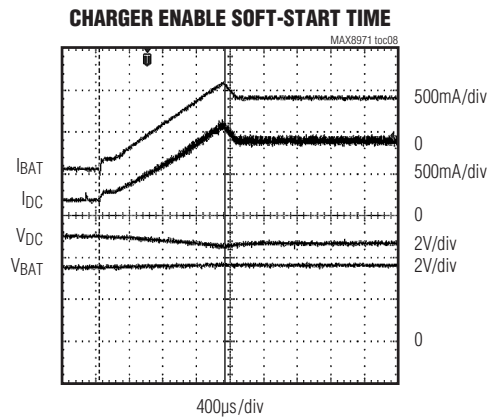


## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger


### Typical Operating Characteristics

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = 2.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)


**FAST-CHARGE CURRENT  
vs. TEMPERATURE**

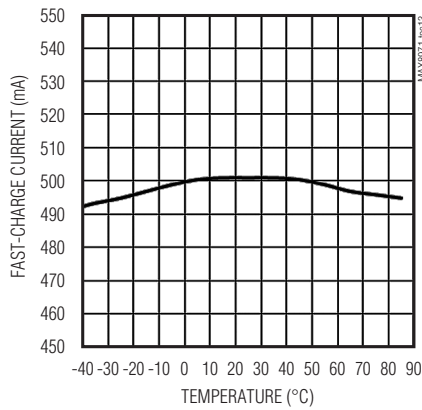


**FAST-CHARGE CURRENT  
vs. BATTERY VOLTAGE**

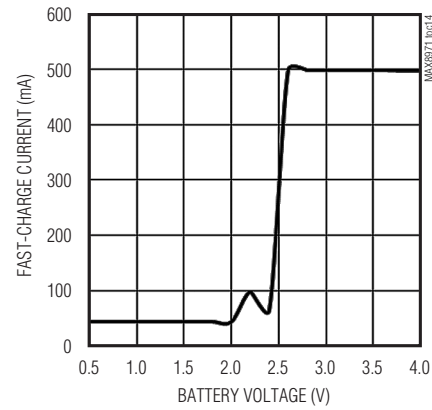


**FAST CHARGE TO SUSPEND**

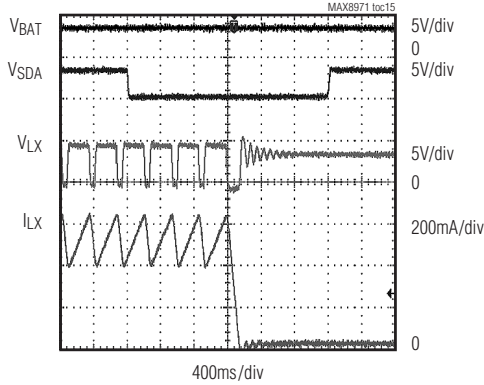


**BATTERY REGULATION VOLTAGE  
vs. TEMPERATURE**

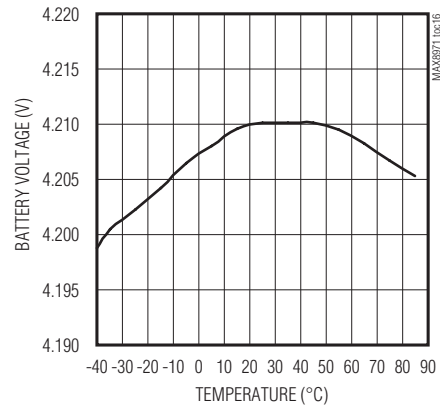

**BATTERY CHARGER EFFICIENCY  
vs. BATTERY VOLTAGE**

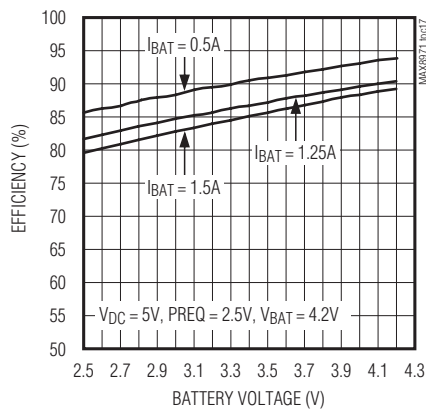

**BATTERY CHARGER EFFICIENCY  
vs. CHARGE CURRENT**

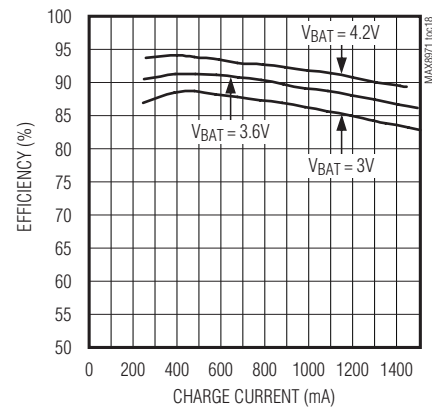


# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger


### Typical Operating Characteristics

( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = 2.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)


**BATTERY CHARGER EFFICIENCY  
vs. BATTERY VOLTAGE**

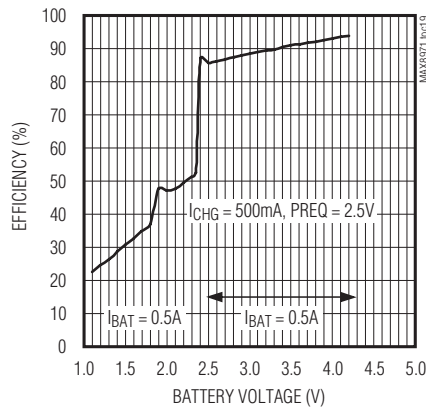


**CHARGE PROFILE FOR 1830mAh  
4.35V BATTERY CHARGED AT 0.55C**

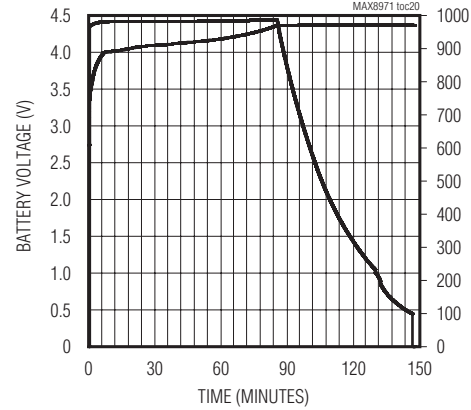


**CHARGE PROFILE FOR 1500mAh  
4.2V BATTERY WITH 70mA  
CONSTANT LOAD CHARGED AT 0.6C**

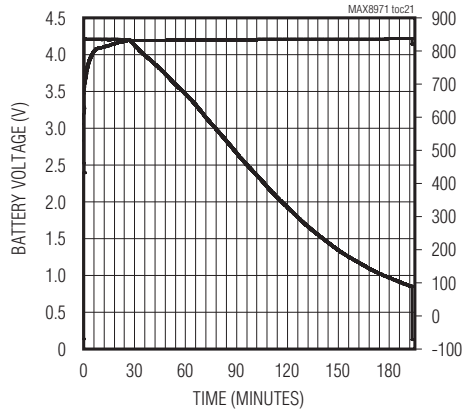


**AUTOMATIC INPUT CURRENT LIMIT**

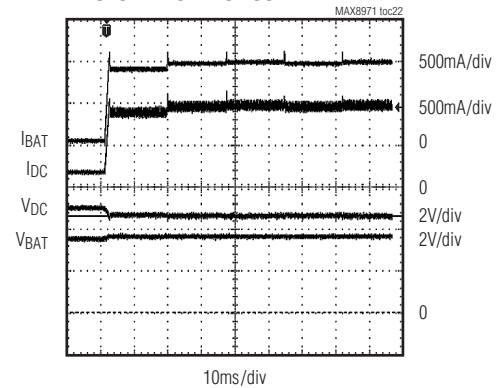

**AUTOMATIC INPUT CURRENT LIMIT  
(2Ω CABLE RESISTANCE)**

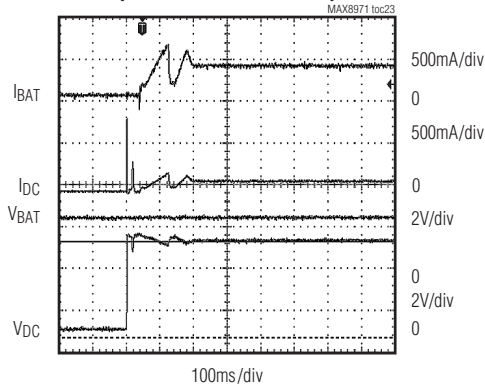







**AUTOMATIC INPUT CURRENT LIMIT  
(1Ω CABLE RESISTANCE)**

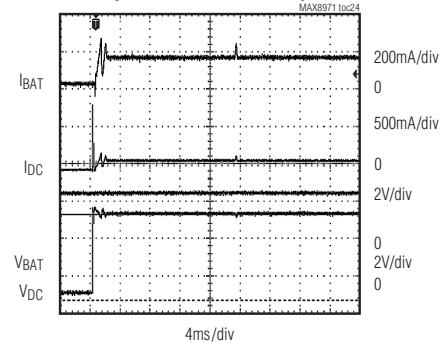

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Typical Operating Characteristics


( $V_{DC} = 5V$ ,  $C_{BYP} = 1\mu F$ ,  $C_{AVL} = 4.7\mu F$ ,  $V_{THM} = 2.5V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .)

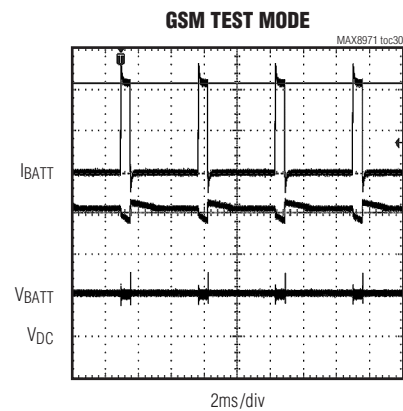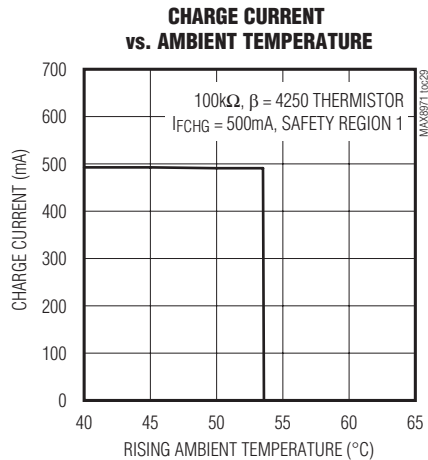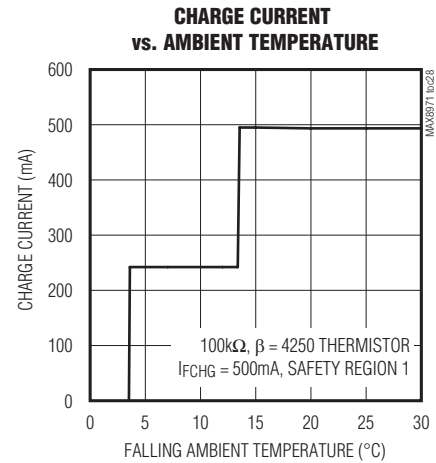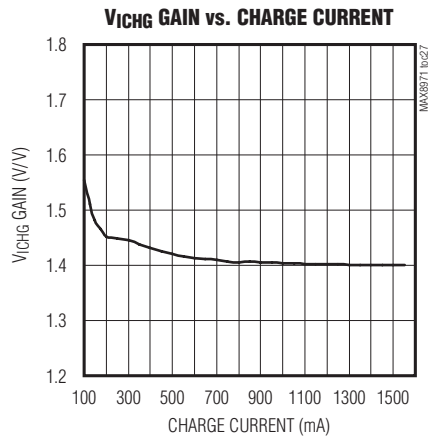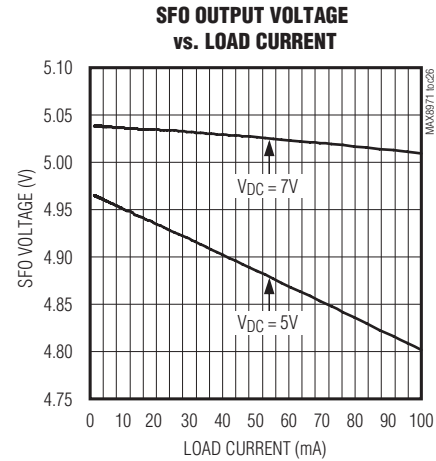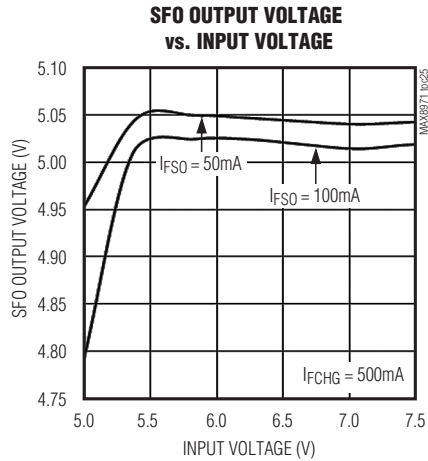

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Bump Configuration

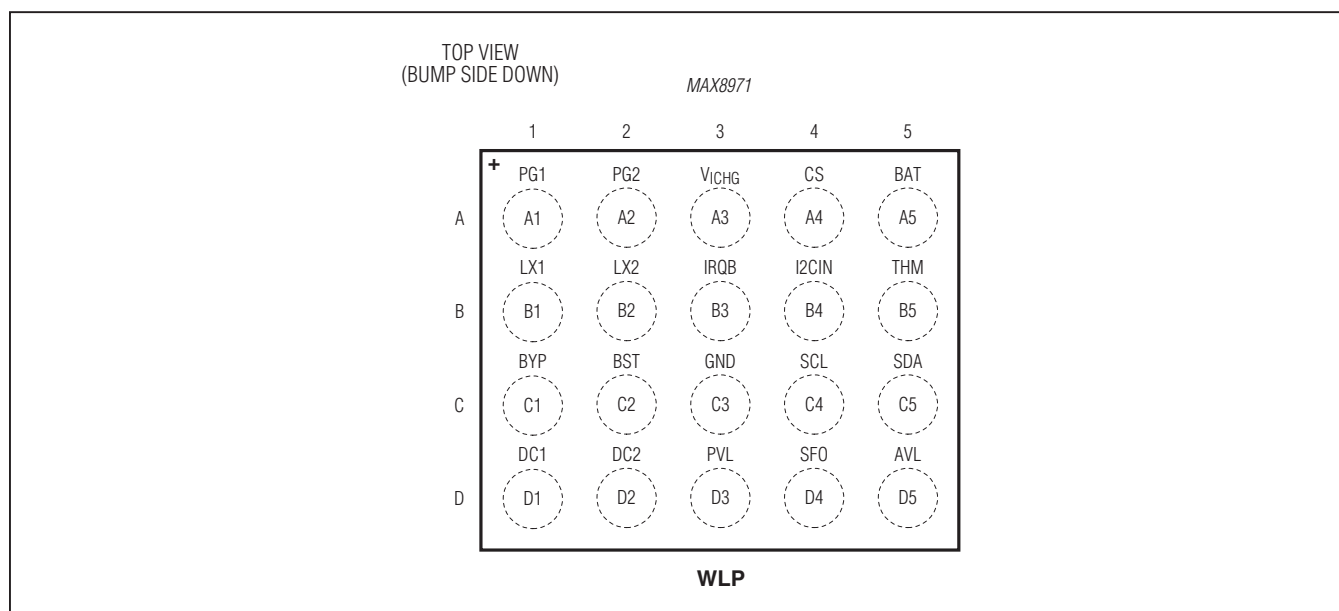

### Bump Description

PIN	NAME	FUNCTION
A1, A2	PG1, PG2	Power Ground for Step-Down Low-Side FET
A3	VICHG	Battery-Charging Current Monitor Output. This pin is an analog representation of the charger current at 1.4mV/mA.
A4	CS	Current-Sense Input Power Pin
A5	BAT	Battery Connection. Connect to a single-cell Li+ battery.
B1, B2	LX1, LX2	Buck Inductor Connection. Connect the inductor between LX_ and CS. The LX1 and LX2 pins must be connected together externally.
B3	IRQB	Open-Drain Host Processor Interrupt Pin
B4	I2CIN	I <sup>2</sup> C Interface Supply
B5	THM	Thermistor Input. Connect a negative temperature coefficient (NTC) thermistor from THM to GND. Connect a resistor equal to the thermistor +25°C resistance from THM to AVL. Charging is suspended when the thermistor is outside the hot and cold limits. Connect THM to GND to disable the thermistor temperature sensor. If the thermistor function is disable through I <sup>2</sup> C, connect THM to GND.
C1	BYP	Connection Point Between Reverse Blocking MOSFET and High-Side Switching MOSFET. Bypass to PG_ with a minimum 1µF ceramic capacitor.
C2	BST	High-Side FET Driver Supply. Bypass BST to LX with a 0.1µF ceramic capacitor.
C3	GND	Analog Ground. GND is the low-noise ground connection for the internal circuitry.

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Bump Description (continued)

PIN	NAME	FUNCTION
C4	SCL	I <sup>2</sup> C Interface Clock. Connect a 10k $\Omega$ resistor from SCL to I2CIN.
C5	SDA	I <sup>2</sup> C interface Data. Connect a 10k $\Omega$ resistor from SDA to I2CIN.
D1, D2	DC1, DC2	High-Current Charger Input Supply Pin(s). Bypass to PG_ with a 2.2 $\mu$ F ceramic capacitor. DC is capable of delivering up to 1.5A to BYP. DC supports both AC adapter and USB inputs. Short DC1 and DC2 together externally.
D3	PVL	Internal Bias Regulator High-Current Output Bypass Pin. Supports internal noisy and high-current gate drive loads. Bypass to PGND with a minimum 1 $\mu$ F ceramic capacitor. Do not use PVL to power external loads.
D4	SFO	5V Regulated LDO Output. Bypass SFO to GND with a 1 $\mu$ F or larger ceramic capacitor. SFO can be used to supply low-voltage rated USB systems.
D5	AVL	Internal-Bias-Regulator Quiet Analog Bypass Pin. Internal 10 $\Omega$ connection between PVL and AVL forms a lowpass filter with external bypass capacitor to GND. Do not use AVL to power external loads.

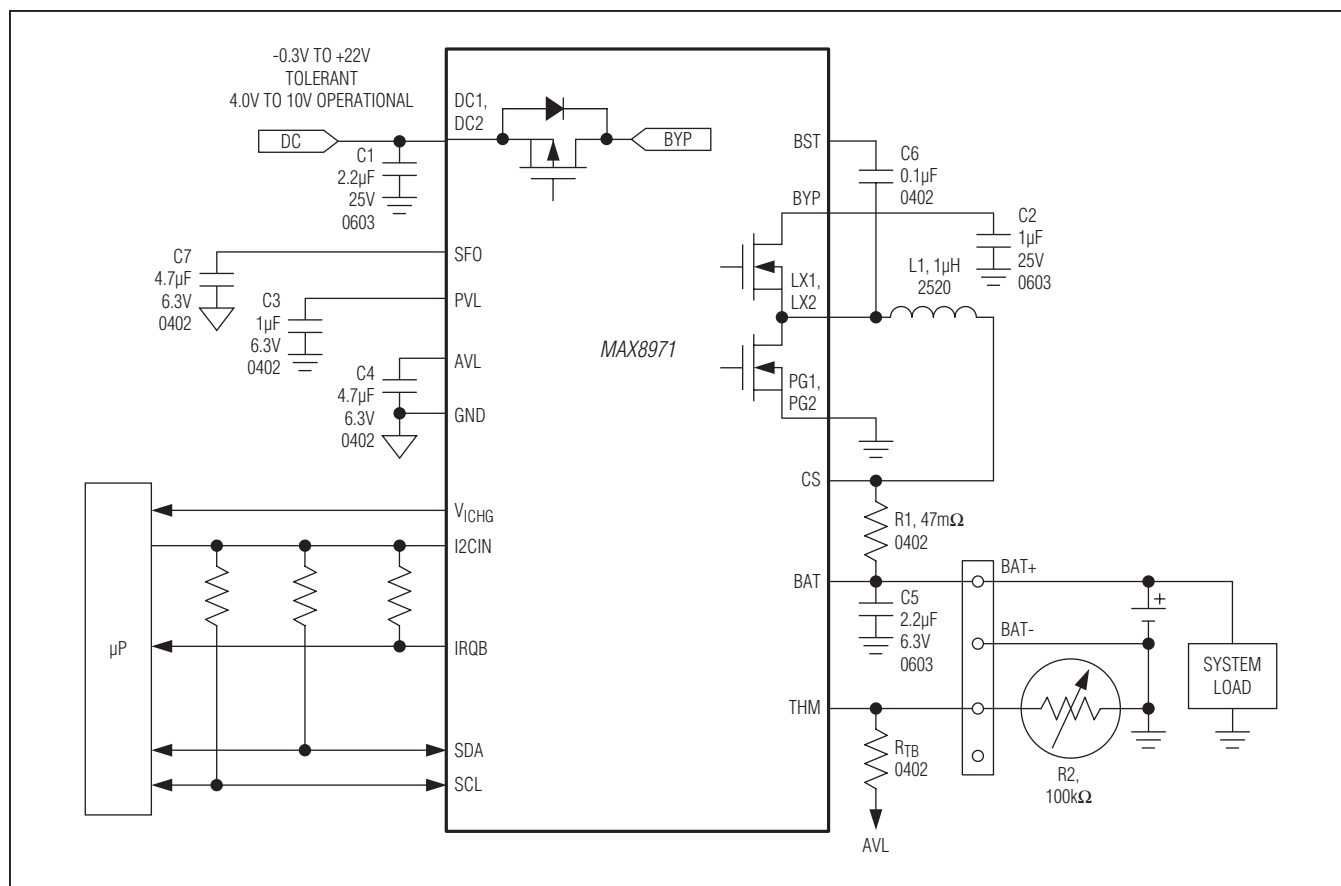


Figure 1. Typical Application Circuit

## **Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger**

### ***Detailed Description***

The MAX8971 is a JEITA-compliant Li+ switching battery charger that safely charges a single Li+ cell in accordance with JEITA specifications. The IC accepts an input supply range from 4V to 7.5V, but disables charging if the supply voltage exceeds +7.5V, protecting against unqualified or faulty AC adapters. The step-down converter supplies up to 1.5A to the battery. The IC includes charger features thermistor monitor, charger status and fault outputs. Also included are interrupt signals to the processor. Flexibility is maintained with adjustable charge current, input current limit, and a minimum battery voltage (when charging is scaled back to hold the battery voltage up) through an I<sup>2</sup>C interface.

### ***DC Input—Fast-Hysteretic Step-Down Regulator***

If a valid DC input is present, battery charging is supplied by the high-frequency step-down regulator from DC. The step-down regulation point is then controlled by three feedback signals: maximum step-down output current programmed by the input current limit, maximum charger current programmed for the fast-charge current, and maximum die temperature. The feedback signal requiring the smallest current controls the average output current in the inductor. This scheme minimizes total power dissipation for battery charging, and allows the battery to absorb any load transients with minimum voltage disturbance.

A proprietary hysteretic current PWM control scheme ensures fast switching and physically tiny external components. The feedback control signal that requires the smallest input current, controls the center of the peak and valley currents in the inductor. The ripple current is internally set to provide 4MHz operation. When the input voltage decreases near the output voltage, very high duty cycle occurs. Due to minimum off-time, 4MHz operation is not achievable. The controller then provides minimum off-time, peak current regulation. Similarly, when the input voltage is too high to allow 4MHz operation due to the minimum off-time, the controller becomes a minimum on-time, valley current regulator. In this way, ripple current in the inductor is always as small as possible to reduce ripple voltage on battery for a given

capacitance. The ripple current is made to vary with input voltage and output voltage in a way that reduces frequency variation. However, the frequency still varies somewhat with operating conditions.

### ***Soft-Start***

To prevent input current transients, the rate of change of the input current (di/dt) and charge current is limited. When the input is valid the charge current ramps from 0mA to the fast-charge current value in 1.5ms. Charge current also soft-starts when transitioning from the prequalification state to the fast-charge state. There is no di/dt limiting when transitioning from the done state to the fast-charge state.

### ***PVL and AVL***

PVL is a 5V linear regulator that the IC uses to power the gate drivers for its step-down charger. PVL also charges the BST capacitor. The PVL linear regulator is on when DC is greater than ~2.5V, otherwise it is off. Bypass PVL with a 1μF ceramic capacitor to PG. Powering external loads from PVL is not recommended.

As shown in Figure 1, AVL is a filtered output from the PVL linear regulator that the IC uses to power its internal analog circuits. The filter consists of an internal 10Ω resistor, and the AVL external bypass capacitor (4.7μF). This filter creates a 100kHz lowpass filter that cleans the 4MHz switching noise from the analog portion of the IC. Connect a 4.7μF ceramic capacitor from AVL to GND. Powering external loads with AVL is not recommended.

### ***Thermistor Input (THM)***

The THM input connects to an external negative temperature coefficient (NTC) thermistor to monitor battery or system temperature. Charging is suspended when the thermistor temperature is out of range. The charge timers are suspended and hold their state, but no fault is indicated. When the thermistor comes back into range, charging resumes and the charge timer continues from where it left.

Since the thermistor monitoring circuit employs an external bias resistor from THM to AVL, the thermistor is not limited only to 10kΩ (at +25°C). Any resistance thermistor can be used as long as the value is equivalent to the thermistors +25°C resistance. For example, with a



## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

10k $\Omega$  at R<sub>TB</sub> resistor, the charger enters a temperature suspend state when the thermistor resistance falls below 3.97k $\Omega$  (too hot) or rises above 28.7k $\Omega$  (too cold). This corresponds to the 0°C to +50°C range when using a 10k $\Omega$  NTC thermistor with a beta of 3500. The general relation of thermistor resistance to temperature is defined by the following equation:

$$R_T = R_{25} \times e\{\beta((1/(T+273)) \times (1/298))\}$$

where:

R<sub>T</sub> = the resistance in  $\Omega$  of the thermistor at temperature T in celsius

R<sub>25</sub> = the resistance in  $\Omega$  of the thermistor at +25°C

$\beta$  = the material constant of the thermistor, which typically ranges from 3000k to 5000k

T = the temperature of the thermistor in °C

Some designs might prefer other thermistor temperature limits. Threshold adjustment can be accommodated by changing R<sub>TB</sub>, connecting a resistor in series and/or in parallel with the thermistor, or using a thermistor with different  $\beta$ . For example, a +45°C hot threshold and 0°C cold threshold can be realized by using a thermistor with a  $\beta$  to 4250, and connecting 120k $\Omega$  in parallel. Since the thermistor resistance near 0°C is much higher than it is near +50°C, a large parallel resistance lowers the cold threshold, while only slightly lowering the hot threshold. Conversely, a small series resistance raises the cold threshold, while only slightly raising the hot threshold. Raising R<sub>TB</sub>, lowers both the hot and cold threshold, while lowering R<sub>TB</sub> raises both thresholds.

Note that since AVL is active whenever valid input power is connected at DC, thermistor bias current flows at all times. Using a 10k $\Omega$  thermistor and a 10k $\Omega$  pullup to AVL, results in an additional 250 $\mu$ A load. This load can be reduced to 25 $\mu$ A by instead using a 100k $\Omega$  thermistor and 100k $\Omega$  pullup resistor.

### Thermal Foldback

Thermal foldback maximizes the battery charge current while regulating the IC's junction temperature. When the die temperature exceeds T<sub>REG</sub>, a thermal limiting circuit reduces the battery charge-current target until the charge current reaches 10% of the fast-charge current setting. The charger maintains 10% of the fast-charge current until the die temperature reaches T<sub>SHDN</sub>. Please note that the IC is rated for a maximum ambient temperature of +85°C. Furthermore, although the maximum die temperature of the MAX8971 is +150°C, it is common industry practice to design systems in such a way that the die temperature never exceeds +125°C. Limiting the maximum die temperature to +125°C extends long-term reliability.

### Charger States

The IC utilizes several charging states to safely and quickly charge batteries as shown in Figure 3.

Figure 2 shows an exaggerated view of a Li+/Li-Poly battery progressing through the following charge states when the die and battery are close to room temperature: dead battery → prequalification → fast charge → top-off → done.

**Table 1. Trip Temperatures for Different Thermistors**

THERMISTOR	TEMPERATURE						
R <sub>THM</sub> at T <sub>A</sub> =+25°C	10,000	10,000	10,000	47,000	47,000	100,000	100,000
Thermistor Beta ( $\beta\Omega$ )	3380	3940	3940	4050	4050	4250	4250
R <sub>TB</sub> ( $\Omega$ )	10,000	10,000	10,000	47,000	47,000	100,000	100,000
R <sub>TP</sub> ( $\Omega$ )	Open	Open	301,000	Open	1,200,000	Open	1,800,000
R <sub>TS</sub> ( $\Omega$ )	Short	Short	499	Short	2,400	Short	6,800
Resistance at T1_n15 ( $\Omega$ )	61,788	61,788	77,248	290,410	380,716	617,913	934,027
Resistance at T1_0( $\Omega$ )	29,308	29,308	31,971	137,750	153,211	293,090	343,283

# Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

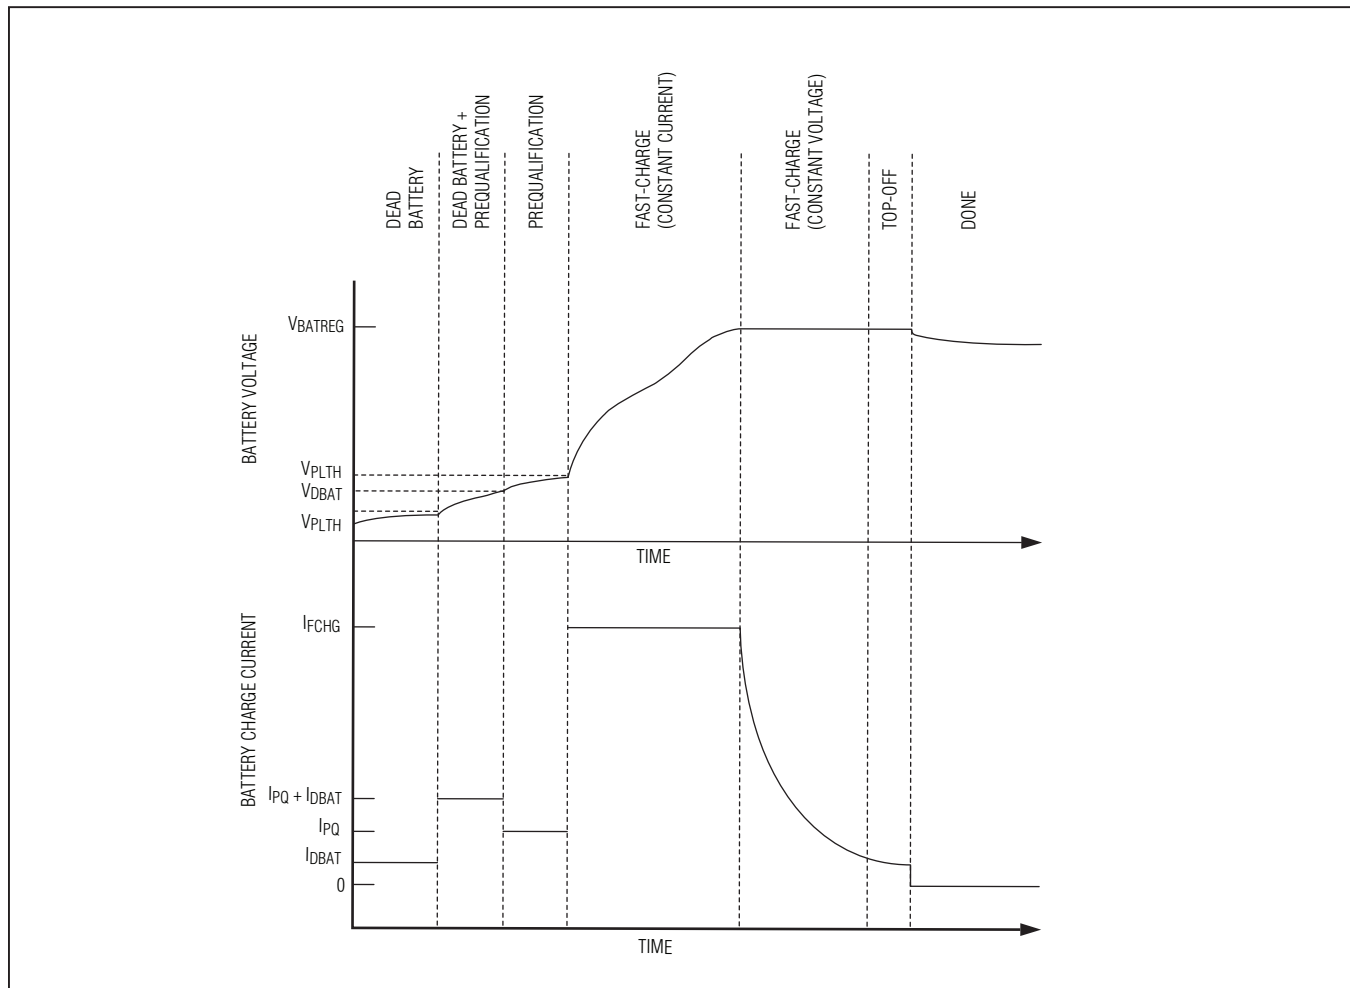


Figure 2. Li/Li-Poly Charge Profile

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

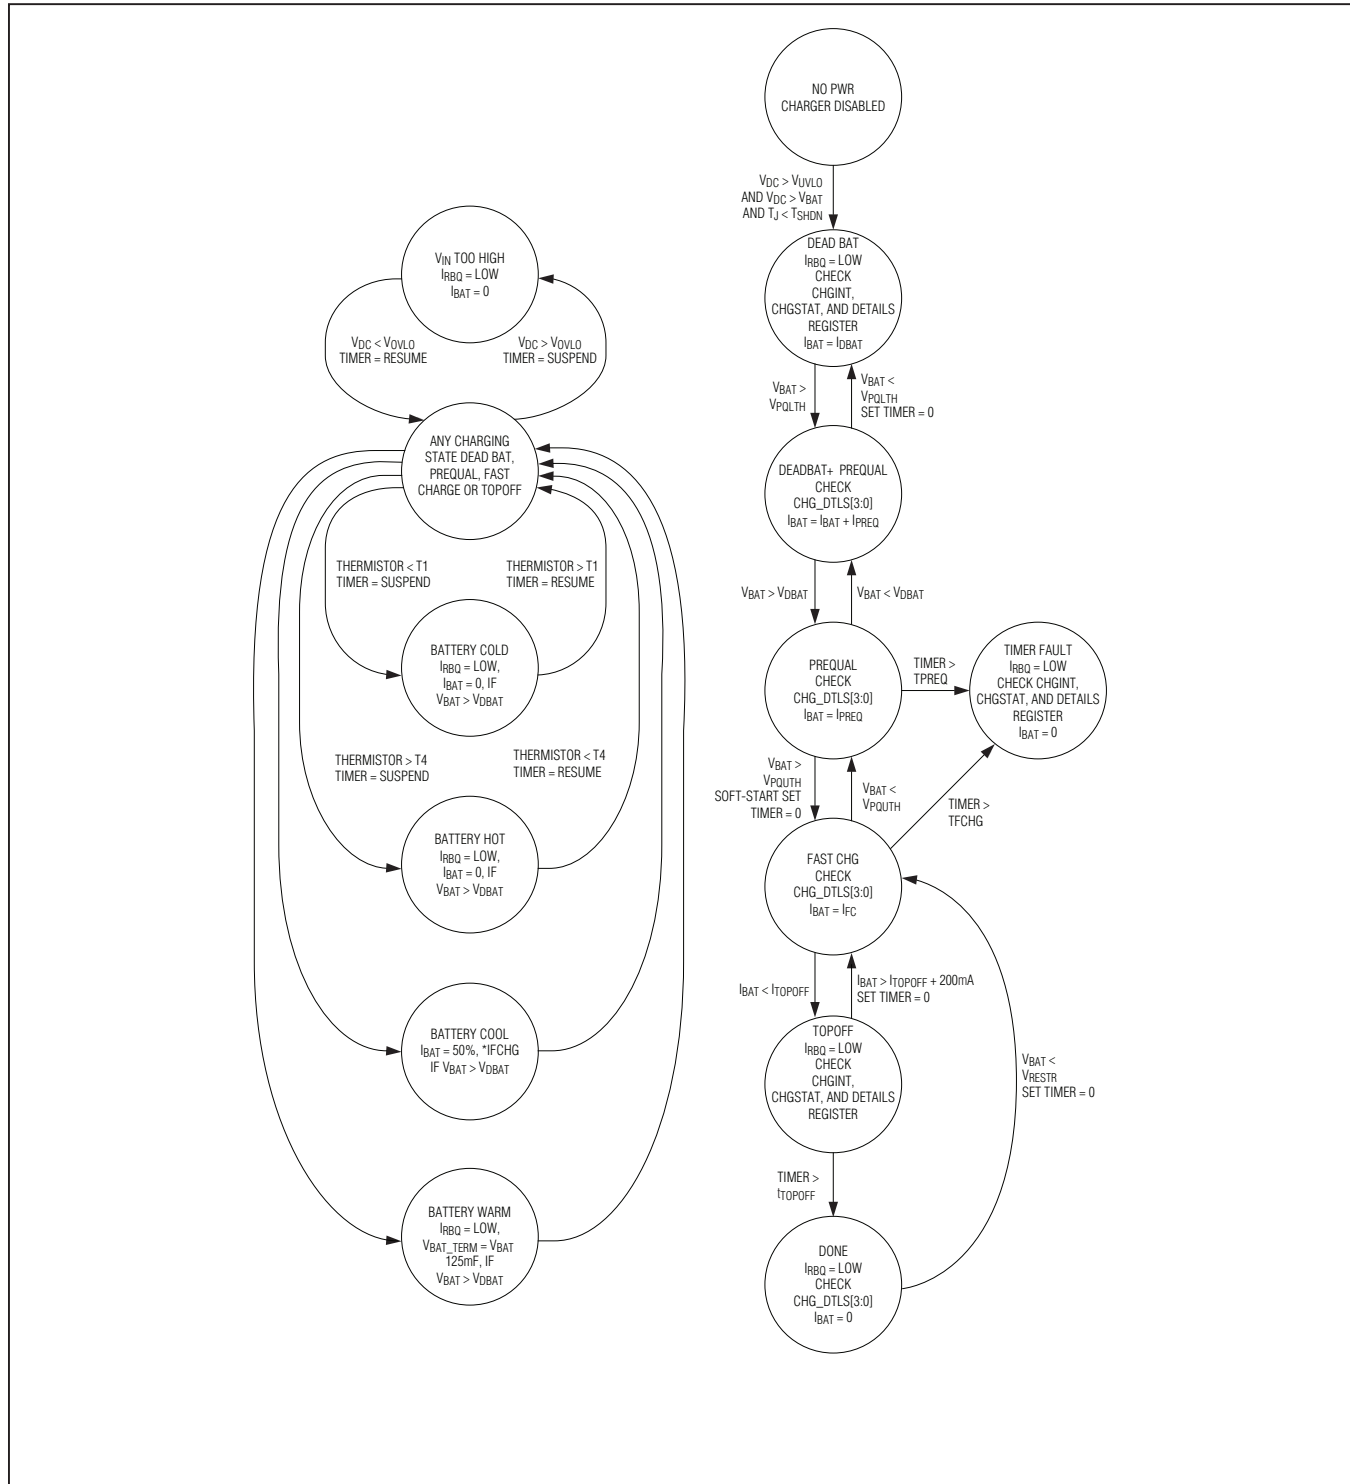


Figure 3. Functional State Diagram

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### ***Charger-Disabled State***

When DC is low or the input voltage is out of range, the IC disables the charger. To exit this state, the input voltage must be within its valid range.

### ***Dead-Battery State***

When a deeply discharged battery is inserted with a voltage of less than  $V_{PQLTH}$ , the IC disables the switching charger and linearly charges with  $I_{DBAT}$ . Once  $V_{BAT}$  increases beyond  $V_{PQLTH}$ , the IC clears the prequalification timer, and transitions to the dead battery + prequalification state. This state prevents the IC from dissipating excessive power in the event of a shorted battery. The dead-battery linear charge remains on, except when in the charger disabled state, timer fault state, thermal shutdown and  $V_{BAT} > V_{DBAT}$ .

### ***Dead-Battery + Prequalification State***

The dead battery + prequalification state occurs when the battery voltage is greater than  $V_{PQLTH}$ , and less than  $V_{DBAT}$ . In this state, both the linear dead-battery charger and the switching charger are on, delivering current to the battery. The total battery current is  $I_{DBAT} + I_{PQ}$ . If the IC remains in this state for longer than  $t_{PQ}$ , the IC transitions to the timer fault state. A normal battery typically stays in this state for several minutes or less. When the battery voltage rises above  $V_{DBAT}$  the IC transitions to the prequalification states. The dead-battery linear charger remains on except when in the charger disabled state, timer fault state, thermal shutdown and  $V_{BAT} > V_{DBAT}$ .

### ***Prequalification State***

The prequalification state occurs when the battery voltage is greater than  $V_{DBAT}$  and less than  $V_{PQUTH}$ . In this state, the linear dead-battery charger is turned off. Only the switching charger is on and delivering current to the battery. The total battery current is  $I_{PQ}$ . If the IC remains in this state for longer than  $t_{PQ}$ , then the IC transitions to the timer fault state. A normal battery typically stays in the prequalification state for several minutes or less. When the battery voltage rises above  $V_{PQUTH}$ , the IC transitions to the fast-charge constant-current state.

### ***Fast-Charge Constant-Current State***

The fast-charge constant-current state occurs when the battery voltage is greater than  $V_{PQUTH}$  and less than  $V_{BATREG}$ . In this state, the switching charger is on and delivering current to the battery. The total battery current is  $I_{FC}$ . If the IC remains in this state and

the fast-charge constant voltage state for longer than  $t_{FC}$ , then the IC transitions to the timer fault state. When the battery voltage rises to  $V_{BATREG}$ , the IC transitions to the fast-charge constant voltage state. The fast-charge constant-current is set to 50% of programmed value when  $0^{\circ}\text{C} < \text{THM} < +15^{\circ}\text{C}$ , and 100% of programmed value when  $+15^{\circ}\text{C} < \text{THM} < +60^{\circ}\text{C}$ .

The MAX8971 dissipates the most power in the fast-charge constant-current state. This power dissipation causes the internal die temperature to rise. If the die temperature exceeds  $T_{REG}$ ,  $I_{FC}$  is reduced.

If there is low input-voltage headroom ( $V_{IN} - V_{BAT}$ ), then  $I_{FC}$  decreases due to the impedance from  $I_{IN}$  to  $I_{BAT}$ .

### ***Fast-Charge Constant Voltage State***

The fast-charge constant voltage state occurs when the battery voltage is at the  $V_{BATREG}$ , and the charge current is greater than  $I_{TOPOFF}$ . In this state, the switching charge is on and delivering current to the battery. The IC maintains  $V_{BATREG}$  and monitors the charge current to detect when the battery consumes less than the  $I_{TOPOFF}$  current. When the charge current decreases below the  $I_{TOPOFF}$  threshold, the IC transitions to the top-off state. If the IC remains in the fast-charge constant-current state for longer than  $t_{FC}$ , then it transitions to the timer fault state.

### ***Top-Off State***

The top-off state occurs when the battery voltage is at  $V_{BATREG}$  and the battery current decreases below  $I_{TOPOFF}$  current. In this state, the switching charger is on and delivers current to the battery. The IC maintains  $V_{BATREG}$  for a specified time. When this time expires, the IC transitions to the DONE state. If the charging current increases to  $I_{TOPOFF} + 200\text{mA}$  before this time expires, then the charge reenters the fast-charge constant voltage state.

### ***Done State***

The IC enters its done state after the charge has been in the top-off state for  $t_{TOPOFF}$ . In this state, the switching charger is off and no current is delivered to the battery. If the system load presented to the battery is low  $<< 10\mu\text{A}$ , then a typical system can remain in the done state for many days. If left in the done state long enough, the battery voltage decays below the restart threshold and the IC transitions back into the fast-charge state. There is no soft-start ( $di/dt$  limiting) during the done-to-fast-charge state transition.

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### **Timer Fault State**

The timer fault state occurs when either the prequalification or fast-charge timers expire. In this state, the charger is off. The charger can exit this timer fault state by cycling input power.

### **Overvoltage and Protection**

The IC provides for a +22V absolute maximum positive input voltage, and a -0.3V absolute maximum negative input voltage. Excursions to the absolute maximum voltage levels should be on a transient basis only, but can be withstood by the IC indefinitely.

Situations that typically require extended input voltage ratings include, but are not limited to the following:

- Inductive kick
- Charge source failure
- Power surge
- Improperly wired wall adapter
- Improperly set universal wall adapter
- Wall adapter with the correct plug, but wrong voltage
- Home-built computer with USB wiring harness connected backwards (negative voltage)
- USB connector failure
- Excessive ripple voltage on a switch-mode wall charger
- USB-powered hub that is powered by a wall charger (typically through a barrel connector) that has any of the aforementioned issues
- Unregulated charger

### **Automatic Input Current Limit Protection**

The IC includes an input-current-limiting feature. The amplifiers required for sensing the currents and associated logic circuitry for making decisions and changing the battery-charger current are fully integrated in the ICs. This not only helps in reducing cost, but also improves the speed of system response.

The IC works by monitoring the current being drawn from the AC adapter and comparing it to the programmed current limit. The current limit should be set based on the current-handling capability of the AC adapter. Generally, this limit is chosen to optimally fulfill the system-power requirements while achieving a satisfactory charging time for the batteries. If the AC-adapter current exceeds its output capability, the charger responds by cutting back on the charger current, thereby keeping the current drawn from the AC adapter within its capability. With such a battery charger, the AC adapter doesn't need to be oversized to meet maximum system and battery-charging requirements simultaneously, thereby reducing AC adapter cost.

The input current limit has two control inputs, one based on voltage and one based on current. The voltage input monitors the input voltage, and when it drops below the desired input (4.5V), it generates a flag (AICL) to decrement the fast-charge current.

When the voltage comparator initially trips at 4.5V, fast-charge current decrements at a slow rate, allowing the charger output to settle until the voltage on DC returns above this voltage threshold. Once the DC voltage resolves itself, the current delivery of the adapter is maximized. In the event of a limited input current source, an example being a 500mA adaptor plugged into a 1A input current limit setting, a second voltage comparator set at 4.4V triggers and throttles the fast-charge current to a minimum of 75mA. Once the DC voltage corrects itself to above 4.5V, the fast-charge level is checked every 16ms to allow the system to recover if the available input power increases.

The current-limit input monitors the current through the input FET and generates a flag (DC\_I) to decrement the fast-charge current when the input limit is exceeded. The fast-charge current is slowly decremented until the input-limit condition is cleared. At this point, the fast-charge current is maintained for 16ms and is then sampled again.

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### V<sub>ICHG</sub> Charging Current Monitor

V<sub>ICHG</sub> is a buffered output that can be interpreted to the charge current ( $V_{ICHG} = 1400\text{mV}/I_{FCHG}$ ). See the *Typical Operating Characteristics* section for the V<sub>ICHG</sub> curve.

### SAFEOUT

SAFEOUT is a linear regulator that provides an output voltage of 5V and can be used to supply low-voltage rated USB systems. The SFO linear regulator turns on when  $V_{IN} > 2.5\text{V}$ .

### JEITA Description

The IC JEITA-compliant switching Li+ battery charger safely charges a single Li+ cell in accordance with JEITA specifications. The IC monitors the battery temperature while charging, and automatically adjusts the fast-charge current and/or charge termination voltage as the battery temperature varies.

In safety region 1, the IC automatically reduces the fast-charging current for  $T_{BAT} < +10^\circ\text{C}$ , and reduces the charge termination voltage from 4.200V ( $\pm 25\text{mV}$ ) to 4.075V ( $\pm 25\text{mV}$ ) for  $T_{BAT} > +45^\circ\text{C}$ . The fast-charge current is reduced to 50% of the nominal fast-charge current with options for 25% and 75%. JEITA never specifically states one or the other. When battery charge current is reduced by 50%, the timer is doubled.

In safety region 2, the IC automatically reduces the charge termination voltage from 4.200V ( $\pm 25\text{mV}$ ) to 4.075V ( $\pm 25\text{mV}$ ) for  $T_{BAT} < +10^\circ\text{C}$  and for  $T_{BAT} > +45^\circ\text{C}$ . The fast-charge current is not changed in safety region 2.

### Maxim Model Gauge M3 Support

Figure 5 illustrates how the IC can easily integrate with Maxim's Model gauge M3 MAX17047 chip. The user just needs to add a Schottky diode between V<sub>BATT</sub> and V<sub>TT</sub> on the MAX17047.

### Factory-Mode GSM Test Mode Support

The IC supports GSM pulse programming scheme. When DC is inserted with no battery operation, the IC soft-starts and cycles through dead-battery, prequalification, and fast charge, settling at constant voltage-mode operation, and regulating to the termination voltage (4.2V default). At this time, when B4 of register 0x08 is sent, the part can now support GSM pulse. See the *Typical Operating Characteristics* section.

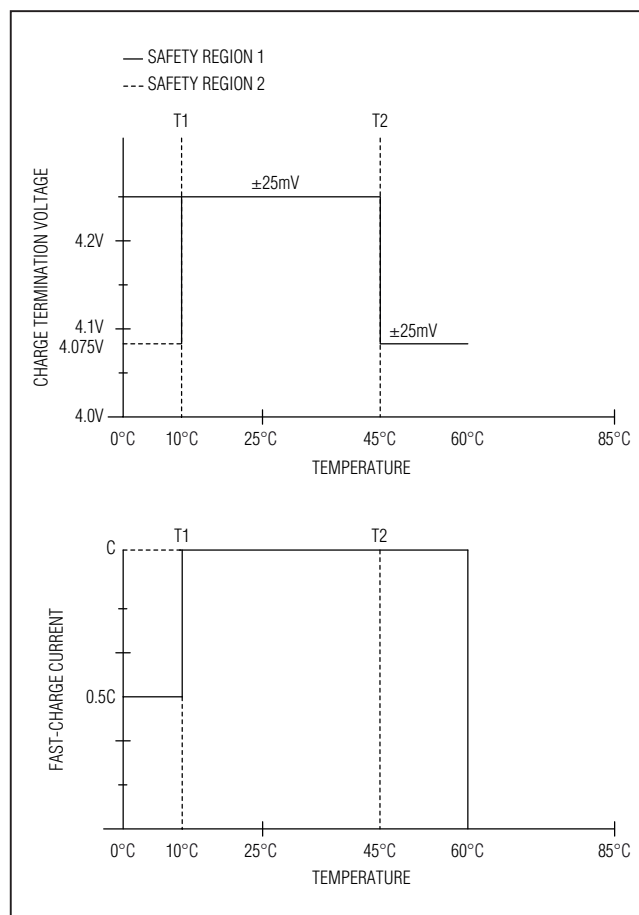


Figure 4. JEITA Safety Region

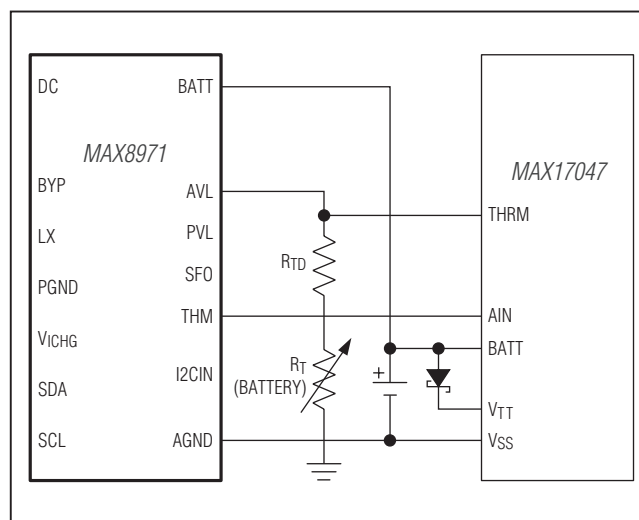


Figure 5. MAX8971 with MAX17047

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

The battery node should have enough capacitance to hold the battery voltage to some minimum acceptable system value ( $V_{SYS}$ ) during the done to fast-charge state transition time of 100 $\mu$ s ( $t_{DONE2FC}$ ).

$$C_{BAT} \geq I_{LOAD} \times t_{DONE2FC} / (V_{BATREG} - V_{SYS})$$

For example, if the maximum system load without a battery is 400mA ( $I_{LOAD}$ ), and the minimum acceptable system voltage is 3.4V ( $V_{SYS}$ ), then the battery node should have at least 40 $\mu$ F.

$$C_{BAT} \geq 400\text{mA} \times 100\mu\text{s} / (4.2\text{V} - 3.4\text{V}) = 40\mu\text{F}$$

### Applications Information

#### Inductor Selection

The charger operates with a switching frequency of 4MHz and uses a 1 $\mu$ H or 2.2 $\mu$ H inductor. This operating frequency allows the use of physically small inductors while maintaining high efficiency.

The inductor's DC current rating only needs to match the maximum load of the application because the IC features zero current overshoot during startup and load transients. For optimum transient response and high efficiency, choose an inductor with DC series resistance in the 40m $\Omega$  to 120m $\Omega$  range. See Table 2 for suggested inductors and manufacturers.

#### Input Capacitor Selection

The input capacitor reduces the current peaks drawn from the input power source and reduces switching noise in the IC. The impedance of the input capacitor at the switching frequency should be kept very low. Ceramic capacitors with X5R or X7R temperature characteristics are highly recommended due to their small size, low ESR, and small temperature coefficients. A 4.7F capacitor

is recommended. For optimum noise immunity and low input ripple, the input capacitor value can be increased.

Note that some ceramic dielectrics exhibit large capacitance and ESR variation with temperature and DC bias. Ceramic capacitors with Z5U or Y5V temperature characteristics should be avoided.

#### Output Capacitor Selection

For the charger, the output capacitor keeps the output voltage ripple small and ensures regulation loop stability. The output capacitor must have low impedance at the switching frequency. Ceramic capacitors with X5R or X7R temperature characteristics are highly recommended due to their small size, low ESR, and small temperature coefficients. A 4.7 $\mu$ F capacitor is recommended. For optimum load-transient performance and very low output ripple, increase the output capacitor value.

#### Charge Current Resistor Selection

Both the top-off current range and fast-charge current range depends on the sensing resistor ( $R_{SNS}$ ). The default resistor recommended is a 47m $\Omega$ , 0.125W resistor. Select a 0.125W, 47m $\Omega$  2% sense resistor, e.g., Panasonic ERJ2BWGR047. This is a standard value.

$$P_{RSNS} = I_{CHARGE}^2 \times R_{SNS}$$

$$P_{RSNS} = 1.5^2 \times 0.047$$

$$P_{RSNS} = 0.105\text{W}$$

The charge current step ( $I_{CHARGE}$ ) is calculated using equation below:

$$I_{CHARGE\_STEP} = V(CHGCC<>) / R_{SNS}$$

Table 3 below shows the charge current settings for two sensing resistors.

$$I_{CHARGE\_CURRENT\_STEP} = V(TOPOFF<>) / R_{SNS}$$

**Table 2. Suggested Inductors**

MANUFACTURER	SERIES	INDUCTANCE ( $\mu$ H)	ESR ( $\Omega$ )	CURRENT RATING (mA)	DIMENSIONS
FDK	MIPSA2520D1R0	1.0	0.08	1500	2.5mm x 2.0mm x 1.2mm = 6mm <sup>3</sup>
Murata	LQM2HPN_G0	1.0	0.05	1600	2.5mm x 2.0mm x 0.6mm = 3mm <sup>3</sup>
Coilcraft	EPL2014	1.0	0.059	1600	2.0mm x 2.0mm x 1.4mm = 5.6mm <sup>3</sup>
TDK	MLP2520S	1.0	0.06	1500	2.0mm x 2.5mm x 1.0mm = 5mm <sup>3</sup>
TOKO	MIPF2520	2.2	0.05	1500	2.5mm x 2.0mm x 1.0mm = 5mm <sup>3</sup>
TOKO	DFE252012C	1	0.06	2500	2.5 x 2.0 x 1.2 = 6mm <sup>3</sup>
Murata	LQM32PN1R0MG0	1	0.06	1800	3.2 x 2.5 x 0.9 = 7.2mm <sup>3</sup>



## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

**Table 3. Charge Current Settings for 47mΩ and 68mΩ Sense Resistors**

BIT	V <sub>REG</sub> (mV)	I <sub>CHARGE</sub> (mA) R <sub>SNS</sub> = 47mΩ	I <sub>CHARGE</sub> (mA) R <sub>SNS</sub> = 68mΩ
V <sub>(CHGCC&lt;11110&gt;)</sub>	70.5	1500	1037
V <sub>(CHGCC&lt;10100&gt;)</sub>	47	1000	691
V <sub>(CHGCC&lt;01010&gt;)</sub>	23.5	500	345

**Table 4. Topoff Current Settings for 47mΩ and 68mΩ Sense Resistors**

BIT	V <sub>(TOPOFF)</sub>	I <sub>(TOPOFF)</sub> (mA) R <sub>SNS</sub> = 47mΩ	I <sub>(TOPOFF)</sub> (mA) R <sub>SNS</sub> = 68mΩ
V <sub>(TOPOFF&lt;&gt;)</sub>	9.4	200	138.2
V <sub>(TOPOFF&lt;&gt;)</sub>	4.7	100	69.1
V <sub>(TOPOFF&lt;&gt;)</sub>	2.35	50	34.5

**Table 5. High-Level I<sup>2</sup>C Register Map**

REGISTER NAME	REGISTER ADDRESS	R/W	RESET CONDITION	B7	B6	B5	B4	B3	B2	B1	B0
CHGINT	0x0F	R	VSTBY or rising edge of SFO_POK	AICL_I	TOPOFF	DC_OVP	DC_UVP	CHG_I	BAT_I	THM_I	POWERUP
CHGINT_MSK	0x01	R/W	VSTBY or rising edge of SFO_POK	AICL_M	TOPOFF_M	DC_OVP_M	DC_UVP_M	CHG_M	BAT_M	THM_M	—
CHG_STAT	0x02	R	VSTBY or rising edge of SFO_POK	DCV_OK	DCI_OK	DCOVP_OK	DCUVP_OK	CHG_OK	BAT_OK	THM_OK	—
DETAILS1	0x03	R	VSTBY or rising edge of SFO_POK	DC_V	DC_I	DC_OVP	DC_UVP	RSVD	THM_D[2:0]		
DETAILS2	0x04	R	VSTBY or rising edge of SFO_POK	RSVD	RSVD	BAT_DT[1:0]			CHG_D[2:0]		



## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

**Table 5. High-Level I2C Register Map (continued)**

REGISTER NAME	REGISTER ADDRESS	R/W	RESET CONDITION	B7	B6	B5	B4	B3	B2	B1	B0
CHGCTL1	0x05	R/W	VSTBY or rising edge of SFO_POK	RSVD	RSVD	RSVD	RSVD	RSVD	RSVD	DCMON_DIS	USB_SUS
FCHGCRNT	0x06	R/W	VSTBY or rising edge of SFO_POK	FCHGT[2:0]			CHGCC[3:0]				
DCCRNT	0x07	R/W	VSTBY or rising edge of SFO_POK	RSVD	CHGR STRT	DCILMT[5:0]					
TOPOFF	0x08	R/W	VSTBY or rising edge of SFO_POK	TOPOFFT[2:0]			IFST2P8	TOFFS[1:0]		CHGCV[1:0]	
TEMPREG	0x09	R/W	VSTBY or rising edge of SFO_POK	RTEMP[1:0]		THM CNFG	RSVD	RSVD	THMRES		SAFE REG
PROTCMD	0x0A	R/W	VSTBY or rising edge of SFO_POK	RSVD	RSVD	RSVD	RSVD	C_PROT[1:0]		RSVD	RSVD

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### I<sup>2</sup>C Registers

#### Charger Interrupt Requests

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	RESET VALUE	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
CHGINT	0x6A	0x0F	0x01	R	Cleared upon read	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	AICL_I	TOPOFF	DC_OVP	DC_UVP	CHG_I	BAT_I	THM_I	POWERUP

BIT	NAME	BIT DESCRIPTION	DEFAULT
B7	AICL_I	<b>DC Interrupt</b> 0 = The DC status has not changed since the last time this bit was read. 1 = The DC status has changed since the last time this bit was read.	0
B6	TOPOFF	<b>Topoff Interrupt</b> 0 = The charger topoff status has not changed since the last time this bit was read. 1 = The charger has entered topoff.	0
B5	DC_OVP	<b>DC Overvoltage Interrupt</b> 0 = The DC status has not changed since the last time this bit was read. 1 = The DC status has changed since the last time this bit was read.	0
B4	DC_UVP	<b>DC Undervoltage Interrupt</b> 0 = The DC status has not changed since the last time this bit was read. 1 = The DC status has changed since the last time this bit was read.	0
B3	CHG_I	<b>Charge Current Interrupt</b> 0 = The charger status has not changed since the last time this bit was read. 1 = The charger status has changed since the last time this bit was read.	0
B2	BAT_I	<b>Battery Interrupt</b> 0 = The battery status has not changed since the last time this bit was read. 1 = The battery status has changed since the last time this bit was read.	0
B1	THM_I	<b>Thermistor Interrupt</b> 0 = The THM status has not changed since the last time this bit was read. 1 = The THM status has changed since the last time this bit was read.	0
B0	POWERUP	<b>Power-Up OK Interrupt</b> 0 = The I <sup>2</sup> C registers have not been reset since the last time this bit was read. 1 = The I <sup>2</sup> C registers have been reset since the last time this bit was read.	1

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Charger Interrupt Masks

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	RESET VALUE	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
CHGINT_MASK	0x6A	0x01	0x00	R/W	N/A	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	AICL_M	TOPOFF_M	DC_OVP_M	DC_UVP_M	CHG_M	BAT_M	THM_M	—

BIT	NAME	BIT DESCRIPTION	DEFAULT
B7	AICL_M	<b>DC Interrupt Mask</b> 0 = unmask 1 = mask	0
B6	TOPOFF_M	<b>Topoff Interrupt Mask</b> 0 = unmask 1 = mask	0
B5	DC_OVP_M	<b>DC Overvoltage Interrupt Mask</b> 0 = unmask 1 = mask	0
B4	DC_UVP_M	<b>DC Undervoltage Interrupt Mask</b> 0 = unmask 1 = mask	0
B3	CHG_M	<b>Charger-Current Interrupt Mask</b> 0 = unmask 1 = mask	0
B2	BAT_M	<b>Battery Interrupt Mask</b> 0 = unmask 1 = mask	0
B1	THM_M	<b>Thermistor Interrupt Mask</b> 0 = unmask 1 = mask	0

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Charger Status

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	RESET VALUE	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
CHG_STAT	0x6A	0x02	R	N/A		VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	DCV_OK	DCI_OK	DCOVP_OK	DCUVP_OK	CHG_OK	BAT_OK	THM_OK	—

BIT	NAME	BIT DESCRIPTION
B7	DCV_OK	Single-Bit DC Input Status Indicator. See DC_DTLS[1:0] for more information. 1 = The DC input is invalid. DC_V = 1. 0 = The DC input is valid. DC_DTLS[1:0]=DC_V=0.
B6	DCI_OK	1 = The DC input is invalid. DC_I = 1. 0 = The DC input is valid. DC_DTLS[1:0] =DCI=0.
B5	DCOVP_OK	1 = The DC input is invalid. DC_OVP = 1. 0 = The DC input is valid. DC_DTLS[1:0] =DC_OVP=0.
B4	DCUVP_OK	1 = The DC UVP is invalid. 0 = The DC input is valid. DC_DTLS[1:0] =DC_UVP=0.
B3	CHG_OK	Single-Bit Charger Status Indicator. See CHG_DTLS[3:0] for more information. 1 = The charger has suspended charging. CHG_DTLS[3:0] = 0b0101 or 0b0110 or 0b0111 or 0b1000. 0 = The charger is okay. CHG_DTLS[3:0] ≠ 0b0101 or 0b0110 or 0b0111 or 0b1000.
B2	BAT_OK	Single-Bit Battery Status Indicator. See BAT_DTLS[1:0] for more information. 1 = The battery has an issue and the charger has been suspended. BAT_DTLS[1:0]=0b01 or 0b11. 0 = The battery is okay. BAT_DTLS[1:0]=0b10 or 0b00.
B1	THM_OK	Single-Bit Thermistor Status Indicator. See the THM_DTLS[2:0] for more information. 1 = The thermistor temperature is outside of the allowable range for charging. THM_DTLS[2:0] ≠ 0b100 or 0b101. 0 = The thermistor temperature is inside of the allowable range for charging. THM_DTLS[2:0] = 0b100 or 0b101.

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### DETAILS1

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
DETAILS1	0x6A	0x03	R	N/A	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	DC_V	DC_I	DC_OVP	DC_UVP	RSVD	THM_D[2:0]		

BIT NAME	DESCRIPTION	DEFAULT
DC_V	<b>DC Details</b> 0b0 = $V_{DC}$ is in AICL mode. $3V < V_{DC} < 4.5$ 0b1 = $V_{DC}$ is valid. $V_{DC} > 4.5$	Valid
DC_I	<b>DC Details</b> 0b0 = $I_{DC}$ is valid. $IDC < \text{Input current limit}$ 0b1 = $I_{DC}$ is invalid. $IDC > \text{Input current limit}$	Valid
DC_OVP	<b>DC Details</b> 0b0 = $V_{DC}$ is valid. $V_{DC} < V_{DCOVLO}$ 0b1 = $V_{DC}$ is invalid. $V_{DC} > V_{DCOVLO}$	Valid
DC_UVP	<b>DC Details</b> 0b0 = $V_{DC}$ is valid. $V_{DC} > V_{DCUVLO}$ 0b1 = $V_{DC}$ is invalid. $V_{DC} < V_{DCUVLO}$	Valid
RSVD	Reserved	—
THM_D[2:0]	<b>Thermistor Details</b> 0b001 = Low temperature and charging suspended (cold, $< 0^{\circ}\text{C}$ ) 0b010 = Low temperature charging (cool, $> 0^{\circ}\text{C}$ and $< 10^{\circ}\text{C}$ ) 0b011 = Standard temperature charging (normal, $> 10^{\circ}\text{C}$ and $< 45^{\circ}\text{C}$ ) 0b100 = High temperature charging (warm, $> 45^{\circ}\text{C}$ and $< 60^{\circ}\text{C}$ ) 0b101 = High temperature and charging suspended ( $> 60^{\circ}\text{C}$ )	Valid

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### DETAILS2

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
DETAILS2	0x6A	0x04	R	N/A	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME			BAT_D[1:0]		CHG_D[3:0]			

NAME	DESCRIPTION	DEFAULT
BAT_D[1:0]	<b>Battery Details</b> 0b00 = $V_{BAT} < 2.1V$ . This condition is also reported in the CHG_DTLS[3:0] as 0b0000 0b01 = The battery is taking longer than expected to charge. This could be due to high system currents, an old battery, a damaged battery or something else. Charging has suspended and the charger is in its timer fault mode. This condition is also reported in the CHG_DTLS[3:0] as 0b0110. 0b10 = The battery is OK. 0b11 = The battery voltage is greater than the battery overvoltage flag threshold (BATOV), BATOV is set to a percentage above the $V_{BATREG}$ target as programmed by CHGCV. Note that this flag is only generated when there is a valid DC input.	N/A
CHG_D[3:0]	<b>Charger Details</b> 0b0000 = Charger is in dead-battery region. 0b0001 = Charger is in prequalification mode. 0b0010 = Charger is in fast-charge constant-current mode. 0b0011 = Charger is in fast-charge constant voltage mode. 0b0100 = Charger is in top-off mode. 0b0101 = Charger is in done mode. 0b0110 = Charger is in timer fault mode. 0b0111 = Charger is in temperature suspend mode, see THM_DTLS[2:0]. 0b1000 = Charger is off, DC is invalid and/or charger is disabled. 0b1001 = Charger is in prequalification, fast-charge or top-off modes and is operating with its thermal loop active (i.e., the junction temperature is greater than the value set by REGTEMP[1:0].	N/A

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### USB Suspend

#### Input Voltage Disable

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
CHGCNTL1	0x6A	0x05	R/W	N/A	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME							DCMON_DIS	USB_SUS

BIT NAME	BIT DESCRIPTION	DEFAULT
—	—	0
—	—	0
—	—	0
—	—	0
—	—	0
—	—	0
DCMON_DIS	DCMON_DIS, disabled the monitoring of input voltage by the input power limiter	0
USB_SUS	USB suspend, low-quiescent current standby mode	0

#### Fast-Charge Current and Timer Control

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
FCHGCRNT	0x6A	0x06	R/W	Protected with CPROT[1:0]	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	FCHGT[2:0]			CHGCC[4:0]				

BIT	NAME	DESCRIPTION	DEFAULT
B4–B0	CHGCC[4:0]	<b>Fast-Charge Current Selection</b> When the charger is enabled, the charge current limit is set by these bits. These bits range from 250mA to 1.55A in 50mA steps. See Table 6 for a complete listing of codes for CHGCC[4:0]	500mA
B7, B6, B5	FCHGT[2:0]	<b>Fast-Charge Timer Duration (t<sub>FC</sub>)</b> 0x00 = 0b000 = disable 0x01 = 0b001 = 4hrs 0x02 = 0b010 = 5hrs 0x03 = 0b011 = 6hrs 0x04 = 0b100 = 7hrs 0x05 = 0b101 = 8hrs 0x06 = 0b110 = 9hrs 0x07 = 0b111 = 10hrs	0b010

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

Table 6. CHGCC[4:0] Decoding

CHGCC[4:0]	CHARGE CURRENT with 47mΩ Sense (mA)
0 0 0 0 0	250
0 0 0 0 1	250
0 0 0 1 0	250
0 0 0 1 1	250
0 0 1 0 0	250
0 0 1 0 1	250
0 0 1 1 0	300
0 0 1 1 1	350
0 1 0 0 0	400
0 1 0 0 1	450
0 1 0 1 0	500
0 1 0 1 1	550
0 1 1 0 0	600
0 1 1 0 1	650
0 1 1 1 0	700
0 1 1 1 1	750

CHGCC[4:0]	CHARGE CURRENT with 47mΩ Sense (mA)
1 0 0 0 0	800
1 0 0 0 1	850
1 0 0 1 0	900
1 0 0 1 1	950
1 0 1 0 0	1000
1 0 1 0 1	1050
1 0 1 1 0	1100
1 0 1 1 1	1150
1 1 0 0 0	1200
1 1 0 0 1	1250
1 1 0 1 0	1300
1 1 0 1 1	1350
1 1 1 0 0	1400
1 1 1 0 1	1450
1 1 1 1 0	1500
1 1 1 1 1	1550

### Input-Current Limit and Charger Restart Threshold

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
DCCRNT	0x6A	0x07	R/W	Protected with CPROT[1:0]	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME		CHGRSTRT	DCILMT[5:0]					

NAME	DESCRIPTION	DEFAULT
CHGRSTRT	<b>Fast-Charge Restart Threshold</b> 0b0 = -150mV 0b1 = -100mV	0b0
DCILMT[5:0]	<b>Input-Current Limit Selection</b> When the DC-DC converter is on, the V <sub>DC</sub> input current limit is set by this register. The bits set 100mA, to 1.5A in 25mA steps. See Table 7 for a complete listing of the codes for DCILMT[5:0].	500mA



# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

Table 7. DCILMT[5:0] Bit Code

DCILMT[5:0]						TARGET INPUT LIMIT (mA)
0	0	0	0	0	0	100
0	0	0	0	0	1	100
0	0	0	0	1	0	100
0	0	0	0	1	1	100
0	0	0	1	0	0	100
0	0	0	1	0	1	100
0	0	0	1	1	0	100
0	0	0	1	1	1	100
0	0	1	0	0	0	100
0	0	1	0	0	1	100
0	0	1	0	1	0	250
0	0	1	0	1	1	275
0	0	1	1	0	0	300
0	0	1	1	0	1	325
0	0	1	1	1	0	350
0	0	1	1	1	1	375
0	1	0	0	0	0	400
0	1	0	0	0	1	425
0	1	0	0	1	0	450
0	1	0	0	1	1	475
0	1	0	1	0	0	500
0	1	0	1	0	1	525
0	1	0	1	1	0	550
0	1	0	1	1	1	575
0	1	1	0	0	0	600
0	1	1	0	0	1	625
0	1	1	0	1	0	650
0	1	1	0	1	1	675
0	1	1	1	0	0	700
0	1	1	1	0	1	725
0	1	1	1	1	0	750
0	1	1	1	1	1	775
1	0	0	0	0	0	800
1	0	0	0	0	1	825
1	0	0	0	1	0	850
1	0	0	0	1	1	875
1	0	0	1	0	0	900
1	0	0	1	0	1	925
1	0	0	1	1	0	950
1	0	0	1	1	1	975
1	0	1	0	0	0	1000

**Industry's Smallest 1.55A  
1-Cell Li+ DC-DC Charger****Table 7. DCILMT[5:0] Bit Code (continued)**

DCILMT[5:0]						TARGET INPUT LIMIT (mA)
1	0	1	0	0	1	1025
1	0	1	0	1	0	1050
1	0	1	0	1	1	1075
1	0	1	1	0	0	1100
1	0	1	1	0	1	1125
1	0	1	1	1	0	1150
1	0	1	1	1	1	1175
1	1	0	0	0	0	1200
1	1	0	0	0	1	1225
1	1	0	0	1	0	1250
1	1	0	0	1	1	1275
1	1	0	1	0	0	1300
1	1	0	1	0	1	1325
1	1	0	1	1	0	1350
1	1	0	1	1	1	1375
1	1	1	0	0	0	1400
1	1	1	0	0	1	1425
1	1	1	0	1	0	1450
1	1	1	0	1	1	1475
1	1	1	1	0	0	1500
1	1	1	1	1	1	Disable

**Note:** DCILIM threshold is 95% of target.

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

**Done Current, Timer, GSM Test Mode, and Battery Regulation Voltage**

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
TOPOFF	0x6A	0x08	R/W	Protected with CPROT[1:0]	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	TOFFT[2:0]			IFST2p8	TOFFS[1:0]		CHGCV[1:0]	

NAME	DESCRIPTION	DEFAULT
TOFFT[2:0]	<b>Topoff Timer Setting</b> 0x00 = 0b000 = 0min 0x01 = 0b001 = 10min 0x02 = 0b010 = 20min 0x03 = 0b011 = 30min 0x04 = 0b100 = 40min 0x05 = 0b101 = 50min 0x06 = 0b110 = 60min 0x07 = 0b111 = 70min	0b011
IFST2P8	<b>Scales Maximum Fast-Charge Current to 2.8A</b> This is used as a pulsed customer test mode and the part cannot run 2.8A continuously.	0b0
TOFFS[1:0]	<b>Topoff Current Threshold</b> Topoff timer starts when ICHG reaches this current setting. 0x0 = 0b00 = 50mA 0x1 = 0b01 = 100mA 0x2 = 0b10 = 150mA 0x3 = 0b11 = 200mA	0b00
CHGCV[1:0]	<b>Charge Termination Voltage Setting</b> 0x00 = 0b00 = 4.2V 0x01 = 0b01 = 4.10V 0x02 = 0b10 = 4.35V 0x03 = 0b11 = 4.15V	0b00

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Temperature Regulation

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
TEMPREG	0x6A	0x09	R/W	Protected with CPROT[1:0]	VSTBY INVALID or rising edge of SFO_POK

BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	REGTEMP[1:0]		THM_CNFG	—	—	THMRES[1:0]		SAFETYREG

NAME	BIT DESCRIPTION	DEFAULT
REGTEMP[1:0]	<b>Die-Temperature Thermal Regulation Loop Setpoint</b> 0x0 = 0b00 = 105°C 0x1 = 0b01 = 90°C 0x2 = 0b10 = 120°C 0x3 = 0b11 = Disabled	0b00
THM_CNFG	<b>Thermistor Monitor Configuration</b> 0b0 = The thermistor is continuously monitored. 0b1 = The thermistor is not being monitored.	0b1
Reserved	Reserved	NA
Reserved	Reserved	NA
SAFETYREG	<b>JEITA Safety Region Selection</b> 0 = Safety region 1 1 = Safety region 2	0b0

### Charger Protection

REGISTER NAME	I <sup>2</sup> C SLAVE ADDRESS	REGISTER ADDRESS	ACCESS TYPE	SPECIAL FEATURES	RESET CONDITION
PROTCMD	0x6A	0x0A	R/W	N/A	VSTBY INVALID or rising edge of SFO_POK


BITS	B7	B6	B5	B4	B3	B2	B1	B0
NAME	—	—	—	—	CPROT[1:0]		—	—

NAME	DESCRIPTION	DEFAULT
CPROT[1:0]	<b>Charger-Setting Protection Bits</b> Writing 11 to these bits unlocks the settings for the above registers. Writing any value besides 11 locks these registers. 0b00 = locked 0b01 = locked 0b10 = locked 0b11 = unlocked	0b00

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Simplified Applications Circuit

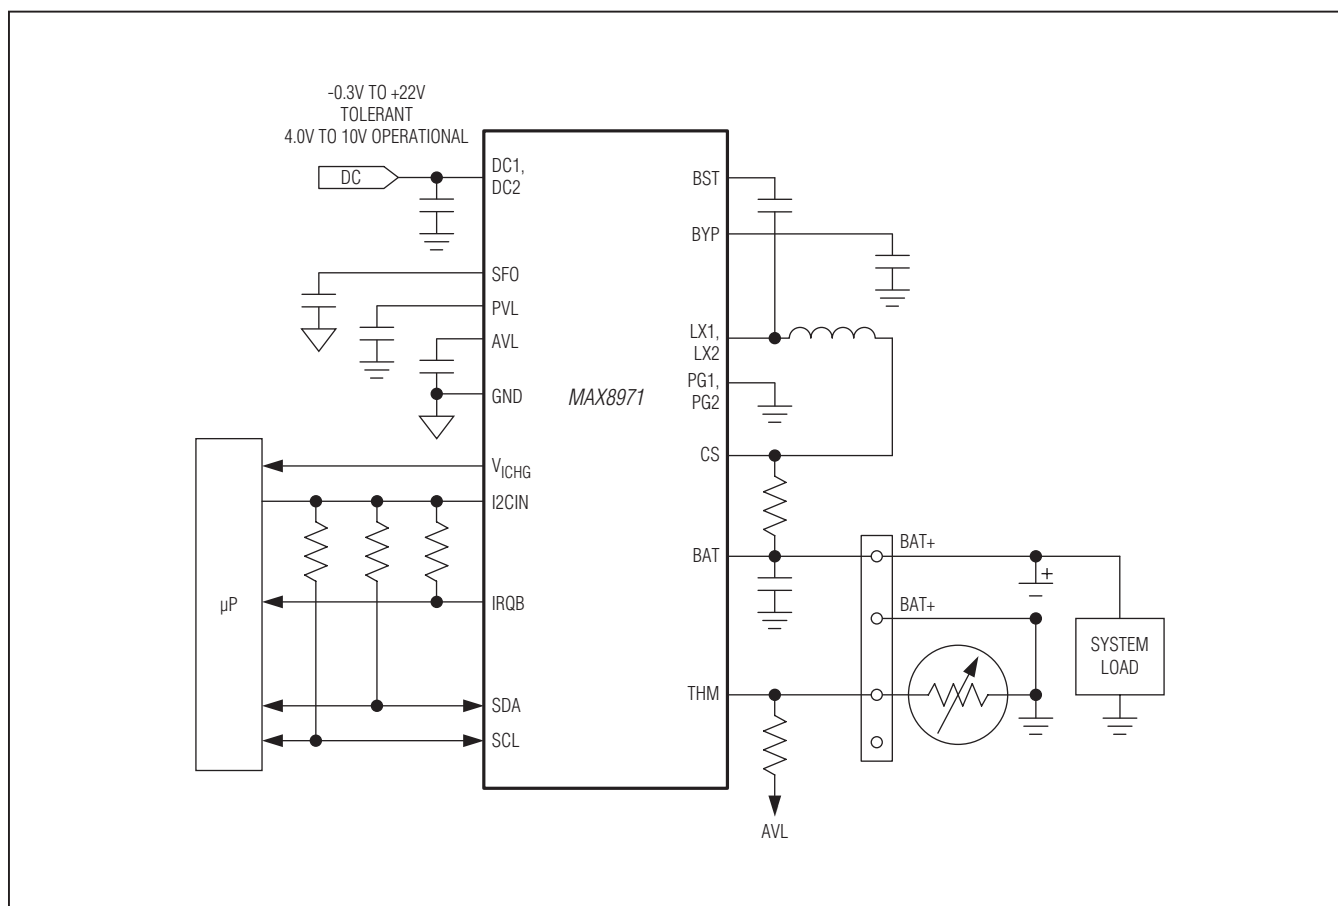

### Ordering Information

PART	TEMP RANGE	PIN-PACKAGE
MAX8971EWP+	-40°C to +85°C	20-Bump WLP (0.4mm pitch)

+Denotes a lead(Pb)-free/RoHS-compliant package.

### Chip Information


PROCESS: BiCMOS

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
20 WLP	W201B2-1	<a href="#">21-0544</a>	Refer to <a href="#">Application Note 1891</a>

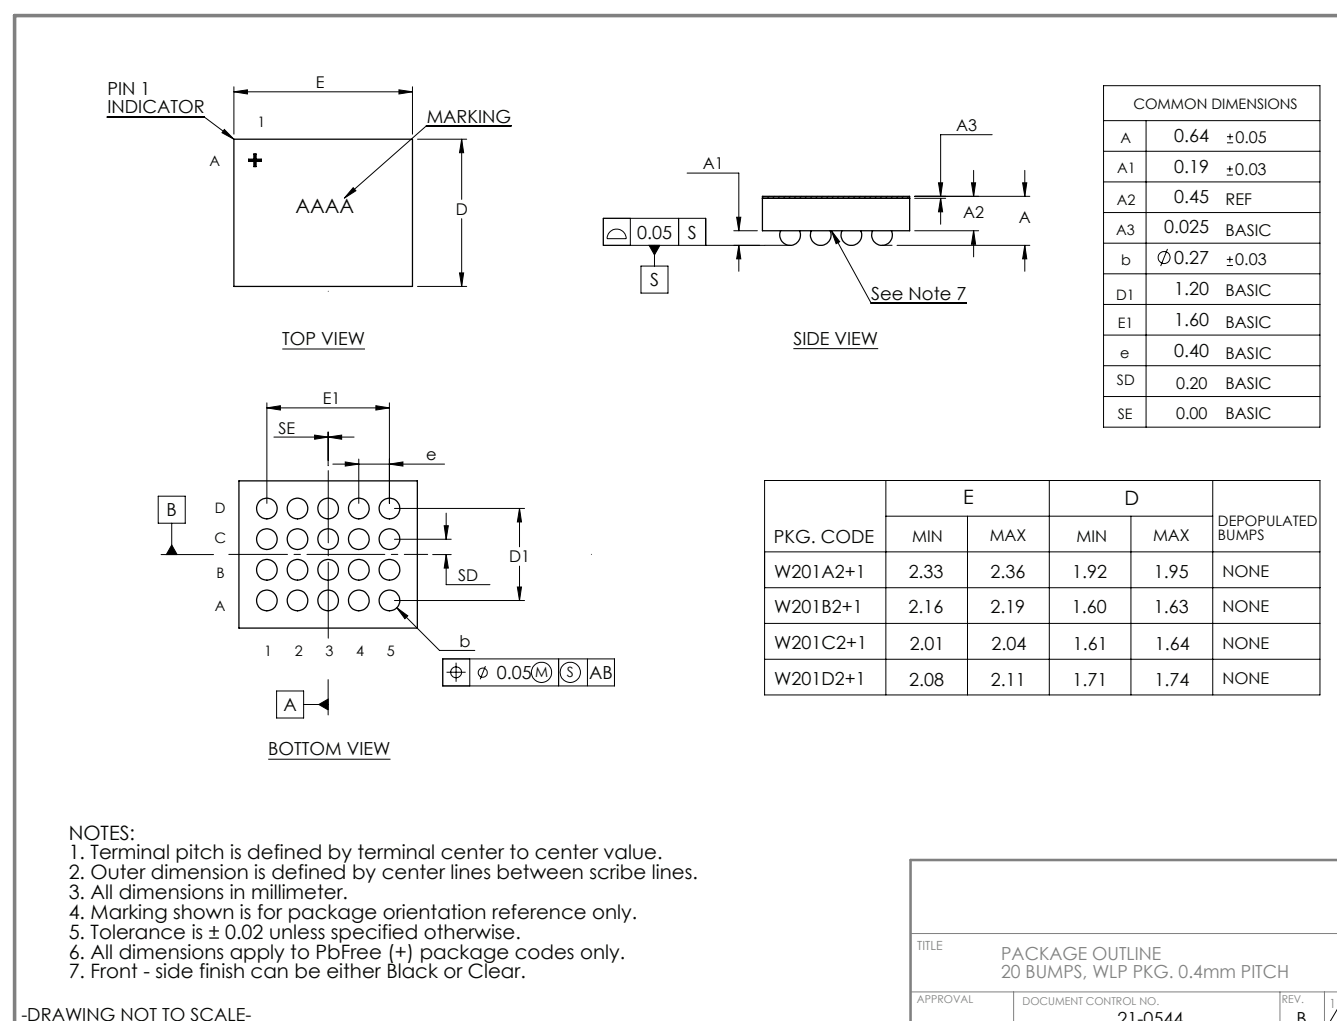

# MAX8971

## Industry's Smallest 1.55A 1-Cell Li+ DC-DC Charger

### *Revision History*

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/12	Initial release	—



Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

**Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000**

**39**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Maxim Integrated:

[MAX8971QEWP+T](#) [MAX8971GEWP+T](#)