

## 1A 200 kHz SuperSwitcher™ Buck Regulator

### Features

- SOIC-8 Package with Up to 1.3A Output Current
- All Surface Mount Solution
- Only Four External Components Required
- Fixed 200 kHz Operation
- 3.3V, 5V, and Adjustable Output Versions
- Internally Compensated with Fast Transient Response
- Wide 4V to 34V Operating Input Voltage Range
- Less than 2  $\mu$ A Typical Shutdown Mode Current
- Up to 90% Efficiency
- Thermal Shutdown
- Overcurrent Protection

### Applications

- Simple 1A High-Efficiency Step-Down Regulator
- Replacement TO-220 and TO-263 Designs
- Efficient Pre-Regulator (5V to 2.5V, 12V to 3.3V, etc.)
- On-Card Switching Regulators
- Positive-to-Negative Converter (Inverting Buck-Boost)
- Simple Battery Charger
- Negative Boost Converter
- Higher Output Current Regulator using External FET

### General Description


The MIC4680 SuperSwitcher™ is an easy-to-use fixed or adjustable output voltage step-down (buck) switch-mode voltage regulator. The 200 kHz MIC4680 achieves up to 1.3A of continuous output current over a wide input range in a 8-lead SOIC.

The MIC4680 is available in 3.3V and 5V fixed output versions or adjustable output down to 1.25V.

The MIC4680 has an input voltage range of 4V to 34V, with excellent line, load, and transient response. The regulator performs cycle-by-cycle current limiting and thermal shutdown for protection under fault conditions. In shutdown mode, the regulator draws less than 2  $\mu$ A of standby current.


The MIC4680 SuperSwitcher regulator requires a minimum number of external components and can operate using a standard series of inductors and capacitors. Frequency compensation is provided internally for fast transient response and ease of use.

### Package Type

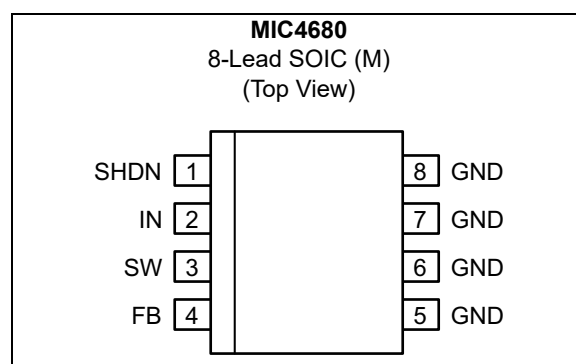


# MIC4680

## Typical Application Circuits

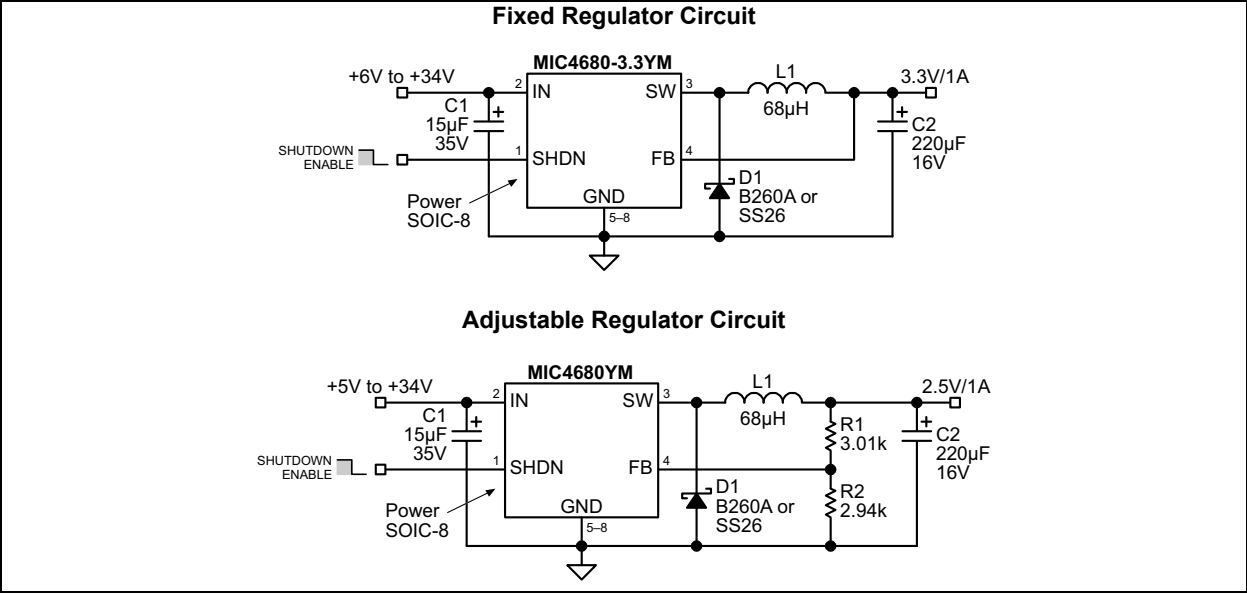

## Functional Block Diagrams

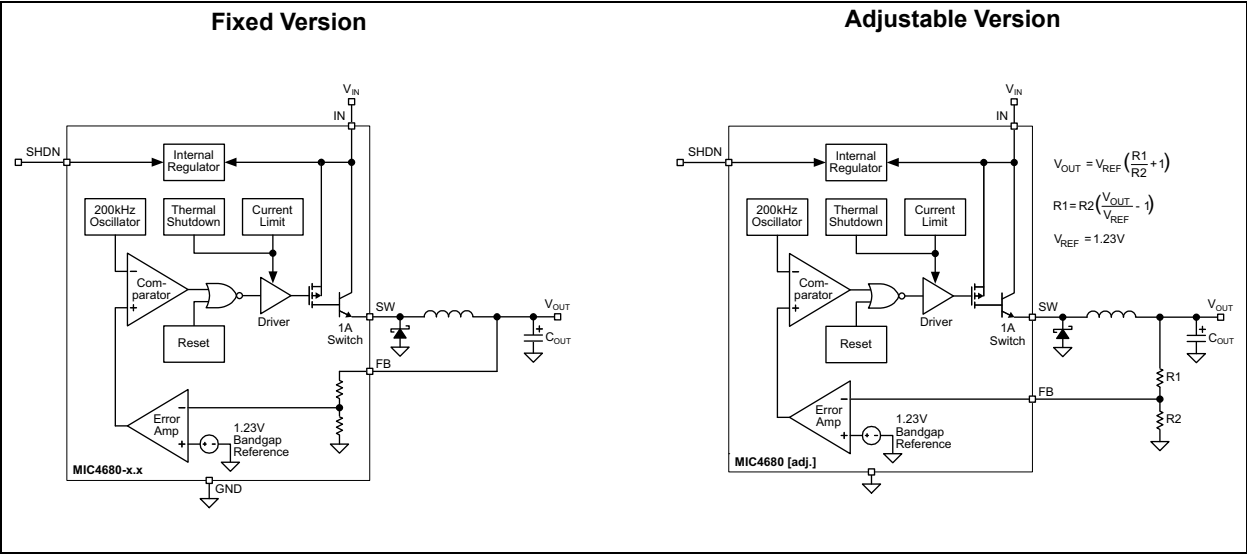

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

Supply Voltage ( $V_{IN}$ ; <a href="#">Note 1</a> )	+38V
Shutdown Voltage ( $V_{SHDN}$ )	–0.3V to +38V
Steady-State Output Switch Voltage ( $V_{SW}$ )	–1V
Feedback Voltage (Adjustable Version; $V_{FB}$ )	+12V
ESD Rating	<a href="#">Note 2</a>

### Operating Ratings ‡

Supply Voltage ( $V_{IN}$ ; <a href="#">Note 3</a> )	+4V to +34V
--	-------------

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ **Notice:** The device is not guaranteed to function outside its operating rating.

**Note 1:** Absolute maximum rating is intended for voltage transients only, prolonged DC operation is not recommended.

**2:** Devices are ESD sensitive. Handling precautions are recommended.

**3:**  $V_{IN(MIN)} = V_{OUT} + 2.5V$  or 4V, whichever is greater.

## ELECTRICAL CHARACTERISTICS

**Electrical Characteristics:**  $V_{IN} = 12V$ ;  $I_{LOAD} = 500\text{ mA}$ ;  $T_J = +25^\circ\text{C}$ , **bold** values valid for  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless noted. ([Note 1](#))

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
<b>MIC4680 Adjustable Voltage Version</b>						
Feedback Voltage	$V_{FB}$	1.217	1.230	1.243	V	$\pm 1\%$
		<b>1.205</b>	—	<b>1.255</b>		$\pm 1\%$
		1.193	1.230	1.267		$8V \leq V_{IN} \leq 34V$ , $0.1A \leq I_{LOAD} \leq 1A$ , $V_{OUT} = 5V$
		<b>1.180</b>	—	<b>1.280</b>		
Maximum Duty Cycle	$DC_{MAX}$	93	97	—	%	$V_{FB} = 1.0V$
Output Leakage Current	$I_{OZ}$	—	50	500	$\mu A$	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = 0V$
		—	4	20	mA	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = -1V$
Quiescent Current	$I_Q$	—	7	12	mA	$V_{FB} = 1.5V$
<b>MIC4680-3.3</b>						
Output Voltage	$V_{OUT}$	3.266	3.3	3.333	V	$\pm 1\%$
		<b>3.201</b>	—	<b>3.399</b>		$\pm 3\%$
		3.168	3.3	3.432		$6V \leq V_{IN} \leq 34V$ , $0.1A \leq I_{LOAD} \leq 1A$
		<b>3.135</b>	—	<b>3.465</b>		
Maximum Duty Cycle	$DC_{MAX}$	93	97	—	%	$V_{FB} = 2.5V$
Output Leakage Current	$I_{OZ}$	—	50	500	$\mu A$	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = 0V$
		—	4	20	mA	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = -1V$

**Note 1:** Test at  $T_A = +85^\circ\text{C}$ , ensured by design, and characterized to  $T_J = +125^\circ\text{C}$ .

# MIC4680


## ELECTRICAL CHARACTERISTICS (CONTINUED)

**Electrical Characteristics:**  $V_{IN} = 12V$ ;  $I_{LOAD} = 500\text{ mA}$ ;  $T_J = +25^\circ\text{C}$ , **bold** values valid for  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless noted. (Note 1)

Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Quiescent Current	$I_Q$	—	7	12	mA	$V_{FB} = 4.0V$
<b>MIC4680-5.0</b>						
Output Voltage	$V_{OUT}$	4.950	5.0	5.05	V	$\pm 1\%$
		<b>4.85</b>	—	<b>5.15</b>		$\pm 3\%$
		4.800	5.0	5.200		$8V \leq V_{IN} \leq 34V$ , $0.1A \leq I_{LOAD} \leq 1A$
		<b>4.750</b>	—	<b>5.250</b>		
Maximum Duty Cycle	$DC_{MAX}$	93	97	—	%	$V_{FB} = 4.0V$
Output Leakage Current	$I_{OZ}$	—	50	500	$\mu\text{A}$	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = 0V$
		—	4	20	mA	$V_{IN} = 34V$ , $V_{SHDN} = 5V$ , $V_{SW} = -1V$
Quiescent Current	$I_Q$	—	7	12	mA	$V_{FB} = 6.0V$
<b>MIC4680-3.3 and MIC4680-5.0</b>						
Frequency Fold Back	—	30	50	100	kHz	—
Oscillator Frequency	$f_{OSC}$	180	200	220	kHz	—
Saturation Voltage	$V_{SAT}$	—	1.4	<b>1.8</b>	V	$I_{OUT} = 1A$
Short-Circuit Current Limit	$I_{SC}$	1.3	1.8	2.5	A	$V_{FB} = 0V$ , see Figure 1-1
Standby Quiescent Current	$I_{STBY}$	—	1.5	—	$\mu\text{A}$	$V_{SHDN} = V_{IN}$
		—	30	100	$\mu\text{A}$	$V_{SHDN} = 5V$ (regulator off)
Shutdown Input Logic Level	$V_{SHDN}$	2	1.6	—	V	Regulator off
		—	1.0	0.8		Regulator on
Shutdown Input Current	$I_{SHDN}$	-10	-0.5	10	$\mu\text{A}$	$V_{SHDN} = 5V$ (regulator off)
		-10	-1.5	10		$V_{SHDN} = 0V$ (regulator on)
Thermal Shutdown	$T_{SHDN}$	—	160	—	$^\circ\text{C}$	—


**Note 1:** Test at  $T_A = +85^\circ\text{C}$ , ensured by design, and characterized to  $T_J = +125^\circ\text{C}$ .

## Test Circuit

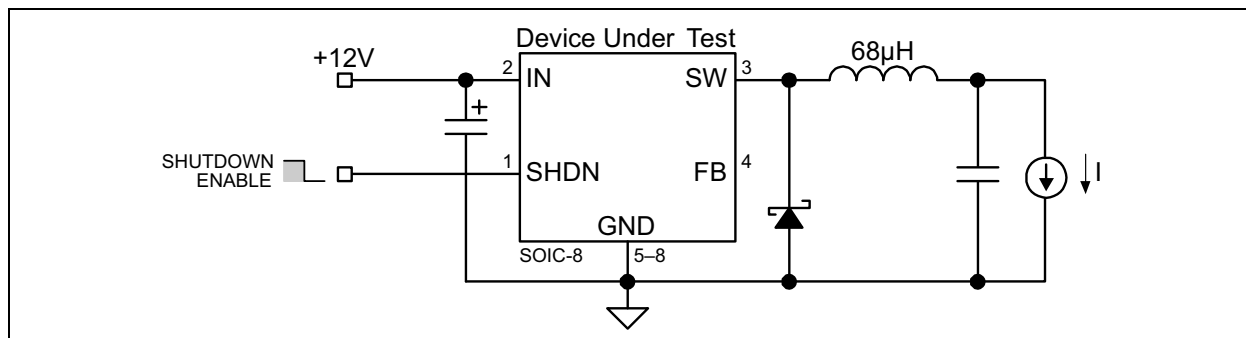

**FIGURE 1-1:** Current Limit Test Circuit.

## Shutdown Input Behavior

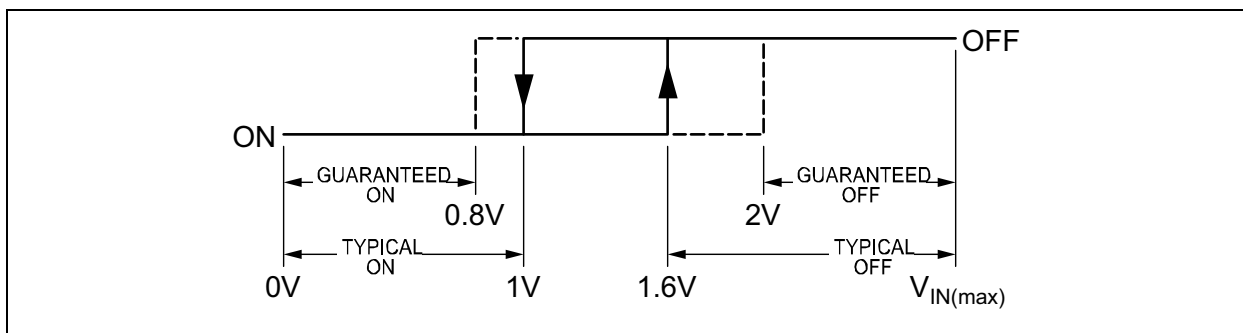

**FIGURE 1-2:** Shutdown Hysteresis.


## TEMPERATURE SPECIFICATIONS

Parameters	Sym.	Min.	Typ.	Max.	Units	Conditions
<b>Temperature Ranges</b>						
Maximum Junction Temperature Range	$T_{J(MAX)}$	-40	—	+125	°C	—
Operating Temperature Range	$T_J$	-40	—	+125	°C	—
Storage Temperature Range	$T_S$	-65	—	+150	°C	—
<b>Package Thermal Resistance</b>						
Thermal Resistance, SOIC 8-Lead	$\theta_{JA}$	—	63	—	°C/W	—


**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum rating. Sustained junction temperatures above that maximum can impact device reliability.

## 2.0 TYPICAL OPERATING CHARACTERISTICS


**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

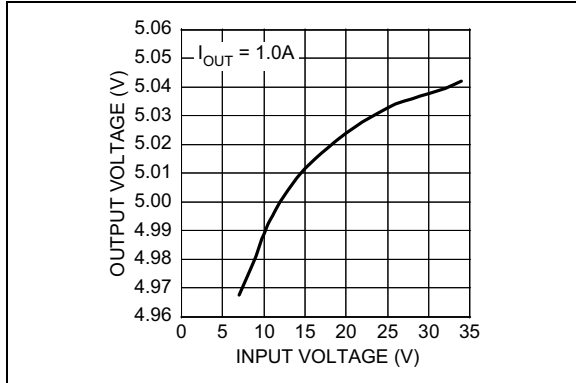


**FIGURE 2-1:** Line Regulation.

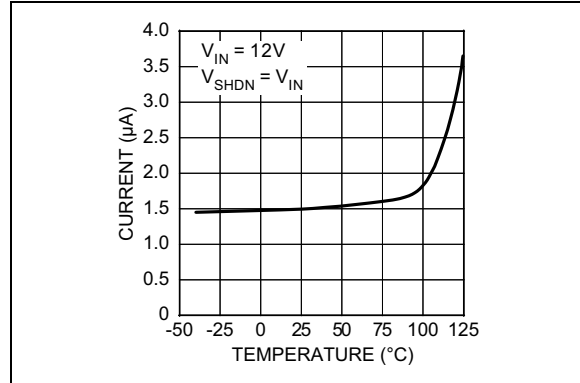


**FIGURE 2-4:** Shutdown Current vs. Temperature.

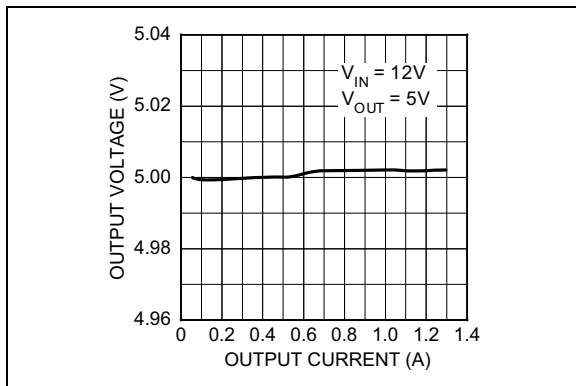


**FIGURE 2-2:** Load Regulation.

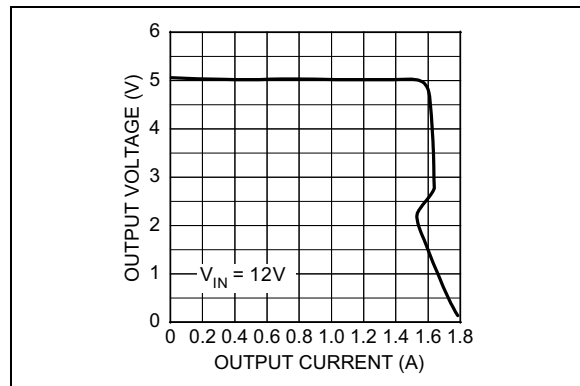


**FIGURE 2-5:** Current Limit Characteristic.

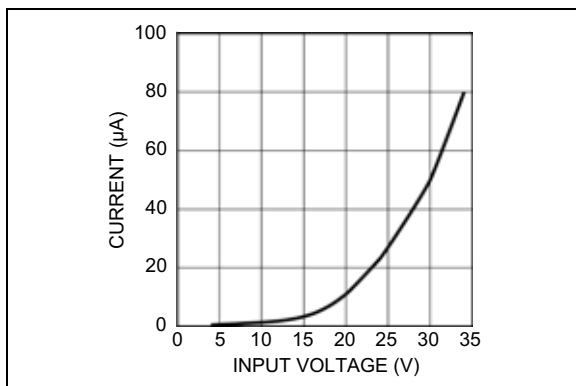


**FIGURE 2-3:** Shutdown Current vs. Input Voltage.

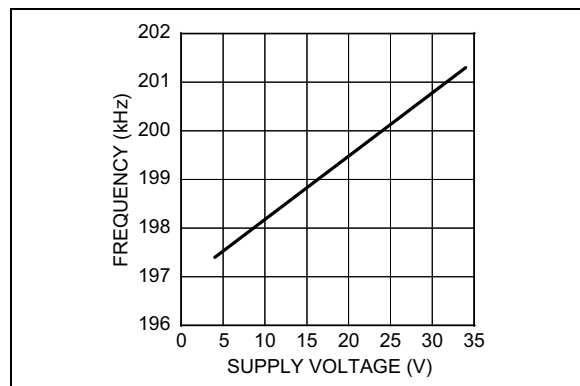


**FIGURE 2-6:** Frequency vs. Supply Voltage.

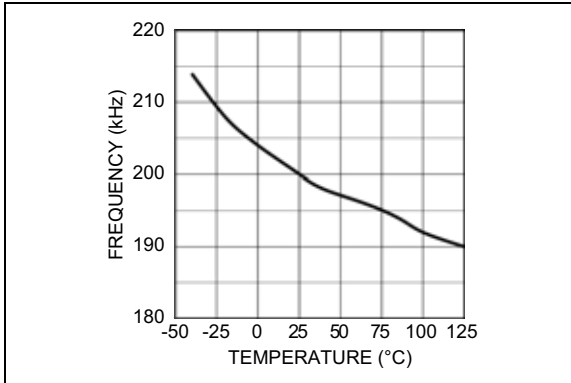


**FIGURE 2-7:** Frequency vs. Temperature.

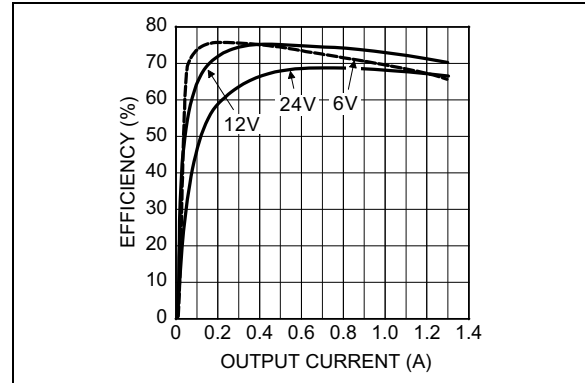


**FIGURE 2-10:** 3.3V Output Efficiency.

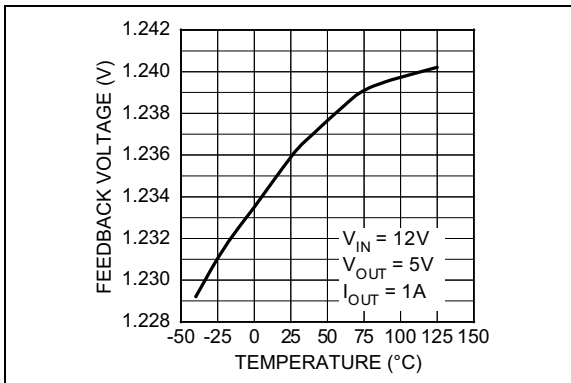


**FIGURE 2-8:** Feedback Voltage vs. Temperature.

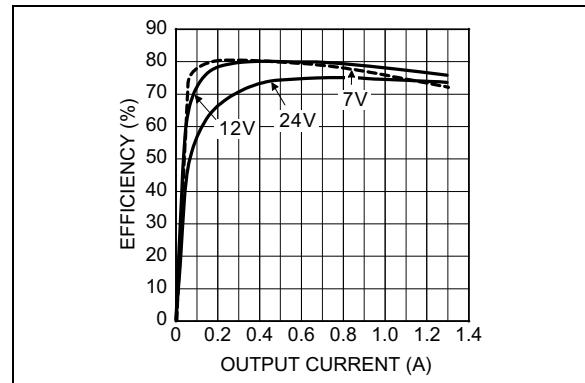


**FIGURE 2-11:** 5V Output Efficiency.

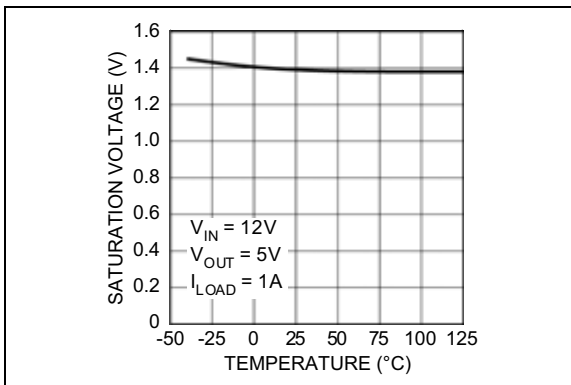


**FIGURE 2-9:** Saturation Voltage vs. Temperature.

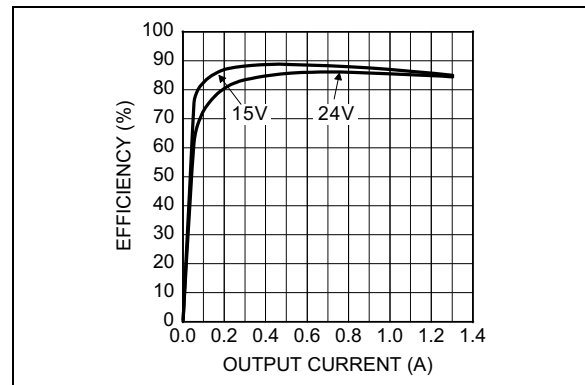


**FIGURE 2-12:** 12V Output Efficiency.

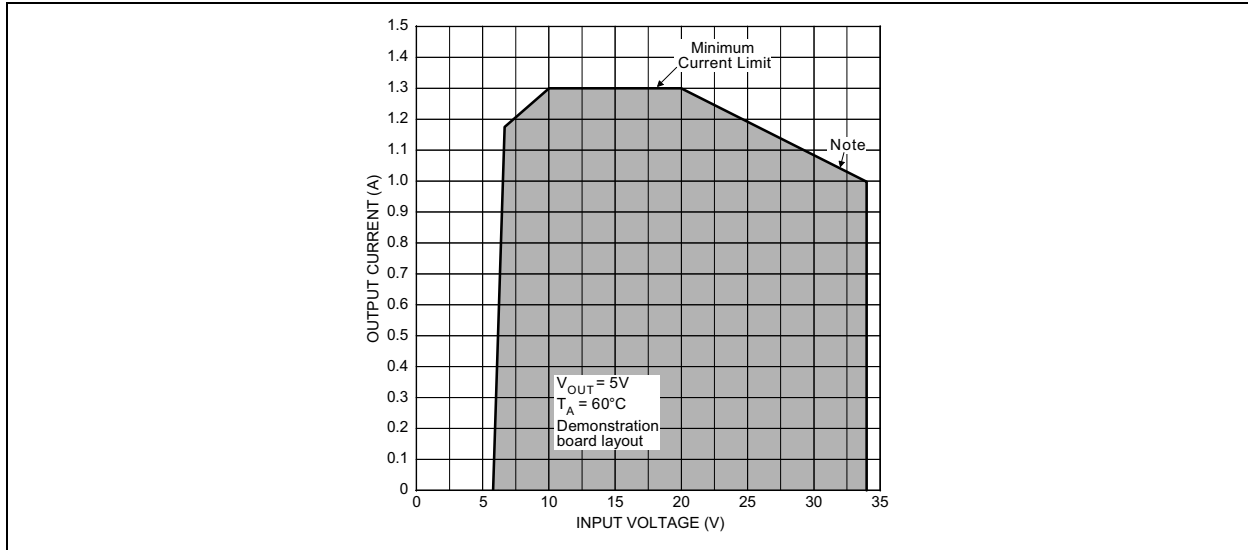

**FIGURE 2-13:** Safe Operating Area.

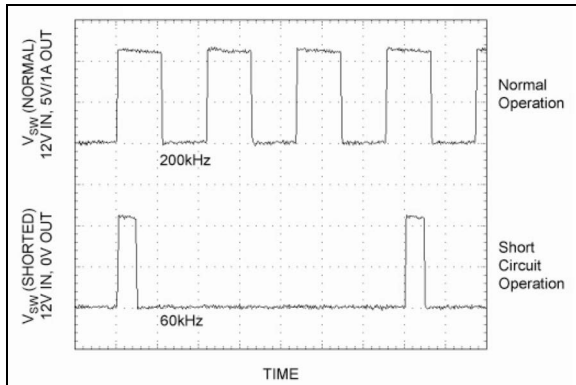

**FIGURE 2-14:** Switching Frequency Foldback.

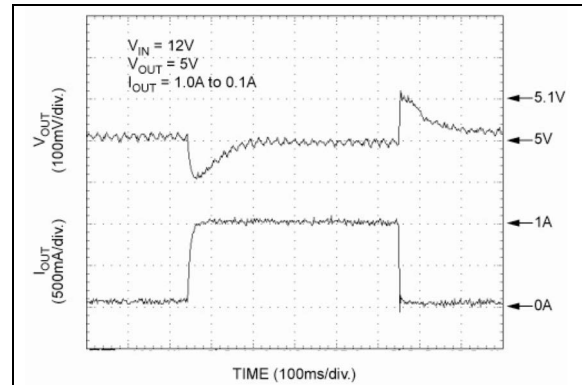

**FIGURE 2-15:** Load Transient.


## 2.1 Frequency Foldback

The MIC4680 folds the switching frequency back during a hard short-circuit condition to reduce the energy per cycle and protect the device.




## 2.2 Bode Plots


The following bode plots show that the MIC4680 is stable over all conditions using a 68  $\mu\text{F}$  inductor ( $L$ ) and a 220  $\mu\text{F}$  output capacitor ( $C_{\text{OUT}}$ ). To ensure stability, it is a good practice to maintain a phase margin of greater than 35°.

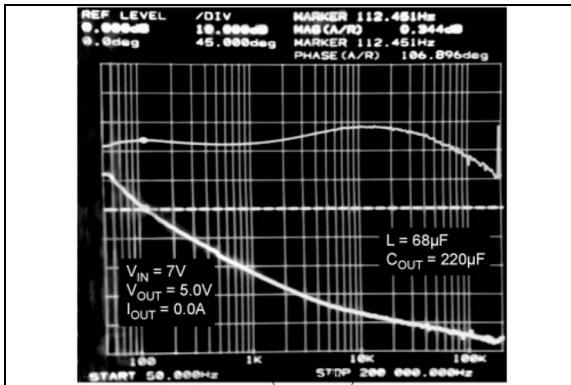


**FIGURE 2-16:** No-Load Stability, Phase Margin = 106°.

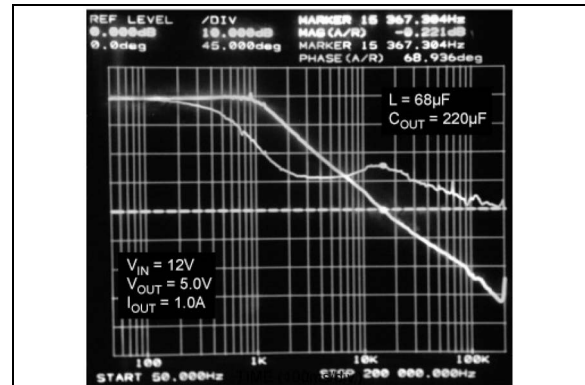


**FIGURE 2-19:** Full-Load Stability, Phase Margin = 69°.

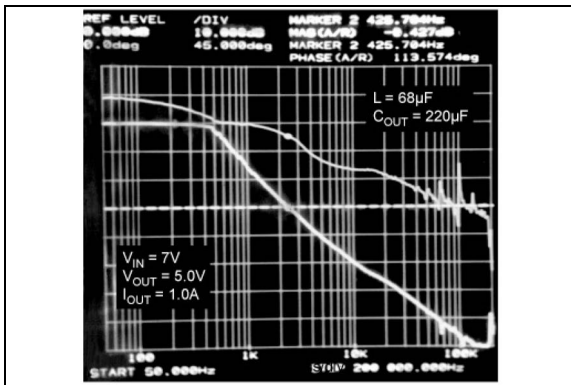


**FIGURE 2-17:** Full-Load Stability, Phase Margin = 114°.

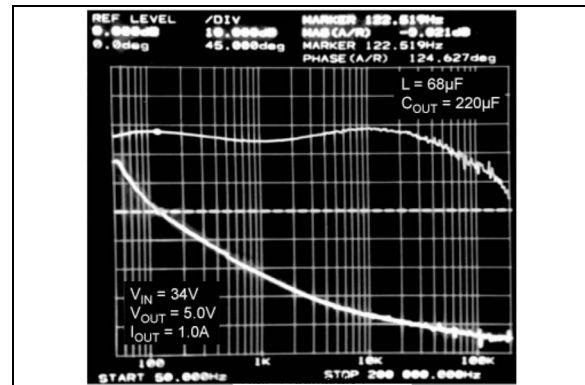

**FIGURE 2-20:** No-Load Stability, Phase Margin = 125°.

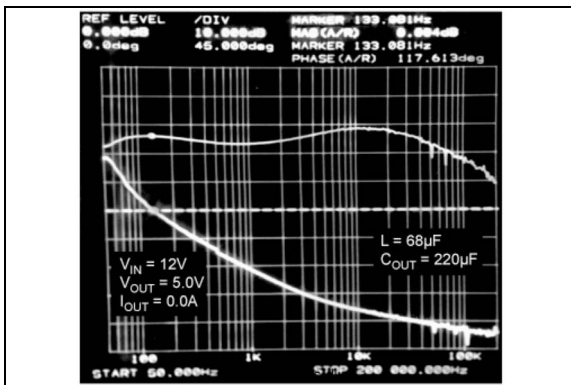

**FIGURE 2-18:** No-Load Stability, Phase Margin = 117°.

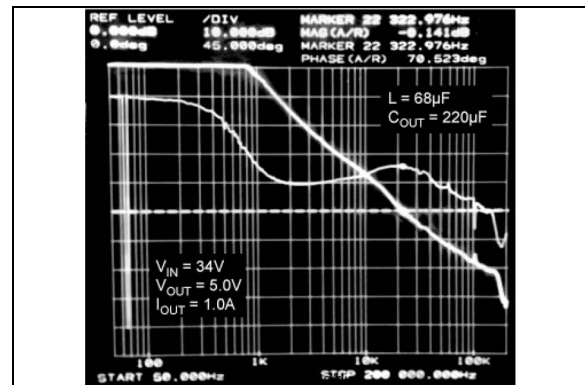

**FIGURE 2-21:** Full-Load Stability, Phase Margin = 71°.

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

Pin Number	Pin Name	Description
1	SHDN	Shutdown (Input): Logic low enables regulator. Logic high (>1.6V) shuts down regulator.
2	VIN	Supply Voltage (Input): Unregulated +4V to +34V supply voltage.
3	SW	Switch (Output): Emitter of NPN output switch. Connect to external storage inductor and Schottky diode.
4	FB	Feedback (Input): Connect to output on fixed output voltage versions, or to 1.23V tap of voltage-divider network for adjustable version.
5, 6, 7, 8	GND	Ground.

## 4.0 FUNCTIONAL DESCRIPTION

The MIC4680 is a variable duty cycle switch-mode regulator with an internal power switch. Refer to the [Functional Block Diagrams](#).

### 4.1 Supply Voltage

The MIC4680 operates from a +4V to +34V unregulated input. Highest efficiency operation is from a supply voltage around +15V. See [Figure 2-10](#) through [Figure 2-12](#).

### 4.2 Enable/Shutdown

The shutdown (SHDN) input is TTL compatible. Ground the input if unused. A logic low enables the regulator. A logic high shuts down the internal regulator which reduces the current to typically 1.5  $\mu$ A when  $V_{SHDN} = V_{IN} = 12$ V and 30  $\mu$ A when  $V_{SHDN} = 5$ V. See [Figure 1-2](#).

### 4.3 Feedback

Fixed-voltage versions of the regulator have an internal resistive divider from the feedback (FB) pin. Connect FB directly to the output voltage.

Adjustable versions require an external resistive voltage divider from the output voltage to ground, center tapped to the FB pin. See [Table 5-1](#) for recommended resistor values.

### 4.4 Duty Cycle Control

A fixed-gain error amplifier compares the feedback signal with a 1.23V bandgap voltage reference. The resulting error amplifier output voltage is compared to a 200 kHz sawtooth waveform to produce a voltage-controlled variable duty cycle output.

A higher feedback voltage increases the error amplifier output voltage. A higher error amplifier voltage (comparator inverting input) causes the comparator to detect only the peaks of the sawtooth, reducing the duty cycle of the comparator output. A lower feedback voltage increases the duty cycle. The MIC4680 uses a voltage mode control architecture.

### 4.5 Output Switching

When the internal switch is on, an increasing current flows from the supply  $V_{IN}$ , through external storage inductor L1, to output capacitor  $C_{OUT}$  and the load. Energy is stored in the inductor as the current increases with time.

When the internal switch is turned off, the collapse of the magnetic field in L1 forces current to flow through fast recovery diode D1, charging  $C_{OUT}$ .

### 4.6 Output Capacitor

External output capacitor  $C_{OUT}$  provides stabilization and reduces ripple. See the [Bode Plots](#) for additional information.

### 4.7 Return Paths

During the ON portion of the cycle, the output capacitor and load currents return to the supply ground. During the OFF portion of the cycle, current is being supplied to the output capacitor and load by storage inductor L1, which means that D1 is part of the high-current return path.


# MIC4680

## 5.0 APPLICATIONS INFORMATION

### 5.1 Adjustable Regulators

Adjustable regulators require a 1.23V feedback signal. Recommended voltage-divider resistor values for common output voltages are included in [Table 5-1](#).

For other voltages, the resistor values can be determined using the following formulas.

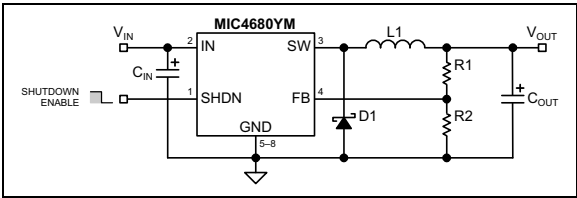

#### EQUATION 5-1:

$$V_{OUT} = V_{REF} \times \left( \frac{R1}{R2} + 1 \right)$$

#### EQUATION 5-2:

$$R1 = R2 \times \left( \frac{V_{OUT}}{V_{REF}} - 1 \right)$$
$$R2 = \frac{R1}{V_{OUT}/V_{REF} - 1}$$

Where:  
V<sub>REF</sub> = 1.23V

TABLE 5-1: RECOMMENDED COMPONENTS FOR COMMON OUTPUT VOLTAGES

V <sub>OUT</sub>	R1 <sup>1 2</sup>	R2 <sup>1 2</sup>	C <sub>IN</sub>	D1	L1	C <sub>OUT</sub>
1.8V	3.01 kΩ	6.495 kΩ	15 μF 35V T495X156K035ATE 200	2A 60V Schottky B260A Vishay-Diode, Inc or SS26 General Semiconductor	68 μH 1.5A Coiltronics UP2B-680 or Sumida CDRH125-680MC <sup>3</sup> or Sumida CDRH124-680MC <sup>3</sup>	220 μF 10V T495X227K010ATE 060
2.5V	3.01 kΩ	2.915 kΩ				
3.3V	3.01 kΩ	1.788 kΩ				
5.0V	3.01 kΩ	982Ω				
6.0V	3.01 kΩ	776Ω				

- Note 1:** All resistors 1%.
- 2:** Nearest available resistor values.
- 3:** Shielded magnetics for low-RFI applications.

## 5.2 Thermal Considerations

The MIC4680 SuperSwitcher features the power SOIC-8. This package has a standard 8-pin small-outline package profile but with much higher power dissipation than a standard SOIC-8. The MIC4680 SuperSwitcher is the first DC-to-DC converter to take full advantage of this package.

The reason that the power SOIC-8 has higher power dissipation (lower thermal resistance) is that pins 5 through 8 and the die-attach paddle are a single piece of metal. The die is attached to the paddle with thermally conductive adhesive. This provides a low thermal resistance path from the junction of the die to the ground pins. This design significantly improves package power dissipation by allowing excellent heat transfer through the ground leads to the printed circuit board.

One of the limitation of the maximum output current on any MIC4680 design is the junction-to-ambient thermal resistance ( $\theta_{JA}$ ) of the design (package and ground plane). Examining  $\theta_{JA}$  in more detail:

### EQUATION 5-3:

$$\theta_{JA} = \theta_{JC} + \theta_{CA}$$

Where:

$\theta_{JC}$  = Junction-to-case thermal resistance.

$\theta_{CA}$  = Case-to-ambient thermal resistance.

$\theta_{JC}$  is a relatively constant 20°C/W for a power SOIC-8.

$\theta_{CA}$  is dependent on layout and is primarily governed by the connection of pins 5 through 8 to the ground plane. The purpose of the ground plane is to function as a heat sink.


$\theta_{JA}$  is ideally 63°C/W but will vary depending on the size of the ground plane to which the power SOIC-8 is attached.

## 5.3 Determining Ground-Plane Heat-Sink Area

There are two methods of determining the minimum ground plane area required by the MIC4680.

### 5.3.1 QUICK METHOD


Make sure that MIC4680 pins 5 through 8 are connected to a ground plane with a minimum area of 6cm<sup>2</sup>. This ground plane should be as close to the MIC4680 as possible. The area maybe distributed in any shape around the package or on any PCB layer as long as there is good thermal contact to pins 5 through 8. This ground plane area is more than sufficient for most designs.

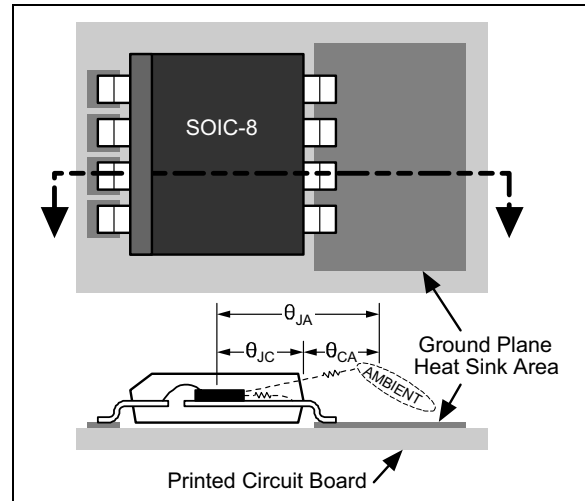

**FIGURE 5-1:** Power SOIC-8 Cross Section.

### 5.3.2 MINIMUM COPPER/MAXIMUM CURRENT METHOD

Using Figure 5-2, for a given input voltage range, determine the minimum ground-plane heat-sink area required for the application's maximum output current. Figure 5-2 assumes a constant die temperature of 75°C above ambient.

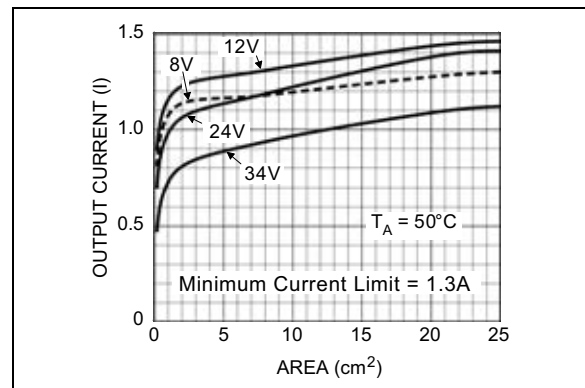

**FIGURE 5-2:** Output Current vs. Ground Plane Area.

When designing with the MIC4680, it is a good practice to connect pins 5 through 8 to the largest ground plane that is practical for the specific design.

## 5.4 Checking the Maximum Junction Temperature

For this example, with an output power ( $P_{OUT}$ ) of 5W, (5V output at 1A maximum with  $V_{IN} = 12V$ ) and 65°C maximum ambient temperature, what is the maximum junction temperature?

Referring to Figure 2-11, read the efficiency ( $\eta$ ) for 1A output current at  $V_{IN} = 12V$  or perform your own measurement.

$$\eta = 79\%$$

The efficiency is used to determine how much of the output power ( $P_{OUT}$ ) is dissipated in the regulator circuit ( $P_D$ ).

### EQUATION 5-4:

$$P_D = \frac{P_{OUT}}{\eta} - P_{OUT}$$

$$P_D = \frac{5W}{0.79} - 5W = 1.33W$$

Calculate the worst-case junction temperature:

### EQUATION 5-5:

$$T_J = P_{D(IC)} \times \theta_{JC} + (T_C - T_A) + T_{A(MAX)}$$

Where:

$T_J$  = Junction temperature.

$P_{D(IC)}$  = The MIC4680 power dissipation.

$\theta_{JC}$  = Junction-to-case thermal resistance (approx. 20°C/W for the MIC4680).

$T_C$  = Pin temperature measurement taken at the entry point of pin 6 or 7 into the plastic package at the ambient temperature at which  $T_C$  is measured.

$T_A$  = Ambient temperature at which  $T_C$  is measured.

$T_{A(MAX)}$  = Maximum ambient operating temperature for the specific design.

Calculating the maximum junction temperature given a maximum ambient temperature of 65°C:

### EQUATION 5-6:

$$T_J = 1.064 \times 20^\circ\text{C/W} + (45^\circ\text{C} - 25^\circ\text{C}) + 65^\circ\text{C}$$


$$T_J = 106.3^\circ\text{C}$$

This value is less than the allowable maximum operating junction temperature of 125°C as listed in the [Operating Ratings](#) ‡. Typical thermal shutdown is 160°C and is listed in the [Electrical Characteristics](#) table.

## 5.5 Increasing the Maximum Output Current

The maximum output current at high input voltages can be increased for a given board layout. The additional three components shown in Figure 5-3 will reduce the overall loss in the MIC4680 by about 20% at high  $V_{IN}$  and high  $I_{OUT}$ .

Even higher output current can be achieved by using the MIC4680 to switch an external FET. See Figure 5-7 for a 5A supply with current limiting.

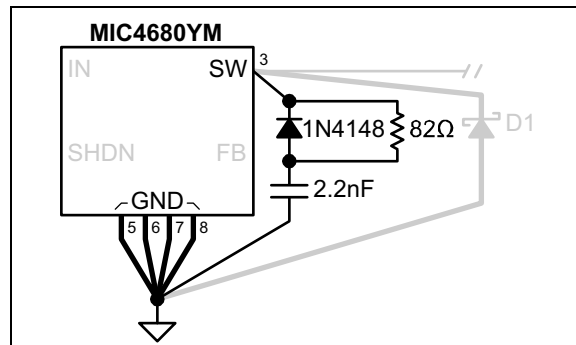


**FIGURE 5-3:** Increasing Maximum Output Current at High Input Voltages.

## 5.6 Layout Considerations

Layout is very important when designing any switching regulator. Rapidly changing switching currents through the printed circuit board traces and stray inductance can generate voltage transients which can cause problems.


To minimize stray inductance and ground loops, keep trace lengths, indicated by the heavy lines in Figure 5-4, as short as possible. For example, keep D1 close to Pin 3 and Pins 5 through 8, keep L1 away from sensitive node FB, and keep  $C_{IN}$  close to Pin 2 and Pins 5 through 8. See [Thermal Considerations](#) for ground plane layout.

The feedback pin should be kept as far away from the switching elements (usually L1 and D1) as possible.

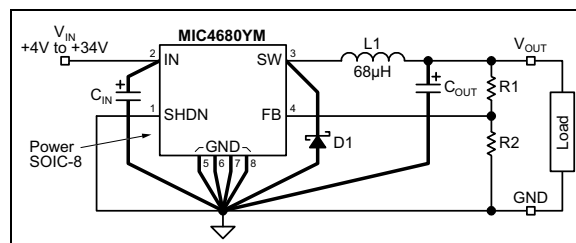


**FIGURE 5-4:** Critical Traces for Layout.


## 5.7 Application Circuits

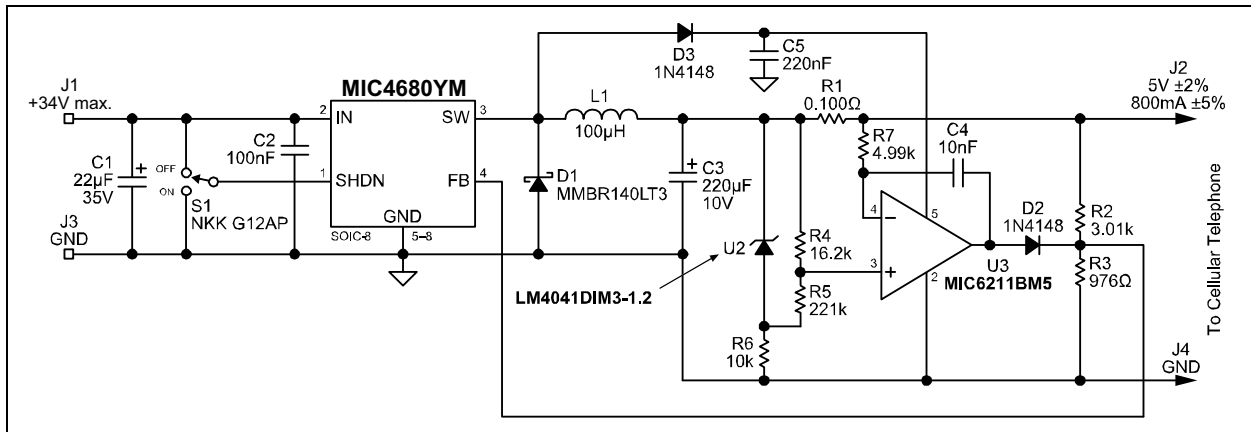

**FIGURE 5-5:** Constant Current and Constant Voltage Battery Charger.

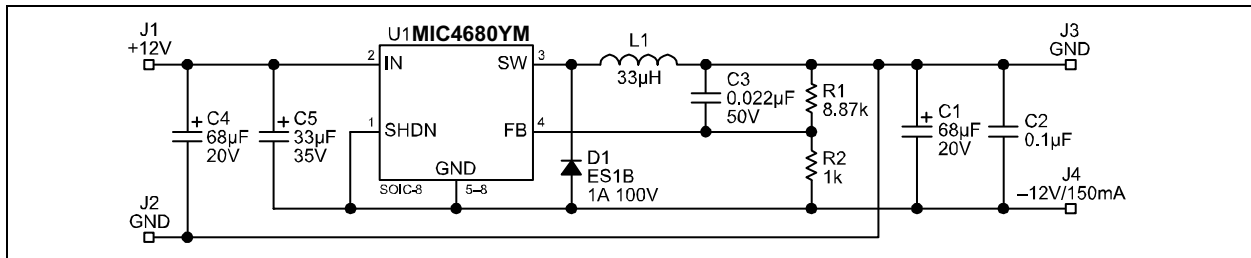

**FIGURE 5-6:** +12V to -12V/150 mA Buck-Boost Converter.

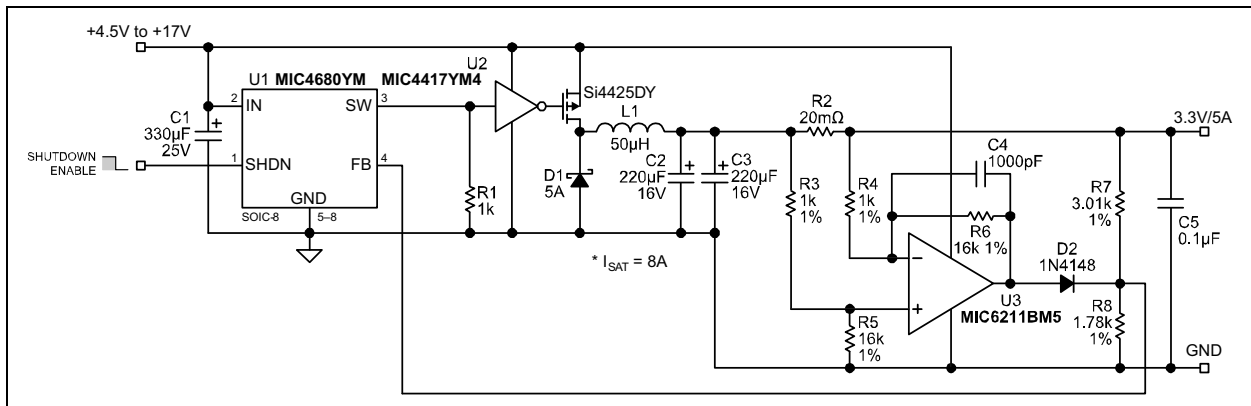


**FIGURE 5-7:** 5V to 3.3V/5A Power Supply.


## 6.0 PACKAGING INFORMATION

### 6.1 Package Marking Information


8-Lead SOIC\*  
(Fixed)




Example



8-Lead SOIC\*  
(Adjustable)



Example



<b>Legend:</b>	XX...X	Product code or customer-specific information
	Y	Year code (last digit of calendar year)
	YY	Year code (last 2 digits of calendar year)
	WW	Week code (week of January 1 is week '01')
	NNN	Alphanumeric traceability code
	(e3)	Pb-free JEDEC® designator for Matte Tin (Sn)
	*	This package is Pb-free. The Pb-free JEDEC designator ((e3)) can be found on the outer packaging for this package.
	•, ▲, ▼	Pin one index is identified by a dot, delta up, or delta down (triangle mark).
<b>Note:</b>	In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.	
	Underbar ( _ ) and/or Overbar ( ¯ ) symbol may not be to scale.	




## 8-Lead SOIC Package Outline and Recommended Land Pattern

### TITLE

8 LEAD SOICN PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

DRAWING #	SOICN-8LD-PL-1	UNIT	INCH [MM]
-----------	----------------	------	-----------

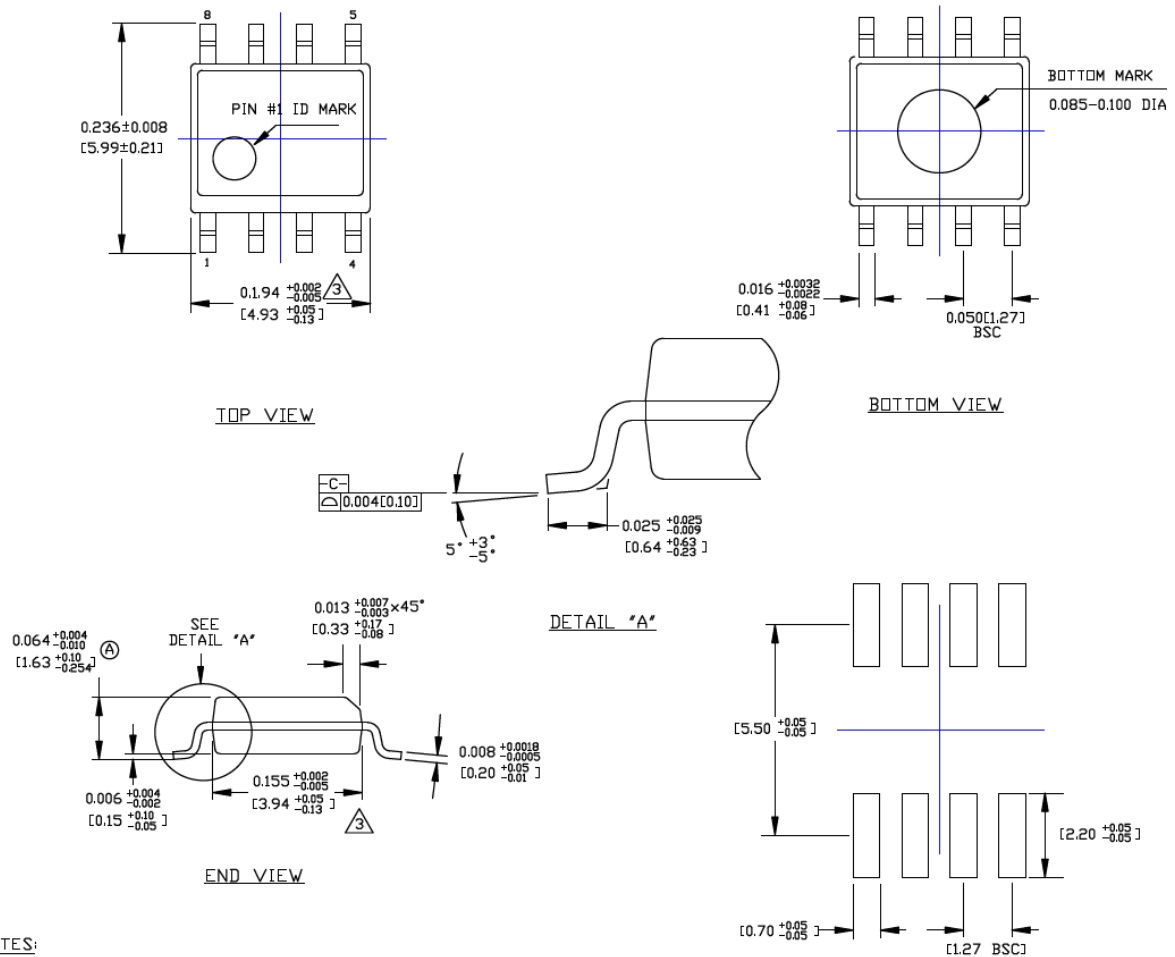

### NOTES:

1. DIMENSIONS ARE IN INCHES[MM].
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSION DOES NOT INCLUDE MOLD FLASH OR PROTRUSIONS, EITHER OF WHICH SHALL NOT EXCEED 0.010[0.25] PER SIDE.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

# MIC4680

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision A (November 2021)

- Converted Micrel document MIC4680 to Microchip data sheet template DS20006623A.
- Minor grammatical text changes throughout.

# MIC4680

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

<u>Device</u>	<u>-X.X</u>	<u>X</u>	<u>X</u>	<u>-XX</u>
Part No.	Output Voltage	Temperature Range	Package	Media Type
<b>Device:</b>	MIC4680:	1A 200 kHz SuperSwitcher™ Buck Regulator		
<b>Output Voltage:</b>	<blank>= Adjustable 3.3 = 3.3V 5.0 = 5.0V			
<b>Temperature Range:</b>	Y = -40°C to +125°C			
<b>Package:</b>	M = 8-Lead SOIC			
<b>Media Type:</b>	<blank>= 95/Tube TR = 2,500/Reel			

**Examples:**

a) MIC4680YM: MIC4680, Adjustable Output Voltage, -40°C to +125°C Temp. Range, 8-Lead SOIC, 95/Tube

b) MIC4680-3.3YM-TR: MIC4680, 3.3V Output Voltage, -40°C to +125°C Temp. Range, 8-Lead SOIC, 2,500/Reel

c) MIC4680-5.0YM-TR: MIC4680, 5.0V Output Voltage, -40°C to +125°C Temp. Range, 8-Lead SOIC, 2,500/Reel

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

# MIC4680

---

NOTES:

---

**Note the following details of the code protection feature on Microchip products:**

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
  - Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
  - Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
  - Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.
- 

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at <https://www.microchip.com/en-us/support/design-help/client-support-services>.

THIS INFORMATION IS PROVIDED BY MICROCHIP “AS IS”. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP’S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer’s risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

For information regarding Microchip’s Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).

**Trademarks**

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maxStylus, maxTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, QuietWire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVm Express, NVMe, Omniscent Code Generation, PICDEM, PICDEM.net, PICKit, PICTail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2021, Microchip Technology Incorporated and its subsidiaries.

All Rights Reserved.

ISBN: 978-1-5224-9353-2

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

**Raleigh, NC**  
Tel: 919-844-7510

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110  
Tel: 408-436-4270

**Canada - Toronto**  
Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MIC4680YM](#) [MIC4680-3.3YM](#) [MIC4680-5.0YM](#) [MIC4680-5.0YM-TR](#) [MIC4680YM-TR](#) [MIC4680-3.3YM-TR](#)