



PIC24FJ64GP205/GU205 Family

16-Bit eXtreme Low-Power Microcontrollers with USB in Low Pin Count Packages

High-Performance CPU

- Modified Harvard Architecture
- 64 Kbytes of Flash Memory
- 8 Kbytes of SRAM
- Up to 16 MIPS Operation @ 32 MHz
- 8 MHz Fast RC (FRC) Internal Oscillator:
 - 96 MHz PLL option
 - Multiple clock divide options
 - Fast start-up
- 17-Bit x 17-Bit Single-Cycle Hardware Fractional/Integer Multiplier
- 32-Bit by 16-Bit Hardware Divider
- 16-Bit x 16-Bit Working Register Array
- C Compiler Optimized Instruction Set Architecture
- Two Address Generation Units (AGUs) for Separate Read and Write Addressing of Data Memory

Universal Serial Bus (USB) Features

- USB v2.0 On-The-Go (OTG)
- Dual Role Capable – Can Act as either Host or Device
- Low-Speed (1.5 Mb/s) and Full-Speed (12 Mb/s) USB Operation in Host mode
- Full-Speed USB Operation in Device mode
- High-Precision PLL for USB
- USB Device mode Operation from FRC Oscillator – No Crystal Oscillator Required
- Supports Up to 32 Endpoints (16 bidirectional):
 - USB module can use any RAM location on the device as USB endpoint buffers
- On-Chip USB Transceiver with Interface for Off-Chip USB Transceiver
- Supports Control, Interrupt, Isochronous and Bulk Transfers
- On-Chip Pull-up and Pull-Down Resistors

Analog Features

- Up to 14-Channel, Software-Selectable 10/12-Bit Analog-to-Digital Converter:
 - 12-bit, 350K samples/second conversion rate (single Sample-and-Hold)
 - 10-bit, 400K samples/second conversion rate (single Sample-and-Hold)
 - Sleep mode operation
 - Low-voltage boost for input
 - Band gap reference input feature
 - Core-independent windowed threshold compare feature

- Auto-scan feature
- Three Analog Comparators with Input Multiplexing:
 - Programmable reference voltage for comparators

eXtreme Low-Power Features

- Sleep and Idle modes Selectively Shut Down Peripherals and/or Core for Substantial Power Reduction and Fast Wake-up
- Doze mode Allows CPU to Run at a Lower Clock Speed than Peripherals
- Alternate Clock modes Allow On-the-Fly Switching to a Lower Clock Speed for Selective Power Reduction
- Retention Sleep with On-Chip Ultra Low-Power Retention Regulator

Functional Safety and Security Peripherals

- Fail-Safe Clock Monitor Operation:
 - Detects clock failure and switches to on-chip, low-power RC Oscillator
- Power-on Reset (POR), Brown-out Reset (BOR)
- Power-up Timer (PWRT) and Oscillator Start-up Timer (OST)
- Programmable High/Low-Voltage Detect (HLVD)
- Flexible Watchdog Timer (WDT) with RC Oscillator for Reliable Operation
- Deadman Timer (DMT) for Safety-Critical Applications
- Programmable 32-Bit Cyclic Redundancy Check (CRC) Generator
- Flash OTP by ICSP™ Write Inhibit
- CodeGuard™ Security
- ECC Flash Memory (64 Kbytes) with Fault Injection:
 - Single Error Correction (SEC)
 - Double-Error Detection (DED)
- Customer OTP Memory
- Unique Device Identifier (UDID)

Special Microcontroller Features

- Supply Voltage Range of 2.0V to 3.6V
- Operating Ambient Temperature Range of -40°C to +125°C
- On-Chip Voltage Regulators (1.8V) for Low-Power Operation
- ECC Flash Memory (64 Kbytes):
 - 10,000 erase/write cycle endurance, typical
 - Data retention: 20 years minimum
 - Self-programmable under software control
 - Flash OTP emulation
- 8-Kbyte SRAM
- Programmable Reference Clock Output
- In-Circuit Serial Programming™ (ICSP™) and In-Circuit Emulation (ICE) via Two Pins
- JTAG Boundary Scan Support

Peripheral Features

- High-Current Sink/Source 18 mA/18 mA on all I/O Pins
- Independent, Low-Power 32 kHz Timer Oscillator
- Two-Channel DMA Controller:
 - Minimizes CPU overhead and increases data throughput
- Timer1: 16-Bit Timer/Counter with External Crystal Oscillator; Timer1 can Provide an A/D Trigger
- Timer2/3: 16-Bit Timer/Counter, can Create 32-Bit Timer; Timer3 can Provide an A/D Trigger
- Five MCCP modules, Each with a Dedicated 16/32-Bit Timer:
 - Five 2-output MCCP modules
- Two Variable Width, Serial Peripheral Interface (SPI) Ports on All Devices; Three Operation modes:
 - Three-wire SPI (supports all four SPI modes)
 - Up to 32-byte deep FIFO buffer
 - I²S mode
 - Speed up to 25 MHz
- Two I²C Host and Client w/Address Masking, PMBus™ and IPMI Support
- Two UART modules:
 - LIN/J2602 bus support (auto-wake-up, Auto-Baud Detect, Break character support)
 - RS-232 and RS-485 support
 - IrDA® mode (hardware encoder/decoder functions)
- Five External Interrupt Pins
- Hardware Real-Time Clock and Calendar (RTCC)
- Peripheral Pin Select (PPS) Allows Independent I/O Mapping of Many Peripherals
- Configurable Interrupt-on-Change on All I/O Pins:
 - Each pin is independently configurable for rising edge or falling edge change detection
- Reference Clock Output with Programmable Divider
- Four Configurable Logic Cell (CLC) Blocks:
 - Two inputs and one output, all mappable to peripherals or I/O pins
 - AND/OR/XOR logic and D/JK flip-flop functions

PIC24FJ64GP205/GU205 Product Families


The device names, pin counts, memory sizes and peripheral availability of each device are listed in [Table 1](#). The following pages show their pinout diagrams.

Table 1. PIC24FJ64GP205/GU205 Family

| Device | Program Memory (Kbytes) | SRAM Memory (Kbytes) | Pins | I/O | PPS | DMA | 10/12-Bit A/D Channels | Comparators | CRC | MCCP (Two-Output) | 16-Bit Timers | I ² C | SPI | LIN-UART/ IrDA [®] | CLC | RTCC | USB OTG | JTAG BS |
|-----------------|-------------------------|----------------------|------|-----|-------|-----|------------------------|-------------|-----|-------------------|---------------|------------------|-----|--------------------------------|-----|------|---------|---------|
| USB Devices | | | | | | | | | | | | | | | | | | |
| PIC24FJ64GU205 | 64 | 8 | 48 | 38 | 27/31 | 2 | 13 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| PIC24FJ64GU203 | 64 | 8 | 36 | 26 | 22/22 | 2 | 13 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| PIC24FJ64GU202 | 64 | 8 | 28 | 20 | 16/16 | 2 | 9 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| PIC24FJ32GU205 | 32 | 8 | 48 | 38 | 27/31 | 2 | 13 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| PIC24FJ32GU203 | 32 | 8 | 36 | 26 | 22/22 | 2 | 13 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| PIC24FJ32GU202 | 32 | 8 | 28 | 20 | 16/16 | 2 | 9 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | Yes | Yes |
| Non-USB Devices | | | | | | | | | | | | | | | | | | |
| PIC24FJ64GP205 | 64 | 8 | 48 | 39 | 29/33 | 2 | 14 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |
| PIC24FJ64GP203 | 64 | 8 | 36 | 27 | 24/24 | 2 | 14 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |
| PIC24FJ64GP202 | 64 | 8 | 28 | 21 | 18/18 | 2 | 10 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |
| PIC24FJ32GP205 | 32 | 8 | 48 | 39 | 29/33 | 2 | 14 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |
| PIC24FJ32GP203 | 32 | 8 | 36 | 27 | 24/24 | 2 | 14 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |
| PIC24FJ32GP202 | 32 | 8 | 28 | 21 | 18/18 | 2 | 10 | 3 | Yes | 5 | 3 | 2 | 2 | 2 | 4 | Yes | No | Yes |

Pin Diagrams

28-Pin QFN, UQFN

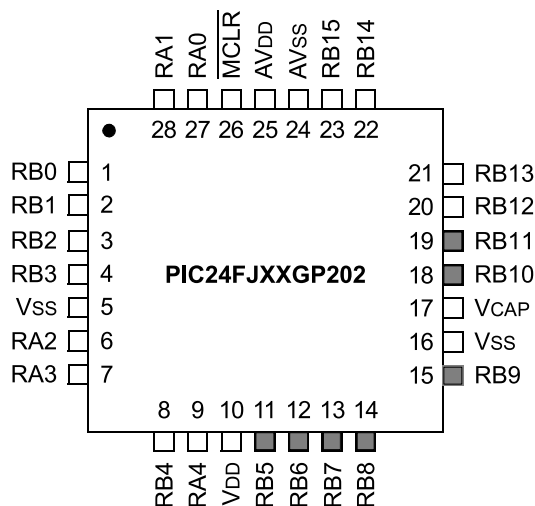

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 2. PIC24FJXXGP202 QFN, UQFN


| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|---|-----|---|
| 1 | PGED1/AN2/LVDIN/C2INB/ RP0 /RB0 | 15 | TDO/C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 |
| 2 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 16 | V _{SS} |
| 3 | AN4/C1INB/ RP2 /SDA2/RB2 | 17 | V _{CAP} |
| 4 | AN5/C1INA/ RP3 /SCL2/RB3 | 18 | PGED2/TDI/ RP10 / RB10 |
| 5 | V _{SS} | 19 | PGEC2/TMS/ RP11 / RB11 |
| 6 | OSCI/CLKI/C1IND/RA2 | 20 | AN8/LVDIN/ RP12 /RB12 |
| 7 | OSCO/CLKO/C2IND/RA3 | 21 | AN7/C1INC/ RP13 / RB13 |
| 8 | SOSCI/C2IND/ RP4 /RB4 | 22 | CV _{REF} /AN6/C3INB/ RP14 /RB14 |
| 9 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 | 23 | AN9/C3INA/ RP15 /RB15 |
| 10 | V _{DD} | 24 | AV _{SS} /V _{SS} |
| 11 | PGED3/ RP5 /ASDA1/RB5 | 25 | AV _{DD} /V _{DD} |
| 12 | PGEC3/ RP6 /ASCL1/RB6 | 26 | MCLR |
| 13 | RP7 /INT0/RB7 | 27 | V _{REF} + /CV _{REF} + /AN0/C3INC/ RP26 / RA0 |
| 14 | TCK/ RP8 /SCL1 ⁽²⁾ /RB8 | 28 | CV _{REF} - /AN1/C3IND/ RP27 /RA1 |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

28-Pin QFN, UQFN⁽¹⁾

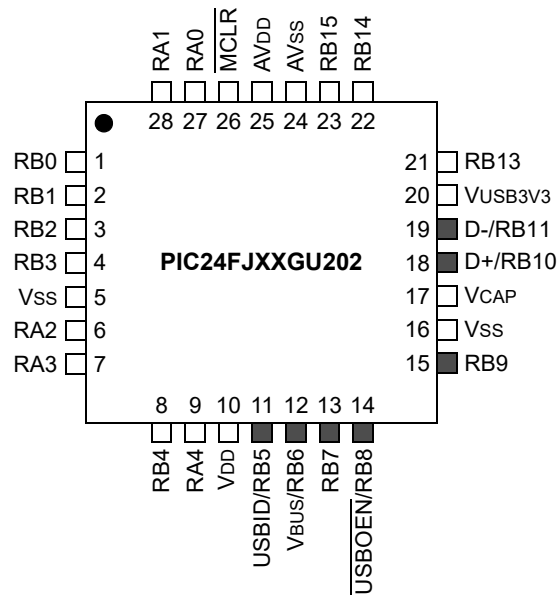

Note:

1. **Shaded** pins are up to 5.5 V_{DC} tolerant.

Table 3. PIC24FJXXGU202 QFN, UQFN


| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|--|
| 1 | PGED1/AN2/LVDIN/C2INB/ RP0 /RB0 | 15 | TDO/C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 |
| 2 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 16 | V _{SS} |
| 3 | AN4/C1INB/ RP2 /SDA2/RB2 | 17 | V _{CAP} |
| 4 | AN5/C1INA/ RP3 /SCL2/RB3 | 18 | PGED2/ RP10 /D+/ RB10 |
| 5 | V _{SS} | 19 | PGEC2/ RP11 / D-/RB11 |
| 6 | OSCI/CLKI/C1IND/RA2 | 20 | V _{USB3V3} |
| 7 | OSCO/CLKO/C2IND/RA3 | 21 | AN7/C1INC/ RP13 / RB13 |
| 8 | SOSCI/C2IND/ RP4 /RB4 | 22 | CV _{REF} /AN6/C3INB/ RP14 /RB14 |
| 9 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 | 23 | AN9/C3INA/ RP15 /RB15 |
| 10 | V _{DD} | 24 | AV _{SS} /V _{SS} |
| 11 | TMS/ RP5 /USBID/RB5 | 25 | AV _{DD} /V _{DD} |
| 12 | V _{BUS} /RB6 | 26 | MCLR |
| 13 | TDI/ RP7 /INT0/RB7 | 27 | PGED3/V _{REF} +/CV _{REF} +/AN0/C3INC/ RP26 /ASDA1/RA0 |
| 14 | TCK/ RP8 /SCL1 ⁽²⁾ /USBOEN/RB8 | 28 | PGEC3/CV _{REF} -/AN1/C3IND/ RP27 /ASCL1/RA1 |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

28-Pin SOIC, SSOP⁽¹⁾

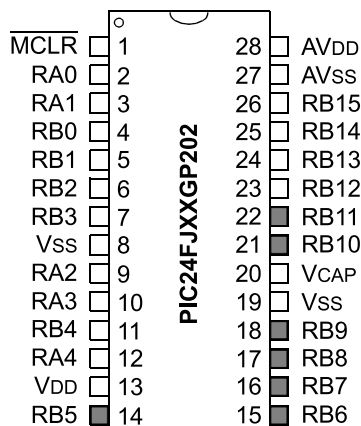

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 4. PIC24FJXXGP202 SOIC, SSOP


| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|---|
| 1 | MCLR | 15 | PGEC3/RP6/ASCL1/RB6 |
| 2 | V _{REF} ⁺ /CV _{REF} ⁺ /AN0/C3INC/RP26/ RA0 | 16 | RP7/INT0/RB7 |
| 3 | CV _{REF} ⁻ /AN1/C3IND/RP27/RA1 | 17 | TCK/RP8/SCL1 ⁽²⁾ /RB8 |
| 4 | PGED1/AN2/C2INB/RP0/RB0 | 18 | TDO/C1INC/C2INC/C3INC/RP9/SDA1 ⁽²⁾ /T1CK/RB9 |
| 5 | PGEC1/AN1-/AN3/C2INA/RP1/RB1 | 19 | V _{SS} |
| 6 | AN4/C1INB/RP2/SDA2/RB2 | 20 | V _{CAP} |
| 7 | AN5/C1INA/RP3/SCL2/RB3 | 21 | PGED2/TDI/RP10/RB10 |
| 8 | V _{SS} | 22 | PGEC2/TMS/RP11/ RB11 |
| 9 | OSCI/CLKI/C1IND/RA2 | 23 | AN8/LVDIN/RP12/RB12 |
| 10 | OSCO/CLKO/C2IND/RA3 | 24 | AN7/C1INC/RP13/ RB13 |
| 11 | SOSCI/C2IND/RP4/RB4 | 25 | CV _{REF} /AN6/C3INB/RP14/RB14 |
| 12 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 | 26 | AN9/C3INA/RP15/RB15 |
| 13 | V _{DD} | 27 | AV _{SS} /V _{SS} |
| 14 | PGED3/RP5/ASDA1/RB5 | 28 | AV _{DD} /V _{DD} |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

28-Pin SOIC, SSOP⁽¹⁾

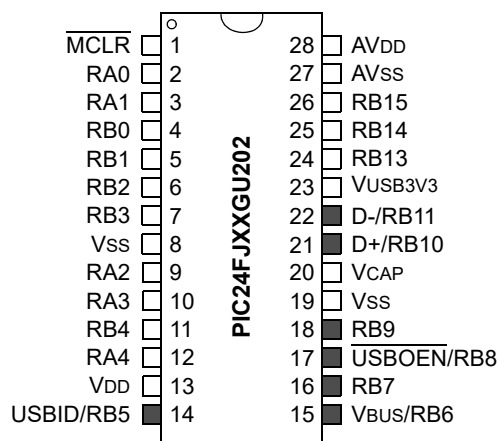

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 5. PIC24FJXXGU202 SOIC, SSOP


| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|--|
| 1 | MCLR | 15 | V _{BUS} /RB6 |
| 2 | PGED3/V _{REF} ⁺ /CV _{REF} ⁺ /AN0/C3INC/ RP26 /ASDA1/RA0 | 16 | TDI/ RP7 /INT0/RB7 |
| 3 | PGEC3/CV _{REF} ⁻ /AN1/C3IND/ RP27 /ASCL1/RA1 | 17 | TCK/ RP8 /SCL1 ⁽²⁾ /USBOEN/RB8 |
| 4 | PGED1/AN2/LVDIN/C2INB/ RP0 /RB0 | 18 | TDO/C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 |
| 5 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 19 | V _{SS} |
| 6 | AN4/C1INB/ RP2 /SDA2/RB2 | 20 | V _{CAP} |
| 7 | AN5/C1INA/ RP3 /SCL2/RB3 | 21 | PGED2/ RP10 /D+/RB10 |
| 8 | V _{SS} | 22 | PGEC2/ RP11 /D-/RB11 |
| 9 | OSCI/CLKI/C1IND/RA2 | 23 | V _{USB3V3} |
| 10 | OSCO/CLKO/C2IND/RA3 | 24 | AN7/C1INC/ RP13 /RB13 |
| 11 | SOSCI/C2IND/ RP4 /RB4 | 25 | CV _{REF} /AN6/C3INB/ RP14 /RB14 |
| 12 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 | 26 | AN9/C3INA/ RP15 /RB15 |
| 13 | V _{DD} | 27 | AV _{SS} /V _{SS} |
| 14 | TMS/ RP5 /USBID/RB5 | 28 | AV _{DD} /V _{DD} |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

36-Pin UQFN⁽¹⁾

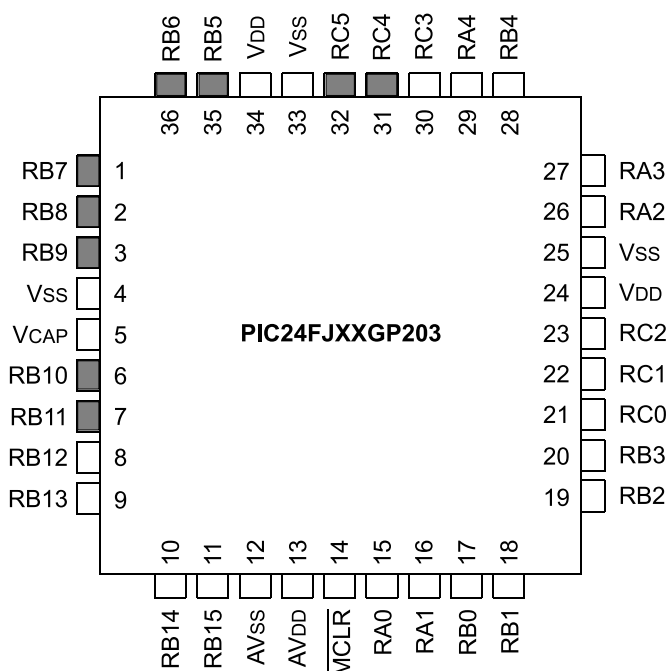

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 6. PIC24FJXXGP203 UQFN

| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|-------------------------------|
| 1 | RP7/INT0/RB7 | 19 | AN4/C1INB/RP2/SDA2/RB2 |
| 2 | TCK/RP8/SCL1 ⁽²⁾ /RB8 | 20 | AN5/C1INA/RP3/SCL2/RB3 |
| 3 | TDO/C1INC/C2INC/C3INC/RP9/SDA1 ⁽²⁾ /T1CK/RB9 | 21 | AN10/RP16/RC0 |
| 4 | V _{SS} | 22 | AN11/RP17/RC1 |
| 5 | V _{CAP} | 23 | AN12/RP18/RC2 |
| 6 | PGED2/TDI/RP10/ RB10 | 24 | V _{DD} |
| 7 | PGEC2/TMS/RP11/ RB11 | 25 | V _{SS} |
| 8 | AN8/LVDIN/RP12/RB12 | 26 | OSCI/CLKI/C1IND/RA2 |
| 9 | AN7/C1INC/RP13/ RB13 | 27 | OSCO/CLKO/C2IND/RA3 |
| 10 | CV _{REF} /AN6/C3INB/RP14/RB14 | 28 | SOSCI/C2IND/RP4/RB4 |
| 11 | AN9/C3INA/RP15/RB15 | 29 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 |
| 12 | AV _{SS} | 30 | AN13/RP19/RC3 |
| 13 | AV _{DD} | 31 | RP20/RC4 |
| 14 | MCLR | 32 | RP21/RC5 |
| 15 | V _{REF} + /CV _{REF} + /AN0/C3INC/ RP26/RA0 | 33 | V _{SS} |
| 16 | CV _{REF} - /AN1/C3IND/ RP27/RA1 | 34 | V _{DD} |

.....continued


| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|---------------------------------------|-----|------------------------------|
| 17 | PGED1/AN2/C2INB/ RP0 /RB0 | 35 | PGED3/ RP5 /ASDA1/RB5 |
| 18 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 36 | PGEC3/ RP6 /ASCL1/RB6 |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

36-Pin UQFN⁽¹⁾

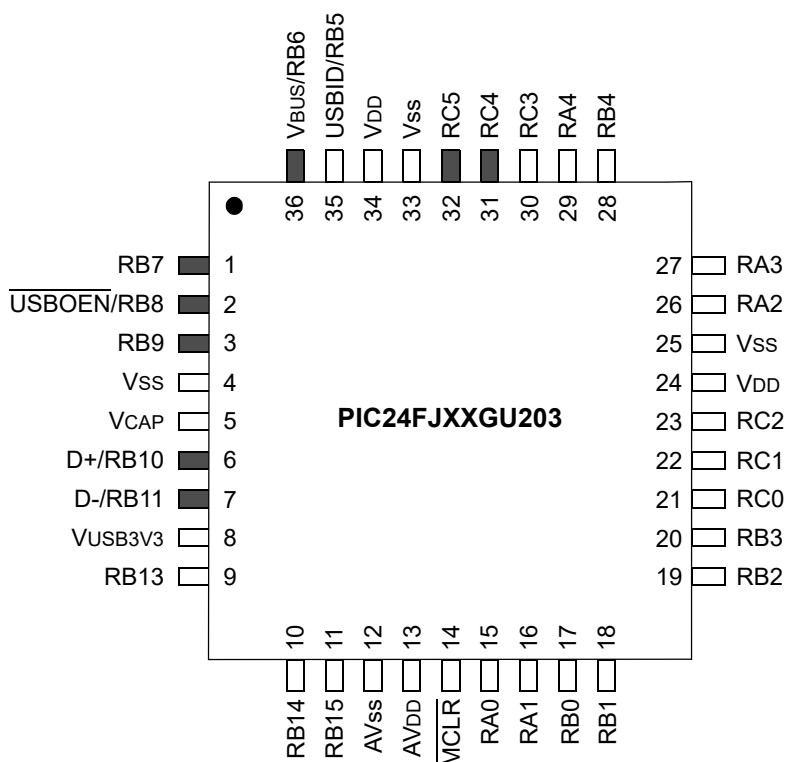

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 7. PIC24FJXXGU203 UQFN

| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|---------------------------------|
| 1 | RP7 /INT0/RB7 | 19 | AN4/C1INB/ RP2 /SDA2/RB2 |
| 2 | TCK/ RP8 /SCL1 ⁽²⁾ /USBOEN/RB8 | 20 | AN5/C1INA/ RP3 /SCL2/RB3 |
| 3 | TDO/C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 | 21 | AN10/ RP16 /RC0 |
| 4 | V _{SS} | 22 | AN11/ RP17 /RC1 |
| 5 | V _{CAP} | 23 | AN12/ RP18 /RC2 |
| 6 | PGED2/TDI/ RP10 /D+/RB10 | 24 | V _{DD} |
| 7 | PGEC2/TMS/ RP11 /D-/RB11 | 25 | V _{SS} |
| 8 | V _{USB3V3} | 26 | OSCI/CLKI/C1IND/RA2 |
| 9 | AN7/C1INC/ RP13 /RB13 | 27 | OSCO/CLKO/C2IND/RA3 |
| 10 | CV _{REF} /AN6/C3INB/ RP14 /RB14 | 28 | SOSCI/C2IND/ RP4 /RB4 |
| 11 | AN9/C3INA/ RP15 /RB15 | 29 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 |
| 12 | AV _{SS} | 30 | AN13/ RP19 /RC3 |


|continued | | | |
|----------------|--|-----|-------------------------|
| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
| 13 | AV _{DD} | 31 | RP20 /RC4 |
| 14 | MCLR | 32 | RP21 /RC5 |
| 15 | PGED3/V _{REF} ⁺ /CV _{REF} ⁺ /AN0/C3INC/ RP26 /ASDA1/RA0 | 33 | V _{SS} |
| 16 | PGEC3/CV _{REF} ⁻ /AN1/C3IND/ RP27 /ASCL1/RA1 | 34 | V _{DD} |
| 17 | PGED1/AN2/LVDIN/C2INB/ RP0 /RB0 | 35 | RP5 /USBID/RB5 |
| 18 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 36 | V _{BUS} /RB6 |

Notes:

1. **RPn** and **RPIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

48-Pin UQFN, TQFP⁽¹⁾

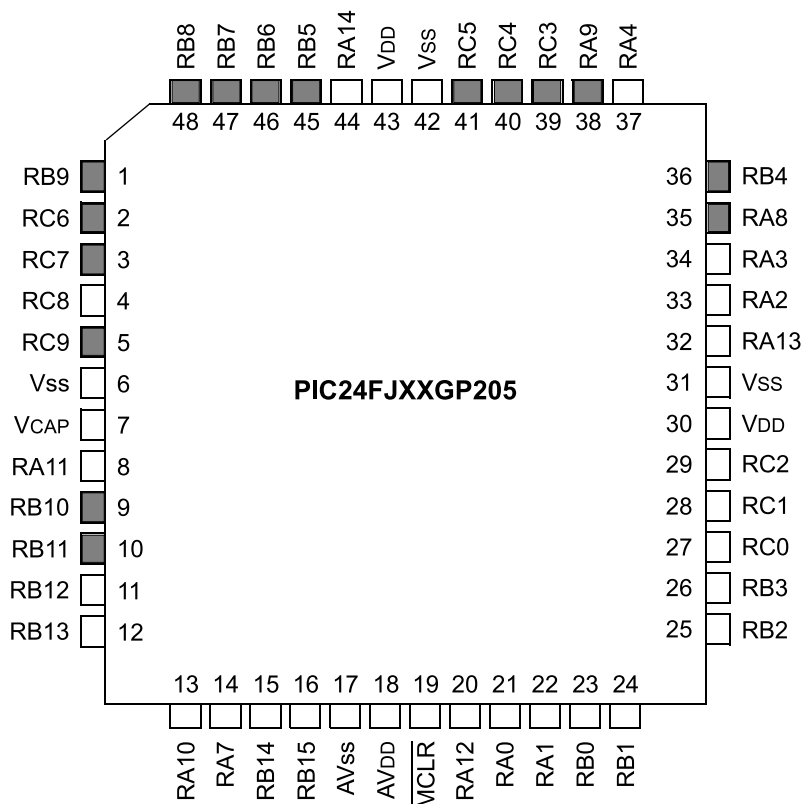

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 8. PIC24FJXXGP205 Devices UQFN, TQFP

| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|---------------------------------|
| 1 | C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 | 25 | AN4/C1INB/ RP2 /SDA2/RB2 |
| 2 | RP22 /RC6 | 26 | AN5/C1INA/ RP3 /SCL2/RB3 |
| 3 | RP23 /RC7 | 27 | AN10/ RP16 /RC0 |
| 4 | RP24 /RC8 | 28 | AN11/ RP17 /RC1 |
| 5 | RP25 /RC9 | 29 | AN12/ RP18 / RC2 |
| 6 | V _{SS} | 30 | V _{DD} |
| 7 | V _{CAP} | 31 | V _{SS} |
| 8 | RPI29 /RA11 | 32 | RPI31 /RA13 |
| 9 | PGED2/ RP10 /RB10 | 33 | OSCI/CLKI/C1IND/RA2 |
| 10 | PGEC2/ RP11 /RB11 | 34 | OSCO/CLKO/C2IND/RA3 |
| 11 | AN8/LVDIN/ RP12 /RB12 | 35 | TDO/RA8 |
| 12 | AN7/C1INC/ RP13 /RB13 | 36 | SOSCI/C2IND/ RP4 /RB4 |
| 13 | TMS/ RP28 /RA10 | 37 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 |


|continued | | | |
|----------------|--|-----|--------------------------------------|
| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
| 14 | TCK/RA7 | 38 | TDI/RA9 |
| 15 | CV _{REF} /AN6/C3INB/ RP14 /RB14 | 39 | AN13/ RP19 /RC3 |
| 16 | AN9/C3INA/ RP15 /RB15 | 40 | RP20 /RC4 |
| 17 | AV _{SS} | 41 | RP21 /RC5 |
| 18 | AV _{DD} | 42 | V _{SS} |
| 19 | MCLR | 43 | V _{DD} |
| 20 | RPI30 /RA12 | 44 | RPI32 /RA14 |
| 21 | V _{REF} ⁺ /CV _{REF} ⁺ /AN0/C3INC/ RP26 /RA0 | 45 | PGED3/ RP5 /ASDA1/RB5 |
| 22 | CV _{REF} ⁻ /AN1/C3IND/ RP27 /RA1 | 46 | PGEC3/ RP6 /ASCL1/RB6 |
| 23 | PGED1/AN2/C2INB/ RP0 /RB0 | 47 | RP7 /INT0/RB7 |
| 24 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 48 | RP8 /SCL1 ⁽²⁾ /RB8 |

Notes:

1. **RPn** and **RPI n** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Pin Diagrams

48-Pin UQFN, TQFP⁽¹⁾

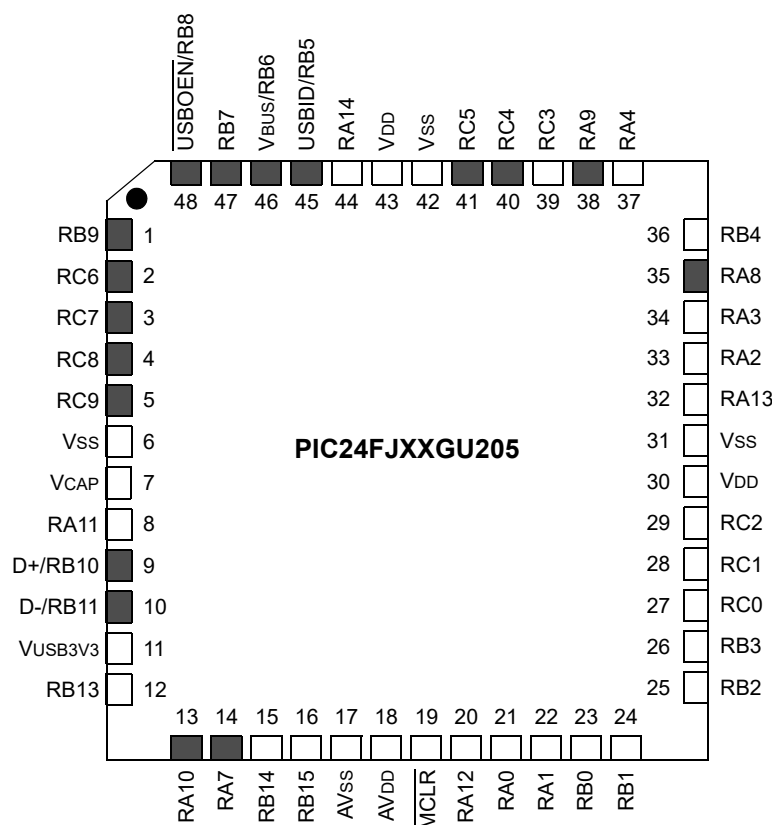

Note:

1. Shaded pins are up to 5.5 V_{DC} tolerant.

Table 9. PIC24FJXXGU205 UQFN, TQFP

| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
|-----|--|-----|---------------------------------|
| 1 | C1INC/C2INC/C3INC/ RP9 /SDA1 ⁽²⁾ /T1CK/RB9 | 25 | AN4/C1INB/ RP2 /SDA2/RB2 |
| 2 | RP22 /RC6 | 26 | AN5/C1INA/ RP3 /SCL2/RB3 |
| 3 | RP23 /RC7 | 27 | AN10/ RP16 /RC0 |
| 4 | RP24 /RC8 | 28 | AN11/ RP17 /RC1 |
| 5 | RP25 /RC9 | 29 | AN12/ RP18 / RC2 |
| 6 | V _{SS} | 30 | V _{DD} |
| 7 | V _{CAP} | 31 | V _{SS} |
| 8 | RPI29 /RA11 | 32 | RPI31 /RA13 |
| 9 | PGED2/RP10/D+/RB10 | 33 | OSCI/CLKI/C1IND/RA2 |
| 10 | PGEC2/RP11/D-/RB11 | 34 | OSCO/CLKO/C2IND/RA3 |

|continued | | | |
|----------------|--|-----|-------------------------------------|
| Pin | Function ⁽¹⁾ | Pin | Function ⁽¹⁾ |
| 11 | V _{USB3V3} | 35 | TDO/RA8 |
| 12 | AN7/C1INC/ RP13 /RB13 | 36 | SOSCI/C2IND/ RP4 /RB4 |
| 13 | TMS/ RP28 /RA10 | 37 | SOSCO/SCLKI/C2INC/PWRLCLK/RA4 |
| 14 | TCK/RA7 | 38 | TDI/RA9 |
| 15 | CV _{REF} /AN6/C3INB/ RP14 /RB14 | 39 | AN13/ RP19 /RC3 |
| 16 | AN9/C3INA/ RP15 /RB15 | 40 | RP20 /RC4 |
| 17 | AV _{SS} | 41 | RP21 /RC5 |
| 18 | AV _{DD} | 42 | V _{SS} |
| 19 | MCLR | 43 | V _{DD} |
| 20 | RPI30 /RA12 | 44 | RPI32 /RA14 |
| 21 | PGED3/V _{REF} +/CV _{REF} +/AN0/C3INC/ RP26 /ASDA1/RA0 | 45 | RP5 /USBID/RB5 |
| 22 | PGEC3/CV _{REF} -/AN1/C3IND/ RP27 /ASCL1/RA1 | 46 | V _{BUS} /RB6 |
| 23 | PGED1/AN2/LVDIN/C2INB/ RP0 /RB0 | 47 | RP7 /INT0/RB7 |
| 24 | PGEC1/AN1-/AN3/C2INA/ RP1 /RB1 | 48 | RP8/SCL1 ⁽²⁾ /USBOEN/RB8 |

Notes:

1. **RPn** and **RPIIn** represent remappable pins for Peripheral Pin Select (PPS) functions.
2. Alternate pin assignments for I2C1 as determined by the I2C1SEL Configuration bit.

Table of Contents

| | |
|---|----|
| High-Performance CPU..... | 1 |
| Universal Serial Bus (USB) Features..... | 1 |
| Analog Features..... | 1 |
| eXtreme Low-Power Features..... | 2 |
| Functional Safety and Security Peripherals..... | 2 |
| Special Microcontroller Features..... | 2 |
| Peripheral Features..... | 3 |
| PIC24FJ64GP205/GU205 Product Families..... | 3 |
| Pin Diagrams..... | 5 |
| Pin Diagrams..... | 6 |
| Pin Diagrams..... | 7 |
| Pin Diagrams..... | 8 |
| Pin Diagrams..... | 9 |
| Pin Diagrams..... | 11 |
| Pin Diagrams..... | 13 |
| Pin Diagrams..... | 15 |
| 1. Device Overview..... | 22 |
| 1.1. Core Features..... | 22 |
| 1.2. DMA Controller..... | 23 |
| 1.3. USB On-The-Go (OTG)..... | 23 |
| 1.4. Other Special Features..... | 24 |
| 1.5. Feature Set..... | 24 |
| 2. Guidelines for Getting Started with 16-Bit MCUs..... | 29 |
| 2.1. Basic Connection Requirements..... | 29 |
| 2.2. Power Supply Pins..... | 30 |
| 2.3. Master Clear ($\overline{\text{MCLR}}$) Pin..... | 30 |
| 2.4. Voltage Regulator Pin (V_{CAP})..... | 31 |
| 2.5. ICSP Pins..... | 32 |
| 2.6. External Oscillator Pins..... | 33 |
| 2.7. Unused I/Os..... | 33 |
| 3. CPU..... | 34 |
| 3.1. Programmer's Model..... | 34 |
| 3.2. Arithmetic Logic Unit (ALU)..... | 37 |
| 3.3. CPU Registers..... | 38 |

| | | |
|-------|---|-----|
| 4. | Program Memory..... | 67 |
| 4.1. | Program Memory Organization..... | 69 |
| 4.2. | Hard Memory Vectors..... | 70 |
| 4.3. | Configuration Bits Overview..... | 70 |
| 4.4. | Code-Protect Configuration Bits..... | 70 |
| 4.5. | Table Instructions and Flash Programming..... | 70 |
| 4.6. | RTSP Operation..... | 71 |
| 4.7. | Error Correcting Code (ECC)..... | 76 |
| 4.8. | Flash OTP by ICSP™ Write Inhibit..... | 77 |
| 4.9. | JTAG Operation..... | 77 |
| 4.10. | Enhanced In-Circuit Serial Programming..... | 77 |
| 4.11. | Program Memory Registers..... | 78 |
| 5. | Data Memory Space..... | 90 |
| 5.1. | Data Space Width..... | 90 |
| 5.2. | Data Memory Organization and Alignment..... | 91 |
| 5.3. | Near Data Space..... | 91 |
| 5.4. | Special Function Register (SFR) Space..... | 91 |
| 5.5. | Interfacing Program and Data Memory Spaces..... | 91 |
| 6. | Direct Memory Access Controller (DMA)..... | 97 |
| 6.1. | Summary of DMA Operations..... | 98 |
| 6.2. | Typical Setup..... | 102 |
| 6.3. | Peripheral Module Disable..... | 102 |
| 6.4. | DMA Registers..... | 103 |
| 7. | Resets..... | 122 |
| 7.1. | Special Function Register Reset States..... | 123 |
| 7.2. | Device Reset Times..... | 123 |
| 7.3. | Brown-out Reset (BOR)..... | 124 |
| 7.4. | Low-Power BOR..... | 125 |
| 7.5. | Clock Source at Reset..... | 125 |
| 7.6. | Reset Register..... | 126 |
| 8. | Interrupt Controller..... | 129 |
| 8.1. | Interrupt Vector Table..... | 129 |
| 8.2. | Reset Sequence..... | 129 |
| 8.3. | Interrupt Controller Registers..... | 135 |
| 9. | Oscillator Configuration..... | 192 |
| 9.1. | Initial Configuration on POR..... | 193 |
| 9.2. | Clock Switching Operation..... | 193 |
| 9.3. | Fail-Safe Clock Monitor (FSCM)..... | 194 |
| 9.4. | Internal Fast RC (FRC) Oscillator with Active Clock Tuning..... | 195 |
| 9.5. | Primary Oscillator (PRI or POSC)..... | 195 |
| 9.6. | Low-Power RC (LPRC) Oscillator..... | 195 |
| 9.7. | Secondary Oscillator (SOSC)..... | 196 |
| 9.8. | PLL Block and USB Operation..... | 196 |
| 9.9. | Reference Clock Output..... | 197 |

| | |
|--|-----|
| 9.10. Oscillator Registers..... | 199 |
| 10. Power-Saving Features..... | 211 |
| 10.1. Clock Frequency and Clock Switching..... | 211 |
| 10.2. Instruction-Based Power-Saving Modes..... | 211 |
| 10.3. Doze Mode..... | 213 |
| 10.4. Selective Peripheral Module Control..... | 214 |
| 10.5. Peripheral Module Disable Registers..... | 215 |
| 11. I/O Ports..... | 223 |
| 11.1. Parallel I/O (PIO) Ports..... | 223 |
| 11.2. Configuring Analog Port Pins..... | 224 |
| 11.3. Interrupt-on-Change (IOC)..... | 225 |
| 11.4. Peripheral Pin Select (PPS)..... | 226 |
| 11.5. I/O Port and Peripheral Pin Select Registers..... | 232 |
| 12. Timer1..... | 300 |
| 12.1. Timer1 Registers..... | 301 |
| 13. Timer2/3..... | 306 |
| 13.1. Timer2/3 and Timer4/5 Registers..... | 309 |
| 14. Capture/Compare/PWM/Timer Modules (MCCP)..... | 319 |
| 14.1. Time Base Generator..... | 320 |
| 14.2. General Purpose Timer..... | 320 |
| 14.3. Output Compare Mode..... | 322 |
| 14.4. Input Capture Mode..... | 324 |
| 14.5. Auxiliary Output..... | 325 |
| 14.6. MCCP Registers..... | 327 |
| 15. Serial Peripheral Interface (SPI)..... | 419 |
| 15.1. Host Mode Operation..... | 421 |
| 15.2. Client Mode Operation..... | 422 |
| 15.3. Audio Mode Operation..... | 422 |
| 15.4. Relationship Between Device and SPI Clock Speed..... | 423 |
| 15.5. SPI Registers..... | 424 |
| 16. Inter-Integrated Circuit (I ² C)..... | 458 |
| 16.1. Communicating as a Host in a Single Host Environment..... | 460 |
| 16.2. Setting Baud Rate When Operating as a Bus Host..... | 460 |
| 16.3. Host Address Masking..... | 460 |
| 16.4. I2C Registers..... | 462 |
| 17. Universal Asynchronous Receiver Transmitter (UART)..... | 487 |
| 17.1. UART Baud Rate Generator (BRG)..... | 488 |
| 17.2. Transmitting in 8-Bit Data Mode..... | 489 |
| 17.3. Transmitting in 9-Bit Data Mode..... | 489 |
| 17.4. Break and Sync Transmit Sequence..... | 489 |
| 17.5. Receiving in 8-Bit or 9-Bit Data Mode..... | 489 |
| 17.6. Operation of $\overline{\text{UxCTS}}$ and $\overline{\text{UxRTS}}$ Control Pins..... | 489 |

| | |
|--|-----|
| 17.7. Infrared Support..... | 490 |
| 17.8. UART Registers..... | 491 |
| 18. Real-Time Clock and Calendar (RTCC) with Timestamp..... | 508 |
| 18.1. RTCC Source Clock..... | 509 |
| 18.2. RTCC Module Registers..... | 510 |
| 18.3. Calibration..... | 511 |
| 18.4. Alarm..... | 511 |
| 18.5. Power Control..... | 512 |
| 18.6. Event Timestamping..... | 513 |
| 18.7. RTCC Registers..... | 514 |
| 19. 32-Bit Programmable Cyclic Redundancy Check (CRC) Generator..... | 534 |
| 19.1. User Interface..... | 535 |
| 19.2. CRC Registers..... | 537 |
| 20. Configurable Logic Cell (CLC)..... | 546 |
| 20.1. CLC Registers..... | 549 |
| 21. 12-Bit A/D Converter with Threshold Detect..... | 583 |
| 21.1. Basic Operation..... | 585 |
| 21.2. Extended DMA Operations..... | 585 |
| 21.3. Sampling Time Requirements..... | 587 |
| 21.4. 12-Bit A/D Converter Registers..... | 589 |
| 22. Triple Comparator Module..... | 618 |
| 22.1. Triple Comparator Module Registers..... | 620 |
| 23. Comparator Voltage Reference..... | 628 |
| 23.1. Comparator Voltage Reference Register..... | 629 |
| 24. High/Low-Voltage Detect (HLVD)..... | 631 |
| 24.1. High/Low-Voltage Detect (HLVD) Register..... | 632 |
| 25. Deadman Timer (DMT)..... | 635 |
| 25.1. Deadman Timer (DMT) Registers..... | 636 |
| 26. USB with On-The-Go (USB OTG) Support..... | 648 |
| 26.1. Hardware Configuration..... | 650 |
| 26.2. USB Buffer Descriptors and the BDT..... | 653 |
| 26.3. USB On-The-Go Registers..... | 656 |
| 26.4. USB Interrupts..... | 659 |
| 26.5. Device Mode Operation..... | 661 |
| 26.6. Host Mode Operation..... | 662 |
| 26.7. USB Interrupt Registers..... | 665 |
| 26.8. USB OTG Registers..... | 678 |
| 26.9. USB Endpoint Management Registers..... | 695 |
| 27. Special Features..... | 712 |
| 27.1. Configuration Bits..... | 712 |

| | |
|---|-----|
| 27.2. Device Identification..... | 730 |
| 27.3. Unique Device Identifier (UDID)..... | 732 |
| 27.4. On-Chip Voltage Regulator..... | 733 |
| 27.5. Watchdog Timer (WDT)..... | 734 |
| 27.6. Program Verification and Code Protection..... | 735 |
| 27.7. JTAG Interface..... | 735 |
| 27.8. In-Circuit Serial Programming™ (ICSP)™..... | 735 |
| 27.9. Customer OTP Memory..... | 736 |
| 27.10. In-Circuit Debugger..... | 736 |
| 28. Development Support..... | 737 |
| 29. Instruction Set Summary..... | 738 |
| 30. Electrical Characteristics..... | 748 |
| 30.1. Absolute Maximum Ratings ⁽¹⁾ | 748 |
| 30.2. DC Characteristics..... | 749 |
| 30.3. AC Characteristics and Timing Parameters..... | 760 |
| 31. Package Information..... | 780 |
| 31.1. Package Marking Information..... | 780 |
| 31.2. Package Marking Information (Continued)..... | 781 |
| 31.3. Package Details..... | 782 |
| 32. Revision History..... | 803 |
| 32.1. Revision A (April 2020)..... | 803 |
| 32.2. Revision B (August 2020)..... | 803 |
| 32.3. Revision C (December 2020)..... | 803 |
| 32.4. Revision D (March 2022)..... | 804 |
| The Microchip Website..... | 805 |
| Product Change Notification Service..... | 805 |
| Customer Support..... | 805 |
| Product Identification System..... | 806 |
| Microchip Devices Code Protection Feature..... | 806 |
| Legal Notice..... | 807 |
| Trademarks..... | 807 |
| Quality Management System..... | 808 |
| Worldwide Sales and Service..... | 809 |

1. Device Overview

This document contains device-specific information for the following devices:

| | |
|------------------|------------------|
| • PIC24FJ64GP205 | • PIC24FJ64GU205 |
| • PIC24FJ64GP203 | • PIC24FJ64GU203 |
| • PIC24FJ64GP202 | • PIC24FJ64GU202 |
| • PIC24F32GP205 | • PIC24FJ32GU205 |
| • PIC24FJ32GP203 | • PIC24FJ32GU203 |
| • PIC24FJ32GP202 | • PIC24FJ32GU202 |

The PIC24FJ64GP205/GU205 family introduces eXtreme Low-Power Microcontrollers with USB in smaller package sizes. This is a 16-bit microcontroller family with a broad peripheral feature set and enhanced computational performance. This family also offers a new migration option for those high-performance applications which may be outgrowing their 8-bit platforms, but do not require the numerical processing power of a Digital Signal Processor (DSP).

[Table 1-1](#) lists the functions of the various pins shown in the pinout diagrams.

1.1 Core Features

1.1.1 16-Bit Architecture

Central to all PIC24F devices is the 16-bit modified Harvard architecture, first introduced with Microchip's dsPIC® Digital Signal Controllers (DSCs). The PIC24F CPU core offers a wide range of enhancements, such as:

- 16-bit data and 24-bit address paths with the ability to move information between program and data memory spaces
- Linear addressing of up to 12 Mbytes (program space) and 32 Kbytes (data)
- A 16-element Working register array with built-in software stack support
- A 17 x 17 hardware multiplier with support for integer math
- Hardware support for 32 by 16-bit division
- An instruction set that supports multiple addressing modes and is optimized for high-level languages, such as 'C'
- Operational performance up to 16 MIPS

1.1.2 Power-Saving Technology

The PIC24FJ64GP205/GU205 family of devices includes low-voltage Sleep, a low-power mode with essential circuits being powered from a separate low-voltage regulator. This low-power mode also supports the continuous operation of the low-power, on-chip Real-Time Clock/Calendar (RTCC), making it possible for an application to keep time while the device is otherwise asleep.

Aside from this feature, PIC24FJ64GP205/GU205 family devices also include all of the legacy power-saving features of previous PIC24F microcontrollers, such as:

- On-the-Fly Clock Switching, allowing the selection of a lower power clock during run time
- Doze Mode Operation, for maintaining peripheral clock speed while slowing the CPU clock
- Instruction-Based Power-Saving Modes, for quick invocation of the Idle and Sleep modes

1.1.3 Oscillator Options and Features

All of the devices in the PIC24FJ64GP205/GU205 family offer six different oscillator options, allowing users a range of choices in developing application hardware. These include:

- Two Crystal modes
- External Clock (EC) mode
- A Phase-Locked Loop (PLL) frequency multiplier, which allows processor speeds up to 32 MHz
- An internal Fast RC Oscillator (FRC), a nominal 8 MHz output with multiple frequency divider options
- A separate internal Low-Power RC (LPRC) Oscillator, 32 kHz nominal for low-power, timing-insensitive applications

The internal oscillator block also provides a stable reference source for the Fail-Safe Clock Monitor (FSCM). This option constantly monitors the main clock source against a reference signal provided by the internal oscillator and enables the controller to switch to the internal oscillator, allowing for continued low-speed operation or a safe application shutdown.

1.1.4 Easy Migration

Regardless of the memory size, all devices share the same rich set of peripherals, allowing for a smooth migration path as applications grow and evolve. The consistent pinout scheme used throughout the entire family also aids in migrating from one device to the next larger device.

1.2 DMA Controller

PIC24FJ64GP205/GU205 family devices have a Direct Memory Access (DMA) Controller. This module acts in concert with the CPU, allowing data to move between data memory and peripherals without the intervention of the CPU, increasing data throughput and decreasing execution time overhead. Six independently programmable channels make it possible to service multiple peripherals at virtually the same time, with each channel peripheral performing a different operation. Many types of data transfer operations are supported.

1.3 USB On-The-Go (OTG)

The PIC24FJ64GP205/GU205 family of devices has USB On-The-Go functionality. This module provides on-chip functionality as a target device compatible with the USB 2.0 standard, as well as limited stand-alone functionality as a USB embedded host. By implementing USB Host Negotiation Protocol (HNP), the module can also dynamically switch between device and host operation, allowing for a much wider range of versatile USB-enabled applications on a microcontroller platform. In addition to USB host functionality, the PIC24FJ64GP205/GU205 family devices provide a true single chip USB solution, including an on-chip transceiver and voltage regulator, and a voltage boost generator for sourcing bus power during host operations.

1.4 Other Special Features


- **Peripheral Pin Select:** The Peripheral Pin Select (PPS) feature allows most digital peripherals to be mapped over a fixed set of digital I/O pins. Users may independently map the input and/or output of any one of the many digital peripherals to any one of the I/O pins.
- **Configurable Logic Cell:** The Configurable Logic Cell (CLC) module allows the user to specify combinations of signals as inputs to a logic function and to use the logic output to control other peripherals or I/O pins.
- **Timing Modules:** The PIC24FJ64GP205/GU205 family provides three independent, general purpose, 16-bit timers (two of which can be combined into two 32-bit timers). The devices also include five multiple output advanced Capture/Compare/PWM/Timer peripherals.
- **Communications:** The PIC24FJ64GP205/GU205 family incorporates a range of serial communication peripherals to handle a range of application requirements. There are two independent I²C modules that support both Host and Client modes of operation. Devices also have, through the PPS feature, two independent UARTs with built-in IrDA[®] encoders/decoders and two SPI modules.
- **Analog Features:** All members of the PIC24FJ64GP205/GU205 family include a 12-bit A/D Converter (ADC) module and a triple comparator module. The A/D module incorporates a range of new features that allow the converter to assess and make decisions on incoming data, reducing CPU overhead for routine A/D conversions. The comparator module includes three analog comparators that are configurable for a wide range of operations.
- **Real-Time Clock and Calendar (RTCC):** This module implements a full-featured clock and calendar with alarm functions in hardware, freeing up timer resources and program memory space for use of the core application.
- **Deadman Timer (DMT):** This module is provided to interrupt the processor in the event of a software malfunction.

1.5 Feature Set

Devices in the PIC24FJ64GP205/GU205 family are available in 28-pin, 36-pin and 48-pin packages. The general block diagram for all devices is shown in [Figure 1-1](#).

A list of the pin features available on the PIC24FJ64GP205/GU205 family devices, sorted by function, is shown in [Table 1-1](#). Pin feature information is provided in the pinout diagrams in the beginning of this data sheet. Multiplexed features are sorted by the priority given to a feature, with the highest priority peripheral being listed first.

Figure 1-1. PIC24FJ64GP205/GU205 Family General Block Diagram

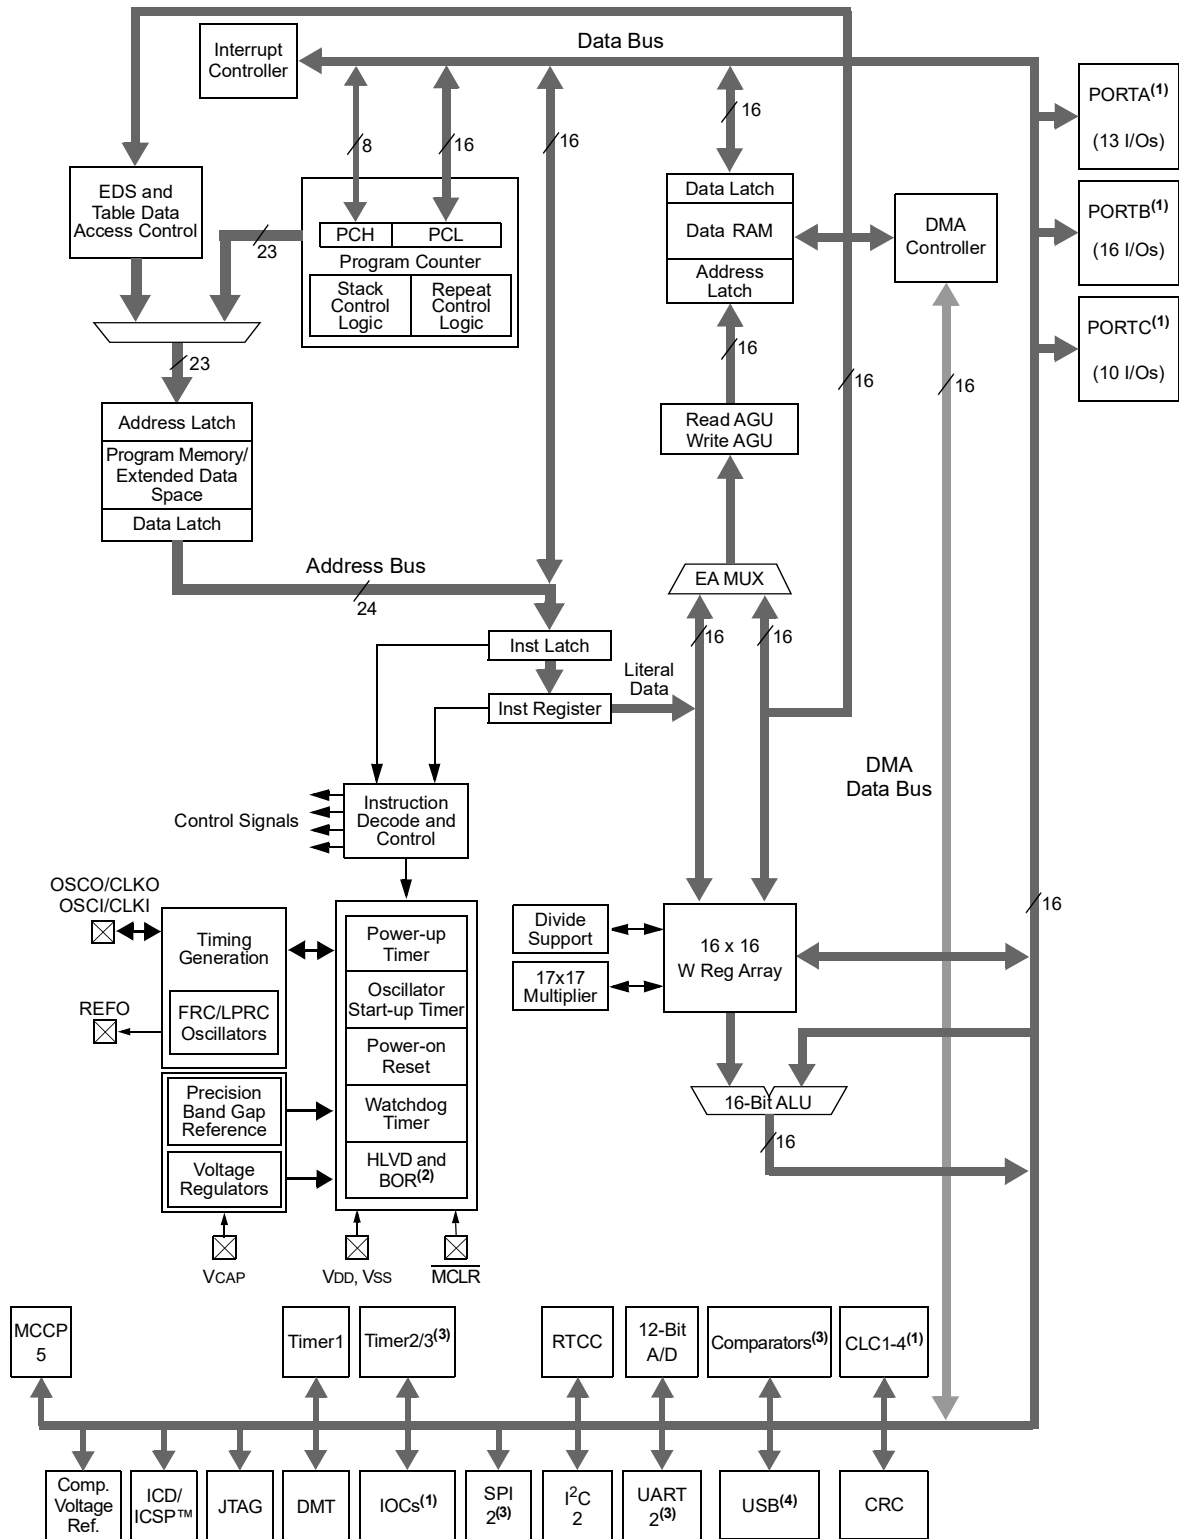

PIC24FJ64GP205/GU205 Family

Device Overview

Notes:

1. Not all I/O pins or features are implemented on all device pinout configurations. See pinout diagrams and tables for specific implementations by pin count.
2. BOR functionality is provided when the on-board voltage regulator is enabled.
3. Some peripheral I/Os are only accessible through remappable pins.
4. USB is available on PIC24FJXXXGUXXX devices only.

Table 1-1. PIC24FJ64GP205/GU205 Family Pinout Description

| Pin Name | Pin Type | Buffer Type | PPS | Description |
|----------------------------------|----------|------------------|------------|---|
| AN0-AN13 | I | Analog | No | A/D Analog Inputs |
| AV _{DD} | P | — | No | Positive Supply for Analog Modules |
| AV _{SS} | P | — | No | Ground Reference for Analog Modules |
| C1INA-C1IND C1OUT | I O | Analog DIG | No Yes | Comparator 1 Inputs A through D Comparator 1 Output |
| C2INA-C2IND C2OUT | I O | Analog DIG | No Yes | Comparator 2 Inputs A through D Comparator 2 Output |
| AC2INC | I | Analog | No | Alternate Comparator 2 Input C |
| CLKI CLKO | — O | — DIG | No No | Primary Oscillator Clock Input (EC) System Clock Output |
| CV _{REF} | O | Analog | No | Comparator Voltage Reference Output |
| CV _{REF} ⁺ | I | Analog | No | Comparator Voltage Reference (high) Input |
| CV _{REF} ⁻ | I | Analog | No | Comparator Voltage Reference (low) Input |
| INT0 INT1-INT4 | I I | ST ST | No Yes | External Interrupt Input 0 External Interrupt Inputs 1 through 4 |
| LVDIN | I | Analog | No | Low-Voltage Detect Input |
| MCLR | I | ST | No | Master Clear (device Reset) Input, this line is brought low to cause a Reset |
| ICM1A-ICM1B | I | ST | Yes | MCCP1 Capture Inputs A through B |
| TCKIA-TCKIB | I | ST | Yes | MCCP Timer Clock Inputs A through B |
| OCFA-OCFB | I | ST | Yes | MCCP Fault Inputs A through B |
| OCM1A-OCM1B | O | DIG | No | MCCP1 Outputs A through B |
| OCM2A-OCM2B | O | DIG | No | MCCP2 Outputs A through B |
| OCM3A-OCM3B | O | DIG | No | MCCP3 Outputs A through B |
| OCM4A-OCM4B | O | DIG | Yes | MCCP4 Outputs A through B |
| OCM5A-OCM5B | O | DIG | Yes | MCCP5 Outputs A through B |
| CLCINA-CLCIND CLC1OUT-CLC4OUT | I O | ST DIG | Yes Yes | CLC Inputs A through D CLC Outputs 1 through 4 |
| OSCI OSCO | I O | Analog Analog | No No | Primary Oscillator Crystal Connection Input Primary Oscillator Crystal Connection Output |
| SOSCI SOSCO | I O | Analog Analog | No No | Secondary Oscillator Crystal Connection Input Secondary Oscillator Crystal Connection Output |

PIC24FJ64GP205/GU205 Family

Device Overview

.....continued

| Pin Name | Pin Type | Buffer Type | PPS | Description |
|----------------|----------|-------------|-----|--|
| CLKI | I | ST | No | Primary Oscillator Input (EC) |
| CLKO | O | DIG | No | CPU Clock Output |
| PGEC1 | I | ST | No | ICSP™ Programming Clock 1 |
| PGED1 | I/O | DIG/ST | No | ICSP Programming Data 1 |
| PGEC2 | I | ST | No | ICSP Programming Clock 2 |
| PGED2 | I/O | DIG/ST | No | ICSP Programming Data 2 |
| PGEC3 | I | ST | No | ICSP Programming Clock 3 |
| PGED3 | I/O | DIG/ST | No | ICSP Programming Data 3 |
| PWRLCLK | I | ST | No | Real-Time Clock 50/60 Hz Clock Input |
| TMPRN | I | ST | Yes | Tamper Detect |
| PWRGT | O | DIG | Yes | RTCC Power Control |
| RTCC | O | DIG | Yes | RTCC Clock Output |
| REFO | O | DIG | Yes | Reference Clock Output |
| REFI | I | ST | Yes | Reference Clock Input |
| RA0-4, RA7-14 | I/O | DIG/ST | No | PORTA Digital I/Os |
| RB0-15 | I/O | DIG/ST | No | PORTB Digital I/Os |
| RC0-9, RC12-15 | I/O | DIG/ST | No | PORTC Digital I/Os |
| RP0-RP33 | I/O | DIG/ST | Yes | Remappable Peripherals (input or output) |
| RPI0-RPI29 | I | ST | Yes | Remappable Peripherals (input only) |
| SCK1 | I/O | ST | Yes | Synchronous Serial Clock Input/Output for SPI1 |
| SDI1 | I | ST | Yes | SPI1 Data In |
| SDO1 | O | DIG | Yes | SPI1 Data Out |
| SS1 | I/O | ST | Yes | SPI1 Slave Synchronization or Frame Pulse I/O |
| SCK2 | I/O | ST | Yes | Synchronous Serial Clock Input/Output for SPI2 |
| SDI2 | I | ST | Yes | SPI2 Data In |
| SDO2 | O | DIG | Yes | SPI2 Data Out |
| SS2 | I/O | ST | Yes | SPI2 Slave Synchronization or Frame Pulse I/O |
| SCL1 | I/O | DIG/I2C/SMB | No | I2C1 Synchronous Serial Clock Input/Output |
| SDA1 | I/O | DIG/I2C/SMB | No | I2C1 Data Input/Output |
| ASCL1 | I/O | DIG/I2C/SMB | No | Alternate I2C1 Synchronous Serial Clock Input/Output |
| ASDA1 | I/O | DIG/I2C/SMB | No | Alternate I2C1 Data Input/Output |
| SCL2 | I/O | DIG/I2C/SMB | No | I2C2 Synchronous Serial Clock Input/Output |
| SDA2 | I/O | DIG/I2C/SMB | No | I2C2 Data Input/Output |

.....continued

| Pin Name | Pin Type | Buffer Type | PPS | Description |
|-------------------------------|----------|-------------|-----|--|
| U1CTS | I | ST | Yes | UART1 Clear-to-Send |
| U1RTS | O | DIG | Yes | UART1 Request-to-Send |
| U1RX | I | ST | Yes | UART1 Receive |
| U1TX | O | DIG | Yes | UART1 Transmit |
| U2CTS | I | ST | Yes | UART2 Clear-to-Send |
| U2RTS | O | DIG | Yes | UART2 Request-to-Send |
| U2RX | I | ST | Yes | UART2 Receive |
| U2TX | O | DIG | Yes | UART2 Transmit |
| SCLKI | I | ST | No | Secondary Oscillator Clock Input |
| T1CK | I | ST | No | Timer1 Clock |
| T2CK-T3CK | I | ST | Yes | Timer2 through Timer3 Clock |
| TxCK | I | ST | Yes | Generic Timerx External Clock |
| TCK | I | ST | No | JTAG Test Clock/Programming Clock Input |
| TDI | I | ST | No | JTAG Test Data/Programming Data Input |
| TDO | O | DIG | No | JTAG Test Data Output |
| TMS | I | ST | No | JTAG Test Mode Select Input |
| V _{CAP} | P | — | No | External Filter Capacitor Connection (regulator enabled) |
| V _{DD} | P | — | No | Positive Supply for Peripheral Digital Logic and I/O Pins |
| V _{REF} ⁺ | I | Analog | No | Comparator and A/D Reference Voltage (high) Input |
| V _{SS} | P | — | No | Ground Reference for Peripheral Digital Logic and I/O Pins |
| D+ | I/O | — | | USB Signaling High |
| D- | I/O | — | | USB Signaling Low |
| USBOEN | I | DIG | | USB Output Enable (active-low) |
| V _{BUS} | I | Analog | | V _{USB} Supply Detect |
| V _{USB3V3} | P | — | | 3.3V V _{USB} |
| USBID | I | ST | | USB OTG ID Input |

Legend: DIG = Digital levels output, ST = Schmitt Trigger input buffer, I2C = I²C/SMBus input buffer, Analog = Analog level input/output

2. Guidelines for Getting Started with 16-Bit MCUs

2.1 Basic Connection Requirements

Getting started with the PIC24FJ64GP205/GU205 family of 16-bit microcontrollers requires attention to a minimal set of device pin connections before proceeding with development.

The following pins must always be connected:

- All V_{DD} , V_{USB3V3} and V_{SS} pins (see 2.2. [Power Supply Pins](#))
- All AV_{DD} and AV_{SS} pins, regardless of whether or not the analog device features are used (see 2.2. [Power Supply Pins](#))
- \overline{MCLR} pin (see 2.3. [Master Clear \(MCLR\) Pin](#))
- V_{CAP} pin (see 2.4. [Voltage Regulator Pin \(VCAP\)](#))

These pins must also be connected if they are being used in the end application:

- $PGE_{Cx}/PGED_{Cx}$ pins used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes (see 2.5. [ICSP Pins](#))
- $OSCI$ and $OSCO$ pins when an external oscillator is used (see 2.6. [External Oscillator Pins](#))


Additionally, the following pins may be required:

- V_{REF+} pin used when external voltage reference for analog modules is implemented

Note: The AV_{DD} and AV_{SS} pins must always be connected, regardless of whether any of the analog modules are being used.

The minimum mandatory connections are shown in [Figure 2-1](#).

Figure 2-1. Recommended Minimum Connections⁽²⁾

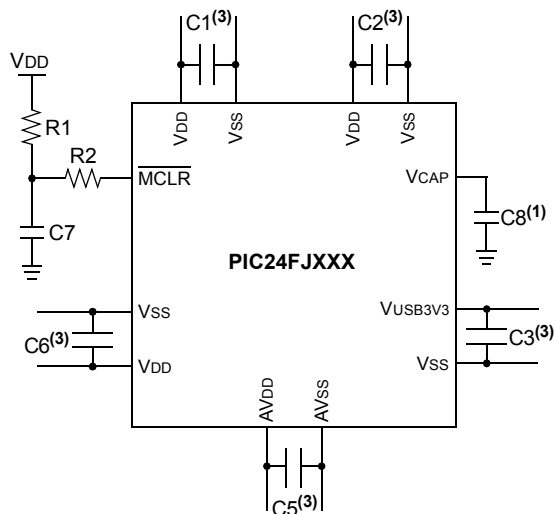

Key (all values are recommendations):

C1 through C7: 0.1 μF , 20V ceramic

C8: 10 μF , 6.3V or greater, tantalum or ceramic

R1: 10 k Ω

R2: 100 Ω to 470 Ω

Notes:

1. See [2.4. Voltage Regulator Pin \(VCAP\)](#) for an explanation of voltage regulator pin connections.
2. The example shown is for a PIC24F device with five V_{DD}/V_{SS} , V_{USB3V3}/V_{SS} and AV_{DD}/AV_{SS} pin pairs. Other devices may have more or less pairs; adjust the number of decoupling capacitors appropriately.
3. These pins have an increased current drive strength.

2.2 Power Supply Pins

2.2.1 Decoupling Capacitors

The use of decoupling capacitors on every power supply pin, such as V_{DD} , V_{USB3V3} and AV_{DD} , is required.

Consider the following criteria when using decoupling capacitors:

- Value and type of capacitor: 0.1 μF (100 nF), 25V-50V capacitor is recommended. The capacitor should be a low-ESR device with a self-resonance frequency in the range of 200 MHz and higher. Ceramic capacitors are recommended.
- Placement on the Printed Circuit Board: The decoupling capacitors should be placed as close to the pins as possible. It is recommended to place the capacitors on the same side of the board as the device. If space is constricted, the capacitor can be placed on another layer on the PCB using a via; however, ensure that the trace length from the pin to the capacitor is no greater than 0.25 inch (6 mm).
- Handling high-frequency noise: If the board is experiencing high-frequency noise (upward of tens of MHz), add a second ceramic-type capacitor in parallel to the above described decoupling capacitor. The value of the second capacitor can be in the range of 0.01 μF to 0.001 μF . Place this second capacitor next to each primary decoupling capacitor. In high-speed circuit designs, consider implementing a decade pair of capacitances as close to the power and ground pins as possible (e.g., 0.1 μF in parallel with 0.001 μF).
- Maximizing performance: On the board layout from the power supply circuit, run the power and return traces to the decoupling capacitors first, and then to the device pins. This ensures that the decoupling capacitors are first in the power chain. Equally important is to keep the trace length between the capacitor and the power pins to a minimum, thereby reducing PCB trace inductance.

2.2.2 Bulk Capacitors

On boards with power traces running longer than six inches in length, it is suggested to use a bulk capacitance of 10 μF or greater located near the MCU. The value of the capacitor should be determined based on the trace resistance that connects the power supply source to the device and the maximum current drawn by the device in the application. Typical values range from 10 μF to 47 μF .

2.3 Master Clear ($\overline{\text{MCLR}}$) Pin

The $\overline{\text{MCLR}}$ pin provides two specific device functions: device Reset, and device programming and debugging. If programming and debugging are not required in the end application, a direct connection to V_{DD} may be all that is required. The addition of other components to help increase the application's resistance to spurious Resets from voltage sags may be beneficial. A typical configuration is shown in [Figure 2-1](#). Other circuit designs may be implemented depending on the application's requirements.


During programming and debugging, the resistance and capacitance that can be added to the pin must be considered. Device programmers and debuggers drive the $\overline{\text{MCLR}}$ pin. Consequently, specific voltage levels (V_{IH} and V_{IL}) and fast signal transitions must not be adversely affected. Therefore, specific values of $R1$ and $C1$ will need to be adjusted based on the application and PCB requirements. For example, it is recommended that the capacitor, $C1$, be isolated from the $\overline{\text{MCLR}}$ pin during programming and debugging operations by using a jumper ([Figure 2-2](#)). The jumper is replaced for normal run-time operations.

Any components associated with the $\overline{\text{MCLR}}$ pin should be placed within 0.25 inch (6 mm) of the pin.

PIC24FJ64GP205/GU205 Family

Guidelines for Getting Started with 16-Bit M...

Figure 2-2. Example of MCLR Pin Connections



Notes:

1. $R1 \leq 10 \text{ k}\Omega$ is recommended. A suggested starting value is 10 k Ω . Ensure that the $\overline{\text{MCLR}}$ pin V_{IH} and V_{IL} specifications are met.
2. $R2 \leq 470\Omega$ will limit any current flowing into $\overline{\text{MCLR}}$ from the external capacitor, C, in the event of a $\overline{\text{MCLR}}$ pin breakdown, due to Electrostatic Discharge (ESD) or Electrical Overstress (EOS). Ensure that the $\overline{\text{MCLR}}$ pin V_{IH} and V_{IL} specifications are met.


2.4 Voltage Regulator Pin (V_{CAP})

A low-ESR ($< 5\Omega$) capacitor is required on the V_{CAP} pin to stabilize the voltage regulator output voltage. The V_{CAP} pin must not be connected to V_{DD} and must use a capacitor of 10 μF connected to ground. The type can be ceramic or tantalum. Suitable examples of capacitors are shown in Table 2-1. Capacitors with equivalent specifications can be used.

Designers may use Figure 2-3 to evaluate the ESR equivalence of candidate devices.

The placement of this capacitor should be close to V_{CAP} . It is recommended that the trace length not exceed 0.25 inch (6 mm). Refer to 27.4. On-Chip Voltage Regulator for additional information.

Figure 2-3. Frequency vs. ESR Performance for Suggested V_{CAP}

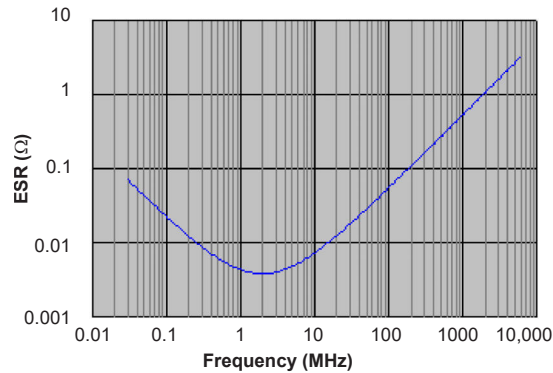

Note: Typical data measurement at +25°C, 0V DC bias.

Table 2-1. Suitable Capacitor Equivalent (0805 Case Size)

| Make | Part # | Nominal Capacitance | Base Tolerance | Rated Voltage |
|---------------------|---------------------|---------------------|----------------|---------------|
| TDK Corporation | C2012X5R1E106K085AC | 10 μF | $\pm 10\%$ | 25V |
| TDK Corporation | C2012X5R1C106K085AC | 10 μF | $\pm 10\%$ | 16V |
| KEMET | C0805C106M4PACTU | 10 μF | $\pm 10\%$ | 16V |
| Murata Electronics® | GRM21BR61E106KA3L | 10 μF | $\pm 10\%$ | 25V |
| Murata Electronics | GRM21BR61C106KE15 | 10 μF | $\pm 10\%$ | 16V |

2.4.1 Considerations for Ceramic Capacitors

In recent years, large value, low-voltage, surface-mount ceramic capacitors have become very cost-effective in sizes up to a few tens of microfarad. The low-ESR, small physical size and other properties make ceramic capacitors very attractive in many types of applications.

Ceramic capacitors are suitable for use with the internal voltage regulator of this microcontroller. However, some care is needed in selecting the capacitor to ensure that it maintains sufficient capacitance over the intended operating range of the application.


Typical low-cost, 10 μF ceramic capacitors are available in X5R, X7R and Y5V dielectric ratings (other types are also available, but are less common). The initial tolerance specifications for these types of capacitors are often specified as $\pm 10\%$ to $\pm 20\%$ (X5R and X7R) or $-20\%/+80\%$ (Y5V). However, the effective capacitance that these capacitors provide in an application circuit will also vary based on additional factors, such as the applied DC bias voltage and the temperature. The total in-circuit tolerance is, therefore, much wider than the initial tolerance specification.

The X5R and X7R capacitors typically exhibit satisfactory temperature stability (ex: $\pm 15\%$ over a wide temperature range, but consult the manufacturer's data sheets for exact specifications). However, Y5V capacitors typically have extreme temperature tolerance specifications of $+22\%/-82\%$. Due to the extreme temperature tolerance, a 10 μF nominal rated Y5V type capacitor may not deliver enough total capacitance to meet minimum internal voltage regulator stability and transient response requirements. Therefore, Y5V capacitors are not recommended for use with the internal regulator if the application must operate over a wide temperature range.

In addition to temperature tolerance, the effective capacitance of large value ceramic capacitors can vary substantially, based on the amount of DC voltage applied to the capacitor. This effect can be very significant, but is often overlooked or is not always documented.

A typical DC bias voltage vs. capacitance graph for X7R type capacitors is shown in [Figure 2-4](#).

Figure 2-4. DC Bias Voltage vs. Capacitance Characteristics

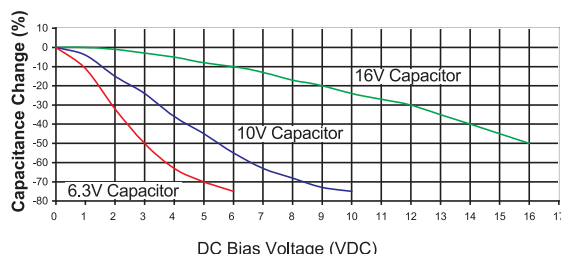

When selecting a ceramic capacitor to be used with the internal voltage regulator, it is suggested to select a high-voltage rating so that the operating voltage is a small percentage of the maximum rated capacitor voltage. For example, choose a ceramic capacitor rated at a minimum of 16V for the 1.8V core voltage. Suggested capacitors are shown in [Table 2-1](#).

2.5 ICSP Pins

The PGECx and PGEDx pins are used for In-Circuit Serial Programming™ (ICSP™) and debugging purposes. It is recommended to keep the trace length between the ICSP connector and the ICSP pins on the device as short as possible. If the ICSP connector is expected to experience an ESD event, a series resistor is recommended, with the value in the range of a few tens of ohms, not to exceed 100 Ω .

Pull-up resistors, series diodes and capacitors on the PGECx and PGEDx pins are not recommended as they will interfere with the programmer/debugger communications to the device. If such discrete components are an application requirement, they should be removed from the circuit during programming and debugging.

For device emulation, ensure that the “Communication Channel Select” pins (i.e., PGECx/PGEDx) programmed into the device match the physical connections for the ICSP to the Microchip debugger/emulator tool.

For more information on available Microchip development tool connection requirements, refer to [28. Development Support](#).

2.6 External Oscillator Pins

Many microcontrollers have options for at least two oscillators: a high-frequency Primary Oscillator and a low-frequency Secondary Oscillator (refer to 9. [Oscillator Configuration](#) for details).

The oscillator circuit should be placed on the same side of the board as the device. Place the oscillator circuit close to the respective oscillator pins with no more than 0.5 inch (12 mm) between the circuit components and the pins. The load capacitors should be placed next to the oscillator itself, on the same side of the board.

Use a grounded copper pour around the oscillator circuit to isolate it from surrounding circuits. The grounded copper pour should be routed directly to the MCU ground. Do not run any signal traces or power traces inside the ground pour. Also, if using a two-sided board, avoid any traces on the other side of the board where the crystal is placed.


Layout suggestions are shown in [Figure 2-5](#). In-line packages may be handled with a single-sided layout that completely encompasses the oscillator pins. With fine-pitch packages, it is not always possible to completely surround the pins and components. A suitable solution is to tie the broken guard sections to a mirrored ground layer. In all cases, the guard trace(s) must be returned to ground.

In planning the application's routing and I/O assignments, ensure that adjacent port pins, and other signals in close proximity to the oscillator, are benign (i.e., free of high frequencies, short rise and fall times and other similar noise).

For additional information and design guidance on oscillator circuits, please refer to these Microchip Application Notes, available at the corporate website (www.microchip.com):

- AN943, "Practical PICmicro® Oscillator Analysis and Design"
- AN949, "Making Your Oscillator Work"
- AN1798, "Crystal Selection for Low-Power Secondary Oscillator"

Figure 2-5. Suggested Placement of the Oscillator Circuit

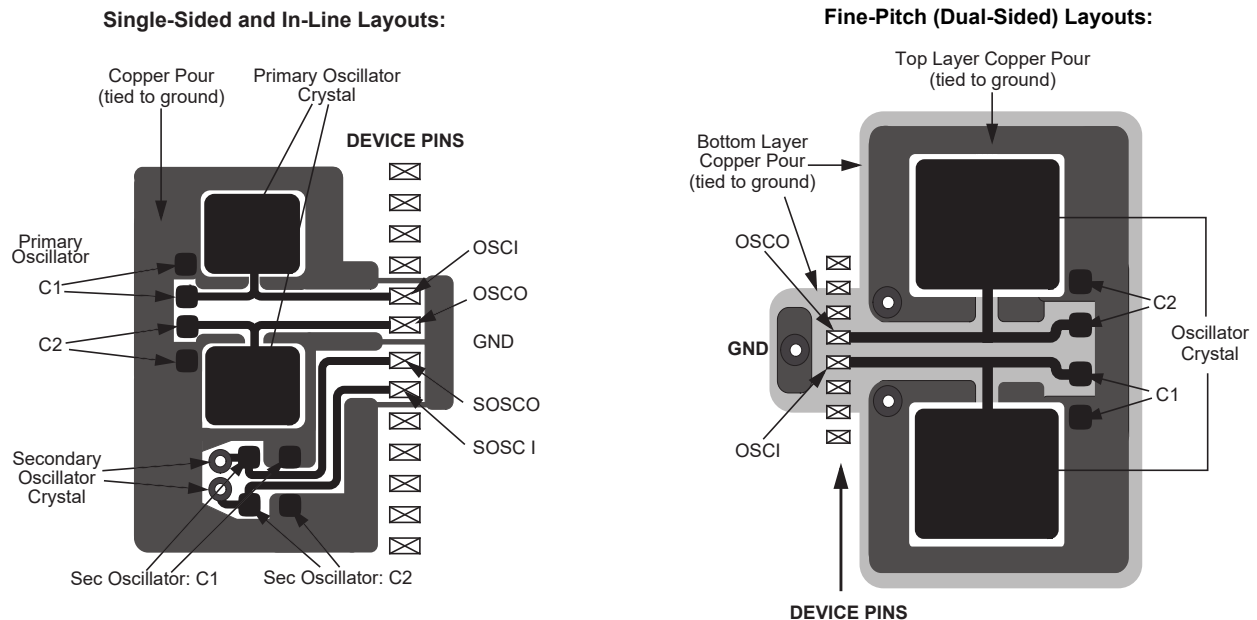

2.7 Unused I/Os

Unused I/O pins should be configured as outputs and driven to a logic low state. Alternatively, connect a 1 k Ω to 10 k Ω resistor to V_{SS} on unused pins.

3. CPU

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information on the CPU, refer to “**CPU with Extended Data Space (EDS)**” (www.microchip.com/DS39732) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The PIC24F CPU has a 16-bit (data) modified Harvard architecture with an enhanced instruction set and a 24-bit instruction word with a variable length opcode field. The Program Counter (PC) is 23 bits wide and addresses up to 4M instructions of user program memory space. A single-cycle instruction prefetch mechanism is used to help maintain throughput and provides predictable execution. All instructions execute in a single cycle, with the exception of instructions that change the program flow, the double-word move (`MOV.D`) instruction and the table instructions. Overhead-free program loop constructs are supported using the `REPEAT` instructions, which are interruptible at any point.

PIC24F devices have sixteen, 16-bit Working registers in the programmer's model. Each of the Working registers can act as a Data, Address or Address Offset register. The 16th Working register (W15) operates as a Software Stack Pointer (SSP) for interrupts and calls.

The lower 32 Kbytes of the Data Space (DS) can be accessed linearly. The upper 32 Kbytes of the Data Space are referred to as Extended Data Space (EDS), to which the extended data RAM or program memory can be mapped.

The core supports Inherent (no operand), Relative, Literal and Memory Direct Addressing modes, along with three groups of addressing modes. All modes support Register Direct and various Register Indirect modes. Each group offers up to seven addressing modes. Instructions are associated with predefined addressing modes depending upon their functional requirements.

For most instructions, the core is capable of executing a data (or program data) memory read, a Working register (data) read, a data memory write and a program (instruction) memory read per instruction cycle. As a result, three parameter instructions can be supported, allowing trinary operations (for example, $A + B = C$) to be executed in a single cycle.

A high-speed, 17-bit x 17-bit multiplier has been included to significantly enhance the core arithmetic capability and throughput. The multiplier supports Signed, Unsigned and Mixed mode, 16-bit x 16-bit or 8-bit x 8-bit, integer multiplication. All multiply instructions execute in a single cycle.

The 16-bit ALU has been enhanced with integer divide assist hardware that supports an iterative non-restoring divide algorithm. It operates in conjunction with the `REPEAT` instruction looping mechanism and a selection of iterative divide instructions to support 32-bit (or 16-bit), divided by 16-bit, integer signed and unsigned division. All divide operations require 19 cycles to complete but are interruptible at any cycle boundary.

The PIC24F has a vectored exception scheme with up to eight sources of non-maskable traps and up to 118 interrupt sources. Each interrupt source can be assigned to one of seven priority levels.

A block diagram of the CPU is shown in [Figure 3-1](#).

3.1 Programmer's Model

The programmer's model for the PIC24F is shown in [Figure 3-2](#). All registers in the programmer's model are memory-mapped and can be manipulated directly by instructions.

A description of each register is provided in [Table 3-1](#). All registers associated with the programmer's model are memory-mapped.

Figure 3-1. PIC24F CPU Core Block Diagram

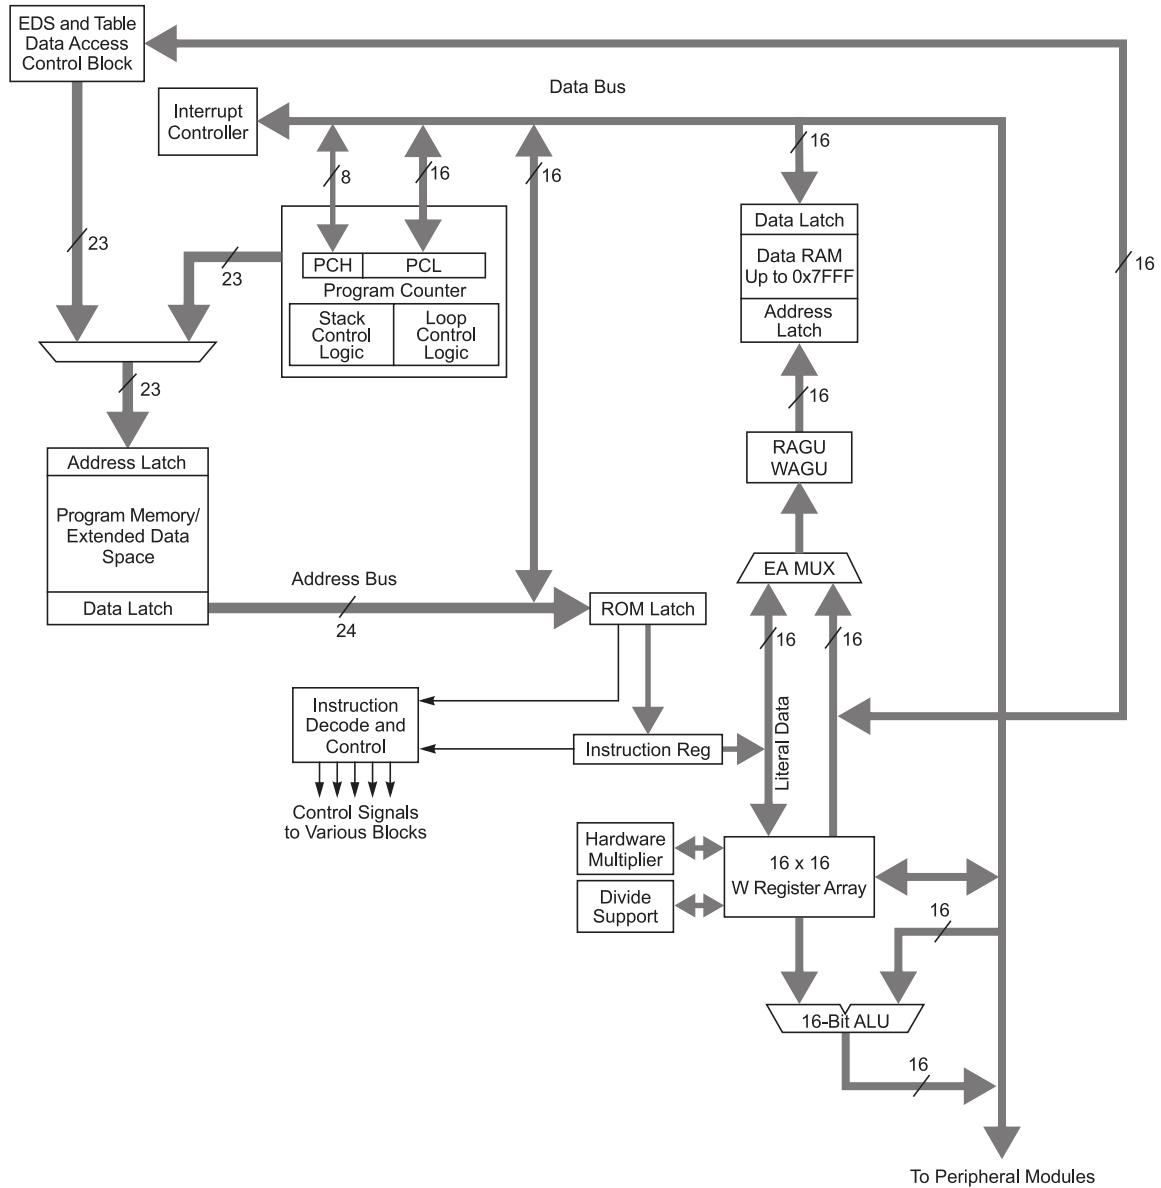


Table 3-1. CPU Core Registers

| Register(s) Name | Description |
|------------------|------------------------------------|
| W0 through W15 | Working Register Array |
| PC | 23-Bit Program Counter |
| SR | ALU STATUS Register |
| SPLIM | Stack Pointer Limit Value Register |
| TBLPAG | Table Memory Page Address Register |


PIC24FJ64GP205/GU205 Family

CPU

.....continued

| Register(s) Name | Description |
|------------------|----------------------------------|
| RCOUNT | REPEAT Loop Counter Register |
| CORCON | CPU Control Register |
| DISICNT | Disable Interrupt Count Register |
| DSRPAG | Data Space Read Page Register |
| DSWPAG | Data Space Write Page Register |

Figure 3-2. Programmer's Model

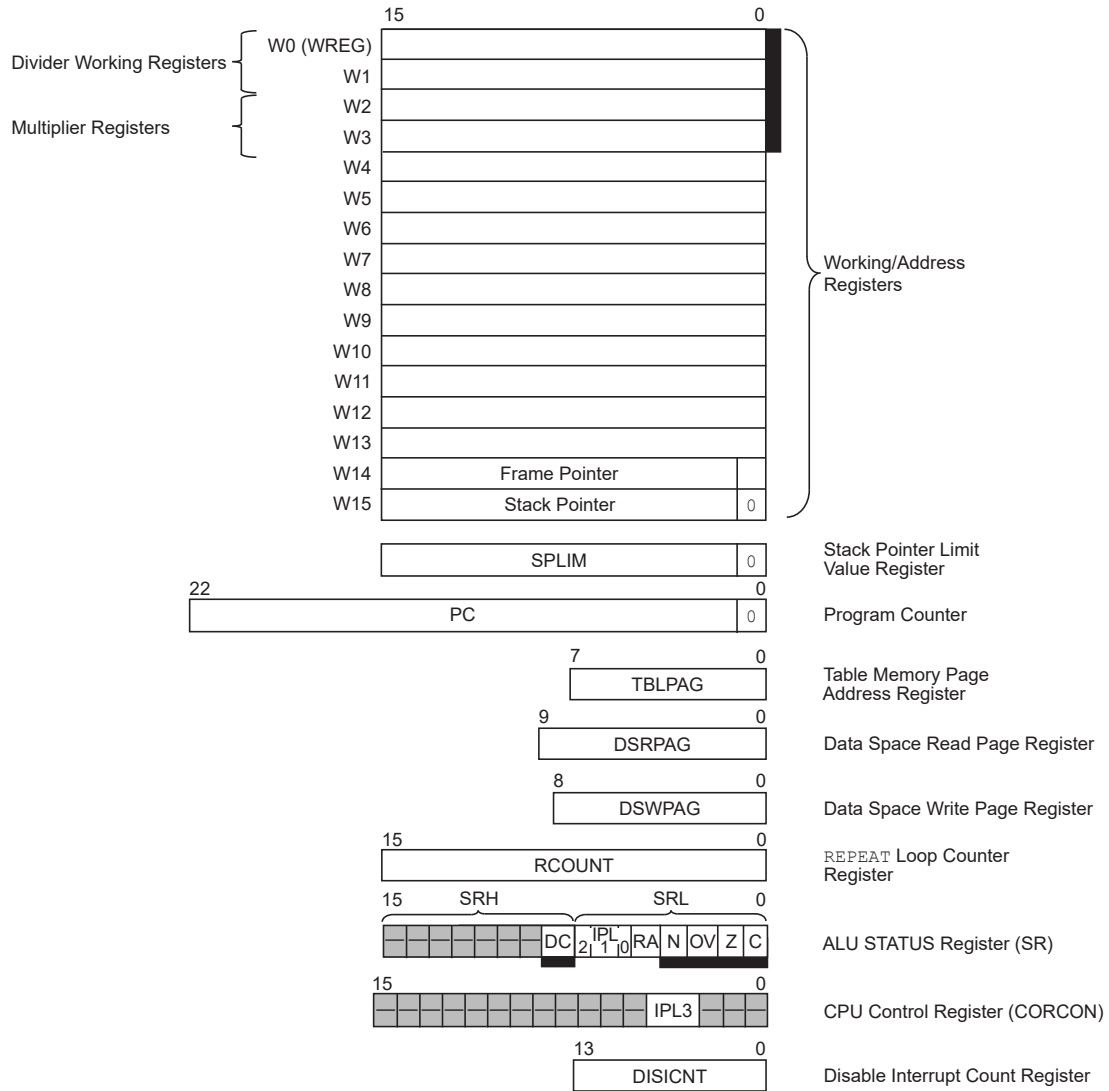

Registers or bits are shaded for `PUSH.S` and `POP.S` instructions.

3.2 Arithmetic Logic Unit (ALU)

The PIC24F ALU is 16 bits wide and is capable of addition, subtraction, bit shifts and logic operations. Unless otherwise mentioned, arithmetic operations are two's complement in nature. Depending on the operation, the ALU may affect the values of the Carry (C), Zero (Z), Negative (N), Overflow (OV) and Digit Carry (DC) Status bits in the SR register. The C and DC Status bits operate as Borrow and Digit Borrow bits, respectively, for subtraction operations.

The ALU can perform 8-bit or 16-bit operations, depending on the mode of the instruction that is used. Data for the ALU operation can come from the W register array, or data memory, depending on the addressing mode of the instruction. Likewise, output data from the ALU can be written to the W register array or a data memory location.

The PIC24F CPU incorporates hardware support for both multiplication and division. This includes a dedicated hardware multiplier and support hardware for 16-bit divisor division.

3.2.1 Multiplier

The ALU contains a high-speed, 17-bit x 17-bit multiplier. It supports unsigned, signed or mixed sign operation in several multiplication modes:

- 16-bit x 16-bit signed
- 16-bit x 16-bit unsigned
- 16-bit signed x 5-bit (literal) unsigned
- 16-bit unsigned x 16-bit unsigned
- 16-bit unsigned x 5-bit (literal) unsigned
- 16-bit unsigned x 16-bit signed
- 8-bit unsigned x 8-bit unsigned

3.2.2 Divider

The divide block supports 32-bit/16-bit and 16-bit/16-bit signed and unsigned integer divide operations with the following data sizes:

- 32-bit signed/16-bit signed divide
- 32-bit unsigned/16-bit unsigned divide
- 16-bit signed/16-bit signed divide
- 16-bit unsigned/16-bit unsigned divide

The quotient for all divide instructions ends up in W0 and the remainder in W1. The 16-bit signed and unsigned `DIV` instructions can specify any W register for both the 16-bit divisor (W_n), and any W register (aligned) pair ($W(m+1):W_m$) for the 32-bit dividend. The divide algorithm takes one cycle per bit of divisor, so both 32-bit/16-bit and 16-bit/16-bit instructions take the same number of cycles to execute.

3.2.3 Multibit Shift Support

The PIC24F ALU supports both single bit and single-cycle, multibit arithmetic and logic shifts. Multibit shifts are implemented using a shifter block, capable of performing up to a 15-bit arithmetic right shift, or up to a 15-bit left shift, in a single cycle. All multibit shift instructions only support Register Direct Addressing for both the operand source and result destination.

A full summary of instructions that use the shift operation is provided in [Table 3-2](#).

Table 3-2. Instructions that Use the Single Bit and Multibit Shift Operation

| Instruction | Description |
|-------------|---|
| ASR | Arithmetic Shift Right source register by one or more bits. |
| SL | Shift Left source register by one or more bits. |
| LSR | Logical Shift Right source register by one or more bits. |

3.3 CPU Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|----------|----------|--------------|---|---|----|------|-----|-------------|-----------|
| 0x00 | WREG0 | 7:0 | WREG0[7:0] | | | | | | | |
| | | 15:8 | WREG0[15:8] | | | | | | | |
| 0x02 | WREG1 | 7:0 | WREG1[7:0] | | | | | | | |
| | | 15:8 | WREG1[15:8] | | | | | | | |
| 0x04 | WREG2 | 7:0 | WREG2[7:0] | | | | | | | |
| | | 15:8 | WREG2[15:8] | | | | | | | |
| 0x06 | WREG3 | 7:0 | WREG3[7:0] | | | | | | | |
| | | 15:8 | WREG3[15:8] | | | | | | | |
| 0x08 | WREG4 | 7:0 | WREG4[7:0] | | | | | | | |
| | | 15:8 | WREG4[15:8] | | | | | | | |
| 0x0A | WREG5 | 7:0 | WREG5[7:0] | | | | | | | |
| | | 15:8 | WREG5[15:8] | | | | | | | |
| 0x0C | WREG6 | 7:0 | WREG6[7:0] | | | | | | | |
| | | 15:8 | WREG6[15:8] | | | | | | | |
| 0x0E | WREG7 | 7:0 | WREG7[7:0] | | | | | | | |
| | | 15:8 | WREG7[15:8] | | | | | | | |
| 0x10 | WREG8 | 7:0 | WREG8[7:0] | | | | | | | |
| | | 15:8 | WREG8[15:8] | | | | | | | |
| 0x12 | WREG9 | 7:0 | WREG9[7:0] | | | | | | | |
| | | 15:8 | WREG9[15:8] | | | | | | | |
| 0x14 | WREG10 | 7:0 | WREG10[7:0] | | | | | | | |
| | | 15:8 | WREG10[15:8] | | | | | | | |
| 0x16 | WREG11 | 7:0 | WREG11[7:0] | | | | | | | |
| | | 15:8 | WREG11[15:8] | | | | | | | |
| 0x18 | WREG12 | 7:0 | WREG12[7:0] | | | | | | | |
| | | 15:8 | WREG12[15:8] | | | | | | | |
| 0x1A | WREG13 | 7:0 | WREG13[7:0] | | | | | | | |
| | | 15:8 | WREG13[15:8] | | | | | | | |
| 0x1C | WREG14 | 7:0 | WREG14[7:0] | | | | | | | |
| | | 15:8 | WREG14[15:8] | | | | | | | |
| 0x1E | WREG15 | 7:0 | WREG15[7:0] | | | | | | | |
| | | 15:8 | WREG15[15:8] | | | | | | | |
| 0x20 | SPLIM | 7:0 | SPLIM[7:0] | | | | | | | |
| | | 15:8 | SPLIM[15:8] | | | | | | | |
| 0x22 ... 0x2D | Reserved | | | | | | | | | |
| 0x2E | PCL | 7:0 | PCL[7:0] | | | | | | | |
| | | 15:8 | PCL[15:8] | | | | | | | |
| 0x30 | PCH | 7:0 | PCH[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x32 | DSRPAG | 7:0 | DSRPAG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | DSRPAG[9:8] | |
| 0x33 | DSWPAG | 7:0 | DSWPAG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | DSWPAG[8] |
| 0x35 | Reserved | | | | | | | | | |
| 0x36 | RCOUNT | 7:0 | RCOUNT[7:0] | | | | | | | |
| | | 15:8 | RCOUNT[15:8] | | | | | | | |
| 0x38 ... 0x41 | Reserved | | | | | | | | | |
| 0x42 | SR | 7:0 | IPL[2:0] | | | RA | N | OV | Z | C |
| | | 15:8 | | | | | | | | DC |
| 0x44 | CORCON | 7:0 | | | | | IPL3 | PSV | | |
| | | 15:8 | | | | | | | | |

PIC24FJ64GP205/GU205 Family

CPU

|continued | | | | | | | | | | |
|---------------------|----------|----------|--------------|---|---------------|---|---|---|---|---|
| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x46 ... 0x51 | Reserved | | | | | | | | | |
| 0x52 | DISICNT | 7:0 | DISICNT[7:0] | | | | | | | |
| | | 15:8 | | | DISICNT[13:8] | | | | | |
| 0x54 | TBLPAG | 7:0 | TBLPAG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |

3.3.1 Working Register 0

Name: WREG0
Offset: 0x00

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG0[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG0[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG0[15:0] Data bits

3.3.2 Working Register 1

Name: WREG1
Offset: 0x02

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG1[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG1[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG1[15:0] Data bits

3.3.3 Working Register 2

Name: WREG2
Offset: 0x04

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG2[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG2[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG2[15:0] Data bits

3.3.4 Working Register 3

Name: WREG3
Offset: 0x06

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG3[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG3[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG3[15:0] Data bits

3.3.5 Working Register 4

Name: WREG4
Offset: 0x08

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG4[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG4[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG4[15:0] Data bits

3.3.6 Working Register 5

Name: WREG5
Offset: 0x0A

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG5[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG5[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG5[15:0] Data bits

3.3.7 Working Register 6

Name: WREG6
Offset: 0x0C

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG6[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG6[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG6[15:0] Data bits

3.3.8 Working Register 7

Name: WREG7
Offset: 0x0E

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG7[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG7[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG7[15:0] Data bits

3.3.9 Working Register 8

Name: WREG8
Offset: 0x10

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG8[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG8[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG8[15:0] Data bits

3.3.10 Working Register 9

Name: WREG9
Offset: 0x12

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG9[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG9[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG9[15:0] Data bits

3.3.11 Working Register 10

Name: WREG10

Offset: 0x14

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG10[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG10[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG10[15:0] Data bits

3.3.12 Working Register 11

Name: WREG11
Offset: 0x16

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG11[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG11[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG11[15:0] Data bits

3.3.13 Working Register 12

Name: WREG12
Offset: 0x18

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG12[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG12[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG12[15:0] Data bits

3.3.14 Working Register 13

Name: WREG13

Offset: 0x1A

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG13[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG13[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG13[15:0] Data bits

3.3.15 Working Register 14

Name: WREG14
Offset: 0x1C

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG14[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG14[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG14[15:0] Data or Frame Pointer bits

3.3.16 Working Register 15

Name: WREG15
Offset: 0x1E

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | WREG15[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WREG15[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – WREG15[15:0] Data or Stack Pointer bits

3.3.17 Stack Pointer Limit Value Register

Name: SPLIM
Offset: 0x20

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | SPLIM[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SPLIM[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – SPLIM[15:0] Stack Limit Address bits

3.3.18 Program Counter Low Register


Name: PCL
Offset: 0x2E

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PCL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PCL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PCL[15:0] Program Counter Low Value bits

3.3.19 Program Counter High Register

Name: PCH
Offset: 0x30

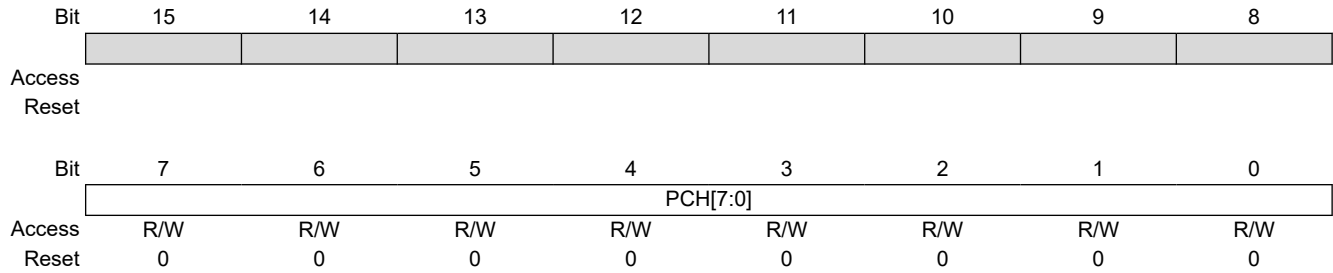

Bits 7:0 – PCH[7:0] Program Counter High Value bits

3.3.20 Data Space Read Page Register

Name: DSRPAG

Offset: 0x32

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | DSRPAG[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DSRPAG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:0 – DSRPAG[9:0] Data Space Read Page Value bits

3.3.21 Data Space Write Page Register

Name: DSWPAG
Offset: 0x33

| | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | DSWPAG[8] |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | DSWPAG[7:0] |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 8:0 – DSWPAG[8:0] Data Space Write Page Value bits

3.3.22 REPEAT Loop Counter Register

Name: RCOUNT
Offset: 0x36

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RCOUNT[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RCOUNT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – RCOUNT[15:0] Current Loop Counter Value for REPEAT Instruction bits

3.3.23 ALU STATUS Register

Name: SR
Offset: 0x42

Notes:

1. The IPLx Status bits are read-only when NSTDIS (INTCON1[15]) = 1.
2. The IPLx Status bits are concatenated with the IPL3 Status bit (CORCON[3]) to form the CPU Interrupt Priority Level (IPL). The value in parentheses indicates the IPL when IPL3 = 1.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | DC |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

| | | | | | | | | |
|--------|-----|----------|-----|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | IPL[2:0] | | RA | N | OV | Z | C |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 8 – DC ALU Half Carry/Borrow bit

| Value | Description |
|-------|--|
| 1 | A carry-out from the 4th low-order bit (for byte-sized data) or 8th low-order bit (for word-sized data) of the result occurred |
| 0 | No carry-out from the 4th or 8th low-order bit of the result has occurred |

Bits 7:5 – IPL[2:0] CPU Interrupt Priority Level Status bits^(1,2)

| Value | Description |
|-------|--|
| 111 | CPU Interrupt Priority Level is 7 (15); user interrupts are disabled |
| 110 | SDOx pin is controlled by the module |
| 101 | CPU Interrupt Priority Level is 5 (13) |
| 100 | CPU Interrupt Priority Level is 4 (12) |
| 011 | CPU Interrupt Priority Level is 3 (11) |
| 010 | CPU Interrupt Priority Level is 2 (10) |
| 001 | CPU Interrupt Priority Level is 1 (9) |
| 000 | CPU Interrupt Priority Level is 0 (8) |

Bit 4 – RA REPEAT Loop Active bit

| Value | Description |
|-------|--------------------------------|
| 1 | REPEAT loop is in progress |
| 0 | REPEAT loop is not in progress |

Bit 3 – N ALU Negative bit

| Value | Description |
|-------|--|
| 1 | Result was negative |
| 0 | Result was not negative (zero or positive) |

Bit 2 – OV ALU Overflow bit

| Value | Description |
|-------|---|
| 1 | Overflow occurred for signed (two's complement) arithmetic in this arithmetic operation |
| 0 | No overflow has occurred |

Bit 1 – Z ALU Zero bit

| Value | Description |
|-------|--|
| 1 | An operation, which affects the Z bit, has set it at some time in the past |
| 0 | The most recent operation, which affects the Z bit, has cleared it (i.e., a non-zero result) |

PIC24FJ64GP205/GU205 Family

CPU

Bit 0 – C ALU Carry/Borrow bit


| Value | Description |
|-------|--|
| 1 | A carry-out from the Most Significant bit (MSb) of the result occurred |
| 0 | No carry-out from the Most Significant bit of the result occurred |

3.3.24 CPU Core Control Register

Name: CORCON
Offset: 0x44

Notes:

1. The IPL3 bit is concatenated with the IPL[2:0] bits (SR[7:5]) to form the CPU Interrupt Priority Level; see [3.3.23. SR](#) for bit description.
2. If PSV = 0, any reads from data memory at 0x8000 and above will cause an address trap error instead of reading from the PSV section of program memory. This bit is not individually addressable.

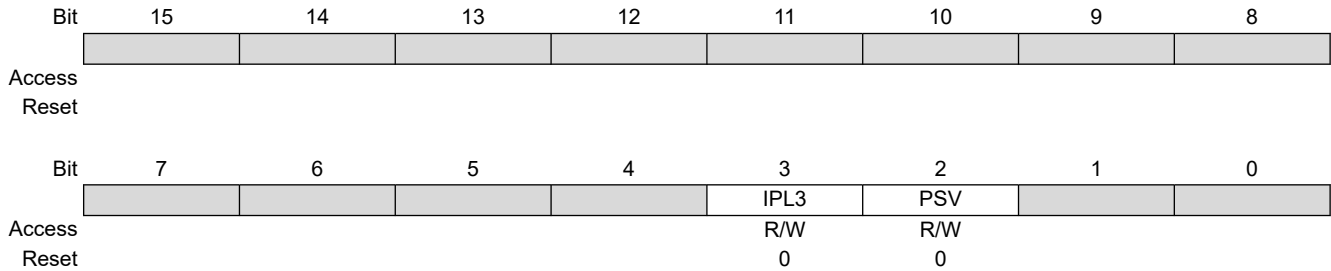

Bit 3 – IPL3 CPU Interrupt Priority Level Status bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | CPU Interrupt Priority Level is greater than 7 |
| 0 | CPU Interrupt Priority Level is 7 or less |

Bit 2 – PSV Program Space Visibility (PSV) in Data Space Enable⁽²⁾

| Value | Description |
|-------|--|
| 1 | Program space is visible in Data Space |
| 0 | Program space is not visible in Data Space |

3.3.25 Disable Interrupt Count Register

Name: DISICNT


Offset: 0x52

| | | | | | | | | |
|--------|--------------|-----|---------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | DISICNT[13:8] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DISICNT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:0 – DISICNT[13:0] Current Counter Value for `DISI` Instruction bits

3.3.26 Table Memory Page Address Register

Name: TBLPAG
Offset: 0x54

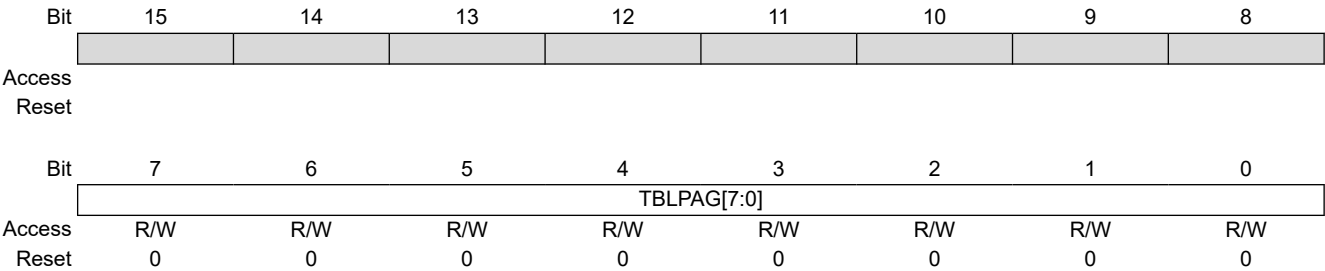

Bits 7:0 – TBLPAG[7:0] Table Memory Page Value bits

4. Program Memory

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**PIC24F Flash Program Memory**” (www.microchip.com/DS30009715) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

As Harvard architecture devices, PIC24F microcontrollers feature separate program and data memory spaces and buses. This architecture also allows direct access of program memory from the Data Space during code execution.

The program memory is readable, writable and erasable. The Flash memory can be programmed in four ways:

- In-Circuit Serial Programming™ (ICSP™)
- Run-Time Self-Programming (RTSP)
- JTAG
- Enhanced In-Circuit Serial Programming (Enhanced ICSP)

ICSP allows a PIC24FJ64GP205/GU205 family device to be serially programmed while in the end application circuit. This is simply done with two lines for the programming clock and programming data (named PGECx and PGEDx, respectively), and three other lines for power (V_{DD}), ground (V_{SS}) and Master Clear (\overline{MCLR}). This allows customers to manufacture boards with unprogrammed devices and then program the microcontroller just before shipping the product. This also allows the most recent firmware or a custom firmware to be programmed.

RTSP is accomplished using `TBLRD` (Table Read) and `TBLWT` (Table Write) instructions. With RTSP, the user may write program memory data in blocks of 128 instructions (384 bytes) at a time and erase program memory in blocks of 1024 instructions (3072 bytes) at a time.

The device implements a 7-bit Error Correcting Code (ECC). The NVM block contains a logic to write and read ECC bits to and from the Flash memory. The Flash is programmed at the same time as the corresponding ECC parity bits. The ECC provides improved resistance to Flash errors. ECC single bit errors can be transparently corrected; ECC double-bit errors generate an interrupt.

The program address memory space of the PIC24FJ64GP205/GU205 family devices is 4M instructions. The space is addressable by a 24-bit value derived from either the 23-bit Program Counter (PC) during program execution, or from table operation or Data Space remapping, as described in [5.5. Interfacing Program and Data Memory Spaces](#).


User access to the program memory space is restricted to the lower half of the address range (000000h to 7FFFFFFh). The exception is the use of `TBLRD/TBLWT` operations, which use `TBLPAG[7]` to permit access to the Configuration bits and customer OTP sections of the configuration memory space.

The memory map for the PIC24FJ64GP205/GU205 family of devices is shown in [Figure 4-1](#).

PIC24FJ64GP205/GU205 Family

Program Memory

Figure 4-1. Program Memory Map for PIC24FJ64GP205/GU205 Family Devices

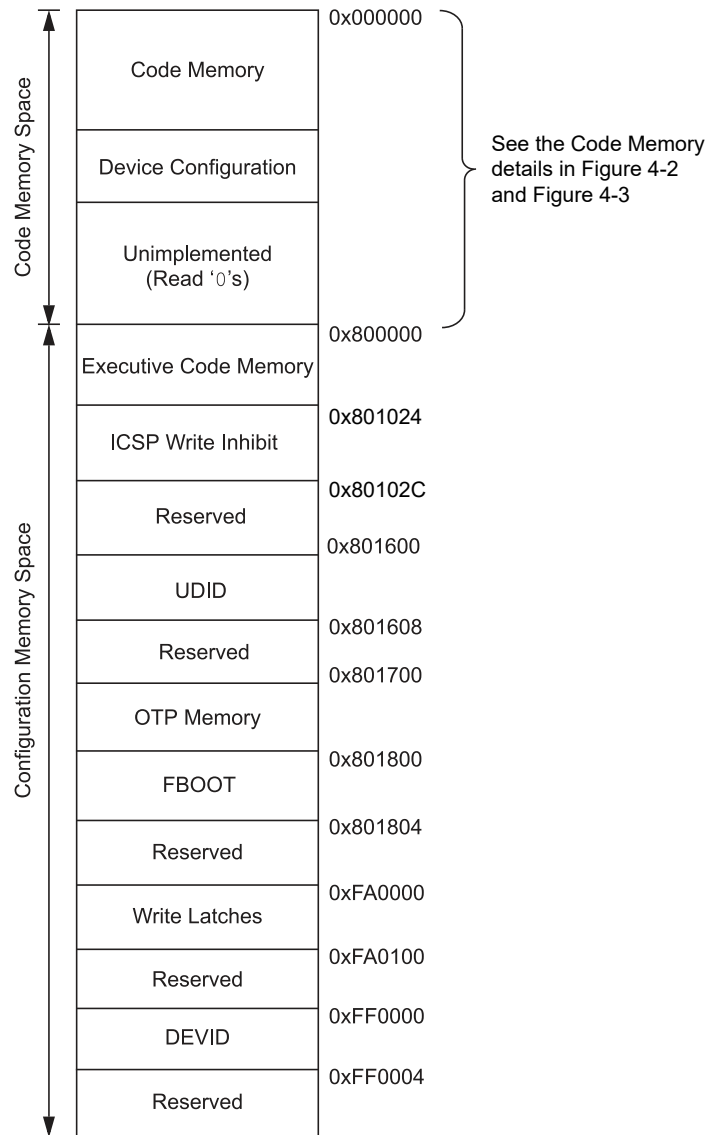


Note: Memory areas are not shown to scale.

PIC24FJ64GP205/GU205 Family


Program Memory

Figure 4-2. Code Memory Map for Devices with 64 Kbytes Flash (PIC24FJ64GX2XX)

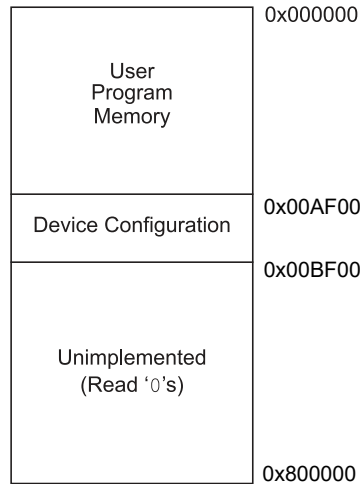

Note: Memory areas are not shown to scale

Figure 4-3. Code Memory Map for Devices with 32 Kbytes Flash (PIC24FJ32GX2XX)

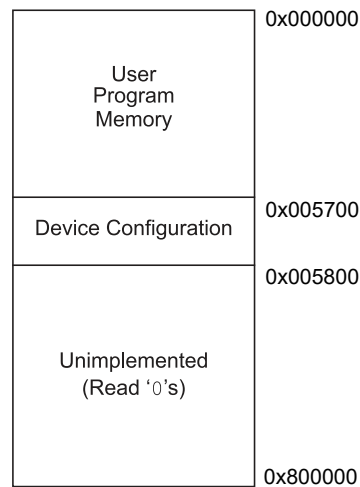

Note: Memory areas are not shown to scale

4.1 Program Memory Organization

The program memory is organized as an array of 24-bit wide words. Although the program memory space is treated as 24 bits wide (3 bytes per instruction), the upper byte is not addressable. Only the lower 2 bytes of the words (instructions) have addresses. The entire 24-bits of the instruction words are read and decoded by the MCU. Also, the upper byte can be accessed from the application code using special table instructions (`TBLRD` and `TBLWT`).

The program memory array is organized into write blocks (rows) of 128 words (instructions). Eight write blocks form an erase block (page) of 1024 instructions. The program memory can be programmed one row (write block) at a time and can be erased by one page (erase block) at a time. Also, the double-word programming (two instructions) and entire code memory erase operations are supported.

4.2 Hard Memory Vectors

All PIC24F devices reserve the addresses between 000000h and 000200h for hard-coded program execution vectors. A hardware Reset vector is provided to redirect code execution from the default value of the PC on a device Reset to the actual start of code. A `GOTO` instruction is programmed by the user at 000000h, with the actual address for the start of code at 000002h.

The PIC24FJ64GP205/GU205 devices can have up to two Interrupt Vector Tables (IVT). The first is located from addresses, 000004h to 0000FFh. The Alternate Interrupt Vector Table (AIVT) can be enabled by the AIVTDIS Configuration bit if the Boot Segment (BS) is present. If the user has configured a Boot Segment, the AIVT will be located at the address, $(BSLIM[12:0] - 1) \times 800h$. These vector tables allow each of the many device interrupt sources to be handled by separate ISRs. A more detailed discussion of the Interrupt Vector Tables is provided in [Table 8-2](#).

4.3 Configuration Bits Overview

The Configuration bits are stored in the last page location of implemented program memory. These bits can be set or cleared to select various device configurations. There are two types of Configuration bits: system operation bits and code-protect bits. The system operation bits determine the power-on settings for system-level components, such as the oscillator and the Watchdog Timer. The code-protect bits prevent program memory from being read and written.

Refer to [27. Special Features](#) for the full Configuration register description for each specific device.

4.4 Code-Protect Configuration Bits

The device implements intermediate security features defined by the FSEC register. The Boot Segment (BS) is the higher privileged segment and the General Segment (GS) is the lower privileged segment. The total user code memory can be split into BS or GS. The size of the segments is determined by the BSLIM[12:0] bits. The relative location of the segments within user space does not change, such that BS (if present) occupies the memory area just after the Interrupt Vector Table (IVT) and the GS occupies the space just after the BS (or if the Alternate IVT is enabled, just after it).

The Configuration Segment (CS) is a small segment (less than a page, typically just one row) within user Flash address space. It contains all user configuration data that are loaded by the NVM Controller during the Reset sequence.


4.5 Table Instructions and Flash Programming

Regardless of the method used, all programming of Flash memory is done with the Table Read and Table Write instructions. These allow direct read and write access to the program memory space from the data memory while the device is in normal operating mode. The 24-bit target address in the program memory is formed using the TBLPAG[7:0] bits and the Effective Address (EA) from a W register, specified in the table instruction, as shown in [Figure 4-4](#).

The `TBLRDL` and the `TBLWTL` instructions are used to read or write to bits[15:0] of program memory. `TBLRDL` and `TBLWTL` can access program memory in both Word and Byte modes.

The `TBLRDH` and `TBLWTH` instructions are used to read or write to bits[23:16] of program memory. `TBLRDH` and `TBLWTH` can also access program memory in Word or Byte mode.

Figure 4-4. Addressing for Table Registers

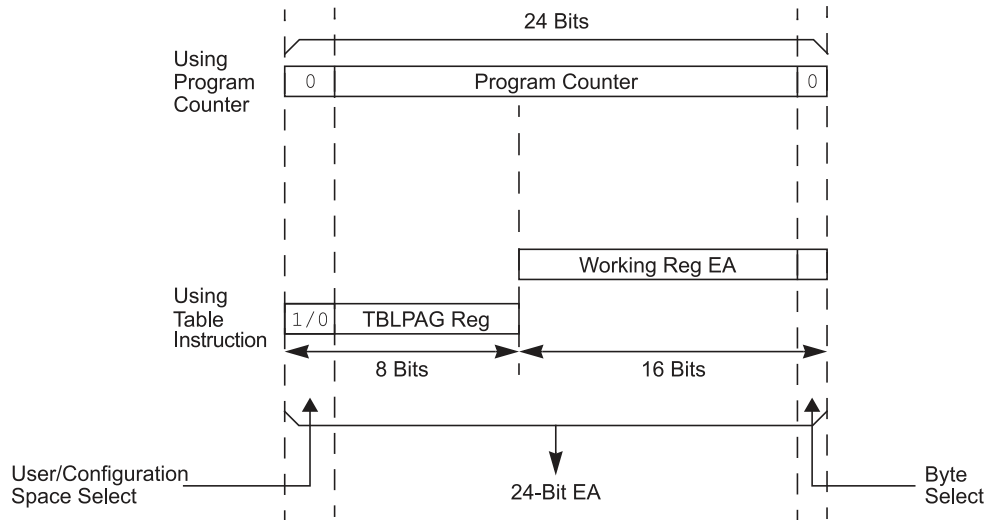

4.6 RTSP Operation

The PIC24F Flash program memory array is organized into rows of 128 instructions or 384 bytes. RTSP allows the user to erase blocks of eight rows (1024 instructions) at a time and to program one row at a time. It is also possible to program two instruction word blocks.

The eight-row erase blocks and single row write blocks are edge-aligned, from the beginning of program memory, on boundaries of 3072 bytes and 384 bytes, respectively.

When data are written to program memory using `TBLWT` instructions, the data are not written directly to memory. Instead, data written using Table Writes are stored in holding latches until the programming sequence is executed.

Any number of `TBLWT` instructions can be executed and a write will be successfully performed. However, 128 `TBLWT` instructions are required to write the full row of memory.

To ensure that no data are corrupted during a write, any unused address should be programmed with `FFFFFFh`. This is because the holding latches reset to an unknown state, so if the addresses are left in the Reset state, they may overwrite the locations on rows which were not rewritten.

The basic sequence for RTSP programming is to set the Table Pointer to point to the programming latches, do a series of `TBLWT` instructions to load the buffers and set the `NVMADRU/NVMADR` registers to point to the destination. Programming is performed by setting the control bits in the `NVMCON` register.

Data can be loaded in any order and the holding registers can be written to multiple times before performing a write operation. Subsequent writes, however, will wipe out any previous writes.

Note: Writing to a location multiple times without erasing is not allowed.

All of the Table Write operations are single-word writes (two instruction cycles), because only the buffers are written. A programming cycle is required for programming each row.

4.6.1 Programming Operations

A complete programming sequence is necessary for programming or erasing the internal Flash in RTSP mode. During a programming or erase operation, the processor stalls (waits) until the operation is finished. Setting the `WR` bit (`NVMCON[15]`) starts the operation and the `WR` bit is automatically cleared when the operation is finished.

4.6.2 Programming Algorithm for Flash Program Memory

The user can program one row of Flash program memory at a time. To do this, it is necessary to erase the eight-row erase block containing the desired row. The general process is:

PIC24FJ64GP205/GU205 Family

Program Memory

1. Read eight rows of program memory (1024 instructions) and store in data RAM.
2. Update the program data in RAM with the desired new data.
3. Erase the block (see [Example 4-1](#)):
 - a. Set the NVMOP[3:0] bits (NVMCON[3:0]) to '0011' to configure for block erase. Set the WREN (NVMCON[14]) bit.
 - b. Write the starting address of the block to be erased into the NVMADRU/NVMADR registers.
 - c. Write 55h to NVMKEY.
 - d. Write AAh to NVMKEY.
 - e. Set the WR bit (NVMCON[15]). The erase cycle begins and the CPU stalls for the duration of the erase cycle. When the erase is done, the WR bit is cleared automatically.
4. Update the TBLPAG register to point to the programming latches on the device. Update the NVMADRU/NVMADR registers to point to the destination in the program memory.
5. Write the first 128 instructions from data RAM into the program memory buffers (see [Example 4-2](#)).
6. Write the program block to Flash memory:
 - a. Set the NVMOPx bits to '0010' to configure for row programming. Set the WREN bit.
 - b. Write 55h to NVMKEY.
 - c. Write AAh to NVMKEY.
 - d. Set the WR bit. The programming cycle begins and the CPU stalls for the duration of the write cycle. When the write to Flash memory is done, the WR bit is cleared automatically.
7. Repeat Steps 4 through 6, using the next available 128 instructions from the block in data RAM, by incrementing the value in NVMADRU/NVMADR until all 1024 instructions are written back to Flash memory.

For protection against accidental operations, the write initiate sequence for NVMKEY must be used to allow any erase or program operation to proceed. After the programming command has been executed, the user must wait for the programming time until programming is complete. The two instructions following the start of the programming sequence should be `NOPS`.

Table 4-1. Page Erase

| |
|--|
| Step 1: Set the NVMCON register to erase a page. |
| <pre>MOV #0x4003, W0 MOV W0, NVMCON</pre> |
| Step 2: Load the address of the page to be erased into the NVMADR register pair. |
| <pre>MOV #PAGE_ADDR_LO, W0 MOV W0, NVMADR MOV #PAGE_ADDR_HI, W0 MOV W0, NVMADRU</pre> |
| Step 3: Set the WR bit. |
| <pre>MOV #0x55, W0 MOV W0, NVMKEY MOV #0xAA, W0 MOV W0, NVMKEY BSET NVMCON, #WR NOP NOP NOP</pre> |

Example 4-1. Erasing a Program Memory Block ('C' Language Code)

```
// C example using MPLAB XC16
unsigned long progAddr = 0XXXXXX; // Address of row to write
unsigned int offset;
//Set up pointer to the first memory location to be written
NVMADRU = progAddr>>16; // Initialize PM Page Boundary SFR
NVMADR = progAddr & 0xFFFF; // Initialize lower word of address
NVMCON = 0x4003; // Initialize NVMCON
asm("DISI #5"); // Block all interrupts with priority <7
// for next 5 instructions
__builtin_write_NVM(); // check function to perform unlock
// sequence and set WR
```

Table 4-2. Code Memory Programming Example: Row Writes

| |
|---|
| Step 1: Set the NVMCON register to program 128 instruction words. |
| <pre>MOV #0x4002, W0 MOV W0, NVMCON</pre> |
| Step 2: Initialize the TBLPAG register for writing to the latches. |
| <pre>MOV #0xFA, W12 MOV W12, TBLPAG</pre> |
| Step 3: Load W0:W5 with the next four instruction words to program. |
| <pre>MOV #<LSW0>, W0 MOV #<MSB1:MSB0>, W1 MOV #<LSW1>, W2 MOV #<LSW2>, W3 MOV #<MSB3:MSB2>, W4 MOV #<LSW3>, W5</pre> |
| Step 4: Set the Read Pointer (W6) and load the (next set of) write latches. |
| <pre>CLR W6 CLR W7 TBLWTL [W6++], [W7] TBLWTH.B [W6++], [W7++] TBLWTH.B [W6++], [++W7] TBLWTL [W6++], [W7++] TBLWTL [W6++], [W7] TBLWTH.B [W6++], [W7++] TBLWTH.B [W6++], [++W7] TBLWTL [W6++], [W7++]</pre> |
| Step 5: Repeat Steps 4 and 5, for a total of 32 times, to load the write latches with 128 instructions. |
| Step 6: Set the NVMADRU/NVMADR register pair to point to the correct address. |

```
MOV #DestinationAddress[15:0], W3
MOV #DestinationAddress[23:16], W4

MOV W3, NVMADR
MOV W4, NVMADRU
```

Step 7: Execute the WR bit unlock sequence and initiate the write cycle.

```
MOV #0x55, W0
MOV W0, NVMKEY

MOV #0xAA, W0
MOV W0, NVMKEY
BSET NVMCON, #WR

NOP
NOP
NOP
```

Example 4-2. Row Programming ('C' Language Code)

```
ROW PROGRAMMING ('C' LANGUAGE CODE)
int varWord1L[128];
int varWord1H[128];
int targetWriteAddressL;           // bits[15:0]
int targetWriteAddressH;           // bits[22:16]
int i;
NVMCON = 0x4002;                  // Set WREN and row program mode
TBLPAG = 0xFA;
NVMADRL = targetWriteAddressL;    // set target write address
NVMADRH = targetWriteAddressH;
for(i=0; i<128; i++)              // load write latches with data
{ // to be written
    __builtin_tblwtl( (i*2), varWord1L[i]);
    __builtin_tblwth( (i*2), varWord1H[i]);
}
__builtin_disi(5);                 //Disable interrupts for NVM unlock sequence
__builtin_write_NVM();             // initiate write
```

4.6.3 Programming a Double Word of Flash Program Memory

If a Flash location has been erased, it can be programmed using Table Write instructions to write two instruction words (2 x 24-bit) into the write latch. The TBLPAG register is loaded with the address of the write latches and the NVMADRU/NVMADR registers are loaded with the address of the first of the two instruction words to be programmed. The TBLWTL and TBLWTH instructions write the desired data into the write latches. To configure the NVMCON register for a two-word write, set the NVMOPx bits (NVMCON[3:0]) to '0001'. The write is performed by executing the unlock sequence and setting the WR bit. An equivalent procedure in 'C', using the MPLAB® XC16 compiler and built-in hardware functions, is shown in [Table 4-3](#).

PIC24FJ64GP205/GU205 Family

Program Memory

Table 4-3. Programming a Double Word of Flash Program Memory

| |
|---|
| Step 1: Initialize the TBLPAG register for writing to the latches. |
| <pre>MOV #0xFA, W12 MOV W12, TBLPAG</pre> |
| Step 2: Load W0:W2 with the next two packed instruction words to program. |
| <pre>MOV #<LSW0>, W0 MOV #<MSB1:MSB0>, W1 MOV #<LSW1>, W2</pre> |
| Step 3: Set the Read Pointer (W6) and Write Pointer (W7), and load the (next set of) write latches. |
| <pre>CLR W6 CLR W7 TBLWTL [W6++], [W7] TBLWTH.B [W6++], [W7++] TBLWTH.B [W6++], [++W7] TBLWTL.W [W6++], [W7++]</pre> |
| Step 4: Set the NVMADRU/NVMADR register pair to point to the correct address. |
| <pre>MOV #DestinationAddress[15:0], W3 MOV #DestinationAddress[23:16], W4 MOV W3, NVMADR MOV W4, NVMADRU</pre> |
| Step 5: Set the NVMCON register to program two instruction words. |
| <pre>MOV #0x4001, W10 MOV W10, NVMCON NOP</pre> |
| Step 6: Initiate the write cycle. |
| <pre>MOV #0x55, W1 MOV W1, NVMKEY MOV #0xAA, W1 MOV W1, NVMKEY BSET NVMCON, #WR NOP NOP NOP</pre> |

Example 4-3. Programming a Double Word of Flash Program Memory ('C' Language Code)

```
// C example using MPLAB XC16
unsigned long progAddr = 0XXXXXX; // Address of word to program
unsigned int progData1L = 0XXXX; // Data to program lower word of word 1
unsigned char progData1H = 0XX; // Data to program upper byte of word 1
unsigned int progData2L = 0XXXX; // Data to program lower word of word 2
unsigned char progData2H = 0XX; // Data to program upper byte of word 2

//Set up NVMCON for word programming
NVMCON = 0x4001; // Initialize NVMCON
TBLPAG = 0xFA; // Point TBLPAG to the write latches

//Set up pointer to the first memory location to be written
NVMADRU = progAddr >> 16; // Initialize PM Page Boundary SFR
NVMADR = progAddr & 0xFFFF; // Initialize lower word of address
//Perform TBLWT instructions to write latches
__builtin_tblwtl(0, progData1L); // Write word 1 to address low word
__builtin_tblwth(0, progData2H); // Write word 1 to upper byte
__builtin_tblwtl(1, progData2L); // Write word 2 to address low word
__builtin_tblwth(1, progData2H); // Write word 2 to upper byte
asm("DISI #5"); // Block interrupts with priority <7 for
// next 5 instructions

__builtin_write_NVM(); // XC16 function to perform unlock
sequence and set WR
```

4.7 Error Correcting Code (ECC)

In order to improve program memory performance and durability, these devices include Error Correcting Code (ECC) functionality as an integral part of the Flash memory controller. ECC can determine the presence of single bit errors in program data, including which bit is in error, and correct the data automatically without user intervention. ECC cannot be disabled.

When data are written to program memory, ECC generates a 7-bit Hamming code parity value for every two (24-bit) instruction words. The data are stored in blocks of 48 data bits and 7 parity bits; parity data are not memory-mapped and are inaccessible. When the data are read back, the ECC calculates the parity on them and compares them to the previously stored parity value. If a parity mismatch occurs, there are two possible outcomes:

- Single bit error has occurred and has been automatically corrected on read-back.
- Double-bit error has occurred and the read data are not changed.

The ECCSTATL register contains the parity information for single bit errors. The SECOUT[7:0] bits field contains the expected calculated SEC parity and the SECIN[7:0] bits contain the actual value from a Flash read operation. The SECSYNDx bits (ECCSTATH[7:0]) indicate the bit position of the single bit error within the 48-bit pair of instruction words. When no error is present, SECINx equals SECOUTx and the SECSYNDx bits are zero.

Double-bit error occurrences generate a generic hard trap and set the ECCDBE (INTCON4[1]) bit. The ECCSTATH register contains double-bit error status information. The DEDOUT bit is the expected calculated DED parity and DEDIN is the actual value from a Flash read operation. When no error is present, DEDIN equals DEDOUT.

4.7.1 ECC Fault Injection

To test Fault handling, an ECC error can be generated. Both single and double-bit errors can be generated in both the read and write data paths. Read path Fault injection first reads the Flash data and then modifies them prior to entering the ECC logic. Write path Fault injection modifies the actual data prior to them being written into the target Flash and will cause an ECC error on a subsequent Flash read. The following procedure is used to inject a Fault:

1. Load the Flash target address into the ECCADDR register.
2. Select 1st Fault bit determined by FLT1PTRx (ECCCONH[7:0]). The target bit is inverted to create the Fault.
3. If a double Fault is desired, select the 2nd Fault bit determined by FLT2PTRx (ECCCONH[15:8]); otherwise, set to all '1's.
4. Write the NVMKEY unlock sequence.

5. Enable the ECC Fault injection logic by setting the FLTINJ bit (ECCCONL[0]).
6. Perform a read or write to the Flash target address.

4.8 Flash OTP by ICSP™ Write Inhibit

ICSP Write Inhibit is an access restriction feature that, when activated, restricts all of Flash memory. Once activated, ICSP Write Inhibit permanently prevents ICSP Flash programming and erase operations, and cannot be deactivated. This feature is intended to prevent alteration of Flash memory contents, with behavior similar to One-Time-Programmable (OTP) devices.

RTSP, including erase and programming operations, is not restricted when ICSP Write Inhibit is activated; however, code to perform these actions must be programmed into the device before ICSP Write Inhibit is activated. This allows for a bootloader-type application to alter Flash contents with ICSP Write Inhibit activated.

Entry into ICSP and Enhanced ICSP modes is not affected by ICSP Write Inhibit. In these modes, it will continue to be possible to read configuration memory space and any user memory space regions which are not code-protected. With ICSP writes inhibited, an attempt to set WR (NVMCON[15]) = 1 will maintain WR = 0 and instead, set WRERR (NVMCON[13]) = 1. All Enhanced ICSP erase and programming commands will have no effect with self-checked programming commands returning a FAIL response opcode (PASS if the destination already exactly matched the requested programming data).

Once ICSP Write Inhibit is activated, it is not possible for a device executing in Debug mode to erase/write Flash, nor can a debug tool switch the device to Production mode. ICSP Write Inhibit should therefore only be activated on devices programmed for production.

4.8.1 Activating Flash OTP by ICSP Write Inhibit

Note: It is not possible to deactivate ICSP Write Inhibit.

ICSP Write Inhibit is activated by executing a pair of NVMCON double-word programming commands to save two 16-bit activation values in the configuration memory space. The target NVM addresses and values required for activation are shown in Table 4-4. Once both addresses contain their activation values, ICSP Write Inhibit will take permanent effect on the next device Reset.

Only the lower 16 data bits stored at the activation addresses are evaluated; the upper eight bits and second 24-bit word, written by the double-word programming, should be written as '0's. The addresses can be programmed in any order and also during separate ICSP/Enhanced ICSP/RTSP sessions, but any attempt to program an incorrect 16-bit value, or use a row programming operation to program the values, will be aborted without altering the existing data.

Table 4-4. ICSP™ Write Inhibit Activation Addresses and Data

| | Configuration Memory Address | ICSP Write Inhibit Activation Value |
|--------------|------------------------------|-------------------------------------|
| Write Lock 1 | 0x801024 | 0x006D63 |
| Write Lock 2 | 0x801028 | 0x006870 |

4.9 JTAG Operation

The PIC24F family supports JTAG boundary scan. Boundary scan can improve the manufacturing process by verifying pin to PCB connectivity.

4.10 Enhanced In-Circuit Serial Programming

Enhanced In-Circuit Serial Programming uses an on-board bootloader, known as the Program Executive (PE), to manage the programming process. Using an SPI data frame format, the Program Executive can erase, program and verify program memory. For more information on Enhanced ICSP, see the device programming specification.

4.11 Program Memory Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|----------------|------|-------|---------|------------|---------|--------|--------|
| 0x00 ... 0x075F | Reserved | | | | | | | | | |
| 0x0760 | NVMCON | 7:0 | | | | | NVMOP[3:0] | | | |
| | | 15:8 | WR | WREN | WRERR | NVMSIDL | SFTSWP | P2ACTIV | | |
| 0x0762 | NVMADR | 7:0 | NVMADR[7:0] | | | | | | | |
| | | 15:8 | NVMADR[15:8] | | | | | | | |
| 0x0764 | NVMADRU | 7:0 | NVMADRU[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0766 | NVMKEY | 7:0 | NVMKEY[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0768 ... 0x076B | Reserved | | | | | | | | | |
| 0x076C | ECCCONL | 7:0 | | | | | | | | FLTINJ |
| | | 15:8 | | | | | | | | |
| 0x076E | ECCCONH | 7:0 | FLT1PTR[7:0] | | | | | | | |
| | | 15:8 | FLT2PTR[7:0] | | | | | | | |
| 0x0770 | ECCADDRL | 7:0 | ECCADDR[7:0] | | | | | | | |
| | | 15:8 | ECCADDR[15:8] | | | | | | | |
| 0x0772 | ECCADDRH | 7:0 | ECCADDR[23:16] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0774 | ECCSTATL | 7:0 | SECIN[7:0] | | | | | | | |
| | | 15:8 | SECOUT[7:0] | | | | | | | |
| 0x0774 | ECCSTATH | 7:0 | SECSYND[7:0] | | | | | | | |
| | | 15:8 | | | | | | | DEDOUT | DEDIN |

4.11.1 Control Registers

There are four SFRs used to read and write the program Flash memory: NVMCON, NVMADRU, NVMADR and NVMKEY.

The NVMCON register ([4.11.2. NVMCON](#)) controls which blocks are to be erased, which memory type is to be programmed and when the programming cycle starts.

NVMKEY ([4.11.5. NVMKEY](#)) is a write-only register that is used for write protection. To start a programming or erase sequence, the user must consecutively write 55h and AAh to the NVMKEY register. Refer to [4.6.1. Programming Operations](#) for further details.

The NVMADRU/NVMADR registers contain the upper byte and lower word of the destination of the NVM write or erase operation. Some operations (chip erase) operate on fixed locations and do not require an address value.

The ECCCONL/H, ECCADDRL/H and ECCSTATL/H registers control and allow capturing status information for the Error Correcting Code (ECC) feature.

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.2 Nonvolatile Memory (NVM) Control Register

Name: NVMCON
Offset: 0x760

Notes:

1. These bits can only be reset on a Power-on Reset.
2. All other combinations of NVMOP[3:0] are unimplemented.
3. Unlock sequence must be executed before writing to this bit.

Legend: SO = Settable Only bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------|------|-------|---------|--------|---------|---|---|
| | WR | WREN | WRERR | NVMSIDL | SFTSWP | P2ACTIV | | |
| Access | R/SO | R/W | R/W | R/W | R/W | R/W | | |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|---|---|------------|-----|-----|-----|
| | | | | | NVMOP[3:0] | | | |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 15 – WR Write Control bit^(1,3)

| Value | Description |
|-------|--|
| 1 | Initiates a Flash memory program or erase operation; the operation is self-timed and the bit is cleared by hardware once the operation is complete |
| 0 | Program or erase operation is complete and inactive |

Bit 14 – WREN Write Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Enables Flash program/erase operations |
| 0 | Inhibits Flash program/erase operations |

Bit 13 – WRERR Write Sequence Error Flag bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | An improper program or erase sequence attempt, or termination has occurred (bit is set automatically on any set attempt of the WR bit) |
| 0 | The program or erase operation completed normally |

Bit 12 – NVMSIDL NVM Stop in Idle Control bit

| Value | Description |
|-------|--|
| 1 | Removes power from the program memory when device enters Idle mode |
| 0 | Powers program memory in Standby mode when the device enters Idle mode |

Bit 11 – SFTSWP Soft Swap Status bit

In Single Partition Mode:

Read as '0'.

In Dual Partition Mode:

| Value | Description |
|-------|--|
| 1 | Partitions have been successfully swapped using the <code>BOOTSHP</code> instruction |
| 0 | Awaiting successful panel swap using the <code>BOOTSHP</code> instruction |

Bit 10 – P2ACTIV Dual Partition Active Status bit

In Single Partition Mode:

Read as '0'.

In Dual Partition Mode:

PIC24FJ64GP205/GU205 Family

Program Memory

| Value | Description |
|-------|--|
| 1 | Partition 2 is mapped into the active region |
| 0 | Partition 1 is mapped into the active region |

Bits 3:0 – NVMOP[3:0] NVM Operation Select bits⁽²⁾

| Value | Description |
|-------|---|
| 1110 | Chip Erase Operation, erases user memory (does not erase Device ID, customer OTP or executive memory) |
| 1000 | The next <i>WR</i> command will program FBOOT with the data held in the first 48 bits of the write latch and then will program the Dual Partition Signature (SIGN) bit in Flash. The device must be reset before the newly programmed mode can take effect. |
| 0100 | Erases user memory and Configuration Words in the Inactive Partition (Dual Partition modes only) |
| 0011 | Erases a page of program or executive memory |
| 0010 | Row programming operation |
| 0001 | Double-word programming operation |

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.3 Nonvolatile Memory (NVM) Write Address Low Register

Name: NVMADR

Offset: 0x762

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | NVMADR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | NVMADR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – NVMADR[15:0] Nonvolatile Memory Write Address Lower bits

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.4 Nonvolatile Memory (NVM) Write Address High Register

Name: NVMADRU

Offset: 0x764

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | NVMADRU[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – NVMADRU[7:0] Nonvolatile Memory Write Address Upper bits

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.5 Nonvolatile Memory (NVM) Key Register

Name: NVMKEY
Offset: 0x766

| | | | | | | | | |
|--------|-------------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | NVMKEY[7:0] | | | | | | | |
| Access | W | W | W | W | W | W | W | W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – NVMKEY[7:0] NVM Key Register bits (write-only)

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.6 ECC Fault Injection Configuration Register Low

Name: ECCCONL

Offset: 0x76C

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | FLTINJ |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

Bit 0 – FLTINJ Fault Injection Sequence Enable bit

Write enable bit.

| Value | Description |
|-------|-------------|
| 1 | Enabled |
| 0 | Disabled |

4.11.7 ECC Fault Injection Configuration Register High

Name: ECCCONH
Offset: 0x76E

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | FLT2PTR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | FLT1PTR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:8 – FLT2PTR[7:0] ECC Fault Injection Bit Pointer 2 bits

| Value | Description |
|-------------------|--|
| 11111111-10001001 | No Fault injection occurs |
| 10001000 | Fault injection (bit inversion) occurs on bit 136 of ECC bit order |
| . . . | |
| 00000001 | Fault injection (bit inversion) occurs on bit 1 of ECC bit order |
| 00000000 | Fault injection (bit inversion) occurs on bit 0 of ECC bit order |

Bits 7:0 – FLT1PTR[7:0] ECC Fault Injection Bit Pointer 1 bits

| Value | Description |
|-------------------|--|
| 11111111-10001001 | No Fault injection occurs |
| 10001000 | Fault injection (bit inversion) occurs on bit 136 of ECC bit order |
| . . . | |
| 00000001 | Fault injection (bit inversion) occurs on bit 1 of ECC bit order |
| 00000000 | Fault injection (bit inversion) occurs on bit 0 of ECC bit order |

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.8 ECC Fault Inject Address Compare Register Low

Name: ECCADDRL
Offset: 0x770

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ECCADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ECCADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ECCADDR[15:0] ECC Fault Injection NVM Address Match Compare bits

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.9 ECC Fault Inject Address Compare Register High

Name: ECCADDRH
Offset: 0x772

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ECCADDR[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – ECCADDR[23:16] ECC Fault Injection NVM Address Match Compare bits

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.10 ECC System Status Display Register Low

Name: ECCSTATL
Offset: 0x774

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | SECOUT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SECIN[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:8 – SECOUT[7:0] Calculated Single Error Correction Parity Value bits

Bits 7:0 – SECIN[7:0] Read Single Error Correction Parity Value bits
 SECIN[7:0] bits are the actual parity value of a Flash read operation.

PIC24FJ64GP205/GU205 Family

Program Memory

4.11.11 ECC System Status Display Register High

Name: ECCSTATH
Offset: 0x774

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|--------|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | DEDOUT | DEDIN |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SECSYND[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 9 – DEDOUT Calculated Dual Bit Error Detection Parity bit

Bit 8 – DEDIN Read Dual Bit Error Detection Parity bit
DEDIN is the actual parity value of a Flash read operation.

Bits 7:0 – SECSYND[7:0] Calculated ECC Syndrome Value bits
Indicates the bit location that contains the error.

5. Data Memory Space

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Data Memory with Extended Data Space (EDS)**” (www.microchip.com/DS39733) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The PIC24F core has a 16-bit wide data memory space, addressable as a single linear range. The Data Space is accessed using two Address Generation Units (AGUs), one each for read and write operations. The Data Space memory map is shown in [Figure 5-1](#).


The 16-bit wide data addresses in the data memory space point to bytes within the Data Space (DS). This gives a DS address range of 64 Kbytes or 32K words. The lower half (0000h to 7FFFh) is used for implemented (on-chip) memory addresses.

The upper half of data memory address space (8000h to FFFFh) is used as a window into the Extended Data Space (EDS). This allows the microcontroller to directly access a greater range of data beyond the standard 16-bit address range. EDS is discussed in detail in [5.5. Interfacing Program and Data Memory Spaces](#).

5.1 Data Space Width

The data memory space is organized in byte-addressable, 16-bit wide blocks. Data are aligned in data memory and registers as 16-bit words, but all Data Space EAs resolve to bytes. The Least Significant Bytes (LSBs) of each word have even addresses, while the Most Significant Bytes (MSBs) have odd addresses. The data memory map is shown in [Figure 5-1](#).

Figure 5-1. Data Memory Map for PIC24FJ64GP205/GU205 Family Devices

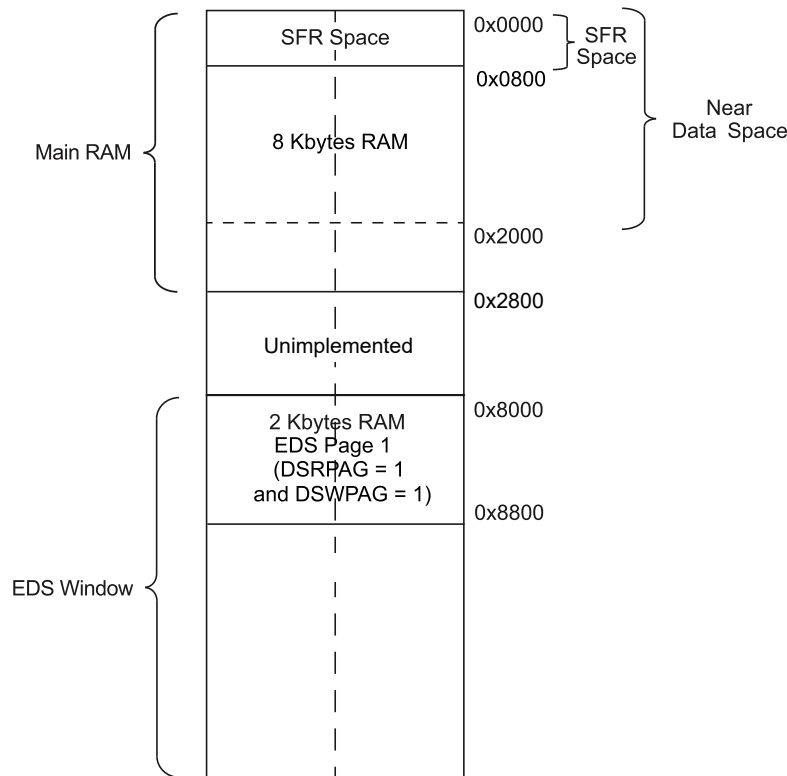

5.2 Data Memory Organization and Alignment

To maintain backward compatibility with PIC[®] MCUs and improve Data Space memory usage efficiency, the PIC24F instruction set supports both word and byte operations. As a consequence of byte accessibility, all EA calculations are internally scaled to step through word-aligned memory. For example, the core recognizes that Post-Modified Register Indirect Addressing mode, [Ws++], will result in a value of Ws + 1 for byte operations and Ws + 2 for word operations.

Data byte reads will read the complete word, which contains the byte, using the LSB of any EA to determine which byte to select. The selected byte is placed onto the LSB of the data path. That is, data memory and registers are organized as two parallel, byte-wide entities with shared (word) address decode, but separate write lines. Data byte writes only write to the corresponding side of the array or register which matches the byte address.

All word accesses must be aligned to an even address. Misaligned word data fetches are not supported, so care must be taken when mixing byte and word operations or translating from 8-bit MCU code. If a misaligned read or write is attempted, an address error trap will be generated. If the error occurred on a read, the instruction underway is completed; if it occurred on a write, the instruction will be executed but the write will not occur. In either case, a trap is then executed, allowing the system and/or user to examine the machine state prior to execution of the address Fault.

All byte loads into any W register are loaded into the LSB. The Most Significant Byte (MSB) is not modified.

A Sign-Extend (SE) instruction is provided to allow users to translate 8-bit signed data to 16-bit signed values. Alternatively, for 16-bit unsigned data, users can clear the MSB of any W register by executing a Zero-Extend (ZE) instruction on the appropriate address.

Although most instructions are capable of operating on word or byte data sizes, it should be noted that some instructions operate only on words.

5.3 Near Data Space

The 8-Kbyte area, between 0000h and 1FFFh, is referred to as the Near Data Space. Locations in this space are directly addressable via a 13-bit absolute address field within all memory direct instructions. The remainder of the Data Space is addressable indirectly. Additionally, the whole Data Space is addressable using MOV instructions, which support Memory Direct Addressing with a 16-bit address field.

5.4 Special Function Register (SFR) Space

The first 2 Kbytes of the Near Data Space, from 0000h to 07FFh, are primarily occupied with Special Function Registers (SFRs). These are used by the PIC24F core and peripheral modules for controlling the operation of the device.

SFRs are distributed among the modules that they control and are generally grouped together by module. Much of the SFR space contains unused addresses; these are read as '0'. Each implemented area indicates a 32-byte region where at least one address is implemented as an SFR.

5.5 Interfacing Program and Data Memory Spaces

The PIC24F architecture uses a 24-bit wide program space and 16-bit wide Data Space. The architecture is also a modified Harvard scheme, meaning that data can also be present in the program space. To use these data successfully, they must be accessed in a way that preserves the alignment of information in both spaces.

Aside from normal execution, the PIC24F architecture provides two methods by which program space can be accessed during operation:

- Using table instructions to access individual bytes or words anywhere in the program space
- Remapping a portion of the program space into the Data Space (Program Space Visibility)

Table instructions allow an application to read or write to small areas of the program memory. This makes the method ideal for accessing data tables that need to be updated from time to time. It also allows access to all bytes of the program word. The remapping method allows an application to access a large block of data on a read-only basis, which is ideal for look-ups from a large table of static data. It can only access the least significant word of the program word.

5.5.1 Addressing Program Space

Since the address ranges for the data and program spaces are 16 and 24 bits, respectively, a method is needed to create a 23-bit or 24-bit program address from 16-bit data registers. The solution depends on the interface method to be used.

For table operations, the 8-bit Table Memory Page Address register (TBLPAG) is used to define a 32K word region within the program space. This is concatenated with a 16-bit EA to arrive at a full 24-bit program space address. In this format, the MSBs of TBLPAG are used to determine if the operation occurs in the user memory (TBLPAG[7] = 0) or the configuration memory (TBLPAG[7] = 1).

For remapping operations, the 10-bit Extended Data Space Read register (DSRPAG) is used to define a 16K word page in the program space. When the Most Significant bit (MSb) of the EA is '1', and the MSb (bit 9) of DSRPAG is '1', the lower eight bits of DSRPAG are concatenated with the lower 15 bits of the EA to form a 23-bit program space address. The DSRPAG[8] bit decides whether the lower word (when the bit is '0') or the higher word (when the bit is '1') of program memory is mapped. Unlike table operations, this strictly limits remapping operations to the user memory area.

Table 5-1 and Figure 5-2 show how the program EA is created for table operations and remapping accesses from the data EA. Here, P[23:0] refers to a program space word, whereas D[15:0] refers to a Data Space word.


Table 5-1. Program Space Address Construction

| Access Type | Access Space | Program Space Address | | | | |
|--|---------------|------------------------------|----------------------------|---------------------|------------------------------|-----|
| | | [23] | [22:16] | [15] | [14:1] | [0] |
| Instruction Access (Code Execution) | User | 0 | PC[22:1] | | | 0 |
| | | 0xx xxxx xxxx xxxx xxxx xxx0 | | | | |
| TBLRD/TBLWT (Byte/Word Read/Write) | User | TBLPAG[7:0] | | Data EA[15:0] | | |
| | | 0xxx xxxx | | xxxx xxxx xxxx xxxx | | |
| | Configuration | TBLPAG[7:0] | | Data EA[15:0] | | |
| | | 1xxx xxxx | | xxxx xxxx xxxx xxxx | | |
| Program Space Visibility (Block Remap/Read) | User | 0 | DSRPAG[7:0] ⁽²⁾ | | Data EA[14:0] ⁽¹⁾ | |
| | | 0 | xxxx xxxx | | xxx xxxx xxxx xxxx | |

Notes:

1. Data EA[15] is always '1' in this case, but is not used in calculating the program space address. Bit 15 of the address is DSRPAG[0].
2. DSRPAG[9] is always '1' in this case. DSRPAG[8] decides whether the lower word or higher word of program memory is read. When DSRPAG[8] is '0', the lower word is read and when it is '1', the higher word is read.

Figure 5-2. Data Access from Program Space Address Generation

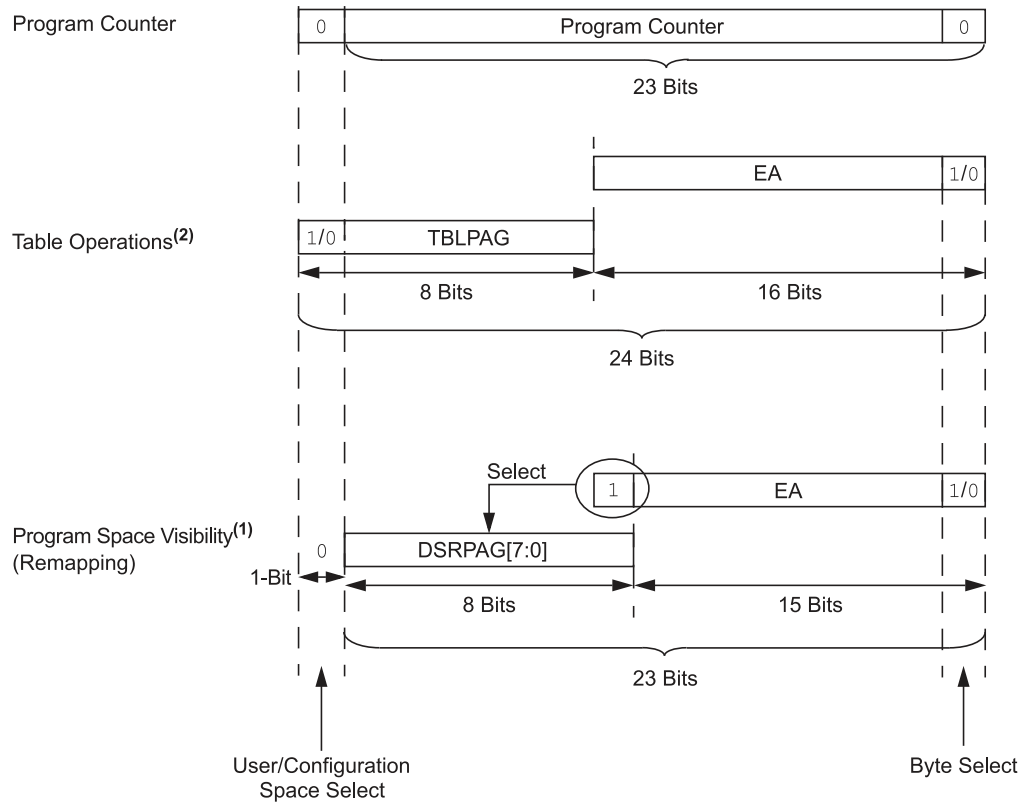

Notes:

1. DSRPAG[8] acts as word select. DSRPAG[9] should always be '1' to map program memory to data memory.
2. The instructions, TBLRDH/TBLWTH/TBLRDL/TBLWTL, decide if the higher or lower word of program memory is accessed. TBLRDH/TBLWTH instructions access the higher word and TBLRDL/TBLWTL instructions access the lower word. Table Read operations are permitted in the configuration memory space.

5.5.2 Data Access from Program Memory Using Table Instructions

The TBLRDL and TBLWTL instructions offer a direct method of reading or writing the lower word of any address within the program space without going through Data Space. The TBLRDH and TBLWTH instructions are the only method to read or write the upper eight bits of a program space word as data.

The PC is incremented by two for each successive 24-bit program word. This allows program memory addresses to directly map to Data Space addresses. Program memory can thus be regarded as two, 16-bit word-wide address spaces, residing side by side, each with the same address range. TBLRDL and TBLWTL access the space which contains the least significant data word, and TBLRDH and TBLWTH access the space which contains the upper data byte.

Two table instructions are provided to move byte or word-sized (16-bit) data to and from program space. Both function as either byte or word operations.

TBLRDL (Table Read Low): In Word mode, it maps the lower word of the program space location (P[15:0]) to a data address (D[15:0]).

In Byte mode, either the upper or lower byte of the lower program word is mapped to the lower byte of a data address. The upper byte is selected when byte select is '1'; the lower byte is selected when it is '0'.

TBLRDH (Table Read High): In Word mode, it maps the entire upper word of a program address (P[23:16]) to a data address. Note that D[15:8], the 'phantom' byte, will always be '0'.


In Byte mode, it maps the upper or lower byte of the program word to D[7:0] of the data address, as above. Note that the data will always be '0' when the upper 'phantom' byte is selected (byte select = 1).

In a similar fashion, two table instructions, TBLWTH and TBLWTL, are used to write individual bytes or words to a program space address.

For all table operations, the area of program memory space to be accessed is determined by the Table Memory Page Address register (TBLPAG). TBLPAG covers the entire program memory space of the device, including user and configuration spaces. When TBLPAG[7] = 0, the table page is located in the user memory space. When TBLPAG[7] = 1, the page is located in configuration space. The data access using table instructions is shown in Figure 5-3.

Note: Only Table Read operations will execute in the configuration memory space where Device IDs are located. Table Write operations are not allowed.

Figure 5-3. Access Program Memory with Table Instructions

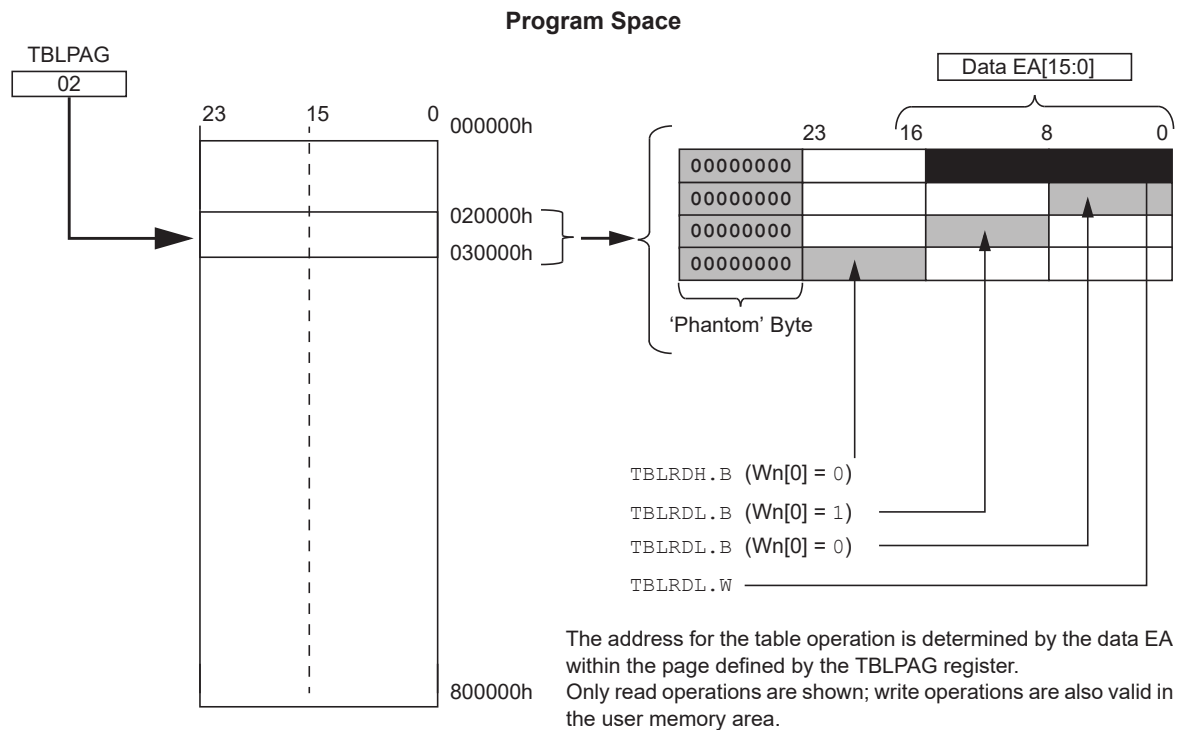

5.5.3 Reading Data from Program Memory Using EDS

The upper 32 Kbytes of Data Space may optionally be mapped into any 16K word page of the program space. This provides transparent access of stored constant data from the Data Space without the need to use special instructions (i.e., TBLRDL/H).

Program space access through the Data Space occurs when the MSb of EA is '1' and the DSRPAG[9] bit is also '1'. The lower eight bits of DSRPAG are concatenated to the Wn[14:0] bits to form a 23-bit EA to access program memory. The DSRPAG[8] bit decides which word should be addressed; when the bit is '0', it is the lower word and when '1', the upper word of the program memory is accessed.

The entire program memory is divided into 512 EDS pages, from 200h to 3FFh, each consisting of 16K words of data. Pages, 200h to 2FFh, correspond to the lower words of the program memory, while 300h to 3FFh correspond to the upper words of the program memory.

Using this EDS technique, the entire program memory can be accessed. Previously, the access to the upper word of the program memory was not supported.

Table 5-2 provides the corresponding 23-bit EDS address for program memory with EDS page and source addresses. EDS access is also explained in Figure 5-4 and Figure 5-5.

For operations that use PSV and are executed outside a REPEAT loop, the MOV and MOV.D instructions will require one instruction cycle in addition to the specified execution time. All other instructions will require two instruction cycles in addition to the specified execution time.

For operations that use PSV, which are executed inside a REPEAT loop, there will be some instances that require two instruction cycles in addition to the specified execution time of the instruction:

- Execution in the first iteration
- Execution in the last iteration
- Execution prior to exiting the loop due to an interrupt
- Execution upon re-entering the loop after an interrupt is serviced

Any other iteration of the REPEAT loop will allow the instruction accessing data, using PSV, to execute in a single cycle.

Table 5-2. EDS Program Address with Different Pages and Addresses

| DSRPAG (Data Space Read Register) | Source Address while Indirect Addressing | 23-Bit EA Pointing to EDS | Comment |
|---|---|--|---|
| 200h • • • 2FFh | 8000h to FFFFh | 000000h to 007FFEh • • • 7F8000h to 7FFFFEh | Lower words of 4M program instructions (8 Mbytes) for read operations only. |
| 300h • • • 3FFh | | 000001h to 007FFFh • • • 7F8001h to 7FFFFFFh | Upper words of 4M program instructions (4 Mbytes remaining; 4 Mbytes are phantom bytes) for read operations only. |
| 000h | | Invalid Address | Address error trap. ⁽¹⁾ |

Note:

1. When the source/destination address is above 8000h and DSRPAG/DSWPAG is '0', an address error trap will occur.

Example 5-1. EDS Read Code from Program Memory in Assembly

```

; Set the EDS page from where the data to be read
mov    #0x0202, w0
mov    w0, DSRPAG    ;page 0x202, consisting lower words, is selected for read
mov    #0x000A, w1    ;select the location (0x0A) to be read
bset   w1, #15        ;set the MSB of the base address, enable EDS mode
;Read a byte from the selected location
mov.b  [w1++], w2     ;read Low byte
mov.b  [w1++], w3     ;read High byte
;Read a word from the selected location
mov    [w1], w2       ;
;Read Double - word from the selected location
mov.d  [w1], w2       ;two word read, stored in w2 and w3

```

PIC24FJ64GP205/GU205 Family

Data Memory Space

Figure 5-4. Program Space Visibility Operation to Access Lower Word

When DSRPAG[9:8] = 10 and EA[15] = 1:


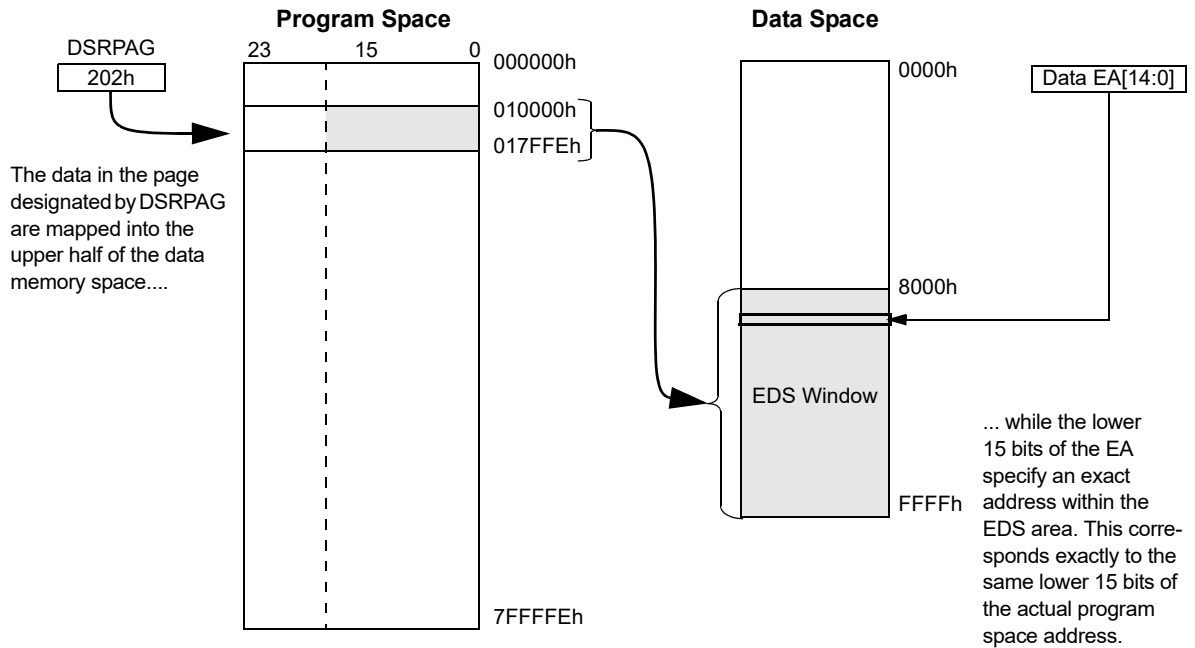


Figure 5-5. Program Space Visibility Operation to Access Upper Word

When DSRPAG[9:8] = 11 and EA[15] = 1:

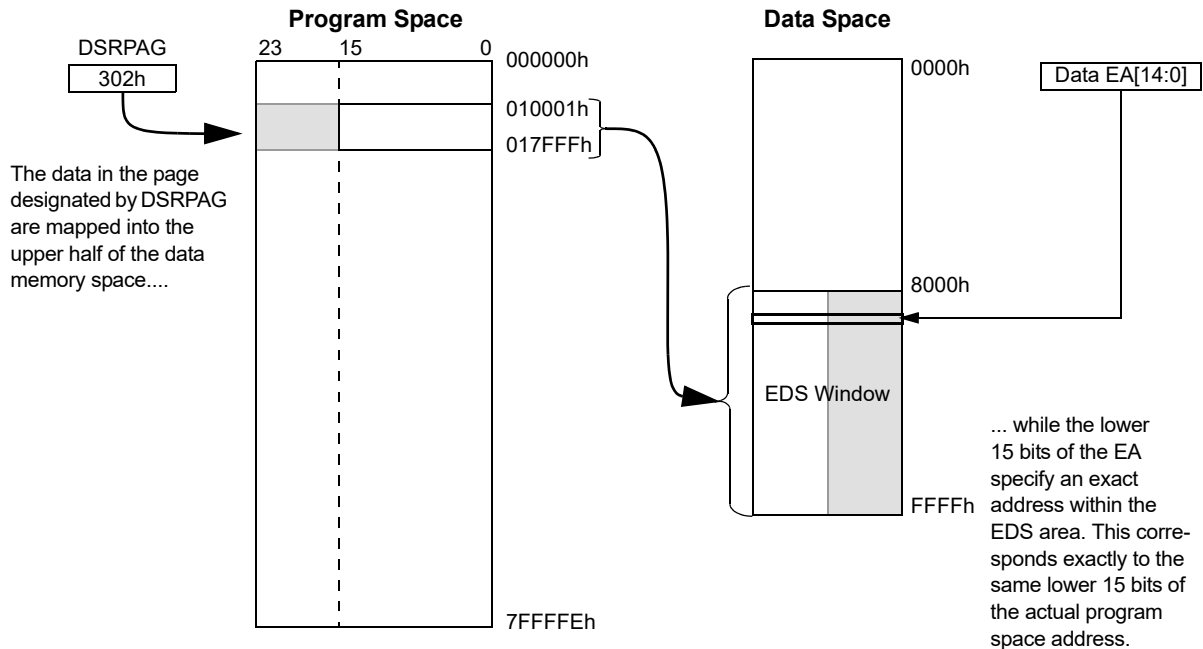

6. Direct Memory Access Controller (DMA)

Note: This data sheet summarizes the features of the PIC24FJ64GP205/GU205 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Direct Memory Access Controller (DMA)**” (www.microchip.com/DS30009742) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Direct Memory Access (DMA) Controller is designed to service high throughput data peripherals operating on the SFR bus, allowing them to access data memory directly and alleviating the need for CPU-intensive management. By allowing these data-intensive peripherals to share their own data path, the main data bus is also deloaded, resulting in additional power savings.

The DMA Controller functions both as a peripheral and a direct extension of the CPU. It is located on the microcontroller data bus between the CPU and DMA-enabled peripherals, with direct access to SRAM. This partitions the SFR bus into two buses, allowing the DMA Controller access to the DMA-capable peripherals located on the new DMA SFR bus. The controller serves as a Host device on the DMA SFR bus, controlling data flow from DMA-capable peripherals.

The controller also monitors CPU instruction processing directly, allowing it to be aware of when the CPU requires access to peripherals on the DMA bus and automatically relinquishing control to the CPU as needed. This increases the effective bandwidth for handling data without DMA operations causing a processor Stall. This makes the controller essentially transparent to the user.

The DMA Controller has these features:


- Two Independent and Independently Programmable Channels
- Concurrent Operation with the CPU (no DMA caused Wait states)
- DMA Bus Arbitration
- Five Programmable Address modes
- Four Programmable Transfer modes
- Four Flexible Internal Data Transfer modes
- Byte or Word Support for Data Transfer
- 16-Bit Source and Destination Address Register for Each Channel, Dynamically Updated and Reloadable
- 16-Bit Transaction Count Register, Dynamically Updated and Reloadable
- Upper and Lower Address Limit Registers
- Counter Half-Full Level Interrupt
- Software Triggered Transfer
- Null Write mode for Symmetric Buffer Operations

A simplified block diagram of the DMA Controller is shown in [Figure 6-1](#).

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

Figure 6-1. DMA Functional Block Diagram

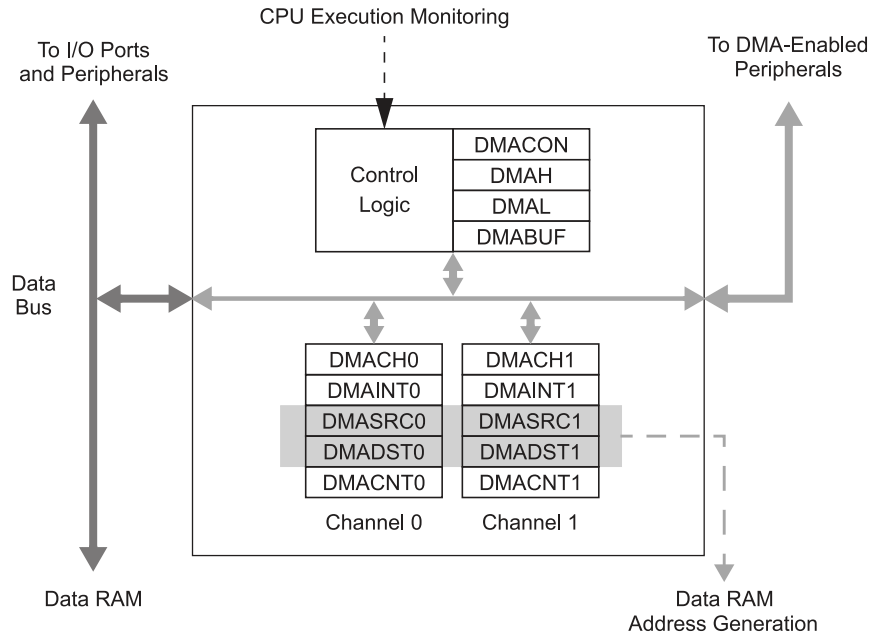

6.1 Summary of DMA Operations

The DMA Controller is capable of moving data between addresses according to a number of different parameters. Each of these parameters can be independently configured for any transaction; in addition, any or all of the DMA channels can independently perform a different transaction at the same time. Transactions are classified by these parameters:

- Source and destination (SFRs and data RAM)
- Data size (byte or word)
- Trigger source
- Transfer mode (One-Shot, Repeated or Continuous)
- Addressing modes (Fixed Address or Address Blocks, with or without Address Increment/Decrement)

In addition, the DMA Controller provides channel priority arbitration for all channels.


6.1.1 Source and Destination

Using the DMA Controller, data may be moved between any two addresses in the Data Space. The SFR space (0000h to 07FFh), or the data RAM space (0800h to FFFFh), can serve as either the source or the destination. Data can be moved between these areas in either direction or between addresses in either area. The four different combinations are shown in [Figure 6-2](#).

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

Figure 6-2. Types of DMA Data Transfers

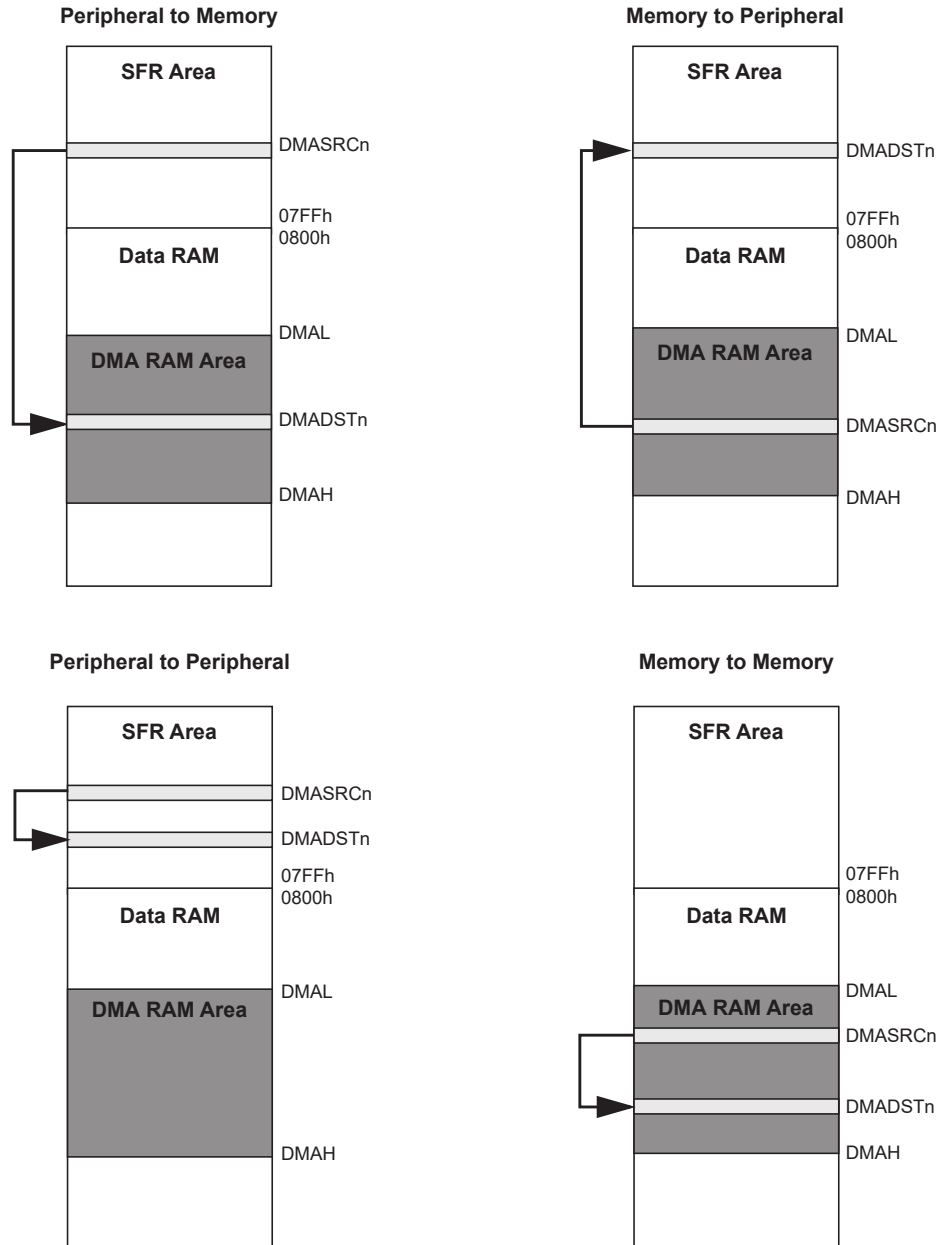

Note: Relative sizes of memory areas are not shown to scale.

If it is necessary to protect areas of data RAM, the DMA Controller allows the user to set upper and lower address boundaries for operations in the Data Space above the SFR space. The boundaries are set by the DMAH and DMAL Limit registers. If a DMA channel attempts an operation outside of the address boundaries, the transaction is terminated and an interrupt is generated.

6.1.2 Data Size

The DMA Controller can handle both 8-bit and 16-bit transactions. Size is user-selectable using the SIZE bit (DMACHn[1]). By default, each channel is configured for word-sized transactions. When byte-sized transactions are chosen, the LSB of the source and/or destination address determines if the data represent the upper or lower byte of the data RAM location.

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.1.3 Trigger Source

The DMA Controller can use any one of the device's interrupt sources to initiate a transaction. The triggers for the DMA channels are selected by the CHSEL[6:0] bits in the DMAINTn registers. The DMA trigger sources are listed in [Table 6-1](#).

Table 6-1. DMA Trigger Sources

| CHSEL[6:0] | Trigger (Interrupt) | CHSEL[6:0] | Trigger (Interrupt) |
|------------|--------------------------|------------|-----------------------|
| 7 | MCCP5 IC/OC Interrupt | 68 | UART1 TX Interrupt |
| 8 | MCCP5 Timer Interrupt | 69 | UART1 RX Interrupt |
| 9 | MCCP4 IC/OC Interrupt | 70 | UART1 Error Interrupt |
| 10 | MCCP4 Timer Interrupt | 71 ... 74 | Reserved |
| 11 | MCCP3 IC/OC Interrupt | | |
| 12 | MCCP3 Timer Interrupt | | |
| 13 | MCCP2 IC/OC Interrupt | | |
| 14 | MCCP2 Timer Interrupt | | |
| 15 | MCCP1 IC/OC Interrupt | 79 | DMACHA1 Interrupt |
| 16 | MCCP1 Timer Interrupt | 80 | DMACHA0 Interrupt |
| 17 ... 28 | Reserved | 81 | ADC Interrupt |
| | | 82 | USB Interrupt |
| | | 83 | Reserved |
| | | 84 | HLVD Interrupt |
| | | 85 | CRC Interrupt |
| 35 | SPI2 Receive Interrupt | 88 | Reserved |
| 36 | SPI2 Transmit Interrupt | 89 | CLC4 Out |
| 37 | SPI2 General Interrupt | 90 | CLC3 Out |
| 38 | SPI1 Receive Interrupt | 91 | CLC2 Out |
| 39 | SPI1 Transmit Interrupt | 92 | CLC1 Out |
| 40 | SPI1 General Interrupt | 93 | Reserved |
| 41 ... 43 | Reserved | 94 | RTCC Alarm Interrupt |
| 47 | I2C2 Client Interrupt | 98 | TMR2 Interrupt |
| 48 | I2C2 Host Interrupt | 99 | TMR1 Interrupt |
| 49 | I2C2 Collision Interrupt | 100 | Reserved |
| 50 | I2C1 Client Interrupt | 101 | |
| 51 | I2C1 Host Interrupt | 102 | Reserved |
| 52 | I2C1 Collision Interrupt | 103 | Comparator Interrupt |
| | | 104 | INT4 Interrupt |
| | | 105 | INT3 Interrupt |
| | | 106 | INT2 Interrupt |
| | | 107 | INT1 Interrupt |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

|continued | | | |
|----------------|---------------------|-------------|---------------------------|
| CHSEL[6:0] | Trigger (Interrupt) | CHSEL[6:0] | Trigger (Interrupt) |
| | | 108 | INT0 Interrupt |
| | | 109 | Interrupt-on-Change (IOC) |
| | | 110 ... 127 | Reserved |

Since the source and destination addresses for any transaction can be programmed independently of the trigger source, the DMA Controller can use any trigger to perform an operation on any peripheral. This also allows DMA channels to be cascaded to perform more complex transfer operations.

6.1.4 Transfer Mode

The DMA Controller supports four types of data transfers, based on the volume of data to be moved for each trigger.

- One-Shot: A single transaction occurs for each trigger.
- Continuous: A series of back-to-back transactions occur for each trigger; the number of transactions is determined by the DMACNTn transaction counter.
- Repeated One-Shot: A single transaction is performed repeatedly, once per trigger, until the DMA channel is disabled.
- Repeated Continuous: A series of transactions are performed repeatedly, one cycle per trigger, until the DMA channel is disabled.

All transfer modes allow the option to have the source and destination addresses, and counter value automatically reloaded after the completion of a transaction. Repeated mode transfers do this automatically.

6.1.5 Addressing Modes

The DMA Controller also supports transfers between single addresses or address ranges. The four basic options are:

- Fixed-to-Fixed: Between two constant addresses
- Fixed-to-Block: From a constant source address to a range of destination addresses
- Block-to-Fixed: From a range of source addresses to a single, constant destination address
- Block-to-Block: From a range of source addresses to a range of destination addresses

The option to select auto-increment or auto-decrement of source and/or destination addresses is available for Block Addressing modes.

In addition to the four basic modes, the DMA Controller also supports Peripheral Indirect Addressing (PIA) mode, where the source or destination address is generated jointly by the DMA Controller and a PIA-capable peripheral. When enabled, the DMA channel provides a base source and/or destination address, while the peripheral provides a fixed range offset address.

For PIC24FJ64GP205/GU205 family devices, the 12-bit A/D Converter module is the only PIA-capable peripheral. Details for its use in PIA mode are provided in [21. 12-Bit A/D Converter with Threshold Detect](#).

6.1.6 Channel Priority

Each DMA channel functions independently of the others, but also competes with the others for access to the data and DMA buses. When access collisions occur, the DMA Controller arbitrates between the channels using a user-selectable priority scheme. Two schemes are available:

- Round Robin: When two or more channels collide, the lower numbered channel receives priority on the first collision. On subsequent collisions, the higher numbered channels each receive priority based on their channel number.
- Fixed: When two or more channels collide, the lowest numbered channel always receives priority, regardless of past history; however, any channel being actively processed is not available for an immediate retrigger. If a higher priority channel is continually requesting service, it will be scheduled for service after the next lower priority channel with a pending request.

6.2 Typical Setup

To set up a DMA channel for a basic data transfer:

1. Enable the DMA Controller (DMAEN = 1) and select an appropriate channel priority scheme by setting or clearing PRSSEL.
2. Program DMAH and DMAL with the appropriate upper and lower address boundaries for data RAM operations.
3. Select the DMA channel to be used and disable its operation (CHEN = 0).
4. Program the appropriate source and destination addresses for the transaction into the channel's DMASRCn and DMADSTn registers. For PIA mode addressing, use the base address value.
5. Program the DMACNTn register for the number of triggers per transfer (One-Shot or Continuous modes) or the number of words (bytes) to be transferred (Repeated modes).
6. Set or clear the SIZE bit to select the data size.
7. Program the TRMODE[1:0] bits to select the Data Transfer mode.
8. Program the SAMODE[1:0] and DAMODE[1:0] bits to select the addressing mode.
9. Enable the DMA channel by setting CHEN.
10. Enable the trigger source interrupt.

6.3 Peripheral Module Disable

Unlike other peripheral modules, the channels of the DMA Controller cannot be individually powered down using the Peripheral Module Disable (PMD) registers. Instead, the channels are controlled as two groups. The DMA03MD bit (PMD7[4]) selectively controls DMACH0 through DMACH3. Setting both bits effectively disables the DMA Controller.

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4 DMA Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|--------------|------------|-------------|----------|-------------|-------|--------|--------|
| 0x00 ... 0x04C3 | Reserved | | | | | | | | | |
| 0x04C4 | DMACON | 7:0 | | | | | | | | PRSEL |
| | | 15:8 | DMAEN | | DMASIDL | | | | | |
| 0x04C6 | DMABUF | 7:0 | DMABUF[7:0] | | | | | | | |
| | | 15:8 | DMABUF[15:8] | | | | | | | |
| 0x04C8 | DMAL | 7:0 | LADDR[7:0] | | | | | | | |
| | | 15:8 | LADDR[15:8] | | | | | | | |
| 0x04CA | DMAH | 7:0 | HADDR[7:0] | | | | | | | |
| | | 15:8 | HADDR[15:8] | | | | | | | |
| 0x04CC | DMACH0 | 7:0 | SAMODE[1:0] | | DAMODE[1:0] | | TRMODE[1:0] | | SIZE | CHEN |
| | | 15:8 | | | | Reserved | | NULLW | RELOAD | CHREQ |
| 0x04CE | DMAINT0 | 7:0 | HIGHIF | LOWIF | DONEIF | HALFIF | OVRUNIF | | | HALFEN |
| | | 15:8 | DBUFWF | CHSEL[6:0] | | | | | | |
| 0x04D0 | DMASRC0 | 7:0 | SADDR[7:0] | | | | | | | |
| | | 15:8 | SADDR[15:8] | | | | | | | |
| 0x04D2 | DMADST0 | 7:0 | DADDR[7:0] | | | | | | | |
| | | 15:8 | DADDR[15:8] | | | | | | | |
| 0x04D4 | DMACNT0 | 7:0 | CNT[7:0] | | | | | | | |
| | | 15:8 | CNT[15:8] | | | | | | | |
| 0x04D6 | DMACH1 | 7:0 | SAMODE[1:0] | | DAMODE[1:0] | | TRMODE[1:0] | | SIZE | CHEN |
| | | 15:8 | | | | Reserved | | NULLW | RELOAD | CHREQ |
| 0x04D8 | DMAINT1 | 7:0 | HIGHIF | LOWIF | DONEIF | HALFIF | OVRUNIF | | | HALFEN |
| | | 15:8 | DBUFWF | CHSEL[6:0] | | | | | | |
| 0x04DA | DMASRC1 | 7:0 | SADDR[7:0] | | | | | | | |
| | | 15:8 | SADDR[15:8] | | | | | | | |
| 0x04DC | DMADST1 | 7:0 | DADDR[7:0] | | | | | | | |
| | | 15:8 | DADDR[15:8] | | | | | | | |
| 0x04DE | DMACNT1 | 7:0 | CNT[7:0] | | | | | | | |
| | | 15:8 | CNT[15:8] | | | | | | | |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.1 DMA Engine Control Register

Name: DMACON

Offset: 0x4C4

| | | | | | | | | |
|--------|-------|----|---------|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMAEN | | DMASIDL | | | | | |
| Access | R/W | | R/W | | | | | |
| Reset | 0 | | 0 | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | PRSSEL |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

Bit 15 – DMAEN DMA Module Enable bit

| Value | Description |
|-------|--|
| 1 | Enables module |
| 0 | Disables module and terminates all active DMA operation(s) |

Bit 13 – DMASIDL DMA Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 0 – PRSSEL Channel Priority Scheme Selection bit

| Value | Description |
|-------|-----------------------|
| 1 | Round robin scheme |
| 0 | Fixed priority scheme |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.2 DMA Buffer Register

Name: DMABUF

Offset: 0x4C6

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| | DMABUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DMABUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DMABUF[15:0] DMA Buffer bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.3 DMA Low Address Limit Register

Name: DMAL
Offset: 0x4C8

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – LADDR[15:0] DMA Low Address Limit bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.4 DMA High Address Limit Register

Name: DMAH
Offset: 0x4CA

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | HADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | HADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – HADDR[15:0] DMA High Address Limit bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.5 DMA Channel 0 Control Register

Name: DMACH0
Offset: 0x4CC

Notes:

1. Only the original DMACNT0 is required to be stored to recover the original DMASRC0 and DMADST0 values.
2. DMACNT0 will always be reloaded in Repeated mode transfers, regardless of the state of the RELOAD bit.
3. The number of transfers executed while CHREQ is set depends on the configuration of TRMODE[1:0].

Legend: r = Reserved bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|----------|----|-------|--------|-------|
| | | | | Reserved | | NULLW | RELOAD | CHREQ |
| Access | | | | r | | R/W | R/W | R/W |
| Reset | | | | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------------|-----|-------------|-----|-------------|-----|------|------|
| | SAMODE[1:0] | | DAMODE[1:0] | | TRMODE[1:0] | | SIZE | CHEN |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 12 – Reserved Maintain as '0'.

Bit 10 – NULLW Null Write Mode bit

| Value | Description |
|-------|--|
| 1 | A dummy write is initiated to DMASRC0 for every write to DMADST0 |
| 0 | No dummy write is initiated |

Bit 9 – RELOAD Address and Count Reload bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | DMASRC0, DMADST0 and DMACNT0 registers are reloaded to their previous values upon the start of the next operation |
| 0 | DMASRC0, DMADST0 and DMACNT0 are not reloaded on the start of the next operation ⁽²⁾ |

Bit 8 – CHREQ DMA Channel Software Request bit⁽³⁾

| Value | Description |
|-------|---|
| 1 | A DMA request is initiated by software; automatically cleared upon completion of a DMA transfer |
| 0 | No DMA request is pending |

Bits 7:6 – SAMODE[1:0] Source Address Mode Selection bits

| Value | Description |
|-------|--|
| 11 | Reserved |
| 10 | DMASRC0 is decremented based on the SIZE bit after a transfer completion |
| 01 | DMASRC0 is incremented based on the SIZE bit after a transfer completion |
| 00 | DMASRC0 remains unchanged after a transfer completion |

Bits 5:4 – DAMODE[1:0] Destination Address Mode Selection bits

| Value | Description |
|-------|--|
| 11 | DMADST0 is used in Peripheral Indirect Addressing and remains unchanged |
| 10 | DMADST0 is decremented based on the SIZE bit after a transfer completion |
| 01 | DMADST0 is incremented based on the SIZE bit after a transfer completion |
| 00 | DMADST0 remains unchanged after a transfer completion |

Bits 3:2 – TRMODE[1:0] Transfer Mode Selection bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

| Value | Description |
|-------|--------------------------|
| 11 | Repeated Continuous mode |
| 10 | Continuous mode |
| 01 | Repeated One-Shot mode |
| 00 | One-Shot mode |

Bit 1 – SIZE Data Size Selection bit

| Value | Description |
|-------|---------------|
| 1 | Byte (8-bit) |
| 0 | Word (16-bit) |

Bit 0 – CHEN DMA Channel Enable bit

| Value | Description |
|-------|---------------------------------------|
| 1 | The corresponding channel is enabled |
| 0 | The corresponding channel is disabled |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.6 DMA Channel 0 Interrupt Register

Name: DMAINT0
Offset: 0x4CE

Notes:

- Setting these flags in software does not generate an interrupt.
- Testing for address limit violations (DMASRC0 or DMADST0 is either greater than DMAH or less than DMAL) is NOT done before the actual access.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|-----|------------|-----|-----|-----|-----|-----|
| | DBUFWF | | CHSEL[6:0] | | | | | |
| Access | R | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|-------|--------|--------|---------|---|---|--------|
| | HIGHIF | LOWIF | DONEIF | HALFIF | OVRUNIF | | | HALFEN |
| Access | R/W | R/W | R/W | R/W | R/W | | | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | | | 0 |

Bit 15 – DBUFWF DMA Buffered Data Write Flag bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | The content of the DMA buffer has not been written to the location specified in DMADST0 or DMASRC0 in Null Write mode |
| 0 | The content of the DMA buffer has been written to the location specified in DMADST0 or DMASRC0 in Null Write mode |

Bits 14:8 – CHSEL[6:0] DMA Channel Trigger Selection bits

See [Table 6-1](#) for a complete list.

Bit 7 – HIGHIF DMA High Address Limit Interrupt Flag bit^(1,2)

| Value | Description |
|-------|--|
| 1 | The DMA channel has attempted to access an address higher than DMAH or the upper limit of the data RAM space |
| 0 | The DMA channel has not invoked the high address limit interrupt |

Bit 6 – LOWIF DMA Low Address Limit Interrupt Flag bit^(1,2)

| Value | Description |
|-------|--|
| 1 | The DMA channel has attempted to access the DMA SFR address lower than DMAL, but above the SFR range (07FFh) |
| 0 | The DMA channel has not invoked the low address limit interrupt |

Bit 5 – DONEIF DMA Complete Operation Interrupt Flag bit⁽¹⁾

| Value | Description |
|--------------|---|
| If CHEN = 1: | |
| 1 | The previous DMA session has ended with completion |
| 0 | The current DMA session has not yet completed |
| If CHEN = 0: | |
| 1 | The previous DMA session has ended with completion |
| 0 | The previous DMA session has ended without completion |

Bit 4 – HALFIF DMA 50% Watermark Level Interrupt Flag bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | DMACNT0 has reached the halfway point to 0000h |
| 0 | DMACNT0 has not reached the halfway point |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

Bit 3 – OVRUNIF DMA Channel Overrun Flag bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | The DMA channel is triggered while it's still completing the operation based on the previous trigger |
| 0 | The overrun condition has not occurred |

Bit 0 – HALFEN Halfway Completion Watermark bit

| Value | Description |
|-------|---|
| 1 | Interrupts are invoked when DMACNT0 has reached its halfway point and at completion |
| 0 | An interrupt is invoked only at the completion of the transfer |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.7 DMA Data Source Address Pointer 0 Register

Name: DMASRC0

Offset: 0x4D0

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | SADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – SADDR[15:0] DMA Data Source Address Pointer bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.8 DMA Data Source Address Pointer 0 Register

Name: DMADST0

Offset: 0x4D2

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DADDR[15:0] DMA Data Destination Address Pointer bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.9 DMA Transaction Counter 0 Register

Name: DMACNT0

Offset: 0x4D4

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CNT[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CNT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CNT[15:0] DMA Transaction Counter bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.10 DMA Channel 1 Control Register

Name: DMACH1
Offset: 0x4D6

Notes:

1. Only the original DMACNT1 is required to be stored to recover the original DMASRC1 and DMADST1 values.
2. DMACNT1 will always be reloaded in Repeated mode transfers, regardless of the state of the RELOAD bit.
3. The number of transfers executed while CHREQ is set depends on the configuration of TRMODE[1:0].

Legend: r = Reserved bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|----------|----|-------|--------|-------|
| | | | | Reserved | | NULLW | RELOAD | CHREQ |
| Access | | | | r | | R/W | R/W | R/W |
| Reset | | | | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------------|-----|-------------|-----|-------------|-----|------|------|
| | SAMODE[1:0] | | DAMODE[1:0] | | TRMODE[1:0] | | SIZE | CHEN |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 12 – Reserved Maintain as '0'.

Bit 10 – NULLW Null Write Mode bit

| Value | Description |
|-------|--|
| 1 | A dummy write is initiated to DMASRC1 for every write to DMADST1 |
| 0 | No dummy write is initiated |

Bit 9 – RELOAD Address and Count Reload bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | DMASRC1, DMADST1 and DMACNT1 registers are reloaded to their previous values upon the start of the next operation |
| 0 | DMASRC1, DMADST1 and DMACNT1 are not reloaded on the start of the next operation ⁽²⁾ |

Bit 8 – CHREQ DMA Channel Software Request bit⁽³⁾

| Value | Description |
|-------|---|
| 1 | A DMA request is initiated by software; automatically cleared upon completion of a DMA transfer |
| 0 | No DMA request is pending |

Bits 7:6 – SAMODE[1:0] Source Address Mode Selection bits

| Value | Description |
|-------|--|
| 11 | Reserved |
| 10 | DMASRC1 is decremented based on the SIZE bit after a transfer completion |
| 01 | DMASRC1 is incremented based on the SIZE bit after a transfer completion |
| 00 | DMASRC1 remains unchanged after a transfer completion |

Bits 5:4 – DAMODE[1:0] Destination Address Mode Selection bits

| Value | Description |
|-------|--|
| 11 | DMADST1 is used in Peripheral Indirect Addressing and remains unchanged |
| 10 | DMADST1 is decremented based on the SIZE bit after a transfer completion |
| 01 | DMADST1 is incremented based on the SIZE bit after a transfer completion |
| 00 | DMADST1 remains unchanged after a transfer completion |

Bits 3:2 – TRMODE[1:0] Transfer Mode Selection bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

| Value | Description |
|-------|--------------------------|
| 11 | Repeated Continuous mode |
| 10 | Continuous mode |
| 01 | Repeated One-Shot mode |
| 00 | One-Shot mode |

Bit 1 – SIZE Data Size Selection bit

| Value | Description |
|-------|---------------|
| 1 | Byte (8-bit) |
| 0 | Word (16-bit) |

Bit 0 – CHEN DMA Channel Enable bit

| Value | Description |
|-------|---------------------------------------|
| 1 | The corresponding channel is enabled |
| 0 | The corresponding channel is disabled |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.11 DMA Channel 1 Interrupt Register

Name: DMAINT1

Offset: 0x4D8

Notes:

1. Setting these flags in software does not generate an interrupt.
2. Testing for address limit violations (DMASRC1 or DMADST1 is either greater than DMAH or less than DMAL) is NOT done before the actual access.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|-----|------------|-----|-----|-----|-----|-----|
| | DBUFWF | | CHSEL[6:0] | | | | | |
| Access | R | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|-------|--------|--------|---------|---|---|--------|
| | HIGHIF | LOWIF | DONEIF | HALFIF | OVRUNIF | | | HALFEN |
| Access | R/W | R/W | R/W | R/W | R/W | | | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | | | 0 |

Bit 15 – DBUFWF DMA Buffered Data Write Flag bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | The content of the DMA buffer has not been written to the location specified in DMADST1 or DMASRC1 in Null Write mode |
| 0 | The content of the DMA buffer has been written to the location specified in DMADST1 or DMASRC1 in Null Write mode |

Bits 14:8 – CHSEL[6:0] DMA Channel Trigger Selection bits

See [Table 6-1](#) for a complete list.

Bit 7 – HIGHIF DMA High Address Limit Interrupt Flag bit^(1,2)

| Value | Description |
|-------|--|
| 1 | The DMA channel has attempted to access an address higher than DMAH or the upper limit of the data RAM space |
| 0 | The DMA channel has not invoked the high address limit interrupt |

Bit 6 – LOWIF DMA Low Address Limit Interrupt Flag bit^(1,2)

| Value | Description |
|-------|--|
| 1 | The DMA channel has attempted to access the DMA SFR address lower than DMAL, but above the SFR range (07FFh) |
| 0 | The DMA channel has not invoked the low address limit interrupt |

Bit 5 – DONEIF DMA Complete Operation Interrupt Flag bit⁽¹⁾

| Value | Description |
|---------------------|---|
| If CHEN = 1: | |
| 1 | The previous DMA session has ended with completion |
| 0 | The current DMA session has not yet completed |
| If CHEN = 0: | |
| 1 | The previous DMA session has ended with completion |
| 0 | The previous DMA session has ended without completion |

Bit 4 – HALFIF DMA 50% Watermark Level Interrupt Flag bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | DMACNT1 has reached the halfway point to 0000h |
| 0 | DMACNT1 has not reached the halfway point |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

Bit 3 – OVRUNIF DMA Channel Overrun Flag bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | The DMA channel is triggered while it's still completing the operation based on the previous trigger |
| 0 | The overrun condition has not occurred |

Bit 0 – HALFEN Halfway Completion Watermark bit

| Value | Description |
|-------|---|
| 1 | Interrupts are invoked when DMACNT1 has reached its halfway point and at completion |
| 0 | An interrupt is invoked only at the completion of the transfer |

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.12 DMA Data Source Address Pointer 1 Register

Name: DMASRC1

Offset: 0x4DA

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | SADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – SADDR[15:0] DMA Data Source Address Pointer bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.13 DMA Data Source Address Pointer 1 Register

Name: DMADST1

Offset: 0x4DC

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DADDR[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DADDR[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DADDR[15:0] DMA Data Destination Address Pointer bits

PIC24FJ64GP205/GU205 Family

Direct Memory Access Controller (DMA)

6.4.14 DMA Transaction Counter 1 Register

Name: DMACNT1

Offset: 0x4DE

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CNT[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CNT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CNT[15:0] DMA Transaction Counter bits

7. Resets

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “Reset” (www.microchip.com/DS39712) in the “dsPIC33/PIC24 Family Reference Manual”. The information in this data sheet supersedes the information in the FRM.

The Reset module combines all Reset sources and controls the device Master Reset Signal, $\overline{\text{SYSRST}}$. The following is a list of device Reset sources:

- POR: Power-on Reset
- $\overline{\text{MCLR}}$: Master Clear Pin Reset
- SWR: RESET Instruction
- WDT: Watchdog Timer Reset
- BOR: Brown-out Reset
- CM: Configuration Mismatch Reset
- TRAPR: Trap Conflict Reset
- IOPUWR: Illegal Opcode Reset
- UWR: Uninitialized W Register Reset

A simplified block diagram of the Reset module is shown in [Figure 7-1](#).

Any active source of Reset will make the $\overline{\text{SYSRST}}$ signal active. Many registers associated with the CPU and peripherals are forced to a known Reset state. Most registers are unaffected by a Reset; their status is unknown on POR and unchanged by all other Resets.


Note: Refer to the specific peripheral or CPU section of this manual for register Reset states.

All types of device Reset will set a corresponding status bit in the RCON register to indicate the type of Reset (see [7.6.1. RCON\(1,6\)](#)). A POR will clear all bits, except for the BOR and POR (RCON[1:0]) bits, which are set. The user may set or clear any bit at any time during code execution. The RCON bits only serve as status bits. Setting a particular Reset status bit in software will not cause a device Reset to occur.

The RCON register also has other bits associated with the Watchdog Timer and device power-saving states. The function of these bits is discussed in other sections of this data sheet.

Note: The status bits in the RCON register should be cleared after they are read so that the next RCON register values after a device Reset will be meaningful.

Figure 7-1. Reset System Block Diagram

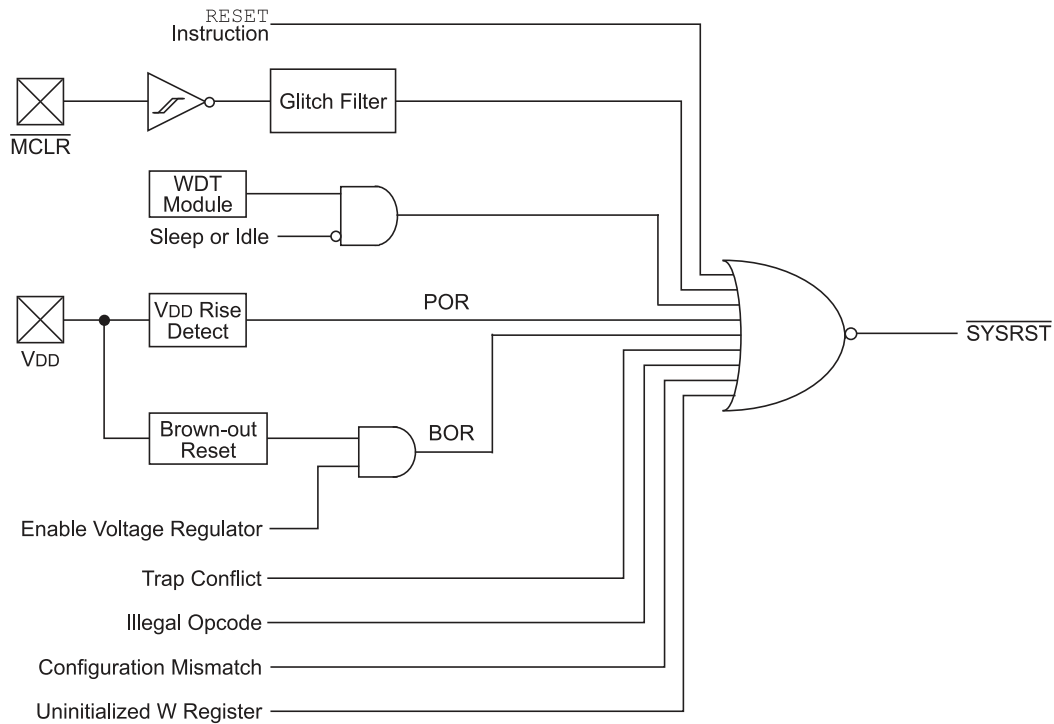

7.1 Special Function Register Reset States

Most of the Special Function Registers (SFRs) associated with the PIC24F CPU and peripherals are reset to a particular value at a device Reset. The SFRs are grouped by their peripheral or CPU function and their Reset values are specified in each section of this manual.

The Reset value for each SFR does not depend on the type of Reset, with the exception of four registers. The Reset value for the Reset Control register, RCON, will depend on the type of device Reset. The Reset value for the Oscillator Control register, OSCCON, will depend on the type of Reset and the programmed values of the FNOSC[2:0] bits in the FOSCSEL Flash Configuration Word. Some bits in the NVMCON register are only affected by a POR.

7.2 Device Reset Times

The Reset times for various types of device Reset are summarized in [Table 7-1](#). Note that the Master Reset Signal, $\overline{\text{SYSRST}}$, is released after the POR delay time expires.

The time at which the device actually begins to execute code will also depend on the system oscillator delays, which include the Oscillator Start-up Timer (OST) and the PLL lock time. The OST and PLL lock times occur in parallel with the applicable $\overline{\text{SYSRST}}$ delay times.

The Fail-Safe Clock Monitor (FSCM) delay determines the time at which the FSCM begins to monitor the system clock source after the $\overline{\text{SYSRST}}$ signal is released.

Table 7-1. Reset Delay Times for Various Device Resets

| Reset Type | Clock Source | $\overline{\text{SYSRST}}$ Delay | System Clock Delay | Notes |
|-----------------|--------------|--|------------------------------------|---------------|
| POR | EC | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | — | 1, 2, 3 |
| | ECPLL | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{LOCK} | 1, 2, 3, 5 |
| | XT, HS, SOSC | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{OST} | 1, 2, 3, 4 |
| | XTPLL, HSPLL | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | $T_{\text{OST}} + T_{\text{LOCK}}$ | 1, 2, 3, 4, 5 |
| | FRC, OSCFDIV | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{FRC} | 1, 2, 3, 6, 7 |
| | FRCPLL | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | $T_{\text{FRC}} + T_{\text{LOCK}}$ | 1, 2, 3, 5, 6 |
| | LPRC | $T_{\text{POR}} + T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{LPRC} | 1, 2, 3, 6 |
| BOR | EC | $T_{\text{STARTUP}} + T_{\text{RST}}$ | — | 2, 3 |
| | ECPLL | $T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{LOCK} | 2, 3, 5 |
| | XT, HS, SOSC | $T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{OST} | 2, 3, 4 |
| | XTPLL, HSPLL | $T_{\text{STARTUP}} + T_{\text{RST}}$ | $T_{\text{OST}} + T_{\text{LOCK}}$ | 2, 3, 4, 5 |
| | FRC, OSCFDIV | $T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{FRC} | 2, 3, 6, 7 |
| | FRCPLL | $T_{\text{STARTUP}} + T_{\text{RST}}$ | $T_{\text{FRC}} + T_{\text{LOCK}}$ | 2, 3, 5, 6 |
| | LPRC | $T_{\text{STARTUP}} + T_{\text{RST}}$ | T_{LPRC} | 2, 3, 6 |
| MCLR | Any Clock | T_{RST} | — | 3 |
| WDT | Any Clock | T_{RST} | — | 3 |
| Software | Any clock | T_{RST} | — | 3 |
| Illegal Opcode | Any Clock | T_{RST} | — | 3 |
| Uninitialized W | Any Clock | T_{RST} | — | 3 |
| Trap Conflict | Any Clock | T_{RST} | — | 3 |

Note:

1. T_{POR} = Power-on Reset Delay (10 μs nominal).
2. $T_{\text{STARTUP}} = T_{\text{VREG}}$.
3. T_{RST} = Internal State Reset Time (2 μs nominal).
4. T_{OST} = Oscillator Start-up Timer (OST). A 10-bit counter counts 1024 oscillator periods before releasing the oscillator clock to the system.
5. T_{LOCK} = PLL Lock Time.
6. T_{FRC} and T_{LPRC} = RC Oscillator Start-up Times.
7. If Two-Speed Start-up is enabled, regardless of the Primary Oscillator selected, the device starts with FRC so the system clock delay is just T_{FRC} , and in such cases, FRC start-up time is valid; it switches to the Primary Oscillator after its respective clock delay.

7.3 Brown-out Reset (BOR)

PIC24FJ64GP205/GU205 family devices implement a BOR circuit that provides the user with several configuration and power-saving options. The BOR is controlled by the BOREN[1:0] (FPOR[1:0]) Configuration bits.

When BOR is enabled, any drop of V_{DD} below the BOR threshold results in a device BOR. Threshold levels are described in [30.2. DC Characteristics](#).

7.4 Low-Power BOR

Low-Power BOR provides a downside protection when the main BOR controlled BOREN[1:0] Configuration bits are disabled.

Low-Power BOR re-arms the POR to ensure that the device will reset if V_{DD} drops below the POR threshold. The Low-Power BOR trip point is around 2.0V.

Low-Power BOR is selected in the configuration through the LPBOREN (FPOR[3]) bit. Because it is designed for very low-current consumption, the accuracy may vary slightly.

7.5 Clock Source at Reset

After Reset, the system clock source is always selected according to the Oscillator Configuration bits.

The oscillator start-up circuitry and its associated delay timers are not linked to the device Reset delays that occur at power-up. Some crystal circuits (especially low-frequency crystals) will have a relatively long start-up time. Therefore, one or more of the following conditions is possible after $\overline{\text{SYSRST}}$ is released:

- The oscillator circuit has not begun to oscillate.
- The Oscillator Start-up Timer has not expired (if a crystal oscillator is used).
- The PLL has not achieved a lock (if PLL is used).

The device will not begin to execute code until a valid clock source has been released to the system.

Therefore, the oscillator and PLL start-up delays must be considered when the Reset delay time must be known.

If the FSCM is enabled, it will begin to monitor the system clock source when $\overline{\text{SYSRST}}$ is released. If a valid clock source is not available at this time, the device will automatically switch to the FRC Oscillator and the user can switch to the desired crystal oscillator in the Trap Service Routine (TSR).

7.6 Reset Register

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|-----------|----------|-------|--------|--------|-------|-------|------|-----|-------|
| 0x00 ... 0x010F | Reserved | | | | | | | | | |
| 0x0110 | RCON(1,6) | 7:0 | EXTR | SWR | SWDTEN | WDTO | SLEEP | IDLE | BOR | POR |
| | | 15:8 | TRAPR | IOPUWR | SBOREN | RETEN | | | CM | VREGS |

7.6.1 Reset Control Register

Name: RCON^(1,6)

Offset: 0x110

Notes:

1. All of the Reset status bits may be set or cleared in software. Setting one of these bits in software does not cause a device Reset.
2. If the $\overline{\text{LPCFG}}$ Configuration bit is '1' (unprogrammed), the retention regulator is disabled and the RETEN bit has no effect.
3. Re-enabling the regulator after it enters Standby mode will add a delay, T_{VREG} , when waking up from Sleep. Applications that do not use the voltage regulator should set this bit to prevent this delay from occurring.
4. If the FWDTEN[1:0] Configuration bits are '11' (unprogrammed), the WDT is always enabled, regardless of the SWDTEN bit setting.
5. The BOREN[1:0] (FPOR[1:0]) Configuration bits must be set to '01' in order for SBOREN to have an effect.
6. On wake-up from Low-Voltage Sleep mode, RCON will have same value as a POR event.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|--------|--------|-------|----|----|-----|-------|
| | TRAPR | IOPUWR | SBOREN | RETEN | | | CM | VREGS |
| Access | R/W | R/W | R/W | R/W | | | R/W | R/W |
| Reset | 0 | 0 | 1 | 0 | | | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-----|--------|------|-------|------|-----|-----|
| | EXTR | SWR | SWDTEN | WDTO | SLEEP | IDLE | BOR | POR |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

Bit 15 – TRAPR Trap Reset Flag bit

| Value | Description |
|-------|--|
| 1 | A Trap Conflict Reset has occurred |
| 0 | A Trap Conflict Reset has not occurred |

Bit 14 – IOPUWR Illegal Opcode or Uninitialized W Register Access Reset Flag bit

| Value | Description |
|-------|--|
| 1 | An illegal opcode detection, an illegal address mode or Uninitialized W register used as an Address Pointer caused a Reset |
| 0 | An illegal opcode or Uninitialized W Register Reset has not occurred |

Bit 13 – SBOREN Software Control Over the BOR Function bit⁽⁵⁾

| Value | Description |
|-------|-----------------|
| 1 | BOR is enabled |
| 0 | BOR is disabled |

Bit 12 – RETEN Retention Mode Enable bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | Low-Voltage Regulator mode is enabled while device is in Sleep mode (1.2V regulator supplies to the core) |
| 0 | Low-Voltage Regulator mode is disabled |

Bit 9 – CM Configuration Word Mismatch Reset Flag bit

| Value | Description |
|-------|--|
| 1 | A Configuration Word Mismatch Reset has occurred |
| 0 | A Configuration Word Mismatch Reset has not occurred |

Bit 8 – VREGS Fast Wake-up from Sleep bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Regulator Standby mode is disabled (fast wake-up, uses more power) |
| 0 | Regulator Standby mode is enabled (slow wake-up, uses less power) |

Bit 7 – EXTR External Reset ($\overline{\text{MCLR}}$) Pin bit

| Value | Description |
|-------|---|
| 1 | A Master Clear (pin) Reset has occurred |
| 0 | A Master Clear (pin) Reset has not occurred |

Bit 6 – SWR Software RESET (Instruction) Flag bit

| Value | Description |
|-------|---|
| 1 | A RESET instruction has been executed |
| 0 | A RESET instruction has not been executed |

Bit 5 – SWDTEN Software Enable/Disable of WDT bit⁽⁴⁾

| Value | Description |
|-------|-----------------|
| 1 | WDT is enabled |
| 0 | WDT is disabled |

Bit 4 – WDTO Watchdog Timer Time-out Flag bit

| Value | Description |
|-------|-------------------------------|
| 1 | WDT time-out has occurred |
| 0 | WDT time-out has not occurred |

Bit 3 – SLEEP Wake-up from Sleep Flag bit

| Value | Description |
|-------|-----------------------------------|
| 1 | Device has been in Sleep mode |
| 0 | Device has not been in Sleep mode |

Bit 2 – IDLE Wake-up from Idle Flag bit

| Value | Description |
|-------|----------------------------------|
| 1 | Device has been in Idle mode |
| 0 | Device has not been in Idle mode |

Bit 1 – BOR Brown-out Reset Flag bit

| Value | Description |
|-------|--|
| 1 | A Brown-out Reset has occurred (also set after a Power-on Reset) |
| 0 | A Brown-out Reset has not occurred |

Bit 0 – POR Power-on Reset Flag bit

| Value | Description |
|-------|-----------------------------------|
| 1 | A Power-on Reset has occurred |
| 0 | A Power-on Reset has not occurred |

8. Interrupt Controller

This data sheet summarizes the features of the PIC24FJ64GP205/GU205 family devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Interrupts**” (www.microchip.com/DS70000600) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The PIC24FJ64GP205/GU205 family interrupt controller reduces the numerous peripheral interrupt request signals to a single interrupt request signal to the CPU.

The interrupt controller has the following features:

- Up to Eight Processor Exceptions and Software Traps
- Seven User-Selectable Priority Levels
- Interrupt Vector Table (IVT) with a Unique Vector for Each Interrupt or Exception Source
- Fixed Priority within a Specified User Priority Level
- Fixed Interrupt Entry and Return Latencies

8.1 Interrupt Vector Table

The PIC24FJ64GP205/GU205 family Interrupt Vector Table (IVT), shown in [Figure 8-1](#), resides in program memory starting at location, 000004h. The IVT contains non-maskable trap vectors and interrupt vectors. In general, each interrupt source has its own vector. Each interrupt vector contains a 24-bit wide address. The value programmed into each interrupt vector location is the starting address of the associated Interrupt Service Routine (ISR).

Interrupt vectors are prioritized in terms of their natural priority. This priority is linked to their position in the vector table. Lower addresses generally have a higher natural priority. For example, the interrupt associated with Vector 0 takes priority over interrupts at any other vector address.

8.1.1 Alternate Interrupt Vector Table

The Alternate Interrupt Vector Table (AIVT) is located after the IVT, as shown in [Figure 8-1](#). The AIVTEN (INTCON2[8]) control bit provides access to the AIVT. If the AIVTEN bit is set, all interrupt and exception processes will use the alternate vectors instead of the default vectors. The alternate vectors are organized in the same manner as the default vectors.

The AIVT is available only if the Boot Segment has been defined and the AIVT has been enabled. To enable the AIVT, both the Configuration bit, AIVTDIS (FSEC[15]), and the AIVTEN bit (INTCON2[8] in the SFR), have to be set. When the AIVT is enabled, all interrupts and exception processes use the alternate vectors instead of the default vectors. The AIVT begins at the start of the last page of the Boot Segment (BS) defined by the BSLIM[12:0] bits. The AIVT address is: $(BSLIM[12:0] - 1) \times 0x800$.

8.2 Reset Sequence

A device Reset is not a true exception because the interrupt controller is not involved in the Reset process. The PIC24FJ64GP205/GU205 family devices clear their registers in response to a Reset, which forces the PC to zero. The device then begins program execution at location, 0x000000. A GOTO instruction at the Reset address can redirect program execution to the appropriate start-up routine.

Note: Any unimplemented or unused vector locations in the IVT should be programmed with the address of a default interrupt handler routine that contains a RESET instruction.

PIC24FJ64GP205/GU205 Family

Interrupt Controller

.....continued

| Trap Description | MPLAB® XC16 Trap ISR Name | Vector # | IVT or AIVT Address Offset | Trap Bit Location | | | |
|------------------|---------------------------|----------|----------------------------|-------------------|-------------|--------|----------|
| | | | | Generic Flag | Source Flag | Enable | Priority |
| Reserved | Reserved | 7 | 0x000012 | — | — | — | — |

Table 8-2. Interrupt Vector Details

| Interrupt Description | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT or AIVT Address Offset | Interrupt Bit Location | | |
|----------------------------|----------------------|----------|-------|----------------------------|------------------------|----------|-------------|
| | | | | | Flag | Enable | Priority |
| External Interrupt 0 | _INT0Interrupt | 8 | 0 | 000014h | IFS0[0] | IEC0[0] | IPC0[2:0] |
| Capture/Compare/Timer1 | _CCT1Interrupt | 9 | 1 | 000016h | IFS0[1] | IEC0[1] | IPC0[6:4] |
| Capture/Compare/Timer2 | _CCT2Interrupt | 10 | 2 | 000018h | IFS0[2] | IEC0[2] | IPC0[10:8] |
| Timer1 | _T1Interrupt | 11 | 3 | 00001Ah | IFS0[3] | IEC0[3] | IPC0[14:12] |
| Direct Memory Access 0 | _DMA0Interrupt | 12 | 4 | 00001Ch | IFS0[4] | IEC0[4] | IPC1[2:0] |
| Reserved | Reserved | 13-14 | 5-6 | 00001Eh-000020h | — | — | — |
| Timer2 | _T2Interrupt | 15 | 7 | 000022h | IFS0[7] | IEC0[7] | IPC1[14:12] |
| Timer3 | _T3Interrupt | 16 | 8 | 000024h | IFS0[8] | IEC0[8] | IPC2[2:0] |
| SPI1 General | _SPI1Interrupt | 17 | 9 | 000026h | IFS0[9] | IEC0[9] | IPC2[6:4] |
| SPI1 Transfer Done | _SPI1TXInterrupt | 18 | 10 | 000028h | IFS0[10] | IEC0[10] | IPC2[10:8] |
| UART1 Receiver | _U1RXInterrupt | 19 | 11 | 00002Ah | IFS0[11] | IEC0[11] | IPC2[14:12] |
| UART1 Transmitter | _U1TXInterrupt | 20 | 12 | 00002Ch | IFS0[12] | IEC0[12] | IPC3[2:0] |
| A/D Converter 1 | _ADC1Interrupt | 21 | 13 | 00002Eh | IFS0[13] | IEC0[13] | IPC3[6:4] |
| Direct Memory Access 1 | _DMA1Interrupt | 22 | 14 | 000030h | IFS0[14] | IEC0[14] | IPC3[10:8] |
| NVM Program/Erase Complete | _NVMInterrupt | 23 | 15 | 000032h | IFS0[15] | IEC0[15] | IPC3[14:12] |
| I2C1 Client Events | _SI2C1Interrupt | 24 | 16 | 000034h | IFS1[0] | IEC1[0] | IPC4[2:0] |
| I2C1 Host Events | _MI2C1Interrupt | 25 | 17 | 000036h | IFS1[1] | IEC1[1] | IPC4[6:4] |
| Comparator | _CompInterrupt | 26 | 18 | 000038h | IFS1[2] | IEC1[2] | IPC4[10:8] |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

|continued | | | | | | | |
|-------------------------------|----------------------|----------|-------|----------------------------|------------------------|----------|--------------|
| Interrupt Description | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT or AIVT Address Offset | Interrupt Bit Location | | |
| | | | | | Flag | Enable | Priority |
| Interrupt-on-Change Interrupt | _IOCInterrupt | 27 | 19 | 00003Ah | IFS1[3] | IEC1[3] | IPC4[14:12] |
| External Interrupt 1 | _INT1Interrupt | 28 | 20 | 00003Ch | IFS1[4] | IEC1[4] | IPC5[2:0] |
| Reserved | Reserved | 29 | 21 | 00003Eh | — | — | — |
| Capture/Compare 5 | _CCP5Interrupt | 30 | 22 | 000040h | IFS1[6] | IEC1[6] | IPC5[10:8] |
| Reserved | Reserved | 33-34 | 25-26 | 000046h-000048h | — | — | — |
| External Interrupt 2 | _INT2Interrupt | 37 | 29 | 00004Eh | IFS1[13] | IEC1[13] | IPC7[6:4] |
| UART2 Receiver | _U2RXInterrupt | 38 | 30 | 000050h | IFS1[14] | IEC1[14] | IPC7[10:8] |
| UART2 Transmitter | _U2TXInterrupt | 39 | 31 | 000052h | IFS1[15] | IEC1[15] | IPC7[14:12] |
| SPI2 General | _SPI2Interrupt | 40 | 32 | 000054h | IFS2[0] | IEC2[0] | IPC8[2:0] |
| SPI2 Transfer Done | _SPI2TXInterrupt | 41 | 33 | 000056h | IFS2[1] | IEC2[1] | IPC8[6:4] |
| Reserved | Reserved | 42-43 | 34-35 | 000058h-00005Ah | — | — | — |
| Reserved | Reserved | 45-50 | 37-42 | 00005Eh-000068h | — | — | — |
| Capture/Compare/Timer3 | _CCT3Interrupt | 51 | 43 | 00006Ah | IFS2[11] | IEC2[11] | IPC10[14:12] |
| Capture/Compare/Timer4 | _CCT4Interrupt | 52 | 44 | 00006Ch | IFS2[12] | IEC2[12] | IPC11[2:0] |
| Reserved | Reserved | 53 | 45 | 00006Eh | — | — | — |
| Capture/Compare/Timer5 | _CCT5Interrupt | 55 | 47 | 000072h | IFS2[15] | IEC2[15] | IPC11[14:12] |
| I2C2 Client Events | _SI2C2Interrupt | 57 | 49 | 000076h | IFS3[1] | IEC3[1] | IPC12[6:4] |
| I2C2 Host Events | _MI2C2Interrupt | 58 | 50 | 000078h | IFS3[2] | IEC3[2] | IPC12[10:8] |
| External Interrupt 3 | _INT3Interrupt | 61 | 53 | 00007Eh | IFS3[5] | IEC3[5] | IPC13[6:4] |
| External Interrupt 4 | _INT4Interrupt | 62 | 54 | 000080h | IFS3[6] | IEC3[6] | IPC13[10:8] |
| Reserved | Reserved | 63-65 | 55-57 | 000082h-000086h | — | — | — |
| SPI1 Receive Done | _SPI1RXInterrupt | 66 | 58 | 000088h | IFS3[10] | IEC3[10] | IPC14[10:8] |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

.....continued

| Interrupt Description | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT or AIVT Address Offset | Interrupt Bit Location | | |
|------------------------------|----------------------|----------|---------|----------------------------|------------------------|----------|--------------|
| | | | | | Flag | Enable | Priority |
| SPI2 Receive Done | _SPI2RXInterrupt | 67 | 59 | 00008Ah | IFS3[11] | IEC3[11] | IPC14[14:12] |
| Reserved | Reserved | 68-69 | 60-61 | 00008Ch-00008Fh | — | — | — |
| Real-Time Clock and Calendar | _RTCCInterrupt | 70 | 62 | 000090h | IFS3[14] | IEC3[14] | IPC15[10:8] |
| Capture/ Compare 1 | _CCP1Interrupt | 71 | 63 | 000092h | IFS3[15] | IEC3[15] | IPC15[14:12] |
| Capture/ Compare 2 | _CCP2Interrupt | 72 | 64 | 000094h | IFS4[0] | IEC4[0] | IPC16[2:0] |
| UART1 Error | _U1ErrInterrupt | 73 | 65 | 000096h | IFS4[1] | IEC4[1] | IPC16[6:4] |
| UART2 Error | _U2ErrInterrupt | 74 | 66 | 000098h | IFS4[2] | IEC4[2] | IPC16[10:8] |
| Cyclic Redundancy Check | _CRCInterrupt | 75 | 67 | 00009Ah | IFS4[3] | IEC4[3] | IPC16[14:12] |
| Reserved | Reserved | 76-77 | 68-69 | 00009Ch-00009Eh | — | — | — |
| High/Low-Voltage Detect | _HLVDInterrupt | 80 | 72 | 0000A4h | IFS4[8] | IEC4[8] | IPC18[2:0] |
| Reserved | Reserved | 83-85 | 75-77 | 0000AAh-0000AEh | — | — | — |
| Reserved | Reserved | 87-88 | 79-80 | 0000B2h-0000B4h | — | — | — |
| I2C1 Bus Collision | _I2C1BCInterrupt | 92 | 84 | 0000BCh | IFS5[4] | IEC5[4] | IPC21[2:0] |
| I2C2 Bus Collision | _I2C2BCInterrupt | 93 | 85 | 0000BEh | IFS5[5] | IEC5[5] | IPC21[6:4] |
| USB OTG Interrupt | _USB1Interrupt | 94 | 86 | 0000C0h | IFS5[6] | IEC5[6] | IPC21[10:8] |
| Capture/ Compare 3 | _CCP3Interrupt | 102 | 94 | 0000D0h | IFS5[14] | IEC5[14] | IPC23[10:8] |
| Capture/ Compare 4 | _CCP4Interrupt | 103 | 95 | 0000D2h | IFS5[15] | IEC5[15] | IPC23[14:12] |
| Configurable Logic Cell 1 | _CLC1Interrupt | 104 | 96 | 0000D4h | IFS6[0] | IEC6[0] | IPC24[2:0] |
| Configurable Logic Cell 2 | _CLC2Interrupt | 105 | 97 | 0000D6h | IFS6[1] | IEC6[1] | IPC24[6:4] |
| Configurable Logic Cell 3 | _CLC3Interrupt | 106 | 98 | 0000D8h | IFS6[2] | IEC6[2] | IPC24[10:8] |
| Configurable Logic Cell 4 | _CLC4Interrupt | 107 | 99 | 0000DAh | IFS6[3] | IEC6[3] | IPC24[14:12] |
| Reserved | Reserved | 110-113 | 102-105 | 0000E0h-0000E6h | — | — | — |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

.....continued

| Interrupt Description | MPLAB® XC16 ISR Name | Vector # | IRQ # | IVT or AIVT Address Offset | Interrupt Bit Location | | |
|---------------------------|----------------------|----------|-------|----------------------------|------------------------|----------|-------------|
| | | | | | Flag | Enable | Priority |
| FRC Self-Tuning Interrupt | _FSTInterrupt | 114 | 106 | 0000E8h | IFS6[10] | IEC6[10] | IPC26[10:8] |
| Reserved | Reserved | 115 | 107 | 0000EAh | — | — | — |
| Real-Time Clock Timestamp | _RTCCTSInterrupt | 118 | 110 | 0000F0h | IFS6[14] | IEC6[14] | IPC27[10:8] |
| JTAG | _JTAGInterrupt | 125 | 117 | 0000FEh | IFS7[5] | IEC7[5] | IPC29[6:4] |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3 Interrupt Controller Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|----------|----------|--------|----------|--------------|----------|----------|----------|---------------|---------|
| 0x00 ... 0x7F | Reserved | | | | | | | | | |
| 0x80 | INTCON1 | 7:0 | | | | MATHERR | ADDRERR | STKERR | OSCFAIL | |
| | | 15:8 | NSTDIS | | | | | | | |
| 0x82 | INTCON2 | 7:0 | | | | INT4EP | INT3EP | INT2EP | INT1EP | INT0EP |
| | | 15:8 | GIE | DISI | SWTRAP | | | | | AIVTEN |
| 0x84 | INTCON3 | 7:0 | | | | | | | | |
| | | 15:8 | DMT | | | | | | | |
| 0x86 | INTCON4 | 7:0 | | | | | | | ECCDBE | SGHT |
| | | 15:8 | | | | | | | | |
| 0x88 | IFS0 | 7:0 | T2IF | | | DMA0IF | T1IF | CCT2IF | CCT1IF | INT0IF |
| | | 15:8 | NVMIF | DMA1IF | AD1IF | U1TXIF | U1RXIF | SPI1TXIF | SPI1IF | T3IF |
| 0x8A | IFS1 | 7:0 | | CCP5IF | | INT1IF | IOCIF | CMIF | MI2C1IF | SI2C1IF |
| | | 15:8 | U2TXIF | U2RXIF | INT2IF | | | | | |
| 0x8C | IFS2 | 7:0 | | | | | | | SPI2TXIF | SPI2IF |
| | | 15:8 | CCT5IF | | | CCT4IF | CCT3IF | | | |
| 0x8E | IFS3 | 7:0 | | INT4IF | INT3IF | | | MI2C2IF | SI2C2IF | |
| | | 15:8 | CCP1IF | RTCIF | | | SPI2RXIF | SPI1RXIF | | |
| 0x90 | IFS4 | 7:0 | | | | | CRCIF | U2ERIF | U1ERIF | CCP2IF |
| | | 15:8 | | | | | | | | HLVDIF |
| 0x92 | IFS5 | 7:0 | | USB1IF | I2C2BCIF | I2C1BCIF | | | | |
| | | 15:8 | CCP4IF | CCP3IF | | | | | | |
| 0x94 | IFS6 | 7:0 | | | | | CLC4IF | CLC3IF | CLC2IF | CLC1IF |
| | | 15:8 | | RTCCTSIF | | | | FSTIF | | |
| 0x96 | IFS7 | 7:0 | | | JTAGIF | | | | | |
| | | 15:8 | | | | | | | | |
| 0x98 | IEC0 | 7:0 | T2IE | | | DMA0IE | T1IE | CCT2IE | CCT1IE | INT0IE |
| | | 15:8 | NVMIE | DMA1IE | AD1IE | U1TXIE | U1RXIE | SPI1TXIE | SPI1IE | T3IE |
| 0x9A | IEC1 | 7:0 | | CCP5IE | | INT1IE | IOCIE | CMIE | MI2C1IE | SI2C1IE |
| | | 15:8 | U2TXIE | U2RXIE | INT2IE | | | | | |
| 0x9C | IEC2 | 7:0 | | | | | | | SPI2TXIE | SPI2IE |
| | | 15:8 | CCT5IE | | | CCT4IE | CCT3IE | | | |
| 0x9E | IEC3 | 7:0 | | INT4IE | INT3IE | | | MI2C2IE | SI2C2IE | |
| | | 15:8 | CCP1IE | RTCIE | | | SPI2RXIE | SPI1RXIE | | |
| 0xA0 | IEC4 | 7:0 | | | | | CRCIE | U2ERIE | U1ERIE | CCP2IE |
| | | 15:8 | | | | | | | | HLVDIE |
| 0xA2 | IEC5 | 7:0 | | USB1IE | I2C2BCIE | I2C1BCIE | | | | |
| | | 15:8 | CCP4IE | CCP3IE | | | | | | |
| 0xA4 | IEC6 | 7:0 | | | | | CLC4IE | CLC3IE | CLC2IE | CLC1IE |
| | | 15:8 | | RTCCTSIE | | | | FSTIE | | |
| 0xA6 | IEC7 | 7:0 | | | JTAGIE | | | | | |
| | | 15:8 | | | | | | | | |
| 0xA8 | IPC0 | 7:0 | | | CCT1IP[2:0] | | | | INT0IP[2:0] | |
| | | 15:8 | | | T1IP[2:0] | | | | CCT2IP[2:0] | |
| 0xAA | IPC1 | 7:0 | | | | | | | DMA0IP[2:0] | |
| | | 15:8 | | | T2IP[2:0] | | | | | |
| 0xAC | IPC2 | 7:0 | | | SPI1IP[2:0] | | | | T3IP[2:0] | |
| | | 15:8 | | | U1RXIP[2:0] | | | | SPI1TXIP[2:0] | |
| 0xAE | IPC3 | 7:0 | | | AD1IP[2:0] | | | | U1TXIP[2:0] | |
| | | 15:8 | | | NVMIP[2:0] | | | | DMA1IP[2:0] | |
| 0xB0 | IPC4 | 7:0 | | | MI2C1IP[2:0] | | | | SI2C1IP[2:0] | |
| | | 15:8 | | | IOCIP[2:0] | | | | CMIP[2:0] | |
| 0xB2 | IPC5 | 7:0 | | | | | | | INT1IP[2:0] | |
| | | 15:8 | | | | | | | CCP5IP[2:0] | |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|----------|----------|-------------|---------------|-------|---|---|---------------|---|---|
| 0xB4 ... 0xB5 | Reserved | | | | | | | | | |
| 0xB6 | IPC7 | 7:0 | | INT2IP[2:0] | | | | | | |
| | | 15:8 | | U2TXIP[2:0] | | | | U2RXIP[2:0] | | |
| 0xB8 | IPC8 | 7:0 | | SPI2TXIP[2:0] | | | | SPI2IP[2:0] | | |
| | | 15:8 | | | | | | | | |
| 0xBA ... 0xBB | Reserved | | | | | | | | | |
| 0xBC | IPC10 | 7:0 | | | | | | | | |
| | | 15:8 | | CCT3IP[2:0] | | | | | | |
| 0xBE | IPC11 | 7:0 | | | | | | CCT4IP[2:0] | | |
| | | 15:8 | | CCT5IP[2:0] | | | | | | |
| 0xC0 | IPC12 | 7:0 | | SI2C2IP[2:0] | | | | | | |
| | | 15:8 | | | | | | MI2C2IP[2:0] | | |
| 0xC2 | IPC13 | 7:0 | | INT3IP[2:0] | | | | | | |
| | | 15:8 | | | | | | INT4IP[2:0] | | |
| 0xC4 | IPC14 | 7:0 | | | | | | | | |
| | | 15:8 | | SPI2RXIP[2:0] | | | | SPI1RXIP[2:0] | | |
| 0xC6 | IPC15 | 7:0 | | | | | | | | |
| | | 15:8 | | CCP1IP[2:0] | | | | RTCIP[2:0] | | |
| 0xC8 | IPC16 | 7:0 | | U1ERIP[2:0] | | | | CCP2IP[2:0] | | |
| | | 15:8 | | CRCIP[2:0] | | | | U2ERIP[2:0] | | |
| 0xCA ... 0xCB | Reserved | | | | | | | | | |
| 0xCC | IPC18 | 7:0 | | | | | | HLVDIP[2:0] | | |
| | | 15:8 | | | | | | | | |
| 0xCE ... 0xD1 | Reserved | | | | | | | | | |
| 0xD2 | IPC21 | 7:0 | | I2C2BCIP[2:0] | | | | I2C1BCIP[2:0] | | |
| | | 15:8 | | | | | | USB1IP[2:0] | | |
| 0xD4 ... 0xD5 | Reserved | | | | | | | | | |
| 0xD6 | IPC23 | 7:0 | | | | | | | | |
| | | 15:8 | | CCP4IP[2:0] | | | | CCP3IP[2:0] | | |
| 0xD8 | IPC24 | 7:0 | | CLC2IP[2:0] | | | | CLC1IP[2:0] | | |
| | | 15:8 | | CLC4IP[2:0] | | | | CLC3IP[2:0] | | |
| 0xDA ... 0xDB | Reserved | | | | | | | | | |
| 0xDC | IPC26 | 7:0 | | | | | | | | |
| | | 15:8 | | | | | | FSTIP[2:0] | | |
| 0xDE | IPC27 | 7:0 | | | | | | | | |
| | | 15:8 | | | | | | RTCCTSIP[2:0] | | |
| 0xE0 ... 0xE1 | Reserved | | | | | | | | | |
| 0xE2 | IPC29 | 7:0 | | JTAGIP[2:0] | | | | | | |
| | | 15:8 | | | | | | | | |
| 0xE4 | INTTREG | 7:0 | VECNUM[7:0] | | | | | | | |
| | | 15:8 | CPUIRQ | | VHOLD | | | ILR[3:0] | | |

8.3.1 Interrupt Control and Status Registers Overview

Global interrupt control functions are controlled from INTCON1 and INTCON2. INTCON1 contains the Interrupt Nesting Disable (NSTDIS) bit, as well as the control and status flags for the processor trap sources.

The INTCON2 register controls global interrupt generation, the external interrupt request signal behavior and the use of the Alternate Interrupt Vector Table (AIVT).

The INTCON3 register contains the Deadman Timer (DMT) trap bit. The INTCON4 register contains the Software Generated Hard Trap bit (SGHT).

The IFSx registers maintain all of the interrupt request flags. Each source of interrupt has a status bit, which is set by the respective peripherals or external signal and is cleared via software.

The IECx registers maintain all of the interrupt enable bits. These control bits are used to individually enable interrupts from the peripherals or external signals.

The IPCx registers are used to set the Interrupt Priority Level (IPL) for each source of interrupt. Each user interrupt source can be assigned to one of eight priority levels.

The INTTREG register contains the associated interrupt vector number and the new CPU Interrupt Priority Level, which are latched into the Vector Number bits (VECNUM[7:0]) and Interrupt Priority Level bits (ILR[3:0]) fields in the INTTREG register. The new Interrupt Priority Level is the priority of the pending interrupt.

The interrupt sources are assigned to the IFSx, IECx and IPCx registers in the same sequence as they are listed in [Table 8-2](#). For example, the INT0 (External Interrupt 0) is shown as having Vector Number 8 and a natural order priority of 0. Thus, the INT0IF bit is found in IFS0[0], the INT0IE bit in IEC0[0] and the INT0IPx bits in the first position of IPC0 (IPC0[2:0]).

Two of the CPU Control registers contain bits that control interrupt functionality. For more information on these registers, refer to “**CPU with Extended Data Space (EDS)**” (www.microchip.com/DS39732) in the “*dsPIC33/PIC24 Family Reference Manual*”.

The CPU STATUS Register, SR, contains the IPL[2:0] bits (SR[7:5]). These bits indicate the current CPU Interrupt Priority Level. The user software can change the current CPU Interrupt Priority Level by writing to the IPLx bits.

The CORCON register contains the IPL3 bit, which together with the IPL[2:0] bits, also indicates the current CPU Interrupt Priority Level. IPL3 is a read-only bit so that trap events cannot be masked by the user software.

All Interrupt registers are described from [8.3.2. INTCON1](#) through [8.3.44. INTTREG](#) in the following pages.

8.3.2 Interrupt Control Register 1

Name: INTCON1
Offset: 0x80

| | | | | | | | | |
|--------|--------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | NSTDIS | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---------|---------|--------|---------|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | MATHERR | ADDRERR | STKERR | OSCFAIL | |
| Access | | | | R/W | R/W | R/W | R/W | |
| Reset | | | | 0 | 0 | 0 | 0 | |

Bit 15 – NSTDIS Interrupt Nesting Disable bit

| Value | Description |
|-------|-------------------------------|
| 1 | Interrupt nesting is disabled |
| 0 | Interrupt nesting is enabled |

Bit 4 – MATHERR Math Error Status bit

| Value | Description |
|-------|----------------------------------|
| 1 | Math error trap has occurred |
| 0 | Math error trap has not occurred |

Bit 3 – ADDRERR Address Error Trap Status bit

| Value | Description |
|-------|-------------------------------------|
| 1 | Address error trap has occurred |
| 0 | Address error trap has not occurred |

Bit 2 – STKERR Stack Error Trap Status bit

| Value | Description |
|-------|-----------------------------------|
| 1 | Stack error trap has occurred |
| 0 | Stack error trap has not occurred |

Bit 1 – OSCFAIL Oscillator Failure Trap Status bit

| Value | Description |
|-------|--|
| 1 | Oscillator failure trap has occurred |
| 0 | Oscillator failure trap has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.3 Interrupt Control Register 2

Name: INTCON2
Offset: 0x82

| | | | | | | | | |
|--------|-----|------|--------|----|----|----|---|--------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | GIE | DISI | SWTRAP | | | | | AIVTEN |
| Access | R/W | R | R/W | | | | | R/W |
| Reset | 1 | 0 | 0 | | | | | 0 |

| | | | | | | | | |
|--------|---|---|---|--------|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | INT4EP | INT3EP | INT2EP | INT1EP | INT0EP |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – GIE Global Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupts and associated interrupt enable bits are enabled |
| 0 | Interrupts are disabled, but traps are still enabled |

Bit 14 – DISI DISI Instruction Status bit

| Value | Description |
|-------|--------------------------------|
| 1 | DISI instruction is active |
| 0 | DISI instruction is not active |

Bit 13 – SWTRAP Software Trap Status bit

| Value | Description |
|-------|---------------------------|
| 1 | Software trap is enabled |
| 0 | Software trap is disabled |

Bit 8 – AIVTEN Alternate Interrupt Vector Table Enable bit

| Value | Description |
|-------|--|
| 1 | Uses Alternate Interrupt Vector Table (if enabled in Configuration bits) |
| 0 | Uses standard Interrupt Vector Table (default) |

Bit 4 – INT4EP External Interrupt 4 Edge Detect Polarity Select bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt on negative edge |
| 0 | Interrupt on positive edge |

Bit 3 – INT3EP External Interrupt 3 Edge Detect Polarity Select bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt on negative edge |
| 0 | Interrupt on positive edge |

Bit 2 – INT2EP External Interrupt 2 Edge Detect Polarity Select bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt on negative edge |
| 0 | Interrupt on positive edge |

Bit 1 – INT1EP External Interrupt 1 Edge Detect Polarity Select bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt on negative edge |
| 0 | Interrupt on positive edge |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

Bit 0 – INT0EP External Interrupt 0 Edge Detect Polarity Select bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt on negative edge |
| 0 | Interrupt on positive edge |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.4 Interrupt Control Register 3

Name: INTCON3

Offset: 0x84

| | | | | | | | | |
|--------|-----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMT | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bit 15 – DMT Deadman Timer Soft Trap Status bit

| Value | Description |
|-------|-------------------------------------|
| 1 | Deadman Timer trap has occurred |
| 0 | Deadman Timer trap has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.5 Interrupt Control Register 4

Name: INTCON4

Offset: 0x86

Legend: C = Clearable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|--------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | ECCDBE | SGHT |
| Access | | | | | | | R/C | R/C |
| Reset | | | | | | | 0 | 0 |

Bit 1 – ECCDBE ECC Double-Bit Error Trap bit

| Value | Description |
|-------|--|
| 1 | ECC double-bit error trap has occurred |
| 0 | ECC double-bit error trap has not occurred |

Bit 0 – SGHT Software Generated Hard Trap Status bit

| Value | Description |
|-------|---|
| 1 | Software generated hard trap has occurred |
| 0 | Software generated hard trap has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.6 Interrupt Request Flags Register 0

Name: IFS0

Offset: 0x88

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|--------|-------|--------|--------|----------|--------|------|
| | NVMIF | DMA1IF | AD1IF | U1TXIF | U1RXIF | SPI1TXIF | SPI1IF | T3IF |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|---|---|--------|------|--------|--------|--------|
| | T2IF | | | DMA0IF | T1IF | CCT2IF | CCT1IF | INT0IF |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – NVMIF NVM Program/Erase Complete Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 14 – DMA1IF Direct Memory Access 1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 13 – AD1IF A/D Converter 1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 12 – U1TXIF UART1 Transmitter Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 11 – U1RXIF UART1 Receiver Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 10 – SPI1TXIF SPI1 Transfer Done Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 9 – SPI1IF SPI1 General Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 8 – T3IF Timer3 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

Bit 7 – T2IF Timer2 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 4 – DMA0IF Direct Memory Access 0 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 3 – T1IF Timer1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 2 – CCT2IF Capture/Compare/Timer2 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 1 – CCT1IF Capture/Compare/Timer1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 0 – INT0IF External Interrupt 0 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

8.3.7 Interrupt Request Flags Register 1

Name: IFS1
Offset: 0x8A

| | | | | | | | | |
|--------|--------|--------|--------|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | U2TXIF | U2RXIF | INT2IF | | | | | |
| Access | R/W | R/W | R/W | | | | | |
| Reset | 0 | 0 | 0 | | | | | |

| | | | | | | | | |
|--------|---|--------|---|--------|-------|------|---------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | CCP5IF | | INT1IF | IOCIF | CMIF | MI2C1IF | SI2C1IF |
| Access | | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – U2TXIF UART2 Transmitter Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 14 – U2RXIF UART2 Receiver Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 13 – INT2IF External Interrupt 2 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 6 – CCP5IF Capture/Compare 5 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 4 – INT1IF External Interrupt 1 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 3 – IOCIF Interrupt-on-Change Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 2 – CMIF Comparator Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 1 – MI2C1IF I2C1 Host Events Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

Bit 0 – SI2C1IF I2C1 Client Events Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.8 Interrupt Request Flags Register 2

Name: IFS2
Offset: 0x8C

| | | | | | | | | |
|--------|--------|----|----|--------|--------|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CCT5IF | | | CCT4IF | CCT3IF | | | |
| Access | R/W | | | R/W | R/W | | | |
| Reset | 0 | | | 0 | 0 | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|----------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | SPI2TXIF | SPI2IF |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |

Bit 15 – CCT5IF Capture/Compare/Timer5 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 12 – CCT4IF Capture/Compare/Timer4 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 11 – CCT3IF Capture/Compare/Timer3 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 1 – SPI2TXIF SPI2 Transfer Done Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 0 – SPI2IF SPI2 General Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.9 Interrupt Request Flags Register 3

Name: IFS3
Offset: 0x8E

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|-------|----|----|----------|----------|---|---|
| | CCP1IF | RTCIF | | | SPI2RXIF | SPI1RXIF | | |
| Access | R/W | R/W | | | R/W | R/W | | |
| Reset | 0 | 0 | | | 0 | 0 | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|--------|--------|---|---|---------|---------|---|
| | | INT4IF | INT3IF | | | MI2C2IF | SI2C2IF | |
| Access | | R/W | R/W | | | R/W | R/W | |
| Reset | | 0 | 0 | | | 0 | 0 | |

Bit 15 – CCP1IF Capture/Compare 1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 14 – RTCIF Real-Time Clock and Calendar bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 11 – SPI2RXIF SPI2 Receive Done Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 10 – SPI1RXIF SPI1 Receive Done Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 6 – INT4IF External Interrupt 4 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 5 – INT3IF External Interrupt 3 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 2 – MI2C2IF I2C2 Host Events Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 1 – SI2C2IF I2C2 Client Events Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.10 Interrupt Request Flags 4 Register

Name: IFS4

Offset: 0x90

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | HLVDIF |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

| | | | | | | | | |
|--------|---|---|---|---|-------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | CRCIF | U2ERIF | U1ERIF | CCP2IF |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 8 – HLVDIF High/Low-Voltage Detect Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 3 – CRCIF Cyclic Redundancy Check Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – U2ERIF UART2 Error Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – U1ERIF UART1 Error Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 0 – CCP2IF Capture/Compare 2 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

8.3.11 Interrupt Request Flags Register 5

Name: IFS5

Offset: 0x92

| | | | | | | | | |
|--------|--------|--------|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CCP4IF | CCP3IF | | | | | | |
| Access | R/W | R/W | | | | | | |
| Reset | 0 | 0 | | | | | | |

| | | | | | | | | |
|--------|---|--------|----------|----------|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | USB1IF | I2C2BCIF | I2C1BCIF | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 0 | 0 | 0 | | | | |

Bit 15 – CCP4IF Capture/Compare 4 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 14 – CCP3IF Capture/Compare 3 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 6 – USB1IF USB1 OTG Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 5 – I2C2BCIF I2C2 Bus Collision Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 4 – I2C1BCIF I2C1 Bus Collision Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.12 Interrupt Request Flags Register 6

Name: IFS6

Offset: 0x94

| | | | | | | | | |
|--------|----|----------|----|----|----|-------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | RTCCTSIF | | | | FSTIF | | |
| Access | | R/W | | | | R/W | | |
| Reset | | 0 | | | | 0 | | |

| | | | | | | | | |
|--------|---|---|---|---|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | CLC4IF | CLC3IF | CLC2IF | CLC1IF |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 14 – RTCCTSIF Real-Time Clock Timestamp Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 10 – FSTIF FRC Self-Tuning Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 3 – CLC4IF Configurable Logic Cell 4 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – CLC3IF Configurable Logic Cell 3 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – CLC2IF Configurable Logic Cell 2 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 0 – CLC1IF Configurable Logic Cell 1 Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |


PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.13 Interrupt Request Flags Register 7

Name: IFS7

Offset: 0x96

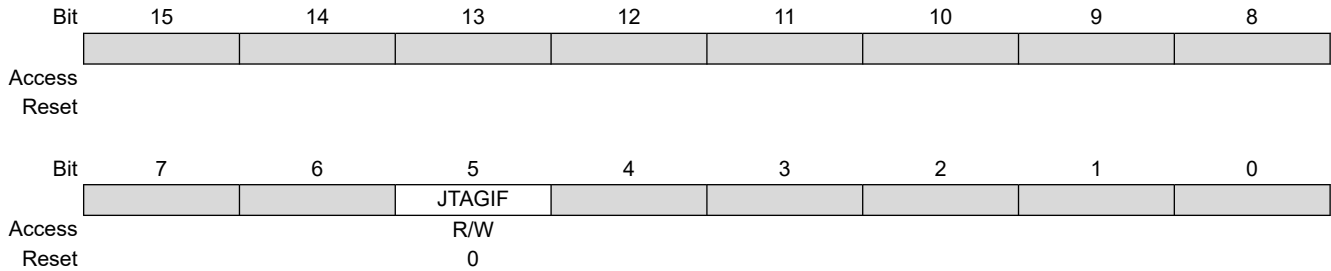

Bit 5 – JTAGIF JTAG Interrupt Enable bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.14 Interrupt Enable Register 0

Name: IEC0

Offset: 0x98

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|--------|-------|--------|--------|----------|--------|------|
| | NVMIE | DMA1IE | AD1IE | U1TXIE | U1RXIE | SPI1TXIE | SPI1IE | T3IE |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|---|---|--------|------|--------|--------|--------|
| | T2IE | | | DMA0IE | T1IE | CCT2IE | CCT1IE | INT0IE |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – NVMIE NVM Program/Erase Complete Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 14 – DMA1IE Direct Memory Access 1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 13 – AD1IE A/D Converter 1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 12 – U1TXIE UART1 Transmitter Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 11 – U1RXIE UART1 Receiver Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 10 – SPI1TXIE SPI1 Transfer Done Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 9 – SPI1IE SPI1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 8 – T3IE Timer3 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

Bit 7 – T2IE Timer2 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 4 – DMA0IE Direct Memory Access 0 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 3 – T1IE Timer1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 2 – CCT2IE Capture/Compare/Timer2 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 1 – CCT1IE Capture/Compare/Timer1 Interrupt bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

Bit 0 – INT0IE External Interrupt 0 bit

| Value | Description |
|-------|----------------------------|
| 1 | Interrupt has occurred |
| 0 | Interrupt has not occurred |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.15 Interrupt Enable Register 1

Name: IEC1
Offset: 0x9A

| | | | | | | | | |
|--------|--------|--------|--------|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | U2TXIE | U2RXIE | INT2IE | | | | | |
| Access | R/W | R/W | R/W | | | | | |
| Reset | 0 | 0 | 0 | | | | | |

| | | | | | | | | |
|--------|---|--------|---|--------|-------|------|---------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | CCP5IE | | INT1IE | IOCIE | CMIE | MI2C1IE | SI2C1IE |
| Access | | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – U2TXIE UART2 Transmitter Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 14 – U2RXIE UART2 Receiver Transmitter Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 13 – INT2IE External Interrupt 2 Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 6 – CCP5IE Capture/Compare 5 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 4 – INT1IE External Interrupt 1 Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 3 – IOCIE Interrupt-on-Change Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – CMIE Comparator Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – MI2C1IE I2C1 Host Events Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

Bit 0 – SI2C1IE I2C1 Client Events Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.16 Interrupt Enable Register 2

Name: IEC2
Offset: 0x9C

| | | | | | | | | |
|--------|--------|----|----|--------|--------|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CCT5IE | | | CCT4IE | CCT3IE | | | |
| Access | R/W | | | R/W | R/W | | | |
| Reset | 0 | | | 0 | 0 | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|----------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | SPI2TXIE | SPI2IE |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |

Bit 15 – CCT5IE Capture/Compare/Timer5 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 12 – CCT4IE Capture/Compare/Timer4 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 11 – CCT3IE Capture/Compare/Timer3 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – SPI2TXIE SPI2 Transfer Done Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 0 – SPI2IE SPI2 General Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.17 Interrupt Enable Register 3

Name: IEC3
Offset: 0x9E

| | | | | | | | | |
|--------|--------|-------|----|----|----------|----------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CCP1IE | RTCIE | | | SPI2RXIE | SPI1RXIE | | |
| Access | R/W | R/W | | | R/W | R/W | | |
| Reset | 0 | 0 | | | 0 | 0 | | |

| | | | | | | | | |
|--------|---|--------|--------|---|---|---------|---------|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | INT4IE | INT3IE | | | MI2C2IE | SI2C2IE | |
| Access | | R/W | R/W | | | R/W | R/W | |
| Reset | | 0 | 0 | | | 0 | 0 | |

Bit 15 – CCP1IE Capture/Compare 1 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 14 – RTCIE Real-Time Clock and Calendar Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 11 – SPI2RXIE SPI2 Receive Done Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 10 – SPI1RXIE SPI1 Receive Done Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 6 – INT4IE External Interrupt 4 Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 5 – INT3IE External Interrupt 4 Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – MI2C2IE I2C2 Host Events Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – SI2C2IE I2C2 Client Events Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.18 Interrupt Enable Register 4

Name: IEC4

Offset: 0xA0

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | HLVDIE |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

| | | | | | | | | |
|--------|---|---|---|---|-------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | CRCIE | U2ERIE | U1ERIE | CCP2IE |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 8 – HLVDIE High/Low-Voltage Detect Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 3 – CRCIE Cyclic Redundancy Check Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – U2ERIE UART2 Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – U1ERIE UART1 Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 0 – CCP2IE Capture/Compare 2 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

8.3.19 Interrupt Enable Register 5

Name: IEC5

Offset: 0xA2

| | | | | | | | | |
|--------|--------|--------|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CCP4IE | CCP3IE | | | | | | |
| Access | R/W | R/W | | | | | | |
| Reset | 0 | 0 | | | | | | |

| | | | | | | | | |
|--------|---|--------|----------|----------|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | USB1IE | I2C2BCIE | I2C1BCIE | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 0 | 0 | 0 | | | | |

Bit 15 – CCP4IE Capture/Compare 4 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 14 – CCP3IE Capture/Compare 4 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 6 – USB1IE USB OTG 1 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 5 – I2C2BCIE I2C2 Bus Collision Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 4 – I2C1BCIE I2C1 Bus Collision Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.20 Interrupt Enable Register 6

Name: IEC6

Offset: 0xA4

| | | | | | | | | |
|--------|----|----------|----|----|----|-------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | RTCCTSIE | | | | FSTIE | | |
| Access | | R/W | | | | R/W | | |
| Reset | | 0 | | | | 0 | | |

| | | | | | | | | |
|--------|---|---|---|---|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | CLC4IE | CLC3IE | CLC2IE | CLC1IE |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 14 – RTCCTSIE Real-Time Clock Timestamp Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 10 – FSTIE FRC Self-Tuning Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 3 – CLC4IE Configurable Logic Cell 4 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – CLC3IE Configurable Logic Cell 3 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 2 – CCT2IE Capture/Compare/Timer2 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 1 – CLC2IE Configurable Logic Cell 2 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

Bit 0 – CLC1IE Configurable Logic Cell 1 Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |


PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.21 Interrupt Enable Register 7

Name: IEC7

Offset: 0xA6

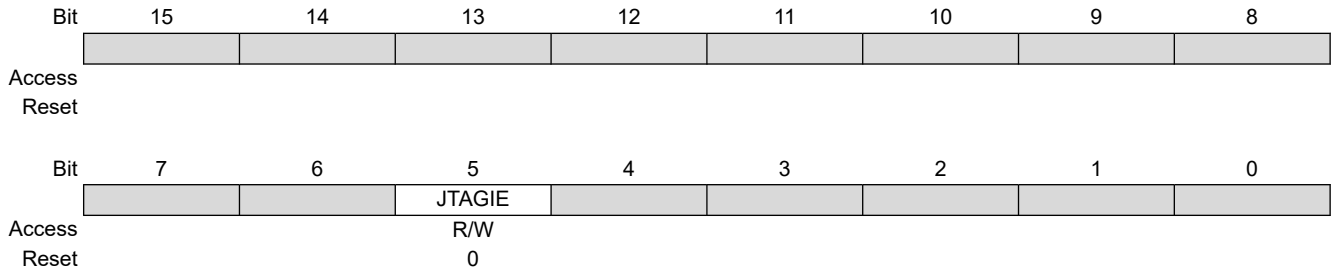

Bit 5 – JTAGIE JTAG Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt enabled |
| 0 | Interrupt not enabled |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.22 Interrupt Priority Register 0

Name: IPC0
Offset: 0xA8

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | T1IP[2:0] | | | | CCT2IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | CCT1IP[2:0] | | | | INT0IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – T1IP[2:0] Timer1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – CCT2IP[2:0] Capture/Compare/Timer2 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – CCT1IP[2:0] Capture/Compare/Timer1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – INT0IP[2:0] External Interrupt 0 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.23 Interrupt Priority Register 1

Name: IPC1
Offset: 0xAA

| | | | | | | | | |
|--------|----|-----------|-----|-----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | T2IP[2:0] | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|-------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DMA0IP[2:0] | | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

Bits 14:12 – T2IP[2:0] Timer2 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – DMA0IP[2:0] Direct Memory Access 0 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.24 Interrupt Priority Register 2

Name: IPC2
Offset: 0xAC

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|---------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | U1RXIP[2:0] | | | | SPI1TXIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

| | | | | | | | | |
|--------|---|-------------|-----|-----|---|-----------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | SPI1IP[2:0] | | | | T3IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – U1RXIP[2:0] UART1 Receiver Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – SPI1TXIP[2:0] SPI1 Transfer Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – SPI1IP[2:0] SPI1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – T3IP[2:0] Timer3 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.25 Interrupt Priority Register 3

Name: IPC3
Offset: 0xAE

| | | | | | | | | |
|--------|----|------------|-----|-----|----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | NVMIP[2:0] | | | | DMA1IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

| | | | | | | | | |
|--------|---|------------|-----|-----|---|-------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | AD1IP[2:0] | | | | U1TXIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – NVMIP[2:0] NVM Program/Erase Complete Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – DMA1IP[2:0] Direct Memory Access 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – AD1IP[2:0] A/D Converter 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – U1TXIP[2:0] UART1 Transmitter Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.26 Interrupt Priority Register 4

Name: IPC4
Offset: 0xB0

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|-----|-----|-----|----|-----------|-----|-----|
| | IOCIP[2:0] | | | | | CMIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|--------------|-----|-----|---|--------------|-----|-----|
| | | MI2C1IP[2:0] | | | | SI2C1IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – IOCIP[2:0] Interrupt-on-Change Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – CMIP[2:0] Comparator Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – MI2C1IP[2:0] I2C1 Host Events Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – SI2C1IP[2:0] I2C1 Client Events Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.27 Interrupt Priority Register 5

Name: IPC5
Offset: 0xB2

| | | | | | | | | |
|--------|----|----|----|----|----|-----|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | CCP5IP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

| | | | | | | | | |
|--------|---|---|---|---|---|-----|-------------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | INT1IP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

Bits 10:8 – CCP5IP[2:0] Capture/Compare 5 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – INT1IP[2:0] External Interrupt 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.28 Interrupt Priority Register 7

Name: IPC7
Offset: 0xB6

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------------|-----|-----|-----|----|-------------|-----|-----|
| | U2TXIP[2:0] | | | | | U2RXIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------------|-----|-----|-----|---|---|---|---|
| | INT2IP[2:0] | | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |

Bits 14:12 – U2TXIP[2:0] UART2 Transmitter Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – U2RXIP[2:0] UART2 Receiver Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – INT2IP[2:0] External Interrupt 2 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.29 Interrupt Priority Register 8

Name: IPC8

Offset: 0xB8

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---------------|-----|-----|---|-------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | SPI2TXIP[2:0] | | | | SPI2IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 6:4 – SPI2TXIP[2:0] SPI2 Transfer Done Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – SPI2IP[2:0] SPI2 General Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.30 Interrupt Priority Register 10

Name: IPC10

Offset: 0xBC

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | CCT3IP[2:0] | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – CCT3IP[2:0] Capture/Compare/Timer3 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.31 Interrupt Priority Register 11

Name: IPC11

Offset: 0xBE

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | CCT5IP[2:0] | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|-------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | CCT4IP[2:0] | | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

Bits 14:12 – CCT5IP[2:0] Capture/Compare/Timer5 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – CCT4IP[2:0] Capture/Compare/Timer4 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.32 Interrupt Priority Register 12

Name: IPC12

Offset: 0xC0

| | | | | | | | | |
|--------|----|----|----|----|----|-----|--------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | MI2C2IP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

| | | | | | | | | |
|--------|---|--------------|-----|-----|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | SI2C2IP[2:0] | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |

Bits 10:8 – MI2C2IP[2:0] I2C2 Host Events Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – SI2C2IP[2:0] I2C2 Client Events Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.33 Interrupt Priority Register 13

Name: IPC13

Offset: 0xC2

| | | | | | | | | |
|--------|----|----|----|----|----|-----|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | INT4IP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

| | | | | | | | | |
|--------|---|-------------|-----|-----|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | INT3IP[2:0] | | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 1 | 0 | 0 | | | | |

Bits 10:8 – INT4IP[2:0] External Interrupt 4 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – INT3IP[2:0] External Interrupt 3 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.34 Interrupt Priority Register 14

Name: IPC14

Offset: 0xC4

| | | | | | | | | |
|--------|----|---------------|-----|-----|----|---------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | SPI2RXIP[2:0] | | | | SPI1RXIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – SPI2RXIP[2:0] SPI2 Receive Done Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – SPI1RXIP[2:0] SPI1 Receive Done Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.35 Interrupt Priority Register 15

Name: IPC15

Offset: 0xC6

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | CCP1IP[2:0] | | | | RTCIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – CCP1IP[2:0] Capture/Compare 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – RTCIP[2:0] Real-Time Clock and Calendar Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.36 Interrupt Priority Register 16

Name: IPC16

Offset: 0xC8

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|------------|-----|-----|----|-------------|-----|-----|
| | | CRCIP[2:0] | | | | U2ERIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|-------------|-----|-----|---|-------------|-----|-----|
| | | U1ERIP[2:0] | | | | CCP2IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – CRCIP[2:0] Cyclic Redundancy Check Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – U2ERIP[2:0] UART2 Error Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – U1ERIP[2:0] UART2 Error Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – CCP2IP[2:0] Capture/Compare 2 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.37 Interrupt Priority Register 18

Name: IPC18

Offset: 0xCC

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|-----|-------------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | HLVDIP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |

Bits 2:0 – HLVDIP[2:0] High/Low-Voltage Detect Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.38 Interrupt Priority Register 21

Name: IPC21

Offset: 0xD2

| | | | | | | | | |
|--------|----|---------------|-----|-----|----|---------------|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | USB1IP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | I2C2BCIP[2:0] | | | | I2C1BCIP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 10:8 – USB1IP[2:0] USB OTG 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – I2C2BCIP[2:0] I2C2 Bus Collision Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – I2C1BCIP[2:0] I2C1 Bus Collision Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.39 Interrupt Priority Register 23

Name: IPC23

Offset: 0xD6

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | CCP4IP[2:0] | | | | CCP3IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – CCP4IP[2:0] Capture/Compare 4 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – CCP3IP[2:0] Capture/Compare 3 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.40 Interrupt Priority Register 24

Name: IPC24

Offset: 0xD8

| | | | | | | | | |
|--------|----|-------------|-----|-----|----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | CLC4IP[2:0] | | | | CLC3IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | CLC2IP[2:0] | | | | CLC1IP[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 1 | 0 | 0 | | 1 | 0 | 0 |

Bits 14:12 – CLC4IP[2:0] Configurable Logic Cell 4 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 10:8 – CLC3IP[2:0] Configurable Logic Cell 3 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 6:4 – CLC2IP[2:0] Configurable Logic Cell 2 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

Bits 2:0 – CLC1IP[2:0] Configurable Logic Cell 1 Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

| Value | Description |
|-------|-------------------------------------|
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.41 Interrupt Priority Register 26

Name: IPC26

Offset: 0xDC

| | | | | | | | | |
|--------|----|----|----|----|----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | FSTIP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 10:8 – FSTIP[2:0] FRC Self-Tuning Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.42 Interrupt Priority Register 27

Name: IPC27

Offset: 0xDE

| | | | | | | | | |
|--------|----|----|----|----|----|-----|---------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | RTCCTSIP[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 1 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 10:8 – RTCCTSIP[2:0] Real-Time Clock and Calendar Timestamp Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |


PIC24FJ64GP205/GU205 Family

Interrupt Controller

8.3.43 Interrupt Priority Register 29

Name: IPC29

Offset: 0xE2

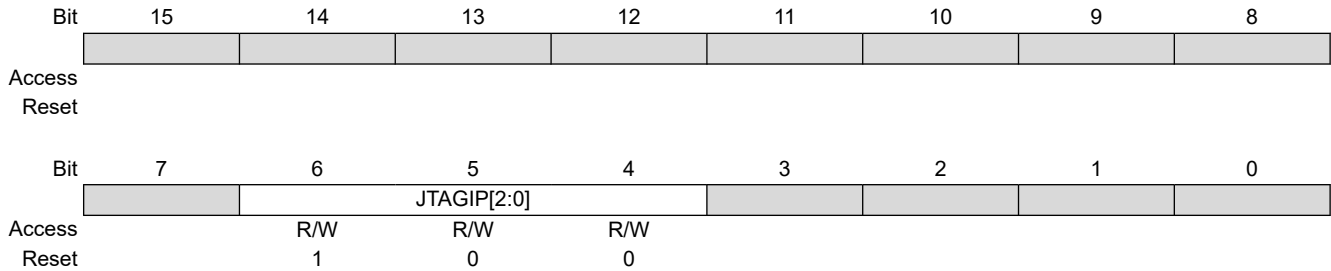

Bits 6:4 – JTAGIP[2:0] JTAG Interrupt Priority bits

| Value | Description |
|-------|--------------------------------------|
| 7 | Interrupt Priority Level 7 (highest) |
| 6 | Interrupt Priority Level 6 |
| 5 | Interrupt Priority Level 5 |
| 4 | Interrupt Priority Level 4 (default) |
| 3 | Interrupt Priority Level 3 |
| 2 | Interrupt Priority Level 2 |
| 1 | Interrupt Priority Level 1 |
| 0 | Interrupt Priority Level 0 (lowest) |

8.3.44 Interrupt Control and Status Register

Name: INTTREG
Offset: 0xE4

Note:

1. See [Table 8-1](#) and [Table 8-2](#) for the vector numbers.

| | | | | | | | | |
|--------|-------------|----|-------|----|----------|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CPUIRQ | | VHOLD | | ILR[3:0] | | | |
| Access | R | | R/W | | R | R | R | R |
| Reset | 0 | | 0 | | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | VECNUM[7:0] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CPUIRQ Interrupt Request from Interrupt Controller to CPU bit

| Value | Description |
|-------|--|
| 1 | An interrupt request has occurred but has not yet been Acknowledged by the CPU; this happens when the CPU priority is higher than the interrupt priority |
| 0 | No interrupt request is unacknowledged |

Bit 13 – VHOLD Vector Number Capture Configuration bit

| Value | Description |
|-------|--|
| 1 | The VECNUMx bits contain the value of the highest priority pending interrupt |
| 0 | The VECNUMx bits contain the value of the last Acknowledged interrupt (i.e., the last interrupt that has occurred with higher priority than the CPU, even if other interrupts are pending) |

Bits 11:8 – ILR[3:0] New CPU Interrupt Priority Level bits

| Value | Description |
|-------|---------------------------------------|
| 1111 | New CPU Interrupt Priority Level bits |
| ... | |
| 0001 | CPU Interrupt Priority Level is 1 |
| 0000 | CPU Interrupt Priority Level is 0 |

Bits 7:0 – VECNUM[7:0] Vector Number of Pending Interrupt bits⁽¹⁾

9. Oscillator Configuration


Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Oscillator**” (www.microchip.com/DS39700) in the “dsPIC33/PIC24 Family Reference Manual”. The information in this data sheet supersedes the information in the FRM.

The oscillator system for the PIC24FJ64GP205/GU205 family devices has the following features:

- An On-Chip PLL Block to Provide a Range of Frequency Options for the System Clock
- Software-Controllable Switching between Various Clock Sources
- Software-Controllable Postscaler for Selective Clocking of CPU for System Power Savings
- A Fail-Safe Clock Monitor (FSCM) that Detects Clock Failure and Permits Safe Application Recovery or Shutdown
- A Separate and Independently Configurable System Clock Output for Synchronizing External Hardware

A simplified diagram of the oscillator system is shown in Figure 9-1.

Figure 9-1. PIC24FJ64GP205/GU205 Family Clock Diagram

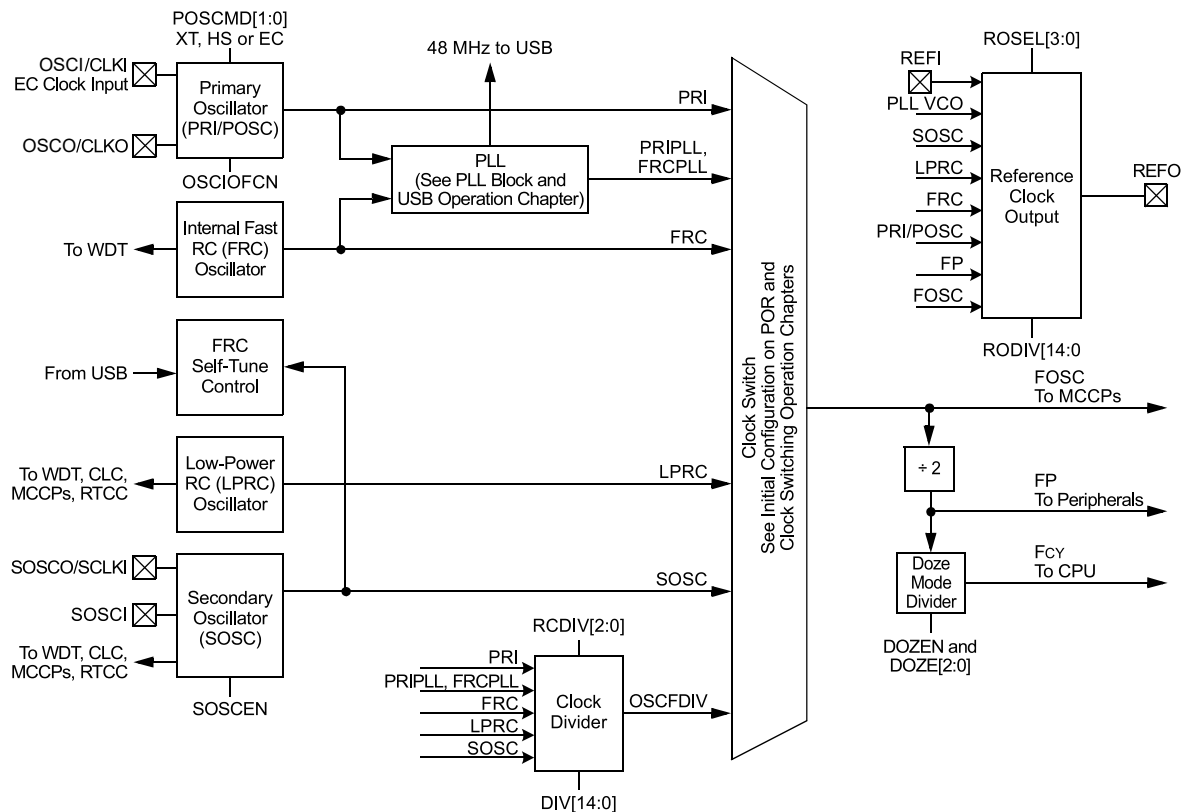

The system clock source can be provided by one of the following sources:

- Primary Oscillator (PRI or POSC) on the OSCI and OSCO pins
- Fast Internal RC (FRC) Oscillator (8 MHz)
- Primary Oscillator with PLL (PRIPLL)
- Fast Internal RC Oscillator with PLL (FRCPLL)
- Secondary Oscillator (SOSC) on the SOSCI and SOSCO pins
- Low-Power Internal RC (LPRC) Oscillator (32 kHz)

The Primary Oscillator and FRC sources have the option of using the internal PLL block, which can generate a 4x, 6x or 8x PLL clock. If the PLL is used, the PLL clocks can then be postscaled, if necessary, and used as the system clock. Refer to [9.8. PLL Block and USB Operation](#) for additional information.

Each clock source (PRIPLL, FRCPLL, PRI, FRC, LPRC and SOSC) can be used as an input to an additional divider, which can then be used to produce a divided clock source for use as a system clock (OSCFDIV).

The selected clock source generates the processor and peripheral clock sources. The processor clock source is divided by two to produce the internal instruction cycle clock, F_{CY} . In this document, the instruction cycle clock is also denoted by $F_{OSC}/2$. The internal instruction cycle clock, $F_{OSC}/2$, can be provided on the OSC0 I/O pin for the EC operating mode of the Primary Oscillator.

9.1 Initial Configuration on POR

The oscillator source (and operating mode) that is used at a device Power-on Reset event is selected using Configuration bit settings. The Oscillator Configuration bit settings are located in the Configuration registers in the program memory (refer to [4.3. Configuration Bits Overview](#) for further details). The Primary Oscillator Configuration bits, POSCMD[1:0] (FOSC[1:0]), and the Oscillator Select Configuration bits, FNOSC[2:0] (FOSCSEL[2:0]), select the oscillator source that is used at a Power-on Reset.

9.2 Clock Switching Operation

With few limitations, applications are free to switch between any of the clock sources under software control and at any time. To limit the possible side effects that could result from this flexibility, PIC24F devices have a safeguard lock built into the switching process.

Note: The Primary Oscillator mode has three different submodes (XT, HS and EC), which are determined by the POSCMD[1:0] Configuration bits. While an application can switch to and from Primary Oscillator mode in software, it cannot switch between the different Primary Oscillator submodes without reprogramming the device.

9.2.1 Enabling Clock Switching

To enable clock switching, the FCKSM[1:0] Configuration bits in FOSC must be programmed to '0x'. (Refer to [27.1. Configuration Bits](#) for further details.) If the FCKSM[1:0] Configuration bits are programmed to '1x', the clock switching function is disabled; this is the default setting.

The NOSC[1:0] control bits (OSCCON[10:8]) do not control the clock selection when clock switching is disabled. However, the COSC[2:0] bits (OSCCON[14:12]) will reflect the clock source selected by the FOSC Configuration bits.

The OSWEN control bit (OSCCON[0]) has no effect when clock switching is disabled; it is held at '0' at all times.

9.2.2 Oscillator Switching Sequence

At a minimum, performing a clock switch requires this basic sequence:

1. If desired, read the COSC[2:0] bits (OSCCON[14:12]) to determine the current oscillator source.
2. Perform the unlock sequence to allow a write to the OSCCON register high byte.
3. Write the appropriate value to the NOSC[2:0] bits (OSCCON[10:8]) for the new oscillator source.
4. Perform the unlock sequence to allow a write to the OSCCON register low byte.
5. Set the OSWEN bit to initiate the oscillator switch.

Once the basic sequence is completed, the system clock hardware responds automatically as follows:

The clock switching hardware compares the COSC[2:0] bits with the new value of the NOSC[2:0] bits. If they are the same, then the clock switch is a redundant operation. In this case, the OSWEN bit is cleared automatically and the clock switch is aborted.

If a valid clock switch has been initiated, the LOCK (OSCCON[5]) and CF (OSCCON[3]) bits are cleared.

The new oscillator is turned on by the hardware if it is not currently running. If a crystal oscillator must be turned on, the hardware will wait until it is ready. If the new source is using the PLL, then the hardware waits until a PLL lock is detected (LOCK = 1).

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

The hardware waits for ten clock cycles from the new clock source and then performs the clock switch.

The hardware clears the OSWEN bit to indicate a successful clock transition. In addition, the NOSC[2:0] bits value is transferred to the COSC[2:0] bits.

The old clock source is turned off at this time, unless this oscillator is needed for other modules.

The processor will continue to execute code throughout the clock switching sequence. Timing-sensitive code should not be executed during this time.

Direct clock switches between any Primary Oscillator mode with PLL and FRC with PLL mode are not permitted. This applies to clock switches in either direction. In these instances, the application must switch to FRC mode as a transitional clock source between the two PLL modes.

A recommended code sequence for a clock switch includes the following:

1. Disable interrupts during the OSCCON register unlock and write sequence.
2. Execute the unlock sequence for the OSCCON high byte by writing 78h and 9Ah to OSCCON[15:8] in two back-to-back instructions.
3. Write the new oscillator source to the NOSCx bits in the instruction immediately following the unlock sequence.
4. Execute the unlock sequence for the OSCCON low byte by writing 46h and 57h to OSCCON[7:0] in two back-to-back instructions.
5. Set the OSWEN bit in the instruction immediately following the unlock sequence.
6. Continue to execute code that is not clock-sensitive (optional).
7. Invoke an appropriate amount of software delay (cycle counting) to allow the selected oscillator and/or PLL to start and stabilize.
8. Check to see if OSWEN is '0'; if it is, the switch was successful. If OSWEN is still set, then check the LOCK bit to determine the cause of the failure.

The assembler code sequence for unlocking the OSCCON register and initiating a clock switch is shown below:

Example 9-1. Unlocking OSCCON and Initiating a Clock Switch

```
; OSCCONH (high byte) Unlock Sequence
mov    #OSCCONH, w1
mov    #0x78, w2
mov    #0x9A, w3
mov.b  w2, [w1]
mov.b  w3, [w1]
; Set new oscillator selection
mov    #<New Clock Option Number>, w0
mov.b  w0, OSCCONH
; OSCCONL (low byte) unlock sequence
mov    #OSCCONL, w1
mov    #0x46, w2
mov    #0x57, w3
mov.b  w2, [w1]
mov.b  w3, [w1]
; Start oscillator switch operation
bset   OSCCON, #0
```

The MPLAB® XC16 C compiler offers “built-in” functions for the clock switching as follows:

Example:

```
__builtin_write_OSCCONH(<New Clock Option Number>);
__builtin_write_OSCCONL(OSCCON | 0x01);    // Start oscillator switch operation
```

9.3 Fail-Safe Clock Monitor (FSCM)

The Fail-Safe Clock Monitor (FSCM) detects clock failures. In case of a clock problem, the Fail-Safe Clock Monitor switches the clock to the on-chip Low-Power RC oscillator (LPRC) and generates the oscillator trap. To enable clock switching, the FCKSM[1:0] Configuration bits in FOSC must be programmed to '00'.

9.4 Internal Fast RC (FRC) Oscillator with Active Clock Tuning

The FRC includes an automatic mechanism to calibrate the frequency during run time. This system uses active clock tuning from a source of known accuracy to maintain the FRC within a very narrow margin of its nominal 8 MHz frequency. The TUN[5:0] bits in the OSCTUN register allow applications to fine-tune the FRC Oscillator over a range of approximately $\pm 1.5\%$.

The self-tune system is controlled by the bits in the upper half of the OSCTUN register. Setting the STEN bit (OSCTUN[15]) enables the self-tuning feature, allowing the hardware to calibrate to a source selected by the STSRC bit (OSCTUN[12]).

When STSRC = 0, the system uses the crystal-controlled SOSC for its calibration source. Regardless of the source, the system uses the TUN[5:0] bits (OSCTUN[5:0]) to change the FRC Oscillator's frequency. Frequency monitoring and adjustment are dynamic, occurring continuously during run time. While the system is active, the TUN[5:0] bits cannot be written to by software.

The self-tune system can generate a hardware interrupt, FSTIF. The interrupt can result from a drift of the FRC from the reference, by greater than 0.2% in either direction, or whenever the frequency deviation is beyond the ability of the TUN[5:0] bits to correct (i.e., greater than 1.5%). The STLOCK and STOR status bits (OSCTUN[11,9]) are used to indicate these conditions.

The STLPOL and STORPOL bits (OSCTUN[10,8]) configure the FSTIF interrupt to occur in the presence or the absence of the conditions. It is the user's responsibility to monitor both the STLOCK and STOR bits to determine the exact cause of the interrupt.

Note: The STLPOL and STORPOL bits should be ignored when the self-tune system is disabled (STEN = 0).

9.5 Primary Oscillator (PRI or POSC)

The PIC24FJ64GP205/GU205 family devices feature a Primary Oscillator (POSC), which is available on the OSC1 and OSC0 pins. This connection enables an external crystal (or ceramic resonator) to provide the clock to the device. The Primary Oscillator provides three modes of operation:

- Medium Speed Oscillator (XT Mode): The XT mode is a Medium Gain, Medium Frequency mode used to work with crystal frequencies of 3.5 MHz to 10 MHz.
- High-Speed Oscillator (HS Mode): The HS mode is a High-Gain, High-Frequency mode used to work with crystal frequencies of 10 MHz to 32 MHz.
- External Clock Source Operation (EC Mode): If the crystal driver is disabled, the EC mode allows the internal oscillator to be bypassed. The device clocks are generated from an external source (0 MHz to up to 64 MHz) and input on the CLKI pin.

9.6 Low-Power RC (LPRC) Oscillator

The PIC24FJ64GP205/GU205 family devices contain one instance of the Low-Power RC (LPRC) Oscillator and provides a nominal clock frequency of 32 kHz. The LPRC Oscillator is the clock source for the Power-up Timer (PWRT), Watchdog Timer (WDT) and Fail-Safe Clock Monitor (FSCM) circuits in the clock subsystem. The LPRC Oscillator is enabled at power-on. The LPRC Oscillator remains enabled under these conditions:

- The FSCM is enabled
- The WDT is enabled
- The LPRC Oscillator is selected as the system clock

If none of these conditions is true, the LPRC Oscillator shuts off after the PWRT expires. The LPRC Oscillator is shut off in Sleep mode.

9.7 Secondary Oscillator (SOSC)

9.7.1 Basic Operation

PIC24FJ64GP205/GU205 family devices do not have to set the SOSCEN bit to use the Secondary Oscillator. Any module requiring the SOSC (such as the RTCC or Timer1) will automatically turn on the SOSC when the clock signal is needed. The SOSC, however, has a long start-up time (as long as one second). To avoid delays for peripheral start-up, the SOSC can be manually started using the SOSCEN bit.

To use the Secondary Oscillator, the SOSCSEL bit (FOSC[3]) must be set to '1'. Programming the SOSCSEL bit to '0' configures the SOSC pins for Digital mode, enabling digital I/O functionality on the pins.

9.7.2 Crystal Selection

The 32.768 kHz crystal used for the SOSC must have the following specifications in order to properly start up and run at the correct frequency when the SOSC is in High-Power mode (default):

- 12.5 pF loading capacitance
- 1.0 pF shunt capacitance
- A typical ESR of 35k-50k; 70k maximum

In addition, the two external crystal loading capacitors should be in the range of 18 pF-22 pF, which will be based on the PC board layout. The capacitors should be C0G, 5% tolerance and rated 25V or greater.

The accuracy and duty cycle of the SOSC can be measured on the REFO pin, and is recommended to be in the range of 40-60% and accurate to ± 0.65 Hz.

9.7.3 Low-Power Operation

The Secondary Oscillator can operate in two distinct levels of power consumption based on device configuration. In Low-Power mode, the oscillator operates in a low drive strength, low-power state. By default, the oscillator uses a higher drive strength, and therefore, requires more power. Low-Power mode is selected by Configuration bit, SOSCHP (FDEVOPT1[3]). The lower drive strength of this mode makes the SOSC more sensitive to noise and requires a longer start-up time. This mode can be used with lower load capacitance crystals (6 pF-9 pF) to reduce Sleep current in the RTCC. When Low-Power mode is used, care must be taken in the design and layout of the SOSC circuit to ensure that the oscillator starts up and oscillates properly. PC board layout issues, stray capacitance and other factors will need to be carefully controlled in order for the crystal to operate.

9.8 PLL Block and USB Operation

The PLL block, shown in [Figure 9-2](#), can generate a wide range of clocks used for both parts with USB functionality (PIC24FJXXGU2XX devices) and non-USB functionality (PIC24FJXXGP2XX/PIC24FJXXXGL4XX devices). All of the PLL modes are available regardless if USB is present or not.

The PLL input clock source (FRC or POSC) is controlled by the COSC[2:0] bits (OSCCON[14:12]) if the PLL output is used as a system clock. When COSC[2:0] = 001 (FRCPLL), the PLL is clocked from FRC. When COSC[2:0] = 011 (PRIPLL), the Primary Oscillator (POSC) is connected to the PLL. The default COSC[2:0] value is selected by the FNOSC[2:0] Configuration bits (FOSCSEL[2:0]). Also, REFO can use the PLL when it is not selected for the system clock (COSC[2:0] bits (OSCCON[14:12]) are not '001' or '011'). In this case, the PLL clock source is selected by the PLLSS Configuration bit (FOSC[4]). If PLLSS is cleared ('0'), the PLL is fed by the FRC Oscillator. If the PLLSS Configuration bit is not programmed ('1'), the PLL is clocked from the Primary Oscillator.

When used in a USB application, the 48 MHz internal clock must be running at all times, which requires the VCO of the PLL to run at 96 MHz. This, in turn, forces the system clock (that drives the CPU and peripherals) to route the 96 MHz through a fixed divide-by-3 block (generating 32 MHz) and then through a selection of four fixed divisors ('postscaler'). The postscaler controlled by the CPDIV[1:0] bits output becomes the system clock.


The input to the PLL must be 4 MHz when used in a USB application, which restricts the frequency input sources to be used with a small set of fixed frequency dividers (see [Figure 9-2](#)). The 96 MHz (USB) PLL prescaler is configured by the PLLMODE[3:0] Configuration bits. For example, if a 12 MHz crystal is used, the PLLMODE[3:0] Configuration bits must be set for divide-by-3 to generate the required 4 MHz. A popular baud rate crystal is 11.0592 MHz, but this value cannot be used for USB operation as there are no divisors available to generate 4 MHz exactly.

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

Non-USB operation allows a wider range of PLL input frequencies. The multiplier ratios can be selected as 4x, 6x or 8x. There is no clock prescaler. The postscaler (CPDIV[1:0]) is available and can be used to reduce the system clock to meet the 32 MHz maximum frequency specification. Note that the minimum input frequency to the PLL is 2 MHz, but the range is from 2 MHz to 8 MHz.

Figure 9-2. PLL Block

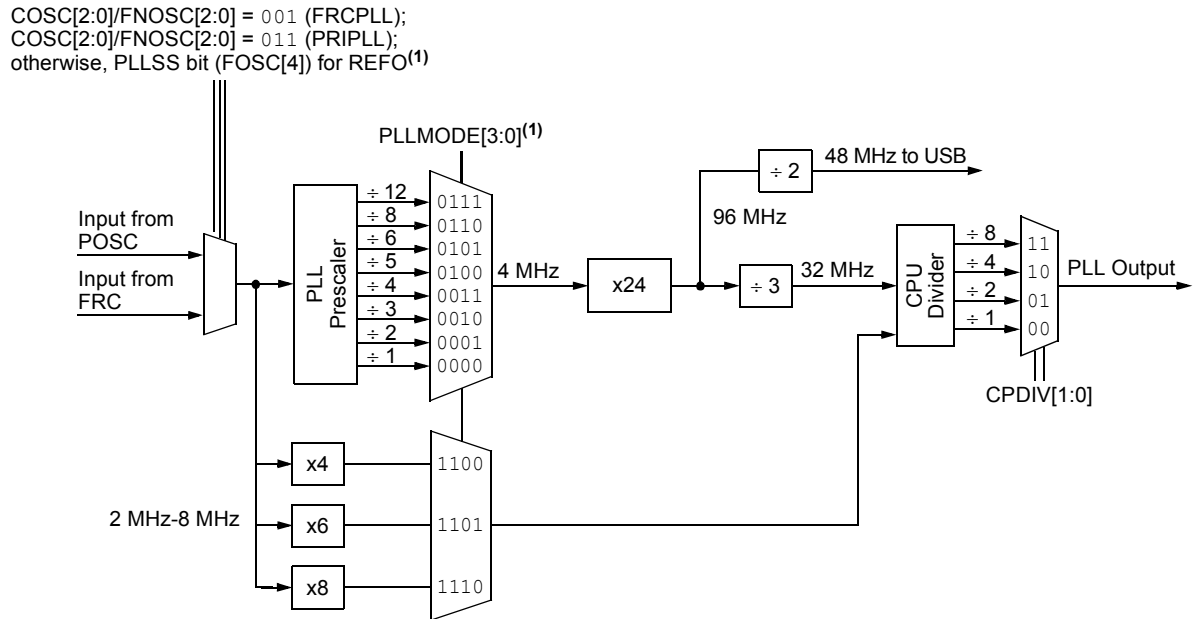

Note:

1. The FNOSC[2:0], PLLMODE[3:0] and PLLSS bits are in the configuration area. See the FOSC and FOSCSEL Configuration registers (27.1.6. FOSC and 27.1.5. FOSCSEL) for more information.

9.9 Reference Clock Output

In addition to the CLKO output ($F_{OSC}/2$), the device clock in the PIC24FJ64GP205/GU205 family devices can also be configured to provide a reference clock output signal to a port pin. This feature is available in all oscillator configurations and allows the user to select a greater range of clock submultiples to drive external devices in the application. CLKO is enabled by Configuration bit, OSCIOFCN, and is independent of the REFO reference clock. REFO is mappable to any I/O pin that has mapped output capability. Refer to Table 11-3 for more information.

This reference clock output is controlled by the REFOCONL and REFOCONH registers. Setting the ROEN bit (REFOCONL[15]) makes the clock signal available on the REFO pin. The RODIV[14:0] bits (REFOCONH[14:0]) enable the selection of different clock divide options. The ROSWEN bit (REFOCONL[9]) indicates that the clock divider has successfully switched. In order to change the divider, the user should wait until this bit has been cleared. Write the updated values to RODIV[14:0], set the ROSWEN bit and then wait until it is cleared before assuming that the REFO clock is valid.

The ROSEL[3:0] bits (REFOCONL[3:0]) determine which clock source is used for the reference clock output. The ROSLP bit (REFOCONL[11]) determines if the reference source is available on REFO when the device is in Sleep mode.

The ROOUT bit enables/disables the reference clock output on the REFO pin.


The ROACTIVE bit (REFOCONL[8]) indicates that the module is active; it can be cleared by disabling the module (setting ROEN to '0'). The user must not change the reference clock source or adjust the divider when the ROACTIVE bit indicates that the module is active. To avoid glitches, the user should not disable the module until the ROACTIVE bit is '1'.

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

The PLLSS Configuration bit (FOSC[4]), when cleared, can be used to generate a REFO clock with the PLL that is independent of the system clock. For example, if the system clock is using FRC at 8 MHz, the PLL can use the FRC as the input and generate 32 MHz (PLL 4x mode) out of REFO.

Figure 9-3. Reference Clock Generator

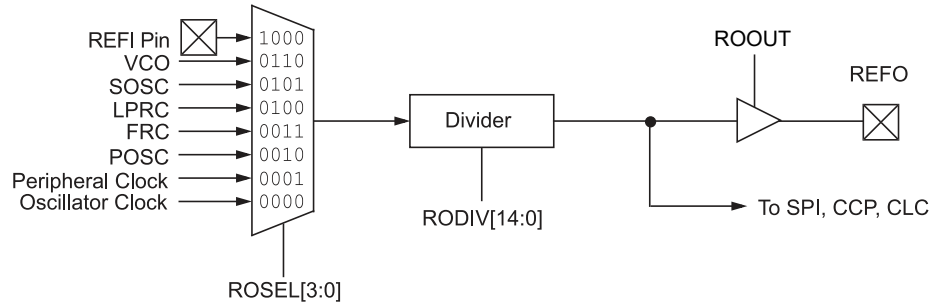

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10 Oscillator Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|------------|----------|-------------|--------|-----------|-------|------------|--------|------------|---------|
| 0x00 ... 0xFF | Reserved | | | | | | | | | |
| 0x0100 | OSCCON(1) | 7:0 | CLKLOCK | IOLOCK | LOCK | | CF | POSCEN | SOSCEN | OSWEN |
| | | 15:8 | | | COSC[2:0] | | | | NOSC[2:0] | |
| 0x0102 | CLKDIV | 7:0 | CPDIV[1:0] | | PLLEN | | | | | |
| | | 15:8 | ROI | | DOZE[2:0] | | DOZEN | | RCDIV[2:0] | |
| 0x0104 ... 0x0105 | Reserved | | | | | | | | | |
| 0x0106 | OSCTUN | 7:0 | | | TUN[5:0] | | | | | |
| | | 15:8 | STEN | | STSIDL | STSRC | STLOCK | STLPOL | STOR | STORPOL |
| 0x0108 ... 0x010B | Reserved | | | | | | | | | |
| 0x010C | OSCDIV | 7:0 | DIV[7:0] | | | | | | | |
| | | 15:8 | DIV[14:8] | | | | | | | |
| 0x010E | OSCFDIV(1) | 7:0 | TRIM[0] | | | | | | | |
| | | 15:8 | TRIM[7:1] | | | | | | | |
| 0x0110 ... 0x0167 | Reserved | | | | | | | | | |
| 0x0168 | REFOCONL | 7:0 | | | | | ROSEL[3:0] | | | |
| | | 15:8 | ROEN | | ROSIDL | ROOUT | ROSLP | | ROSWEN | ROACTIV |
| 0x016A | REFOCONH | 7:0 | RODIV[7:0] | | | | | | | |
| | | 15:8 | RODIV[14:8] | | | | | | | |

9.10.1 Control Registers Overview

The OSCCON register is the main control register for the oscillator. It controls clock source switching and allows the monitoring of clock sources. OSCCON is protected by a write lock to prevent inadvertent clock switches. See [9.2. Clock Switching Operation](#) for more information.

The CLKDIV register controls the features associated with Doze mode, as well as the postscalars for the OSCFDIV Clock mode and the PLL module.

The OSCDIV and OSCFDIV registers provide control for the system oscillator frequency divider.

The REFOCONL and REFOCONH registers control the reference clock feature.

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.2 FRC Oscillator Tuning Register

Name: OSCTUN
Offset: 0x106

Note:

1. Use of either clock tuning reference source has specific application requirements. See [9.4. Internal Fast RC \(FRC\) Oscillator with Active Clock Tuning](#) for details.
2. These bits are read-only when STEN = 1.

| | | | | | | | | |
|--------|------|----|--------|-------|--------|--------|------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | STEN | | STSIDL | STSRC | STLOCK | STLPOL | STOR | STORPOL |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---|---|----------|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | TUN[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – STEN FRC Self-Tune Enable bit

| Value | Description |
|-------|---|
| 1 | FRC self-tuning is enabled; TUNx bits are controlled by hardware |
| 0 | FRC self-tuning is disabled; application may optionally control the TUNx bits |

Bit 13 – STSIDL FRC Self-Tune Stop in Idle bit

| Value | Description |
|-------|--|
| 1 | Self-tuning stops during Idle mode |
| 0 | Self-tuning continues during Idle mode |

Bit 12 – STSRC FRC Self-Tune Reference Clock Source bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | FRC approximately matches the USB host clock tolerance |
| 0 | FRC approximately matches the 32.768 kHz SOSC tolerance |

Bit 11 – STLOCK FRC Self-Tune Lock Status bit

| Value | Description |
|-------|--|
| 1 | FRC accuracy is currently within $\pm 0.2\%$ of the STSRC reference accuracy |
| 0 | FRC accuracy may not be within $\pm 0.2\%$ of the STSRC reference accuracy |

Bit 10 – STLPOL FRC Self-Tune Lock Interrupt Polarity bit

| Value | Description |
|-------|--|
| 1 | A self-tune lock interrupt is generated when STLOCK is '0' |
| 0 | A self-tune lock interrupt is generated when STLOCK is '1' |

Bit 9 – STOR FRC Self-Tune Out of Range Status bit

| Value | Description |
|-------|---|
| 1 | STSRC reference clock error is beyond the range of TUN[5:0]; no tuning is performed |
| 0 | STSRC reference clock is within the tunable range; tuning is performed |

Bit 8 – STORPOL FRC Self-Tune Out of Range Interrupt Polarity bit

| Value | Description |
|-------|--|
| 1 | A self-tune out of range interrupt is generated when STOR is '0' |
| 0 | A self-tune out of range interrupt is generated when STOR is '1' |

Bits 5:0 – TUN[5:0] FRC Oscillator Tuning bits⁽²⁾

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

| Value | Description |
|--------|--|
| 011111 | Maximum frequency deviation |
| 011110 | |
| ... | |
| 000001 | |
| 000000 | Center frequency oscillator is running at factory calibrated frequency |
| 111111 | |
| ... | |
| 100001 | |
| 100000 | Minimum frequency deviation |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.3 Oscillator Control Register

Name: OSCCON⁽¹⁾
Offset: 0x100

Notes:

1. OSCCON is protected by a write lock to prevent inadvertent clock switches. See [9.2. Clock Switching Operation](#) for more information.
2. Reset values for these bits are determined by the FNOSC_x Configuration bits.
3. The state of the IOLOCK bit can only be changed once an unlocking sequence has been executed. In addition, if the IOL1WAY Configuration bit is '1', once the IOLOCK bit is set, it cannot be cleared.
4. This bit also resets to '0' during any valid clock switch or whenever a non-PLL Clock mode is selected.

Legend: y = Value Set from Configuration bits on POR

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|-----------|----|----|----|-----------|-----|-----|
| | | COSC[2:0] | | | | NOSC[2:0] | | |
| Access | | R | R | R | | R/W | R/W | R/W |
| Reset | | 0 | 0 | x | | y | y | y |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---------|--------|------|---|-----|--------|--------|-------|
| | CLKLOCK | IOLOCK | LOCK | | CF | POSCEN | SOSCEN | OSWEN |
| Access | R/W | R/W | R/W | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | 0 | 0 | 0 | 0 |

Bits 14:12 – COSC[2:0] Current Oscillator Selection bits⁽²⁾

| Value | Description |
|-------|---|
| 111 | Oscillator with Frequency Divider (OSCFDIV) |
| 110 | Reserved |
| 101 | Low-Power RC Oscillator (LPRC) |
| 100 | Secondary Oscillator (SOSC) |
| 011 | Primary Oscillator with PLL module (XTPLL, ECPLL) |
| 010 | Primary Oscillator (XT, HS, EC) |
| 001 | Fast RC Oscillator with PLL module (FRCPLL) |
| 000 | Fast RC Oscillator (FRC) |

Bits 10:8 – NOSC[2:0] New Oscillator Selection bits⁽²⁾

| Value | Description |
|-------|---|
| 111 | Oscillator with Frequency Divider (OSCFDIV) |
| 110 | Reserved |
| 101 | Low-Power RC Oscillator (LPRC) |
| 100 | Secondary Oscillator (SOSC) |
| 011 | Primary Oscillator with PLL module (XTPLL, ECPLL) |
| 010 | Primary Oscillator (XT, HS, EC) |
| 001 | Fast RC Oscillator with PLL module (FRCPLL) |
| 000 | Fast RC Oscillator (FRC) |

Bit 7 – CLKLOCK Clock Lock Enable bit

| Value | Description |
|-------|---|
| | If FSCM is Enabled (FCKSM[1:0] = 00): |
| 1 | Clock and PLL selections are locked |
| 0 | Clock and PLL selections are not locked and may be modified by setting the OSWEN bit |
| | If FSCM is Disabled (FCKSM[1:0] = 1x): |
| | Clock and PLL selections are never locked and may be modified by setting the OSWEN bit. |

Bit 6 – IOLOCK I/O Lock Enable bit⁽³⁾

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

| Value | Description |
|-------|------------------------|
| 1 | I/O lock is active |
| 0 | I/O lock is not active |

Bit 5 – LOCK PLL Lock Status bit⁽⁴⁾

| Value | Description |
|-------|---|
| 1 | PLL module is in lock or PLL module start-up timer is satisfied |
| 0 | PLL module is out of lock, PLL start-up timer is running or PLL is disabled |

Bit 3 – CF Clock Fail Detect bit

| Value | Description |
|-------|---------------------------------------|
| 1 | FSCM has detected a clock failure |
| 0 | FSCM has not detected a clock failure |

Bit 2 – POSCEN Primary Oscillator Sleep Enable bit

| Value | Description |
|-------|---|
| 1 | Primary Oscillator continues to operate during Sleep mode |
| 0 | Primary Oscillator is disabled during Sleep mode |

Bit 1 – SOSSEN 32 kHz Secondary Oscillator (SOSC) Enable bit

| Value | Description |
|-------|-------------------------------|
| 1 | Enables Secondary Oscillator |
| 0 | Disables Secondary Oscillator |

Bit 0 – OSWEN Oscillator Switch Enable bit

| Value | Description |
|-------|--|
| 1 | Initiates an oscillator switch to a clock source specified by the NOSC[2:0] bits |
| 0 | Oscillator switch is complete |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.4 Clock Divider Register

Name: CLKDIV
Offset: 0x102

Note:

1. This bit is automatically cleared when the ROI bit is set and an interrupt occurs.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----|-----------|-----|-----|-------|------------|-----|-----|
| | ROI | DOZE[2:0] | | | DOZEN | RCDIV[2:0] | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 1 | 1 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------------|-----|------|---|---|---|---|---|
| | CPDIV[1:0] | | PLEN | | | | | |
| Access | R/W | R/W | R/W | | | | | |
| Reset | 0 | 0 | 1 | | | | | |

Bit 15 – ROI Recover on Interrupt bit

| Value | Description |
|-------|---|
| 1 | Interrupts will clear the DOZEN bit and the processor clock, and the peripheral clock ratio is set to 1:1 |
| 0 | Interrupts have no effect on the DOZEN bit |

Bits 14:12 – DOZE[2:0] CPU Peripheral Clock Ratio Select bits

| Value | Description |
|-------|---------------|
| 111 | 1:128 |
| 110 | 1:64 |
| 101 | 1:32 |
| 100 | 1:16 |
| 011 | 1:8 (default) |
| 010 | 1:4 |
| 001 | 1:2 |
| 000 | 1:1 |

Bit 11 – DOZEN Doze Mode Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | DOZE[2:0] bits specify the CPU peripheral clock ratio |
| 0 | CPU peripheral clock ratio is set to 1:1 |

Bits 10:8 – RCDIV[2:0] System Frequency Divider Clock Source Select bits

| Value | Description |
|-------|---|
| 111 | Reserved; do not use |
| 110 | Reserved |
| 101 | Low-Power RC Oscillator (LPRC) |
| 100 | Secondary Oscillator (SOSC) |
| 011 | Primary Oscillator (XT, HS, EC) with PLL module (XTPLL, HSPLL, ECPLL) |
| 010 | Primary Oscillator (XT, HS, EC) |
| 001 | Fast RC Oscillator (FRC) with PLL module (FRCPLL) |
| 000 | Fast RC Oscillator (FRC) |

Bits 7:6 – CPDIV[1:0] System Clock Select bits (postscaler select from PLL, 32 MHz clock branch)

| Value | Description |
|-------|-----------------------|
| 11 | Divide by 8 |
| 10 | Divide by 4 |
| 01 | Divide by 2 |
| 00 | Divide by 1 (default) |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

Bit 5 – PLEN PLL Enable bit

| Value | Description |
|-------|--|
| 1 | PLL is always active (including Sleep modes) |
| 0 | PLL is only active when a PLL Oscillator mode is selected (OSCCON[14:12] = 001 or 011) |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.5 Oscillator Divisor Register

Name: OSCDIV

Offset: 0x10C

| | | | | | | | | |
|--------|----------|-----------|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | DIV[14:8] | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DIV[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:0 – DIV[14:0] Reference Clock Divider bits

Specifies the 1/2 period of the reference clock in the source clocks

(ex: Period of ref_clk_output = [Reference Source * 2] * DIV[14:0]).

| Value | Description |
|-----------------|---|
| 111111111111111 | Oscillator frequency divided by 65,534 (32,767 * 2) |
| 111111111111110 | Oscillator frequency divided by 65,532 (32,766 * 2) |
| ... | |
| 000000000000011 | Oscillator frequency divided by 6 (3 * 2) |
| 000000000000010 | Oscillator frequency divided by 4 (2 * 2) |
| 000000000000001 | Oscillator frequency divided by 2 (1 * 2) (default) |
| 000000000000000 | Oscillator frequency is unchanged (no divider) |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.6 Oscillator Fractional Divisor Register

Name: OSCFDIV⁽¹⁾

Offset: 0x10E

Note:

1. TRIMx values greater than zero are ONLY valid when DIVx values are greater than zero.

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TRIM[7:1] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---------|---|---|---|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TRIM[0] | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |

Bits 14:7 – TRIM[7:0] Trim bits

Provides fractional additive to the DIV[14:0] bits value for the 1/2 period of the oscillator clock.

| Value | Description |
|----------|---|
| 00000000 | 0/512 (0.0) divisor added to DIVx value |
| 00000001 | 1/512 (0.001953125) divisor added to DIVx value |
| 00000010 | 2/512 (0.00390625) divisor added to DIVx value |
| ... | |
| 10000000 | 256/512 (0.5000) divisor added to DIVx value |
| 11111110 | 510/512 (0.99609375) divisor added to DIVx value |
| 11111111 | 511/512 (0.998046875) divisor added to DIVx value |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.7 Reference Oscillator Control Register Low

Name: REFOCONL

Offset: 0x168

Legend: HC = Hardware Clearable bit

| | | | | | | | | |
|--------|------|----|--------|-------|-------|----|--------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ROEN | | ROSIDL | ROOUT | ROSLP | | ROSWEN | ROACTIV |
| Access | R/W | | R/W | R/W | R/W | | R/W/HC | R |
| Reset | 0 | | 0 | 0 | 0 | | 0 | 0 |

| | | | | | | | | |
|--------|---|---|---|---|------------|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | ROSEL[3:0] | | | |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 15 – ROEN Reference Oscillator Output Enable bit

| Value | Description |
|-------|---|
| 1 | Reference Oscillator module is enabled |
| 0 | Reference Oscillator module is disabled |

Bit 13 – ROSIDL REFO Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – ROOUT Reference Clock Output Enable bit

| Value | Description |
|-------|---|
| 1 | Reference clock is driven out on the REFO pin |
| 0 | Reference clock is not driven out on the REFO pin |

Bit 11 – ROSLP Reference Oscillator Output Stop in Sleep bit

| Value | Description |
|-------|---|
| 1 | Reference Oscillator continues to run in Sleep mode |
| 0 | Reference Oscillator is disabled in Sleep mode |

Bit 9 – ROSWEN Reference Clock RODIVx Switch Enable bit

| Value | Description |
|-------|--|
| 1 | Switches clock divider; clock divider switching is currently in progress |
| 0 | Clock divider switch has been completed |

Bit 8 – ROACTIV Reference Clock Request Status bit

| Value | Description |
|-------|--|
| 1 | Reference clock is active (user should not change the REFO settings) |
| 0 | Reference clock is inactive (user can update the REFO settings) |

Bits 3:0 – ROSEL[3:0] Reference Clock Source Select bits

| Value | Description |
|-----------|--|
| 1111–1001 | Reserved |
| 1000 | REFI pin |
| 0111 | Reserved |
| 0110 | PLL VCO (PLL output before postscaler) |
| 0101 | SOSC |
| 0100 | LPRC |
| 0011 | FRC |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

| Value | Description |
|-------|------------------------------|
| 0010 | POSC |
| 0001 | System clock ($F_{OSC}/2$) |
| 0000 | F_{OSC} |

PIC24FJ64GP205/GU205 Family

Oscillator Configuration

9.10.8 Reference Oscillator Control Register High

Name: REFOCONH
Offset: 0x16A

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| | RODIV[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RODIV[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:0 – RODIV[14:0] Reference Clock Divider bits

Specifies 1/2 period of the reference clock in the source clocks (ex: Period of Output = [Reference Source * 2] * RODIV[14:0]; this equation does not apply to RODIV[14:0] = 0).

| Value | Description |
|-----------------|---|
| 111111111111111 | REFO clock is the base clock frequency divided by 65,534 (32,767 * 2) |
| 111111111111110 | REFO clock is the base clock frequency divided by 65,532 (32,766 * 2) |
| ... | |
| 000000000000011 | REFO clock is the base clock frequency divided by 6 (3 * 2) |
| 000000000000010 | REFO clock is the base clock frequency divided by 4 (2 * 2) |
| 000000000000001 | REFO clock is the base clock frequency divided by 2 (1 * 2) |
| 000000000000000 | REFO clock is the same frequency as the base clock (no divider) |

10. Power-Saving Features

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Power-Saving Features with Deep Sleep**” (www.microchip.com/DS39727) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The PIC24FJ64GP205/GU205 family of devices provides the ability to manage power consumption by selectively managing clocking to the CPU and the peripherals. In general, a lower clock frequency and a reduction in the number of circuits being clocked constitutes lower consumed power. All PIC24F devices manage power consumption in four different ways:

- Clock Frequency
- Instruction-Based Sleep and Idle modes
- Software Controlled Doze mode
- Selective Peripheral Control in Software

Combinations of these methods can be used to selectively tailor an application’s power consumption, while still maintaining critical application features, such as timing-sensitive communications.

10.1 Clock Frequency and Clock Switching

PIC24F devices allow for a wide range of clock frequencies to be selected under application control. If the system clock configuration is not locked, users can choose low-power or high-precision oscillators by simply changing the NOSC[2:0] bits. The process of changing a system clock during operation, as well as limitations to the process, are discussed in more detail in [9. Oscillator Configuration](#).

10.2 Instruction-Based Power-Saving Modes

PIC24F devices have two special power-saving modes that are entered through the execution of a special `PWRSAB` instruction. Sleep mode stops clock operation and halts all code execution; Idle mode halts the CPU and code execution, but allows peripheral modules to continue operation. The assembly syntax of the `PWRSAB` instruction is shown below:

Example:

```
PWRSAB #1 ; places part in Idle
PWRSAB #0 ; places part in Sleep
```

The MPLAB® XC16 C compiler offers “built-in” functions for the power-saving modes as follows:

Example:

```
Idle(); // places part in Idle
Sleep(); // places part in Sleep
```

Sleep and Idle modes can be exited as a result of an enabled interrupt, WDT time-out or a device Reset. When the device exits these modes, it is said to “wake-up”.

10.2.1 Sleep Mode

Sleep mode has these features:

- The system clock source is shut down. If an on-chip oscillator is used, it is turned off.
- The device current consumption will be reduced to a minimum provided that no I/O pin is sourcing current.
- The Fail-Safe Clock Monitor does not operate during Sleep mode since the system clock source is disabled.
- The LPRC clock will continue to run in Sleep mode if the WDT is enabled.
- The WDT, if enabled, is automatically cleared prior to entering Sleep mode.

- Some device features or peripherals may continue to operate in Sleep mode. This includes items, such as the Input Change Notification (ICN) on the I/O ports or peripherals that use an external clock input. Any peripheral that requires the system clock source for its operation will be disabled in Sleep mode.

The device will wake-up from Sleep mode on any of these events:

- On any interrupt source that is individually enabled
- On any form of device Reset
- On a WDT time-out

On wake-up from Sleep, the processor will restart with the same clock source that was active when Sleep mode was entered. The instruction execution begins starting with the instruction following the `PWRSleep` instruction or the first instruction in the ISR.

10.2.2 Idle Mode

Idle mode has these features:

- The CPU will stop executing instructions.
- The WDT is automatically cleared.
- The system clock source remains active. By default, all peripheral modules continue to operate normally from the system clock source, but can also be selectively disabled (see [10.4. Selective Peripheral Module Control](#)).
- If the WDT or FSCM is enabled, the LPRC will also remain active.

The device will wake from Idle mode on any of these events:

- Any interrupt that is individually enabled
- Any device Reset
- A WDT time-out

On wake-up from Idle, the clock is reapplied to the CPU and instruction execution begins immediately, starting with the instruction following the `PWRSleep` instruction or the first instruction in the ISR.

10.2.3 Interrupts Coincident with Power Save Instructions

Any interrupt that coincides with the execution of a `PWRSleep` instruction will be held off until entry into Sleep or Idle mode has completed. The device will then wake-up from Sleep or Idle mode.

10.2.4 Low-Voltage Regulator Mode and Band Gap Power

PIC24FJ64GP205/GU205 family devices incorporate a Low-Power and Low-Voltage Regulator mode. This Regulator mode allows the data RAM and WDT to be maintained in power-saving modes at a low-voltage level, from 0.9V to 1.2V on the V_{CAP} pin.

Low-Voltage Sleep uses less power than standard Sleep mode, but takes more time to recover and begin the code execution. An additional 10-15 μ s (typical) is required to charge V_{CAP} to 1.8V and start to execute instructions when exiting Low-Voltage Sleep.

The VREGS bit (RCON[8]) allows control of the band gap circuit power. It changes the speed to exit from the Sleep modes (Regular and Low-Voltage). When the VREGS bit is cleared (= 0), the band gap is powered in Sleep mode. It increases the current but reduces time to recover from Sleep by $\sim 10 \mu$ s.

The Low-Voltage Regulator mode is only available when Sleep mode is invoked. It is controlled by the `LPREGEN` Configuration bit (FPOR[2]) and in firmware by the RETEN bit (RCON[12]). `LPREGEN` must be programmed (= 0) and the RETEN bit must be set (= 1) for the Low-Voltage Regulator mode.

10.2.5 Summary of Low-Power Sleep Modes

The low-voltage RETEN bit (RCON[12]) and the standby VREGS bit (RCON[8]) allow for four different Sleep modes, which will vary by wake-up time and power consumption. Refer to [Table 10-1](#) for a summary of these modes. Specific information about the current consumption and wake times can be found in [30. Electrical Characteristics](#).

Table 10-1. Low-Power Sleep Modes

| RETEN | VREGS | MODE | Relative Power |
|-------|-------|---------------------------|---------------------|
| 0 | 0 | Standby Sleep | A Few μ A Range |
| 0 | 1 | Sleep | 100 μ A Range |
| 1 | 0 | Low-Voltage Standby Sleep | Less than 1 μ A |
| 1 | 1 | Low-Voltage Sleep | A Few μ A Range |

10.3 Doze Mode

Generally, changing clock speed and invoking one of the power-saving modes are the preferred strategies for reducing power consumption. There may be circumstances, however, where this is not practical. For example, it may be necessary for an application to maintain uninterrupted synchronous communication, even while it is doing nothing else. Reducing system clock speed may introduce communication errors, while using a power-saving mode may stop communications completely.

Doze mode is a simple and effective alternative method to reduce power consumption while the device is still executing code. In this mode, the system clock continues to operate from the same source and at the same speed. Peripheral modules continue to be clocked at the same speed while the CPU clock speed is reduced. Synchronization between the two clock domains is maintained, allowing the peripherals to access the SFRs while the CPU executes code at a slower rate.

Doze mode is enabled by setting the DOZEN bit (CLKDIV[11]). The ratio between peripheral and core clock speed is determined by the DOZE[2:0] bits (CLKDIV[14:12]). There are eight possible configurations, from 1:1 to 1:256, with 1:1 being the default.

It is also possible to use Doze mode to selectively reduce power consumption in event-driven applications. This allows clock-sensitive functions, such as synchronous communications, to continue without interruption while the CPU Idles, waiting for something to invoke an interrupt routine. Enabling the automatic return to full-speed CPU operation on interrupts is enabled by setting the ROI bit (CLKDIV[15]). By default, interrupt events have no effect on Doze mode operation.

Table 10-2. Power-Saving Operating Modes

| Operating Mode | Active Clocks | Active Peripherals | Wake-up Sources |
|-----------------------------|--|---|--|
| Low-Voltage/Retention Sleep | Refer to the respective peripheral for active clock source | Timer, REFO, MCCP, BOR, WDT, HLVD, RTCC, CMP, CV _{REF} , CLC, UART, SPI, I ² C | <ul style="list-style-type: none"> Interrupt source that is individually enabled Any form of device Reset WDT time-out |
| Sleep | Refer to the respective peripheral for active clock source | Timer, REFO, MCCP, BOR, WDT, HLVD, ADC, RTCC, CMP, CV _{REF} , CLC, UART, SPI, I ² C | <ul style="list-style-type: none"> Interrupt source that is individually enabled Any form of device Reset WDT time-out |
| Idle | All clocks | All peripherals | <ul style="list-style-type: none"> Interrupt source that is individually enabled Any form of device Reset WDT time-out |
| Doze | All clocks | All peripherals | <ul style="list-style-type: none"> Interrupt source that is individually enabled (ROI bit (CLKDIV[15]) should be enabled) Any form of device Reset |

10.4 Selective Peripheral Module Control

Idle and Doze modes allow users to substantially reduce power consumption by slowing or stopping the CPU clock. Even so, peripheral modules still remain clocked, and thus, consume power. There may be cases where the application needs what these modes do not provide: the allocation of power resources to CPU processing with minimal power consumption from the peripherals.

PIC24F devices address this requirement by allowing peripheral modules to be selectively disabled, reducing or eliminating their power consumption. This can be done with two control bits:

- The Peripheral Enable bit, generically named, “XXXEN”, located in the module’s main control SFR.
- The Peripheral Module Disable (PMD) bit, generically named, “XXXMD”, located in one of the PMD Control registers.

Both bits have similar functions in enabling or disabling their associated module. Setting the PMD bit for a module disables all clock sources to that module, reducing its power consumption to an absolute minimum. In this state, the control and status registers associated with the peripheral will also be disabled, so writes to those registers will have no effect and read values will be invalid. Many peripheral modules have a corresponding PMD bit.

In contrast, disabling a module by clearing its XXXEN bit disables its functionality, but leaves its registers available to be read and written to. This reduces power consumption, but not by as much as setting the PMD bit does. Most peripheral modules have an enable bit; exceptions include input capture, output compare and RTCC.

To achieve more selective power savings, peripheral modules can also be selectively disabled when the device enters Idle mode. This is done through the control bit of the generic name format, “XXXIDL”. By default, all modules that can operate during Idle mode will do so. Using the disable on Idle feature allows further reduction of power consumption during Idle mode, enhancing power savings for extremely critical power applications.

10.5 Peripheral Module Disable Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|--------|------|--------|---------|--------|--------|--------|--------|
| 0x00 ... 0x0177 | Reserved | | | | | | | | | |
| 0x0178 | PMD1 | 7:0 | I2C1MD | U2MD | U1MD | SPI2MD | SPI1MD | | | AD1MD |
| | | 15:8 | | | T3MD | T2MD | T1MD | | | |
| 0x017A ... 0x017B | Reserved | | | | | | | | | |
| 0x017C | PMD3 | 7:0 | CRCMD | | | | | | I2C2MD | |
| | | 15:8 | | | | | | CMPMD | RTCCMD | |
| 0x017E | PMD4 | 7:0 | | | | | REFOMD | | HLVDMD | USBMD |
| | | 15:8 | | | | | | | | |
| 0x0180 | PMD5 | 7:0 | | | | CCP5MD | CCP4MD | CCP3MD | CCP2MD | CCP1MD |
| | | 15:8 | | | | | | | | |
| 0x0182 ... 0x0183 | Reserved | | | | | | | | | |
| 0x0184 | PMD7 | 7:0 | | | | DMA03MD | | | | |
| | | 15:8 | | | | | | | | |
| 0x0186 | PMD8 | 7:0 | | | CLC4MD | CLC3MD | CLC2MD | CLC1MD | | |
| | | 15:8 | | | | | | | | DMTMD |

10.5.1 Peripheral Module Disable Register 1

Name: PMD1

Offset: 0x178

| | | | | | | | | |
|--------|----|----|------|------|------|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | T3MD | T2MD | T1MD | | | |
| Access | | | R/W | R/W | R/W | | | |
| Reset | | | 0 | 0 | 0 | | | |

| | | | | | | | | |
|--------|--------|------|------|--------|--------|---|---|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2C1MD | U2MD | U1MD | SPI2MD | SPI1MD | | | AD1MD |
| Access | R/W | R/W | R/W | R/W | R/W | | | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | | | 0 |

Bit 13 – T3MD Timer3 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 12 – T2MD Timer2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 11 – T1MD Timer1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 7 – I2C1MD I2C1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 6 – U2MD UART2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 5 – U1MD UART1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 4 – SPI2MD SPI2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 3 – SPI1MD SPI1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 0 – AD1MD A/D Converter Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

10.5.2 Peripheral Module Disable Register 3

Name: PMD3

Offset: 0x17C

| | | | | | | | | |
|--------|----|----|----|----|----|-------|--------|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | CMPMD | RTCCMD | |
| Access | | | | | | R/W | R/W | |
| Reset | | | | | | 0 | 0 | |

| | | | | | | | | |
|--------|-------|---|---|---|---|---|--------|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CRCMD | | | | | | I2C2MD | |
| Access | R/W | | | | | | R/W | |
| Reset | 0 | | | | | | 0 | |

Bit 10 – CMPMD Triple Comparator Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 9 – RTCCMD RTCC Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 7 – CRCMD CRC Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 1 – I2C2MD I2C2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

PIC24FJ64GP205/GU205 Family

Power-Saving Features

10.5.3 Peripheral Module Disable Register 4

Name: PMD4
Offset: 0x17E

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|--------|---|--------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | REFOMD | | HLVDMD | USBMD |
| Access | | | | | R/W | | R/W | R/W |
| Reset | | | | | 0 | | 0 | 0 |

Bit 3 – REFOMD Reference Clock Output Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 1 – HLVDMD High/Low-Voltage Detect Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 0 – USBMD USB Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

10.5.4 Peripheral Module Disable Register 5

Name: PMD5

Offset: 0x180

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|--------|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | CCP5MD | CCP4MD | CCP3MD | CCP2MD | CCP1MD |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – CCP5MD M CCP5 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 3 – CCP4MD M CCP4 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 2 – CCP3MD M CCP3 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 1 – CCP2MD M CCP2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |


Bit 0 – CCP1MD M CCP1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

10.5.5 Peripheral Module Disable Register 7

Name: PMD7

Offset: 0x184

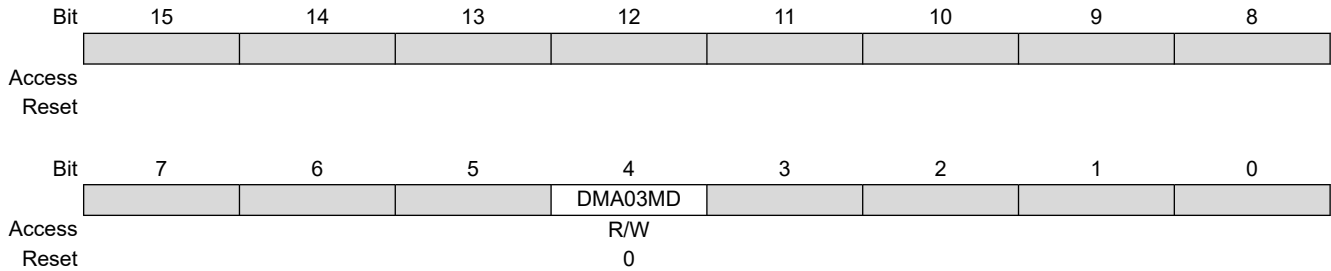

Bit 4 – DMA03MD DMA Controller (Channels 0 through 1) Disable bit

| Value | Description |
|-------|--|
| 1 | Controller is disabled |
| 0 | Controller power and clock sources are enabled |

10.5.6 Peripheral Module Disable Register 8

Name: PMD8

Offset: 0x186

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | DMTMD |
| Access | | | | | | | | R/W |
| Reset | | | | | | | | 0 |

| | | | | | | | | |
|--------|---|---|--------|--------|--------|--------|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | CLC4MD | CLC3MD | CLC2MD | CLC1MD | | |
| Access | | | R/W | R/W | R/W | R/W | | |
| Reset | | | 0 | 0 | 0 | 0 | | |

Bit 8 – DMTMD DMT Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 5 – CLC4MD CLC4 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 4 – CLC3MD CLC3 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 3 – CLC2MD CLC2 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

Bit 2 – CLC1MD CLC1 Module Disable bit

| Value | Description |
|-------|--|
| 1 | Module is disabled |
| 0 | Module power and clock sources are enabled |

11. I/O Ports

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**I/O Ports with Interrupt-on-Change (IOC)**” (www.microchip.com/DS70005186) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

All of the device pins (except V_{DD} , V_{SS} , \overline{MCLR} and $OSCI/CLKI$) are shared between the peripherals and the Parallel I/O (PIO) ports. All I/O input ports feature Schmitt Trigger (ST) inputs for improved noise immunity.

11.1 Parallel I/O (PIO) Ports


A Parallel I/O port that shares a pin with a peripheral is, in general, subservient to the peripheral. The peripheral's output buffer data and control signals are provided to a pair of multiplexers. The multiplexers select whether the peripheral or the associated port has ownership of the output data and control signals of the I/O pin. The logic also prevents “loop through”, in which a port's digital output can drive the input of a peripheral that shares the same pin. [Figure 11-1](#) shows how ports are shared with other peripherals and the associated I/O pin to which they are connected.

When a peripheral is enabled and the peripheral is actively driving an associated pin, the use of the pin as a general purpose output pin is disabled. The I/O pin may be read, but the output driver for the parallel port bit will be disabled. If a peripheral is enabled, but the peripheral is not actively driving a pin, that pin may be driven by a port.

All port pins have three registers directly associated with their operation as digital I/Os and one register associated with their operation as analog inputs. The Data Direction register (TRISx) determines whether the pin is an input or an output. If the data direction bit is a '1', then the pin is an input. All port pins are defined as inputs after a Reset. Reads from the Output Latch register (LATx), read the latch; writes to the latch, write the latch. Reads from the PORTx register, read the port pins; writes to the port pins, write the port pins.

Any bit and its associated data and control registers that are not valid for a particular device will be disabled. That means the corresponding LATx and TRISx registers, and the port pin, will read as zeros.

Figure 11-1. Block Diagram of a Typical Shared Port Structure

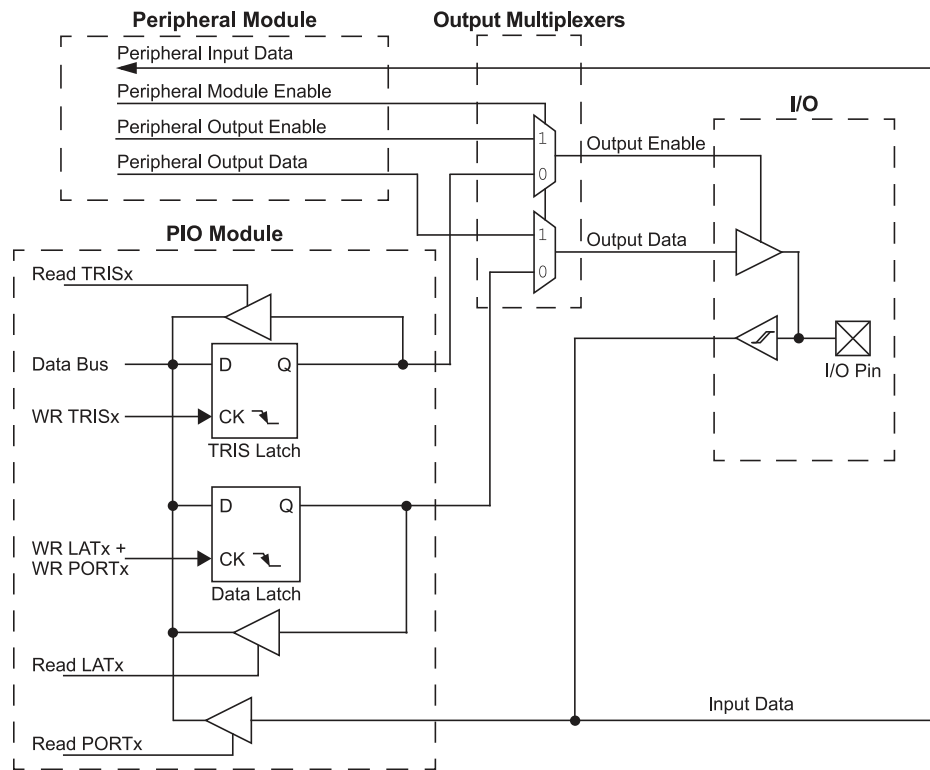

11.1.1 I/O Port Write/Read Timing

One instruction cycle is required between a port direction change or port write operation and a read operation of the same port. Typically, this instruction would be a NOP.

11.1.2 Open-Drain Configuration

In addition to the PORTx, LATx and TRISx registers for data control, each port pin can also be individually configured for either a digital or open-drain output. This is controlled by the Open-Drain Control register, ODCx, associated with each port. Setting any of the bits configures the corresponding pin to act as an open-drain output.

The open-drain feature allows the generation of outputs higher than V_{DD} (e.g., 5V) on any desired digital only pins by using external pull-up resistors. The maximum open-drain voltage allowed is the same as the maximum V_{IH} specification.

Note: D+/D- pins on PIC24FJXXGUXXX devices do not support open drain-configuration.

11.2 Configuring Analog Port Pins

The ANSx and TRISx registers control the operation of the pins with analog function. Each port pin with analog function is associated with one of the ANSx bits, which decide if the pin function should be analog or digital. Refer to [Table 11-1](#) for detailed behavior of the pin for different ANSx and TRISx bit settings.

When reading the PORTx register, all pins configured as analog input channels will read as cleared (a low level).

Table 11-1. Configuring Analog/Digital Function of an I/O Pin

| Pin Function | ANSx Setting | TRISx Setting | Comments |
|----------------|--------------|---------------|--|
| Analog Input | 1 | 1 | |
| Analog Output | 1 | 1 | It is recommended to keep TRISx = 1. |
| Digital Input | 0 | 1 | Firmware must wait at least one instruction cycle after configuring a pin as a digital input before a valid input value can be read. |
| Digital Output | 0 | 0 | Make sure to disable the analog output function on the pin if any is present. |

11.2.1 Analog Input Pins and Voltage Considerations

The voltage tolerance of pins used as device inputs is dependent on the pin's input function. Most input pins are able to handle DC voltages of up to 5.5V, a level typical for digital logic circuits. However, several pins can only tolerate voltages up to V_{DD} . Voltage excursions beyond V_{DD} on these pins should always be avoided.

For more information, refer to [30. Electrical Characteristics](#) for more details.

11.3 Interrupt-on-Change (IOC)

The Interrupt-on-Change function of the I/O ports allows the PIC24FJ64GP205/GU205 family of devices to generate interrupt requests to the processor in response to a Change-of-State (COS) on selected input pins. This feature is capable of detecting input Change-of-States, even in Sleep mode, when the clocks are disabled.

Interrupt-on-Change functionality is enabled on a pin by setting the IOCPx and/or IOCNx register bit for that pin. For example, PORTC has register names, IOCPC and IOCNC, for these functions. Setting a value of '1' in the IOCPx register enables interrupts for low-to-high transitions, while setting a value of '1' in the IOCNx register enables interrupts for high-to-low transitions. Setting a value of '1' in both register bits will enable interrupts for either case (e.g., a pulse on the pin will generate two interrupts). In order for any IOC to be detected, the global IOC Interrupt Enable bit (IEC1[3]) must be set, the IOCON bit (PADCON[15]) set and the associated ISFx flag cleared.

When an interrupt request is generated for a pin, the corresponding status flag (IOCFx register bit) will be set, indicating that a Change-of-State occurred on that pin. The IOCFx register bit will remain set until cleared by writing a zero to it. When any IOCFx flag bit in a given port is set, the corresponding IOCPxF bit in the IOCSTAT register will be set. This flag indicates that a change was detected on one of the bits on the given port. The IOCPxF flag will be cleared when all IOCFx[15:0] bits are cleared.

Multiple individual status flags can be cleared by writing a zero to one or more bits using a Read-Modify-Write (RMW) operation. If another edge is detected on a pin whose status bit is being cleared during the Read-Modify-Write sequence, the associated change flag will still be set at the end of the Read-Modify-Write sequence.

The user should use the instruction sequence (or equivalent) shown in [Example 11-1](#) to clear the Interrupt-on-Change Status registers.

At the end of this sequence, the W0 register will contain a zero for each bit for which the port pin had a change detected. In this way, any indication of a pin changing will not be lost.

Due to the asynchronous and real-time nature of the Interrupt-on-Change, the value read on the port pins may not indicate the state of the port when the change was detected, as a second change can occur during the interval between clearing the flag and reading the port. It is up to the user code to handle this case if it is a possibility in their application. To keep this interval to a minimum, it is recommended that any code modifying the IOCFx registers be run either in the interrupt handler or with interrupts disabled.

Each Interrupt-on-Change (IOC) pin has both a weak pull-up and a weak pull-down connected to it. The pull-ups act as a current source connected to the pin, while the pull-downs act as a current sink connected to the pin. These pull-ups eliminate the need for external resistors when push button or keypad devices are connected.

The pull-ups and pull-downs are separately enabled using the IOCPuX registers (for pull-ups) and the IOCpDx registers (for pull-downs). Each IOC pin has individual control bits for its pull-up and pull-down. Setting a control bit enables the weak pull-up or pull-down for the corresponding pin.

Note: Pull-ups and pull-downs on pins should always be disabled whenever the pin is configured as a digital output.

Example 11-1. IOC Status Read/Clear In Assembly

```
MOV 0xFFFF, W0      ; Initial mask value 0xFFFF -> W0
XOR IOCFx, W0        ; W0 has '1' for each bit set in IOCFx
AND IOCFx             ; IOCFx & W0 -> IOCFx
```

Example 11-2. Port Read/Write in Assembly

```
MOV 0xFF00, W0        ; Configure PORTB[15:8] as inputs
MOV W0, TRISB         ; and PORTB[7:0] as outputs
NOP                   ; Delay 1 cycle
BTSS PORTB, #13       ; Next Instruction
```

Example 11-3. Port Read/Write in 'C'

```
TRISB = 0xFF00;       // Configure PORTB[15:8] as inputs and PORTB[7:0] as
outputs
Nop();                // Delay 1 cycle
If (PORTBbits.RB13){ }; // Next Instruction
```

11.4 Peripheral Pin Select (PPS)

A major challenge in general purpose devices is providing the largest possible set of peripheral features while minimizing the conflict of features on I/O pins. In an application that needs to use more than one peripheral multiplexed on a single pin, inconvenient work arounds in application code, or a complete redesign may be the only option.

The Peripheral Pin Select (PPS) feature provides an alternative to these choices by enabling the user's peripheral set selection and its placement on a wide range of I/O pins. By increasing the pinout options available on a particular device, users can better tailor the microcontroller to their entire application, rather than trimming the application to fit the device.

The Peripheral Pin Select feature operates over a fixed subset of digital I/O pins. Users may independently map the input and/or output of any one of many digital peripherals to any one of these I/O pins. PPS is performed in software and generally does not require the device to be reprogrammed. Hardware safeguards are included that prevent accidental or spurious changes to the peripheral mapping once it has been established.

11.4.1 Available Pins

The number of available pins is dependent on the particular device and its pin count. Pins that support the Peripheral Pin Select feature include the designation, "RPN" or "RPI_n", in their full pin designation, where "n" is the remappable pin number. "RP" is used to designate pins that support both remappable input and output functions, while "RPI" indicates pins that support remappable input functions only.

11.4.2 Available Peripherals and Peripheral Pin Select Function Priority

The peripherals managed by the PPS are all digital only peripherals. These include general serial communications (UART and SPI), general purpose timer clock inputs, timer related peripherals (input capture and output compare) and external interrupt inputs. Also included are the outputs of the comparator module, since these are discrete digital signals.

PPS is not available for these peripherals:

- I²C (input and output)
- Input Change Notifications
- Analog (inputs and outputs)

- INTO

A key difference between pin select and non-pin select peripherals is that pin select peripherals are not associated with a default I/O pin. The peripheral must always be assigned to a specific I/O pin before it can be used. In contrast, non-pin select peripherals are always available on a default pin, assuming that the peripheral is active and not conflicting with another peripheral.

Pin-selectable peripheral outputs (e.g., output compare, UART transmit) will take priority over general purpose digital functions on a pin, such as port I/Os. Specialized digital outputs will take priority over PPS outputs on the same pin. The pin diagrams list peripheral outputs in the order of priority. Refer to them for priority concerns on a particular pin.

Unlike PIC24F devices with fixed peripherals, pin-selectable peripheral inputs will never take ownership of a pin. The pin's output buffer will be controlled by the TRISx setting or by a fixed peripheral on the pin. If the pin is configured in Digital mode, then the PPS input will operate correctly. If an analog function is enabled on the pin, the PPS input will be disabled.

11.4.3 Controlling Peripheral Pin Select

PPS features are controlled through two sets of Special Function Registers (SFRs): one to map peripheral inputs and one to map outputs. Because they are separately controlled, a particular peripheral's input and output (if the peripheral has both) can be placed on any selectable function pin without constraint.

The association of a peripheral to a peripheral-selectable pin is handled in two different ways, depending on if an input or an output is being mapped.

11.4.3.1 Input Mapping

The inputs of the Peripheral Pin Select options are mapped on the basis of the peripheral; that is, a control register associated with a peripheral dictates the pin it will be mapped to. The RPINRx registers are used to configure peripheral input mapping (see [11.5. I/O Port and Peripheral Pin Select Registers](#)).

Each register contains one or two sets of 6-bit fields, with each set associated with one of the pin-selectable peripherals. Programming a given peripheral's bit field with an appropriate 6-bit value maps the RPn/RPIn pin with that value to that peripheral. For any given device, the valid range of values for any of the bit fields corresponds to the maximum number of Peripheral Pin Selections supported by the device.

Table 11-2. Selectable Input Sources (Maps Input to Function)

| Input Name | Function Name | Register | Function Mapping Bits |
|------------------------|---------------|---------------|-----------------------|
| External Interrupt 1 | INT1 | RPINR0[13:8] | INT1R[5:0] |
| External Interrupt 2 | INT2 | RPINR1[5:0] | INT2R[5:0] |
| External Interrupt 3 | INT3 | RPINR1[13:8] | INT3R[5:0] |
| External Interrupt 4 | INT4 | RPINR2[5:0] | INT4R[5:0] |
| Timer2 External Clock | T2CK | RPINR3[5:0] | T2CKR[5:0] |
| Timer3 External Clock | T3CK | RPINR3[13:8] | T3CKR[5:0] |
| MCCP1 Input Capture | ICM1 | RPINR5[5:0] | ICM1R[5:0] |
| MCCP2 Input Capture | ICM2 | RPINR5[13:8] | ICM2R[5:0] |
| MCCP3 Input Capture | ICM3 | RPINR6[5:0] | ICM3R[5:0] |
| MCCP4 Input Capture | ICM4 | RPINR6[13:8] | ICM4R[5:0] |
| Output Compare Fault A | OCFA | RPINR11[5:0] | OCFAR[5:0] |
| Output Compare Fault B | OCFB | RPINR11[13:8] | OCFBR[5:0] |
| MCCP Clock Input A | TCKIA | RPINR12[5:0] | TCKIAR[5:0] |
| MCCP Clock Input B | TCKIB | RPINR12[13:8] | TCKIBR[5:0] |
| Reference Clock Input | REFI | RPINR13[5:0] | REFIR[5:0] |

.....continued

| Input Name | Function Name | Register | Function Mapping Bits |
|------------------------------|---------------|---------------|-----------------------|
| Tamper Detect | TMPRN | RPINR13[13:8] | TMPRNR[5:0] |
| MCCP5 Input Capture | ICM5 | RPINR14[5:0] | ICM5R[5:0] |
| UART1 Receive | U1RX | RPINR18[5:0] | U1RXR[5:0] |
| UART1 Clear-to-Send | U1CTS | RPINR18[13:8] | U1CTSR[5:0] |
| UART2 Receive | U2RX | RPINR19[5:0] | U2RXR[5:0] |
| UART2 Clear-to-Send | U2CTS | RPINR19[13:8] | U2CTSR[5:0] |
| SPI1 Data | SDI1 | RPINR20[5:0] | SDI1R[5:0] |
| SPI1 Clock | SCK1 | RPINR20[13:8] | SCK1R[5:0] |
| SPI1 Slave Select | SS1 | RPINR21[5:0] | SS1R[5:0] |
| SPI2 Data | SDI2 | RPINR22[5:0] | SDI2R[5:0] |
| SPI2 Clock | SCK2 | RPINR22[13:8] | SCK2R[5:0] |
| SPI2 Slave Select | SS2 | RPINR23[5:0] | SS2R[5:0] |
| Generic Timer External Clock | TxCK | RPINR23[13:8] | TXCKR[5:0] |
| CLC Input A | CLCINA | RPINR25[5:0] | CLCINAR[5:0] |
| CLC Input B | CLCINB | RPINR25[13:8] | CLCINBR[5:0] |
| CLC Input C | CLCINC | RPINR26[5:0] | CLCINCR[5:0] |
| CLC Input D | CLCIND | RPINR26[13:8] | CLCINDR[5:0] |

11.4.3.2 Output Mapping

In contrast to inputs, the outputs of the Peripheral Pin Select options are mapped on the basis of the pin. In this case, a control register associated with a particular pin dictates the peripheral output to be mapped. The RPORx registers are used to control output mapping. Each register contains two 6-bit fields, with each field being associated with one RPn pin (see [11.5. I/O Port and Peripheral Pin Select Registers](#)). The value of the bit field corresponds to one of the peripherals and that peripheral's output is mapped to the pin (see [Table 11-3](#)).

Because of the mapping technique, the list of peripherals for output mapping also includes a null value of '000000'. This permits any given pin to remain disconnected from the output of any of the pin-selectable peripherals.

Table 11-3. Selectable Output Sources (Maps Function to Output)

| Output Function Number | Function | Output Name |
|------------------------|---------------------|-----------------------|
| 0 | None (Pin Disabled) | — |
| 1 | C1OUT | Comparator 1 Output |
| 2 | C2OUT | Comparator 2 Output |
| 3 | U1TX | UART1 Transmit |
| 4 | U1RTS | UART1 Request-to-Send |
| 5 | U2TX | UART2 Transmit |
| 6 | U2RTS | UART2 Request-to-Send |
| 7 | SDO1 | SPI1 Data |
| 8 | SCK1 | SPI1 Clock |

.....continued

| Output Function Number | Function | Output Name |
|------------------------|----------|----------------------|
| 9 | FSYNC1 | SPI1 Synchronization |
| 10 | SDO2 | SPI2 Data |
| 11 | SCK2 | SPI2 Clock |
| 12 | FSYNC2 | SPI2 Synchronization |
| 13 | OCM1A | MCCP1 Output A |
| 14 | OCM1B | MCCP1 Output B |
| 15 | OCM2A | MCCP2 Output A |
| 16 | OCM2B | MCCP2 Output B |
| 17 | OCM3A | MCCP3 Output A |
| 18 | OCM3B | MCCP3 Output B |
| 19 | PWRGT | RTCC Power Control |
| 20 | REFO | Reference Clock |
| 21 | CLC1OUT | CLC1 Output |
| 22 | CLC2OUT | CLC2 Output |
| 23 | CLC3OUT | CLC3 Output |
| 24 | CLC4OUT | CLC4 Output |
| 25 | RTCC | RTCC Clock |
| 26 | OCM4A | MCCP4 Output A |
| 27 | OCM4B | MCCP4 Output B |
| 28 | OCM5A | MCCP5 Output A |
| 29 | OCM5B | MCCP5 Output B |
| 30 | C3OUT | Comparator 3 Output |

11.4.3.3 Mapping Limitations

The control schema of the Peripheral Pin Select is extremely flexible. Other than systematic blocks that prevent signal contention caused by two physical pins being configured as the same functional input, or two functional outputs configured as the same pin, there are no hardware enforced lockouts. The flexibility extends to the point of allowing a single input to drive multiple peripherals or a single functional output to drive multiple output pins.

MAPPING EXCEPTIONS FOR FAMILY DEVICES

The differences in available remappable pins are summarized in [Table 11-3](#).

When developing applications that use remappable pins, users should also keep these things in mind:

- For the RPIRx registers, bit combinations corresponding to an unimplemented pin for a particular device are treated as invalid; the corresponding module will not have an input mapped to it.
- For RPORx registers, the bit fields corresponding to an unimplemented pin will also be unimplemented; writing to these fields will have no effect.

11.4.4 Controlling Configuration Changes

Because peripheral remapping can be changed during run time, some restrictions on peripheral remapping are needed to prevent accidental configuration changes. PIC24F devices include three features to prevent alterations to the peripheral map:

- Control register lock sequence
- Continuous state monitoring
- Configuration bit remapping lock

CONTROL REGISTER LOCK

Under normal operation, writes to the RPINRx and RPORx registers are not allowed. Attempted writes will appear to execute normally, but the contents of the registers will remain unchanged. To change these registers, they must be unlocked in hardware. The register lock is controlled by the IOLOCK bit (OSCCON[6]). Setting IOLOCK prevents writes to the control registers; clearing IOLOCK allows writes.

To set or clear IOLOCK, a specific command sequence must be executed:

- Write 46h to OSCCON[7:0].
- Write 57h to OSCCON[7:0].
- Clear (or set) IOLOCK as a single operation.

Unlike the similar sequence with the oscillator's LOCK bit, IOLOCK remains in one state until changed. This allows all of the Peripheral Pin Selects to be configured with a single unlock sequence, followed by an update to all control registers, then locked with a second lock sequence.

CONTINUOUS STATE MONITORING

In addition to being protected from direct writes, the contents of the RPINRx and RPORx registers are constantly monitored in hardware by shadow registers. If an unexpected change in any of the registers occurs (such as cell disturbances caused by ESD or other external events), a Configuration Mismatch Reset will be triggered.

CONFIGURATION BIT REMAPPING LOCK

As an additional level of safety, the device can be configured to prevent more than one write session to the RPINRx and RPORx registers. The IOL1WAY (FOSC[5]) Configuration bit blocks the IOLOCK bit from being cleared after it has been set once. If IOLOCK remains set, the register unlock procedure will not execute and the Peripheral Pin Select Control registers cannot be written to. The only way to clear the bit and re-enable peripheral remapping is to perform a device Reset.

In the default (unprogrammed) state, IOL1WAY is set, restricting users to one write session. Programming IOL1WAY allows users unlimited access (with the proper use of the unlock sequence) to the Peripheral Pin Select registers.

11.4.5 Considerations for Peripheral Pin Selection

The ability to control Peripheral Pin Selection introduces several considerations into application design that could be overlooked. This is particularly true for several common peripherals that are available only as remappable peripherals.

The main consideration is that the Peripheral Pin Selects are not available on default pins in the device's default (Reset) state. Since all RPINRx registers reset to '111111' and all RPORx registers reset to '000000', all Peripheral Pin Select inputs are tied to V_{SS} , and all Peripheral Pin Select outputs are disconnected.

This situation requires the user to initialize the device with the proper peripheral configuration before any other application code is executed. Since the IOLOCK bit resets in the unlocked state, it is not necessary to execute the unlock sequence after the device has come out of Reset. For application safety, however, it is best to set IOLOCK and lock the configuration after writing to the control registers.

Because the unlock sequence is timing-critical, it must be executed as an assembly language routine in the same manner as changes to the oscillator configuration. If the bulk of the application is written in 'C', or another high-level language, the unlock sequence should be performed by writing in-line assembly.

Choosing the configuration requires the review of all Peripheral Pin Selects and their pin assignments, especially those that will not be used in the application. In all cases, unused pin-selectable peripherals should be disabled completely. Unused peripherals should have their inputs assigned to an unused RPN/RPIn pin function. I/O pins with unused RPN functions should be configured with the null peripheral output.

The assignment of a peripheral to a particular pin does not automatically perform any other configuration of the pin's I/O circuitry. In theory, this means adding a pin-selectable output to a pin may mean inadvertently driving an existing peripheral input when the output is driven. Users must be familiar with the behavior of other fixed peripherals that share a remappable pin and know when to enable or disable them. To be safe, fixed digital peripherals that share the same pin should be disabled when not in use.

Along these lines, configuring a remappable pin for a specific peripheral does not automatically turn that feature on. The peripheral must be specifically configured for operation and enabled as if it were tied to a fixed pin. Where this happens in the application code (immediately following a device Reset and peripheral configuration or inside the main application routine) depends on the peripheral and its use in the application.

A final consideration is that Peripheral Pin Select functions neither override analog inputs nor reconfigure pins with analog functions for digital I/Os. If a pin is configured as an analog input on a device Reset, it must be explicitly reconfigured as a digital I/O when used with Peripheral Pin Select.

Example 11-4 shows a configuration for bidirectional communication with flow control using UART1. The following input and output functions are used:

- Input Functions: U1RX, $\overline{U1CTS}$
- Output Functions: U1TX, $\overline{U1RTS}$

Example 11-4. Configuring UART1 Input and Output Functions

```
// Unlock Registers
asm volatile ("MOV #OSCCON, w1 \n"
             "MOV #0x46, w2 \n"
             "MOV #0x57, w3 \n"
             "MOV.b w2, [w1] \n"
             "MOV.b w3, [w1] \n"
             "BCLR OSCCON, #6") ;

// or use XC16 built-in macro:
// __builtin_write_OSCCONL(OSCCON & 0xbf);

// Configure Input Functions (Table 11-2)
// Assign U1RX To Pin RP0
RPINR18bits.U1RXR = 0;

// Assign U1CTS To Pin RP1
RPINR18bits.U1CTSR = 1;

// Configure Output Functions (Table 11-3)
// Assign U1TX To Pin RP2
RPOR1bits.RP2R = 3;

// Assign U1RTS To Pin RP3
RPOR1bits.RP3R = 4;

// Lock Registers
asm volatile ("MOV #OSCCON, w1 \n"
             "MOV #0x46, w2 \n"
             "MOV #0x57, w3 \n"
             "MOV.b w2, [w1] \n"
             "MOV.b w3, [w1] \n"
             "BSET OSCCON, #6") ;

// or use XC16 built-in macro:
// __builtin_write_OSCCONL(OSCCON | 0x40);
```

11.5 I/O Port and Peripheral Pin Select Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|-------------|-------|---|--------------|---|-------|------------|--------|
| 0x00 ... 0x065B | Reserved | | | | | | | | | |
| 0x065C | PADCON | 7:0 | | | | | | | | |
| | | 15:8 | IOCON | | | | | | | |
| 0x065E | IOSTAT | 7:0 | | | | | | IOPCF | IOCPBF | IOCPAF |
| | | 15:8 | | | | | | | | |
| 0x0660 ... 0x0661 | Reserved | | | | | | | | | |
| 0x0662 | TRISA | 7:0 | TRISA7 | | | TRISA[4:0] | | | | |
| | | 15:8 | | | | TRISA[14:8] | | | | |
| 0x0664 | PORTA | 7:0 | RA7 | | | RA[4:0] | | | | |
| | | 15:8 | | | | RA[14:8] | | | | |
| 0x0666 | LATA | 7:0 | LATA7 | | | LATA[4:0] | | | | |
| | | 15:8 | | | | LATA[14:8] | | | | |
| 0x0668 | ODCA | 7:0 | ODCA7 | | | ODCA[4:0] | | | | |
| | | 15:8 | | | | ODCA[14:8] | | | | |
| 0x066A | ANSA | 7:0 | | | | ANSA[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x066C | IOCPA | 7:0 | IOCPA7 | | | IOCPA[4:0] | | | | |
| | | 15:8 | | | | IOCPA[14:8] | | | | |
| 0x066E | IOCNA | 7:0 | IOCNA7 | | | IOCNA[4:0] | | | | |
| | | 15:8 | | | | IOCNA[14:8] | | | | |
| 0x0670 | IOCF A | 7:0 | IOCF A7 | | | IOCF A[4:0] | | | | |
| | | 15:8 | | | | IOCF A[14:8] | | | | |
| 0x0672 | IOCPUA | 7:0 | IOCPUA7 | | | IOCPUA[4:0] | | | | |
| | | 15:8 | | | | IOCPUA[14:8] | | | | |
| 0x0674 | IOCPDA | 7:0 | IOCPDA7 | | | IOCPDA[4:0] | | | | |
| | | 15:8 | | | | IOCPDA[14:8] | | | | |
| 0x0676 | TRISB | 7:0 | | | | TRISB[7:0] | | | | |
| | | 15:8 | | | | TRISB[15:8] | | | | |
| 0x0678 | PORTB | 7:0 | | | | RB[7:0] | | | | |
| | | 15:8 | | | | RB[15:8] | | | | |
| 0x067A | LATB | 7:0 | | | | LATB[7:0] | | | | |
| | | 15:8 | | | | LATB[15:8] | | | | |
| 0x067C | ODCB | 7:0 | | | | ODCB[7:0] | | | | |
| | | 15:8 | | | | ODCB[15:8] | | | | |
| 0x067E | ANSB | 7:0 | | ANSB6 | | ANSB[4:0] | | | | |
| | | 15:8 | ANSB[15:12] | | | | | ANSB9 | | |
| 0x0680 | IOCPB | 7:0 | | | | IOCPB[7:0] | | | | |
| | | 15:8 | | | | IOCPB[15:8] | | | | |
| 0x0682 | IOCNB | 7:0 | | | | IOCNB[7:0] | | | | |
| | | 15:8 | | | | IOCNB[15:8] | | | | |
| 0x0684 | IOCFB | 7:0 | | | | IOCFB[7:0] | | | | |
| | | 15:8 | | | | IOCFB[15:8] | | | | |
| 0x0686 | IOCPUB | 7:0 | | | | IOCPUB[7:0] | | | | |
| | | 15:8 | | | | IOCPUB[15:8] | | | | |
| 0x0688 | IOCPDB | 7:0 | | | | IOCPDB[7:0] | | | | |
| | | 15:8 | | | | IOCPDB[15:8] | | | | |
| 0x068A | TRISC | 7:0 | | | | TRISC[7:0] | | | | |
| | | 15:8 | | | | | | | TRISC[9:8] | |
| 0x068C | PORTC | 7:0 | | | | RC[7:0] | | | | |
| | | 15:8 | | | | | | | RC[9:8] | |
| 0x068E | LATC | 7:0 | | | | LATC[7:0] | | | | |
| | | 15:8 | | | | | | | LATC[9:8] | |

PIC24FJ64GP205/GU205 Family

I/O Ports

|continued | | | | | | | | | | | |
|-------------------------|----------|----------|-------------|---|---|---|-------------|---|---|-------------|--|
| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | |
| 0x0690 | ODCC | 7:0 | ODCC[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | ODCC[9:8] | |
| 0x0692 | ANSC | 7:0 | | | | | | | | ANSC[3:0] | |
| | | 15:8 | | | | | | | | | |
| 0x0694 | IOCPC | 7:0 | IOCPC[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | IOCPC[9:8] | |
| 0x0696 | IOCNC | 7:0 | IOCNC[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | IOCNC[9:8] | |
| 0x0698 | IOFCF | 7:0 | IOFCF[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | IOFCF[9:8] | |
| 0x069A | IOCPUC | 7:0 | IOCPUC[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | IOCPUC[9:8] | |
| 0x069C | IOCPDC | 7:0 | IOCPDC[7:0] | | | | | | | | |
| | | 15:8 | | | | | | | | IOCPDC[9:8] | |
| 0x069E ... 0x078F | Reserved | | | | | | | | | | |
| 0x0790 | RPINR0 | 7:0 | | | | | | | | | |
| | | 15:8 | | | | | INT1R[5:0] | | | | |
| 0x0792 | RPINR1 | 7:0 | | | | | INT2R[5:0] | | | | |
| | | 15:8 | | | | | INT3R[5:0] | | | | |
| 0x0794 | RPINR2 | 7:0 | | | | | INT4R[5:0] | | | | |
| | | 15:8 | | | | | | | | | |
| 0x0796 | RPINR3 | 7:0 | | | | | T2CKR[5:0] | | | | |
| | | 15:8 | | | | | T3CKR[5:0] | | | | |
| 0x0798 ... 0x0799 | Reserved | | | | | | | | | | |
| 0x079A | RPINR5 | 7:0 | | | | | ICM1R[5:0] | | | | |
| | | 15:8 | | | | | ICM2R[5:0] | | | | |
| 0x079C | RPINR6 | 7:0 | | | | | ICM3R[5:0] | | | | |
| | | 15:8 | | | | | ICM4R[5:0] | | | | |
| 0x079E ... 0x07A5 | Reserved | | | | | | | | | | |
| 0x07A6 | RPINR11 | 7:0 | | | | | OCFAR[5:0] | | | | |
| | | 15:8 | | | | | OCFBR[5:0] | | | | |
| 0x07A8 | RPINR12 | 7:0 | | | | | TCKIAR[5:0] | | | | |
| | | 15:8 | | | | | TCKIBR[5:0] | | | | |
| 0x07AA | RPINR13 | 7:0 | | | | | REFIR[5:0] | | | | |
| | | 15:8 | | | | | TMPRNR[5:0] | | | | |
| 0x07AC | RPINR14 | 7:0 | | | | | ICM5R[5:0] | | | | |
| | | 15:8 | | | | | ICM6R[5:0] | | | | |
| 0x07AE ... 0x07B3 | Reserved | | | | | | | | | | |
| 0x07B4 | RPINR18 | 7:0 | | | | | U1RXR[5:0] | | | | |
| | | 15:8 | | | | | U1CTSR[5:0] | | | | |
| 0x07B6 | RPINR19 | 7:0 | | | | | U2RXR[5:0] | | | | |
| | | 15:8 | | | | | U2CTSR[5:0] | | | | |
| 0x07B8 | RPINR20 | 7:0 | | | | | SDI1R[5:0] | | | | |
| | | 15:8 | | | | | SCK1R[5:0] | | | | |
| 0x07BA | RPINR21 | 7:0 | | | | | SS1R[5:0] | | | | |
| | | 15:8 | | | | | | | | | |
| 0x07BC | RPINR22 | 7:0 | | | | | SDI2R[5:0] | | | | |
| | | 15:8 | | | | | SCK2R[5:0] | | | | |
| 0x07BE | RPINR23 | 7:0 | | | | | SS2R[5:0] | | | | |
| | | 15:8 | | | | | TXCKR[5:0] | | | | |

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|---|------------|--------------|---|---|---|---|---|
| 0x07C0 ... 0x07C1 | Reserved | | | | | | | | | |
| 0x07C2 | RPINR25 | 7:0 | | | CLCINAR[5:0] | | | | | |
| | | 15:8 | | | CLCINBR[5:0] | | | | | |
| 0x07C4 | RPINR26 | 7:0 | | | CLCINCR[5:0] | | | | | |
| | | 15:8 | | | CLCINDR[5:0] | | | | | |
| 0x07C6 ... 0x07D3 | Reserved | | | | | | | | | |
| 0x07D4 | RPOR0 | 7:0 | | RP0R[6:0] | | | | | | |
| | | 15:8 | | RP1R[6:0] | | | | | | |
| 0x07D6 | RPOR1 | 7:0 | | RP2R[6:0] | | | | | | |
| | | 15:8 | | RP3R[6:0] | | | | | | |
| 0x07D8 | RPOR2 | 7:0 | | RP4R[6:0] | | | | | | |
| | | 15:8 | | RP5R[6:0] | | | | | | |
| 0x07DA | RPOR3 | 7:0 | | RP6R[6:0] | | | | | | |
| | | 15:8 | | RP7R[6:0] | | | | | | |
| 0x07DC | RPOR4 | 7:0 | | RP8R[6:0] | | | | | | |
| | | 15:8 | | RP9R[6:0] | | | | | | |
| 0x07DE | RPOR5 | 7:0 | | RP10R[6:0] | | | | | | |
| | | 15:8 | | RP11R[6:0] | | | | | | |
| 0x07E0 | RPOR6 | 7:0 | | RP12R[6:0] | | | | | | |
| | | 15:8 | | RP13R[6:0] | | | | | | |
| 0x07E2 | RPOR7 | 7:0 | | RP14R[6:0] | | | | | | |
| | | 15:8 | | RP15R[6:0] | | | | | | |
| 0x07E4 | RPOR8 | 7:0 | | RP16R[6:0] | | | | | | |
| | | 15:8 | | RP17R[6:0] | | | | | | |
| 0x07E6 | RPOR9 | 7:0 | | RP18R[6:0] | | | | | | |
| | | 15:8 | | RP19R[6:0] | | | | | | |
| 0x07E8 | RPOR10 | 7:0 | | RP20R[6:0] | | | | | | |
| | | 15:8 | | RP21R[6:0] | | | | | | |
| 0x07EA | RPOR11 | 7:0 | | RP22R[6:0] | | | | | | |
| | | 15:8 | | RP23R[6:0] | | | | | | |
| 0x07EC | RPOR12 | 7:0 | | RP24R[6:0] | | | | | | |
| | | 15:8 | | RP25R[6:0] | | | | | | |
| 0x07EE | RPOR13 | 7:0 | | RP26R[6:0] | | | | | | |
| | | 15:8 | | RP27R[6:0] | | | | | | |
| 0x07F0 | RPOR14 | 7:0 | | RP28R[6:0] | | | | | | |
| | | 15:8 | | RP29R[6:0] | | | | | | |

11.5.1 Port Configuration Register

Name: PADCON

Offset: 0x65C

| | | | | | | | | |
|--------|-------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCON | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bit 15 – IOCON Interrupt-on-Change Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupt-on-change functionality is enabled |
| 0 | Interrupt-on-change functionality is disabled |

11.5.2 Interrupt-on-Change Status Register

Name: IOCSTAT

Offset: 0x65E

Legend: HS = Hardware Settable bit; HC = Hardware Clearable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---------|---------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | IOPCF | IOCPBF | IOCPAF |
| Access | | | | | | R/HS/HC | R/HS/HC | R/HS/HC |
| Reset | | | | | | 0 | 0 | 0 |

Bit 2 – IOPCF Interrupt-on-Change PORTC Flag bit

| Value | Description |
|-------|---|
| 1 | A change was detected on an IOC-enabled pin on PORTC |
| 0 | No change was detected or the user has cleared all detected changes |

Bit 1 – IOCPBF Interrupt-on-Change PORTB Flag bit

| Value | Description |
|-------|---|
| 1 | A change was detected on an IOC-enabled pin on PORTB |
| 0 | No change was detected or the user has cleared all detected changes |

Bit 0 – IOCPAF Interrupt-on-Change PORTA Flag bit

| Value | Description |
|-------|---|
| 1 | A change was detected on an IOC-enabled pin on PORTA |
| 0 | No change was detected or the user has cleared all detected changes |

11.5.3 Output Enable for PORTA Register

Name: TRISA

Offset: 0x662

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TRISA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 1 | 1 |

| | | | | | | | | |
|--------|--------|---|---|-----|-----|------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TRISA7 | | | | | TRISA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 1 | | | 0 | 0 | 0 | 1 | 1 |

Bits 14:8 – TRISA[14:8] Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

Bit 7 – TRISA7 Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

Bits 4:0 – TRISA[4:0] Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

11.5.4 Input Data for PORTA Register

Name: PORTA

Offset: 0x664

| | | | | | | | | |
|--------|----------|----|----|---------|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RA[14:8] | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RA7 | | | RA[4:0] | | | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RA[14:8] Data Input Value bits

Bit 7 – RA7 Data Input Value bits

Bits 4:0 – RA[4:0] Data Input Value bits

11.5.5 Output Data for PORTA Register

Name: LATA
Offset: 0x666

| | | | | | | | | |
|--------|------------|----|----|-----------|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LATA[14:8] | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LATA7 | | | LATA[4:0] | | | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – LATA[14:8] Output Data bits

Bit 7 – LATA7 Output Data bits

Bits 4:0 – LATA[4:0] Output Data bits

11.5.6 Open-Drain Enable for PORTA Register

Name: ODCA

Offset: 0x668

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ODCA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ODCA7 | | | | | ODCA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – ODCA[14:8] Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |

Bit 7 – ODCA7 Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |

Bits 4:0 – ODCA[4:0] Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |

11.5.7 Analog Select for PORTA Register

Name: ANSA

Offset: 0x66A

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|-----------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | ANSA[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 1 | 1 |

Bits 4:0 – ANSA[4:0] Analog Input Select bits

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

11.5.8 Interrupt-on-Change Positive Edge PORTA Register

Name: IOCPA

Offset: 0x66C

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPA7 | | | | | IOCPA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – IOCPA[14:8] Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

Bit 7 – IOCPA7 Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

Bits 4:0 – IOCPA[4:0] Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

11.5.9 Interrupt-on-Change Negative Edge PORTA Register

Name: IOCNA

Offset: 0x66E

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCNA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCNA7 | | | | | IOCNA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – IOCNA[14:8] Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

Bit 7 – IOCNA7 Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

Bits 4:0 – IOCNA[4:0] Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

11.5.10 Interrupt-on-Change Flag PORTA Register

Name: IOCFA

Offset: 0x670

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCFA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCFA7 | | | | | IOCFA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – IOCFA[14:8] Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

Bit 7 – IOCFA7 Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

Bits 4:0 – IOCFA[4:0] Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

11.5.11 Interrupt-on-Change Pull-up Enable PORTA Register

Name: IOCPUA

Offset: 0x672

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPUA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPUA7 | | | | | IOCPUA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – IOCPUA[14:8] Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

Bit 7 – IOCPUA7 Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

Bits 4:0 – IOCPUA[4:0] Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

11.5.12 Interrupt-on-Change Pull-Down Enable PORTA Register

Name: IOCPDA

Offset: 0x674

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPDA[14:8] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPDA7 | | | | | IOCPDA[4:0] | | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – IOCPDA[14:8] Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

Bit 7 – IOCPDA7 Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

Bits 4:0 – IOCPDA[4:0] Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

11.5.13 Output Enable for PORTB Register

Name: TRISB

Offset: 0x676

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TRISB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TRISB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 15:0 – TRISB[15:0] Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

11.5.14 Input Data for PORTB Register

Name: PORTB

Offset: 0x678

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – RB[15:0] Data Input Value bits

11.5.15 Output Data for PORTB Register

Name: LATB
Offset: 0x67A

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LATB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LATB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – LATB[15:0] Output Data bits

11.5.16 Open-Drain Enable for PORTB Register

Name: ODCB

Offset: 0x67C

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ODCB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ODCB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ODCB[15:0] Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |

11.5.17 Analog Select for PORTB Register

Name: ANSB

Offset: 0x67E

| | | | | | | | | |
|--------|-------------|-------|-----|-----|-----|-----------|-------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ANSB[15:12] | | | | | | ANSB9 | |
| Access | R/W | R/W | R/W | R/W | | | R/W | |
| Reset | 1 | 1 | 1 | 1 | | | 1 | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | ANSB6 | | | | ANSB[4:0] | | |
| Access | | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | | 1 | | 1 | 1 | 1 | 1 | 1 |

Bits 15:12 – ANSB[15:12] Analog Input Select bits

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

Bit 9 – ANSB9 Analog Input Select bit

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

Bit 6 – ANSB6 Analog Input Select bit

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

Bits 4:0 – ANSB[4:0] Analog Input Select bits

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

11.5.18 Interrupt-on-Change Positive Edge PORTB Register

Name: IOCPB

Offset: 0x680

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – IOCPB[15:0] Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

11.5.19 Interrupt-on-Change Negative Edge PORTB Register

Name: IOCNB

Offset: 0x682

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCNB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCNB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – IOCNB[15:0] Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

11.5.20 Interrupt-on-Change Flag PORTB Register

Name: IOCFB

Offset: 0x684

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCFB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCFB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – IOCFB[15:0] Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

11.5.21 Interrupt-on-Change Pull-up Enable PORTB Register

Name: IOCPUB

Offset: 0x686

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPUB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPUB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – IOCPUB[15:0] Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

11.5.22 Interrupt-on-Change Pull-Down Enable PORTB Register

Name: IOCPDB

Offset: 0x688

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | IOCPDB[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPDB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – IOCPDB[15:0] Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

11.5.23 Output Enable for PORTC Register

Name: TRISC

Offset: 0x68A

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | TRISC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 1 | 1 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TRISC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 |

Bits 9:8 – TRISC[9:8] Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

Bits 7:0 – TRISC[7:0] Output Enable bits

| Value | Description |
|-------|-----------------------------|
| 1 | Pin is configured as input |
| 0 | Pin is configured as output |

11.5.24 Input Data for PORTC Register

Name: PORTC

Offset: 0x68C

| | | | | | | | | |
|--------|---------|-----|-----|-----|-----|-----|---------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | RC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – RC[9:8] Data Input Value bits

Bits 7:0 – RC[7:0] Data Input Value bits

11.5.25 Output Data for PORTC Register

Name: LATC
Offset: 0x68E

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | LATC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LATC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – LATC[9:8] Output Data bits

Bits 7:0 – LATC[7:0] Output Data bits

11.5.26 Open-Drain Enable for PORTC Register

Name: ODCC

Offset: 0x690

| | | | | | | | | |
|--------|----|----|----|----|----|----|-----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | ODCC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ODCC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – ODCC[9:8] Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |


Bits 7:0 – ODCC[7:0] Open-Drain Enable bits

| Value | Description |
|-------|-----------------------------------|
| 1 | Open-drain is enabled on the pin |
| 0 | Open-drain is disabled on the pin |

11.5.27 Analog Select for PORTC Register

Name: ANSC

Offset: 0x692

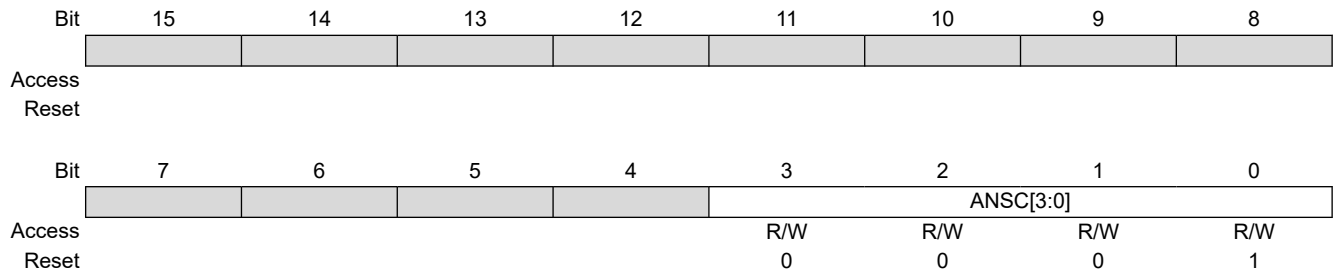

Bits 3:0 – ANSC[3:0] Analog Input Select bit

| Value | Description |
|-------|--|
| 1 | Analog input is enabled and digital input is disabled on the pin |
| 0 | Analog input is disabled and digital input is enabled on the pin |

11.5.28 Interrupt-on-Change Positive Edge PORTC Register

Name: IOCPC

Offset: 0x694

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | IOCPC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – IOCPC[9:8] Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

Bits 7:0 – IOCPC[7:0] Interrupt-on-Change Positive Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a positive going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a positive going edge |

11.5.29 Interrupt-on-Change Negative Edge PORTC Register

Name: IOCNC

Offset: 0x696

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | IOCNC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCNC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – IOCNC[9:8] Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

Bits 7:0 – IOCNC[7:0] Interrupt-on-Change Negative Edge Enable bits

| Value | Description |
|-------|--|
| 1 | Interrupt-on-change is enabled on the pin for a negative going edge; the associated status bit and interrupt flag will be set upon detecting an edge |
| 0 | Interrupt-on-change is disabled on the pin for a negative going edge |

11.5.30 Interrupt-on-Change Flag PORTC Register

Name: IOCFC

Offset: 0x698

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | IOCFC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCFC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – IOCFC[9:8] Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

Bits 7:0 – IOCFC[7:0] Interrupt-on-Change Flag bits

| Value | Description |
|-------|--|
| 1 | An enabled change was detected on the associated pin |
| 0 | No change was detected or the user cleared the detected change |

11.5.31 Interrupt-on-Change Pull-up Enable PORTC Register

Name: IOCPUC

Offset: 0x69A

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | IOCPUC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPUC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – IOCPUC[9:8] Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

Bits 7:0 – IOCPUC[7:0] Interrupt-on-Change Pull-up Enable bits

| Value | Description |
|-------|---------------------|
| 1 | Pull-up is enabled |
| 0 | Pull-up is disabled |

11.5.32 Interrupt-on-Change Pull-Down Enable PORTC Register

Name: IOCPDC

Offset: 0x69C

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | IOCPDC[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IOCPDC[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:8 – IOCPDC[9:8] Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

Bits 7:0 – IOCPDC[7:0] Interrupt-on-Change Pull-Down Enable bits

| Value | Description |
|-------|-----------------------|
| 1 | Pull-down is enabled |
| 0 | Pull-down is disabled |

11.5.33 Peripheral Pin Select Registers

Note: Input and Output register values can only be changed if IOLOCK (OSCCON[6]) = 0. See [11.4.4. Controlling Configuration Changes](#) for a specific command sequence.

11.5.34 Peripheral Pin Select Input Register 0

Name: RPINR0

Offset: 0x790

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | INT1R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 13:8 – INT1R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.35 Peripheral Pin Select Input Register 1

Name: RPINR1

Offset: 0x792

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | INT3R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | INT2R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |


Bits 13:8 – INT3R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – INT2R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.36 Peripheral Pin Select Input Register 2

Name: RPINR2

Offset: 0x794

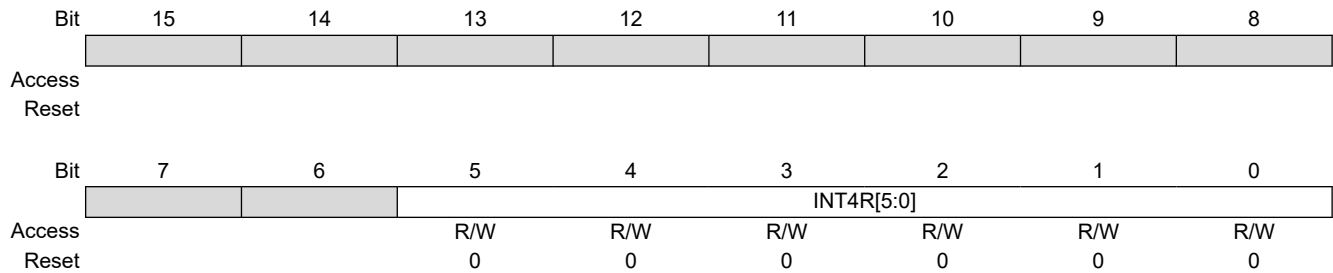

Bits 5:0 – INT4R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.37 Peripheral Pin Select Input Register 3

Name: RPINR3

Offset: 0x796

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | T3CKR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | T2CKR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – T3CKR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – T2CKR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.38 Peripheral Pin Select Input Register 5

Name: RPINR5

Offset: 0x79A

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | ICM2R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | ICM1R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – ICM2R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – ICM1R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.39 Peripheral Pin Select Input Register 6

Name: RPINR6

Offset: 0x79C

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | ICM4R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | ICM3R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – ICM4R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – ICM3R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.40 Peripheral Pin Select Input Register 11

Name: RPINR11

Offset: 0x7A6

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | OCFBR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | OCFAR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – OCFBR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – OCFAR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.41 Peripheral Pin Select Input Register 12

Name: RPINR12

Offset: 0x7A8

| | | | | | | | | |
|--------|----|----|-------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | TCKIBR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | TCKIAR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – TCKIBR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – TCKIAR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.42 Peripheral Pin Select Input Register 13

Name: RPINR13

Offset: 0x7AA

| | | | | | | | | |
|--------|----|----|-------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | TMPRNR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | REFIR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – TMPRNR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – REFIR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.43 Peripheral Pin Select Input Register 14

Name: RPINR14

Offset: 0x7AC

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | ICM6R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | ICM5R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – ICM6R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – ICM5R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.44 Peripheral Pin Select Input Register 18

Name: RPINR18

Offset: 0x7B4

| | | | | | | | | |
|--------|----|----|-------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | U1CTSR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | U1RXR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – U1CTSR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – U1RXR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.45 Peripheral Pin Select Input Register 19

Name: RPINR19

Offset: 0x7B6

| | | | | | | | | |
|--------|----|----|-------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | U2CTSR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | U2RXR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – U2CTSR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – U2RXR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.46 Peripheral Pin Select Input Register 20

Name: RPINR20

Offset: 0x7B8

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | SCK1R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | SDI1R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |


Bits 13:8 – SCK1R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – SDI1R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.47 Peripheral Pin Select Input Register 21

Name: RPINR21

Offset: 0x7BA

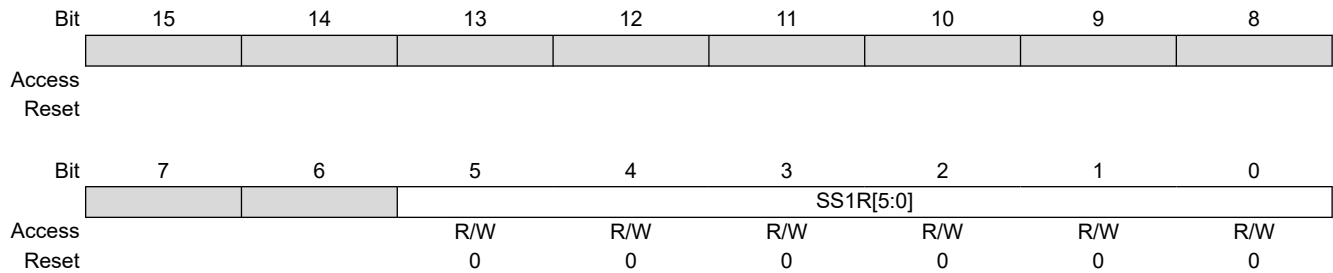

Bits 5:0 – SS1R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.48 Peripheral Pin Select Input Register 22

Name: RPINR22

Offset: 0x7BC

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | SCK2R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | SDI2R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – SCK2R[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – SDI2R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.49 Peripheral Pin Select Input Register 23

Name: RPINR23

Offset: 0x7BE

| | | | | | | | | |
|--------|----|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | TXCKR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | SS2R[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – TXCKR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – SS2R[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.50 Peripheral Pin Select Input Register 25

Name: RPINR25

Offset: 0x7C2

| | | | | | | | | |
|--------|----|----|--------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | CLCINBR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | CLCINAR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – CLCINBR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – CLCINAR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.51 Peripheral Pin Select Input Register 26

Name: RPINR26

Offset: 0x7C4

| | | | | | | | | |
|--------|----|----|--------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | CLCINDR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | CLCINCR[5:0] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – CLCINDR[5:0] Refer to [Table 11-2](#) for bit field definitions

Bits 5:0 – CLCINCR[5:0] Refer to [Table 11-2](#) for bit field definitions

11.5.52 Peripheral Pin Select Output Register 0

Name: RPOR0

Offset: 0x7D4

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP1R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP0R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP1R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP0R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.53 Peripheral Pin Select Output Register 1

Name: RPOR1

Offset: 0x7D6

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP3R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP2R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP3R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP2R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.54 Peripheral Pin Select Output Register 2

Name: RPOR2

Offset: 0x7D8

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP5R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP4R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP5R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP4R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.55 Peripheral Pin Select Output Register 3

Name: RPOR3

Offset: 0x7DA

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP7R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP6R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP7R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP6R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.56 Peripheral Pin Select Output Register 4

Name: RPOR4

Offset: 0x7DC

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP9R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP8R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP9R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP8R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.57 Peripheral Pin Select Output Register 5

Name: RPOR5

Offset: 0x7DE

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP11R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP10R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP11R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP10R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.58 Peripheral Pin Select Output Register 6

Name: RPOR6

Offset: 0x7E0

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP13R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP12R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP13R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP12R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.59 Peripheral Pin Select Output Register 7

Name: RPOR7

Offset: 0x7E2

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP15R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP14R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP15R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP14R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.60 Peripheral Pin Select Output Register 8

Name: RPOR8

Offset: 0x7E4

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP17R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP16R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP17R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP16R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.61 Peripheral Pin Select Output Register 9

Name: RPOR9

Offset: 0x7E6

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP19R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP18R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP19R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP18R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.62 Peripheral Pin Select Output Register 10

Name: RPOR10

Offset: 0x7E8

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP21R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP20R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP21R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP20R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.63 Peripheral Pin Select Output Register 11

Name: RPOR11

Offset: 0x7EA

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP23R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP22R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP23R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP22R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.64 Peripheral Pin Select Output Register 12

Name: RPOR12

Offset: 0x7EC

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP25R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP24R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP25R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP24R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.65 Peripheral Pin Select Output Register 13

Name: RPOR13

Offset: 0x7EE

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP27R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP26R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP27R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP26R[6:0] Refer to [Table 11-3](#) for bit field definitions

11.5.66 Peripheral Pin Select Output Register 14

Name: RPOR14

Offset: 0x7F0

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RP29R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | RP28R[6:0] | | | | | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 14:8 – RP29R[6:0] Refer to [Table 11-3](#) for bit field definitions

Bits 6:0 – RP28R[6:0] Refer to [Table 11-3](#) for bit field definitions

12. Timer1

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Timers**” (www.microchip.com/DS39704) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

Timer1 can operate in three modes:

- 16-Bit Timer
- 16-Bit Synchronous Counter
- 16-Bit Asynchronous Counter

Timer1 also supports these features:


- Timer Gate Operation
- Selectable Prescaler Settings
- Timer Operation during CPU Idle and Sleep modes
- Interrupt on 16-Bit Period Register Match or Falling Edge of External Gate Signal

Figure 12-1 shows a block diagram of the 16-bit timer module.

To configure Timer1 for operation:

1. Select the timer prescaler ratio using the TCKPS[1:0] bits.
2. Set the Clock and Gating modes using the TCS, TECS[1:0] and TGATE bits.
3. Set or clear the TSYNC bit to configure synchronous or asynchronous operation.
4. Load the timer period value into the PR1 register.
5. If interrupts are required, set the Timer1 Interrupt Enable bit, T1IE. Use the Timer1 Interrupt Priority bits, T1IP[2:0], to set the interrupt priority.
6. Set the TON bit (= 1).

Figure 12-1. 16-Bit Timer1 Module Block Diagram

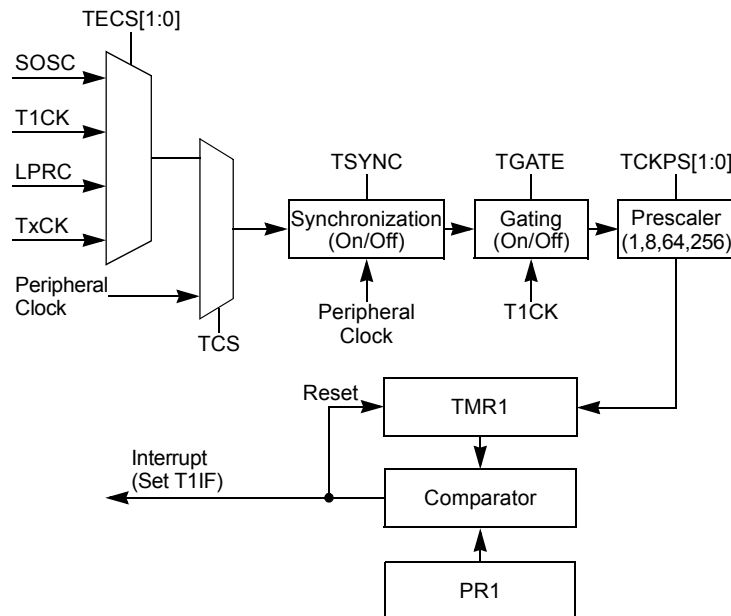

12.1 Timer1 Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|------------|-------|------------|---|---|-------|-----------|---|
| 0x00 ... 0x018F | Reserved | | | | | | | | | |
| 0x0190 | TMR1 | 7:0 | TMR1[7:0] | | | | | | | |
| | | 15:8 | TMR1[15:8] | | | | | | | |
| 0x0192 | PR1 | 7:0 | PR1[7:0] | | | | | | | |
| | | 15:8 | PR1[15:8] | | | | | | | |
| 0x0194 | T1CON | 7:0 | | TGATE | TCKPS[1:0] | | | TSYNC | TCS | |
| | | 15:8 | TON | | TSIDL | | | | TECS[1:0] | |

12.1.1 Timer1 Counter Register

Name: TMR1

Offset: 0x190

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMR1[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMR1[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMR1[15:0] Timer1 Value bits

12.1.2 Timer1 Period Register

Name: PR1
Offset: 0x192

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PR1[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PR1[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PR1[15:0] Timer1 Period Value bits

12.1.3 Timer1 Control Register

Name: T1CON

Offset: 0x194

Note:

1. Changing the value of T1CON while the timer is running (TON = 1) causes the timer prescale counter to reset and is not recommended.

| | | | | | | | | |
|--------|-----|----|-------|----|----|----|-----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TON | | TSIDL | | | | TECS[1:0] | |
| Access | R/W | | R/W | | | | R/W | R/W |
| Reset | 0 | | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|---|-------|------------|-----|---|-------|-----|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | TGATE | TCKPS[1:0] | | | TSYNC | TCS | |
| Access | | R/W | R/W | R/W | | R/W | R/W | |
| Reset | | 0 | 0 | 0 | | 0 | 0 | |

Bit 15 – TON Timer1 On bit⁽¹⁾

| Value | Description |
|-------|----------------------|
| 1 | Starts 16-bit Timer1 |
| 0 | Stops 16-bit Timer1 |

Bit 13 – TSIDL Timer1 Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bits 9:8 – TECS[1:0] Timer1 Extended Clock Select bits (selected when TCS = 1)

| Value | Description |
|-------|-------------------------------------|
| 11 | Generic timer (TxCK) external input |
| 10 | LPRC Oscillator |
| 01 | T1CK external clock input |
| 00 | SOSC |

Bit 6 – TGATE Timer1 Gated Time Accumulation Enable bit

When TCS = 1:

This bit is ignored.

When TCS = 0:

| Value | Description |
|-------|-------------------------------------|
| 1 | Gated time accumulation is enabled |
| 0 | Gated time accumulation is disabled |

Bits 5:4 – TCKPS[1:0] Timer1 Input Clock Prescale Select bits

| Value | Description |
|-------|-------------|
| 11 | 1:256 |
| 10 | 1:64 |
| 01 | 1:8 |
| 00 | 1:1 |

Bit 2 – TSYNC Timer1 External Clock Input Synchronization Select bit

When TCS = 0:

This bit is ignored.

When TCS = 1:

| Value | Description |
|-------|---|
| 1 | Synchronizes the external clock input |
| 0 | Does not synchronize the external clock input |

Bit 1 – TCS Timer1 Clock Source Select bit

| Value | Description |
|-------|---|
| 1 | External clock source selected by TECS[1:0] |
| 0 | Internal peripheral clock (F_{OSC}) |

13. Timer2/3

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Timers**” (www.microchip.com/DS39704) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Timer2/3 modules are 32-bit timers, which can also be configured as independent, 16-bit timers with selectable operating modes.

As a 32-bit timer, Timer2/3 can operate in four modes:

- Two Independent 16-Bit Synchronous Timers
- Two Independent 16-Bit Synchronous Counters
- Single 32-Bit Synchronous Timer
- Single 32-Bit Synchronous Counter

They also support these features:

- Timer Gate Operation
- Selectable Prescaler Settings
- Timer Operation during Idle mode
- Interrupt on a 32-Bit Period Register Match
- A/D Event Trigger

Individually, all of the timers can function as synchronous timers or counters. These timers cannot operate in Sleep mode. The operating modes and enabled features are determined by setting the appropriate bit(s) in the T2CON and T3CON registers.

For 32-bit timer/counter operation, Timer2 is the least significant word; Timer3 is the most significant word of the 32-bit timer.


Note: For 32-bit operation, T3CON control bits are ignored. Only T2CON control bits are used for setup and control. Timer2 clocks and gate inputs are utilized for the 32-bit timer modules, but an interrupt is generated with the Timer3 interrupt flags.

To configure Timer2/3 for 32-bit operation:

1. Set the T32 bit (T2CON[3] = 1).
2. Select the prescaler ratio for Timer2 using the TCKPS[1:0] bits.
3. Set the Clock and Gating modes using the TCS and TGATE bits. If TCS is set to an external clock, RPINRx (TyCK) must be configured to an available RPN/RPIn pin. For more information, see [11.4. Peripheral Pin Select \(PPS\)](#).
4. Load the timer period value. PR3 will contain the most significant word (msw) of the value, while PR2 contains the least significant word (lsw).
5. If interrupts are required, set the interrupt enable bit, T3IE. Use the priority bits, T3IP[2:0], to set the interrupt priority. Note that while Timer2 controls the timer, the interrupt appears as a Timer3 interrupt.
6. Set the TON bit (= 1).

The timer value, at any point, is stored in the register pair, TMR3/2. TMR3 always contains the most significant word of the count, while TMR2 contains the least significant word. The 32-bit timer is shown in [Figure 13-1](#).

Figure 13-1. 32-Bit Timer Block Diagram

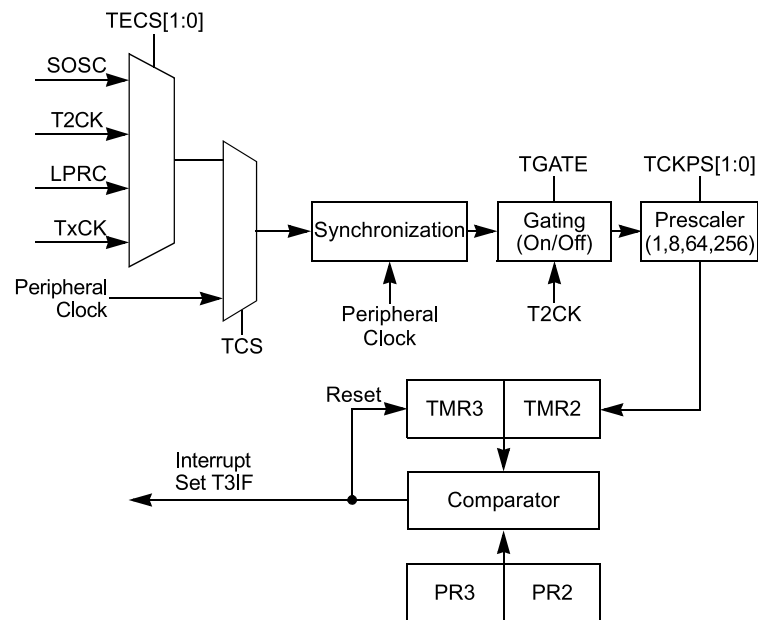


To configure any of the timers for individual 16-bit operation:

1. Clear the T32 bit (T2CON[3] for Timer2 and Timer3).
2. Select the timer prescaler ratio using the TCKPS[1:0] bits.
3. Set the Clock and Gating modes using the TCS and TGATE bits. See [11.4. Peripheral Pin Select \(PPS\)](#) for more information.
4. Load the timer period value into the PRx register.
5. If interrupts are required, set the Timerx Interrupt Enable bit, TxIE. Use the Timerx Interrupt Priority bits, TxIP[2:0], to set the interrupt priority.
6. Set the TON bit (= 1).

The 16-bit timer is shown in [Figure 13-2](#).

Figure 13-2. 16-Bit Timer Block Diagram

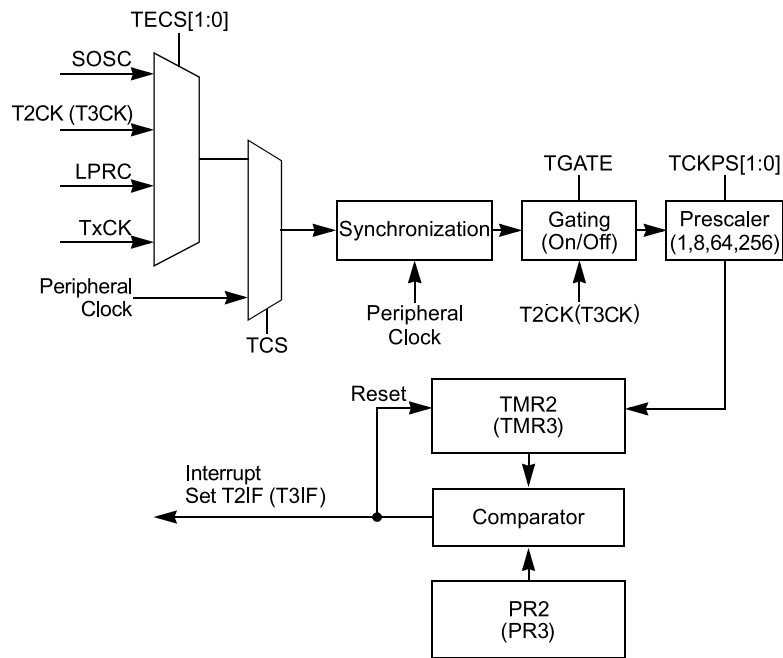

13.1 Timer2/3 and Timer4/5 Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|---------------|-------|------------|---|-----|-------|-----------|---|
| 0x00 ... 0x0195 | Reserved | | | | | | | | | |
| 0x0196 | TMR2 | 7:0 | TMR2[7:0] | | | | | | | |
| | | 15:8 | TMR2[15:8] | | | | | | | |
| 0x0198 | TMR3HLD | 7:0 | TMR3HLD[7:0] | | | | | | | |
| | | 15:8 | TMR3HLD[15:8] | | | | | | | |
| 0x019A | TMR3 | 7:0 | TMR3[7:0] | | | | | | | |
| | | 15:8 | TMR3[15:8] | | | | | | | |
| 0x019C | PR2 | 7:0 | PR2[7:0] | | | | | | | |
| | | 15:8 | PR2[15:8] | | | | | | | |
| 0x019E | PR3 | 7:0 | PR3[7:0] | | | | | | | |
| | | 15:8 | PR3[15:8] | | | | | | | |
| 0x01A0 | T2CON | 7:0 | | TGATE | TCKPS[1:0] | | T32 | TSYNC | TCS | |
| | | 15:8 | TON | | TSIDL | | | | TECS[1:0] | |
| 0x01A2 | T3CON | 7:0 | | TGATE | TCKPS[1:0] | | | TSYNC | TCS | |
| | | 15:8 | TON | | TSIDL | | | | TECS[1:0] | |

13.1.1 Timer2 Counter Register

Name: TMR2

Offset: 0x196

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMR2[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMR2[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMR2[15:0] Timer2 Value bits

13.1.2 Timer3 Holding Register (for 32-bit timer operations only)

Name: TMR3HLD

Offset: 0x198

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMR3HLD[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMR3HLD[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMR3HLD[15:0] Timer3 Holding Value bits

13.1.3 Timer3 Counter Register

Name: TMR3

Offset: 0x19A

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMR3[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMR3[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMR3[15:0] Timer3 Value bits

13.1.4 Timer2 Period Register

Name: PR2
Offset: 0x19C

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PR2[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PR2[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PR2[15:0] Timer2 Period Value bits

13.1.5 Timer3 Period Register

Name: PR3
Offset: 0x19E

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PR3[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PR3[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PR3[15:0] Timer3 Period Value bits

13.1.6 Timer2 Control Register

Name: T2CON

Offset: 0x1A0

Note:

1. Changing the value of T2CON while the timer is running (TON = 1) causes the timer prescale counter to reset and is not recommended.

| | | | | | | | | |
|--------|-----|----|-------|----|----|----|-----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TON | | TSIDL | | | | TECS[1:0] | |
| Access | R/W | | R/W | | | | R/W | R/W |
| Reset | 0 | | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|---|-------|------------|-----|-----|-------|-----|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | TGATE | TCKPS[1:0] | | T32 | TSYNC | TCS | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | |

Bit 15 – TON Timer2 On bit⁽¹⁾

| Value | Description |
|-------|---------------------|
| 1 | Starts 16-bit Timer |
| 0 | Stops 16-bit Timer |

Bit 13 – TSIDL Timer2 Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bits 9:8 – TECS[1:0] Timer2 Extended Clock Select bits (selected when TCS = 1)

| Value | Description |
|-------|-------------------------------------|
| 11 | Generic timer (TxCK) external input |
| 10 | LPRC Oscillator |
| 01 | T1CK external clock input |
| 00 | SOSC |

Bit 6 – TGATE Timer2 Gated Time Accumulation Enable bit

When TCS = 1:

This bit is ignored.

When TCS = 0:

| Value | Description |
|-------|-------------------------------------|
| 1 | Gated time accumulation is enabled |
| 0 | Gated time accumulation is disabled |

Bits 5:4 – TCKPS[1:0] Timer2 Input Clock Prescale Select bits

| Value | Description |
|-------|-------------|
| 11 | 1:256 |
| 10 | 1:64 |
| 01 | 1:8 |
| 00 | 1:1 |

Bit 3 – T32 32-Bit Timer Mode Select bit

In 32-bit mode, T3CON control bits do not affect 32-bit timer operation.

| Value | Description |
|-------|--|
| 1 | Timer2 and Timer3 form a single 32-bit timer |
| 0 | Timer2 and Timer3 act as two 16-bit timers |

Bit 2 – TSYNC Timer2 External Clock Input Synchronization Select bit⁽¹⁾When TCS = 0:

This bit is ignored.

When TCS = 1:

| Value | Description |
|-------|---|
| 1 | Synchronizes the external clock input |
| 0 | Does not synchronize the external clock input |

Bit 1 – TCS Timer2 Clock Source Select bit

| Value | Description |
|-------|---|
| 1 | External clock source selected by TECS[1:0] |
| 0 | Internal peripheral clock (F _{OSC}) |

13.1.7 Timer3 Control Register

Name: T3CON

Offset: 0x1A2

Note:

1. Changing the value of T3CON while the timer is running (TON = 1) causes the timer prescale counter to reset and is not recommended.

| | | | | | | | | |
|--------|-----|----|-------|----|----|----|-----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TON | | TSIDL | | | | TECS[1:0] | |
| Access | R/W | | R/W | | | | R/W | R/W |
| Reset | 0 | | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|---|-------|------------|-----|---|-------|-----|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | TGATE | TCKPS[1:0] | | | TSYNC | TCS | |
| Access | | R/W | R/W | R/W | | R/W | R/W | |
| Reset | | 0 | 0 | 0 | | 0 | 0 | |

Bit 15 – TON Timer3 On bit⁽¹⁾

| Value | Description |
|-------|---------------------|
| 1 | Starts 16-bit Timer |
| 0 | Stops 16-bit Timer |

Bit 13 – TSIDL Timer3 Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bits 9:8 – TECS[1:0] Timer3 Extended Clock Select bits (selected when TCS = 1)

| Value | Description |
|-------|-------------------------------------|
| 11 | Generic timer (TxCK) external input |
| 10 | LPRC Oscillator |
| 01 | T1CK external clock input |
| 00 | SOSC |

Bit 6 – TGATE Timer3 Gated Time Accumulation Enable bit

When TCS = 1:

This bit is ignored.

When TCS = 0:

| Value | Description |
|-------|-------------------------------------|
| 1 | Gated time accumulation is enabled |
| 0 | Gated time accumulation is disabled |

Bits 5:4 – TCKPS[1:0] Timer3 Input Clock Prescale Select bits

| Value | Description |
|-------|-------------|
| 11 | 1:256 |
| 10 | 1:64 |
| 01 | 1:8 |
| 00 | 1:1 |

Bit 2 – TSYNC Timer3 External Clock Input Synchronization Select bit⁽¹⁾

When TCS = 0:

This bit is ignored.

When TCS = 1:

| Value | Description |
|-------|---|
| 1 | Synchronizes the external clock input |
| 0 | Does not synchronize the external clock input |

Bit 1 – TCS Timer3 Clock Source Select bit

| Value | Description |
|-------|---|
| 1 | External clock source selected by TECS[1:0] |
| 0 | Internal peripheral clock (F_{OSC}) |

14. Capture/Compare/PWM/Timer Modules (MCCP)

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Capture/Compare/PWM/Timer (MCCP and SCCP)**” (www.microchip.com/DS30003035) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

PIC24FJ64GP205/GU205 family devices include several Capture/Compare/PWM/Timer base modules, which provide the functionality of three different peripherals of earlier PIC24F devices. The module can operate in one of three major modes:

- General Purpose Timer
- Input Capture
- Output Compare/PWM

This family of devices features five instances of the MCCP module. MCCP1-5 provide up to two outputs and an extended range of power control features.

The MCCPx modules can be operated only in one of the three major modes at any time. The other modes are not available unless the module is reconfigured for the new mode.

A conceptual block diagram for the module is shown in [Figure 14-1](#). All three modules share a time base generator and a common Timer register pair (CCPxTMRH/L); other shared hardware components are added as a particular mode requires.

Each module has a total of seven control and status registers:

- CCPxCON1L
- CCPxCON1H
- CCPxCON2L
- CCPxCON2H
- CCPxCON3L
- CCPxCON3H
- CCPxSTATL


Each module also includes ten buffer/counter registers that serve as Timer Value registers or data holding buffers:

- CCPxTMRH/CCPxTMRL (Timer High/Low Counters)
- CCPxPRH/CCPxPRL (Timer Period High/Low)
- CCPxRAH/CCPxRAL (Primary Output Compare Data Buffer)
- CCPxRBH/CCPxRBL (Secondary Output Compare Data Buffer)
- CCPxBUFH/CCPxBUFL (Input Capture High/Low Buffers)

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Figure 14-1. MCCP Conceptual Block Diagram

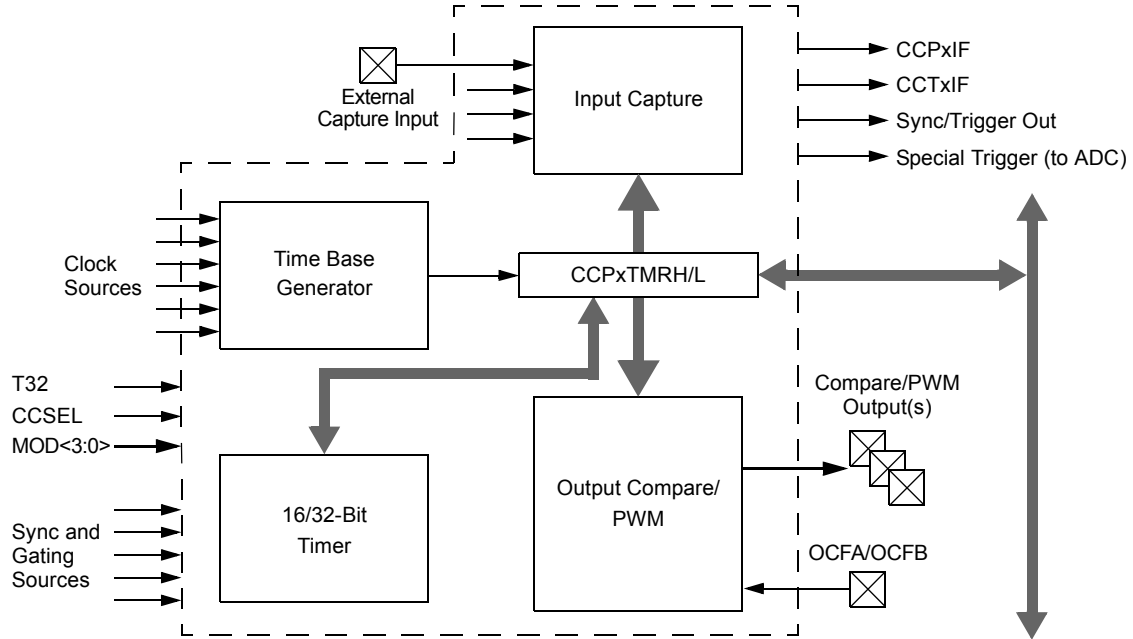


14.1 Time Base Generator

The Timer Clock Generator (TCG) generates a clock for the module's internal time base using one of the clock signals already available on the microcontroller. This is used as the time reference for the module in its three major modes. The internal time base is shown in Figure 14-2.

There are eight inputs available to the clock generator, which are selected using the CLKSEL[2:0] bits (CCPxCON1L[10:8]). Available sources include the FRC and LPRC, the Secondary Oscillator and the TCLKI external clock inputs. The system clock is the default source (CLKSEL[2:0] = 000). On PIC24FJ64GP205/GU205 family devices, clock sources to the MCCPx module can be synchronized with the system clock. As a result, when clock sources are selected, clock input timing restrictions or module operating restrictions may exist.

Figure 14-2. Timer Clock Generator

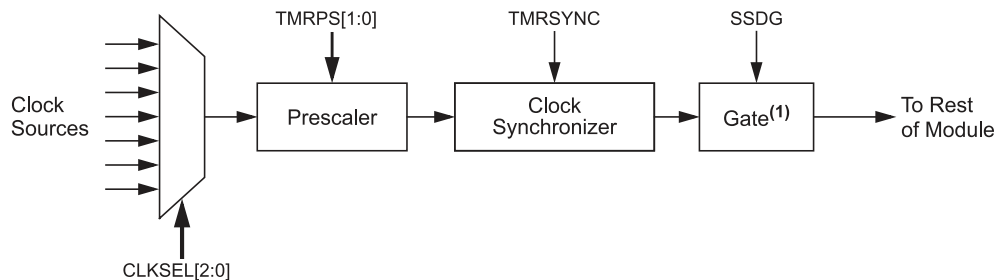

Note:

1. Gating available in Timer modes only.

14.2 General Purpose Timer

Timer mode is selected when CCSEL = 0 and MOD[3:0] = 0000. The timer can function as a 32-bit timer or a dual 16-bit timer, depending on the setting of the T32 bit (Table 14-1).

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Table 14-1. Timer Operation Mode

| T32 (CCPxCON1L[5]) | Operating Mode |
|--------------------|--------------------------|
| 0 | Dual Timer Mode (16-bit) |
| 1 | Timer Mode (32-bit) |

Dual 16-Bit Timer mode (Figure 14-3) provides a simple timer function with two independent 16-bit timer/counters. The primary timer uses the CCPxTMRL and CCPxPRL registers. Only the primary timer can interact with other modules on the device. It generates the MCCPx Sync out signals for use by other MCCPx modules. It can also use the SYNC[4:0] bits' signal generated by other modules.

The secondary timer uses the CCPxTMRH and CCPxPRH registers. It is intended to be used only as a periodic interrupt source for scheduling CPU events. It does not generate an output Sync/Trigger mode signal like the primary time base. In Dual Timer mode, the Timer Period High register, CCPxPRH, generates the MCCPx compare event (CCPxIF) used by many other modules on the device.

The 32-Bit Timer mode (Figure 14-4) uses the CCPxTMRL and CCPxTMRH registers, together, as a single 32-bit timer. When CCPxTMRL overflows, CCPxTMRH increments by one. This mode provides a simple timer function when it is important to track long time periods. Note that the T32 bit (CCPxCON1L[5]) should be set before the CCPxTMRL or CCPxPRH registers are written to initialize the 32-bit timer.

14.2.1 Sync and Trigger Operation

In both 16-bit and 32-bit modes, the timer can also function in either Synchronization ("Sync") or Trigger mode operation. Both use the SYNC[4:0] bits (CCPxCON1H[4:0]) to determine the input signal source. The difference is how that signal affects the timer.

In Sync mode operation, the Timer Reset or clear occurs when the input selected by SYNC[4:0] is asserted. The timer immediately begins to count again from zero unless it is held for some other reason. Sync operation is used whenever the TRIGEN bit (CCPxCON1H[7]) is cleared. The SYNC[4:0] bits can have any value except '11111'.

In Trigger mode operation, the timer is held in Reset until the input selected by SYNC[4:0] is asserted; when it occurs, the timer starts counting. Trigger operation is used whenever the TRIGEN bit is set. In Trigger mode, the timer will continue running after a trigger event as long as the CCPTRIG bit (CCPxSTATL[7]) is set. To clear CCPTRIG, the TRCLR bit (CCPxSTATL[5]) must be set to clear the trigger event, reset the timer and hold it at zero until another trigger event occurs. On PIC24FJ64GP205/GU205 family devices, Trigger mode operation can only be used when the peripheral clock is the time base source (CLKSEL[2:0] = 000).

Figure 14-3. Dual 16-Bit Timer Mode


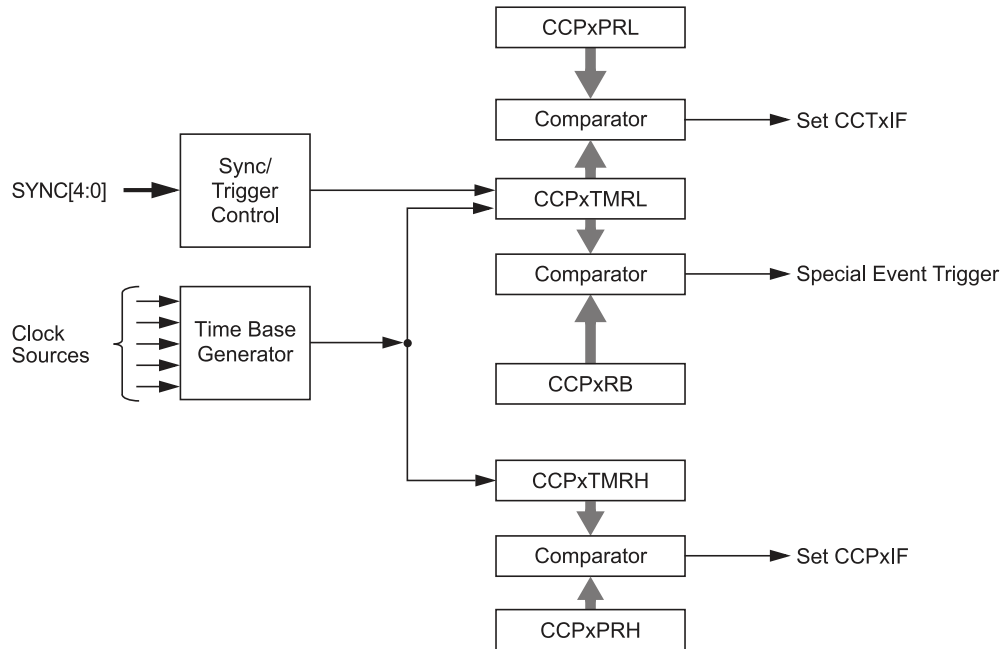


Figure 14-4. 32-Bit Timer Mode

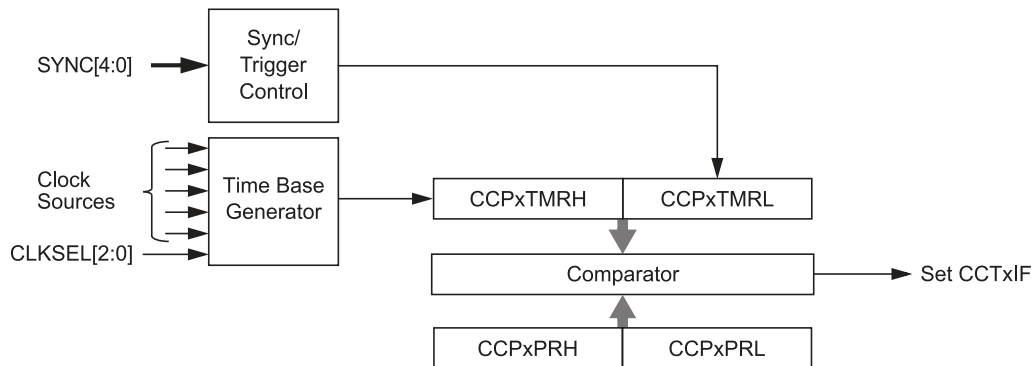

14.3 Output Compare Mode

Output Compare mode compares the Timer register value with the value of one or two Compare registers, depending on its mode of operation. The output compare module, on compare match events, has the ability to generate a single output transition or a train of output pulses. Like most PIC® MCU peripherals, the output compare module can also generate interrupts on a compare match event.

Table 14-2 shows the various modes available in Output Compare modes. Figure 14-5 depicts a simplified block diagram of the Output Compare mode.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)


Table 14-2. Output Compare/PWM Modes

| MOD[3:0] (CCPxCON1L[3:0]) | T32 (CCPxCON1L[5]) | Operating Mode | |
|---------------------------|--------------------|-------------------------------------|------------------|
| 0001 | 0 | Output High on Compare (16-bit) | Single Edge Mode |
| 0001 | 1 | Output High on Compare (32-bit) | |
| 0010 | 0 | Output Low on Compare (16-bit) | |
| 0010 | 1 | Output Low on Compare (32-bit) | |
| 0011 | 0 | Output Toggle on Compare (16-bit) | |
| 0011 | 1 | Output Toggle on Compare (32-bit) | |
| 0100 | 0 | Dual Edge Compare (16-bit) | Dual Edge Mode |
| 0101 | 0 | Dual Edge Compare (16-bit buffered) | PWM Mode |
| 1111 | 0 | External Input Source Mode (16-bit) | Center PWM Mode |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Figure 14-5. Output Compare Block Diagram

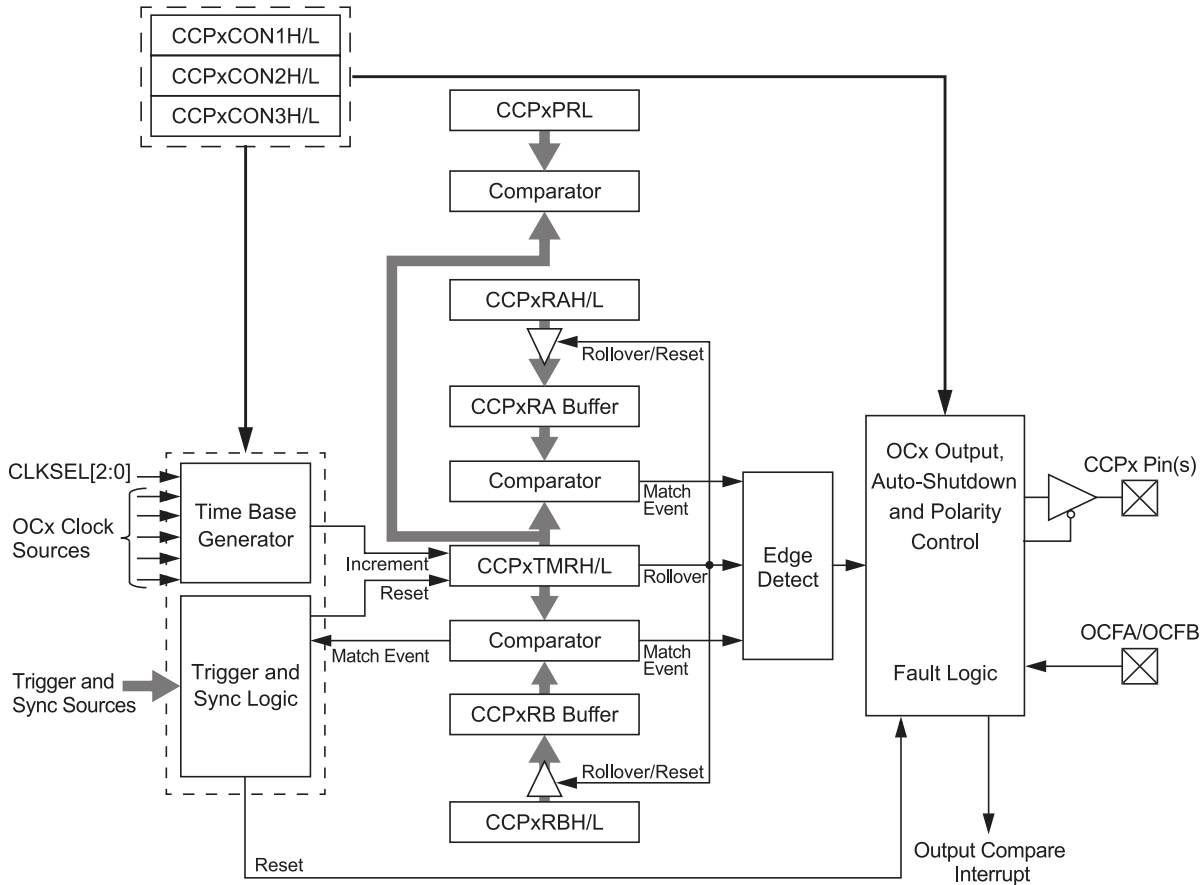

14.4 Input Capture Mode

Input Capture mode is used to capture a timer value from an independent timer base upon an event on an input pin or other internal trigger source. The input capture features are useful in applications requiring frequency (time period) and pulse measurement. Figure 14-6 depicts a simplified block diagram of the Input Capture mode.

Input Capture mode uses a dedicated 16/32-bit, synchronous, up counting timer for the capture function. The timer value is written to the FIFO when a capture event occurs. The internal value may be read (with a synchronization delay) using the CCPxTMRH/L registers.

To use Input Capture mode, the CCSEL bit (CCPxCON1L[4]) must be set. The T32 and MOD[3:0] bits are used to select the proper Capture mode, as shown in Table 14-3.

Table 14-3. Input Capture Modes

| MOD[3:0] (CCPxCON1L[3:0]) | T32 (CCPxCON1L[5]) | Operating Mode |
|---------------------------|--------------------|--------------------------------|
| 0000 | 0 | Edge Detect (16-bit capture) |
| 0000 | 1 | Edge Detect (32-bit capture) |
| 0001 | 0 | Every Rising (16-bit capture) |
| 0001 | 1 | Every Rising (32-bit capture) |
| 0010 | 0 | Every Falling (16-bit capture) |
| 0010 | 1 | Every Falling (32-bit capture) |


PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

.....continued

| MOD[3:0] (CCPxCON1L[3:0]) | T32 (CCPxCON1L[5]) | Operating Mode |
|---------------------------|--------------------|------------------------------------|
| 0011 | 0 | Every Rise/Fall (16-bit capture) |
| 0011 | 1 | Every Rise/Fall (32-bit capture) |
| 0100 | 0 | Every 4th Rising (16-bit capture) |
| 0100 | 1 | Every 4th Rising (32-bit capture) |
| 0101 | 0 | Every 16th Rising (16-bit capture) |
| 0101 | 1 | Every 16th Rising (32-bit capture) |

Figure 14-6. Input Capture Block Diagram

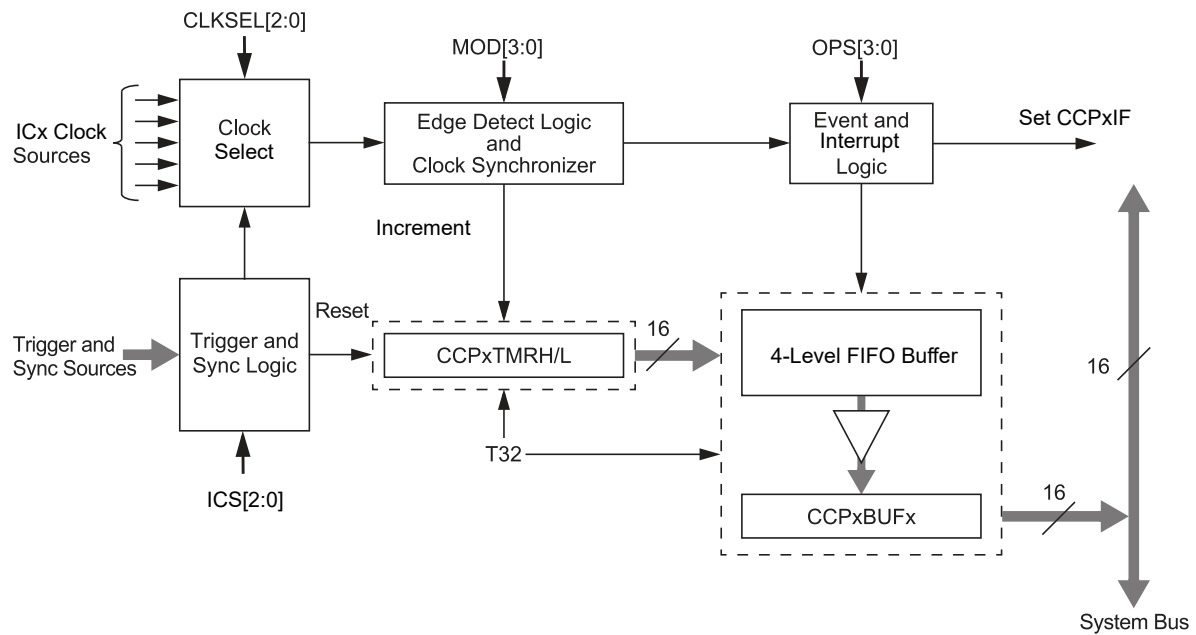

14.5 Auxiliary Output

The MCCPx modules have an auxiliary (secondary) output that provides other peripherals access to internal module signals. The auxiliary output is intended to connect to other MCCPx modules, or other digital peripherals, to provide these types of functions:

- Time Base Synchronization
- Peripheral Trigger and Clock Inputs
- Signal Gating

The type of output signal is selected using the AUXOUT[1:0] control bits (CCPxCON2H[4:3]). The type of output signal is also dependent on the module operating mode, as shown in [Table 14-4](#).

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Table 14-4. Auxiliary Output

| AUXOUT[1:0] | CCSEL | MOD[3:0] | Comments | Signal Description |
|-------------|-------|-------------------------|---------------------------|-------------------------------------|
| 00 | x | xxxx | Auxiliary Output Disabled | No Output |
| 01 | 0 | 0000 | Time Base Modes | Time Base Period Reset or Rollover |
| 10 | | | | Special Event Trigger Output |
| 11 | | | | No Output |
| 01 | 0 | 0001 through 1111 | Output Compare Modes | Time Base Period Reset or Rollover |
| 10 | | | | Output Compare Event Signal |
| 11 | | | | Output Compare Signal |
| 01 | 1 | xxxx | Input Capture Modes | Time Base Period Reset or Rollover |
| 10 | | | | Reflects the Value of the ICDIS bit |
| 11 | | | | Input Capture Event Signal |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6 MCCP Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-----------|----------|-------------|------------|-----------|-------------|-------------|-------------|-------------|-------|
| 0x00 ... 0x026B | Reserved | | | | | | | | | |
| 0x026C | CCP1CON1L | 7:0 | TMRPS[1:0] | | T32 | CCSEL | MOD[3:0] | | | |
| | | 15:8 | CCPON | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | | |
| 0x026E | CCP1CON1H | 7:0 | TRIGEN | ONESHOT | ALTSYNC | SYNC[4:0] | | | | |
| | | 15:8 | OPSSRC | RTRGEN | | OPS3[3:0] | | | | |
| 0x0270 | CCP1CON2L | 7:0 | ASDG[7:0] | | | | | | | |
| | | 15:8 | PWMRSEN | ASDGM | | SSDG | | | | |
| 0x0272 | CCP1CON2H | 7:0 | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| | | 15:8 | OENSYNC | | OC[F:A]EN | | | | | |
| 0x0274 | CCP1CON3L | 7:0 | | | | DT[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x0276 | CCP1CON3H | 7:0 | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| | | 15:8 | OETRIG | OSCNT[2:0] | | | OUTM[2:0] | | | |
| 0x0278 | CCP1STATL | 7:0 | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| | | 15:8 | | | | | ICGARM | | | |
| 0x027A ... 0x027B | Reserved | | | | | | | | | |
| 0x027C | CCP1TMRL | 7:0 | TMRL[7:0] | | | | | | | |
| | | 15:8 | TMRL[15:8] | | | | | | | |
| 0x027E | CCP1TMRH | 7:0 | TMRH[23:16] | | | | | | | |
| | | 15:8 | TMRH[31:24] | | | | | | | |
| 0x0280 | CCP1PRL | 7:0 | PRL[7:0] | | | | | | | |
| | | 15:8 | PRL[15:8] | | | | | | | |
| 0x0282 | CCP1PRH | 7:0 | PRH[23:16] | | | | | | | |
| | | 15:8 | PRH[31:24] | | | | | | | |
| 0x0284 | CCP1RA | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x0286 ... 0x0287 | Reserved | | | | | | | | | |
| 0x0288 | CCP1RB | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x028A ... 0x028B | Reserved | | | | | | | | | |
| 0x028C | CCP1BUFL | 7:0 | BUF[7:0] | | | | | | | |
| | | 15:8 | BUF[15:8] | | | | | | | |
| 0x028E | CCP1BUFH | 7:0 | BUF[23:16] | | | | | | | |
| | | 15:8 | BUF[31:24] | | | | | | | |
| 0x0290 | CCP2CON1L | 7:0 | TMRPS[1:0] | | T32 | CCSEL | MOD[3:0] | | | |
| | | 15:8 | CCPON | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | | |
| 0x0292 | CCP2CON1H | 7:0 | TRIGEN | ONESHOT | ALTSYNC | SYNC[4:0] | | | | |
| | | 15:8 | OPSSRC | RTRGEN | | OPS3[3:0] | | | | |
| 0x0294 | CCP2CON2L | 7:0 | ASDG[7:0] | | | | | | | |
| | | 15:8 | PWMRSEN | ASDGM | | SSDG | | | | |
| 0x0296 | CCP2CON2H | 7:0 | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| | | 15:8 | OENSYNC | | OC[F:A]EN | | | | | |
| 0x0298 | CCP2CON3L | 7:0 | | | | DT[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x029A | CCP2CON3H | 7:0 | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| | | 15:8 | OETRIG | OSCNT[2:0] | | | OUTM[2:0] | | | |
| 0x029C | CCP2STATL | 7:0 | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| | | 15:8 | | | | | | ICGARM | | |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-----------|----------|-------------|---------|------------|-------------|-------------|-------------|-------------|-------|
| 0x029E ... 0x029F | Reserved | | | | | | | | | |
| 0x02A0 | CCP2TMRL | 7:0 | TMRL[7:0] | | | | | | | |
| | | 15:8 | TMRL[15:8] | | | | | | | |
| 0x02A2 | CCP2TMRH | 7:0 | TMRH[23:16] | | | | | | | |
| | | 15:8 | TMRH[31:24] | | | | | | | |
| 0x02A4 | CCP2PRL | 7:0 | PRL[7:0] | | | | | | | |
| | | 15:8 | PRL[15:8] | | | | | | | |
| 0x02A6 | CCP2PRH | 7:0 | PRH[23:16] | | | | | | | |
| | | 15:8 | PRH[31:24] | | | | | | | |
| 0x02A8 | CCP2RA | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x02AA ... 0x02AB | Reserved | | | | | | | | | |
| 0x02AC | CCP2RB | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x02AE ... 0x02B3 | Reserved | | | | | | | | | |
| 0x02B4 | CCP3CON1L | 7:0 | TMRPS[1:0] | | T32 | CCSEL | MOD[3:0] | | | |
| | | 15:8 | CCPON | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | | |
| 0x02B6 | CCP3CON1H | 7:0 | TRIGEN | ONESHOT | ALTSYNC | SYNC[4:0] | | | | |
| | | 15:8 | OPSSRC | RTRGEN | | OPS3[3:0] | | | | |
| 0x02B8 | CCP3CON2L | 7:0 | ASDG[7:0] | | | | | | | |
| | | 15:8 | PWMRSEN | ASDGM | | SSDG | | | | |
| 0x02BA | CCP3CON2H | 7:0 | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| | | 15:8 | OENSYNC | | OC[F:A]EN | | | | | |
| 0x02BC | CCP3CON3L | 7:0 | DT[4:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x02BE | CCP3CON3H | 7:0 | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| | | 15:8 | OETRIG | | OSCNT[2:0] | | | OUTM[2:0] | | |
| 0x02C0 | CCP3STATL | 7:0 | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| | | 15:8 | | | | | | ICGARM | | |
| 0x02C2 ... 0x02C3 | Reserved | | | | | | | | | |
| 0x02C4 | CCP3TMRL | 7:0 | TMRL[7:0] | | | | | | | |
| | | 15:8 | TMRL[15:8] | | | | | | | |
| 0x02C6 | CCP3TMRH | 7:0 | TMRH[23:16] | | | | | | | |
| | | 15:8 | TMRH[31:24] | | | | | | | |
| 0x02C8 | CCP3PRL | 7:0 | PRL[7:0] | | | | | | | |
| | | 15:8 | PRL[15:8] | | | | | | | |
| 0x02CA | CCP3PRH | 7:0 | PRH[23:16] | | | | | | | |
| | | 15:8 | PRH[31:24] | | | | | | | |
| 0x02CC | CCP3RA | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x02CE ... 0x02CF | Reserved | | | | | | | | | |
| 0x02D0 | CCP3RB | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x02D2 ... 0x02D3 | Reserved | | | | | | | | | |
| 0x02D4 | CCP3BUFL | 7:0 | BUF[7:0] | | | | | | | |
| | | 15:8 | BUF[15:8] | | | | | | | |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-----------|----------|-------------|---------|------------|-------------|-------------|-------------|-------------|-------|
| 0x02D6 | CCP3BUFH | 7:0 | BUF[23:16] | | | | | | | |
| | | 15:8 | BUF[31:24] | | | | | | | |
| 0x02D8 ... 0x02FF | Reserved | | | | | | | | | |
| 0x0300 | CCP4CON1L | 7:0 | TMRPS[1:0] | | T32 | CCSEL | MOD[3:0] | | | |
| | | 15:8 | CCPON | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | | |
| 0x0302 | CCP4CON1H | 7:0 | TRIGEN | ONESHOT | ALTSYNC | SYNC[4:0] | | | | |
| | | 15:8 | OPSSRC | RTRGEN | | OPS3[3:0] | | | | |
| 0x0304 | CCP4CON2L | 7:0 | ASDG[7:0] | | | | | | | |
| | | 15:8 | PWMRSEN | ASDGM | | SSDG | | | | |
| 0x0306 | CCP4CON2H | 7:0 | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| | | 15:8 | OENSYNC | | OC[F:A]EN | | | | | |
| 0x0308 | CCP4CON3L | 7:0 | | | | DT[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x030A | CCP4CON3H | 7:0 | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| | | 15:8 | OETRIG | | OSCNT[2:0] | | | OUTM[2:0] | | |
| 0x030C | CCP4STATL | 7:0 | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| | | 15:8 | | | | | | ICGARM | | |
| 0x030E ... 0x030F | Reserved | | | | | | | | | |
| 0x0310 | CCP4TMRL | 7:0 | TMRL[7:0] | | | | | | | |
| | | 15:8 | TMRL[15:8] | | | | | | | |
| 0x0312 | CCP4TMRH | 7:0 | TMRH[23:16] | | | | | | | |
| | | 15:8 | TMRH[31:24] | | | | | | | |
| 0x0314 | CCP4PRL | 7:0 | PRL[7:0] | | | | | | | |
| | | 15:8 | PRL[15:8] | | | | | | | |
| 0x0316 | CCP4PRH | 7:0 | PRH[23:16] | | | | | | | |
| | | 15:8 | PRH[31:24] | | | | | | | |
| 0x0318 | CCP4RA | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x031A ... 0x031B | Reserved | | | | | | | | | |
| 0x031C | CCP4RB | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x031E ... 0x031F | Reserved | | | | | | | | | |
| 0x0320 | CCP4BUFL | 7:0 | BUF[7:0] | | | | | | | |
| | | 15:8 | BUF[15:8] | | | | | | | |
| 0x0322 | CCP4BUFH | 7:0 | BUF[23:16] | | | | | | | |
| | | 15:8 | BUF[31:24] | | | | | | | |
| 0x0324 | CCP5CON1L | 7:0 | TMRPS[1:0] | | T32 | CCSEL | MOD[3:0] | | | |
| | | 15:8 | CCPON | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | | |
| 0x0326 | CCP5CON1H | 7:0 | TRIGEN | ONESHOT | ALTSYNC | SYNC[4:0] | | | | |
| | | 15:8 | OPSSRC | RTRGEN | | OPS3[3:0] | | | | |
| 0x0328 | CCP5CON2L | 7:0 | ASDG[7:0] | | | | | | | |
| | | 15:8 | PWMRSEN | ASDGM | | SSDG | | | | |
| 0x032A | CCP5CON2H | 7:0 | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| | | 15:8 | OENSYNC | | OC[F:A]EN | | | | | |
| 0x032C | CCP5CON3L | 7:0 | | | | DT[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x032E | CCP5CON3H | 7:0 | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| | | 15:8 | OETRIG | | OSCNT[2:0] | | | OUTM[2:0] | | |
| 0x0330 | CCP5STATL | 7:0 | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| | | 15:8 | | | | | | ICGARM | | |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|-------------|---|---|---|---|---|---|---|
| 0x0332 ... 0x0333 | Reserved | | | | | | | | | |
| 0x0334 | CCP5TMRL | 7:0 | TMRL[7:0] | | | | | | | |
| | | 15:8 | TMRL[15:8] | | | | | | | |
| 0x0336 | CCP5TMRH | 7:0 | TMRH[23:16] | | | | | | | |
| | | 15:8 | TMRH[31:24] | | | | | | | |
| 0x0338 | CCP5PRL | 7:0 | PRL[7:0] | | | | | | | |
| | | 15:8 | PRL[15:8] | | | | | | | |
| 0x033A | CCP5PRH | 7:0 | PRH[23:16] | | | | | | | |
| | | 15:8 | PRH[31:24] | | | | | | | |
| 0x033C | CCP5RA | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x033E ... 0x033F | Reserved | | | | | | | | | |
| 0x0340 | CCP5RB | 7:0 | CMP[7:0] | | | | | | | |
| | | 15:8 | CMP[15:8] | | | | | | | |
| 0x0342 ... 0x0343 | Reserved | | | | | | | | | |
| 0x0344 | CCP5BUFL | 7:0 | BUF[7:0] | | | | | | | |
| | | 15:8 | BUF[15:8] | | | | | | | |
| 0x0346 | CCP5BUFH | 7:0 | BUF[23:16] | | | | | | | |
| | | 15:8 | BUF[31:24] | | | | | | | |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.1 CCP1 Control 1 Low Register

Name: CCP1CON1L
Offset: 0x26C

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|---------|--------|----------|-------------|-----|
| | CCPON | | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRPS[1:0] | | T32 | CCSEL | | MOD[3:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CCPON CCP Module Enable bit

| Value | Description |
|-------|---|
| 1 | Module is enabled with an operating mode specified by the MOD[3:0] control bits |
| 0 | Module is disabled |

Bit 13 – CCPSIDL CCP Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – CCPSLP CCP Sleep Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Module continues to operate in Sleep modes |
| 0 | Module does not operate in Sleep modes |

Bit 11 – TMRSYNC Time Base Clock Synchronization bit

| Value | Description |
|-------|---|
| 1 | Module time base clock is synchronized to the internal system clocks; timing restrictions apply |
| 0 | Module time base clock is not synchronized to the internal system clocks |

Bits 10:8 – CLKSEL[2:0] CCP Time Base Clock Select bits

| Value | Description |
|-------|------------------------|
| 111 | TCKIA pin |
| 110 | TCKIB pin |
| 101 | PLL clock |
| 100 | 2x peripheral clock |
| 011 | CLC1 |
| 010 | SOSC clock |
| 001 | Reference clock output |
| 000 | Peripheral clock |

Bits 7:6 – TMRPS[1:0] Time Base Prescale Select bits

| Value | Description |
|-------|----------------|
| 11 | 1:64 prescaler |
| 10 | 1:16 prescaler |
| 01 | 1:4 prescaler |
| 00 | 1:1 prescaler |

Bit 5 – T32 32-Bit Time Base Select bit

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 1 | Uses 32-bit time base for timer, single edge output compare or input capture function |
| 0 | Uses 16-bit time base for timer, single edge output compare or input capture function |

Bit 4 – CCSEL Capture/Compare Mode Select bit

| Value | Description |
|-------|---|
| 1 | Input capture peripheral |
| 0 | Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits) |

Bits 3:0 – MOD[3:0] CCP Mode Select bits

For CCSEL = 1 (Input Capture modes):

| Value | Description |
|-------|--|
| 1xxx | Reserved |
| 011x | Reserved |
| 0101 | Capture every 16th rising edge |
| 0100 | Capture every 4th rising edge |
| 0011 | Capture every rising and falling edge |
| 0010 | Capture every falling edge |
| 0001 | Capture every rising edge |
| 0000 | Capture every rising and falling edge (Edge Detect mode) |

For CCSEL = 0 (Output Compare/Timer modes):

| Value | Description |
|-------|--|
| 1111 | External Input mode: Pulse generator is disabled, source is selected by ICS[2:0] |
| 1110 | Reserved |
| 110x | Reserved |
| 10xx | Reserved |
| 0101 | Dual Edge Compare mode, buffered |
| 0100 | Dual Edge Compare mode |
| 0011 | 16-Bit/32-Bit Single Edge mode, toggles output on compare match |
| 0010 | 16-Bit/32-Bit Single Edge mode, drives output low on compare match |
| 0001 | 16-Bit/32-Bit Single Edge mode, drives output high on compare match |
| 0000 | 16-Bit/32-Bit Timer mode, output functions are disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.2 CCP1 Control 1 High Register

Name: CCP1CON1H

Offset: 0x26E

Notes:

1. This control bit has no function in Input Capture modes.
2. This control bit has no function when TRIGEN = 0.
3. Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|--------|----|----|-----------|-----|-----|-----|
| | OPSSRC | RTRGEN | | | OPS3[3:0] | | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|---------|---------|-----|-----------|-----|-----|-----|
| | TRIGEN | ONESHOT | ALTSYNC | | SYNC[4:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OPSSRC Output Postscaler Source Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Output postscaler scales module trigger output events |
| 0 | Output postscaler scales time base interrupt events |

Bit 14 – RTRGEN Retrigger Enable bit⁽²⁾

| Value | Description |
|-------|--|
| 1 | Time base can be retrIGGERED when TRIGEN bit = 1 |
| 0 | Time base may not be retrIGGERED when TRIGEN bit = 1 |

Bits 11:8 – OPS3[3:0] CCP Interrupt Output Postscale Select bits⁽³⁾

| Value | Description |
|-------|---|
| 1111 | Interrupt every 16th time base period match |
| 1110 | Interrupt every 15th time base period match |
| . . . | |
| 0100 | Interrupt every 5th time base period match |
| 0011 | Interrupt every 4th time base period match or 4th input capture event |
| 0010 | Interrupt every 3rd time base period match or 3rd input capture event |
| 0001 | Interrupt every 2nd time base period match or 2nd input capture event |
| 0000 | Interrupt after each time base period match or input capture event |

Bit 7 – TRIGEN CCP Trigger Enable bit

| Value | Description |
|-------|--|
| 1 | Trigger operation of time base is enabled |
| 0 | Trigger operation of time base is disabled |

Bit 6 – ONESHOT One-Shot Trigger Mode Enable bit

| Value | Description |
|-------|---|
| 1 | One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0] |
| 0 | One-Shot Trigger mode is disabled |

Bit 5 – ALTSYNC CCP Clock Select bit

| Value | Description |
|-------|--|
| 1 | An alternate signal is used as the module synchronization output signal |
| 0 | The module synchronization output signal is the Time Base Reset/rollover event |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Bits 4:0 – SYNC[4:0] CCP Synchronization Source Select bits

| SYNC[4:0] | Synchronization Source |
|-----------|--|
| 11111 | None; timer with rollover on CCP1PR match or FFFFh |
| 11110 | Reserved |
| 11101 | Reserved |
| 11100 | Reserved |
| 11011 | A/D start conversion |
| 11010 | CMP3 trigger |
| 11001 | CMP2 trigger |
| 11000 | CMP1 trigger |
| 10111 | Reserved |
| 10110 | Reserved |
| 10101 | Reserved |
| 10100 | Reserved |
| 10011 | CLC4 output |
| 10010 | CLC3 output |
| 10001 | CLC2 output |
| 10000 | CLC1 output |
| 01111 | Reserved |
| 01101 | INT4 pin |
| 01100 | INT3 pin |
| 01011 | INT2 pin |
| 01010 | INT1 pin |
| 01001 | INT0 pin |
| 00110 | MCCP5 sync output |
| 00101 | MCCP4 sync output |
| 00100 | MCCP3 sync output |
| 00011 | MCCP2 sync output |
| 00010 | MCCP1 sync output |
| 00001 | MCCPx sync output |
| 00000 | MCCP1 timer sync output |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.3 CCP1 Control 2 Low Register

Name: CCP1CON2L
Offset: 0x270

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|-------|----|------|----|----|---|---|
| | PWMRSEN | ASDGM | | SSDG | | | | |
| Access | R/W | R/W | | R/W | | | | |
| Reset | 0 | 0 | | 0 | | | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | ASDG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – PWMRSEN CCP PWM Restart Enable bit

| Value | Description |
|-------|--|
| 1 | ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended |
| 0 | ASEVT bit must be cleared in software to resume PWM activity on output pins |

Bit 14 – ASDGM CCP Auto-Shutdown Gate Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Waits until next Time Base Reset or rollover for shutdown to occur |
| 0 | Shutdown event occurs immediately |

Bit 12 – SSDG CCP Software Shutdown/Gate Control bit

| Value | Description |
|-------|---|
| 1 | Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies) |
| 0 | Normal module operation |

Bits 7:0 – ASDG[7:0] CCP Auto-Shutdown/Gating Source Enable bits

| Value | Description |
|----------|-------------|
| 10000000 | OCFB |
| 01000000 | OCFA |
| 00100000 | CLC1 |
| 00010000 | MCCP2 |
| 00001000 | MCCP3 |
| 00000100 | CMP3 out |
| 00000010 | CMP2 out |
| 00000001 | CMP1 out |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.4 CCP1 Control 2 High Register

Name: CCP1CON2H
Offset: 0x272

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|-------------|-----|----------|-----|-----|
| | OENSYNC | | | OC[F:A]EN | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OENSYNC Output Enable Synchronization bit

| Value | Description |
|-------|---|
| 1 | Update by output enable bits occurs on the next Time Base Reset or rollover |
| 0 | Update by output enable bits occurs immediately |

Bits 13:8 – OC[F:A]EN Output Enable/Steering Control bits

| Value | Description |
|-------|---|
| 1 | OCx pin is controlled by the CCPx module and produces an output compare or PWM signal |
| 0 | OCx pin is not controlled by the CCPx module; the pin is available to the port logic or another peripheral multiplexed on the pin |

Bits 7:6 – ICGSM[1:0] Input Capture Gating Source Mode Control bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1) |
| 01 | One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0) |
| 00 | Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events |

Bits 4:3 – AUXOUT[1:0] Auxiliary Output Signal on Event Selection bits

| Value | Description |
|-------|--|
| 11 | Input capture or output compare event; no signal in Timer mode |
| 10 | Signal output depends on module operating mode |
| 01 | Time base rollover event (all modes) |
| 00 | Disabled |

Bits 2:0 – ICS[2:0] Input Capture Source Select bits

| Value | Description |
|-------|--------------------------|
| 111 | CLC4 |
| 110 | CLC3 |
| 101 | CLC2 |
| 100 | CLC1 |
| 011 | Comparator 3 |
| 010 | Comparator 2 |
| 001 | Comparator 1 |
| 000 | Input capture pin (ICM1) |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.5 CCP1 Control 3 Low Register

Name: CCP1CON3L

Offset: 0x274

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|---------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DT[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – DT[4:0] PWM Dead-Time Select bits

| Value | Description |
|--------|---|
| 111111 | Inserts 63 dead-time delay periods between complementary output signals |
| 111110 | Inserts 62 dead-time delay periods between complementary output signals |
| ... | |
| 000010 | Inserts 2 dead-time delay periods between complementary output signals |
| 000001 | Inserts 1 dead-time delay period between complementary output signals |
| 000000 | Dead-time logic is disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.6 CCP1 Control 3 High Register

Name: CCP1CON3H

Offset: 0x276

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|------------|-----|-----|----|-----------|-----|-----|
| | OETRIG | OSCNT[2:0] | | | | OUTM[2:0] | | |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|--------|--------|-------------|-----|-------------|-----|
| | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OETRIG CCP Dead-Time Select bit

| Value | Description |
|-------|--|
| 1 | For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered |
| 0 | Normal output pin operation |

Bits 14:12 – OSCNT[2:0] One-Shot Event Count bits

| Value | Description |
|-------|---|
| 111 | Extends one-shot event by 7 time base periods (8 time base periods total) |
| 110 | Extends one-shot event by 6 time base periods (7 time base periods total) |
| 101 | Extends one-shot event by 5 time base periods (6 time base periods total) |
| 100 | Extends one-shot event by 4 time base periods (5 time base periods total) |
| 011 | Extends one-shot event by 3 time base periods (4 time base periods total) |
| 010 | Extends one-shot event by 2 time base periods (3 time base periods total) |
| 001 | Extends one-shot event by 1 time base period (2 time base periods total) |
| 000 | Does not extend one-shot trigger event |

Bits 10:8 – OUTM[2:0] PWM Output Mode Control bits

| Value | Description |
|-------|-------------------------------|
| 111 | Reserved |
| 110 | Output Scan mode |
| 101 | Brush DC Output mode, forward |
| 100 | Brush DC Output mode, reverse |
| 011 | Reserved |
| 010 | Half-Bridge Output mode |
| 001 | Push-Pull Output mode |
| 000 | Steerable Single Output mode |

Bit 5 – POLACE CCP Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bit 4 – POLBDF CCP Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bits 3:2 – PSSACE[1:0] PWM Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are tri-stated when a shutdown event occurs |

Bits 1:0 – PSSBDF[1:0] PWM Output Pins, OCMxB, OCMxD and OCMxF, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are in a high-impedance state when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.7 CCP1 Status Register Low

Name: CCP1STATL
Offset: 0x278

Legend: C = Clearable bit; W1 = Write '1' Only bit

| | | | | | | | | |
|--------|----|----|----|----|----|--------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | ICGARM | | |
| Access | | | | | | W | | |
| Reset | | | | | | 0 | | |

| | | | | | | | | |
|--------|---------|-------|-------|-------|-------|-------|------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| Access | R | W1 | W1 | R/C | R/C | R/C | R/C | R/C |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – ICGARM Input Capture Gate Arm bit

A write of '1' to this location will arm the Input Capture x module for a one-shot gating event when ICGSM[1:0] = 01 or 10; read as '0'.

Bit 7 – CCPTRIG CCP Trigger Status bit

| Value | Description |
|-------|---|
| 1 | Timer has been triggered and is running |
| 0 | Timer has not been triggered and is held in Reset |

Bit 6 – TRSET CCP Trigger Set Request bit

Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

Bit 5 – TRCLR CCP Trigger Clear Request bit

Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

Bit 4 – ASEVT CCP Auto-Shutdown Event Status/Control bit

| Value | Description |
|-------|--|
| 1 | A shutdown event is in progress; CCP outputs are in the shutdown state |
| 0 | CCP outputs operate normally |

Bit 3 – SCEVT Single Edge Compare Event Status bit

| Value | Description |
|-------|--|
| 1 | A single edge compare event has occurred |
| 0 | A single edge compare event has not occurred |

Bit 2 – ICDIS Input Capture Disable bit

| Value | Description |
|-------|---|
| 1 | Event on input capture pin (ICM1) does not generate a capture event |
| 0 | Event on input capture pin will generate a capture event |

Bit 1 – ICOV Input Capture Buffer Overflow Status bit

| Value | Description |
|-------|--|
| 1 | The input capture FIFO buffer has overflowed |
| 0 | The input capture FIFO buffer has not overflowed |

Bit 0 – ICBNE Input Capture Buffer Status bit

| Value | Description |
|-------|---|
| 1 | Input capture buffer has data available |
| 0 | Input capture buffer is empty |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.8 CCP1 Time Base Low Register

Name: CCP1TMRL
Offset: 0x27C

| | | | | | | | | |
|--------|------------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRL[15:8] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRL[7:0] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRL[15:0] CCP1 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.9 CCP1 Time Base High Register

Name: CCP1TMRH
Offset: 0x27E

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRH[31:16] CCP1 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.10 CCP1 Period Low Register

Name: CCP1PRL
Offset: 0x280

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRL[15:0] CCP1 Period Low Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.11 CCP1 Period High Register

Name: CCP1PRH
Offset: 0x282

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRH[31:16] CCP1 Period High Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.12 CCP1 Primary Compare Register (Timer/Compare Modes Only)

Name: CCP1RA

Offset: 0x284

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP1 Primary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.13 CCP1 Secondary Compare Register (Timer/Compare Modes Only)

Name: CCP1RB

Offset: 0x288

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP1 Secondary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.14 CCP1 Capture Buffer Low Register (Capture Modes Only)

Name: CCP1BUFL
Offset: 0x28C

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[15:0] CCP1 Compare Buffer Value bits
Indicates the oldest captured time base value in the FIFO.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.15 CCP1 Capture Buffer High Register (Capture Modes Only)

Name: CCP1BUFH
Offset: 0x28E

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[31:16] CCP1 Compare Buffer Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.16 CCP2 Control 1 Low Register

Name: CCP2CON1L
Offset: 0x290

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|---------|--------|----------|-------------|-----|
| | CCPON | | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRPS[1:0] | | T32 | CCSEL | | MOD[3:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CCPON CCP Module Enable bit

| Value | Description |
|-------|---|
| 1 | Module is enabled with an operating mode specified by the MOD[3:0] control bits |
| 0 | Module is disabled |

Bit 13 – CCPSIDL CCP Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – CCPSLP CCP Sleep Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Module continues to operate in Sleep modes |
| 0 | Module does not operate in Sleep modes |

Bit 11 – TMRSYNC Time Base Clock Synchronization bit

| Value | Description |
|-------|---|
| 1 | Module time base clock is synchronized to the internal system clocks; timing restrictions apply |
| 0 | Module time base clock is not synchronized to the internal system clocks |

Bits 10:8 – CLKSEL[2:0] CCP Time Base Clock Select bits

| Value | Description |
|-------|------------------------|
| 111 | TCKIA pin |
| 110 | TCKIB pin |
| 101 | PLL clock |
| 100 | 2x peripheral clock |
| 011 | CLC2 |
| 010 | SOSC clock |
| 001 | Reference clock output |
| 000 | Peripheral clock |

Bits 7:6 – TMRPS[1:0] Time Base Prescale Select bits

| Value | Description |
|-------|----------------|
| 11 | 1:64 prescaler |
| 10 | 1:16 prescaler |
| 01 | 1:4 prescaler |
| 00 | 1:1 prescaler |

Bit 5 – T32 32-Bit Time Base Select bit

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 1 | Uses 32-bit time base for timer, single edge output compare or input capture function |
| 0 | Uses 16-bit time base for timer, single edge output compare or input capture function |

Bit 4 – CCSEL Capture/Compare Mode Select bit

| Value | Description |
|-------|---|
| 1 | Input capture peripheral |
| 0 | Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits) |

Bits 3:0 – MOD[3:0] CCP Mode Select bits

For CCSEL = 1 (Input Capture modes):

| Value | Description |
|-------|--|
| 1xxx | Reserved |
| 011x | Reserved |
| 0101 | Capture every 16th rising edge |
| 0100 | Capture every 4th rising edge |
| 0011 | Capture every rising and falling edge |
| 0010 | Capture every falling edge |
| 0001 | Capture every rising edge |
| 0000 | Capture every rising and falling edge (Edge Detect mode) |

For CCSEL = 0 (Output Compare/Timer modes):

| Value | Description |
|-------|--|
| 1111 | External Input mode: Pulse generator is disabled, source is selected by ICS[2:0] |
| 1110 | Reserved |
| 110x | Reserved |
| 10xx | Reserved |
| 0101 | Dual Edge Compare mode, buffered |
| 0100 | Dual Edge Compare mode |
| 0011 | 16-Bit/32-Bit Single Edge mode, toggles output on compare match |
| 0010 | 16-Bit/32-Bit Single Edge mode, drives output low on compare match |
| 0001 | 16-Bit/32-Bit Single Edge mode, drives output high on compare match |
| 0000 | 16-Bit/32-Bit Timer mode, output functions are disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.17 CCP2 Control 1 High Register

Name: CCP2CON1H
Offset: 0x292

Notes:

1. This control bit has no function in Input Capture modes.
2. This control bit has no function when TRIGEN = 0.
3. Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|--------|----|----|-----------|-----|-----|-----|
| | OPSSRC | RTRGEN | | | OPS3[3:0] | | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|---------|---------|-----|-----------|-----|-----|-----|
| | TRIGEN | ONESHOT | ALTSYNC | | SYNC[4:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OPSSRC Output Postscaler Source Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Output postscaler scales module trigger output events |
| 0 | Output postscaler scales time base interrupt events |

Bit 14 – RTRGEN Retrigger Enable bit⁽²⁾

| Value | Description |
|-------|--|
| 1 | Time base can be retrIGGERED when TRIGEN bit = 1 |
| 0 | Time base may not be retrIGGERED when TRIGEN bit = 1 |

Bits 11:8 – OPS3[3:0] CCP Interrupt Output Postscale Select bits⁽³⁾

| Value | Description |
|-------|---|
| 1111 | Interrupt every 16th time base period match |
| 1110 | Interrupt every 15th time base period match |
| . . . | |
| 0100 | Interrupt every 5th time base period match |
| 0011 | Interrupt every 4th time base period match or 4th input capture event |
| 0010 | Interrupt every 3rd time base period match or 3rd input capture event |
| 0001 | Interrupt every 2nd time base period match or 2nd input capture event |
| 0000 | Interrupt after each time base period match or input capture event |

Bit 7 – TRIGEN CCP Trigger Enable bit

| Value | Description |
|-------|--|
| 1 | Trigger operation of time base is enabled |
| 0 | Trigger operation of time base is disabled |

Bit 6 – ONESHOT One-Shot Trigger Mode Enable bit

| Value | Description |
|-------|---|
| 1 | One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0] |
| 0 | One-Shot Trigger mode is disabled |

Bit 5 – ALTSYNC CCP Clock Select bit

| Value | Description |
|-------|--|
| 1 | An alternate signal is used as the module synchronization output signal |
| 0 | The module synchronization output signal is the Time Base Reset/rollover event |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Bits 4:0 – SYNC[4:0] CCP Synchronization Source Select bits

| SYNC[4:0] | Synchronization Source |
|-----------|--|
| 11111 | None; timer with rollover on CCP2PR match or FFFFh |
| 11110 | Reserved |
| 11101 | Reserved |
| 11100 | Reserved |
| 11011 | A/D start conversion |
| 11010 | CMP3 trigger |
| 11001 | CMP2 trigger |
| 11000 | CMP1 trigger |
| 10111 | Reserved |
| 10110 | Reserved |
| 10101 | Reserved |
| 10100 | Reserved |
| 10011 | CLC4 output |
| 10010 | CLC3 output |
| 10001 | CLC2 output |
| 10000 | CLC1 output |
| 01111 | Reserved |
| 01101 | INT4 pin |
| 01100 | INT3 pin |
| 01011 | INT2 pin |
| 01010 | INT1 pin |
| 01001 | INT0 pin |
| 00110 | MCCP5 sync output |
| 00101 | MCCP4 sync output |
| 00100 | MCCP3 sync output |
| 00011 | MCCP2 sync output |
| 00010 | MCCP1 sync output |
| 00001 | MCCPx sync output |
| 00000 | MCCP2 timer sync output |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.18 CCP2 Control 2 Low Register

Name: CCP2CON2L
Offset: 0x294

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|-------|----|------|----|----|---|---|
| | PWMRSEN | ASDGM | | SSDG | | | | |
| Access | R/W | R/W | | R/W | | | | |
| Reset | 0 | 0 | | 0 | | | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | ASDG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – PWMRSEN CCP PWM Restart Enable bit

| Value | Description |
|-------|--|
| 1 | ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended |
| 0 | ASEVT bit must be cleared in software to resume PWM activity on output pins |

Bit 14 – ASDGM CCP Auto-Shutdown Gate Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Waits until next Time Base Reset or rollover for shutdown to occur |
| 0 | Shutdown event occurs immediately |

Bit 12 – SSDG CCP Software Shutdown/Gate Control bit

| Value | Description |
|-------|---|
| 1 | Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies) |
| 0 | Normal module operation |

Bits 7:0 – ASDG[7:0] CCP Auto-Shutdown/Gating Source Enable bits

| Value | Description |
|----------|-------------|
| 10000000 | OCFB |
| 01000000 | OCFA |
| 00100000 | CLC2 |
| 00010000 | MCCP1 |
| 00001000 | MCCP3 |
| 00000100 | CMP3 out |
| 00000010 | CMP2 out |
| 00000001 | CMP1 out |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.19 CCP2 Control 2 High Register

Name: CCP2CON2H
Offset: 0x296

Note:

1. OCFEN through OCBEN (bits[13:9]) are implemented in MCCP modules only.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-------------|-----|-----|----------|-----|-----|
| | OENSYNC | | OC[F:A]EN | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ICGSM[1:0] | | AUXOUT[1:0] | | | ICS[2:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OENSYNC Output Enable Synchronization bit

| Value | Description |
|-------|---|
| 1 | Update by output enable bits occurs on the next Time Base Reset or rollover |
| 0 | Update by output enable bits occurs immediately |

Bits 13:8 – OC[F:A]EN Output Enable/Steering Control bits⁽¹⁾

| Value | Description |
|-------|--|
| 1 | OCx pin is controlled by the CCP module and produces an output compare or PWM signal |
| 0 | OCx pin is not controlled by the CCP module; the pin is available to the port logic or another peripheral multiplexed on the pin |

Bits 7:6 – ICGSM[1:0] Input Capture Gating Source Mode Control bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1) |
| 01 | One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0) |
| 00 | Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events |

Bits 4:3 – AUXOUT[1:0] Auxiliary Output Signal on Event Selection bits

| Value | Description |
|-------|--|
| 11 | Input capture or output compare event; no signal in Timer mode |
| 10 | Signal output depends on module operating mode |
| 01 | Time base rollover event (all modes) |
| 00 | Disabled |

Bits 2:0 – ICS[2:0] Input Capture Source Select bits

| Value | Description |
|-------|--------------------------|
| 111 | CLC4 |
| 110 | CLC3 |
| 101 | CLC2 |
| 100 | CLC1 |
| 011 | Comparator 3 |
| 010 | Comparator 2 |
| 001 | Comparator 1 |
| 000 | Input capture pin (ICM2) |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.20 CCP2 Control 3 Low Register

Name: CCP2CON3L

Offset: 0x298

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|---------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DT[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – DT[4:0] PWM Dead-Time Select bits

| Value | Description |
|--------|---|
| 111111 | Inserts 63 dead-time delay periods between complementary output signals |
| 111110 | Inserts 62 dead-time delay periods between complementary output signals |
| ... | |
| 000010 | Inserts 2 dead-time delay periods between complementary output signals |
| 000001 | Inserts 1 dead-time delay period between complementary output signals |
| 000000 | Dead-time logic is disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.21 CCP2 Control 3 High Register

Name: CCP2CON3H

Offset: 0x29A

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|------------|-----|-----|----|-----------|-----|-----|
| | OETRIG | OSCNT[2:0] | | | | OUTM[2:0] | | |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|--------|--------|-------------|-----|-------------|-----|
| | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OETRIG CCP Dead-Time Select bit

| Value | Description |
|-------|--|
| 1 | For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered |
| 0 | Normal output pin operation |

Bits 14:12 – OSCNT[2:0] One-Shot Event Count bits

| Value | Description |
|-------|---|
| 111 | Extends one-shot event by 7 time base periods (8 time base periods total) |
| 110 | Extends one-shot event by 6 time base periods (7 time base periods total) |
| 101 | Extends one-shot event by 5 time base periods (6 time base periods total) |
| 100 | Extends one-shot event by 4 time base periods (5 time base periods total) |
| 011 | Extends one-shot event by 3 time base periods (4 time base periods total) |
| 010 | Extends one-shot event by 2 time base periods (3 time base periods total) |
| 001 | Extends one-shot event by 1 time base period (2 time base periods total) |
| 000 | Does not extend one-shot trigger event |

Bits 10:8 – OUTM[2:0] PWM Output Mode Control bits

| Value | Description |
|-------|-------------------------------|
| 111 | Reserved |
| 110 | Output Scan mode |
| 101 | Brush DC Output mode, forward |
| 100 | Brush DC Output mode, reverse |
| 011 | Reserved |
| 010 | Half-Bridge Output mode |
| 001 | Push-Pull Output mode |
| 000 | Steerable Single Output mode |

Bit 5 – POLACE CCP Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bit 4 – POLBDF CCP Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bits 3:2 – PSSACE[1:0] PWM Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are tri-stated when a shutdown event occurs |

Bits 1:0 – PSSBDF[1:0] PWM Output Pins, OCMxB, OCMxD and OCMxF, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are in a high-impedance state when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.22 CCP2 Status Register Low

Name: CCP2STATL
Offset: 0x29C

Legend: C = Clearable bit; W1 = Write '1' Only bit

| | | | | | | | | |
|--------|----|----|----|----|----|--------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | ICGARM | | |
| Access | | | | | | W | | |
| Reset | | | | | | 0 | | |

| | | | | | | | | |
|--------|---------|-------|-------|-------|-------|-------|------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| Access | R | W1 | W1 | R/C | R/C | R/C | R/C | R/C |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – ICGARM Input Capture Gate Arm bit

A write of '1' to this location will arm the Input Capture x module for a one-shot gating event when ICGSM[1:0] = 01 or 10; read as '0'.

Bit 7 – CCPTRIG CCP Trigger Status bit

| Value | Description |
|-------|---|
| 1 | Timer has been triggered and is running |
| 0 | Timer has not been triggered and is held in Reset |

Bit 6 – TRSET CCP Trigger Set Request bit

Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

Bit 5 – TRCLR CCP Trigger Clear Request bit

Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

Bit 4 – ASEVT CCP Auto-Shutdown Event Status/Control bit

| Value | Description |
|-------|--|
| 1 | A shutdown event is in progress; CCP outputs are in the shutdown state |
| 0 | CCP outputs operate normally |

Bit 3 – SCEVT Single Edge Compare Event Status bit

| Value | Description |
|-------|--|
| 1 | A single edge compare event has occurred |
| 0 | A single edge compare event has not occurred |

Bit 2 – ICDIS Input Capture Disable bit

| Value | Description |
|-------|---|
| 1 | Event on input capture pin (ICM2) does not generate a capture event |
| 0 | Event on input capture pin will generate a capture event |

Bit 1 – ICOV Input Capture Buffer Overflow Status bit

| Value | Description |
|-------|--|
| 1 | The input capture FIFO buffer has overflowed |
| 0 | The input capture FIFO buffer has not overflowed |

Bit 0 – ICBNE Input Capture Buffer Status bit

| Value | Description |
|-------|---|
| 1 | Input capture buffer has data available |
| 0 | Input capture buffer is empty |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.23 CCP2 Time Base Low Register

Name: CCP2TMRL
Offset: 0x2A0

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRL[15:0] CCP2 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.24 CCP2 Time Base High Register

Name: CCP2TMRH

Offset: 0x2A2

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRH[31:16] CCP2 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.25 CCP2 Period Low Register

Name: CCP2PRL
Offset: 0x2A4

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRL[15:0] CCP2 Period Low Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.26 CCP2 Period High Register

Name: CCP2PRH
Offset: 0x2A6

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRH[31:16] CCP2 Period High Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.27 CCP2 Primary Compare Register (Timer/Compare Modes Only)

Name: CCP2RA
Offset: 0x2A8

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP2 Primary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.28 CCP2 Secondary Compare Register (Timer/Compare Modes Only)

Name: CCP2RB

Offset: 0x2AC

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP2 Secondary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.29 CCP3 Capture Buffer Low Register (Capture Modes Only)

Name: CCP3BUFL
Offset: 0x2D4

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[15:0] CCP3 Compare Buffer Value bits
Indicates the oldest captured time base value in the FIFO.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.30 CCP3 Capture Buffer High Register (Capture Modes Only)

Name: CCP3BUFH
Offset: 0x2D6

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[31:16] CCP3 Compare Buffer Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.31 CCP3 Control 1 Low Register

Name: CCP3CON1L
Offset: 0x2B4

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|---------|--------|----------|-------------|-----|
| | CCPON | | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRPS[1:0] | | T32 | CCSEL | | MOD[3:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CCPON CCP Module Enable bit

| Value | Description |
|-------|---|
| 1 | Module is enabled with an operating mode specified by the MOD[3:0] control bits |
| 0 | Module is disabled |

Bit 13 – CCPSIDL CCP Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – CCPSLP CCP Sleep Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Module continues to operate in Sleep modes |
| 0 | Module does not operate in Sleep modes |

Bit 11 – TMRSYNC Time Base Clock Synchronization bit

| Value | Description |
|-------|---|
| 1 | Module time base clock is synchronized to the internal system clocks; timing restrictions apply |
| 0 | Module time base clock is not synchronized to the internal system clocks |

Bits 10:8 – CLKSEL[2:0] CCP Time Base Clock Select bits

| Value | Description |
|-------|------------------------|
| 111 | TCKIA pin |
| 110 | TCKIB pin |
| 101 | PLL clock |
| 100 | 2x peripheral clock |
| 011 | CLC3 |
| 010 | SOSC clock |
| 001 | Reference clock output |
| 000 | Peripheral clock |

Bits 7:6 – TMRPS[1:0] Time Base Prescale Select bits

| Value | Description |
|-------|----------------|
| 11 | 1:64 prescaler |
| 10 | 1:16 prescaler |
| 01 | 1:4 prescaler |
| 00 | 1:1 prescaler |

Bit 5 – T32 32-Bit Time Base Select bit

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 1 | Uses 32-bit time base for timer, single edge output compare or input capture function |
| 0 | Uses 16-bit time base for timer, single edge output compare or input capture function |

Bit 4 – CCSEL Capture/Compare Mode Select bit

| Value | Description |
|-------|---|
| 1 | Input capture peripheral |
| 0 | Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits) |

Bits 3:0 – MOD[3:0] CCP Mode Select bits

For CCSEL = 1 (Input Capture modes):

| Value | Description |
|-------|--|
| 1xxx | Reserved |
| 011x | Reserved |
| 0101 | Capture every 16th rising edge |
| 0100 | Capture every 4th rising edge |
| 0011 | Capture every rising and falling edge |
| 0010 | Capture every falling edge |
| 0001 | Capture every rising edge |
| 0000 | Capture every rising and falling edge (Edge Detect mode) |

For CCSEL = 0 (Output Compare/Timer modes):

| Value | Description |
|-------|--|
| 1111 | External Input mode: Pulse generator is disabled, source is selected by ICS[2:0] |
| 1110 | Reserved |
| 110x | Reserved |
| 10xx | Reserved |
| 0101 | Dual Edge Compare mode, buffered |
| 0100 | Dual Edge Compare mode |
| 0011 | 16-Bit/32-Bit Single Edge mode, toggles output on compare match |
| 0010 | 16-Bit/32-Bit Single Edge mode, drives output low on compare match |
| 0001 | 16-Bit/32-Bit Single Edge mode, drives output high on compare match |
| 0000 | 16-Bit/32-Bit Timer mode, output functions are disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.32 CCP3 Control 1 High Register

Name: CCP3CON1H
Offset: 0x2B6

Notes:

1. This control bit has no function in Input Capture modes.
2. This control bit has no function when TRIGEN = 0.
3. Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|--------|----|----|-----------|-----|-----|-----|
| | OPSSRC | RTRGEN | | | OPS3[3:0] | | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|---------|---------|-----|-----------|-----|-----|-----|
| | TRIGEN | ONESHOT | ALTSYNC | | SYNC[4:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OPSSRC Output Postscaler Source Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Output postscaler scales module trigger output events |
| 0 | Output postscaler scales time base interrupt events |

Bit 14 – RTRGEN Retrigger Enable bit⁽²⁾

| Value | Description |
|-------|--|
| 1 | Time base can be retrIGGERED when TRIGEN bit = 1 |
| 0 | Time base may not be retrIGGERED when TRIGEN bit = 1 |

Bits 11:8 – OPS3[3:0] CCP Interrupt Output Postscale Select bits⁽³⁾

| Value | Description |
|-------|---|
| 1111 | Interrupt every 16th time base period match |
| 1110 | Interrupt every 15th time base period match |
| . . . | |
| 0100 | Interrupt every 5th time base period match |
| 0011 | Interrupt every 4th time base period match or 4th input capture event |
| 0010 | Interrupt every 3rd time base period match or 3rd input capture event |
| 0001 | Interrupt every 2nd time base period match or 2nd input capture event |
| 0000 | Interrupt after each time base period match or input capture event |

Bit 7 – TRIGEN CCP Trigger Enable bit

| Value | Description |
|-------|--|
| 1 | Trigger operation of time base is enabled |
| 0 | Trigger operation of time base is disabled |

Bit 6 – ONESHOT One-Shot Trigger Mode Enable bit

| Value | Description |
|-------|---|
| 1 | One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0] |
| 0 | One-Shot Trigger mode is disabled |

Bit 5 – ALTSYNC CCP Clock Select bit

| Value | Description |
|-------|--|
| 1 | An alternate signal is used as the module synchronization output signal |
| 0 | The module synchronization output signal is the Time Base Reset/rollover event |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Bits 4:0 – SYNC[4:0] CCP Synchronization Source Select bits

| SYNC[4:0] | Synchronization Source |
|-----------|--|
| 11111 | None; timer with rollover on CCP3PR match or FFFFh |
| 11110 | Reserved |
| 11101 | Reserved |
| 11100 | Reserved |
| 11011 | A/D start conversion |
| 11010 | CMP3 trigger |
| 11001 | CMP2 trigger |
| 11000 | CMP1 trigger |
| 10111 | Reserved |
| 10110 | Reserved |
| 10101 | Reserved |
| 10100 | Reserved |
| 10011 | CLC4 output |
| 10010 | CLC3 output |
| 10001 | CLC2 output |
| 10000 | CLC1 output |
| 01111 | Reserved |
| 01101 | INT4 pin |
| 01100 | INT3 pin |
| 01011 | INT2 pin |
| 01010 | INT1 pin |
| 01001 | INT0 pin |
| 00110 | MCCP5 sync output |
| 00101 | MCCP4 sync output |
| 00100 | MCCP3 sync output |
| 00011 | MCCP2 sync output |
| 00010 | MCCP1 sync output |
| 00001 | MCCPx sync output |
| 00000 | MCCP3 timer sync output |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.33 CCP3 Control 2 Low Register

Name: CCP3CON2L
Offset: 0x2B8

| | | | | | | | | |
|--------|---------|-------|----|------|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PWMRSEN | ASDGM | | SSDG | | | | |
| Access | R/W | R/W | | R/W | | | | |
| Reset | 0 | 0 | | 0 | | | | |

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ASDG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – PWMRSEN CCP PWM Restart Enable bit

| Value | Description |
|-------|--|
| 1 | ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended |
| 0 | ASEVT bit must be cleared in software to resume PWM activity on output pins |

Bit 14 – ASDGM CCP Auto-Shutdown Gate Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Waits until next Time Base Reset or rollover for shutdown to occur |
| 0 | Shutdown event occurs immediately |

Bit 12 – SSDG CCP Software Shutdown/Gate Control bit

| Value | Description |
|-------|---|
| 1 | Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies) |
| 0 | Normal module operation |

Bits 7:0 – ASDG[7:0] CCP Auto-Shutdown/Gating Source Enable bits

| Value | Description |
|----------|-------------|
| 10000000 | OCFB |
| 01000000 | OCFA |
| 00100000 | CLC3 |
| 00010000 | MCCP1 |
| 00001000 | MCCP4 |
| 00000100 | CMP3 out |
| 00000010 | CMP2 out |
| 00000001 | CMP1 out |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.34 CCP3 Control 2 High Register

Name: CCP3CON2H
Offset: 0x2BA

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|----|-----|-----------|-----|-----|-----|-----|
| | OENSYNC | | | OC[F:A]EN | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------------|-----|---|-------------|-----|-----|----------|-----|
| | ICGSM[1:0] | | | AUXOUT[1:0] | | | ICS[2:0] | |
| Access | R/W | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OENSYNC Output Enable Synchronization bit

| Value | Description |
|-------|---|
| 1 | Update by output enable bits occurs on the next Time Base Reset or rollover |
| 0 | Update by output enable bits occurs immediately |

Bits 13:8 – OC[F:A]EN Output Enable/Steering Control bits

| Value | Description |
|-------|--|
| 1 | OCx pin is controlled by the CCP module and produces an output compare or PWM signal |
| 0 | OCx pin is not controlled by the CCP module; the pin is available to the port logic or another peripheral multiplexed on the pin |

Bits 7:6 – ICGSM[1:0] Input Capture Gating Source Mode Control bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1) |
| 01 | One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0) |
| 00 | Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events |

Bits 4:3 – AUXOUT[1:0] Auxiliary Output Signal on Event Selection bits

| Value | Description |
|-------|--|
| 11 | Input capture or output compare event; no signal in Timer mode |
| 10 | Signal output depends on module operating mode |
| 01 | Time base rollover event (all modes) |
| 00 | Disabled |

Bits 2:0 – ICS[2:0] Input Capture Source Select bits

| Value | Description |
|-------|--------------------------|
| 111 | CLC4 |
| 110 | CLC3 |
| 101 | CLC2 |
| 100 | CLC1 |
| 011 | Comparator 3 |
| 010 | Comparator 2 |
| 001 | Comparator 1 |
| 000 | Input capture pin (ICM3) |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.35 CCP3 Control 3 Low Register

Name: CCP3CON3L

Offset: 0x2BC

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|---------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DT[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – DT[4:0] PWM Dead-Time Select bits

| Value | Description |
|--------|---|
| 111111 | Inserts 63 dead-time delay periods between complementary output signals |
| 111110 | Inserts 62 dead-time delay periods between complementary output signals |
| ... | |
| 000010 | Inserts 2 dead-time delay periods between complementary output signals |
| 000001 | Inserts 1 dead-time delay period between complementary output signals |
| 000000 | Dead-time logic is disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.36 CCP3 Control 3 High Register

Name: CCP3CON3H

Offset: 0x2BE

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|------------|-----|-----|----|-----------|-----|-----|
| | OETRIG | OSCNT[2:0] | | | | OUTM[2:0] | | |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|--------|--------|-------------|-----|-------------|-----|
| | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OETRIG CCP Dead-Time Select bit

| Value | Description |
|-------|--|
| 1 | For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered |
| 0 | Normal output pin operation |

Bits 14:12 – OSCNT[2:0] One-Shot Event Count bits

| Value | Description |
|-------|---|
| 111 | Extends one-shot event by 7 time base periods (8 time base periods total) |
| 110 | Extends one-shot event by 6 time base periods (7 time base periods total) |
| 101 | Extends one-shot event by 5 time base periods (6 time base periods total) |
| 100 | Extends one-shot event by 4 time base periods (5 time base periods total) |
| 011 | Extends one-shot event by 3 time base periods (4 time base periods total) |
| 010 | Extends one-shot event by 2 time base periods (3 time base periods total) |
| 001 | Extends one-shot event by 1 time base period (2 time base periods total) |
| 000 | Does not extend one-shot trigger event |

Bits 10:8 – OUTM[2:0] PWM Output Mode Control bits

| Value | Description |
|-------|-------------------------------|
| 111 | Reserved |
| 110 | Output Scan mode |
| 101 | Brush DC Output mode, forward |
| 100 | Brush DC Output mode, reverse |
| 011 | Reserved |
| 010 | Half-Bridge Output mode |
| 001 | Push-Pull Output mode |
| 000 | Steerable Single Output mode |

Bit 5 – POLACE CCP Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bit 4 – POLBDF CCP Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bits 3:2 – PSSACE[1:0] PWM Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are tri-stated when a shutdown event occurs |

Bits 1:0 – PSSBDF[1:0] PWM Output Pins, OCMxB, OCMxD and OCMxF, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are in a high-impedance state when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.37 CCP3 Status Register Low

Name: CCP3STATL
Offset: 0x2C0

Legend: C = Clearable bit; W1 = Write '1' Only bit

| | | | | | | | | |
|--------|----|----|----|----|----|--------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | ICGARM | | |
| Access | | | | | | W | | |
| Reset | | | | | | 0 | | |

| | | | | | | | | |
|--------|---------|-------|-------|-------|-------|-------|------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| Access | R | W1 | W1 | R/C | R/C | R/C | R/C | R/C |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – ICGARM Input Capture Gate Arm bit

A write of '1' to this location will arm the Input Capture x module for a one-shot gating event when ICGSM[1:0] = 01 or 10; read as '0'.

Bit 7 – CCPTRIG CCP Trigger Status bit

| Value | Description |
|-------|---|
| 1 | Timer has been triggered and is running |
| 0 | Timer has not been triggered and is held in Reset |

Bit 6 – TRSET CCP Trigger Set Request bit

Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

Bit 5 – TRCLR CCP Trigger Clear Request bit

Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

Bit 4 – ASEVT CCP Auto-Shutdown Event Status/Control bit

| Value | Description |
|-------|--|
| 1 | A shutdown event is in progress; CCP outputs are in the shutdown state |
| 0 | CCP outputs operate normally |

Bit 3 – SCEVT Single Edge Compare Event Status bit

| Value | Description |
|-------|--|
| 1 | A single edge compare event has occurred |
| 0 | A single edge compare event has not occurred |

Bit 2 – ICDIS Input Capture Disable bit

| Value | Description |
|-------|---|
| 1 | Event on input capture pin (ICM3) does not generate a capture event |
| 0 | Event on input capture pin will generate a capture event |

Bit 1 – ICOV Input Capture Buffer Overflow Status bit

| Value | Description |
|-------|--|
| 1 | The input capture FIFO buffer has overflowed |
| 0 | The input capture FIFO buffer has not overflowed |

Bit 0 – ICBNE Input Capture Buffer Status bit

| Value | Description |
|-------|---|
| 1 | Input capture buffer has data available |
| 0 | Input capture buffer is empty |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.38 CCP3 Time Base Low Register

Name: CCP3TMRL
Offset: 0x2C4

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRL[15:0] CCP3 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.39 CCP3 Time Base High Register

Name: CCP3TMRH
Offset: 0x2C6

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRH[31:16] CCP3 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.40 CCP3 Period Low Register

Name: CCP3PRL
Offset: 0x2C8

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRL[15:0] CCP3 Period Low Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.41 CCP3 Period High Register

Name: CCP3PRH
Offset: 0x2CA

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRH[31:16] CCP3 Period High Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.42 CCP3 Primary Compare Register (Timer/Compare Modes Only)

Name: CCP3RA

Offset: 0x2CC

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP3 Primary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.43 CCP3 Secondary Compare Register (Timer/Compare Modes Only)

Name: CCP3RB

Offset: 0x2D0

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP3 Secondary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.44 CCP4 Control 1 Low Register

Name: CCP4CON1L
Offset: 0x300

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|---------|--------|----------|-------------|-----|
| | CCPON | | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRPS[1:0] | | T32 | CCSEL | | MOD[3:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CCPON CCP Module Enable bit

| Value | Description |
|-------|---|
| 1 | Module is enabled with an operating mode specified by the MOD[3:0] control bits |
| 0 | Module is disabled |

Bit 13 – CCPSIDL CCP Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – CCPSLP CCP Sleep Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Module continues to operate in Sleep modes |
| 0 | Module does not operate in Sleep modes |

Bit 11 – TMRSYNC Time Base Clock Synchronization bit

| Value | Description |
|-------|---|
| 1 | Module time base clock is synchronized to the internal system clocks; timing restrictions apply |
| 0 | Module time base clock is not synchronized to the internal system clocks |

Bits 10:8 – CLKSEL[2:0] CCP Time Base Clock Select bits

| Value | Description |
|-------|------------------------|
| 111 | TCKIA pin |
| 110 | TCKIB pin |
| 101 | PLL clock |
| 100 | 2x peripheral clock |
| 011 | CLC4 |
| 010 | SOSC clock |
| 001 | Reference clock output |
| 000 | Peripheral clock |

Bits 7:6 – TMRPS[1:0] Time Base Prescale Select bits

| Value | Description |
|-------|----------------|
| 11 | 1:64 prescaler |
| 10 | 1:16 prescaler |
| 01 | 1:4 prescaler |
| 00 | 1:1 prescaler |

Bit 5 – T32 32-Bit Time Base Select bit

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 1 | Uses 32-bit time base for timer, single edge output compare or input capture function |
| 0 | Uses 16-bit time base for timer, single edge output compare or input capture function |

Bit 4 – CCSEL Capture/Compare Mode Select bit

| Value | Description |
|-------|---|
| 1 | Input capture peripheral |
| 0 | Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits) |

Bits 3:0 – MOD[3:0] CCP Mode Select bits

For CCSEL = 1 (Input Capture modes):

| Value | Description |
|-------|--|
| 1xxx | Reserved |
| 011x | Reserved |
| 0101 | Capture every 16th rising edge |
| 0100 | Capture every 4th rising edge |
| 0011 | Capture every rising and falling edge |
| 0010 | Capture every falling edge |
| 0001 | Capture every rising edge |
| 0000 | Capture every rising and falling edge (Edge Detect mode) |

For CCSEL = 0 (Output Compare/Timer modes):

| Value | Description |
|-------|--|
| 1111 | External Input mode: Pulse generator is disabled, source is selected by ICS[2:0] |
| 1110 | Reserved |
| 110x | Reserved |
| 10xx | Reserved |
| 0111 | Reserved |
| 0110 | Reserved |
| 0101 | Dual Edge Compare mode, buffered |
| 0100 | Dual Edge Compare mode |
| 0011 | 16-Bit/32-Bit Single Edge mode, toggles output on compare match |
| 0010 | 16-Bit/32-Bit Single Edge mode, drives output low on compare match |
| 0001 | 16-Bit/32-Bit Single Edge mode, drives output high on compare match |
| 0000 | 16-Bit/32-Bit Timer mode, output functions are disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.45 CCP4 Control 1 High Register

Name: CCP4CON1H

Offset: 0x302

Notes:

1. This control bit has no function in Input Capture modes.
2. This control bit has no function when TRIGEN = 0.
3. Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|--------|----|----|-----------|-----|-----|-----|
| | OPSSRC | RTRGEN | | | OPS3[3:0] | | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|---------|---------|-----|-----------|-----|-----|-----|
| | TRIGEN | ONESHOT | ALTSYNC | | SYNC[4:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OPSSRC Output Postscaler Source Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Output postscaler scales module trigger output events |
| 0 | Output postscaler scales time base interrupt events |

Bit 14 – RTRGEN Retrigger Enable bit⁽²⁾

| Value | Description |
|-------|--|
| 1 | Time base can be retrIGGERED when TRIGEN bit = 1 |
| 0 | Time base may not be retrIGGERED when TRIGEN bit = 1 |

Bits 11:8 – OPS3[3:0] CCP Interrupt Output Postscale Select bits⁽³⁾

| Value | Description |
|-------|---|
| 1111 | Interrupt every 16th time base period match |
| 1110 | Interrupt every 15th time base period match |
| . . . | |
| 0100 | Interrupt every 5th time base period match |
| 0011 | Interrupt every 4th time base period match or 4th input capture event |
| 0010 | Interrupt every 3rd time base period match or 3rd input capture event |
| 0001 | Interrupt every 2nd time base period match or 2nd input capture event |
| 0000 | Interrupt after each time base period match or input capture event |

Bit 7 – TRIGEN CCP Trigger Enable bit

| Value | Description |
|-------|--|
| 1 | Trigger operation of time base is enabled |
| 0 | Trigger operation of time base is disabled |

Bit 6 – ONESHOT One-Shot Trigger Mode Enable bit

| Value | Description |
|-------|---|
| 1 | One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0] |
| 0 | One-Shot Trigger mode is disabled |

Bit 5 – ALTSYNC CCP Clock Select bit

| Value | Description |
|-------|--|
| 1 | An alternate signal is used as the module synchronization output signal |
| 0 | The module synchronization output signal is the Time Base Reset/rollover event |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Bits 4:0 – SYNC[4:0] CCP Synchronization Source Select bits

| SYNC[4:0] | Synchronization Source |
|-----------|--|
| 11111 | None; timer with rollover on CCP4PR match or FFFFh |
| 11110 | Reserved |
| 11101 | Reserved |
| 11100 | Reserved |
| 11011 | A/D start conversion |
| 11010 | CMP3 trigger |
| 11001 | CMP2 trigger |
| 11000 | CMP1 trigger |
| 10111 | Reserved |
| 10110 | Reserved |
| 10101 | Reserved |
| 10100 | Reserved |
| 10011 | CLC4 output |
| 10010 | CLC3 output |
| 10001 | CLC2 output |
| 10000 | CLC1 output |
| 01111 | Reserved |
| 01101 | INT4 pin |
| 01100 | INT3 pin |
| 01011 | INT2 pin |
| 01010 | INT1 pin |
| 01001 | INT0 pin |
| 00110 | MCCP5 sync output |
| 00101 | MCCP4 sync output |
| 00100 | MCCP3 sync output |
| 00011 | MCCP2 sync output |
| 00010 | MCCP1 sync output |
| 00001 | MCCPx sync output |
| 00000 | MCCP4 timer sync output |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.46 CCP4 Control 2 Low Register

Name: CCP4CON2L
Offset: 0x304

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|-------|----|------|----|----|---|---|
| | PWMRSEN | ASDGM | | SSDG | | | | |
| Access | R/W | R/W | | R/W | | | | |
| Reset | 0 | 0 | | 0 | | | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | ASDG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – PWMRSEN CCP PWM Restart Enable bit

| Value | Description |
|-------|--|
| 1 | ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended |
| 0 | ASEVT bit must be cleared in software to resume PWM activity on output pins |

Bit 14 – ASDGM CCP Auto-Shutdown Gate Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Waits until the next Time Base Reset or rollover for shutdown to occur |
| 0 | Shutdown event occurs immediately |

Bit 12 – SSDG CCP Software Shutdown/Gate Control bit

| Value | Description |
|-------|---|
| 1 | Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies) |
| 0 | Normal module operation |

Bits 7:0 – ASDG[7:0] CCP Auto-Shutdown/Gating Source Enable bits

| Value | Description |
|----------|-------------|
| 10000000 | OCFB |
| 01000000 | OCFA |
| 00100000 | CLC4 |
| 00010000 | MCCP1 |
| 00001000 | MCCP5 |
| 00000100 | CMP3 out |
| 00000010 | CMP2 out |
| 00000001 | CMP1 out |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.47 CCP4 Control 2 High Register

Name: CCP4CON2H
Offset: 0x306

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|-------------|-----|----------|-----|-----|
| | OENSYNC | | | OC[F:A]EN | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ICGSM[1:0] | | | AUXOUT[1:0] | | ICS[2:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OENSYNC Output Enable Synchronization bit

| Value | Description |
|-------|---|
| 1 | Update by output enable bits occurs on the next Time Base Reset or rollover |
| 0 | Update by output enable bits occurs immediately |

Bits 13:8 – OC[F:A]EN Output Enable/Steering Control bits

| Value | Description |
|-------|---|
| 1 | OCx pin is controlled by the CCPx module and produces an output compare or PWM signal |
| 0 | OCx pin is not controlled by the CCPx module; the pin is available to the port logic or another peripheral multiplexed on the pin |

Bits 7:6 – ICGSM[1:0] Input Capture Gating Source Mode Control bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1) |
| 01 | One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0) |
| 00 | Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events |

Bits 4:3 – AUXOUT[1:0] Auxiliary Output Signal on Event Selection bits

| Value | Description |
|-------|--|
| 11 | Input capture or output compare event; no signal in Timer mode |
| 10 | Signal output depends on module operating mode |
| 01 | Time base rollover event (all modes) |
| 00 | Disabled |

Bits 2:0 – ICS[2:0] Input Capture Source Select bits

| Value | Description |
|-------|--------------------------|
| 111 | CLC4 |
| 110 | CLC3 |
| 101 | CLC2 |
| 100 | CLC1 |
| 011 | Comparator 3 |
| 010 | Comparator 2 |
| 001 | Comparator 1 |
| 000 | Input capture pin (ICM4) |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.48 CCP4 Control 3 Low Register

Name: CCP4CON3L

Offset: 0x308

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|---------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DT[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – DT[4:0] PWM Dead-Time Select bits

| Value | Description |
|--------|---|
| 111111 | Inserts 63 dead-time delay periods between complementary output signals |
| 111110 | Inserts 62 dead-time delay periods between complementary output signals |
| ... | |
| 000010 | Inserts 2 dead-time delay periods between complementary output signals |
| 000001 | Inserts 1 dead-time delay period between complementary output signals |
| 000000 | Dead-time logic is disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.49 CCP4 Control 3 High Register

Name: CCP4CON3H
Offset: 0x30A

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|------------|-----|-----|----|-----|-----------|-----|
| | OETRIG | OSCNT[2:0] | | | | | OUTM[2:0] | |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|--------|--------|-------------|-----|-------------|-----|
| | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OETRIG CCP Dead-Time Select bit

| Value | Description |
|-------|--|
| 1 | For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered |
| 0 | Normal output pin operation |

Bits 14:12 – OSCNT[2:0] One-Shot Event Count bits

| Value | Description |
|-------|---|
| 111 | Extends one-shot event by 7 time base periods (8 time base periods total) |
| 110 | Extends one-shot event by 6 time base periods (7 time base periods total) |
| 101 | Extends one-shot event by 5 time base periods (6 time base periods total) |
| 100 | Extends one-shot event by 4 time base periods (5 time base periods total) |
| 011 | Extends one-shot event by 3 time base periods (4 time base periods total) |
| 010 | Extends one-shot event by 2 time base periods (3 time base periods total) |
| 001 | Extends one-shot event by 1 time base period (2 time base periods total) |
| 000 | Does not extend one-shot trigger event |

Bits 10:8 – OUTM[2:0] PWM Output Mode Control bits

| Value | Description |
|-------|-------------------------------|
| 111 | Reserved |
| 110 | Output Scan mode |
| 101 | Brush DC Output mode, forward |
| 100 | Brush DC Output mode, reverse |
| 011 | Reserved |
| 010 | Half-Bridge Output mode |
| 001 | Push-Pull Output mode |
| 000 | Steerable Single Output mode |

Bit 5 – POLACE CCP Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bit 4 – POLBDF CCP Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bits 3:2 – PSSACE[1:0] PWM Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are tri-stated when a shutdown event occurs |

Bits 1:0 – PSSBDF[1:0] PWM Output Pins, OCMxB, OCMxD and OCMxF, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are in a high-impedance state when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.50 CCP4 Status Register Low

Name: CCP4STATL
Offset: 0x30C

Legend: C = Clearable bit; W1 = Write '1' Only bit

| | | | | | | | | |
|--------|----|----|----|----|----|--------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | ICGARM | | |
| Access | | | | | | W | | |
| Reset | | | | | | 0 | | |

| | | | | | | | | |
|--------|---------|-------|-------|-------|-------|-------|------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| Access | R | W1 | W1 | R/C | R/C | R/C | R/C | R/C |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – ICGARM Input Capture Gate Arm bit

A write of '1' to this location will arm the input capture module for a one-shot gating event when ICGSM[1:0] = 01 or 10; read as '0'.

Bit 7 – CCPTRIG CCP Trigger Status bit

| Value | Description |
|-------|---|
| 1 | Timer has been triggered and is running |
| 0 | Timer has not been triggered and is held in Reset |

Bit 6 – TRSET CCP Trigger Set Request bit

Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

Bit 5 – TRCLR CCP Trigger Clear Request bit

Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

Bit 4 – ASEVT CCP Auto-Shutdown Event Status/Control bit

| Value | Description |
|-------|--|
| 1 | A shutdown event is in progress; CCP outputs are in the shutdown state |
| 0 | CCP outputs operate normally |

Bit 3 – SCEVT Single Edge Compare Event Status bit

| Value | Description |
|-------|--|
| 1 | A single edge compare event has occurred |
| 0 | A single edge compare event has not occurred |

Bit 2 – ICDIS Input Capture Disable bit

| Value | Description |
|-------|---|
| 1 | Event on input capture pin (ICM4) does not generate a capture event |
| 0 | Event on input capture pin will generate a capture event |

Bit 1 – ICOV Input Capture Buffer Overflow Status bit

| Value | Description |
|-------|--|
| 1 | The input capture FIFO buffer has overflowed |
| 0 | The input capture FIFO buffer has not overflowed |

Bit 0 – ICBNE Input Capture Buffer Status bit

| Value | Description |
|-------|---|
| 1 | Input capture buffer has data available |
| 0 | Input capture buffer is empty |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.51 CCP4 Time Base Low Register

Name: CCP4TMRL
Offset: 0x310

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRL[15:0] CCP4 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.52 CCP4 Time Base High Register

Name: CCP4TMRH
Offset: 0x312

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRH[31:16] CCP4 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.53 CCP4 Period Low Register

Name: CCP4PRL

Offset: 0x314

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | PRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRL[15:0] CCP4 Period Low Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.54 CCP4 Period High Register

Name: CCP4PRH
Offset: 0x316

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRH[31:16] CCP4 Period High Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.55 CCP4 Primary Compare Register (Timer/Compare Modes Only)

Name: CCP4RA

Offset: 0x318

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP4 Primary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.56 CCP4 Secondary Compare Register (Timer/Compare Modes Only)

Name: CCP4RB

Offset: 0x31C

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP4 Secondary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.57 CCP4 Capture Buffer Low Register (Capture Modes Only)

Name: CCP4BUFL
Offset: 0x320

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[15:0] CCP4 Compare Buffer Value bits
Indicates the oldest captured time base value in the FIFO.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.58 CCP4 Capture Buffer High Register (Capture Modes Only)

Name: CCP4BUFH
Offset: 0x322

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[31:16] CCP4 Compare Buffer Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.59 CCP5 Control 1 Low Register

Name: CCP5CON1L
Offset: 0x324

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|----|-----|---------|--------|----------|-------------|-----|
| | CCPON | | | CCPSIDL | CCPSLP | TMRSYNC | CLKSEL[2:0] | |
| Access | R/W | | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRPS[1:0] | | T32 | CCSEL | | MOD[3:0] | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – CCPON CCP Module Enable bit

| Value | Description |
|-------|---|
| 1 | Module is enabled with an operating mode specified by the MOD[3:0] control bits |
| 0 | Module is disabled |

Bit 13 – CCPSIDL CCP Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – CCPSLP CCP Sleep Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Module continues to operate in Sleep modes |
| 0 | Module does not operate in Sleep modes |

Bit 11 – TMRSYNC Time Base Clock Synchronization bit

| Value | Description |
|-------|---|
| 1 | Module time base clock is synchronized to the internal system clocks; timing restrictions apply |
| 0 | Module time base clock is not synchronized to the internal system clocks |

Bits 10:8 – CLKSEL[2:0] CCP Time Base Clock Select bits

| Value | Description |
|-------|------------------------|
| 111 | TCKIA pin |
| 110 | TCKIB pin |
| 101 | PLL clock |
| 100 | 2x peripheral clock |
| 011 | CLC1 |
| 010 | SOSC clock |
| 001 | Reference clock output |
| 000 | Peripheral clock |

Bits 7:6 – TMRPS[1:0] Time Base Prescale Select bits

| Value | Description |
|-------|----------------|
| 11 | 1:64 prescaler |
| 10 | 1:16 prescaler |
| 01 | 1:4 prescaler |
| 00 | 1:1 prescaler |

Bit 5 – T32 32-Bit Time Base Select bit

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 1 | Uses 32-bit time base for timer, single edge output compare or input capture function |
| 0 | Uses 16-bit time base for timer, single edge output compare or input capture function |

Bit 4 – CCSEL Capture/Compare Mode Select bit

| Value | Description |
|-------|---|
| 1 | Input capture peripheral |
| 0 | Output Compare/PWM/Timer peripheral (exact function is selected by the MOD[3:0] bits) |

Bits 3:0 – MOD[3:0] CCP Mode Select bits

For CCSEL = 1 (Input Capture modes):

| Value | Description |
|-------|--|
| 1xxx | Reserved |
| 011x | Reserved |
| 0101 | Capture every 16th rising edge |
| 0100 | Capture every 4th rising edge |
| 0011 | Capture every rising and falling edge |
| 0010 | Capture every falling edge |
| 0001 | Capture every rising edge |
| 0000 | Capture every rising and falling edge (Edge Detect mode) |

For CCSEL = 0 (Output Compare/Timer modes):

| Value | Description |
|-------|--|
| 1111 | External Input mode: Pulse generator is disabled, source is selected by ICS[2:0] |
| 1110 | Reserved |
| 110x | Reserved |
| 10xx | Reserved |
| 0111 | Reserved |
| 0110 | Reserved |
| 0101 | Dual Edge Compare mode, buffered |
| 0100 | Dual Edge Compare mode |
| 0011 | 16-Bit/32-Bit Single Edge mode, toggles output on compare match |
| 0010 | 16-Bit/32-Bit Single Edge mode, drives output low on compare match |
| 0001 | 16-Bit/32-Bit Single Edge mode, drives output high on compare match |
| 0000 | 16-Bit/32-Bit Timer mode, output functions are disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.60 CCP5 Control 1 High Register

Name: CCP5CON1H
Offset: 0x326

Notes:

1. This control bit has no function in Input Capture modes.
2. This control bit has no function when TRIGEN = 0.
3. Output postscale settings, from 1:5 to 1:16 (0100-1111), will result in a FIFO buffer overflow for Input Capture modes.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|--------|----|----|-----------|-----|-----|-----|
| | OPSSRC | RTRGEN | | | OPS3[3:0] | | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|---------|---------|-----|-----------|-----|-----|-----|
| | TRIGEN | ONESHOT | ALTSYNC | | SYNC[4:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OPSSRC Output Postscaler Source Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Output postscaler scales module trigger output events |
| 0 | Output postscaler scales time base interrupt events |

Bit 14 – RTRGEN Retrigger Enable bit⁽²⁾

| Value | Description |
|-------|--|
| 1 | Time base can be retriggered when TRIGEN bit = 1 |
| 0 | Time base may not be retriggered when TRIGEN bit = 1 |

Bits 11:8 – OPS3[3:0] CCP Interrupt Output Postscale Select bits⁽³⁾

| Value | Description |
|-------|---|
| 1111 | Interrupt every 16th time base period match |
| 1110 | Interrupt every 15th time base period match |
| . . . | |
| 0100 | Interrupt every 5th time base period match |
| 0011 | Interrupt every 4th time base period match or 4th input capture event |
| 0010 | Interrupt every 3rd time base period match or 3rd input capture event |
| 0001 | Interrupt every 2nd time base period match or 2nd input capture event |
| 0000 | Interrupt after each time base period match or input capture event |

Bit 7 – TRIGEN CCP Trigger Enable bit

| Value | Description |
|-------|--|
| 1 | Trigger operation of time base is enabled |
| 0 | Trigger operation of time base is disabled |

Bit 6 – ONESHOT One-Shot Trigger Mode Enable bit

| Value | Description |
|-------|---|
| 1 | One-Shot Trigger mode is enabled; trigger duration is set by OSCNT[2:0] |
| 0 | One-Shot Trigger mode is disabled |

Bit 5 – ALTSYNC CCP Clock Select bit

| Value | Description |
|-------|--|
| 1 | An alternate signal is used as the module synchronization output signal |
| 0 | The module synchronization output signal is the Time Base Reset/rollover event |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

Bits 4:0 – SYNC[4:0] CCP Synchronization Source Select bits

| SYNC[4:0] | Synchronization Source |
|-----------|--|
| 11111 | None; timer with rollover on CCP5PR match or FFFFh |
| 11110 | Reserved |
| 11101 | Reserved |
| 11100 | Reserved |
| 11011 | A/D start conversion |
| 11010 | CMP3 trigger |
| 11001 | CMP2 trigger |
| 11000 | CMP1 trigger |
| 10111 | Reserved |
| 10110 | Reserved |
| 10101 | Reserved |
| 10100 | Reserved |
| 10011 | CLC4 output |
| 10010 | CLC3 output |
| 10001 | CLC2 output |
| 10000 | CLC1 output |
| 01111 | Reserved |
| 01101 | INT4 pin |
| 01100 | INT3 pin |
| 01011 | INT2 pin |
| 01010 | INT1 pin |
| 01001 | INT0 pin |
| 00110 | MCCP5 sync output |
| 00101 | MCCP4 sync output |
| 00100 | MCCP3 sync output |
| 00011 | MCCP2 sync output |
| 00010 | MCCP1 sync output |
| 00001 | MCCPx sync output |
| 00000 | MCCP5 timer sync output |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.61 CCP5 Control 2 Low Register

Name: CCP5CON2L
Offset: 0x328

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|-------|----|------|----|----|---|---|
| | PWMRSEN | ASDGM | | SSDG | | | | |
| Access | R/W | R/W | | R/W | | | | |
| Reset | 0 | 0 | | 0 | | | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | ASDG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – PWMRSEN CCP PWM Restart Enable bit

| Value | Description |
|-------|--|
| 1 | ASEVT bit clears automatically at the beginning of the next PWM period, after the shutdown input has ended |
| 0 | ASEVT bit must be cleared in software to resume PWM activity on output pins |

Bit 14 – ASDGM CCP Auto-Shutdown Gate Mode Enable bit

| Value | Description |
|-------|--|
| 1 | Waits until the next Time Base Reset or rollover for shutdown to occur |
| 0 | Shutdown event occurs immediately |

Bit 12 – SSDG CCP Software Shutdown/Gate Control bit

| Value | Description |
|-------|---|
| 1 | Manually forces auto-shutdown, timer clock gate or input capture signal gate event (setting of ASDGM bit still applies) |
| 0 | Normal module operation |

Bits 7:0 – ASDG[7:0] CCP Auto-Shutdown/Gating Source Enable bits

| Value | Description |
|----------|-------------|
| 10000000 | OCFB |
| 01000000 | OCFA |
| 00100000 | CLC1 |
| 00010000 | MCCP1 |
| 00001000 | MCCP2 |
| 00000100 | CMP3 out |
| 00000010 | CMP2 out |
| 00000001 | CMP1 out |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.62 CCP5 Control 2 High Register

Name: CCP5CON2H
Offset: 0x32A

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|----|-----------|-----|-----|-----|-----|-----|
| | OENSYNC | | OC[F:A]EN | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------------|-----|---|-------------|-----|-----|----------|-----|
| | ICGSM[1:0] | | | AUXOUT[1:0] | | | ICS[2:0] | |
| Access | R/W | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OENSYNC Output Enable Synchronization bit

| Value | Description |
|-------|---|
| 1 | Update by output enable bits occurs on the next Time Base Reset or rollover |
| 0 | Update by output enable bits occurs immediately |

Bits 13:8 – OC[F:A]EN Output Enable/Steering Control bits

| Value | Description |
|-------|---|
| 1 | OCx pin is controlled by the CCPx module and produces an output compare or PWM signal |
| 0 | OCx pin is not controlled by the CCPx module; the pin is available to the port logic or another peripheral multiplexed on the pin |

Bits 7:6 – ICGSM[1:0] Input Capture Gating Source Mode Control bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | One-Shot mode: Falling edge from gating source disables future capture events (ICDIS = 1) |
| 01 | One-Shot mode: Rising edge from gating source enables future capture events (ICDIS = 0) |
| 00 | Level-Sensitive mode: A high level from gating source will enable future capture events; a low level will disable future capture events |

Bits 4:3 – AUXOUT[1:0] Auxiliary Output Signal on Event Selection bits

| Value | Description |
|-------|--|
| 11 | Input capture or output compare event; no signal in Timer mode |
| 10 | Signal output depends on module operating mode |
| 01 | Time base rollover event (all modes) |
| 00 | Disabled |

Bits 2:0 – ICS[2:0] Input Capture Source Select bits

| Value | Description |
|-------|--------------------------|
| 111 | CLC4 |
| 110 | CLC3 |
| 101 | CLC2 |
| 100 | CLC1 |
| 011 | Comparator 3 |
| 010 | Comparator 2 |
| 001 | Comparator 1 |
| 000 | Input capture pin (ICM5) |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.63 CCP5 Control 3 Low Register

Name: CCP5CON3L

Offset: 0x32C

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|-----|-----|---------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | DT[4:0] | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – DT[4:0] PWM Dead-Time Select bits

| Value | Description |
|--------|---|
| 111111 | Inserts 63 dead-time delay periods between complementary output signals |
| 111110 | Inserts 62 dead-time delay periods between complementary output signals |
| ... | |
| 000010 | Inserts 2 dead-time delay periods between complementary output signals |
| 000001 | Inserts 1 dead-time delay period between complementary output signals |
| 000000 | Dead-time logic is disabled |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.64 CCP5 Control 3 High Register

Name: CCP5CON3H
Offset: 0x32E

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|------------|-----|-----|----|-----------|-----|-----|
| | OETRIG | OSCNT[2:0] | | | | OUTM[2:0] | | |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|--------|--------|-------------|-----|-------------|-----|
| | | | POLACE | POLBDF | PSSACE[1:0] | | PSSBDF[1:0] | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – OETRIG CCP Dead-Time Select bit

| Value | Description |
|-------|--|
| 1 | For Triggered mode (TRIGEN = 1): Module does not drive enabled output pins until triggered |
| 0 | Normal output pin operation |

Bits 14:12 – OSCNT[2:0] One-Shot Event Count bits

| Value | Description |
|-------|---|
| 111 | Extends one-shot event by 7 time base periods (8 time base periods total) |
| 110 | Extends one-shot event by 6 time base periods (7 time base periods total) |
| 101 | Extends one-shot event by 5 time base periods (6 time base periods total) |
| 100 | Extends one-shot event by 4 time base periods (5 time base periods total) |
| 011 | Extends one-shot event by 3 time base periods (4 time base periods total) |
| 010 | Extends one-shot event by 2 time base periods (3 time base periods total) |
| 001 | Extends one-shot event by 1 time base period (2 time base periods total) |
| 000 | Does not extend one-shot trigger event |

Bits 10:8 – OUTM[2:0] PWM Output Mode Control bits

| Value | Description |
|-------|-------------------------------|
| 111 | Reserved |
| 110 | Output Scan mode |
| 101 | Brush DC Output mode, forward |
| 100 | Brush DC Output mode, reverse |
| 011 | Reserved |
| 010 | Half-Bridge Output mode |
| 001 | Push-Pull Output mode |
| 000 | Steerable Single Output mode |

Bit 5 – POLACE CCP Output Pins, OCMxA, OCMxC and OCMxE, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bit 4 – POLBDF CCP Output Pins, OCMxB, OCMxD and OCMxF, Polarity Control bit

| Value | Description |
|-------|------------------------------------|
| 1 | Output pin polarity is active-low |
| 0 | Output pin polarity is active-high |

Bits 3:2 – PSSACE[1:0] PWM Output Pins, OCMxA, OCMxC and OCMxE, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

| Value | Description |
|-------|---|
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are tri-stated when a shutdown event occurs |

Bits 1:0 – PSSBDF[1:0] PWM Output Pins, OCMxB, OCMxD and OCMxF, Shutdown State Control bits

| Value | Description |
|-------|---|
| 11 | Pins are driven active when a shutdown event occurs |
| 10 | Pins are driven inactive when a shutdown event occurs |
| 0x | Pins are in a high-impedance state when a shutdown event occurs |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.65 CCP5 Status Register Low

Name: CCP5STATL
Offset: 0x330

Legend: C = Clearable bit; W1 = Write '1' Only bit

| | | | | | | | | |
|--------|----|----|----|----|----|--------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | ICGARM | | |
| Access | | | | | | W | | |
| Reset | | | | | | 0 | | |

| | | | | | | | | |
|--------|---------|-------|-------|-------|-------|-------|------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CCPTRIG | TRSET | TRCLR | ASEVT | SCEVT | ICDIS | ICOV | ICBNE |
| Access | R | W1 | W1 | R/C | R/C | R/C | R/C | R/C |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – ICGARM Input Capture Gate Arm bit

A write of '1' to this location will arm the Input Capture x module for a one-shot gating event when ICGSM[1:0] = 01 or 10; read as '0'.

Bit 7 – CCPTRIG CCP Trigger Status bit

| Value | Description |
|-------|---|
| 1 | Timer has been triggered and is running |
| 0 | Timer has not been triggered and is held in Reset |

Bit 6 – TRSET CCP Trigger Set Request bit

Writes '1' to this location to trigger the timer when TRIGEN = 1 (location always reads as '0').

Bit 5 – TRCLR CCP Trigger Clear Request bit

Writes '1' to this location to cancel the timer trigger when TRIGEN = 1 (location always reads as '0').

Bit 4 – ASEVT CCP Auto-Shutdown Event Status/Control bit

| Value | Description |
|-------|--|
| 1 | A shutdown event is in progress; CCP outputs are in the shutdown state |
| 0 | CCP outputs operate normally |

Bit 3 – SCEVT Single Edge Compare Event Status bit

| Value | Description |
|-------|--|
| 1 | A single edge compare event has occurred |
| 0 | A single edge compare event has not occurred |

Bit 2 – ICDIS Input Capture Disable bit

| Value | Description |
|-------|---|
| 1 | Event on input capture pin (ICM5) does not generate a capture event |
| 0 | Event on input capture pin will generate a capture event |

Bit 1 – ICOV Input Capture Buffer Overflow Status bit

| Value | Description |
|-------|--|
| 1 | The input capture FIFO buffer has overflowed |
| 0 | The input capture FIFO buffer has not overflowed |

Bit 0 – ICBNE Input Capture Buffer Status bit

| Value | Description |
|-------|---|
| 1 | Input capture buffer has data available |
| 0 | Input capture buffer is empty |

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.66 CCP5 Time Base Low Register

Name: CCP5TMRL
Offset: 0x334

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRL[15:0] CCP5 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.67 CCP5 Time Base High Register

Name: CCP5TMRH
Offset: 0x336

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | TMRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TMRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – TMRH[31:16] CCP5 16-Bit Time Base Value bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.68 CCP5 Period Low Register

Name: CCP5PRL
Offset: 0x338

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRL[15:0] CCP5 Period Low Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.69 CCP5 Period High Register

Name: CCP5PRH
Offset: 0x33A

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PRH[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PRH[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PRH[31:16] CCP5 Period High Register bits

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.70 CCP5 Primary Compare Register (Timer/Compare Modes Only)

Name: CCP5RA

Offset: 0x33C

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP5 Primary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.71 CCP5 Secondary Compare Register (Timer/Compare Modes Only)

Name: CCP5RB

Offset: 0x340

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMP[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CMP[15:0] CCP5 Secondary Compare Value bits
The 16-bit value to be compared against the CCP time base.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.72 CCP5 Capture Buffer Low Register (Capture Modes Only)

Name: CCP5BUFL
Offset: 0x344

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[15:0] CCP5 Compare Buffer Value bits
Indicates the oldest captured time base value in the FIFO.

PIC24FJ64GP205/GU205 Family

Capture/Compare/PWM/Timer Modules (MCCP)

14.6.73 CCP5 Capture Buffer High Register (Capture Modes Only)

Name: CCP5BUFH
Offset: 0x346

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BUF[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BUF[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BUF[31:16] CCP5 Compare Buffer Value bits

15. Serial Peripheral Interface (SPI)

Note: This data sheet summarizes the features of the PIC24FJ64GP205/GU205 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “**Serial Peripheral Interface (SPI) with Audio Codec Support**” (www.microchip.com/DS70005136) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Serial Peripheral Interface (SPI) module is a synchronous serial interface useful for communicating with other peripheral or microcontroller devices. These peripheral devices may be serial EEPROMs, shift registers, display drivers, A/D Converters, etc. The SPI module is compatible with the Motorola® SPI and SIOP interfaces. All devices in the PIC24FJ64GP205/GU205 family include two SPI modules.

The module supports operation in two buffer modes. In Standard Buffer mode, data are shifted through a single serial buffer. In Enhanced Buffer mode, data are shifted through a FIFO buffer. The FIFO level depends on the configured mode.

Note: FIFO depth for this device is 32 (in 8-Bit Data mode).

Variable length data can be transmitted and received from 2 to 32 bits.

Note: Do not perform Read-Modify-Write operations (such as bit-oriented instructions) on the SPIxBUF register in either Standard or Enhanced Buffer mode.

The module also supports a basic framed SPI protocol while operating in either Host or Client mode. A total of four framed SPI configurations are supported.

The module also supports Audio modes. Four different Audio modes are available:

- I²S mode
- Left Justified mode
- Right Justified mode
- PCM/DSP mode

In each of these modes, the serial clock is free-running and audio data are always transferred.

If an audio protocol data transfer takes place between two devices, then usually one device is the Host and the other is the Client. However, audio data can be transferred between two Clients. Because the audio protocols require free-running clocks, the Host can be a third party controller. In either case, the Host generates two free-running clocks: SCKx and LRC (Left, Right Channel Clock is available on the \overline{SSx} /FSYNCx pin).

The SPI serial interface consists of four pins:

- SDIx: Serial Data Input
- SDOx: Serial Data Output
- SCKx: Shift Clock Input or Output
- \overline{SSx} : Active-Low Client Select or Frame Synchronization I/O Pulse

The SPI module can be configured to operate using two, three or four pins. In the 3-pin mode, \overline{SSx} is not used. In the 2-pin mode, both SDOx and \overline{SSx} are not used.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

The SPI module has the ability to generate three interrupts reflecting the events that occur during the data communication. The following types of interrupts can be generated:

1. Receive interrupts are signaled by SPIxRXIF. This event occurs when:
 - RX watermark interrupt
 - SPIROV = 1
 - SPIRBF = 1
 - SPIRBE = 1

provided the respective mask bits are enabled in SPIxIMSKL/H.

2. Transmit interrupts are signaled by SPIxTXIF. This event occurs when:
 - TX watermark interrupt
 - SPITUR = 1
 - SPITBF = 1
 - SPITBE = 1

provided the respective mask bits are enabled in SPIxIMSKL/H.

3. General interrupts are signaled by SPIxIF. This event occurs when:
 - FRMERR = 1
 - SPIBUSY = 1
 - SRMT = 1

provided the respective mask bits are enabled in SPIxIMSKL/H.


A block diagram of the module in Enhanced Buffer mode is shown in [Figure 15-1](#).

Note: In this section, the SPI modules are referred to together as SPIx, or separately as SPI1 or SPI2. Special Function Registers will follow a similar notation. For example, SPIxCON1 and SPIxCON2 refer to the control registers for either of the two SPI modules.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

Figure 15-1. SPI Module Block Diagram (Enhanced Mode)

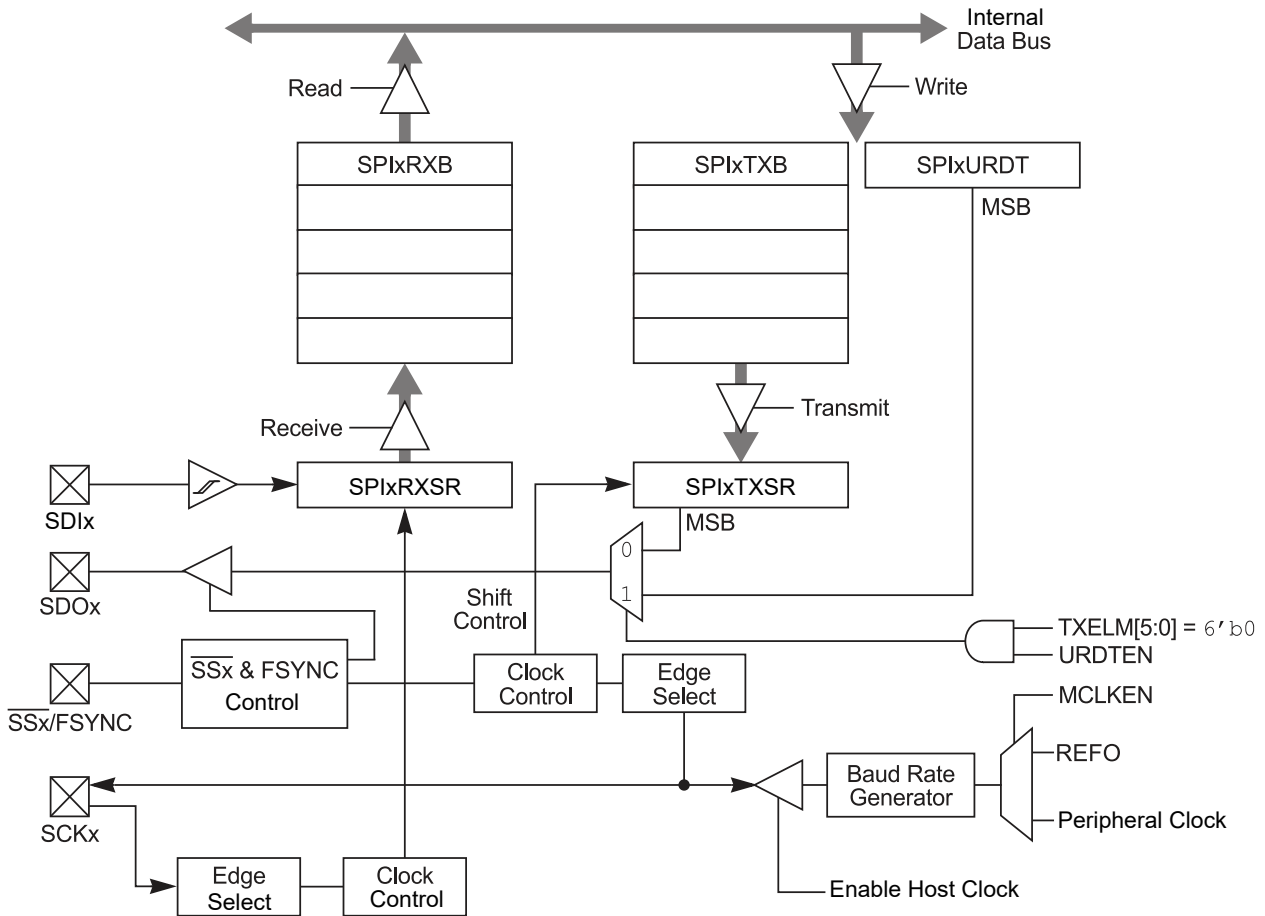

15.1 Host Mode Operation

Perform the following steps to set up the SPIx module for Host mode operation:

1. Disable the SPIx interrupts in the respective IECx register.
2. Stop and reset the SPIx module by clearing the SPIEN bit.
3. Clear the receive buffer.
4. Clear the ENHBUF bit (SPIxCON1L[0]) if using Standard Buffer mode or set the bit if using Enhanced Buffer mode.
5. Clear the SPIx interrupt flags/events in the respective IFSx register.
6. Write the SPIx interrupt priority and sub-priority bits in the respective IPCx register.
7. Set the SPIx interrupt enable bits in the respective IECx register.
8. Write the Baud Rate register, SPIxBRGL.
9. Clear the SPIROV bit (SPIxSTATL[6]).
10. Write the desired settings to the SPIxCON1L register with MSTEN (SPIxCON1L[5]) = 1.
11. Enable SPI operation by setting the SPIEN bit (SPIxCON1L[15]).
12. Write the data to be transmitted to the SPIxBUFL and SPIxBUFH registers. Transmission (and reception) will start as soon as data are written to the SPIxBUFL/H registers.

15.2 Client Mode Operation

The following steps are used to set up the SPIx module for the Client mode of operation:

1. If using interrupts, disable the SPIx interrupts in the respective IECx register.
2. Stop and reset the SPIx module by clearing the SPIEN bit.
3. Clear the receive buffer.
4. Clear the ENHBUF bit (SPIxCON1L[0]) if using Standard Buffer mode or set the bit if using Enhanced Buffer mode.
5. Clear the SPIx interrupt flags/events in the respective IFSx register.
6. Write the SPIx interrupt priority and sub-priority bits in the respective IPCx register.
7. Set the SPIx interrupt enable bits in the respective IECx register.
8. Clear the SPIROV bit (SPIxSTATL[6]).
9. Write the desired settings to the SPIxCON1L register with MSTEN (SPIxCON1L[5]) = 0.
10. Enable SPI operation by setting the SPIEN bit (SPIxCON1L[15]).

Transmission (and reception) will start as soon as the Host provides the serial clock.

The following additional features are provided in Client mode:

- **Client Select Synchronization:**
The \overline{SSx} pin allows a Synchronous Client mode. If the SSEN bit (SPIxCON1L[7]) is set, transmission and reception are enabled in Client mode only if the \overline{SSx} pin is driven to a low state. The port output, or other peripheral outputs, must not be driven in order to allow the \overline{SSx} pin to function as an input. If the SSEN bit is set and the \overline{SSx} pin is driven high, the SDOx pin is no longer driven and will tri-state, even if the module is in the middle of a transmission. An aborted transmission will be tried again the next time the \overline{SSx} pin is driven low using the data held in the SPIxTXB register. If the SSEN bit is not set, the \overline{SSx} pin does not affect the module operation in Client mode.
- **SPITBE Status Flag Operation:**
The SPITBE bit (SPIxSTATL[3]) has a different function in the Client mode of operation. The following describes the function of SPITBE for various settings of the Client mode of operation:
 - If SSEN (SPIxCON1L[7]) is cleared, the SPITBE bit is cleared when SPIxBUF is loaded by the user code. It is set when the module transfers SPIxTXB to SPIxTXSR. This is similar to the SPITBE bit function in Host mode.
 - If SSEN is set, SPITBE is cleared when SPIxBUF is loaded by the user code. However, it is set only when the SPIx module completes data transmission. A transmission will be aborted when the \overline{SSx} pin goes high and may be retried at a later time. So, each data word is held in SPIxTXB until all bits are transmitted to the receiver.

15.3 Audio Mode Operation

To initialize the SPIx module for Audio mode, follow the steps to initialize it for Host/Client mode, but also set the AUDEN bit (SPIxCON1H[15]).

In Host+Audio mode:

- This mode enables the device to generate SCKx and LRC pulses as long as the SPIEN bit (SPIxCON1L[15]) = 1.
- The SPIx module generates LRC and SCKx continuously in all cases, regardless of the transmit data, while in Host mode.
- The SPIx module drives the leading edge of LRC and SCKx within one SCKx period, and the serial data shift in and out continuously, even when the TX FIFO is empty.

In Client+Audio mode:

- This mode enables the device to receive SCKx and LRC pulses as long as the SPIEN bit (SPIxCON1L[15]) = 1.
- The SPIx module drives zeros out of SDOx, but does not shift data out or in (SDIx) until the module receives the LRC (i.e., the edge that precedes the left channel).

- Once the module receives the leading edge of LRC, it starts receiving data if DISSDI (SPIxCON1L[4]) = 0 and the serial data shift out continuously, even when the TX FIFO is empty.

15.4 Relationship Between Device and SPI Clock Speed

Equation 15-1. Relationship Between Device and SPI Clock Speed

$$\text{Baud Rate} = \frac{\text{FPB}}{(2 * (\text{SPIxBRG} + 1))}$$

Where: FPB is the Peripheral Bus Clock Frequency.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5 SPI Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-----------|----------|---------------|-----------|------------|--------------|-----------|-------------|-------------|----------|
| 0x00 ... 0x03F3 | Reserved | | | | | | | | | |
| 0x03F4 | SPI1CON1L | 7:0 | SSEN | CKP | MSTEN | DISSDI | DISSCK | MCLKEN | SPIFE | ENHBUF |
| | | 15:8 | SPIEN | | SPISIDL | DISSDO | MODE[1:0] | | SMP | CKE |
| 0x03F6 | SPI1CON1H | 7:0 | FRMEN | FRMSYNC | FRMPOL | MSSEN | FRMSYPW | FRMCNT[2:0] | | |
| | | 15:8 | AUDEN | SPISGNEXT | IGNROV | IGNTUR | AUDMONO | URDTEN | AUDMOD[1:0] | |
| 0x03F8 | SPI1CON2L | 7:0 | | | | WLENGTH[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x03FA ... 0x03FB | Reserved | | | | | | | | | |
| 0x03FC | SPI1STATL | 7:0 | SRMT | SPIROV | SPIRBE | | SPITBE | | SPITBF | SPIRBF |
| | | 15:8 | | | | FRMERR | SPIBUSY | | | SPITUR |
| 0x03FE | SPI1STATH | 7:0 | | | TXELM[5:0] | | | | | |
| | | 15:8 | | | RXELM[5:0] | | | | | |
| 0x0400 | SPI1BUFL | 7:0 | DATA[7:0] | | | | | | | |
| | | 15:8 | DATA[15:8] | | | | | | | |
| 0x0402 | SPI1BUFH | 7:0 | DATA[23:16] | | | | | | | |
| | | 15:8 | DATA[31:24] | | | | | | | |
| 0x0404 | SPI1BRGL | 7:0 | BRG[7:0] | | | | | | | |
| | | 15:8 | | | | BRG[12:8] | | | | |
| 0x0406 ... 0x0407 | Reserved | | | | | | | | | |
| 0x0408 | SPI1MSKL | 7:0 | SRMTEN | SPIROVEN | SPIRBEN | | SPITBEN | | SPITBFEN | SPIRBFEN |
| | | 15:8 | | | | FRMERREN | BUSYEN | | | SPITUREN |
| 0x040A | SPI1MSKH | 7:0 | TXWIEN | | TXMSK[5:0] | | | | | |
| | | 15:8 | RXWIEN | | RXMSK[5:0] | | | | | |
| 0x040C | SPI1URDTL | 7:0 | URDATA[7:0] | | | | | | | |
| | | 15:8 | URDATA[15:8] | | | | | | | |
| 0x040E | SPI1URDTH | 7:0 | URDATA[23:16] | | | | | | | |
| | | 15:8 | URDATA[31:24] | | | | | | | |
| 0x0410 | SPI2CON1L | 7:0 | SSEN | CKP | MSTEN | DISSDI | DISSCK | MCLKEN | SPIFE | ENHBUF |
| | | 15:8 | SPIEN | | SPISIDL | DISSDO | MODE[1:0] | | SMP | CKE |
| 0x0412 | SPI2CON1H | 7:0 | FRMEN | FRMSYNC | FRMPOL | MSSEN | FRMSYPW | FRMCNT[2:0] | | |
| | | 15:8 | AUDEN | SPISGNEXT | IGNROV | IGNTUR | AUDMONO | URDTEN | AUDMOD[1:0] | |
| 0x0414 | SPI2CON2L | 7:0 | | | | WLENGTH[4:0] | | | | |
| | | 15:8 | | | | | | | | |
| 0x0416 ... 0x0417 | Reserved | | | | | | | | | |
| 0x0418 | SPI2STATL | 7:0 | SRMT | SPIROV | SPIRBE | | SPITBE | | SPITBF | SPIRBF |
| | | 15:8 | | | | FRMERR | SPIBUSY | | | SPITUR |
| 0x041A | SPI2STATH | 7:0 | | | TXELM[5:0] | | | | | |
| | | 15:8 | | | RXELM[5:0] | | | | | |
| 0x041C | SPI2BUFL | 7:0 | DATA[7:0] | | | | | | | |
| | | 15:8 | DATA[15:8] | | | | | | | |
| 0x041E | SPI2BUFH | 7:0 | DATA[23:16] | | | | | | | |
| | | 15:8 | DATA[31:24] | | | | | | | |
| 0x0420 | SPI2BRGL | 7:0 | BRG[7:0] | | | | | | | |
| | | 15:8 | | | | BRG[12:8] | | | | |
| 0x0422 ... 0x0423 | Reserved | | | | | | | | | |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

|continued | | | | | | | | | | |
|----------------|-----------|----------|---------------|----------|------------|----------|---------|---|----------|----------|
| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x0424 | SPI2IMSKL | 7:0 | SRMTEN | SPIROVEN | SPIRBEN | | SPITBEN | | SPITBFEN | SPIRBFEN |
| | | 15:8 | | | | FRMERREN | BUSYEN | | | SPITUREN |
| 0x0426 | SPI2IMSKH | 7:0 | TXWIEN | | TXMSK[5:0] | | | | | |
| | | 15:8 | RXWIEN | | RXMSK[5:0] | | | | | |
| 0x0428 | SPI2URDTL | 7:0 | URDATA[7:0] | | | | | | | |
| | | 15:8 | URDATA[15:8] | | | | | | | |
| 0x042A | SPI2URDTH | 7:0 | URDATA[23:16] | | | | | | | |
| | | 15:8 | URDATA[31:24] | | | | | | | |

15.5.1 SPI1 Control Register 1 Low

Name: SPI1CON1L

Offset: 0x3F4

Note:

1. When AUDEN = 1, this module functions as if CKE = 0, regardless of its actual value.
2. When FRMEN = 1, SSEN is not used.
3. MCLKEN can only be written when the SPIEN bit = 0.
4. This channel is not meaningful for DSP/PCM mode as LRC follows the FRMSYPW bit.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|----|---------|--------|-----------|-----|-----|-----|
| | SPIEN | | SPISIDL | DISSDO | MODE[1:0] | | SMP | CKE |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-----|-------|--------|--------|--------|-------|--------|
| | SSEN | CKP | MSTEN | DISSDI | DISSCK | MCLKEN | SPIFE | ENHBUF |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – SPIEN SPI On bit

| Value | Description |
|-------|---|
| 1 | Enables module |
| 0 | Turns off and resets module, disables clocks, disables interrupt event generation, allows SFR modifications |

Bit 13 – SPISIDL SPI Stop in Idle Mode bit

| Value | Description |
|-------|---------------------------------------|
| 1 | Halts in CPU Idle mode |
| 0 | Continues to operate in CPU Idle mode |

Bit 12 – DISSDO Disable SDOx Output Port bit

| Value | Description |
|-------|--|
| 1 | SDOx pin is not used by the module; pin is controlled by the port function |
| 0 | SDOx pin is controlled by the module |

Bits 11:10 – MODE[1:0] Serial Word Length bits^(1,4)

AUDEN = 0:

| MODE32 | MODE16 | COMMUNICATION | FIFO DEPTH |
|--------|--------|---------------|------------|
| 1 | x | 32-Bit | 8 |
| 0 | 1 | 16-Bit | 16 |
| 0 | 0 | 8-Bit | 32 |

AUDEN = 1:

| MODE32 | MODE16 | COMMUNICATION |
|--------|--------|---|
| 1 | 1 | 24-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 1 | 0 | 32-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 0 | 1 | 16-Bit Data, 16-Bit FIFO, 32-Bit Channel/64-Bit Frame |
| 0 | 0 | 16-Bit Data, 16-Bit FIFO, 16-Bit Channel/32-Bit Frame |

Bit 9 – SMP SPI Data Input Sample Phase bit

Client Mode:

Input data are always sampled at the middle of data output time, regardless of the SMP setting.

Host Mode:

| Value | Description |
|-------|--|
| 1 | Input data are sampled at the end of data output time |
| 0 | Input data are sampled at the middle of data output time |

Bit 8 – CKE SPI Clock Edge Select bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | Transmit happens on transition from active clock state to Idle clock state |
| 0 | Transmit happens on transition from Idle clock state to active clock state |

Bit 7 – SSEN Client Select Enable bit (Client mode)⁽²⁾

| Value | Description |
|-------|---|
| 1 | SSx pin is used by the macro in Client mode; $\overline{\text{SSx}}$ pin is used as the Client select input |
| 0 | SSx pin is not used by the macro (SSx pin will be controlled by the port I/O) |

Bit 6 – CKP SPI Clock Polarity Select bit

| Value | Description |
|-------|---|
| 1 | Idle state for clock is a high level; active state is a low level |
| 0 | Idle state for clock is a low level; active state is a high level |

Bit 5 – MSTEN Host Mode Enable bit

| Value | Description |
|-------|-------------|
| 1 | Host mode |
| 0 | Client mode |

Bit 4 – DISSDI Disable SDIx Input Port bit

| Value | Description |
|-------|--|
| 1 | SDIx pin is not used by the module; pin is controlled by the port function |
| 0 | SDIx pin is controlled by the module |

Bit 3 – DISSCK Disable SCKx Output Port bit

| Value | Description |
|-------|--|
| 1 | SCKx pin is not used by the module; pin is controlled by the port function |
| 0 | SCKx pin is controlled by the module |

Bit 2 – MCLKEN Host Clock Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Reference Clock Output (REFO) is used by the BRG |
| 0 | Peripheral clock is used by the BRG |

Bit 1 – SPIFE Frame Sync Pulse Edge Select bit

| Value | Description |
|-------|---|
| 1 | Frame Sync pulse (Idle-to-active edge) coincides with the first bit clock |
| 0 | Frame Sync pulse (Idle-to-active edge) precedes the first bit clock |

Bit 0 – ENHBUF Enhanced Buffer Mode Enable bit

| Value | Description |
|-------|----------------------------------|
| 1 | Enhanced Buffer mode is enabled |
| 0 | Enhanced Buffer mode is disabled |

15.5.2 SPI1 Control Register 1 High

Name: SPI1CON1H

Offset: 0x3F6

Note:

1. AUDEN can only be written when the SPIEN bit = 0.
2. AUDMONO can only be written when the SPIEN bit = 0 and is only valid for AUDEN = 1.
3. URDTEN is only valid when IGNTUR = 1.
4. AUDMOD[1:0] bits can only be written when the SPIEN bit = 0 and are only valid when AUDEN = 1. When NOT in PCM/DSP mode, this module functions as if FRMSYPW = 1, regardless of its actual value.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-----------|--------|--------|---------|--------|-------------|-----|
| | AUDEN | SPISGNEXT | IGNROV | IGNTUR | AUDMONO | URDTEN | AUDMOD[1:0] | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|---------|--------|------|---------|-------------|-----|-----|
| | FRMEN | FRMSYNC | FRMPOL | MSEN | FRMSYPW | FRMCNT[2:0] | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – AUDEN Audio Codec Support Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Audio protocol is enabled; MSTEN controls the direction of both the SCKx and frame (a.k.a. LRC), and this module functions as if FRMEN = 1, FRMSYNC = MSTEN, FRMCNT[2:0] = 001 and SMP = 0, regardless of their actual values |
| 0 | Audio protocol is disabled |

Bit 14 – SPISGNEXT SPI Sign-Extend RX FIFO Read Data Enable bit

| Value | Description |
|-------|---|
| 1 | Data from RX FIFO are sign-extended |
| 0 | Data from RX FIFO are not sign-extended |

Bit 13 – IGNROV Ignore Receive Overflow bit

| Value | Description |
|-------|--|
| 1 | A Receive Overflow (ROV) is NOT a critical error; during ROV, data in the FIFO are not overwritten by the receive data |
| 0 | A ROV is a critical error that stops SPI operation |

Bit 12 – IGNTUR Ignore Transmit Underrun bit

| Value | Description |
|-------|---|
| 1 | A Transmit Underrun (TUR) is NOT a critical error and data indicated by URDTEN are transmitted until the SPI1TXB is not empty |
| 0 | A TUR is a critical error that stops SPI operation |

Bit 11 – AUDMONO Audio Data Format Transmit bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | Audio data are mono (i.e., each data word is transmitted on both left and right channels) |
| 0 | Audio data are stereo |

Bit 10 – URDTEN Transmit Underrun Data Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Transmits data out of SPI1URDTL/H register during Transmit Underrun conditions |
| 0 | Transmits the last received data during Transmit Underrun conditions |

Bits 9:8 – AUDMOD[1:0] Audio Protocol Mode Selection bits⁽⁴⁾

| Value | Description |
|-------|--|
| 11 | PCM/DSP mode |
| 10 | Right Justified mode: This module functions as if SPIFE = 1, regardless of its actual value |
| 01 | Left Justified mode: This module functions as if SPIFE = 1, regardless of its actual value |
| 00 | I ² S mode: This module functions as if SPIFE = 0, regardless of its actual value |

Bit 7 – FRMEN Framed SPI Support bit

| Value | Description |
|-------|---|
| 1 | Framed SPI support is enabled (SSx pin is used as the FSYNC input/output) |
| 0 | Framed SPI support is disabled |

Bit 6 – FRMSYNC Frame Sync Pulse Direction Control bit

| Value | Description |
|-------|---------------------------------|
| 1 | Frame Sync pulse input (Client) |
| 0 | Frame Sync pulse output (Host) |

Bit 5 – FRMPOL Frame Sync/Client Select Polarity bit

| Value | Description |
|-------|---|
| 1 | Frame Sync pulse/Client select is active-high |
| 0 | Frame Sync pulse/Client select is active-low |

Bit 4 – MSSEN Host Mode Client Select Enable bit

| Value | Description |
|-------|--|
| 1 | SPI Client select support is enabled with polarity determined by FRMPOL (SSx pin is automatically driven during transmission in Host mode) |
| 0 | SPI Client select support is disabled (SSx pin will be controlled by port I/O) |

Bit 3 – FRMSYPW Frame Sync Pulse-Width bit

| Value | Description |
|-------|---|
| 1 | Frame Sync pulse is one serial word length wide (as defined by MODE[32,16]/WLENGTH[4:0] bits) |
| 0 | Frame Sync pulse is one clock (SCKx) wide |

Bits 2:0 – FRMCNT[2:0] Frame Sync Pulse Counter bits

Controls the number of serial words transmitted per Sync pulse.

| Value | Description |
|-------|--|
| 111 | Reserved |
| 110 | Reserved |
| 101 | Generates a Frame Sync pulse on every 32 serial words |
| 100 | Generates a Frame Sync pulse on every 16 serial words |
| 011 | Generates a Frame Sync pulse on every 8 serial words |
| 010 | Generates a Frame Sync pulse on every 4 serial words |
| 001 | Generates a Frame Sync pulse on every 2 serial words (value used by audio protocols) |
| 000 | Generates a Frame Sync pulse on each serial word |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.3 SPI1 Control Register 2 Low

Name: SPI1CON2L

Offset: 0x3F8

Note:

1. These bits are effective when AUDEN = 0 only.
2. Varying the length by changing these bits does not affect the depth of the TX/RX FIFO.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|--------------|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | WLENGTH[4:0] | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – WLENGTH[4:0] Variable Word Length bits^(1,2)

| Value | Description |
|-------|--|
| 11111 | 32-bit data |
| 11110 | 31-bit data |
| 11101 | 30-bit data |
| 11100 | 29-bit data |
| 11011 | 28-bit data |
| 11010 | 27-bit data |
| 11001 | 26-bit data |
| 11000 | 25-bit data |
| 10111 | 24-bit data |
| 10110 | 23-bit data |
| 10101 | 22-bit data |
| 10100 | 21-bit data |
| 10011 | 20-bit data |
| 10010 | 19-bit data |
| 10001 | 18-bit data |
| 10000 | 17-bit data |
| 01111 | 16-bit data |
| 01110 | 15-bit data |
| 01101 | 14-bit data |
| 01100 | 13-bit data |
| 01011 | 12-bit data |
| 01010 | 11-bit data |
| 01001 | 10-bit data |
| 01000 | 9-bit data |
| 00111 | 8-bit data |
| 00110 | 7-bit data |
| 00101 | 6-bit data |
| 00100 | 5-bit data |
| 00011 | 4-bit data |
| 00010 | 3-bit data |
| 00001 | 2-bit data |
| 00000 | See MODE[32,16] bits in SPI1CON1L[11:10] |

15.5.4 SPI1 Status Register Low

Name: SPI1STATL

Offset: 0x3FC

Note:

1. SPITUR is cleared when SPIEN = 0. When IGNTUR = 1, SPITUR provides dynamic status of the Transmit Underrun condition, but does not stop RX/TX operation and does not need to be cleared by software.

Legend: C = Clearable bit; HS = Hardware Settable bit; HSC = Hardware Settable/Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|--------|---------|----|---|--------|
| | | | | FRMERR | SPIBUSY | | | SPITUR |
| Access | | | | HS/R/C | HSC | | | HS/R/C |
| Reset | | | | 0 | 0 | | | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|--------|--------|---|--------|---|--------|--------|
| | SRMT | SPIROV | SPIRBE | | SPITBE | | SPITBF | SPIRBF |
| Access | HSC | HSC | HSC | | HSC | | HSC | HSC |
| Reset | 0 | 0 | 0 | | 0 | | 0 | 0 |

Bit 12 – FRMERR SPI Frame Error Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Frame error is detected |
| 0 | No frame error is detected |

Bit 11 – SPIBUSY SPI Activity Status bit

| Value | Description |
|-------|---|
| 1 | Module is currently busy with some transactions |
| 0 | No ongoing transactions (at time of read) |

Bit 8 – SPITUR SPI Transmit Underrun Status bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Transmit buffer has encountered a Transmit Underrun condition |
| 0 | Transmit buffer does not have a Transmit Underrun condition |

Bit 7 – SRMT Shift Register Empty Status bit

| Value | Description |
|-------|--|
| 1 | No current or pending transactions (i.e., neither SPI1TXB or SPI1TXSR contains data to transmit) |
| 0 | Current or pending transactions |

Bit 6 – SPIROV SPI Receive Overflow Status bit

| Value | Description |
|-------|---|
| 1 | A new byte/half-word/word has been completely received when the SPI1RXB is full |
| 0 | No overflow |

Bit 5 – SPIRBE SPI RX Buffer Empty Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI1BUF is read from, reading SPI1RXB. Automatically cleared in hardware when SPI transfers data from SPI1RXSR to SPI1RXB.

Enhanced Buffer Mode:

Indicates RXELM[5:0] = 000000.

| Value | Description |
|-------|------------------------|
| 1 | RX buffer is empty |
| 0 | RX buffer is not empty |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

Bit 3 – SPITBE SPI Transmit Buffer Empty Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI1 transfers data from SPI1TXB to SPI1TXSR. Automatically cleared in hardware when SPI1BUF is written, loading SPI1TXB.

Enhanced Buffer Mode:

Indicates TXELM[5:0] = 000000.

| Value | Description |
|-------|----------------------|
| 1 | SPI1TXB is empty |
| 0 | SPI1TXB is not empty |

Bit 1 – SPITBF SPI Transmit Buffer Full Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI1BUF is written, loading SPI1TXB. Automatically cleared in hardware when SPI transfers data from SPI1TXB to SPI1TXSR.

Enhanced Buffer Mode:

Indicates TXELM[5:0] = 111111.

| Value | Description |
|-------|------------------|
| 1 | SPI1TXB is full |
| 0 | SPI1TXB not full |

Bit 0 – SPIRBF SPI Receive Buffer Full Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI transfers data from SPI1RXSR to SPI1RXB. Automatically cleared in hardware when SPI1BUF is read from, reading SPI1RXB.

Enhanced Buffer Mode:

Indicates RXELM[5:0] = 111111.

| Value | Description |
|-------|--|
| 1 | SDIx pin is not used by the module; pin is controlled by the port function |
| 0 | SDIx pin is controlled by the module |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.5 SPI1 Status Register High

Name: SPI1STATH

Offset: 0x3FE

Legend: C = Clearable bit; HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|----|----|------------|---------|---------|---------|---------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | RXELM[5:0] | | | | | |
| Access | | | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | TXELM[5:0] | | | | | |
| Access | | | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – RXELM[5:0] Receive Buffer Element Count bits (valid in Enhanced Buffer mode)

Bits 5:0 – TXELM[5:0] Transmit Buffer Element Count bits (valid in Enhanced Buffer mode)

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.6 SPI1 Buffer Register Low

Name: SPI1BUFL

Offset: 0x400

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| | DATA[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DATA[15:0] SPI FIFO Data bits

When the MODE[32,16] or WLENGTH[4:0] bits select 16 to 9-bit data, the SPI only uses DATA[15:0].

When the MODE[32,16] or WLENGTH[4:0] bits select 8 to 2-bit data, the SPI only uses DATA[7:0].

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.7 SPI1 Buffer Register High

Name: SPI1BUFH
Offset: 0x402

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DATA[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DATA[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DATA[31:16] SPI FIFO Data bits

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.8 SPI1 Baud Rate Generator Register Low

Name: SPI1BRGL

Offset: 0x404

Note:

1. Changing the BRG value when SPIEN = 1 causes undefined behavior.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | BRG[12:8] | | | | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 12:0 – BRG[12:0] SPI Baud Rate Generator Divisor bits⁽¹⁾

15.5.9 SPI1 Interrupt Mask Register Low

Name: SPI1IMSKL

Offset: 0x408

Legend: C = Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|----------|--------|----|---|----------|
| | | | | FRMERREN | BUSYEN | | | SPITUREN |
| Access | | | | R/W | R/W | | | R/C |
| Reset | | | | 0 | 0 | | | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|----------|---------|---|---------|---|----------|----------|
| | SRMTEN | SPIROVEN | SPIRBEN | | SPITBEN | | SPITBFEN | SPIRBFEN |
| Access | R/W | R/W | R/W | | R/W | | R/W | R/W |
| Reset | 0 | 0 | 0 | | 0 | | 0 | 0 |

Bit 12 – FRMERREN Enable Interrupt Events via FRMERR bit

| Value | Description |
|-------|--|
| 1 | Frame error generates an interrupt event |
| 0 | Frame error does not generate an interrupt event |

Bit 11 – BUSYEN Enable Interrupt Events via SPIBUSY bit

| Value | Description |
|-------|--|
| 1 | SPIBUSY generates an interrupt event |
| 0 | SPIBUSY does not generate an interrupt event |

Bit 8 – SPITUREN Enable Interrupt Events via SPITUR bit

| Value | Description |
|-------|--|
| 1 | Transmit Underrun (TUR) generates an interrupt event |
| 0 | Transmit Underrun does not generate an interrupt event |

Bit 7 – SRMTEN Enable Interrupt Events via SRMT bit

| Value | Description |
|-------|---|
| 1 | Shift Register Empty (SRMT) generates interrupt events |
| 0 | Shift Register Empty does not generate interrupt events |

Bit 6 – SPIROVEN Enable Interrupt Events via SPIROV bit

| Value | Description |
|-------|---|
| 1 | SPI Receive Overflow generates an interrupt event |
| 0 | SPI Receive Overflow does not generate an interrupt event |

Bit 5 – SPIRBEN Enable Interrupt Events via SPIRBE bit

| Value | Description |
|-------|--|
| 1 | SPI RX buffer empty generates an interrupt event |
| 0 | SPI RX buffer empty does not generate an interrupt event |

Bit 3 – SPITBEN Enable Interrupt Events via SPITBE bit

| Value | Description |
|-------|--|
| 1 | SPI transmit buffer empty generates an interrupt event |
| 0 | SPI transmit buffer empty does not generate an interrupt event |

Bit 1 – SPITBFEN Enable Interrupt Events via SPITBF bit

| Value | Description |
|-------|---|
| 1 | SPI transmit buffer full generates an interrupt event |
| 0 | SPI transmit buffer full does not generate an interrupt event |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

Bit 0 – SPIRBFEN Enable Interrupt Events via SPIRBF bit

| Value | Description |
|-------|--|
| 1 | SPI receive buffer full generates an interrupt event |
| 0 | SPI receive buffer full does not generate an interrupt event |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.10 SPI1 Interrupt Mask Register High

Name: SPI1IMSKH
Offset: 0x40A

| | | | | | | | | |
|--------|--------|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RXWIEN | | RXMSK[5:0] | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| | | | | | | | | |
|--------|--------|---|------------|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TXWIEN | | TXMSK[5:0] | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – RXWIEN Receive Watermark Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Triggers receive buffer element watermark interrupt when RXMSK[5:0] = RXELM[5:0] |
| 0 | Disables receive buffer element watermark interrupt |

Bits 13:8 – RXMSK[5:0] RX Buffer Mask bits
 RX mask bits; used in conjunction with the RXWIEN bit.

Bit 7 – TXWIEN Transmit Watermark Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Triggers transmit buffer element watermark interrupt when TXMSK[5:0] = TXELM[5:0] |
| 0 | Disables transmit buffer element watermark interrupt |

Bits 5:0 – TXMSK[5:0] TX Buffer Mask bits
 TX mask bits; used in conjunction with the TXWIEN bit.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.11 SPI1 Underrun Data Register Low

Name: SPI1URDTL
Offset: 0x40C

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | URDATA[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | URDATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – URDATA[15:0] SPI Underrun Data bits

These bits are only used when URDTEN = 1. This register holds the data to transmit when a Transmit Underrun condition occurs.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.12 SPI1 Underrun Data Register High

Name: SPI1URDTH
Offset: 0x40E

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | URDATA[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | URDATA[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – URDATA[31:16] SPI Underrun Data bits

These bits are only used when URDTEN = 1. This register holds the data to transmit when a Transmit Underrun condition occurs.

15.5.13 SPI2 Control Register 1 Low

Name: SPI2CON1L

Offset: 0x410

Note:

1. When AUDEN = 1, this module functions as if CKE = 0, regardless of its actual value.
2. When FRMEN = 1, SSEN is not used.
3. MCLKEN can only be written when the SPIEN bit = 0.
4. This channel is not meaningful for DSP/PCM mode as LRC follows the FRMSYPW bit.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|----|---------|--------|-----------|-----|-----|-----|
| | SPIEN | | SPISIDL | DISSDO | MODE[1:0] | | SMP | CKE |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-----|-------|--------|--------|--------|-------|--------|
| | SSEN | CKP | MSTEN | DISSDI | DISSCK | MCLKEN | SPIFE | ENHBUF |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – SPIEN SPI On bit

| Value | Description |
|-------|---|
| 1 | Enables module |
| 0 | Turns off and resets module, disables clocks, disables interrupt event generation, allows SFR modifications |

Bit 13 – SPISIDL SPI Stop in Idle Mode bit

| Value | Description |
|-------|---------------------------------------|
| 1 | Halts in CPU Idle mode |
| 0 | Continues to operate in CPU Idle mode |

Bit 12 – DISSDO Disable SDOx Output Port bit

| Value | Description |
|-------|--|
| 1 | SDOx pin is not used by the module; pin is controlled by the port function |
| 0 | SDOx pin is controlled by the module |

Bits 11:10 – MODE[1:0] Serial Word Length bits^(1,4)

| <u>AUDEN = 0:</u> | | | |
|-------------------|--------|---|------------|
| MODE32 | MODE16 | COMMUNICATION | FIFO DEPTH |
| 1 | x | 32-Bit | 8 |
| 0 | 1 | 16-Bit | 16 |
| 0 | 0 | 8-Bit | 32 |
| <u>AUDEN = 1:</u> | | | |
| MODE32 | MODE16 | COMMUNICATION | |
| 1 | 1 | 24-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame | |
| 1 | 0 | 32-Bit Data, 32-Bit FIFO, 32-Bit Channel/64-Bit Frame | |
| 0 | 1 | 16-Bit Data, 16-Bit FIFO, 32-Bit Channel/64-Bit Frame | |
| 0 | 0 | 16-Bit Data, 16-Bit FIFO, 16-Bit Channel/32-Bit Frame | |

Bit 9 – SMP SPI Data Input Sample Phase bit

Client Mode:

Input data are always sampled at the middle of data output time, regardless of the SMP setting.

Host Mode:

| Value | Description |
|-------|--|
| 1 | Input data are sampled at the end of data output time |
| 0 | Input data are sampled at the middle of data output time |

Bit 8 – CKE SPI Clock Edge Select bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | Transmit happens on transition from active clock state to Idle clock state |
| 0 | Transmit happens on transition from Idle clock state to active clock state |

Bit 7 – SSEN Client Select Enable bit (Client mode)⁽²⁾

| Value | Description |
|-------|---|
| 1 | SSx pin is used by the macro in Client mode; $\overline{\text{SSx}}$ pin is used as the Client select input |
| 0 | SSx pin is not used by the macro (SSx pin will be controlled by the port I/O) |

Bit 6 – CKP SPI Clock Polarity Select bit

| Value | Description |
|-------|---|
| 1 | Idle state for clock is a high level; active state is a low level |
| 0 | Idle state for clock is a low level; active state is a high level |

Bit 5 – MSTEN Host Mode Enable bit

| Value | Description |
|-------|-------------|
| 1 | Host mode |
| 0 | Client mode |

Bit 4 – DISSDI Disable SDIx Input Port bit

| Value | Description |
|-------|--|
| 1 | SDIx pin is not used by the module; pin is controlled by the port function |
| 0 | SDIx pin is controlled by the module |

Bit 3 – DISSCK Disable SCKx Output Port bit

| Value | Description |
|-------|--|
| 1 | SCKx pin is not used by the module; pin is controlled by the port function |
| 0 | SCKx pin is controlled by the module |

Bit 2 – MCLKEN Host Clock Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Reference Clock Output (REFO) is used by the BRG |
| 0 | Peripheral clock is used by the BRG |

Bit 1 – SPIFE Frame Sync Pulse Edge Select bit

| Value | Description |
|-------|---|
| 1 | Frame Sync pulse (Idle-to-active edge) coincides with the first bit clock |
| 0 | Frame Sync pulse (Idle-to-active edge) precedes the first bit clock |

Bit 0 – ENHBUF Enhanced Buffer Mode Enable bit

| Value | Description |
|-------|----------------------------------|
| 1 | Enhanced Buffer mode is enabled |
| 0 | Enhanced Buffer mode is disabled |

15.5.14 SPI2 Control Register 1 High

Name: SPI2CON1H

Offset: 0x412

Note:

1. AUDEN can only be written when the SPIEN bit = 0.
2. AUDMONO can only be written when the SPIEN bit = 0 and is only valid for AUDEN = 1.
3. URDTEN is only valid when IGNTUR = 1.
4. AUDMOD[1:0] bits can only be written when the SPIEN bit = 0 and are only valid when AUDEN = 1. When NOT in PCM/DSP mode, this module functions as if FRMSYPW = 1, regardless of its actual value.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-----------|--------|--------|---------|--------|-------------|-----|
| | AUDEN | SPISGNEXT | IGNROV | IGNTUR | AUDMONO | URDTEN | AUDMOD[1:0] | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|---------|--------|------|---------|-------------|-----|-----|
| | FRMEN | FRMSYNC | FRMPOL | MSEN | FRMSYPW | FRMCNT[2:0] | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – AUDEN Audio Codec Support Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Audio protocol is enabled; MSTEN controls the direction of both the SCKx and frame (a.k.a. LRC), and this module functions as if FRMEN = 1, FRMSYNC = MSTEN, FRMCNT[2:0] = 001 and SMP = 0, regardless of their actual values |
| 0 | Audio protocol is disabled |

Bit 14 – SPISGNEXT SPI Sign-Extend RX FIFO Read Data Enable bit

| Value | Description |
|-------|---|
| 1 | Data from RX FIFO are sign-extended |
| 0 | Data from RX FIFO are not sign-extended |

Bit 13 – IGNROV Ignore Receive Overflow bit

| Value | Description |
|-------|--|
| 1 | A Receive Overflow (ROV) is NOT a critical error; during ROV, data in the FIFO are not overwritten by the receive data |
| 0 | A ROV is a critical error that stops SPI operation |

Bit 12 – IGNTUR Ignore Transmit Underrun bit

| Value | Description |
|-------|---|
| 1 | A Transmit Underrun (TUR) is NOT a critical error and data indicated by URDTEN are transmitted until the SPI2TXB is not empty |
| 0 | A TUR is a critical error that stops SPI operation |

Bit 11 – AUDMONO Audio Data Format Transmit bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | Audio data are mono (i.e., each data word is transmitted on both left and right channels) |
| 0 | Audio data are stereo |

Bit 10 – URDTEN Transmit Underrun Data Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Transmits data out of SPI2URDTL/H register during Transmit Underrun conditions |
| 0 | Transmits the last received data during Transmit Underrun conditions |

Bits 9:8 – AUDMOD[1:0] Audio Protocol Mode Selection bits⁽⁴⁾

| Value | Description |
|-------|--|
| 11 | PCM/DSP mode |
| 10 | Right Justified mode: This module functions as if SPIFE = 1, regardless of its actual value |
| 01 | Left Justified mode: This module functions as if SPIFE = 1, regardless of its actual value |
| 00 | I ² S mode: This module functions as if SPIFE = 0, regardless of its actual value |

Bit 7 – FRMEN Framed SPI Support bit

| Value | Description |
|-------|---|
| 1 | Framed SPI support is enabled (SSx pin is used as the FSYNC input/output) |
| 0 | Framed SPI support is disabled |

Bit 6 – FRMSYNC Frame Sync Pulse Direction Control bit

| Value | Description |
|-------|---------------------------------|
| 1 | Frame Sync pulse input (Client) |
| 0 | Frame Sync pulse output (Host) |

Bit 5 – FRMPOL Frame Sync/Client Select Polarity bit

| Value | Description |
|-------|---|
| 1 | Frame Sync pulse/Client select is active-high |
| 0 | Frame Sync pulse/Client select is active-low |

Bit 4 – MSSEN Host Mode Client Select Enable bit

| Value | Description |
|-------|--|
| 1 | SPI Client select support is enabled with polarity determined by FRMPOL (SSx pin is automatically driven during transmission in Host mode) |
| 0 | SPI Client select support is disabled (SSx pin will be controlled by port I/O) |

Bit 3 – FRMSYPW Frame Sync Pulse-Width bit

| Value | Description |
|-------|--|
| 1 | Frame Sync pulse is one serial word length wide (as defined by MODE[32,16]/WLENGTH[4:0]) |
| 0 | Frame Sync pulse is one clock (SCKx) wide |

Bits 2:0 – FRMCNT[2:0] Frame Sync Pulse Counter bits

Controls the number of serial words transmitted per Sync pulse.

| Value | Description |
|-------|--|
| 111 | Reserved |
| 110 | Reserved |
| 101 | Generates a Frame Sync pulse on every 32 serial words |
| 100 | Generates a Frame Sync pulse on every 16 serial words |
| 011 | Generates a Frame Sync pulse on every 8 serial words |
| 010 | Generates a Frame Sync pulse on every 4 serial words |
| 001 | Generates a Frame Sync pulse on every 2 serial words (value used by audio protocols) |
| 000 | Generates a Frame Sync pulse on each serial word |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.15 SPI2 Control Register 2 Low

Name: SPI2CON2L

Offset: 0x414

Note:

1. These bits are effective when AUDEN = 0 only.
2. Varying the length by changing these bits does not affect the depth of the TX/RX FIFO.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|--------------|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | WLENGTH[4:0] | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 4:0 – WLENGTH[4:0] Variable Word Length bits^(1,2)

| Value | Description |
|-------|--|
| 11111 | 32-bit data |
| 11110 | 31-bit data |
| 11101 | 30-bit data |
| 11100 | 29-bit data |
| 11011 | 28-bit data |
| 11010 | 27-bit data |
| 11001 | 26-bit data |
| 11000 | 25-bit data |
| 10111 | 24-bit data |
| 10110 | 23-bit data |
| 10101 | 22-bit data |
| 10100 | 21-bit data |
| 10011 | 20-bit data |
| 10010 | 19-bit data |
| 10001 | 18-bit data |
| 10000 | 17-bit data |
| 01111 | 16-bit data |
| 01110 | 15-bit data |
| 01101 | 14-bit data |
| 01100 | 13-bit data |
| 01011 | 12-bit data |
| 01010 | 11-bit data |
| 01001 | 10-bit data |
| 01000 | 9-bit data |
| 00111 | 8-bit data |
| 00110 | 7-bit data |
| 00101 | 6-bit data |
| 00100 | 5-bit data |
| 00011 | 4-bit data |
| 00010 | 3-bit data |
| 00001 | 2-bit data |
| 00000 | See MODE[32,16] bits in SPI2CON1L[11:10] |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.16 SPI2 Status Register Low

Name: SPI2STATL
Offset: 0x418

Note:

1. SPITUR is cleared when SPIEN = 0. When IGNTUR = 1, SPITUR provides dynamic status of the Transmit Underrun condition, but does not stop RX/TX operation and does not need to be cleared by software.

Legend: C = Clearable bit; HS = Hardware Settable bit; HSC = Hardware Settable/Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|--------|---------|----|---|--------|
| | | | | FRMERR | SPIBUSY | | | SPITUR |
| Access | | | | HS/R/C | HSC | | | HS/R/C |
| Reset | | | | 0 | 0 | | | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|--------|--------|---|--------|---|--------|--------|
| | SRMT | SPIROV | SPIRBE | | SPITBE | | SPITBF | SPIRBF |
| Access | HSC | HSC | HSC | | HSC | | HSC | HSC |
| Reset | 0 | 0 | 0 | | 0 | | 0 | 0 |

Bit 12 – FRMERR SPI Frame Error Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Frame error is detected |
| 0 | No frame error is detected |

Bit 11 – SPIBUSY SPI Activity Status bit

| Value | Description |
|-------|---|
| 1 | Module is currently busy with some transactions |
| 0 | No ongoing transactions (at time of read) |

Bit 8 – SPITUR SPI Transmit Underrun Status bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Transmit buffer has encountered a Transmit Underrun condition |
| 0 | Transmit buffer does not have a Transmit Underrun condition |

Bit 7 – SRMT Shift Register Empty Status bit

| Value | Description |
|-------|--|
| 1 | No current or pending transactions (i.e., neither SPI2TXB or SPI2TXSR contains data to transmit) |
| 0 | Current or pending transactions |

Bit 6 – SPIROV SPI Receive Overflow Status bit

| Value | Description |
|-------|---|
| 1 | A new byte/half-word/word has been completely received when the SPI2RXB is full |
| 0 | No overflow |

Bit 5 – SPIRBE SPI RX Buffer Empty Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI2BUF is read from, reading SPI2RXB. Automatically cleared in hardware when SPI transfers data from SPI2RXSR to SPI2RXB.

Enhanced Buffer Mode:

Indicates RXELM[5:0] = 000000.

| Value | Description |
|-------|------------------------|
| 1 | RX buffer is empty |
| 0 | RX buffer is not empty |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

Bit 3 – SPITBE SPI Transmit Buffer Empty Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI transfers data from SPI2TXB to SPI2TXSR. Automatically cleared in hardware when SPI2BUF is written, loading SPI2TXB.

Enhanced Buffer Mode:

Indicates TXELM[5:0] = 000000.

| Value | Description |
|-------|----------------------|
| 1 | SPI2TXB is empty |
| 0 | SPI2TXB is not empty |

Bit 1 – SPITBF SPI Transmit Buffer Full Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI2BUF is written, loading SPI2TXB. Automatically cleared in hardware when SPI transfers data from SPI2TXB to SPI2TXSR.

Enhanced Buffer Mode:

Indicates TXELM[5:0] = 111111.

| Value | Description |
|-------|------------------|
| 1 | SPI2TXB is full |
| 0 | SPI2TXB not full |

Bit 0 – SPIRBF SPI Receive Buffer Full Status bit

Standard Buffer Mode:

Automatically set in hardware when SPI transfers data from SPI2RXSR to SPI2RXB. Automatically cleared in hardware when SPI2BUF is read from, reading SPI2RXB.

Enhanced Buffer Mode:

Indicates RXELM[5:0] = 111111.

| Value | Description |
|-------|--|
| 1 | SDIx pin is not used by the module; pin is controlled by the port function |
| 0 | SDIx pin is controlled by the module |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.17 SPI2 Status Register High

Name: SPI2STATH

Offset: 0x41A

Legend: C = Clearable bit, HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|----|----|------------|---------|---------|---------|---------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | RXELM[5:0] | | | | | |
| Access | | | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | TXELM[5:0] | | | | | |
| Access | | | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C | HSC/R/C |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:8 – RXELM[5:0] Receive Buffer Element Count bits (valid in Enhanced Buffer mode)

Bits 5:0 – TXELM[5:0] Transmit Buffer Element Count bits (valid in Enhanced Buffer mode)

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.18 SPI2 Buffer Register Low

Name: SPI2BUFL

Offset: 0x41C

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| | DATA[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DATA[15:0] SPI FIFO Data bits

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.19 SPI2 Buffer Register High

Name: SPI2BUFH
Offset: 0x41E

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DATA[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DATA[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DATA[31:16] SPI FIFO Data bits

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.20 SPI2 Baud Rate Generator Register Low

Name: SPI2BRGL

Offset: 0x420

Note:

1. Changing the BRG value when SPIEN = 1 causes undefined behavior.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | BRG[12:8] | | | | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 12:0 – BRG[12:0] SPI Baud Rate Generator Divisor bits⁽¹⁾

15.5.21 SPI2 Interrupt Mask Register Low

Name: SPI2IMSKL

Offset: 0x424

Legend: C = Clearable bit

| | | | | | | | | |
|--------|----|----|----|----------|--------|----|---|----------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | FRMERREN | BUSYEN | | | SPITUREN |
| Access | | | | R/W | R/W | | | R/C |
| Reset | | | | 0 | 0 | | | 0 |

| | | | | | | | | |
|--------|--------|----------|---------|---|---------|---|----------|----------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | SRMTEN | SPIROVEN | SPIRBEN | | SPITBEN | | SPITBFEN | SPIRBFEN |
| Access | R/W | R/W | R/W | | R/W | | R/W | R/W |
| Reset | 0 | 0 | 0 | | 0 | | 0 | 0 |

Bit 12 – FRMERREN Enable Interrupt Events via FRMERR bit

| Value | Description |
|-------|--|
| 1 | Frame error generates an interrupt event |
| 0 | Frame error does not generate an interrupt event |

Bit 11 – BUSYEN Enable Interrupt Events via SPIBUSY bit

| Value | Description |
|-------|--|
| 1 | SPIBUSY generates an interrupt event |
| 0 | SPIBUSY does not generate an interrupt event |

Bit 8 – SPITUREN Enable Interrupt Events via SPITUR bit

| Value | Description |
|-------|--|
| 1 | Transmit Underrun (TUR) generates an interrupt event |
| 0 | Transmit Underrun does not generate an interrupt event |

Bit 7 – SRMTEN Enable Interrupt Events via SRMT bit

| Value | Description |
|-------|---|
| 1 | Shift Register Empty (SRMT) generates interrupt events |
| 0 | Shift Register Empty does not generate interrupt events |

Bit 6 – SPIROVEN Enable Interrupt Events via SPIROV bit

| Value | Description |
|-------|---|
| 1 | SPI receive overflow generates an interrupt event |
| 0 | SPI receive overflow does not generate an interrupt event |

Bit 5 – SPIRBEN Enable Interrupt Events via SPIRBE bit

| Value | Description |
|-------|--|
| 1 | SPI RX buffer empty generates an interrupt event |
| 0 | SPI RX buffer empty does not generate an interrupt event |

Bit 3 – SPITBEN Enable Interrupt Events via SPITBE bit

| Value | Description |
|-------|--|
| 1 | SPI transmit buffer empty generates an interrupt event |
| 0 | SPI transmit buffer empty does not generate an interrupt event |

Bit 1 – SPITBFEN Enable Interrupt Events via SPITBF bit

| Value | Description |
|-------|---|
| 1 | SPI transmit buffer full generates an interrupt event |
| 0 | SPI transmit buffer full does not generate an interrupt event |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

Bit 0 – SPIRBFEN Enable Interrupt Events via SPIRBF bit

| Value | Description |
|-------|--|
| 1 | SPI receive buffer full generates an interrupt event |
| 0 | SPI receive buffer full does not generate an interrupt event |

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.22 SPI2 Interrupt Mask Register High

Name: SPI2IMSKH
Offset: 0x426

| | | | | | | | | |
|--------|--------|----|------------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | RXWIEN | | RXMSK[5:0] | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| | | | | | | | | |
|--------|--------|---|------------|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | TXWIEN | | TXMSK[5:0] | | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – RXWIEN Receive Watermark Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Triggers receive buffer element watermark interrupt when RXMSK[5:0] ≤ RXELM[5:0] |
| 0 | Disables receive buffer element watermark interrupt |

Bits 13:8 – RXMSK[5:0] RX Buffer Mask bits
 RX mask bits; used in conjunction with the RXWIEN bit.

Bit 7 – TXWIEN Transmit Watermark Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Triggers transmit buffer element watermark interrupt when TXMSK[5:0] = TXELM[5:0] |
| 0 | Disables transmit buffer element watermark interrupt |

Bits 5:0 – TXMSK[5:0] TX Buffer Mask bits
 TX mask bits; used in conjunction with the TXWIEN bit.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.23 SPI2 Underrun Data Register Low

Name: SPI2URDTL

Offset: 0x428

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | URDATA[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | URDATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – URDATA[15:0] SPI Underrun Data bits

These bits are only used when URDTEN = 1. This register holds the data to transmit when a Transmit Underrun condition occurs.

PIC24FJ64GP205/GU205 Family

Serial Peripheral Interface (SPI)

15.5.24 SPI2 Underrun Data Register High

Name: SPI2URDTH
Offset: 0x42A

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | URDATA[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | URDATA[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – URDATH[31:16] SPI Underrun Data bits

These bits are only used when URDTEN = 1. This register holds the data to transmit when a Transmit Underrun condition occurs.

16. Inter-Integrated Circuit (I²C)

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Inter-Integrated Circuit (I²C)**” (www.microchip.com/DS70000195) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Inter-Integrated Circuit (I²C) module is a serial interface useful for communicating with other peripheral or microcontroller devices. These peripheral devices may be serial EEPROMs, display drivers, A/D Converters, etc.

The I²C module supports these features:


- Independent Host and Client Logic
- 7-Bit and 10-Bit Device Addresses
- General Call Address as Defined in the I²C Protocol
- Clock Stretching to Provide Delays for the Processor to Respond to a Client Data Request
- Both 100 kHz, 400 kHz and 1 MHz Bus Specifications
- Configurable Address Masking
- Multi-Host modes to Prevent Loss of Messages in Arbitration
- Bus Repeater mode, Allowing the Acceptance of All Messages as a Client, regardless of the Address
- Automatic SCL
- PMBus™

A block diagram of the module is shown in [Figure 16-1](#).

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

Figure 16-1. I²C Block Diagram

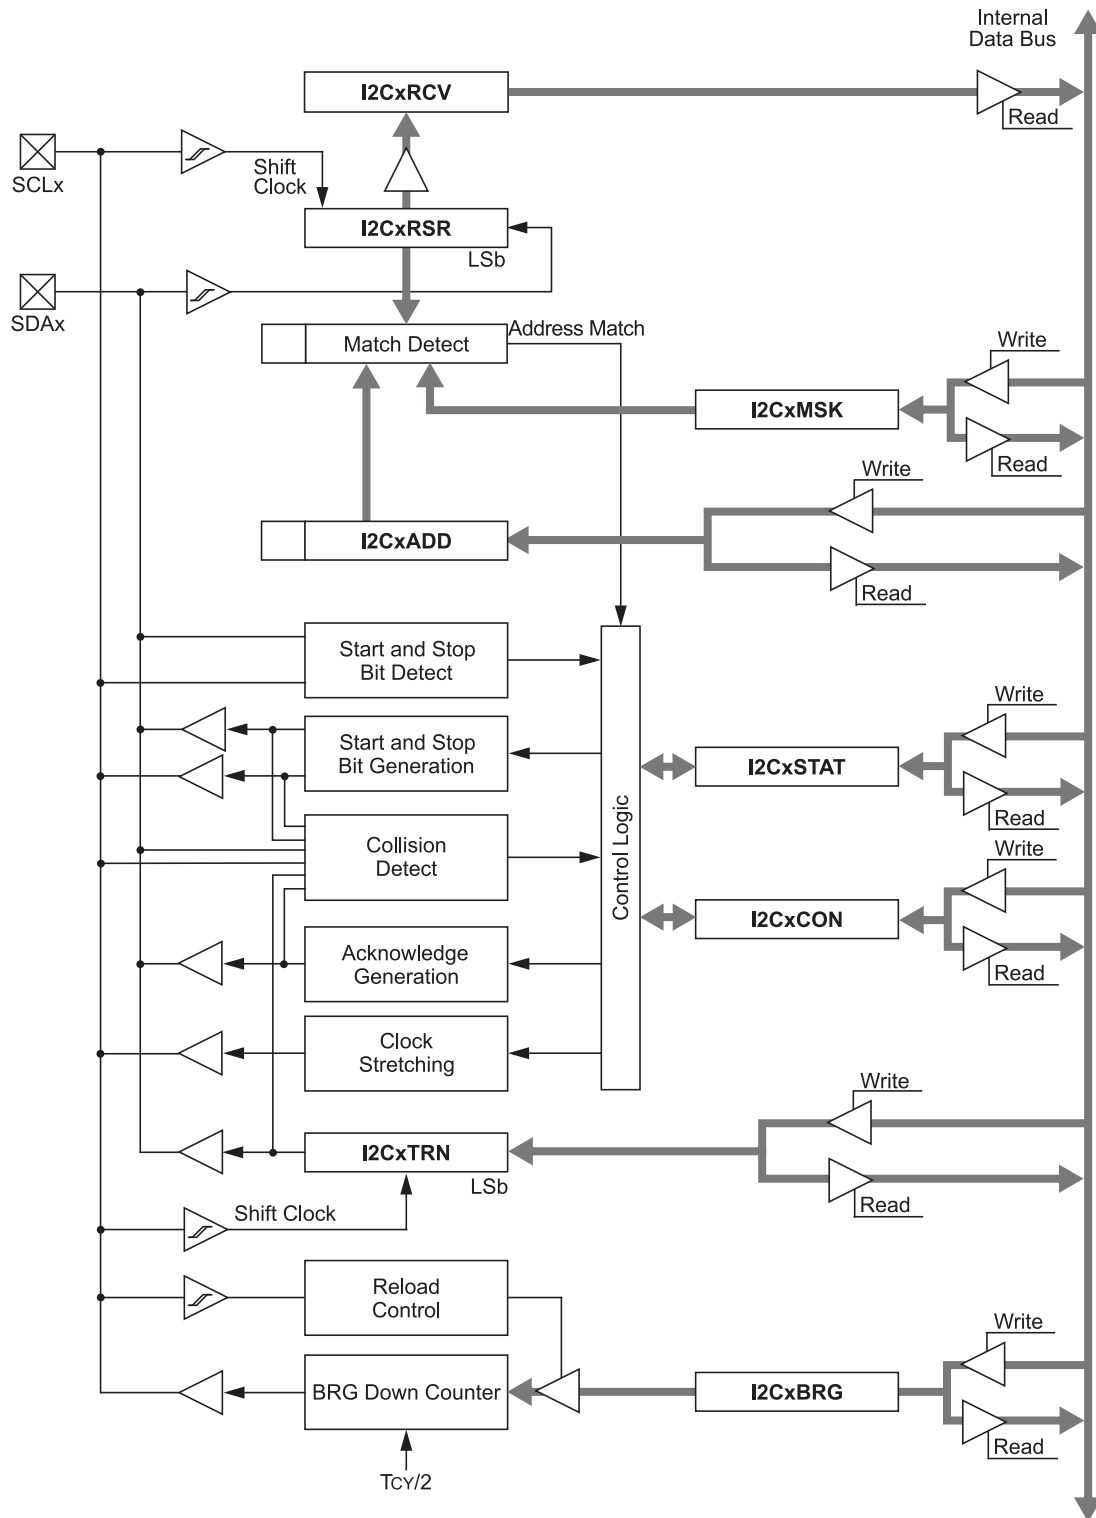

16.1 Communicating as a Host in a Single Host Environment

The details of sending a message in Host mode depends on the communications protocol for the device being communicated with. Typically, the sequence of events is as follows:

1. Assert a Start condition on SDAx and SCLx.
2. Send the I²C device address byte to the Client with a write indication.
3. Wait for and verify an Acknowledge from the Client.
4. Send the first data byte (sometimes known as the command) to the Client.
5. Wait for and verify an Acknowledge from the Client.
6. Send the serial memory address low byte to the Client.
7. Repeat Steps 4 and 5 until all data bytes are sent.
8. Assert a Repeated Start condition on SDAx and SCLx.
9. Send the device address byte to the Client with a read indication.
10. Wait for and verify an Acknowledge from the Client.
11. Enable Host reception to receive serial memory data.
12. Generate an ACK or NACK condition at the end of a received byte of data.
13. Generate a Stop condition on SDAx and SCLx.

16.2 Setting Baud Rate When Operating as a Bus Host

To compute the Baud Rate Generator reload value, use [Equation 16-1](#).

Equation 16-1. Computing Baud Rate Reload Value^(1,2,3)

$$F_{SCL} = \frac{F_{PB}}{(I2CxBRG + 2) * 2}$$

or:

$$I2CxBRG = \left\lceil \frac{F_{PB}}{(F_{SCL} * 2)} - 2 \right\rceil$$

Note:

1. Based on $F_{PB} = F_{OSC}/2$ (Peripheral Clock).
2. These clock rate values are for guidance only. The actual clock rate can be affected by various system-level parameters. The actual clock rate should be measured in its intended application.
3. BRG values of 0 to 3 are forbidden.

16.3 Host Address Masking

The I2CxMSK register designates address bit positions as “don’t care” for both 7-Bit and 10-Bit Addressing modes. Setting a particular bit location (= 1) in the I2CxMSK register causes the Client module to respond, whether the corresponding address bit value is a ‘0’ or a ‘1’. For example, when I2CxMSK is set to ‘0010000000’, the Client module will detect both addresses, ‘0000000000’ and ‘0010000000’.

To enable address masking, the Intelligent Peripheral Management Interface (IPMI) must be disabled by clearing the STRICT bit (I2CxCONL[11]).

Note: As a result of changes in the I²C protocol, the addresses in [Table 16-1](#) are reserved and will not be Acknowledged in Client mode. This includes any address mask settings that include any of these addresses.

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

Table 16-1. I²C Reserved Addresses⁽¹⁾

| Client Address | R/W Bit | Description |
|----------------|---------|---|
| 0000 000 | 0 | General Call Address ⁽²⁾ |
| 0000 000 | 1 | Start Byte |
| 0000 001 | x | C-Bus Address |
| 0000 01x | x | Reserved |
| 0000 1xx | x | HS Mode Host Code |
| 1111 0xx | x | 10-Bit Client Upper Byte ⁽³⁾ |
| 1111 1xx | x | Reserved |

Note:

1. The address bits listed here will never cause an address match independent of address mask settings.
2. This address will be Acknowledged only if GCEN = 1.
3. A match on this address can only occur on the upper byte in 10-Bit Addressing mode.

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4 I2C Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|----------------|--------|---------|--------|--------|-------|----------|-------|
| 0x00 ... 0x0493 | Reserved | | | | | | | | | |
| 0x0494 | I2C1RCV | 7:0 | I2CRXDATA[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0496 | I2C1TRN | 7:0 | I2CTXDATA[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0498 | I2C1BRG | 7:0 | I2CBRG[7:0] | | | | | | | |
| | | 15:8 | I2CBRG[15:8] | | | | | | | |
| 0x049A | I2C1CONL | 7:0 | GCEN | STREN | ACKDT | ACKEN | RCEN | PEN | RSEN | SEN |
| | | 15:8 | I2CEN | | I2CSIDL | SCLREL | STRICT | A10M | DISSLW | SMEN |
| 0x049C | I2C1CONH | 7:0 | | PCIE | SCIE | BOEN | SDAHT | SBCDE | AHEN | DHEN |
| | | 15:8 | | | | | | | | |
| 0x049E | I2C1STAT | 7:0 | IWCOL | I2COV | D/Ā | P | S | R/Ŵ | RBF | TBF |
| | | 15:8 | ACKSTAT | TRSTAT | ACKTIM | | | BCL | GCSTAT | ADD10 |
| 0x04A0 | I2C1ADD | 7:0 | ADD[7:0] | | | | | | | |
| | | 15:8 | | | | | | | ADD[9:8] | |
| 0x04A2 | I2C1MSK | 7:0 | MSK[7:0] | | | | | | | |
| | | 15:8 | | | | | | | MSK[9:8] | |
| 0x04A4 | I2C2RCV | 7:0 | I2CRXDATA[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x04A6 | I2C2TRN | 7:0 | I2CTXDATA[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x04A8 | I2C2BRG | 7:0 | I2CBRG[7:0] | | | | | | | |
| | | 15:8 | I2CBRG[15:8] | | | | | | | |
| 0x04AA | I2C2CONL | 7:0 | GCEN | STREN | ACKDT | ACKEN | RCEN | PEN | RSEN | SEN |
| | | 15:8 | I2CEN | | I2CSIDL | SCLREL | STRICT | A10M | DISSLW | SMEN |
| 0x04AC | I2C2CONH | 7:0 | | PCIE | SCIE | BOEN | SDAHT | SBCDE | AHEN | DHEN |
| | | 15:8 | | | | | | | | |
| 0x04AE | I2C2STAT | 7:0 | IWCOL | I2COV | D/Ā | P | S | R/Ŵ | RBF | TBF |
| | | 15:8 | ACKSTAT | TRSTAT | ACKTIM | | | BCL | GCSTAT | ADD10 |
| 0x04B0 | I2C2ADD | 7:0 | ADD[7:0] | | | | | | | |
| | | 15:8 | | | | | | | ADD[9:8] | |
| 0x04B2 | I2C2MSK | 7:0 | MSK[7:0] | | | | | | | |
| | | 15:8 | | | | | | | MSK[9:8] | |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.1 I2C1 Receive Register

Name: I2C1RCV
Offset: 0x494

| | | | | | | | | |
|--------|----------------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CRXDATA[7:0] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – I2CRXDATA[7:0] I2C1 Receive Data bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.2 I2C1 Transmit Register

Name: I2C1TRN
Offset: 0x496

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CTXDATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – I2CTXDATA[7:0] I2C1 Transmit Data bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.3 I2C1 Baud Rate Generator Register

Name: I2C1BRG
Offset: 0x498

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | I2CBRG[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CBRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – I2CBRG[15:0] I2C1 Baud Rate Generator bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.4 I2C1 Control Register Low

Name: I2C1CONL
Offset: 0x49A

Note:

1. Automatically cleared to '0' at the beginning of Client transmission; automatically cleared to '0' at the end of Client reception. The user software must provide a delay between writing to the transmit buffer and setting the SCLREL bit. This delay must be greater than the minimum setup time for Client transmissions, as specified in [30. Electrical Characteristics](#).
2. Automatically cleared to '0' at the beginning of Client transmission.
3. "SMBus 3.0 Specification" input level can be selected by the SMB3EN Configuration bit (FDEVOP1[10]).

Legend: HC = Hardware Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|----|---------|--------|--------|------|--------|------|
| | I2CEN | | I2CSIDL | SCLREL | STRICT | A10M | DISSLW | SMEN |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-------|-------|--------|--------|--------|--------|--------|
| | GCEN | STREN | ACKDT | ACKEN | RCEN | PEN | RSEN | SEN |
| Access | R/W | R/W | R/W | HC/R/W | HC/R/W | HC/R/W | HC/R/W | HC/R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – I2CEN I2C1 Enable bit (writable from software only)

| Value | Description |
|-------|--|
| 1 | Enables the I ² C module and configures the SDA and SCL pins as serial port pins |
| 0 | Disables the I ² C module; all I ² C pins are controlled by port functions |

Bit 13 – I2CSIDL I2C1 Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – SCLREL SCL Release Control bit (I²C Client mode only)⁽¹⁾

If STREN = 1:

| Value | Description |
|-------|--|
| 1 | Releases clock |
| 0 | Holds clock low (clock stretch); user may program this bit to '0', clock stretch at next SCL low |

If STREN = 0:⁽²⁾

| Value | Description |
|-------|----------------------------------|
| 1 | Releases clock |
| 0 | Forces clock low (clock stretch) |

Bit 11 – STRICT I2C1 Strict Reserved Address Rule Enable bit

| Value | Description |
|-------|---|
| 1 | Strict Reserved Addressing is enforced (for reserved addresses, refer to Table 16-1) In Client Mode: The device does not respond to reserved address space and addresses falling in that category are NACKed. In Host Mode: The device is allowed to generate addresses with reserved address space. |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|---|
| 0 | Reserved Addressing would be Acknowledged In Client Mode: The device will respond to an address falling in the reserved address space. When there is a match with any of the reserved addresses, the device will generate an ACK. In Host Mode: Reserved. |

Bit 10 – A10M 10-Bit Client Address Flag bit

| Value | Description |
|-------|------------------------------------|
| 1 | I2C1ADD is a 10-bit Client address |
| 0 | I2C1ADD is a 7-bit Client address |

Bit 9 – DISSLW Slew Rate Control Disable bit

| Value | Description |
|-------|---|
| 1 | Slew rate control is disabled for Standard Speed mode (100 kHz, also disabled for 1 MHz mode) |
| 0 | Slew rate control is enabled for High-Speed mode (400 kHz) |

Bit 8 – SMEN SMBus Input Levels Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Enables input logic so thresholds are compliant with the SMBus specification |
| 0 | Disables SMBus-specific inputs |

Bit 7 – GCEN General Call Enable bit (I2C Client mode only)

| Value | Description |
|-------|---|
| 1 | Enables interrupt when a general call address is received in I2C1RSR; module is enabled for reception |
| 0 | General call address is disabled |

Bit 6 – STREN SCL Clock Stretch Enable bit

In I2C Client mode only; used in conjunction with the SCLREL bit.

| Value | Description |
|-------|---------------------------|
| 1 | Enables clock stretching |
| 0 | Disables clock stretching |

Bit 5 – ACKDT Acknowledge Data bit

In I2C Host mode during Host Receive mode: The value that will be transmitted when the user initiates an Acknowledge sequence at the end of a receive.

In I2C Client mode when AHEN = 1 or DHEN = 1: The value that the Client will transmit when it initiates an Acknowledge sequence at the end of an address or data reception.

| Value | Description |
|-------|--------------|
| 1 | NACK is sent |
| 0 | ACK is sent |

Bit 4 – ACKEN Acknowledge Sequence Enable bit

In I2C Host mode only; applicable during Host Receive mode.

| Value | Description |
|-------|--|
| 1 | Initiates Acknowledge sequence on SDA and SCL pins, and transmits the ACKDT data bit |
| 0 | Acknowledge sequence is Idle |

Bit 3 – RCEN Receive Enable bit (I2C Host mode only)

| Value | Description |
|-------|---|
| 1 | Enables Receive mode for I2C; automatically cleared by hardware at the end of the 8-bit receive data byte |
| 0 | Receive sequence is not in progress |

Bit 2 – PEN Stop Condition Enable bit (I2C Host mode only)

| Value | Description |
|-------|--|
| 1 | Initiates Stop condition on the SDA and SCL pins |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|------------------------|
| 0 | Stop condition is Idle |

Bit 1 – RSEN Restart Condition Enable bit (I²C Host mode only)

| Value | Description |
|-------|---|
| 1 | Initiates Restart condition on the SDA and SCL pins |
| 0 | Restart condition is Idle |

Bit 0 – SEN Start Condition Enable bit (I²C Host mode only)

| Value | Description |
|-------|---|
| 1 | Initiates Start condition on the SDA and SCL pins |
| 0 | Start condition is Idle |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.5 I2C1 Control Register High

Name: I2C1CONH
Offset: 0x49C

Note:

1. This bit must be set to '0' for 1 MHz operation.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|------|------|------|-------|-------|------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | PCIE | SCIE | BOEN | SDAHT | SBCDE | AHEN | DHEN |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 6 – PCIE Stop Condition Interrupt Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Enables interrupt on detection of Stop condition |
| 0 | Stop detection interrupts are disabled |

Bit 5 – SCIE Start Condition Interrupt Enable bit (I2C Client mode only)

| Value | Description |
|-------|---|
| 1 | Enables interrupt on detection of Start or Restart conditions |
| 0 | Start detection interrupts are disabled |

Bit 4 – BOEN Buffer Overwrite Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | I2C1RCV is updated and an ACK is generated for a received address/data byte, ignoring the state of the I2COV bit only if RBF bit = 0 |
| 0 | I2C1RCV is only updated when I2COV is clear |

Bit 3 – SDAHT SDA Hold Time Selection bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | Minimum of 300 ns hold time on SDA after the falling edge of SCL |
| 0 | Minimum of 100 ns hold time on SDA after the falling edge of SCL |

Bit 2 – SBCDE Client Mode Bus Collision Detect Enable bit (I2C Client mode only)

If, on the rising edge of SCL, SDA is sampled low when the module is outputting a high state, the BCL bit is set and the bus goes Idle. This Detection mode is only valid during data and ACK transmit sequences.

| Value | Description |
|-------|--|
| 1 | Enables Client bus collision interrupts |
| 0 | Client bus collision interrupts are disabled |

Bit 1 – AHEN Address Hold Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Following the 8th falling edge of SCL for a matching received address byte; SCLREL bit (I2CxCONL[12]) will be cleared and SCL will be held low |
| 0 | Address holding is disabled |

Bit 0 – DHEN Data Hold Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Following the 8th falling edge of SCL for a received data byte; Client hardware clears the SCLREL bit (I2C1CONL[12]) and SCL is held low |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|--------------------------|
| 0 | Data holding is disabled |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.6 I2C1 Status Register

Name: I2C1STAT
Offset: 0x49E

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|--------|--------|----|----|-----|--------|-------|
| | ACKSTAT | TRSTAT | ACKTIM | | | BCL | GCSTAT | ADD10 |
| Access | R/W | R/W | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-----|-----|-----|-----|-----|-----|
| | IWCOL | I2COV | D/Ā | P | S | R/W | RBF | TBF |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – ACKSTAT Acknowledge Status bit (updated in all Host and Client modes)

| Value | Description |
|-------|--|
| 1 | Acknowledge was not received from Client |
| 0 | Acknowledge was received from Client |

Bit 14 – TRSTAT Transmit Status bit (when operating as I²C Host; applicable to Host transmit operation)

| Value | Description |
|-------|---|
| 1 | Host transmit is in progress (8 bits + ACK) |
| 0 | Host transmit is not in progress |

Bit 13 – ACKTIM Acknowledge Time Status bit (valid in I²C Client mode only)

| Value | Description |
|-------|--|
| 1 | Indicates I ² C bus is in an Acknowledge sequence, set on 8th falling edge of SCL clock |
| 0 | Not an Acknowledge sequence, cleared on 9th rising edge of SCL clock |

Bit 10 – BCL Bus Collision Detect bit (Host/Client mode; cleared when I²C module is disabled, I2CEN = 0)

| Value | Description |
|-------|--|
| 1 | A bus collision has been detected during a Host or Client transmit operation |
| 0 | No bus collision has been detected |

Bit 9 – GCSTAT General Call Status bit (cleared after Stop detection)

| Value | Description |
|-------|---------------------------------------|
| 1 | General call address was received |
| 0 | General call address was not received |

Bit 8 – ADD10 10-Bit Address Status bit (cleared after Stop detection)

| Value | Description |
|-------|--------------------------------|
| 1 | 10-bit address was matched |
| 0 | 10-bit address was not matched |

Bit 7 – IWCOL I2C1 Write Collision Detect bit

| Value | Description |
|-------|---|
| 1 | An attempt to write to the I2C1TRN register failed because the I ² C module is busy; must be cleared in software |
| 0 | No collision |

Bit 6 – I2COV I2C1 Receive Overflow Flag bit

| Value | Description |
|-------|---|
| 1 | A byte was received while the I2C1RCV register was still holding the previous byte; I2COV is a “don’t care” in Transmit mode, must be cleared in software |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|-------------|
| 0 | No overflow |

Bit 5 – D/A Data/Address bit (when operating as I²C Client)

| Value | Description |
|-------|---|
| 1 | Indicates that the last byte received was data |
| 0 | Indicates that the last byte received or transmitted was an address |

Bit 4 – P I2C1 Stop bit

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|--|
| 1 | Indicates that a Stop bit has been detected last |
| 0 | Stop bit was not detected last |

Bit 3 – S I2C1 Start bit

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|---|
| 1 | Indicates that a Start (or Repeated Start) bit has been detected last |
| 0 | Start (or Repeated Start) bit was not detected last |

Bit 2 – R/W Read/Write Information bit (when operating as I²C Client)

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|---|
| 1 | Read: Indicates the data transfer is output from the Client |
| 0 | Write: Indicates the data transfer is input to the Client |

Bit 1 – RBF Receive Buffer Full Status bit

| Value | Description |
|-------|---|
| 1 | Receive is complete, I2C1RCV is full |
| 0 | Receive is not complete, I2C1RCV is empty |

Bit 0 – TBF Transmit Buffer Full Status bit

| Value | Description |
|-------|---|
| 1 | Transmit is in progress, I2C1TRN is full (eight bits of data) |
| 0 | Transmit is complete, I2C1TRN is empty |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.7 I2C1 Address Register

Name: I2C1ADD
Offset: 0x4A0

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | ADD[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADD[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:0 – ADD[9:0] I2C1 Address bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.8 I2C1 Slave Mode Address Mask Register

Name: I2C1MSK
Offset: 0x4A2

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | MSK[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | MSK[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:0 – MSK[9:0] I2C1 Mask for Address bits

| Value | Description |
|-------|---|
| 1 | Enables masking for bit of the incoming message address; bit match is not required in this position |
| 0 | Disables masking for bit; bit match is required in this position |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.9 I2C2 Receive Register

Name: I2C2RCV
Offset: 0x4A4

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CRXDATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – I2CRXDATA[7:0] I2C2 Receive Data bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.10 I2C2 Transmit Register

Name: I2C2TRN
Offset: 0x4A6

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CTXDATA[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – I2CTXDATA[7:0] I2C2 Transmit Data bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.11 I2C2 Baud Rate Generator Register

Name: I2C2BRG
Offset: 0x4A8

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | I2CBRG[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | I2CBRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – I2CBRG[15:0] I2C2 Baud Rate Generator bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.12 I2C2 Control Register Low

Name: I2C2CONL
Offset: 0x4AA

Note:

1. Automatically cleared to '0' at the beginning of Client transmission; automatically cleared to '0' at the end of Client reception. The user software must provide a delay between writing to the transmit buffer and setting the SCLREL bit. This delay must be greater than the minimum setup time for Client transmissions, as specified in [30. Electrical Characteristics](#).
2. Automatically cleared to '0' at the beginning of Client transmission.
3. "SMBus 3.0 Specification" input level can be selected by the SMB3EN Configuration bit (FDEVOP1[10]).

Legend: HC = Hardware Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|----|---------|--------|--------|------|--------|------|
| | I2CEN | | I2CSIDL | SCLREL | STRICT | A10M | DISSLW | SMEN |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-------|-------|--------|--------|--------|--------|--------|
| | GCEN | STREN | ACKDT | ACKEN | RCEN | PEN | RSEN | SEN |
| Access | R/W | R/W | R/W | HC/R/W | HC/R/W | HC/R/W | HC/R/W | HC/R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – I2CEN I2C2 Enable bit (writable from software only)

| Value | Description |
|-------|--|
| 1 | Enables the I2C2 module and configures the SDA and SCL pins as serial port pins |
| 0 | Disables the I2C2 module; all I ² C pins are controlled by port functions |

Bit 13 – I2CSIDL I2C2 Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – SCLREL SCL Release Control bit (I²C Client mode only)⁽¹⁾

If STREN = 1:

| Value | Description |
|-------|--|
| 1 | Releases clock |
| 0 | Holds clock low (clock stretch); user may program this bit to '0', clock stretch at next SCL low |

If STREN = 0:⁽²⁾

| Value | Description |
|-------|----------------------------------|
| 1 | Releases clock |
| 0 | Forces clock low (clock stretch) |

Bit 11 – STRICT I2C2 Strict Reserved Address Rule Enable bit

| Value | Description |
|-------|---|
| 1 | Strict Reserved Addressing is enforced (for reserved addresses, refer to Table 16-1) In Client mode: The device does not respond to reserved address space and addresses falling in that category are NACKed. In Host mode: The device is allowed to generate addresses with reserved address space. |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|---|
| 0 | Reserved addressing would be Acknowledged In Client mode: The device will respond to an address falling in the reserved address space. When there is a match with any of the reserved addresses, the device will generate an ACK. In Host mode: Reserved. |

Bit 10 – A10M 10-Bit Client Address Flag bit

| Value | Description |
|-------|------------------------------------|
| 1 | I2C2ADD is a 10-bit Client address |
| 0 | I2C2ADD is a 7-bit Client address |

Bit 9 – DISSLW Slew Rate Control Disable bit

| Value | Description |
|-------|---|
| 1 | Slew rate control is disabled for Standard Speed mode (100 kHz, also disabled for 1 MHz mode) |
| 0 | Slew rate control is enabled for High-Speed mode (400 kHz) |

Bit 8 – SMEN SMBus Input Levels Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | Enables input logic so thresholds are compliant with the SMBus specification |
| 0 | Disables SMBus-specific inputs |

Bit 7 – GCEN General Call Enable bit (I2C Client mode only)

| Value | Description |
|-------|---|
| 1 | Enables interrupt when a general call address is received in I2C2RSR; module is enabled for reception |
| 0 | General call address is disabled |

Bit 6 – STREN SCL Clock Stretch Enable bit

In I2C Client mode only; used in conjunction with the SCLREL bit.

| Value | Description |
|-------|---------------------------|
| 1 | Enables clock stretching |
| 0 | Disables clock stretching |

Bit 5 – ACKDT Acknowledge Data bit

In I2C Host mode during Host Receive mode: The value that will be transmitted when the user initiates an Acknowledge sequence at the end of a receive.

In I2C Client mode when AHEN = 1 or DHEN = 1: The value that the Client will transmit when it initiates an Acknowledge sequence at the end of an address or data reception.

| Value | Description |
|-------|--------------|
| 1 | NACK is sent |
| 0 | ACK is sent |

Bit 4 – ACKEN Acknowledge Sequence Enable bit

In I2C Host mode only; applicable during Host Receive mode.

| Value | Description |
|-------|--|
| 1 | Initiates Acknowledge sequence on SDA and SCL pins, and transmits the ACKDT data bit |
| 0 | Acknowledge sequence is Idle |

Bit 3 – RCEN Receive Enable bit (I2C Host mode only)

| Value | Description |
|-------|---|
| 1 | Enables Receive mode for I2C; automatically cleared by hardware at the end of the 8-bit receive data byte |
| 0 | Receive sequence is not in progress |

Bit 2 – PEN Stop Condition Enable bit (I2C Host mode only)

| Value | Description |
|-------|--|
| 1 | Initiates Stop condition on the SDA and SCL pins |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|------------------------|
| 0 | Stop condition is Idle |

Bit 1 – RSEN Restart Condition Enable bit (I²C Host mode only)

| Value | Description |
|-------|---|
| 1 | Initiates Restart condition on the SDA and SCL pins |
| 0 | Restart condition is Idle |

Bit 0 – SEN Start Condition Enable bit (I²C Host mode only)

| Value | Description |
|-------|---|
| 1 | Initiates Start condition on the SDA and SCL pins |
| 0 | Start condition is Idle |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.13 I2C2 Control Register High

Name: I2C2CONH
Offset: 0x4AC

Note:

1. This bit must be set to '0' for 1 MHz operation.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|------|------|------|-------|-------|------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | PCIE | SCIE | BOEN | SDAHT | SBCDE | AHEN | DHEN |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 6 – PCIE Stop Condition Interrupt Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Enables interrupt on detection of Stop condition |
| 0 | Stop detection interrupts are disabled |

Bit 5 – SCIE Start Condition Interrupt Enable bit (I2C Client mode only)

| Value | Description |
|-------|---|
| 1 | Enables interrupt on detection of Start or Restart conditions |
| 0 | Start detection interrupts are disabled |

Bit 4 – BOEN Buffer Overwrite Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | I2C2RCV is updated and an ACK is generated for a received address/data byte, ignoring the state of the I2COV bit only if RBF bit = 0 |
| 0 | I2C2RCV is only updated when I2COV is clear |

Bit 3 – SDAHT SDA Hold Time Selection bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | Minimum of 300 ns hold time on SDA after the falling edge of SCL |
| 0 | Minimum of 100 ns hold time on SDA after the falling edge of SCL |

Bit 2 – SBCDE Client Mode Bus Collision Detect Enable bit (I2C Client mode only)

If, on the rising edge of SCL, SDA is sampled low when the module is outputting a high state, the BCL bit is set and the bus goes Idle. This Detection mode is only valid during data and ACK transmit sequences.

| Value | Description |
|-------|--|
| 1 | Enables Client bus collision interrupts |
| 0 | Client bus collision interrupts are disabled |

Bit 1 – AHEN Address Hold Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Following the 8th falling edge of SCL for a matching received address byte; SCLREL bit (I2C2CONL[12]) will be cleared and SCL will be held low |
| 0 | Address holding is disabled |

Bit 0 – DHEN Data Hold Enable bit (I2C Client mode only)

| Value | Description |
|-------|--|
| 1 | Following the 8th falling edge of SCL for a received data byte; Client hardware clears the SCLREL bit (I2C2CONL[12]) and SCL is held low |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|--------------------------|
| 0 | Data holding is disabled |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.14 I2C2 Status Register

Name: I2C2STAT
Offset: 0x4AE

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------|--------|--------|----|----|-----|--------|-------|
| | ACKSTAT | TRSTAT | ACKTIM | | | BCL | GCSTAT | ADD10 |
| Access | R/W | R/W | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-----|-----|-----|-----|-----|-----|
| | IWCOL | I2COV | D/Ā | P | S | R/W | RBF | TBF |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – ACKSTAT Acknowledge Status bit (updated in all Host and Client modes)

| Value | Description |
|-------|--|
| 1 | Acknowledge was not received from Client |
| 0 | Acknowledge was received from Client |

Bit 14 – TRSTAT Transmit Status bit (when operating as I²C Host; applicable to Host transmit operation)

| Value | Description |
|-------|---|
| 1 | Host transmit is in progress (8 bits + ACK) |
| 0 | Host transmit is not in progress |

Bit 13 – ACKTIM Acknowledge Time Status bit (valid in I²C Client mode only)

| Value | Description |
|-------|--|
| 1 | Indicates I ² C bus is in an Acknowledge sequence, set on 8th falling edge of SCL clock |
| 0 | Not an Acknowledge sequence, cleared on 9th rising edge of SCL clock |

Bit 10 – BCL Bus Collision Detect bit (Host/Client mode; cleared when I²C module is disabled, I2CEN = 0)

| Value | Description |
|-------|--|
| 1 | A bus collision has been detected during a Host or Client transmit operation |
| 0 | No bus collision has been detected |

Bit 9 – GCSTAT General Call Status bit (cleared after Stop detection)

| Value | Description |
|-------|---------------------------------------|
| 1 | General call address was received |
| 0 | General call address was not received |

Bit 8 – ADD10 10-Bit Address Status bit (cleared after Stop detection)

| Value | Description |
|-------|--------------------------------|
| 1 | 10-bit address was matched |
| 0 | 10-bit address was not matched |

Bit 7 – IWCOL I2C2 Write Collision Detect bit

| Value | Description |
|-------|---|
| 1 | An attempt to write to the I2C2TRN register failed because the I ² C module is busy; must be cleared in software |
| 0 | No collision |

Bit 6 – I2COV I2C2 Receive Overflow Flag bit

| Value | Description |
|-------|---|
| 1 | A byte was received while the I2C2RCV register was still holding the previous byte; I2COV is a “don’t care” in Transmit mode, must be cleared in software |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

| Value | Description |
|-------|-------------|
| 0 | No overflow |

Bit 5 – D/A Data/Address bit (when operating as I²C Client)

| Value | Description |
|-------|---|
| 1 | Indicates that the last byte received was data |
| 0 | Indicates that the last byte received or transmitted was an address |

Bit 4 – P I2C2 Stop bit

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|--|
| 1 | Indicates that a Stop bit has been detected last |
| 0 | Stop bit was not detected last |

Bit 3 – S I2C2 Start bit

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|---|
| 1 | Indicates that a Start (or Repeated Start) bit has been detected last |
| 0 | Start (or Repeated Start) bit was not detected last |

Bit 2 – R/W Read/Write Information bit (when operating as I²C Client)

Updated when Start, Reset or Stop is detected; cleared when the I²C module is disabled, I2CEN = 0.

| Value | Description |
|-------|---|
| 1 | Read: Indicates the data transfer is output from the Client |
| 0 | Write: Indicates the data transfer is input to the Client |

Bit 1 – RBF Receive Buffer Full Status bit

| Value | Description |
|-------|---|
| 1 | Receive is complete, I2C2RCV is full. |
| 0 | Receive is not complete, I2C2RCV is empty |

Bit 0 – TBF Transmit Buffer Full Status bit

| Value | Description |
|-------|---|
| 1 | Transmit is in progress, I2C2TRN is full (eight bits of data) |
| 0 | Transmit is complete, I2C2TRN is empty |

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.15 I2C2 Address Register

Name: I2C2ADD
Offset: 0x4B0

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | ADD[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADD[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:0 – ADD[9:0] I2C2 Address bits

PIC24FJ64GP205/GU205 Family

Inter-Integrated Circuit (I2C)

16.4.16 I2C2 Slave Mode Address Mask Register

Name: I2C2MSK
Offset: 0x4B2

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|----------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | MSK[9:8] | |
| Access | | | | | | | R/W | R/W |
| Reset | | | | | | | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | MSK[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 9:0 – MSK[9:0] I2C2 Mask for Address bits

| Value | Description |
|-------|---|
| 1 | Enables masking for bit of the incoming message address; bit match is not required in this position |
| 0 | Disables masking for bit; bit match is required in this position |

17. Universal Asynchronous Receiver Transmitter (UART)

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Universal Asynchronous Receiver Transmitter (UART)**” (www.microchip.com/DS70000582) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Universal Asynchronous Receiver Transmitter (UART) module is one of the serial I/O modules available in the PIC24F device family. The UART is a full-duplex, asynchronous system that can communicate with peripheral devices, such as personal computers, LIN/J2602, RS-232 and RS-485 interfaces. The module also supports a hardware flow control option with the $\overline{\text{UxCTS}}$ and $\overline{\text{UxRTS}}$ pins. The UART module includes an IrDA[®] encoder/decoder unit.

The PIC24FJ64GP205/GU205family devices are equipped with two UART modules, referred to as UART1 and UART2.

The primary features of the UARTx modules are:


- Full-Duplex, 8 or 9-Bit Data Transmission through the UxTX and UxRX Pins
- Even, Odd or No Parity Options (for 8-bit data)
- One or Two Stop bits
- Hardware Flow Control Option with the $\overline{\text{UxCTS}}$ and $\overline{\text{UxRTS}}$ Pins
- Fully Integrated Baud Rate Generator with 16-Bit Prescaler
- Baud Rates Range from Up to 1 Mbps and Down to 15 Hz at 16 MIPS in 16x mode
- Baud Rates Range from Up to 4 Mbps and Down to 61 Hz at 16 MIPS in 4x mode
- 4-Deep, First-In First-Out (FIFO) Transmit Data Buffer
- 4-Deep FIFO Receive Data Buffer
- Parity, Framing and Buffer Overrun Error Detection
- Support for 9-Bit mode with Address Detect (9th bit = 1)
- Separate Transmit and Receive Interrupts
- Loopback mode for Diagnostic Support
- Polarity Control for Transmit and Receive Lines
- Support for Sync and Break Characters
- Supports Automatic Baud Rate Detection
- IrDA[®] Encoder and Decoder Logic
- Includes DMA Support
- 16x Baud Clock Output for IrDA Support

A simplified block diagram of the UARTx module is shown in [Figure 17-1](#). The UARTx module consists of these key important hardware elements:

- Baud Rate Generator
- Asynchronous Transmitter
- Asynchronous Receiver

Note: Throughout this section, references to register and bit names that may be associated with a specific UART module are referred to generically by the use of ‘x’ in place of the specific module number. Thus, “UxSTA” might refer to the UART Status register for either UART module (UART1 or UART2).

Figure 17-1. UART Simplified Block Diagram

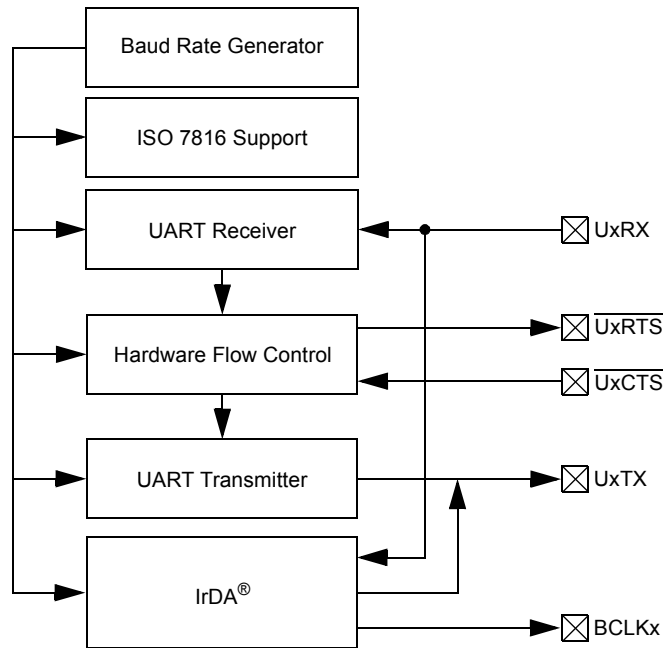

Note: The UART inputs and outputs must all be assigned to available RPN/RPIn pins before use. See [11.4. Peripheral Pin Select \(PPS\)](#) for more information.

17.1 UART Baud Rate Generator (BRG)

The UART module includes a dedicated, 16-bit Baud Rate Generator. The UxBRG register controls the period of a free-running, 16-bit timer. [Equation 17-1](#) shows the formula for computation of the baud rate when BRGH = 0.

Equation 17-1. UART Baud Rate with BRGH = 0⁽¹⁾

$$\text{Baud Rate} = \frac{F_{PB}}{16 \cdot (UxBRG + 1)}$$

$$UxBRG = \frac{F_{PB}}{16 \cdot \text{Baud Rate}} - 1$$

Note:

1. F_{PB} denotes the Peripheral Clock Frequency ($F_{OSC}/2$).

[Equation 17-2](#) shows the formula for computation of the baud rate when BRGH = 1.

Equation 17-2. UART Baud Rate with BRGH = 1⁽¹⁾

$$\text{Baud Rate} = \frac{F_{PB}}{4 \cdot (UxBRG + 1)}$$

$$UxBRG = \frac{F_{PB}}{4 \cdot \text{Baud Rate}} - 1$$

Note:

1. F_{PB} denotes the Peripheral Clock Frequency ($F_{OSC}/2$).

Writing a new value to the UxBRG register causes the BRG timer to be reset (cleared). This ensures the BRG does not wait for a timer overflow before generating the new baud rate.

17.2 Transmitting in 8-Bit Data Mode

1. Write appropriate baud rate value to the UxBRG register.
2. Enable the UART.
3. Set the UTXEN bit (causes a transmit interrupt, two cycles after being set).
4. Write a data byte to the lower byte of the UxTXREG word. The value will be immediately transferred to the Transmit Shift Register (TSR) and the serial bit stream will start shifting out with the next rising edge of the baud clock.
5. Alternatively, the data byte may be transferred while UTXEN = 0 and then the user may set UTXEN. This will cause the serial bit stream to begin immediately because the baud clock will start from a cleared state.
6. A transmit interrupt will be generated as per interrupt control bits, UTXISEL[1:0].

17.3 Transmitting in 9-Bit Data Mode

1. Write appropriate baud rate value to the UxBRG register.
2. Enable the UART.
3. Set the UTXEN bit (causes a transmit interrupt).
4. Write UxTXREG as a 16-bit value only. A word write to UxTXREG triggers the transfer of the 9-bit data to the TSR. The serial bit stream will start shifting out with the first rising edge of the baud clock.
5. A transmit interrupt will be generated as per the setting of control bits, UTXISELx.

17.4 Break and Sync Transmit Sequence

The following sequence will send a message frame header, made up of a Break, followed by an auto-baud Sync byte.

1. Configure the UART for the desired mode.
2. Set UTXEN and UTXBRK to set up the Break character.
3. Load the UxTXREG with a dummy character to initiate transmission (value is ignored).
4. Write '55h' to UxTXREG; this loads the Sync character into the transmit FIFO.
5. After the Break has been sent, the UTXBRK bit is reset by hardware. The Sync character now transmits.

17.5 Receiving in 8-Bit or 9-Bit Data Mode

1. Write appropriate baud rate value to the UxBRG register.
2. Enable the UART by setting the URXEN bit (UxSTA[12]).
3. A receive interrupt will be generated when one or more data characters have been received as per interrupt control bits, URXISEL[1:0].
4. Read the OERR bit to determine if an overrun error has occurred. The OERR bit must be reset in software.
5. Read UxRXREG.

The act of reading the UxRXREG character will move the next character to the top of the receive FIFO, including a new set of PERR and FERR values.

17.6 Operation of $\overline{\text{UxCTS}}$ and $\overline{\text{UxRTS}}$ Control Pins

UARTx Clear-to-Send ($\overline{\text{UxCTS}}$) and Request-to-Send ($\overline{\text{UxRTS}}$) are the two hardware controlled pins that are associated with the UARTx modules. These two pins allow the UARTx to operate in Simplex and Flow Control mode. They are implemented to control the transmission and reception between the Data Terminal Equipment (DTE). The UEN[1:0] bits in the UxMODE register configure these pins.

17.7 Infrared Support

The UART module provides two types of infrared UART support: one is the IrDA clock output to support an external IrDA encoder and decoder device (legacy module support), and the other is the full implementation of the IrDA encoder and decoder. Note that because the IrDA modes require a 16x baud clock, they will only work when the BRGH bit (UxMODE[3]) is '0'.

17.7.1 IrDA Clock Output for External IrDA Support

To support external IrDA encoder and decoder devices, the BCLKx pin (same as the $\overline{\text{UxRTS}}$ pin) can be configured to generate the 16x baud clock. When UEN[1:0] = 11, the BCLKx pin will output the 16x baud clock if the UARTx module is enabled; it can be used to support the IrDA codec chip.

17.7.2 Built-in IrDA Encoder and Decoder

The UARTx has full implementation of the IrDA encoder and decoder as part of the UARTx module. The built-in IrDA encoder and decoder functionality is enabled using the IREN bit (UxMODE[12]). When enabled (IREN = 1), the receive pin (UxRX) acts as the input from the infrared receiver. The transmit pin (UxTX) acts as the output to the infrared transmitter.

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8 UART Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|--------------|--------|----------|--------|--------|------------|----------|------------|
| 0x00 ... 0x0397 | Reserved | | | | | | | | | |
| 0x0398 | U1MODE | 7:0 | WAKE | LPBACK | ABAUD | URXINV | BRGH | PDSEL[1:0] | | STSEL |
| | | 15:8 | UARTEN | | USIDL | IREN | RTSMD | | UEN[1:0] | |
| 0x039A | U1STA | 7:0 | URXISEL[1:0] | | ADDEN | RIDLE | PERR | FERR | OERR | URXDA |
| | | 15:8 | UTXISEL1 | UTXINV | UTXISEL0 | URXEN | UTXBRK | UTXEN | UTXBF | TRMT |
| 0x039C | U1TXREG | 7:0 | U1TXREG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | U1TXREG[8] |
| 0x039E | U1RXREG | 7:0 | U1RXREG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | U1RXREG[8] |
| 0x03A0 | U1BRG | 7:0 | BRG[7:0] | | | | | | | |
| | | 15:8 | BRG[15:8] | | | | | | | |
| 0x03A2 ... 0x03AD | Reserved | | | | | | | | | |
| 0x03AE | U2MODE | 7:0 | WAKE | LPBACK | ABAUD | URXINV | BRGH | PDSEL[1:0] | | STSEL |
| | | 15:8 | UARTEN | | USIDL | IREN | RTSMD | | UEN[1:0] | |
| 0x03B0 | U2STA | 7:0 | URXISEL[1:0] | | ADDEN | RIDLE | PERR | FERR | OERR | URXDA |
| | | 15:8 | UTXISEL1 | UTXINV | UTXISEL0 | URXEN | UTXBRK | UTXEN | UTXBF | TRMT |
| 0x03B2 | U2TXREG | 7:0 | U2TXREG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | U2TXREG[8] |
| 0x03B4 | U2RXREG | 7:0 | U2RXREG[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | U2RXREG[8] |
| 0x03B6 | U2BRG | 7:0 | BRG[7:0] | | | | | | | |
| | | 15:8 | BRG[15:8] | | | | | | | |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.1 UART1 Mode Register

Name: U1MODE
Offset: 0x398

Note:

1. If UARTEN = 1, the peripheral inputs and outputs must be configured to an available RPN/RPIn pin. For more information, see [11.4. Peripheral Pin Select \(PPS\)](#).
2. This feature is only available for the 16x BRG mode (BRGH = 0).
3. This feature should be used only when PLEN (CLKDIV[5]) = 1.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|----|-------|------|-------|----|----------|-----|
| | UARTEN | | USIDL | IREN | RTSMD | | UEN[1:0] | |
| Access | R/W | | R/W | R/W | R/W | | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|--------|-------|--------|------|------------|-----|-------|
| | WAKE | LPBACK | ABAUD | URXINV | BRGH | PDSEL[1:0] | | STSEL |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – UARTEN UART Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | UART is enabled; all UART pins are controlled by UART as defined by UEN[1:0] |
| 0 | UART is disabled; all UART pins are controlled by port latches, UART power consumption is minimal |

Bit 13 – USIDL UART Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – IREN IrDA[®] Encoder and Decoder Enable bit⁽²⁾

| Value | Description |
|-------|---------------------------------------|
| 1 | IrDA encoder and decoder are enabled |
| 0 | IrDA encoder and decoder are disabled |

Bit 11 – RTSMD Mode Selection for U1RTS Pin bit

| Value | Description |
|-------|-----------------------------------|
| 1 | U1RTS pin is in Simplex mode |
| 0 | U1RTS pin is in Flow Control mode |

Bits 9:8 – UEN[1:0] UART Enable bits

| Value | Description |
|-------|--|
| 11 | U1TX, U1RX and BCLK1 pins are enabled and used; U1CTS pin is controlled by port latches |
| 10 | U1TX, U1RX, U1CTS and U1RTS pins are enabled and used |
| 01 | U1TX, U1RX and U1RTS pins are enabled and used; U1CTS pin is controlled by port latches |
| 00 | U1TX and U1RX pins are enabled and used; U1CTS and U1RTS/BCLK1 pins are controlled by port latches |

Bit 7 – WAKE Wake-up on Start Bit Detect During Sleep Mode Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | UART continues to sample the U1RX pin; interrupt is generated on the falling edge, bit is cleared in hardware on the following rising edge |
| 0 | No wake-up is enabled |

Bit 6 – LPBACK UART Loopback Mode Select bit

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

| Value | Description |
|-------|---------------------------|
| 1 | Enables Loopback mode |
| 0 | Loopback mode is disabled |

Bit 5 – ABAUD Auto-Baud Enable bit

| Value | Description |
|-------|---|
| 1 | Enables baud rate measurement on the next character – requires reception of a Sync field (55h); cleared in hardware upon completion |
| 0 | Baud rate measurement is disabled or completed |

Bit 4 – URXINV UART Receive Polarity Inversion bit

| Value | Description |
|-------|------------------------|
| 1 | U1RX Idle state is '0' |
| 0 | U1RX Idle state is '1' |

Bit 3 – BRGH High Baud Rate Enable bit

| Value | Description |
|-------|---|
| 1 | High-Speed mode (4 BRG clock cycles per bit) |
| 0 | Standard Speed mode (16 BRG clock cycles per bit) |

Bits 2:1 – PDSEL[1:0] Parity and Data Selection bits

| Value | Description |
|-------|-------------------------|
| 11 | 9-bit data, no parity |
| 10 | 8-bit data, odd parity |
| 01 | 8-bit data, even parity |
| 00 | 8-bit data, no parity |

Bit 0 – STSEL Stop Bit Selection bit

| Value | Description |
|-------|---------------|
| 1 | Two Stop bits |
| 0 | One Stop bit |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.2 UART1 Status and Control Register

Name: U1STA
Offset: 0x39A

Note:

1. The value of this bit only affects the transmit properties of the module when the IrDA[®] encoder is enabled (IREN = 1).
2. If UARTEN = 1, the peripheral inputs and outputs must be configured to an available RPN/RPIn pin. For more information, see [11.4. Peripheral Pin Select \(PPS\)](#).

Legend: C = Clearable bit; HC = Hardware Clearable bit; HS = Hardware Settable bit; HSC = Hardware Settable/Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----------|--------|----------|-------|--------|-------|-------|-------|
| | UTXISEL1 | UTXINV | UTXISEL0 | URXEN | UTXBRK | UTXEN | UTXBF | TRMT |
| Access | R/W | R/W | R/W | R/W | HC/R/W | R/W | HSC/R | HSC/R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------------|-----|-------|-------|-------|-------|--------|-------|
| | URXISEL[1:0] | | ADDEN | RIDLE | PERR | FERR | OERR | URXDA |
| Access | R/W | R/W | R/W | HSC/R | HSC/R | HSC/R | HS/R/C | HSC/R |
| Reset | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

Bit 15 – UTXISEL1 UART Transmission Interrupt Mode Selection bit

| Value of UTXISEL[1:0] | Description |
|-----------------------|---|
| 11 | Reserved; do not use |
| 10 | Interrupt when a character is transferred to the Transmit Shift Register (TSR), and as a result, the transmit buffer becomes empty |
| 01 | Interrupt when the last character is shifted out of the Transmit Shift Register; all transmit operations are completed |
| 00 | Interrupt when a character is transferred to the Transmit Shift Register (this implies there is at least one character open in the transmit buffer) |

Bit 14 – UTXINV UART IrDA[®] Encoder Transmit Polarity Inversion bit⁽¹⁾ IREN = 1:

| Value | Description |
|-------|------------------------|
| 1 | U1TX Idle state is '1' |
| 0 | U1TX Idle state is '0' |

IREN = 0:

| Value | Description |
|-------|------------------------|
| 1 | U1TX Idle state is '0' |
| 0 | U1TX Idle state is '1' |

Bit 13 – UTXISEL0 UART Transmission Interrupt Mode Selection bit See description of bit 15 – UTXISEL1.

Bit 12 – URXEN UART Receive Enable bit

| Value | Description |
|-------|---|
| 1 | Receive is enabled, U1RX pin is controlled by UART |
| 0 | Receive is disabled, U1RX pin is controlled by the port |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

Bit 11 – UTXBRK UART Transmit Break bit

| Value | Description |
|-------|---|
| 1 | Sends Sync Break on next transmission – Start bit, followed by twelve '0' bits, followed by Stop bit; cleared by hardware upon completion |
| 0 | Sync Break transmission is disabled or completed |

Bit 10 – UTXEN UART Transmit Enable bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | Transmit is enabled, U1TX pin is controlled by UART |
| 0 | Transmit is disabled, any pending transmission is aborted and the buffer is reset; U1TX pin is controlled by the port |

Bit 9 – UTXBF UART Transmit Buffer Full Status bit (read-only)

| Value | Description |
|-------|---|
| 1 | Transmit buffer is full |
| 0 | Transmit buffer is not full, at least one more character can be written |

Bit 8 – TRMT Transmit Shift Register Empty bit (read-only)

| Value | Description |
|-------|---|
| 1 | Transmit Shift Register is empty and transmit buffer is empty (the last transmission has completed) |
| 0 | Transmit Shift Register is not empty, a transmission is in progress or queued |

Bits 7:6 – URXISEL[1:0] UART Receive Interrupt Mode Selection bits

| Value | Description |
|-------|---|
| 11 | Interrupt is set on an RSR transfer, making the receive buffer full (i.e., has four data characters) |
| 10 | Interrupt is set on an RSR transfer, making the receive buffer 3/4 full (i.e., has three data characters) |
| 0x | Interrupt is set when any character is received and transferred from the RSR to the receive buffer; receive buffer has one or more characters |

Bit 5 – ADDEN Address Character Detect bit (bit 8 of received data = 1)

| Value | Description |
|-------|---|
| 1 | Address Detect mode is enabled (if 9-bit mode is not selected, this does not take effect) |
| 0 | Address Detect mode is disabled |

Bit 4 – RIDLE Receiver Idle bit (read-only)

| Value | Description |
|-------|--------------------|
| 1 | Receiver is Idle |
| 0 | Receiver is active |

Bit 3 – PERR Parity Error Status bit (read-only)

| Value | Description |
|-------|---|
| 1 | Parity error has been detected for the current character (the character at the top of the receive FIFO) |
| 0 | Parity error has not been detected |

Bit 2 – FERR Framing Error Status bit (read-only)

| Value | Description |
|-------|--|
| 1 | Framing error has been detected for the current character (the character at the top of the receive FIFO) |
| 0 | Framing error has not been detected |

Bit 1 – OERR Receive Buffer Overrun Error Status bit (clear/read-only)

| Value | Description |
|-------|---|
| 1 | Receive buffer has overflowed |
| 0 | Receive buffer has not overflowed (clearing a previously set OERR bit ('1' to '0' transition) will reset the receive buffer and the RSR to the empty state) |

Bit 0 – URXDA UART Receive Buffer Data Available bit (read-only)

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

| Value | Description |
|-------|--|
| 1 | Receive buffer has data, at least one more character can be read |
| 0 | Receive buffer is empty |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.3 UART1 Transmit Register (Normally Write-Only)

Name: U1TXREG

Offset: 0x39C

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | U1TXREG[8] |
| Access | | | | | | | | W |
| Reset | | | | | | | | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | U1TXREG[7:0] |
| Access | W | W | W | W | W | W | W | W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |

Bits 8:0 – U1TXREG[8:0] UART1 Transmission Data bits

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.4 UART1 Receive Register (Normally Read-Only)

Name: U1RXREG

Offset: 0x39E

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | U1RXREG[8] |
| Access | | | | | | | | R |
| Reset | | | | | | | | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | U1RXREG[7:0] |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 8:0 – U1RXREG[8:0] UART1 Receive Data bits

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.5 UART1 Baud Rate Generator Register

Name: U1BRG

Offset: 0x3A0

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | BRG[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BRG[15:0] UART1 Baud Rate Divisor bits

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.6 UART2 Mode Register

Name: U2MODE
Offset: 0x3AE

Note:

1. If UARTEN = 1, the peripheral inputs and outputs must be configured to an available RPN/RPIn pin. For more information, see [11.4. Peripheral Pin Select \(PPS\)](#).
2. This feature is only available for the 16x BRG mode (BRGH = 0).
3. This feature should be used only when PLEN (CLKDIV[5] = 1.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|----|-------|------|-------|----|----------|-----|
| | UARTEN | | USIDL | IREN | RTSMD | | UEN[1:0] | |
| Access | R/W | | R/W | R/W | R/W | | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|--------|-------|--------|------|------------|-----|-------|
| | WAKE | LPBACK | ABAUD | URXINV | BRGH | PDSEL[1:0] | | STSEL |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – UARTEN UART Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | UART is enabled; all UART pins are controlled by UART as defined by UEN[1:0] |
| 0 | UART is disabled; all UART pins are controlled by port latches, UART power consumption is minimal |

Bit 13 – USIDL UART Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – IREN IrDA[®] Encoder and Decoder Enable bit⁽²⁾

| Value | Description |
|-------|---------------------------------------|
| 1 | IrDA encoder and decoder are enabled |
| 0 | IrDA encoder and decoder are disabled |

Bit 11 – RTSMD Mode Selection for U2RTS Pin bit

| Value | Description |
|-------|-----------------------------------|
| 1 | U2RTS pin is in Simplex mode |
| 0 | U2RTS pin is in Flow Control mode |

Bits 9:8 – UEN[1:0] UART Enable bits

| Value | Description |
|-------|--|
| 11 | U2TX, U2RX and BCLK2 pins are enabled and used; U2CTS pin is controlled by port latches |
| 10 | U2TX, U2RX, U2CTS and U2RTS pins are enabled and used |
| 01 | U2TX, U2RX and U2RTS pins are enabled and used; U2CTS pin is controlled by port latches |
| 00 | U2TX and U2RX pins are enabled and used; U2CTS and U2RTS/BCLK2 pins are controlled by port latches |

Bit 7 – WAKE Wake-up on Start Bit Detect During Sleep Mode Enable bit⁽³⁾

| Value | Description |
|-------|--|
| 1 | UART continues to sample the U2RX pin; interrupt is generated on the falling edge, bit is cleared in hardware on the following rising edge |
| 0 | No wake-up is enabled |

Bit 6 – LPBACK UART Loopback Mode Select bit

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

| Value | Description |
|-------|---------------------------|
| 1 | Enables Loopback mode |
| 0 | Loopback mode is disabled |

Bit 5 – ABAUD Auto-Baud Enable bit

| Value | Description |
|-------|---|
| 1 | Enables baud rate measurement on the next character – requires reception of a Sync field (55h); cleared in hardware upon completion |
| 0 | Baud rate measurement is disabled or completed |

Bit 4 – URXINV UART Receive Polarity Inversion bit

| Value | Description |
|-------|------------------------|
| 1 | U2RX Idle state is '0' |
| 0 | U2RX Idle state is '1' |

Bit 3 – BRGH High Baud Rate Enable bit

| Value | Description |
|-------|---|
| 1 | High-Speed mode (4 BRG clock cycles per bit) |
| 0 | Standard Speed mode (16 BRG clock cycles per bit) |

Bits 2:1 – PDSEL[1:0] Parity and Data Selection bits

| Value | Description |
|-------|-------------------------|
| 11 | 9-bit data, no parity |
| 10 | 8-bit data, odd parity |
| 01 | 8-bit data, even parity |
| 00 | 8-bit data, no parity |

Bit 0 – STSEL Stop Bit Selection bit

| Value | Description |
|-------|---------------|
| 1 | Two Stop bits |
| 0 | One Stop bit |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.7 UART2 Status and Control Register

Name: U2STA
Offset: 0x3B0

Note:

1. The value of this bit only affects the transmit properties of the module when the IrDA[®] encoder is enabled (IREN = 1).
2. If UARTEN = 1, the peripheral inputs and outputs must be configured to an available RPN/RPIn pin. For more information, see [11.4. Peripheral Pin Select \(PPS\)](#).

Legend: C = Clearable bit; HC = Hardware Clearable bit; HS = Hardware Settable bit; HSC = Hardware Settable/Clearable bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----------|--------|----------|-------|--------|-------|-------|-------|
| | UTXISEL1 | UTXINV | UTXISEL0 | URXEN | UTXBRK | UTXEN | UTXBF | TRMT |
| Access | R/W | R/W | R/W | R/W | HC/R/W | R/W | HSC/R | HSC/R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------------|-----|-------|-------|-------|-------|--------|-------|
| | URXISEL[1:0] | | ADDEN | RIDLE | PERR | FERR | OERR | URXDA |
| Access | R/W | R/W | R/W | HSC/R | HSC/R | HSC/R | HS/R/C | HSC/R |
| Reset | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 |

Bit 15 – UTXISEL1 UART Transmission Interrupt Mode Selection bit

| Value of UTXISEL[1:0] | Description |
|-----------------------|---|
| 11 | Reserved; do not use |
| 10 | Interrupt when a character is transferred to the Transmit Shift Register (TSR), and as a result, the transmit buffer becomes empty |
| 01 | Interrupt when the last character is shifted out of the Transmit Shift Register; all transmit operations are completed |
| 00 | Interrupt when a character is transferred to the Transmit Shift Register (this implies there is at least one character open in the transmit buffer) |

Bit 14 – UTXINV UART IrDA[®] Encoder Transmit Polarity Inversion bit⁽¹⁾
IREN = 1:

| Value | Description |
|-------|------------------------|
| 1 | U2TX Idle state is '1' |
| 0 | U2TX Idle state is '0' |

IREN = 0:

| Value | Description |
|-------|------------------------|
| 1 | U2TX Idle state is '0' |
| 0 | U2TX Idle state is '1' |

Bit 13 – UTXISEL0 UART Transmission Interrupt Mode Selection bit
 See description of bit 15 – UTXISEL1.

Bit 12 – URXEN UART Receive Enable bit

| Value | Description |
|-------|---|
| 1 | Receive is enabled, U2RX pin is controlled by UART |
| 0 | Receive is disabled, U2RX pin is controlled by the port |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

Bit 11 – UTXBRK UART Transmit Break bit

| Value | Description |
|-------|---|
| 1 | Sends Sync Break on next transmission – Start bit, followed by twelve '0' bits, followed by Stop bit; cleared by hardware upon completion |
| 0 | Sync Break transmission is disabled or completed |

Bit 10 – UTXEN UART Transmit Enable bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | Transmit is enabled, U2TX pin is controlled by UART |
| 0 | Transmit is disabled, any pending transmission is aborted and the buffer is reset; U2TX pin is controlled by the port |

Bit 9 – UTXBF UART Transmit Buffer Full Status bit (read-only)

| Value | Description |
|-------|---|
| 1 | Transmit buffer is full |
| 0 | Transmit buffer is not full, at least one more character can be written |

Bit 8 – TRMT Transmit Shift Register Empty bit (read-only)

| Value | Description |
|-------|---|
| 1 | Transmit Shift Register is empty and transmit buffer is empty (the last transmission has completed) |
| 0 | Transmit Shift Register is not empty, a transmission is in progress or queued |

Bits 7:6 – URXISEL[1:0] UART Receive Interrupt Mode Selection bits

| Value | Description |
|-------|---|
| 11 | Interrupt is set on an RSR transfer, making the receive buffer full (i.e., has four data characters) |
| 10 | Interrupt is set on an RSR transfer, making the receive buffer 3/4 full (i.e., has three data characters) |
| 0x | Interrupt is set when any character is received and transferred from the RSR to the receive buffer; receive buffer has one or more characters |

Bit 5 – ADDEN Address Character Detect bit (bit 8 of received data = 1)

| Value | Description |
|-------|---|
| 1 | Address Detect mode is enabled (if 9-bit mode is not selected, this does not take effect) |
| 0 | Address Detect mode is disabled |

Bit 4 – RIDLE Receiver Idle bit (read-only)

| Value | Description |
|-------|--------------------|
| 1 | Receiver is Idle |
| 0 | Receiver is active |

Bit 3 – PERR Parity Error Status bit (read-only)

| Value | Description |
|-------|---|
| 1 | Parity error has been detected for the current character (the character at the top of the receive FIFO) |
| 0 | Parity error has not been detected |

Bit 2 – FERR Framing Error Status bit (read-only)

| Value | Description |
|-------|--|
| 1 | Framing error has been detected for the current character (the character at the top of the receive FIFO) |
| 0 | Framing error has not been detected |

Bit 1 – OERR Receive Buffer Overrun Error Status bit (clear/read-only)

| Value | Description |
|-------|---|
| 1 | Receive buffer has overflowed |
| 0 | Receive buffer has not overflowed (clearing a previously set OERR bit ('1' to '0' transition) will reset the receive buffer and the RSR to the empty state) |

Bit 0 – URXDA UART Receive Buffer Data Available bit (read-only)

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

| Value | Description |
|-------|--|
| 1 | Receive buffer has data, at least one more character can be read |
| 0 | Receive buffer is empty |

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.8 UART2 Transmit Register (Normally Write-Only)

Name: U2TXREG

Offset: 0x3B2

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | U2TXREG[8] |
| Access | | | | | | | | W |
| Reset | | | | | | | | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | U2TXREG[7:0] |
| Access | W | W | W | W | W | W | W | W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |

Bits 8:0 – U2TXREG[8:0] UART2 Transmission Data bits

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.9 UART2 Receive Register (Normally Read-Only)

Name: U2RXREG

Offset: 0x3B4

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|--------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | U2RXREG[8] |
| Access | | | | | | | | R |
| Reset | | | | | | | | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | U2RXREG[7:0] |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 8:0 – U2RXREG[8:0] UART2 Receive Data bits

PIC24FJ64GP205/GU205 Family

Universal Asynchronous Receiver Transmitter ...

17.8.10 UART2 Baud Rate Generator Register

Name: U2BRG

Offset: 0x3B6

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BRG[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BRG[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – BRG[15:0] UART2 Baud Rate Divisor bits

18. Real-Time Clock and Calendar (RTCC) with Timestamp

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information on the Real-Time Clock and Calendar, refer to “**RTCC with Timestamp**” (www.microchip.com/DS70005193) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The RTCC provides the user with a Real-Time Clock and Calendar (RTCC) function that can be calibrated.


Key features of the RTCC module are:

- Selectable Clock Source
- Provides Hours, Minutes and Seconds Using 24-Hour Format
- Visibility of One Half Second Period
- Provides Calendar – Weekday, Date, Month and Year
- Alarm-Configurable for Half a Second, 1 Second, 10 Seconds, 1 Minute, 10 Minutes, 1 Hour, 1 Day, 1 Week, 1 Month or 1 Year
- Alarm Repeat with Decrementing Counter
- Alarm with Indefinite Repeat Chime
- Year 2000 to 2099 Leap Year Correction
- BCD Format for Smaller Software Overhead
- Optimized for Long-Term Battery Operation
- User Calibration of the 32.768 kHz Clock Crystal/32 kHz LPRC Frequency with Periodic Auto-Adjust
- Fractional Second Synchronization
- Calibration to within ± 2.64 Seconds Error per Month
- Calibrates Up to 260 ppm of Crystal Error
- Ability to Periodically Wake-up External Devices without CPU Intervention (external power control)
- Power Control Output for External Circuit Control
- Calibration takes Effect Every 15 Seconds
- Timestamp Capture register for Time and Date
- Programmable Prescaler and Clock Divider Circuit allows Operation with Any Clock Source
Up to 32 MHz, Including 32.768 kHz Crystal, 50/60 Hz Powerline Clock, External Real-Time Clock (RTC) or 32 kHz LPRC Clock

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

Figure 18-1. RTCC Block Diagram

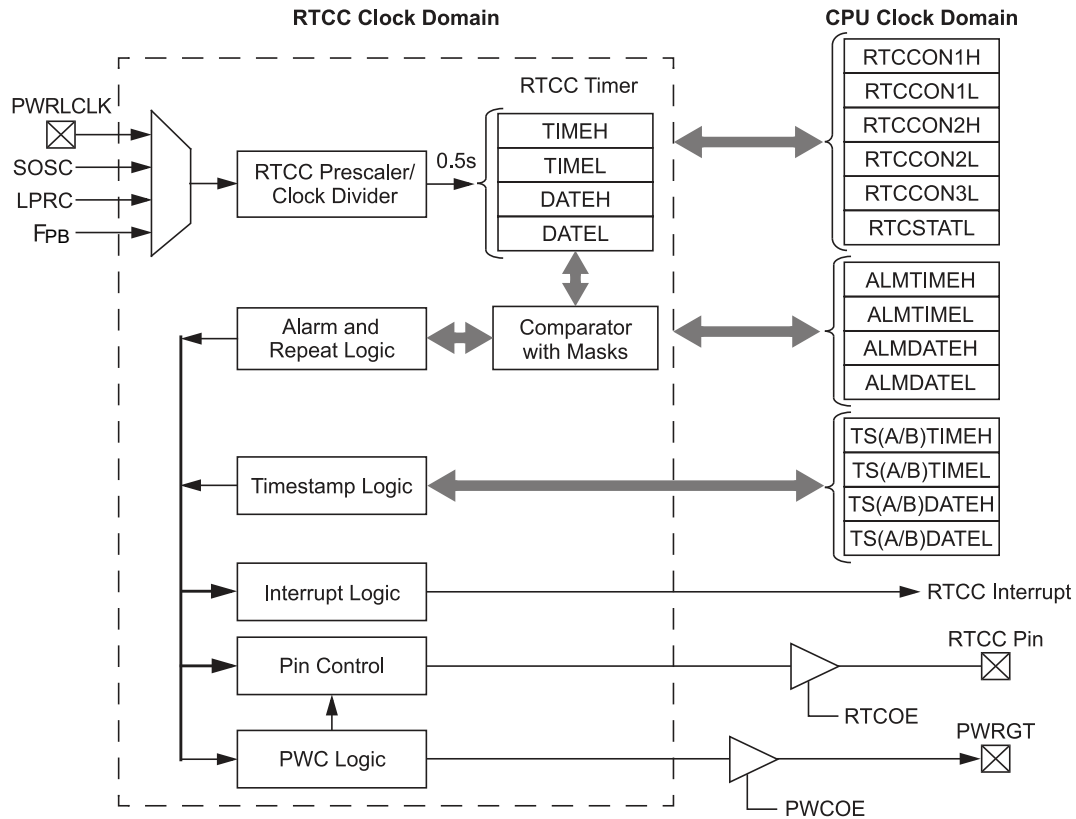

18.1 RTCC Source Clock

The RTCC clock divider block converts the incoming oscillator source into accurate 1/2 and 1 second clocks for the RTCC. The clock divider is optimized to work with three different oscillator sources:

- 32.768 kHz Crystal Oscillator
- 32 kHz Low-Power RC Oscillator (LPRC)
- External 50 Hz or 60 Hz Powerline Frequency

An asynchronous prescaler, PS[1:0] (RTCCON2L[5:4]), is provided that allows the RTCC to work with higher speed clock sources, such as the peripheral clock. Divide ratios of 1:16, 1:64 or 1:256 may be selected, allowing sources of up to 16 MHz to clock the RTCC.

18.1.1 Coarse Frequency Division

The clock divider block has a 16-bit counter used to divide the input clock frequency. The divide ratio is set by the DIV[15:0] register bits (RTCCON2H[15:0]). The DIV[15:0] bits should be programmed with a value to produce a nominal 1/2 second clock divider count period.

18.1.2 Fine Frequency Division

The fine frequency division is set using the FDIV[4:0] bits (RTCCON2L[15:11]). Increasing the FDIVx value will lengthen the overall clock divider period.

If FDIV[4:0] = 00000, the fine frequency division circuit is effectively disabled. Otherwise, it will optionally remove a clock pulse from the input of the clock divider every 1/2 second. This functionality will allow the user to remove up to 31 pulses over a fixed period of 16 seconds, depending on the value of FDIVx.

The value for DIV[15:0] is calculated as shown in Equation 18-1. The fractional remainder of the DIV[15:0] calculation result can be used to calculate the value for FDIV[4:0].

Equation 18-1. RTCC Clock Divider Output Frequency

$$F_{OUT} = \frac{F_{IN}}{2 \cdot (PS[1:0] \text{ Prescaler}) \cdot (DIV[15:0] + 1) + \left(\frac{FDIV[4:0]}{32} \right)}$$

The DIV[15:0] value is the integer part of this calculation:

$$DIV[15:0] = \frac{F_{IN}}{2 \cdot (PS[1:0] \text{ Prescaler})} - 1$$

The FDIV[4:0] value is the fractional part of the DIV[15:0] calculation, multiplied by 32.

18.2 RTCC Module Registers

The RTCC module registers are organized into four categories:

- RTCC Control Registers
- RTCC Value Registers
- Alarm Value Registers
- Timestamp Registers

18.2.1 Register Mapping

Previous RTCC implementations used a Register Pointer to access the RTCC Time and Date registers, as well as the Alarm Time and Date registers. These Registers are now mapped to memory and are individually addressable.

18.2.2 Write Lock

To prevent spurious changes to the Time Control or Time Value registers, the WRLOCK bit (RTCCON1L[11]) must be cleared ('0'). The POR default state is when the WRLOCK bit is '0' and is cleared on any device Reset (POR, BOR, MCLR). It is recommended that the WRLOCK bit be set to '1' after the Date and Time registers are properly initialized, and after the RTCEN bit (RTCCON1L[15]) has been set.

Any attempt to write to the RTCEN bit, the RTCCON2L/H registers, or the Date or Time registers, will be ignored as long as WRLOCK is '1'. The Alarm, Power Control and Timestamp registers can be changed when WRLOCK is '1'.

Clearing the WRLOCK bit requires an unlock sequence after it has been written to a '1', writing two bytes consecutively to the NVMKEY register. A sample assembly sequence is shown in [Example 18-1](#). If WRLOCK is already cleared, it can be set to '1' without using the unlock sequence.

Note: To avoid accidental writes to the timer, it is recommended that the WRLOCK bit (RTCCON1L[11]) is kept clear at any other time. For the WRLOCK bit to be set, there is only one instruction cycle time window allowed between the 55h/AA sequence and the setting of WRLOCK; therefore, it is recommended that code follow the procedure in [Example 18-1](#).

Example 18-1. Setting the WRLOCK Bit

```
DISI #6                ; disable interrupts for 6 instructions
MOV #NVKEY, W1
MOV #0x55, W2          ; first unlock code
MOV W2, [W1]           ; write first unlock code
MOV #0xAA, W3          ; second unlock sequence
MOV W3, [W1]           ; write second unlock sequence
BCLR RTCCON1L, #WRLOCK ; clear the WRLOCK bit
```

18.2.3 Selecting RTCC Clock Source

The clock source for the RTCC module can be selected using the CLKSEL[1:0] bits in the RTCCON2L register. When the bits are set to '00', the Secondary Oscillator (SOSC) is used as the reference clock and when the bits are '01', LPRC is used as the reference clock. When CLKSEL[1:0] = 10, the external powerline (50 Hz and 60 Hz) is used as the clock source. When CLKSEL[1:0] = 11, the system clock is used as the clock source.

18.3 Calibration

18.3.1 Clock Source Calibration

A crystal oscillator that is connected to the RTCC may be calibrated to provide an accurate one second clock in two ways. First, coarse frequency adjustment is performed by adjusting the value written to the DIV[15:0] bits. Secondly, a 5-bit value can be written to the FDIV[4:0] control bits to perform a fine clock division.

The DIVx and FDIVx values can be concatenated and considered as a 21-bit prescaler value. If the oscillator source is slightly faster than ideal, the FDIV[4:0] value can be increased to make a small decrease in the RTC frequency. The value of DIV[15:0] should be increased to make larger decreases in the RTC frequency. If the oscillator source is slower than ideal, FDIV[4:0] may be decreased for small calibration changes and DIV[15:0] may need to be decreased to make larger calibration changes.

Before calibration, the user must determine the error of the crystal. This should be done using another timer resource on the device or an external timing reference. It is up to the user to include in the error value, the initial error of the crystal, drift due to temperature and drift due to crystal aging.

18.4 Alarm

- Configurable from half second to one year
- Enabled using the ALRMEN bit (RTCCON1H[15])
- One-time alarm and repeat alarm options are available

18.4.1 Configuring the Alarm

The alarm feature is enabled using the ALRMEN bit. This bit is cleared when an alarm is issued. Writes to the Alarm Value registers should only take place when ALRMEN = 0.

As shown in [Figure 18-2](#), the interval selection of the alarm is configured through the AMASK[3:0] bits (RTCCON1H[11:8]). These bits determine which and how many digits of the alarm must match the clock value for the alarm to occur.

Figure 18-2. Alarm Mask Settings

| Alarm Mask Setting (AMASK[3:0]) | Day of the Week | Month | Day | Hours | Minutes | Seconds |
|------------------------------------|------------------------|---|---|---|---|---|
| 0000 - Every half second | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> |
| 0001 - Every second | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> |
| 0010 - Every 10 seconds | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> s |
| 0011 - Every minute | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> s <input type="text"/> s |
| 0100 - Every 10 minutes | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> m <input type="text"/> | <input type="text"/> s <input type="text"/> s |
| 0101 - Every hour | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> m <input type="text"/> m | <input type="text"/> s <input type="text"/> s |
| 0110 - Every day | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> h <input type="text"/> h | <input type="text"/> m <input type="text"/> m | <input type="text"/> s <input type="text"/> s |
| 0111 - Every week | <input type="text"/> d | <input type="text"/> <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> h <input type="text"/> h | <input type="text"/> m <input type="text"/> m | <input type="text"/> s <input type="text"/> s |
| 1000 - Every month | <input type="text"/> | <input type="text"/> <input type="text"/> | <input type="text"/> d <input type="text"/> d | <input type="text"/> h <input type="text"/> h | <input type="text"/> m <input type="text"/> m | <input type="text"/> s <input type="text"/> s |
| 1001 - Every year ⁽¹⁾ | <input type="text"/> | <input type="text"/> m <input type="text"/> m | <input type="text"/> d <input type="text"/> d | <input type="text"/> h <input type="text"/> h | <input type="text"/> m <input type="text"/> m | <input type="text"/> s <input type="text"/> s |

Note:

1. Annually, except when configured for February 29.

The alarm can also be configured to repeat based on a preconfigured interval. The amount of times this occurs, once the alarm is enabled, is stored in the ALMRPT[7:0] bits (RTCCON1H[7:0]). When the value of the ALMRPTx bits equals 00h and the CHIME bit (RTCCON1H[14]) is cleared, the repeat function is disabled and only a single alarm will occur. The alarm can be repeated, up to 255 times, by loading ALMRPT[7:0] with FFh.

After each alarm is issued, the value of the ALMRPTx bits is decremented by one. Once the value has reached 00h, the alarm will be issued one last time, after which, the ALRMEN bit will be cleared automatically and the alarm will turn off.

Indefinite repetition of the alarm can occur if the CHIME bit = 1. Instead of the alarm being disabled when the value of the ALMRPTx bits reaches 00h, it rolls over to FFh and continues counting indefinitely while CHIME is set.

18.4.2 Alarm Interrupt

At every alarm event, an interrupt is generated. This output is completely synchronous to the RTCC clock and can be used as a trigger clock to the other peripherals.

Note: Changing any of the register bits, other than the RTCOE bit (RTCCON1L[7]), the ALMRPT[7:0] bits (RTCCON1H[7:0]) and the CHIME bit, while the alarm is enabled (ALRMEN = 1), can result in a false alarm event leading to a false alarm interrupt. To avoid a false alarm event, the timer and alarm values should only be changed while the alarm is disabled (ALRMEN = 0).

18.5 Power Control

The RTCC includes a power control feature that allows the device to periodically wake-up an external device, wait for the device to be stable before sampling wake-up events from that device and then shut down the external device. This can be done completely autonomously by the RTCC, without the need to wake-up from the current lower power mode.

To use this feature:

1. Enable the RTCC (RTCEN = 1).
2. Set the PWCEN bit (RTCCON1L[10]).
3. Configure the RTCC pin to drive the PWC control signal (RTCOE = 1 and OUTSEL[2:0] = 011).

The polarity of the PWC control signal may be chosen using the PWCPOL bit (RTCCON1L[9]). An active-low or active-high signal may be used with the appropriate external switch to turn on or off the power to one or more external devices. The active-low setting may also be used in conjunction with an open-drain setting on the RTCC pin, in order to drive the ground pin(s) of the external device directly (with the appropriate external V_{DD} pull-up device), without the need for external switches. Finally, the CHIME bit should be set to enable the PWC periodicity.

Once the RTCC and PWC are enabled and running, the PWC logic will generate a control output and a sample gate output. The control output is driven out on the RTCC pin (when RTCOE = 1 and OUTSEL[2:0] = 011) and is used to power up or down the device, as described above.

Once the control output is asserted, the stability window begins, in which the external device is given enough time to power up and provide a stable output.

Once the output is stable, the RTCC provides a sample gate during the sample window. The use of this sample gate depends on the external device being used, but typically, it is used to mask out one or more wake-up signals from the external device.

Finally, both the stability and the sample windows close after the expiration of the sample window and the external device is powered down.

18.5.1 Power Control Clock Source

The stability and sample windows are controlled by the PWCSAMPx and PWCSTABx bit fields in the RTCCON3L register (RTCCON3L[15:8] and [7:0], respectively). As both the stability and sample windows are defined in terms of the RTCC clock, their absolute values vary by the value of the PWC clock base period (T_{PWCLK}). For example, using a 32.768 kHz SOSC input clock would produce a T_{PWCLK} of $1/32768 = 30.518 \mu s$. The 8-bit magnitude of

PWCSTABx and PWCSAMPx allows for a window size of 0 to 255 T_{PWCLK} . The period of the PWC clock can also be adjusted with a 1:1, 1:16, 1:64 or 1:256 prescaler, determined by the PWCPs[1:0] bits (RTCCON2L[7:6]).

In addition, certain values for the PWCSTABx and PWCSAMPx fields have specific control meanings in determining power control operations. If either bit field is 00h, the corresponding window is inactive. In addition, if the PWCSTABx field is FFh, the stability window remains active continuously, even if power control is disabled.

18.6 Event Timestamping

The RTCC includes a set of Timestamp registers that may be used for the capture of Time and Date register values when an external input signal is received. The RTCC will trigger a timestamp event when a low pulse occurs on the TMRN pin.

18.6.1 Timestamp Operation

The event input is enabled for timestamping using the TSAEN bit (RTCCON1L[0]). When the timestamp event occurs, the present time and date values will be stored in the TSATIMEL/H and TSADATEL/H registers, the TSAEVT status bit (RTCSTATL[3]) will be set and an RTCC interrupt will occur. A new timestamp capture event cannot occur until the user clears the TSAEVT status bit.

The TSATIMEL/H and TSADATEL/H register pairs can be used for data storage when TSAEN = 0. The values of TSATIMEL/H and TSADATEL/H will be maintained throughout all types of non-Power-on Resets (MCLR, WDT, etc).

18.6.2 Manual Timestamp Operation

The current time and date may be captured in the TSATIMEL/H and TSADATEL/H registers by writing a '1' to the TSAEVT bit location while the timestamp functionality is enabled (TSAEN = 1). This write will not set the TSAEVT bit, but it will initiate a timestamp capture. The TSAEVT bit will be set when the capture operation is complete. The user must poll the TSAEVT bit to determine when the capture operation is complete.

After the Timestamp registers have been read, the TSAEVT bit should be cleared to allow further hardware or software timestamp capture events.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7 RTCC Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-------------|----------|--------------|-------------|---------|------------|-------------|-----------|-------------|---------|
| 0x00 ... 0x01CB | Reserved | | | | | | | | | |
| 0x01CC | RTCCON1L | 7:0 | RTCOE | OUTSEL[2:0] | | | | | | TSAEN |
| | | 15:8 | RTCEN | | | | WRLOCK | PWCEN | PWCPOL | PWCPOE |
| 0x01CE | RTCCON1H | 7:0 | ALMRPT[7:0] | | | | | | | |
| | | 15:8 | ALRMEN | CHIME | | AMASK[3:0] | | | | |
| 0x01D0 | RTCCON2L | 7:0 | PWCPS[1:0] | | PS[1:0] | | | | CLKSEL[1:0] | |
| | | 15:8 | FDIV[4:0] | | | | | | | |
| 0x01D2 | RTCCON2H | 7:0 | DIV[7:0] | | | | | | | |
| | | 15:8 | DIV[15:8] | | | | | | | |
| 0x01D4 | RTCCON3L | 7:0 | PWCSTAB[7:0] | | | | | | | |
| | | 15:8 | PWCSAMP[7:0] | | | | | | | |
| 0x01D6 ... 0x01D7 | Reserved | | | | | | | | | |
| 0x01D8 | RTCSTATL | 7:0 | | | ALMEVT | | TSAEVT | SYNC | ALMSYNC | HALFSEC |
| | | 15:8 | | | | | | | | |
| 0x01DA ... 0x01DB | Reserved | | | | | | | | | |
| 0x01DC | TIMEL | 7:0 | | | | | | | | |
| | | 15:8 | | SECTEN[2:0] | | | SECONE[3:0] | | | |
| 0x01DE | TIMEH | 7:0 | | MINTEN[2:0] | | | MINONE[3:0] | | | |
| | | 15:8 | | HRTEN[1:0] | | | HRONE[3:0] | | | |
| 0x01E0 | DATEL | 7:0 | | | | | | WDAY[2:0] | | |
| | | 15:8 | | DAYTEN[1:0] | | | DAYONE[3:0] | | | |
| 0x01E2 | DATEH | 7:0 | | | | MHTTEN | MTHONE[3:0] | | | |
| | | 15:8 | YRTEN[3:0] | | | | YRONE[3:0] | | | |
| 0x01E4 | ALMTIMEL | 7:0 | | | | | | | | |
| | | 15:8 | | SECTEN[2:0] | | | SECONE[3:0] | | | |
| 0x01E6 | ALMTIMEH | 7:0 | | MINTEN[2:0] | | | MINONE[3:0] | | | |
| | | 15:8 | | HRTEN[1:0] | | | HRONE[3:0] | | | |
| 0x01E8 | ALMDATEL | 7:0 | | | | | | WDAY[2:0] | | |
| | | 15:8 | | DAYTEN[1:0] | | | DAYONE[3:0] | | | |
| 0x01EA | ALMDATEH | 7:0 | | | | MHTTEN | MTHONE[3:0] | | | |
| | | 15:8 | YRTEN[3:0] | | | | YRONE[3:0] | | | |
| 0x01EC | TSATIMEL(1) | 7:0 | | | | | | | | |
| | | 15:8 | | SECTEN[2:0] | | | SECONE[3:0] | | | |
| 0x01EE | TSATIMEH(1) | 7:0 | | MINTEN[2:0] | | | MINONE[3:0] | | | |
| | | 15:8 | | HRTEN[1:0] | | | HRONE[3:0] | | | |
| 0x01F0 | TSADATEL(1) | 7:0 | | | | | | WDAY[2:0] | | |
| | | 15:8 | | DAYTEN[1:0] | | | DAYONE[3:0] | | | |
| 0x01F2 | TSADATEH(1) | 7:0 | | | | MHTTEN | MTHONE[3:0] | | | |
| | | 15:8 | YRTEN[3:0] | | | | YRONE[3:0] | | | |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.1 RTCC Control Register 1 Low

Name: RTCCON1L

Offset: 0x1CC

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|----|----|----|--------|-------|--------|--------|
| | RTCEN | | | | WRLOCK | PWCEN | PWCPOL | PWCPOE |
| Access | R/W | | | | R/W | R/W | R/W | R/W |
| Reset | 0 | | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-----|-------------|-----|---|---|---|-------|
| | RTCOE | | OUTSEL[2:0] | | | | | TSAEN |
| Access | R/W | R/W | R/W | R/W | | | | R/W |
| Reset | 0 | 0 | 0 | 0 | | | | 0 |

Bit 15 – RTCEN RTCC Enable bit

| Value | Description |
|-------|---|
| 1 | RTCC is enabled and counts from selected clock source |
| 0 | RTCC is not enabled |

Bit 11 – WRLOCK RTCC Register Write Lock bit

| Value | Description |
|-------|--|
| 1 | RTCC registers are locked |
| 0 | RTCC registers may be written to by user |

Bit 10 – PWCEN Power Control Enable bit

| Value | Description |
|-------|---------------------------|
| 1 | Power control is enabled |
| 0 | Power control is disabled |

Bit 9 – PWCPOL Power Control Polarity bit

| Value | Description |
|-------|-------------------------------------|
| 1 | Power control output is active-high |
| 0 | Power control output is active-low |

Bit 8 – PWCPOE Power Control Output Enable bit

| Value | Description |
|-------|--------------------------------------|
| 1 | Power control output pin is enabled |
| 0 | Power control output pin is disabled |

Bit 7 – RTCOE RTCC Output Enable bit

| Value | Description |
|-------|-------------------------|
| 1 | RTCC output is enabled |
| 0 | RTCC output is disabled |

Bits 6:4 – OUTSEL[2:0] RTCC Output Signal Selection bits

| Value | Description |
|-------|-------------------|
| 111 | Unused |
| 110 | Unused |
| 101 | Unused |
| 100 | Timestamp A event |
| 011 | Power control |
| 010 | RTCC input clock |
| 001 | Second clock |
| 000 | Alarm event |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

Bit 0 – TSAEN Timestamp A Enable bit

| Value | Description |
|-------|--|
| 1 | Timestamp event will occur when a low pulse is detected on the TMPRN pin |
| 0 | Timestamp is disabled |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.2 RTCC Control Register 1 High

Name: RTCCON1H
Offset: 0x1CE

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|-------|----|----|-----|------------|-----|-----|
| | ALRMEN | CHIME | | | | AMASK[3:0] | | |
| Access | R/W | R/W | | | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| | ALMRPT[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – ALRMEN Alarm Enable bit

| Value | Description |
|-------|--|
| 1 | Alarm is enabled (cleared automatically after an alarm event whenever ALMRPT[7:0] = 00h and CHIME = 0) |
| 0 | Alarm is disabled |

Bit 14 – CHIME Chime Enable bit

| Value | Description |
|-------|--|
| 1 | Chime is enabled; ALMRPT[7:0] bits roll over from 00h to FFh |
| 0 | Chime is disabled; ALMRPT[7:0] bits stop once they reach 00h |

Bits 11:8 – AMASK[3:0] Alarm Mask Configuration bits

| Value | Description |
|-------|---|
| 11xx | Reserved – do not use |
| 101x | Reserved – do not use |
| 1001 | Once a year (except when configured for February 29th, once every four years) |
| 1000 | Once a month |
| 0111 | Once a week |
| 0110 | Once a day |
| 0101 | Every hour |
| 0100 | Every ten minutes |
| 0011 | Every minute |
| 0010 | Every ten seconds |
| 0001 | Every second |
| 0000 | Every half second |

Bits 7:0 – ALMRPT[7:0] Alarm Repeat Counter Value bits

| Value | Description |
|----------|---|
| 11111111 | Alarm will repeat 255 more times |
| ... | |
| 00000000 | Alarm will repeat 0 more times The counter decrements on any alarm event. The counter is prevented from rolling over from '00' to 'FF' unless CHIME = 1. |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.3 RTCC Control Register 2 Low

Name: RTCCON2L

Offset: 0x1D0

| | | | | | | | | |
|--------|-----------|-----|-----|-----|-----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | FDIV[4:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | | | |
| Reset | 0 | 0 | 0 | 0 | 0 | | | |

| | | | | | | | | |
|--------|------------|-----|---------|-----|---|---|-------------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PWCPS[1:0] | | PS[1:0] | | | | CLKSEL[1:0] | |
| Access | R/W | R/W | R/W | R/W | | | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | | 0 | 0 |

Bits 15:11 – FDIV[4:0] Fractional Clock Divide bits

| Value | Description |
|-------|--|
| 11111 | Increase period by 31 RTCC input clock cycles every 16 seconds |
| 11101 | Increase period by 30 RTCC input clock cycles every 16 seconds |
| ... | |
| 00010 | Increase period by 2 RTCC input clock cycles every 16 seconds |
| 00001 | Increase period by 1 RTCC input clock cycle every 16 seconds |
| 00000 | No fractional clock division |

Bits 7:6 – PWCPS[1:0] Power Control Prescale Select bits

| Value | Description |
|-------|-------------|
| 11 | 1:256 |
| 10 | 1:64 |
| 01 | 1:16 |
| 00 | 1:1 |

Bits 5:4 – PS[1:0] Prescale Select bits

| Value | Description |
|-------|-------------|
| 11 | 1:256 |
| 10 | 1:64 |
| 01 | 1:16 |
| 00 | 1:1 |

Bits 1:0 – CLKSEL[1:0] Clock Select bits

| Value | Description |
|-------|------------------|
| 11 | Peripheral clock |
| 10 | PWRLCLK pin |
| 01 | LPRC |
| 00 | SOSC |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.4 RTCC Control Register 2 High

Name: RTCCON2H

Offset: 0x1D2

Note:

1. A write to this register is only allowed when WRLOCK = 1.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | DIV[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|----------|-----|-----|-----|-----|-----|-----|-----|
| | DIV[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – DIV[15:0] Clock Divide bits⁽¹⁾

Sets the period of the clock divider counter; value should cause a nominal 1/2 second underflow.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.5 RTCC Control Register 3 Low

Name: RTCCON3L

Offset: 0x1D4

Note:

1. The sample window always starts when the stability window timer expires, except when its initial value is 00h.

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PWCSAMP[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PWCSTAB[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:8 – PWCSAMP[7:0] Power Control Sample Window Timer bits

| Value | Description |
|----------|--|
| 11111111 | Sample window is always enabled, even when PWCEN = 0 |
| 11111110 | Sample window is 254 T_{PWCLK} clock periods |
| ... | |
| 00000001 | Sample window is 1 T_{PWCLK} clock period |
| 00000000 | No sample window |

Bits 7:0 – PWCSTAB[7:0] Power Control Stability Window Timer bits⁽¹⁾

| Value | Description |
|----------|---|
| 11111111 | Stability window is 255 T_{PWCLK} clock periods |
| 11111110 | Stability window is 254 T_{PWCLK} clock periods |
| ... | |
| 00000001 | Stability window is 1 T_{PWCLK} clock period |
| 00000000 | No stability window; sample window starts when the alarm event triggers |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.6 RTCC Status Register Low

Name: RTCSTATL
Offset: 0x1D8

Notes:

1. User software may write a '1' to this location to initiate a Timestamp A event; timestamp capture is not valid until TSAEVT reads as '1'.
2. This bit is read-only; it is cleared to '0' on a write to the SECONE[3:0] bits.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|--------|---|--------|------|---------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | ALMEVT | | TSAEVT | SYNC | ALMSYNC | HALFSEC |
| Access | | | R/W | | R/W | R/W | R/W | R/W |
| Reset | | | 0 | | 0 | 0 | 0 | 0 |

Bit 5 – ALMEVT Alarm Event bit

| Value | Description |
|-------|---------------------------------|
| 1 | An alarm event has occurred |
| 0 | An alarm event has not occurred |

Bit 3 – TSAEVT Timestamp A Event bit⁽¹⁾

| Value | Description |
|-------|------------------------------------|
| 1 | A timestamp event has occurred |
| 0 | A timestamp event has not occurred |

Bit 2 – SYNC Synchronization Status bit

| Value | Description |
|-------|--|
| 1 | TIME registers may change during software read |
| 0 | TIME registers may be read safely |

Bit 1 – ALMSYNC Alarm Synchronization Status bit

| Value | Description |
|-------|--|
| 1 | Alarm registers (ALMTIME and ALMDATE) and Alarm bits (AMASK[3:0]) should not be modified, and Alarm Control bits (ALRMEN, ALMRPT[7:0]) may change during software read |
| 0 | Alarm registers and Alarm Control bits may be written/modified safely |

Bit 0 – HALFSEC Half Second Status bit⁽²⁾

| Value | Description |
|-------|--------------------------------|
| 1 | Second half period of a second |
| 0 | First half period of a second |

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.7 RTCC Time Register Low

Name: TIMEL
Offset: 0x1DC

| | | | | | | | | |
|--------|----|-------------|-----|-----|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | SECTEN[2:0] | | | SECONE[3:0] | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – SECTEN[2:0] Binary Coded Decimal Value of Seconds ‘10’ Digit bits
 Contains a value from 0 to 5.

Bits 11:8 – SECONE[3:0] Binary Coded Decimal Value of Seconds ‘1’ Digit bits
 Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.8 RTCC Time Register High

Name: TIMEH

Offset: 0x1DE

| | | | | | | | | |
|--------|----|-----|-------------|-----|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | HRTEN[1:0] | | HRONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | MINTEN[2:0] | | MINONE[3:0] | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:12 – HRTEN[1:0] Binary Coded Decimal Value of Hours ‘10’ Digit bits
Contains a value from 0 to 2.

Bits 11:8 – HRONE[3:0] Binary Coded Decimal Value of Hours ‘1’ Digit bits
Contains a value from 0 to 9.

Bits 6:4 – MINTEN[2:0] Binary Coded Decimal Value of Minutes ‘10’ Digit bits
Contains a value from 0 to 5.

Bits 3:0 – MINONE[3:0] Binary Coded Decimal Value of Minutes ‘1’ Digit bits
Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.9 RTCC Date Register Low

Name: DATEL

Offset: 0x1E0

| | | | | | | | | |
|--------|----|----|-------------|-----|-------------|-----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | DAYTEN[1:0] | | DAYONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | WDAY[2:0] | | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 0 | 0 | 0 |

Bits 13:12 – DAYTEN[1:0] Binary Coded Decimal Value of Days ‘10’ Digit bits
Contains a value from 0 to 3.

Bits 11:8 – DAYONE[3:0] Binary Coded Decimal Value of Days ‘1’ Digit bits
Contains a value from 0 to 9.

Bits 2:0 – WDAY[2:0] Binary Coded Decimal Value of Weekdays ‘1’ Digit bits
Contains a value from 0 to 6.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.10 RTCC Date Register High

Name: DATEH

Offset: 0x1E2

| | | | | | | | | |
|--------|------------|-----|-----|-------|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | YRTEN[3:0] | | | | YRONE[3:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | x |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | MHTEN | MTHONE[3:0] | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | x | 0 | 0 | 0 | x |

Bits 15:12 – YRTEN[3:0] Binary Coded Decimal Value of Years ‘10’ Digit bits

Bits 11:8 – YRONE[3:0] Binary Coded Decimal Value of Years ‘1’ Digit bits

Bit 4 – MHTEN Binary Coded Decimal Value of Months ‘10’ Digit bits
Contains a value from 0 to 1.

Bits 3:0 – MTHONE[3:0] Binary Coded Decimal Value of Months ‘1’ Digit bits
Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.11 RTCC Alarm Time Register Low

Name: ALMTIMEL

Offset: 0x1E4

| | | | | | | | | |
|--------|----|-------------|-----|-----|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | SECTEN[2:0] | | | SECONE[3:0] | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – SECTEN[2:0] Binary Coded Decimal Value of Seconds ‘10’ Digit bits
Contains a value from 0 to 5.

Bits 11:8 – SECONE[3:0] Binary Coded Decimal Value of Seconds ‘1’ Digit bits
Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.12 RTCC Alarm Time Register High

Name: ALMTIMEH
Offset: 0x1E6

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|-----|-------------|-----|-------------|-----|-----|-----|
| | | | HRTEN[1:0] | | HRONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | MINTEN[2:0] | | MINONE[3:0] | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:12 – HRTEN[1:0] Binary Coded Decimal Value of Hours ‘10’ Digit bits
 Contains a value from 0 to 2.

Bits 11:8 – HRONE[3:0] Binary Coded Decimal Value of Hours ‘1’ Digit bits
 Contains a value from 0 to 9.

Bits 6:4 – MINTEN[2:0] Binary Coded Decimal Value of Minutes ‘10’ Digit bits
 Contains a value from 0 to 5.

Bits 3:0 – MINONE[3:0] Binary Coded Decimal Value of Minutes ‘1’ Digit bits
 Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.13 RTCC Alarm Date Register Low

Name: ALMDATEL

Offset: 0x1E8

| | | | | | | | | |
|--------|----|----|-------------|-----|-------------|-----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | DAYTEN[1:0] | | DAYONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | WDAY[2:0] | | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 0 | 0 | 0 |

Bits 13:12 – DAYTEN[1:0] Binary Coded Decimal Value of Days ‘10’ Digit bits
Contains a value from 0 to 3.

Bits 11:8 – DAYONE[3:0] Binary Coded Decimal Value of Days ‘1’ Digit bits
Contains a value from 0 to 9.

Bits 2:0 – WDAY[2:0] Binary Coded Decimal Value of Weekdays ‘1’ Digit bits
Contains a value from 0 to 6.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.14 RTCC Alarm Date Register High

Name: ALMDATEH
Offset: 0x1EA

| | | | | | | | | |
|--------|------------|-----|-----|-------|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | YRTEN[3:0] | | | | YRONE[3:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | MHTEN | MTHONE[3:0] | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 15:12 – YRTEN[3:0] Binary Coded Decimal Value of Years ‘10’ Digit bits

Bits 11:8 – YRONE[3:0] Binary Coded Decimal Value of Years ‘1’ Digit bits

Bit 4 – MHTEN Binary Coded Decimal Value of Months ‘10’ Digit bits
 Contains a value from 0 to 1.

Bits 3:0 – MTHONE[3:0] Binary Coded Decimal Value of Months ‘1’ Digit bits
 Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.15 RTCC Timestamp A Time Register Low

Name: TSATIMEL⁽¹⁾

Offset: 0x1EC

Note:

1. If TSAEN = 0, bits[15:0] can be used for persistent storage throughout a non-Power-on Reset ($\overline{\text{MCLR}}$, WDT, etc.).

| | | | | | | | | |
|--------|----|-------------|-----|-----|-----|-------------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | SECTEN[2:0] | | | | SECONE[3:0] | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – SECTEN[2:0] Binary Coded Decimal Value of Seconds ‘10’ Digit bits
Contains a value from 0 to 5.

Bits 11:8 – SECONE[3:0] Binary Coded Decimal Value of Seconds ‘1’ Digit bits
Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.16 RTCC Timestamp A Time Register High

Name: TSATIMEH⁽¹⁾

Offset: 0x1EE

Note:

1. If TSAEN = 0, bits[15:0] can be used for persistent storage throughout a non-Power-on Reset ($\overline{\text{MCLR}}$, WDT, etc.).

| | | | | | | | | |
|--------|----|-------------|------------|-----|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | HRTEN[1:0] | | HRONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | MINTEN[2:0] | | | MINONE[3:0] | | | |
| Access | | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:12 – HRTEN[1:0] Binary Coded Decimal Value of Hours ‘10’ Digit bits
Contains a value from 0 to 2.

Bits 11:8 – HRONE[3:0] Binary Coded Decimal Value of Hours ‘1’ Digit bits
Contains a value from 0 to 9.

Bits 6:4 – MINTEN[2:0] Binary Coded Decimal Value of Minutes ‘10’ Digit bits
Contains a value from 0 to 5.

Bits 3:0 – MINONE[3:0] Binary Coded Decimal Value of Minutes ‘1’ Digit bits
Contains a value from 0 to 9.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.17 RTCC Timestamp A Date Register Low

Name: TSADATEL⁽¹⁾

Offset: 0x1F0

Note:

1. If TSAEN = 0, bits[15:0] can be used for persistent storage throughout a non-Power-on Reset ($\overline{\text{MCLR}}$, WDT, etc.).

| | | | | | | | | |
|--------|----|----|-------------|-----|-------------|-----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | DAYTEN[1:0] | | DAYONE[3:0] | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | WDAY[2:0] | | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 0 | 0 | 0 |

Bits 13:12 – DAYTEN[1:0] Binary Coded Decimal Value of Days ‘10’ Digit bits
Contains a value from 0 to 3.

Bits 11:8 – DAYONE[3:0] Binary Coded Decimal Value of Days ‘1’ Digit bits
Contains a value from 0 to 9.

Bits 2:0 – WDAY[2:0] Binary Coded Decimal Value of Weekdays ‘1’ Digit bits
Contains a value from 0 to 6.

PIC24FJ64GP205/GU205 Family

Real-Time Clock and Calendar (RTCC) with Tim...

18.7.18 RTCC Timestamp A Date Register High

Name: TSADATEH⁽¹⁾

Offset: 0x1F2

Note:

1. If TSAEN = 0, bits[15:0] can be used for persistent storage throughout a non-Power-on Reset ($\overline{\text{MCLR}}$, WDT, etc.).

| | | | | | | | | |
|--------|------------|-----|-----|-------|-------------|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | YRTEN[3:0] | | | | YRONE[3:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | MHTEN | MTHONE[3:0] | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 15:12 – YRTEN[3:0] Binary Coded Decimal Value of Years ‘10’ Digit bits

Bits 11:8 – YRONE[3:0] Binary Coded Decimal Value of Years ‘1’ Digit bits

Bit 4 – MHTEN Binary Coded Decimal Value of Months ‘10’ Digit bits
Contains a value from 0 to 1.

Bits 3:0 – MTHONE[3:0] Binary Coded Decimal Value of Months ‘1’ Digit bits
Contains a value from 0 to 9.

19. 32-Bit Programmable Cyclic Redundancy Check (CRC) Generator

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**32-Bit Programmable Cyclic Redundancy Check (CRC)**” (www.microchip.com/DS30009729) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The 32-bit programmable CRC generator provides a hardware implemented method of quickly generating checksums for various networking and security applications. It offers the following features:

- User-Programmable CRC Polynomial Equation, Up to 32 Bits
- Programmable Shift Direction (little or big-endian)
- Independent Data and Polynomial Lengths
- Configurable Interrupt Output
- Data FIFO

Figure 19-1 displays a simplified block diagram of the CRC generator. A simple version of the CRC shift engine is displayed in Figure 19-2.

Figure 19-1. CRC Block Diagram


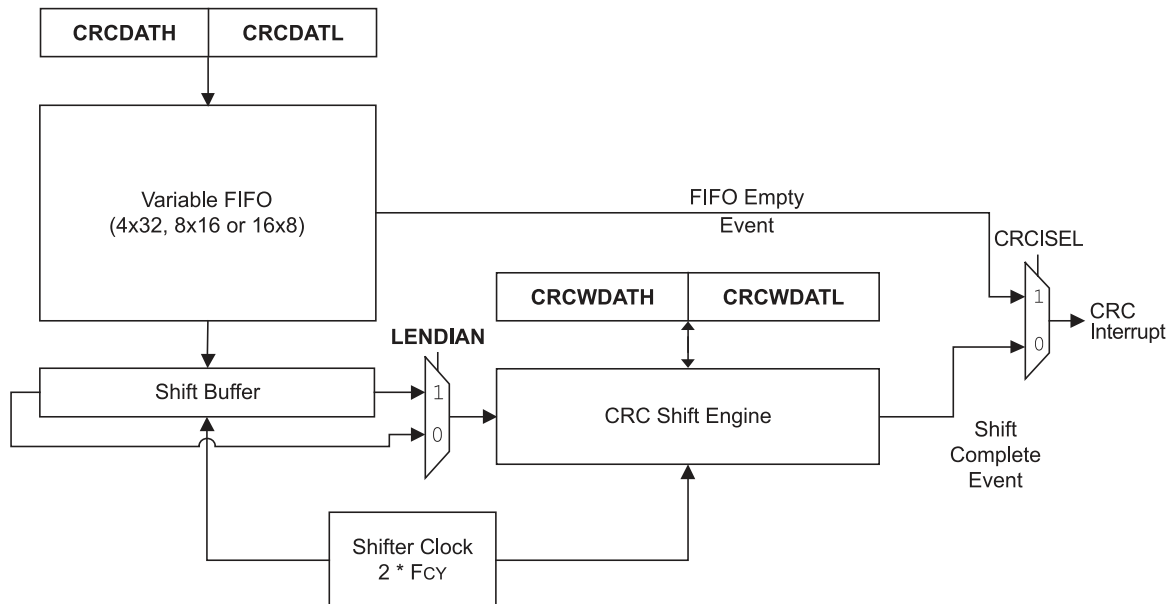


Figure 19-2. CRC Shift Engine Detail

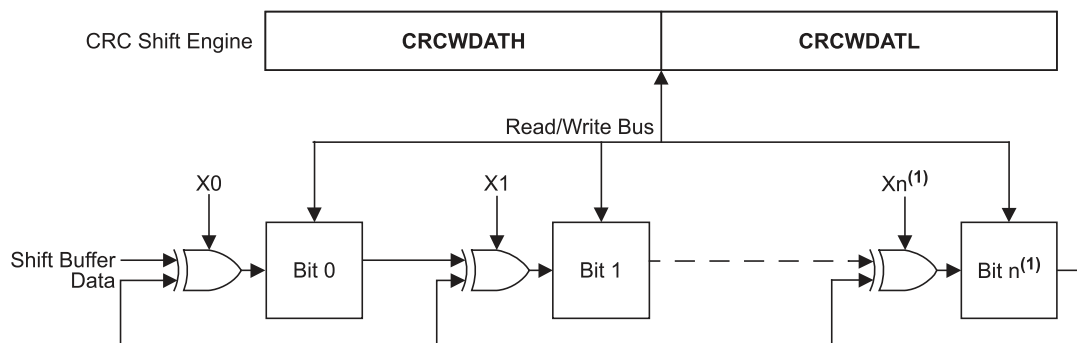

Note:

1. $n = \text{PLEN}[4:1] + 1$.

19.1 User Interface

19.1.1 Polynomial Interface

The CRC module can be programmed for CRC polynomials of up to the 32nd order, using up to 32 bits.

Polynomial length, which reflects the highest exponent in the equation, is selected by the PLEN[4:0] bits (CRCCON2[4:0]).

The CRCXORL and CRCXORH registers control which exponent terms are included in the equation. Setting a particular bit includes that exponent term in the equation. Functionally, this includes an XOR operation on the corresponding bit in the CRC engine. Clearing the bit disables the XOR.

For example, consider two CRC polynomials, one a 16-bit and the other a 32-bit equation.

$$X^{16} + X^{12} + X^5 + 1$$

AND

$$X^{32} + X^{26} + X^{23} + X^{22} + X^{16} + X^{12} + X^{11} + X^{10} + X^8 + X^7 + X^5 + X^4 + X^2 + X + 1$$

To program these polynomials into the CRC generator, set the register bits, as shown in [Table 19-1](#).

Table 19-1. CRC Setup Examples for 16 and 32-Bit Polynomials

| CRC Control Bits | Bit Values | |
|------------------|---------------------|---------------------|
| | 16-Bit Polynomial | 32-Bit Polynomial |
| PLEN[4:0] | 01111 | 11111 |
| X[31:16] | 0000 0000 0000 0001 | 0000 0100 1100 0001 |
| X[15:1] | 0001 0000 0010 000 | 0001 1101 1011 011 |

Note that the appropriate positions are set to '1' to indicate that they are used in the equation (for example, X26 and X23). The '0' bit required by the equation is always XORed; thus, X0 is a don't care. For a polynomial of length 32, it is assumed that the 32nd bit will be used; therefore, the X[31:1] bits do not have the 32nd bit.

19.1.2 Data Interface

The module incorporates a FIFO that works with a variable data width. Input data width can be configured to any value, between 1 and 32 bits, using the DWIDTH[4:0] bits (CRCCON2[12:8]). When the data width is greater than 15, the FIFO is four words deep. When the DWIDTHx bits are between 15 and 8, the FIFO is eight words deep. When the DWIDTHx bits are less than eight, the FIFO is 16 words deep.

The data for which the CRC is to be calculated must first be written into the FIFO. Even if the data width is less than eight, the smallest data element that can be written into the FIFO is 1 byte. For example, if the DWIDTHx bits are five, then the size of the data is DWIDTH[4:0] + 1 or 6. The data are written as a whole byte; the two unused upper bits are ignored by the module.

Once data are written into the MSb of the CRCDAT registers (that is, the MSb as defined by the data width), the value of the VWORD[4:0] bits (CRCCON1[12:8]) increments by one. For example, if the DWIDTHx bits are 24, the VWORDx bits will increment when bit 7 of CRCDATH is written. Therefore, CRCDATL must always be written to before CRCDATH.

The CRC engine starts shifting data when the CRCGO bit (CRCCON1[4]) is set and the value of the VWORDx bits is greater than zero.

Each word is copied out of the FIFO into a buffer register, which decrements the VWORDx bits. The data are then shifted out of the buffer. The CRC engine continues shifting at a rate of two bits per instruction cycle, until the VWORDx bits reach zero. This means that for a given data width, it takes half that number of instructions for each word to complete the calculation. For example, it takes 16 cycles to calculate the CRC for a single word of 32-bit data.

When the VWORDx bits reach the maximum value for the configured value of the DWIDTHx bits (4, 8 or 16), the CRCFUL bit (CRCCON1[7]) becomes set. When the VWORDx bits reach zero, the CRCMPT bit (CRCCON1[6]) becomes set. The FIFO is emptied and the VWORD[4:0] bits are set to '00000' whenever CRCEN is '0'.

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

At least one instruction cycle must pass after a write to CRCWDAT before a read of the VWORDx bits is done.

19.1.3 Data Shift Direction

The LENDIAN bit (CRCCON1[3]) is used to control the shift direction. By default, the CRC will shift data through the engine, MSb first. Setting LENDIAN (= 1) causes the CRC to shift data, LSb first. This setting allows better integration with various communication schemes and removes the overhead of reversing the bit order in software. Note that this only changes the direction the data are shifted into the engine. The result of the CRC calculation will still be a normal CRC result, not a reverse CRC result.

19.1.4 Interrupt Operation

The module generates an interrupt that is configurable by the user for either of two conditions.

If CRCISEL is '0', an interrupt is generated when the VWORD[4:0] bits make a transition from a value of '1' to '0'. If CRCISEL is '1', an interrupt will be generated after the CRC operation finishes and the module sets the CRCGO bit to '0'. Manually setting CRCGO to '0' will not generate an interrupt. Note that when an interrupt occurs, the CRC calculation would not yet be complete. The module will still need $(PLENx + 1)/2$ clock cycles after the interrupt is generated until the CRC calculation is finished.

19.1.5 Typical Operation

To use the module for a typical CRC calculation:

1. Set the CRCEN bit to enable the module.
2. Configure the module for the desired operation.
 - a. Program the desired polynomial using the CRCXOR registers and PLEN[4:0] bits.
 - b. Configure the data width and shift direction using the DWIDTH[4:0] and LENDIAN bits.
3. Set the CRCGO bit to start the calculations.
4. Set the desired CRC non-direct initial value by writing to the CRCWDAT registers.
5. Load all data into the FIFO by writing to the CRCDAT registers as space becomes available (the CRCFUL bit must be zero before the next data loading).
6. Wait until the data FIFO is empty (CRCMPT bit is set).
7. Read the result:

If the data width (DWIDTH[4:0] bits) is more than the polynomial length (PLEN[4:0] bits):

 - a. Wait $(DWIDTH[4:0] + 1)/2$ instruction cycles to make sure that shifts from the shift buffer are finished.
 - b. Change the data width to the polynomial length ($DWIDTH[4:0] = PLEN[4:0]$).
 - c. Write one dummy data word to the CRCDAT registers.
 - d. Wait two instruction cycles to move the data from the FIFO to the shift buffer and $(PLEN[4:0] + 1)/2$ instruction cycles to shift out the result.

Or, if the data width (DWIDTH[4:0] bits) is less than the polynomial length (PLEN[4:0] bits):

1. Clear the CRC Interrupt Selection bit (CRCISEL = 0) to get the interrupt when all shifts are done. Clear the CRC interrupt flag. Write dummy data in the CRCDAT registers and wait until the CRC interrupt flag is set.
2. Read the final CRC result from the CRCWDAT registers.
3. Restore the data width (DWIDTH[4:0] bits) for further calculations (Optional). If the data width (DWIDTH[4:0] bits) is equal to, or less than, the polynomial length (PLEN[4:0] bits):
 - a. Clear the CRC Interrupt Selection bit (CRCISEL = 0) to get the interrupt when all shifts are done.
 - b. Suspend the calculation by setting CRCGO = 0.
 - c. Clear the CRC interrupt flag.
 - d. Write the dummy data with the total data length equal to the polynomial length in the CRCDAT registers.
 - e. Resume the calculation by setting CRCGO = 1.
 - f. Wait until the CRC interrupt flag is set.
 - g. Read the final CRC result from the CRCWDAT registers.

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2 CRC Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|--------|--------|---------|----------------|---------|-------------|---|---|
| 0x00 ... 0x0157 | Reserved | | | | | | | | | |
| 0x0158 | CRCCON1 | 7:0 | CRCFUL | CRCMPT | CRCISEL | CRCGO | LENDIAN | | | |
| | | 15:8 | CRCEN | | CSIDL | | | VWORD[4:0] | | |
| 0x015A | CRCCON2 | 7:0 | | | | | | PLEN[4:0] | | |
| | | 15:8 | | | | | | DWIDTH[4:0] | | |
| 0x015C | CRCXORL | 7:0 | | | | X[6:0] | | | | |
| | | 15:8 | | | | X[14:7] | | | | |
| 0x015E | CRCXORH | 7:0 | | | | X[23:16] | | | | |
| | | 15:8 | | | | X[31:24] | | | | |
| 0x0160 | CRCDATL | 7:0 | | | | CRCDATL[7:0] | | | | |
| | | 15:8 | | | | CRCDATL[15:8] | | | | |
| 0x0162 | CRCDATH | 7:0 | | | | CRCDATH[7:0] | | | | |
| | | 15:8 | | | | CRCDATH[15:8] | | | | |
| 0x0164 | CRCWDATL | 7:0 | | | | CRCWDATL[7:0] | | | | |
| | | 15:8 | | | | CRCWDATL[15:8] | | | | |
| 0x0166 | CRCWDATH | 7:0 | | | | CRCWDATH[7:0] | | | | |
| | | 15:8 | | | | CRCWDATH[15:8] | | | | |

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.1 CRC Control 1 Register

Name: CRCCON1
Offset: 0x158

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|--------|----|-------|------------|-----|-----|-----|-----|
| | CRCCEN | | CSIDL | VWORD[4:0] | | | | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|--------|---------|-------|---------|---|---|---|
| | CRCFUL | CRCMPT | CRCISEL | CRCGO | LENDIAN | | | |
| Access | R/W | R/W | R/W | R/W | R/W | | | |
| Reset | 0 | 0 | 0 | 0 | 0 | | | |

Bit 15 – CRCCEN CRC Enable bit

| Value | Description |
|-------|--|
| 1 | Enables module |
| 0 | Disables module; all state machines, pointers and CRCWDAT/CRCDAT registers reset; other SFRs are NOT reset |

Bit 13 – CSIDL CRC Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bits 12:8 – VWORD[4:0] Pointer Value bits

Indicates the number of valid words in the FIFO. Has a maximum value of 8 when PLEN[4:0] ≥ 7 or 16 when PLEN[4:0] ≤ 7.

Bit 7 – CRCFUL CRC FIFO Full bit

| Value | Description |
|-------|------------------|
| 1 | FIFO is full |
| 0 | FIFO is not full |

Bit 6 – CRCMPT CRC FIFO Empty bit

| Value | Description |
|-------|-------------------|
| 1 | FIFO is empty |
| 0 | FIFO is not empty |

Bit 5 – CRCISEL CRC Interrupt Selection bit

| Value | Description |
|-------|--|
| 1 | Interrupt on FIFO is empty; the final word of data is still shifting through the CRC |
| 0 | Interrupt on shift is complete and results are ready |

Bit 4 – CRCGO Start CRC bit

| Value | Description |
|-------|----------------------------------|
| 1 | Starts CRC serial shifter |
| 0 | CRC serial shifter is turned off |

Bit 3 – LENDIAN Data Shift Direction Select bit

| Value | Description |
|-------|--|
| 1 | Data word is shifted into the CRC, starting with the LSb (little-endian) |
| 0 | Data word is shifted into the CRC, starting with the MSb (big-endian) |

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.2 CRC Control 2 Register

Name: CRCCON2
Offset: 0x15A

| | | | | | | | | |
|--------|----|----|----|-------------|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | DWIDTH[4:0] | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | PLEN[4:0] | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bits 12:8 – DWIDTH[4:0] CRC Data Word Width Configuration bits
 Configures the width of the data word (Data Word Width – 1).

Bits 4:0 – PLEN[4:0] Polynomial Length Configuration bits
 Configures the length of the polynomial (Polynomial Length – 1).

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.3 CRC XOR Polynomial Register Low

Name: CRCXORL
Offset: 0x15C

| | | | | | | | | |
|--------|---------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | X[14:7] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | X[6:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |

Bits 15:1 – X[14:0] XOR of Polynomial Term X^n Enable bits

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.4 CRC XOR Polynomial Register High

Name: CRCXORH
Offset: 0x15E

| | | | | | | | | |
|--------|----------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | X[31:24] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | X[23:16] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – X[31:16] XOR of Polynomial Term X^n Enable bits

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.5 CRC Data Register Low

Name: CRCDATL
Offset: 0x160

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CRCDATL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CRCDATL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CRCDATL[15:0] CRC Data Low bits

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.6 CRC Data Register High

Name: CRCDATH
Offset: 0x162

| | | | | | | | | |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CRCDATH[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CRCDATH[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CRCDATH[15:0] CRC Data High bits

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.7 CRC Result Register Low

Name: CRCWDATL
Offset: 0x164

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CRCWDATL[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CRCWDATL[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CRCWDATL[15:0] CRC Result Low bits

PIC24FJ64GP205/GU205 Family

32-Bit Programmable Cyclic Redundancy Check ...

19.2.8 CRC Result Register High

Name: CRCWDATH
Offset: 0x166

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CRCWDATH[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CRCWDATH[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – CRCWDATH[15:0] CRC Result High bits


20. Configurable Logic Cell (CLC)

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Configurable Logic Cell (CLC)**” (www.microchip.com/DS70005298) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The Configurable Logic Cell (CLC) module allows the user to specify combinations of signals as inputs to a logic function and to use the logic output to control other peripherals or I/O pins. This provides greater flexibility and potential in embedded designs, since the CLC module can operate outside the limitations of software execution and supports a vast amount of output designs.

There are four input gates to the selected logic function. These four input gates select from a pool of up to 32 signals that are selected using four data source selection multiplexers. [Figure 20-1](#) shows an overview of the module. [Figure 20-3](#) shows the details of the data source multiplexers and logic input gate connections.

Figure 20-1. CLC Module

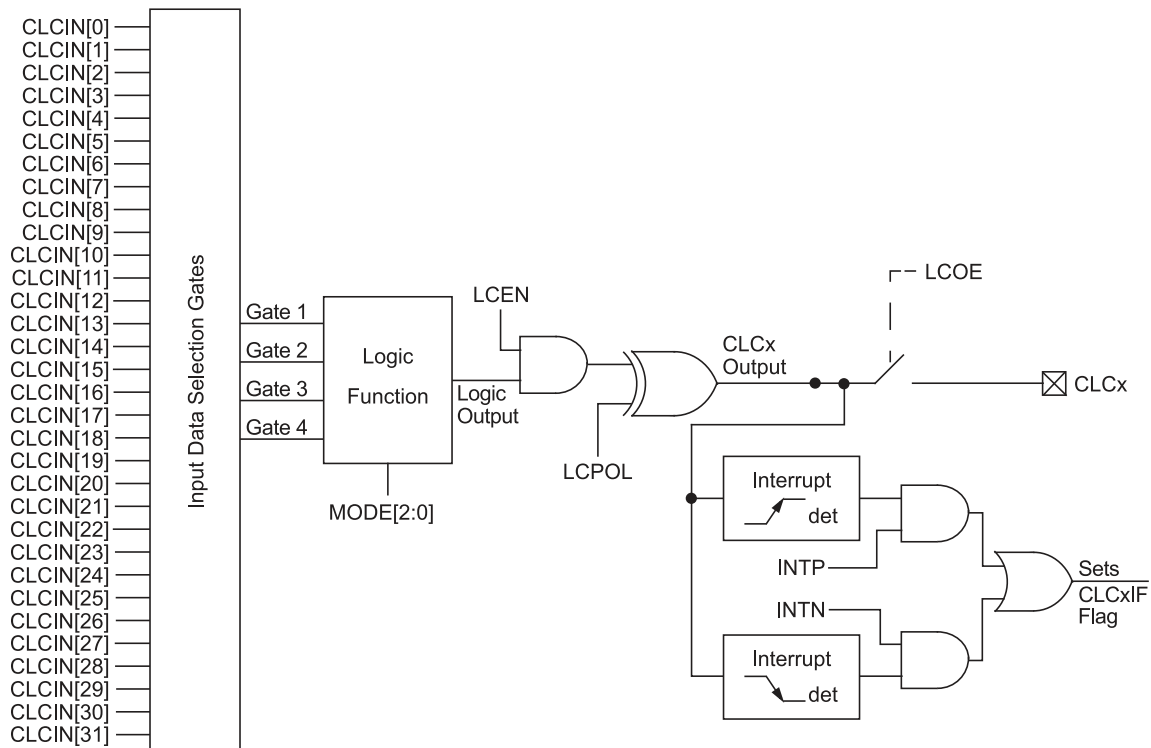

Note: All register bits shown in this figure can be found in the CLCxCONL register.

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)


Figure 20-2. CLC Logic Function Combinatorial Options

| | |
|---|---|
| <p>AND – OR</p> <p>MODE[2:0] = 000</p> | <p>OR – XOR</p> <p>MODE[2:0] = 001</p> |
| <p>4-Input AND</p> <p>MODE[2:0] = 010</p> | <p>S-R Latch</p> <p>MODE[2:0] = 011</p> |
| <p>1-Input D Flip-Flop with S and R</p> <p>MODE[2:0] = 100</p> | <p>2-Input D Flip-Flop with R</p> <p>MODE[2:0] = 101</p> |
| <p>J-K Flip-Flop with R</p> <p>MODE[2:0] = 110</p> | <p>1-Input Transparent Latch with S and R</p> <p>MODE[2:0] = 111</p> |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Figure 20-3. CLC Input Source Selection Diagram

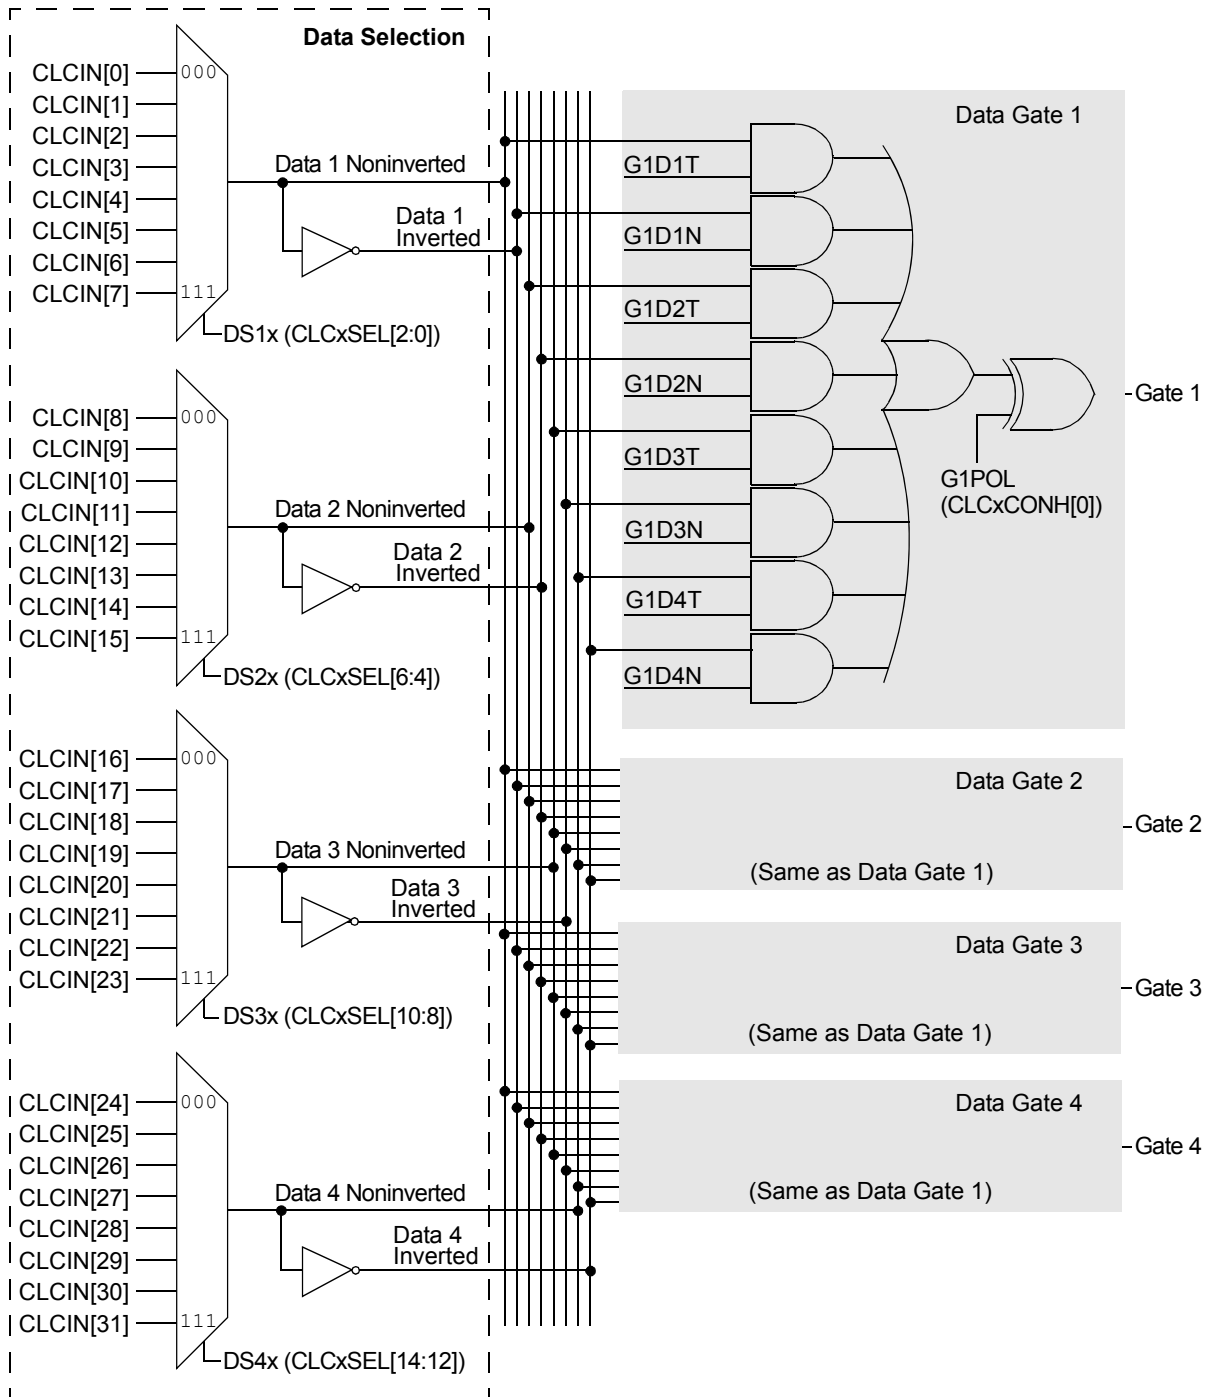

Note: All controls are undefined at power-up.

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1 CLC Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|-------|----------|-------|-------|-------|-----------|-------|-------|
| 0x00 ... 0x0463 | Reserved | | | | | | | | | |
| 0x0464 | CLC1CONL | 7:0 | LCOE | LCOUT | LCPOL | | | MODE[2:0] | | |
| | | 15:8 | LCEN | | | | INTP | INTN | | |
| 0x0466 | CLC1CONH | 7:0 | | | | | G4POL | G3POL | G2POL | G1POL |
| | | 15:8 | | | | | | | | |
| 0x0468 | CLC1SEL | 7:0 | | DS2[2:0] | | | | DS1[2:0] | | |
| | | 15:8 | | DS4[2:0] | | | | DS3[2:0] | | |
| 0x046A ... 0x046B | Reserved | | | | | | | | | |
| 0x046C | CLC1GLSL | 7:0 | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| | | 15:8 | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| 0x046E | CLC1GLSH | 7:0 | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| | | 15:8 | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| 0x0470 | CLC2CONL | 7:0 | LCOE | LCOUT | LCPOL | | | MODE[2:0] | | |
| | | 15:8 | LCEN | | | | INTP | INTN | | |
| 0x0472 | CLC2CONH | 7:0 | | | | | G4POL | G3POL | G2POL | G1POL |
| | | 15:8 | | | | | | | | |
| 0x0474 | CLC2SEL | 7:0 | | DS2[2:0] | | | | DS1[2:0] | | |
| | | 15:8 | | DS4[2:0] | | | | DS3[2:0] | | |
| 0x0476 ... 0x0477 | Reserved | | | | | | | | | |
| 0x0478 | CLC2GLSL | 7:0 | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| | | 15:8 | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| 0x047A | CLC2GLSH | 7:0 | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| | | 15:8 | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| 0x047C | CLC3CONL | 7:0 | LCOE | LCOUT | LCPOL | | | MODE[2:0] | | |
| | | 15:8 | LCEN | | | | INTP | INTN | | |
| 0x047E | CLC3CONH | 7:0 | | | | | G4POL | G3POL | G2POL | G1POL |
| | | 15:8 | | | | | | | | |
| 0x0480 ... 0x0483 | Reserved | | | | | | | | | |
| 0x0484 | CLC3SEL | 7:0 | | DS2[2:0] | | | | DS1[2:0] | | |
| | | 15:8 | | DS4[2:0] | | | | DS3[2:0] | | |
| 0x0484 | CLC3GLSL | 7:0 | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| | | 15:8 | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| 0x0486 | CLC3GLSH | 7:0 | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| | | 15:8 | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| 0x0488 | CLC4CONL | 7:0 | LCOE | LCOUT | LCPOL | | | MODE[2:0] | | |
| | | 15:8 | LCEN | | | | INTP | INTN | | |
| 0x048A | CLC4CONH | 7:0 | | | | | G4POL | G3POL | G2POL | G1POL |
| | | 15:8 | | | | | | | | |
| 0x048C | CLC4SEL | 7:0 | | DS2[2:0] | | | | DS1[2:0] | | |
| | | 15:8 | | DS4[2:0] | | | | DS3[2:0] | | |
| 0x048E ... 0x048F | Reserved | | | | | | | | | |
| 0x0490 | CLC4GLSL | 7:0 | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| | | 15:8 | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| 0x0492 | CLC4GLSH | 7:0 | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| | | 15:8 | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |

20.1.1 Control Registers Overview

The CLCx module is controlled by the following registers:

- CLCxCONL
- CLCxCONH
- CLCxSEL
- CLCxGLSL
- CLCxGLSH

The CLCx Control registers (CLCxCONL and CLCxCONH) are used to enable the module and interrupts, control the output enable bit, select output polarity and select the logic function. The CLCx Control registers also allow the user to control the logic polarity of not only the cell output, but also some intermediate variables.

The CLCx Input MUX Select register (CLCxSEL) allows the user to select up to four data input sources using the four data input selection multiplexers. Each multiplexer has a list of eight data sources available.

The CLCx Gate Logic Input Select registers (CLCxGLSL and CLCxGLSH) allow the user to select which outputs from each of the selection MUXes are used as inputs to the input gates of the logic cell. Each data source MUX outputs both a true and a negated version of its output. All of these eight signals are enabled, ORed together by the logic cell input gates.

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.2 CLC1 Control Register Low

Name: CLC1CONL
Offset: 0x464

| | | | | | | | | |
|--------|------|----|----|----|------|------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LCEN | | | | INTP | INTN | | |
| Access | R/W | | | | R/W | R/W | | |
| Reset | 0 | | | | 0 | 0 | | |

| | | | | | | | | |
|--------|------|-------|-------|---|---|-----|-----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LCOE | LCOUT | LCPOL | | | | MODE[2:0] | |
| Access | R/W | R | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

Bit 15 – LCEN CLC Enable bit

| Value | Description |
|-------|--|
| 1 | CLC is enabled and mixing input signals |
| 0 | CLC is disabled and has logic zero outputs |

Bit 11 – INTP CLC Positive Edge Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Interrupt will be generated when a rising edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 10 – INTN CLC Negative Edge Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupt will be generated when a falling edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 7 – LCOE CLC Port Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | CLC port pin output is enabled |
| 0 | CLC port pin output is disabled |

Bit 6 – LCOUT CLC Data Output Status bit

| Value | Description |
|-------|-----------------|
| 1 | CLC output high |
| 0 | CLC output low |

Bit 5 – LCPOL CLC Output Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of the module is inverted |
| 0 | The output of the module is not inverted |

Bits 2:0 – MODE[2:0] CLC Mode bits

| Value | Description |
|-------|--|
| 111 | Cell is a 1-input transparent latch with S and R |
| 110 | Cell is a JK flip-flop with R |
| 101 | Cell is a 2-input D flip-flop with R |
| 100 | Cell is a 1-input D flip-flop with S and R |
| 011 | Cell is an SR latch |
| 010 | Cell is a 4-input AND |
| 001 | Cell is an OR-XOR |
| 000 | Cell is an AND-OR |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.3 CLC1 Control Register High

Name: CLC1CONH
Offset: 0x466

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|-------|-------|-------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | G4POL | G3POL | G2POL | G1POL |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 3 – G4POL Gate 4 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 4 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 4 logic is not inverted |

Bit 2 – G3POL Gate 3 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 3 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 3 logic is not inverted |

Bit 1 – G2POL Gate 2 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 2 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 2 logic is not inverted |

Bit 0 – G1POL Gate 1 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 1 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 1 logic is not inverted |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.4 CLC1 Input MUX Select Register

Name: CLC1SEL
Offset: 0x468

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----------|-----|-----|----|----------|-----|-----|
| | | DS4[2:0] | | | | DS3[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|----------|-----|-----|---|----------|-----|-----|
| | | DS2[2:0] | | | | DS1[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

Bits 14:12 – DS4[2:0] Data Selection MUX 4 Signal Selection bits

| Value | Description |
|-------|---------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | Unimplemented |
| 100 | Unimplemented |
| 011 | SPI1 Input (SDI1) |
| 010 | Comparator 3 output |
| 001 | CLC2 output |
| 000 | CLCIND pin |

Bits 10:8 – DS3[2:0] Data Selection MUX 3 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP2 OCMP output |
| 101 | DMA Channel 1 Interrupt |
| 100 | UART1 Input (U1RX) |
| 011 | SPI1 Output (SDO1) |
| 010 | Comparator 2 output |
| 001 | CLC1 output |
| 000 | CLCINC pin |

Bits 6:4 – DS2[2:0] Data Selection MUX 2 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP2 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | DMA Channel 0 Interrupt |
| 100 | A/D conversion done |
| 011 | UART1 Output (U1TX) |
| 010 | Comparator 1 output |
| 001 | CLC2 output |
| 000 | CLCINB pin |

Bits 2:0 – DS1[2:0] Data Selection MUX 1 Signal Selection bits

| Value | Description |
|-------|-------------------------------|
| 111 | Timer3 match event |
| 110 | Timer2 match event |
| 101 | Unimplemented |
| 100 | Reference Clock Output (REFO) |
| 011 | LPRC |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

| Value | Description |
|-------|-------------------------------|
| 010 | SOSC |
| 001 | Peripheral clock (F_{PB}) |
| 000 | CLCINA pin |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.5 CLC1 Gate Logic Input Select Low Register

Name: CLC1GLSL
Offset: 0x46C

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G2D4T Gate 2 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 2 |
| 0 | The Data Source 4 signal is disabled for Gate 2 |

Bit 14 – G2D4N Gate 2 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 2 |

Bit 13 – G2D3T Gate 2 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 2 |
| 0 | The Data Source 3 signal is disabled for Gate 2 |

Bit 12 – G2D3N Gate 2 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 2 |

Bit 11 – G2D2T Gate 2 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 2 |
| 0 | The Data Source 2 signal is disabled for Gate 2 |

Bit 10 – G2D2N Gate 2 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 2 |

Bit 9 – G2D1T Gate 2 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 2 |
| 0 | The Data Source 1 signal is disabled for Gate 2 |

Bit 8 – G2D1N Gate 2 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 2 |

Bit 7 – G1D4T Gate 1 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 1 |
| 0 | The Data Source 4 signal is disabled for Gate 1 |

Bit 6 – G1D4N Gate 1 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 1 |

Bit 5 – G1D3T Gate 1 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 1 |
| 0 | The Data Source 3 signal is disabled for Gate 1 |

Bit 4 – G1D3N Gate 1 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 1 |

Bit 3 – G1D2T Gate 1 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 1 |
| 0 | The Data Source 2 signal is disabled for Gate 1 |

Bit 2 – G1D2N Gate 1 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 1 |

Bit 1 – G1D1T Gate 1 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 1 |
| 0 | The Data Source 1 signal is disabled for Gate 1 |

Bit 0 – G1D1N Gate 1 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 1 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.6 CLC1 Gate Logic Input Select High Register

Name: CLC1GLSH
Offset: 0x46E

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G4D4T Gate 4 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 4 |
| 0 | The Data Source 4 signal is disabled for Gate 4 |

Bit 14 – G4D4N Gate 4 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 4 |

Bit 13 – G4D3T Gate 4 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 4 |
| 0 | The Data Source 3 signal is disabled for Gate 4 |

Bit 12 – G4D3N Gate 4 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 4 |

Bit 11 – G4D2T Gate 4 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 4 |
| 0 | The Data Source 2 signal is disabled for Gate 4 |

Bit 10 – G4D2N Gate 4 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 4 |

Bit 9 – G4D1T Gate 4 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 4 |
| 0 | The Data Source 1 signal is disabled for Gate 4 |

Bit 8 – G4D1N Gate 4 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 4 |

Bit 7 – G3D4T Gate 3 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 3 |
| 0 | The Data Source 4 signal is disabled for Gate 3 |

Bit 6 – G3D4N Gate 3 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 3 |

Bit 5 – G3D3T Gate 3 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 3 |
| 0 | The Data Source 3 signal is disabled for Gate 3 |

Bit 4 – G3D3N Gate 3 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 3 |

Bit 3 – G3D2T Gate 3 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 3 |
| 0 | The Data Source 2 signal is disabled for Gate 3 |

Bit 2 – G3D2N Gate 3 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 3 |

Bit 1 – G3D1T Gate 3 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 3 |
| 0 | The Data Source 1 signal is disabled for Gate 3 |

Bit 0 – G3D1N Gate 3 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 3 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.7 CLC2 Control Register Low

Name: CLC2CONL
Offset: 0x470

| | | | | | | | | |
|--------|------|----|----|----|------|------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LCEN | | | | INTP | INTN | | |
| Access | R/W | | | | R/W | R/W | | |
| Reset | 0 | | | | 0 | 0 | | |

| | | | | | | | | |
|--------|------|-------|-------|---|---|-----|-----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LCOE | LCOUT | LCPOL | | | | MODE[2:0] | |
| Access | R/W | R | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

Bit 15 – LCEN CLC Enable bit

| Value | Description |
|-------|--|
| 1 | CLC is enabled and mixing input signals |
| 0 | CLC is disabled and has logic zero outputs |

Bit 11 – INTP CLC Positive Edge Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Interrupt will be generated when a rising edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 10 – INTN CLC Negative Edge Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupt will be generated when a falling edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 7 – LCOE CLC Port Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | CLC port pin output is enabled |
| 0 | CLC port pin output is disabled |

Bit 6 – LCOUT CLC Data Output Status bit

| Value | Description |
|-------|-----------------|
| 1 | CLC output high |
| 0 | CLC output low |

Bit 5 – LCPOL CLC Output Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of the module is inverted |
| 0 | The output of the module is not inverted |

Bits 2:0 – MODE[2:0] CLC Mode bits

| Value | Description |
|-------|--|
| 111 | Cell is a 1-input transparent latch with S and R |
| 110 | Cell is a JK flip-flop with R |
| 101 | Cell is a 2-input D flip-flop with R |
| 100 | Cell is a 1-input D flip-flop with S and R |
| 011 | Cell is an SR latch |
| 010 | Cell is a 4-input AND |
| 001 | Cell is an OR-XOR |
| 000 | Cell is an AND-OR |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.8 CLC2 Control Register High

Name: CLC2CONH

Offset: 0x472

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|-------|-------|-------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | G4POL | G3POL | G2POL | G1POL |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 3 – G4POL Gate 4 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 4 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 4 logic is not inverted |

Bit 2 – G3POL Gate 3 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 3 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 3 logic is not inverted |

Bit 1 – G2POL Gate 2 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 2 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 2 logic is not inverted |

Bit 0 – G1POL Gate 1 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 1 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 1 logic is not inverted |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.9 CLC2 Input MUX Select Register

Name: CLC2SEL
Offset: 0x474

| | | | | | | | | |
|--------|----|----------|-----|-----|----|----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | DS4[2:0] | | | | DS3[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---|----------|-----|-----|---|----------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | DS2[2:0] | | | | DS1[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

Bits 14:12 – DS4[2:0] Data Selection MUX 4 Signal Selection bits

| Value | Description |
|-------|---------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP1 OCMP Output |
| 101 | Unimplemented |
| 100 | Unimplemented |
| 011 | SPI2 Input (SDI2) |
| 010 | Comparator 3 output |
| 001 | CLC1 output |
| 000 | CLCIND pin |

Bits 10:8 – DS3[2:0] Data Selection MUX 3 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP2 OCMP output |
| 101 | DMA Channel 1 Interrupt |
| 100 | UART2 Input (U2RX) |
| 011 | SPI2 Output (SDO2) |
| 010 | Comparator 2 output |
| 001 | CLC2 output |
| 000 | CLCINC pin |

Bits 6:4 – DS2[2:0] Data Selection MUX 2 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP2 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | DMA Channel 0 Interrupt |
| 100 | A/D conversion done |
| 011 | UART2 Output (U2TX) |
| 010 | Comparator 1 output |
| 001 | CLC1 output |
| 000 | CLCINB pin |

Bits 2:0 – DS1[2:0] Data Selection MUX 1 Signal Selection bits

| Value | Description |
|-------|-------------------------------|
| 111 | Timer3 match event |
| 110 | Timer2 match event |
| 101 | Unimplemented |
| 100 | Reference Clock Output (REFO) |
| 011 | LPRC |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

| Value | Description |
|-------|-------------------------------|
| 010 | SOSC |
| 001 | Peripheral clock (F_{PB}) |
| 000 | CLCINA pin |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.10 CLC2 Gate Logic Input Select Low Register

Name: CLC2GLSL
Offset: 0x478

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G2D4T Gate 2 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 2 |
| 0 | The Data Source 4 signal is disabled for Gate 2 |

Bit 14 – G2D4N Gate 2 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 2 |

Bit 13 – G2D3T Gate 2 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 2 |
| 0 | The Data Source 3 signal is disabled for Gate 2 |

Bit 12 – G2D3N Gate 2 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 2 |

Bit 11 – G2D2T Gate 2 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 2 |
| 0 | The Data Source 2 signal is disabled for Gate 2 |

Bit 10 – G2D2N Gate 2 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 2 |

Bit 9 – G2D1T Gate 2 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 2 |
| 0 | The Data Source 1 signal is disabled for Gate 2 |

Bit 8 – G2D1N Gate 2 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 2 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Bit 7 – G1D4T Gate 1 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 1 |
| 0 | The Data Source 4 signal is disabled for Gate 1 |

Bit 6 – G1D4N Gate 1 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 1 |

Bit 5 – G1D3T Gate 1 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 1 |
| 0 | The Data Source 3 signal is disabled for Gate 1 |

Bit 4 – G1D3N Gate 1 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 1 |

Bit 3 – G1D2T Gate 1 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 1 |
| 0 | The Data Source 2 signal is disabled for Gate 1 |

Bit 2 – G1D2N Gate 1 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 1 |

Bit 1 – G1D1T Gate 1 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 1 |
| 0 | The Data Source 1 signal is disabled for Gate 1 |

Bit 0 – G1D1N Gate 1 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 1 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.11 CLC2 Gate Logic Input Select High Register

Name: CLC2GLSH
Offset: 0x47A

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G4D4T Gate 4 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 4 |
| 0 | The Data Source 4 signal is disabled for Gate 4 |

Bit 14 – G4D4N Gate 4 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 4 |

Bit 13 – G4D3T Gate 4 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 4 |
| 0 | The Data Source 3 signal is disabled for Gate 4 |

Bit 12 – G4D3N Gate 4 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 4 |

Bit 11 – G4D2T Gate 4 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 4 |
| 0 | The Data Source 2 signal is disabled for Gate 4 |

Bit 10 – G4D2N Gate 4 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 4 |

Bit 9 – G4D1T Gate 4 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 4 |
| 0 | The Data Source 1 signal is disabled for Gate 4 |

Bit 8 – G4D1N Gate 4 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 4 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Bit 7 – G3D4T Gate 3 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 3 |
| 0 | The Data Source 4 signal is disabled for Gate 3 |

Bit 6 – G3D4N Gate 3 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 3 |

Bit 5 – G3D3T Gate 3 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 3 |
| 0 | The Data Source 3 signal is disabled for Gate 3 |

Bit 4 – G3D3N Gate 3 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 3 |

Bit 3 – G3D2T Gate 3 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 3 |
| 0 | The Data Source 2 signal is disabled for Gate 3 |

Bit 2 – G3D2N Gate 3 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 3 |

Bit 1 – G3D1T Gate 3 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 3 |
| 0 | The Data Source 1 signal is disabled for Gate 3 |

Bit 0 – G3D1N Gate 3 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 3 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.12 CLC3 Control Register Low

Name: CLC3CONL
Offset: 0x47C

| | | | | | | | | |
|--------|------|----|----|----|------|------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LCEN | | | | INTP | INTN | | |
| Access | R/W | | | | R/W | R/W | | |
| Reset | 0 | | | | 0 | 0 | | |

| | | | | | | | | |
|--------|------|-------|-------|---|---|-----|-----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LCOE | LCOUT | LCPOL | | | | MODE[2:0] | |
| Access | R/W | R | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

Bit 15 – LCEN CLC Enable bit

| Value | Description |
|-------|--|
| 1 | CLC is enabled and mixing input signals |
| 0 | CLC is disabled and has logic zero outputs |

Bit 11 – INTP CLC Positive Edge Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Interrupt will be generated when a rising edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 10 – INTN CLC Negative Edge Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupt will be generated when a falling edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 7 – LCOE CLC Port Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | CLC port pin output is enabled |
| 0 | CLC port pin output is disabled |

Bit 6 – LCOUT CLC Data Output Status bit

| Value | Description |
|-------|-----------------|
| 1 | CLC output high |
| 0 | CLC output low |

Bit 5 – LCPOL CLC Output Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of the module is inverted |
| 0 | The output of the module is not inverted |

Bits 2:0 – MODE[2:0] CLC Mode bits

| Value | Description |
|-------|--|
| 111 | Cell is a 1-input transparent latch with S and R |
| 110 | Cell is a JK flip-flop with R |
| 101 | Cell is a 2-input D flip-flop with R |
| 100 | Cell is a 1-input D flip-flop with S and R |
| 011 | Cell is an SR latch |
| 010 | Cell is a 4-input AND |
| 001 | Cell is an OR-XOR |
| 000 | Cell is an AND-OR |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.13 CLC3 Control Register High

Name: CLC3CONH
Offset: 0x47E

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|-------|-------|-------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | G4POL | G3POL | G2POL | G1POL |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 3 – G4POL Gate 4 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 4 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 4 logic is not inverted |

Bit 2 – G3POL Gate 3 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 3 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 3 logic is not inverted |

Bit 1 – G2POL Gate 2 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 2 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 2 logic is not inverted |

Bit 0 – G1POL Gate 1 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 1 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 1 logic is not inverted |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.14 CLC3 Input MUX Select Register

Name: CLC3SEL
Offset: 0x484

| | | | | | | | | |
|--------|----|----------|-----|-----|----|----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | DS4[2:0] | | | | DS3[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---|----------|-----|-----|---|----------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | DS2[2:0] | | | | DS1[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

Bits 14:12 – DS4[2:0] Data Selection MUX 4 Signal Selection bits

| Value | Description |
|-------|---------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | Unimplemented |
| 100 | Unimplemented |
| 011 | SPI1 Input (SDI1) |
| 010 | Comparator 3 output |
| 001 | CLC4 output |
| 000 | CLCIND pin |

Bits 10:8 – DS3[2:0] Data Selection MUX 3 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP2 OCMP output |
| 101 | DMA Channel 1 Interrupt |
| 100 | UART1 Input (U1RX) |
| 011 | SPI1 Output (SDO1) |
| 010 | Comparator 2 output |
| 001 | CLC1 output |
| 000 | CLCINC pin |

Bits 6:4 – DS2[2:0] Data Selection MUX 2 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP2 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | DMA Channel 0 Interrupt |
| 100 | A/D conversion done |
| 011 | UART1 Output (U1TX) |
| 010 | Comparator 1 output |
| 001 | CLC2 output |
| 000 | CLCINB pin |

Bits 2:0 – DS1[2:0] Data Selection MUX 1 Signal Selection bits

| Value | Description |
|-------|-------------------------------|
| 111 | Timer3 match event |
| 110 | Timer2 match event |
| 101 | Unimplemented |
| 100 | Reference Clock Output (REFO) |
| 011 | LPRC |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

| Value | Description |
|-------|-------------------------------|
| 010 | SOSC |
| 001 | Peripheral clock (F_{PB}) |
| 000 | CLCINA pin |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.15 CLC3 Gate Logic Input Select Low Register

Name: CLC3GLSL
Offset: 0x484

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G2D4T Gate 2 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 2 |
| 0 | The Data Source 4 signal is disabled for Gate 2 |

Bit 14 – G2D4N Gate 2 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 2 |

Bit 13 – G2D3T Gate 2 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 2 |
| 0 | The Data Source 3 signal is disabled for Gate 2 |

Bit 12 – G2D3N Gate 2 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 2 |

Bit 11 – G2D2T Gate 2 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 2 |
| 0 | The Data Source 2 signal is disabled for Gate 2 |

Bit 10 – G2D2N Gate 2 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 2 |

Bit 9 – G2D1T Gate 2 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 2 |
| 0 | The Data Source 1 signal is disabled for Gate 2 |

Bit 8 – G2D1N Gate 2 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 2 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Bit 7 – G1D4T Gate 1 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 1 |
| 0 | The Data Source 4 signal is disabled for Gate 1 |

Bit 6 – G1D4N Gate 1 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 1 |

Bit 5 – G1D3T Gate 1 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 1 |
| 0 | The Data Source 3 signal is disabled for Gate 1 |

Bit 4 – G1D3N Gate 1 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 1 |

Bit 3 – G1D2T Gate 1 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 1 |
| 0 | The Data Source 2 signal is disabled for Gate 1 |

Bit 2 – G1D2N Gate 1 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 1 |

Bit 1 – G1D1T Gate 1 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 1 |
| 0 | The Data Source 1 signal is disabled for Gate 1 |

Bit 0 – G1D1N Gate 1 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 1 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.16 CLC3 Gate Logic Input Select High Register

Name: CLC3GLSH
Offset: 0x486

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G4D4T Gate 4 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 4 |
| 0 | The Data Source 4 signal is disabled for Gate 4 |

Bit 14 – G4D4N Gate 4 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 4 |

Bit 13 – G4D3T Gate 4 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 4 |
| 0 | The Data Source 3 signal is disabled for Gate 4 |

Bit 12 – G4D3N Gate 4 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 4 |

Bit 11 – G4D2T Gate 4 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 4 |
| 0 | The Data Source 2 signal is disabled for Gate 4 |

Bit 10 – G4D2N Gate 4 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 4 |

Bit 9 – G4D1T Gate 4 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 4 |
| 0 | The Data Source 1 signal is disabled for Gate 4 |

Bit 8 – G4D1N Gate 4 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 4 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Bit 7 – G3D4T Gate 3 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 3 |
| 0 | The Data Source 4 signal is disabled for Gate 3 |

Bit 6 – G3D4N Gate 3 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 3 |

Bit 5 – G3D3T Gate 3 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 3 |
| 0 | The Data Source 3 signal is disabled for Gate 3 |

Bit 4 – G3D3N Gate 3 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 3 |

Bit 3 – G3D2T Gate 3 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 3 |
| 0 | The Data Source 2 signal is disabled for Gate 3 |

Bit 2 – G3D2N Gate 3 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 3 |

Bit 1 – G3D1T Gate 3 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 3 |
| 0 | The Data Source 1 signal is disabled for Gate 3 |

Bit 0 – G3D1N Gate 3 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 3 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.17 CLC4 Control Register Low

Name: CLC4CONL
Offset: 0x488

| | | | | | | | | |
|--------|------|----|----|----|------|------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | LCEN | | | | INTP | INTN | | |
| Access | R/W | | | | R/W | R/W | | |
| Reset | 0 | | | | 0 | 0 | | |

| | | | | | | | | |
|--------|------|-------|-------|---|---|-----|-----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LCOE | LCOUT | LCPOL | | | | MODE[2:0] | |
| Access | R/W | R | R/W | | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | | | 0 | 0 | 0 |

Bit 15 – LCEN CLC Enable bit

| Value | Description |
|-------|--|
| 1 | CLC is enabled and mixing input signals |
| 0 | CLC is disabled and has logic zero outputs |

Bit 11 – INTP CLC Positive Edge Interrupt Enable bit

| Value | Description |
|-------|--|
| 1 | Interrupt will be generated when a rising edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 10 – INTN CLC Negative Edge Interrupt Enable bit

| Value | Description |
|-------|---|
| 1 | Interrupt will be generated when a falling edge occurs on LCOUT |
| 0 | Interrupt will not be generated |

Bit 7 – LCOE CLC Port Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | CLC port pin output is enabled |
| 0 | CLC port pin output is disabled |

Bit 6 – LCOUT CLC Data Output Status bit

| Value | Description |
|-------|-----------------|
| 1 | CLC output high |
| 0 | CLC output low |

Bit 5 – LCPOL CLC Output Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of the module is inverted |
| 0 | The output of the module is not inverted |

Bits 2:0 – MODE[2:0] CLC Mode bits

| Value | Description |
|-------|--|
| 111 | Cell is a 1-input transparent latch with S and R |
| 110 | Cell is a JK flip-flop with R |
| 101 | Cell is a 2-input D flip-flop with R |
| 100 | Cell is a 1-input D flip-flop with S and R |
| 011 | Cell is an SR latch |
| 010 | Cell is a 4-input AND |
| 001 | Cell is an OR-XOR |
| 000 | Cell is an AND-OR |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.18 CLC4 Control Register High

Name: CLC4CONH

Offset: 0x48A

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|-------|-------|-------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | G4POL | G3POL | G2POL | G1POL |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 3 – G4POL Gate 4 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 4 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 4 logic is not inverted |

Bit 2 – G3POL Gate 3 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 3 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 3 logic is not inverted |

Bit 1 – G2POL Gate 2 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 2 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 2 logic is not inverted |

Bit 0 – G1POL Gate 1 Polarity Control bit

| Value | Description |
|-------|--|
| 1 | The output of Channel 1 logic is inverted when applied to the logic cell |
| 0 | The output of Channel 1 logic is not inverted |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.19 CLC4 Input MUX Select Register

Name: CLC4SEL
Offset: 0x48C

| | | | | | | | | |
|--------|----|----------|-----|-----|----|----------|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | DS4[2:0] | | | | DS3[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---|----------|-----|-----|---|----------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | DS2[2:0] | | | | DS1[2:0] | | |
| Access | | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | | 0 | 0 | 0 | | 0 | 0 | 0 |

Bits 14:12 – DS4[2:0] Data Selection MUX 4 Signal Selection bits

| Value | Description |
|-------|---------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | Unimplemented |
| 100 | Unimplemented |
| 011 | SPI2 Input (SDI2) |
| 010 | Comparator 3 output |
| 001 | CLC3 output |
| 000 | CLCIND pin |

Bits 10:8 – DS3[2:0] Data Selection MUX 3 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP3 OCMP output |
| 110 | MCCP2 OCMP output |
| 101 | DMA Channel 1 Interrupt |
| 100 | UART2 Input (U2RX) |
| 011 | SPI2 Output (SDO2) |
| 010 | Comparator 2 output |
| 001 | CLC2 output |
| 000 | CLCINC pin |

Bits 6:4 – DS2[2:0] Data Selection MUX 2 Signal Selection bits

| Value | Description |
|-------|-------------------------|
| 111 | MCCP2 OCMP output |
| 110 | MCCP1 OCMP output |
| 101 | DMA Channel 0 Interrupt |
| 100 | A/D conversion done |
| 011 | UART2 Output (U2TX) |
| 010 | Comparator 1 output |
| 001 | CLC1 output |
| 000 | CLCINB pin |

Bits 2:0 – DS1[2:0] Data Selection MUX 1 Signal Selection bits

| Value | Description |
|-------|-------------------------------|
| 111 | Timer3 match event |
| 110 | Timer2 match event |
| 101 | Unimplemented |
| 100 | Reference Clock Output (REFO) |
| 011 | LPRC |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

| Value | Description |
|-------|-------------------------------|
| 010 | SOSC |
| 001 | Peripheral clock (F_{PB}) |
| 000 | CLCINA pin |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.20 CLC4 Gate Logic Input Select Low Register

Name: CLC4GLSL
Offset: 0x490

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G2D4T | G2D4N | G2D3T | G2D3N | G2D2T | G2D2N | G2D1T | G2D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G1D4T | G1D4N | G1D3T | G1D3N | G1D2T | G1D2N | G1D1T | G1D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G2D4T Gate 2 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 2 |
| 0 | The Data Source 4 signal is disabled for Gate 2 |

Bit 14 – G2D4N Gate 2 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 2 |

Bit 13 – G2D3T Gate 2 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 2 |
| 0 | The Data Source 3 signal is disabled for Gate 2 |

Bit 12 – G2D3N Gate 2 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 2 |

Bit 11 – G2D2T Gate 2 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 2 |
| 0 | The Data Source 2 signal is disabled for Gate 2 |

Bit 10 – G2D2N Gate 2 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 2 |

Bit 9 – G2D1T Gate 2 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 2 |
| 0 | The Data Source 1 signal is disabled for Gate 2 |

Bit 8 – G2D1N Gate 2 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 2 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 2 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

Bit 7 – G1D4T Gate 1 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 1 |
| 0 | The Data Source 4 signal is disabled for Gate 1 |

Bit 6 – G1D4N Gate 1 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 1 |

Bit 5 – G1D3T Gate 1 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 1 |
| 0 | The Data Source 3 signal is disabled for Gate 1 |

Bit 4 – G1D3N Gate 1 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 1 |

Bit 3 – G1D2T Gate 1 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 1 |
| 0 | The Data Source 2 signal is disabled for Gate 1 |

Bit 2 – G1D2N Gate 1 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 1 |

Bit 1 – G1D1T Gate 1 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 1 |
| 0 | The Data Source 1 signal is disabled for Gate 1 |

Bit 0 – G1D1N Gate 1 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 1 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 1 |

PIC24FJ64GP205/GU205 Family

Configurable Logic Cell (CLC)

20.1.21 CLC4 Gate Logic Input Select High Register

Name: CLC4GLSH
Offset: 0x492

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G4D4T | G4D4N | G4D3T | G4D3N | G4D2T | G4D2N | G4D1T | G4D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| | G3D4T | G3D4N | G3D3T | G3D3N | G3D2T | G3D2N | G3D1T | G3D1N |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – G4D4T Gate 4 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 4 |
| 0 | The Data Source 4 signal is disabled for Gate 4 |

Bit 14 – G4D4N Gate 4 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 4 |

Bit 13 – G4D3T Gate 4 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 4 |
| 0 | The Data Source 3 signal is disabled for Gate 4 |

Bit 12 – G4D3N Gate 4 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 4 |

Bit 11 – G4D2T Gate 4 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 4 |
| 0 | The Data Source 2 signal is disabled for Gate 4 |

Bit 10 – G4D2N Gate 4 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 4 |

Bit 9 – G4D1T Gate 4 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 4 |
| 0 | The Data Source 1 signal is disabled for Gate 4 |

Bit 8 – G4D1N Gate 4 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 4 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 4 |

Bit 7 – G3D4T Gate 3 Data Source 4 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 4 signal is enabled for Gate 3 |
| 0 | The Data Source 4 signal is disabled for Gate 3 |

Bit 6 – G3D4N Gate 3 Data Source 4 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 4 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 4 inverted signal is disabled for Gate 3 |

Bit 5 – G3D3T Gate 3 Data Source 3 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 3 signal is enabled for Gate 3 |
| 0 | The Data Source 3 signal is disabled for Gate 3 |

Bit 4 – G3D3N Gate 3 Data Source 3 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 3 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 3 inverted signal is disabled for Gate 3 |

Bit 3 – G3D2T Gate 3 Data Source 2 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 2 signal is enabled for Gate 3 |
| 0 | The Data Source 2 signal is disabled for Gate 3 |

Bit 2 – G3D2N Gate 3 Data Source 2 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 2 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 2 inverted signal is disabled for Gate 3 |

Bit 1 – G3D1T Gate 3 Data Source 1 True Enable bit

| Value | Description |
|-------|---|
| 1 | The Data Source 1 signal is enabled for Gate 3 |
| 0 | The Data Source 1 signal is disabled for Gate 3 |

Bit 0 – G3D1N Gate 3 Data Source 1 Negated Enable bit

| Value | Description |
|-------|--|
| 1 | The Data Source 1 inverted signal is enabled for Gate 3 |
| 0 | The Data Source 1 inverted signal is disabled for Gate 3 |

21. 12-Bit A/D Converter with Threshold Detect

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information on the 12-Bit A/D Converter, refer to “**12-Bit A/D Converter with Threshold Detect**” (www.microchip.com/DS39739) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The A/D Converter has the following key features:

- Successive Approximation Register (SAR) Conversion
- Selectable 10-Bit or 12-Bit (default) Conversion Resolution
- Up to 17 Analog Input Channels (internal and external)
- Multiple Internal Reference Input Channels
- External Voltage Reference Input Pins
- Unipolar Differential Sample-and-Hold (S/H) Amplifier
- Automated Threshold Scan and Compare Operation to Pre-Evaluate Conversion Results
- Selectable Conversion Trigger Source
- Fixed Length (one word per channel), Configurable Conversion Result Buffer
- Four Options for Results Alignment
- Configurable Interrupt Generation
- Enhanced DMA Operations with Indirect Address Generation
- Operation During CPU Sleep and Idle modes

The 12-bit A/D Converter module is an enhanced version of the 10-bit module offered in earlier PIC24 devices. It is a Successive Approximation Register (SAR) Converter, enhanced with 12-bit resolution, a wide range of automatic sampling options, tighter integration with other analog modules and a configurable results buffer.


It also includes a unique Threshold Detect feature that allows the module itself to make simple decisions based on the conversion results, and enhanced operation with the DMA Controller through Peripheral Indirect Addressing (PIA).

A simplified block diagram for the module is shown in [Figure 21-1](#).

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

Figure 21-1. 12-Bit A/D Converter Block Diagram (PIC24FJ64GP205/GU205 Family)

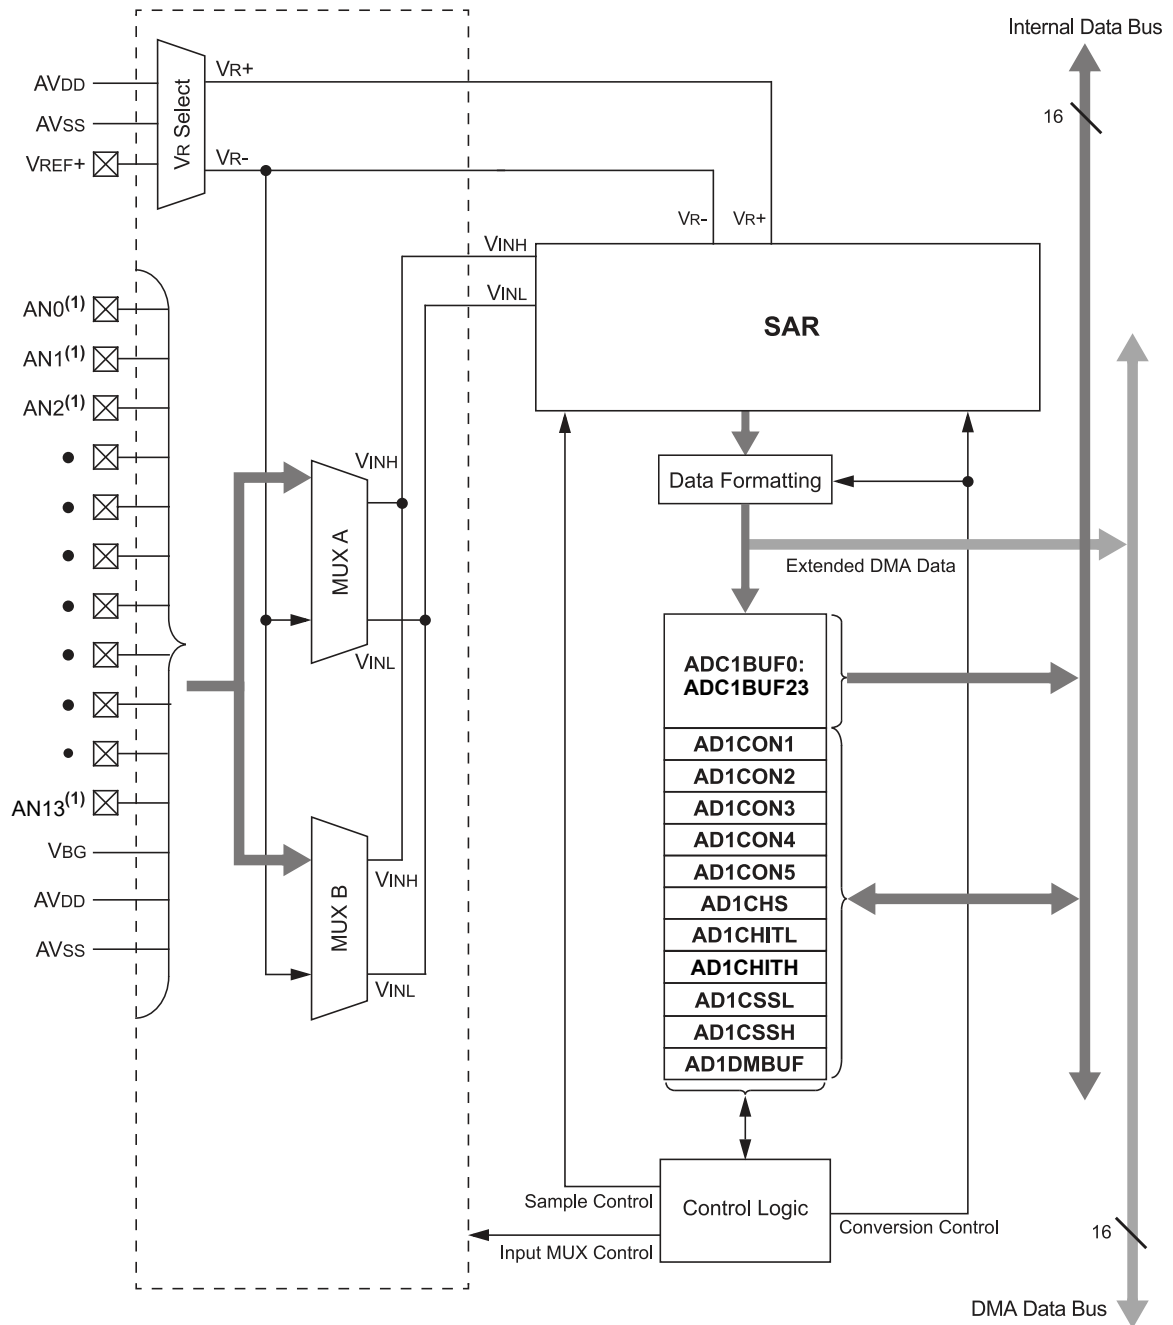

Note:

1. Available ANx pins are package-dependent.

21.1 Basic Operation

To perform a standard A/D conversion:

1. Configure the module:
 - a. Configure port pins as analog inputs by setting the appropriate bits in the ANSx registers (see [11.2. Configuring Analog Port Pins](#) for more information).
 - b. Select the voltage reference source to match the expected range on analog inputs (AD1CON2[15:13]).
 - c. Select the positive and negative multiplexer inputs for each channel (AD1CHS[15:0]).
 - d. Select the analog conversion clock to match the desired data rate with the processor clock (AD1CON3[7:0]).
 - e. Select the appropriate sample/conversion sequence (AD1CON1[7:4] and AD1CON3[12:8]).
 - f. For Channel A scanning operations, select the positive channels to be included (AD1CSSH and AD1CSSL registers).
 - g. Select how conversion results are presented in the buffer (AD1CON1[9:8] and AD1CON5 register).
 - h. Select the interrupt rate (AD1CON2[6:2]).
 - i. Turn on A/D module (AD1CON1[15]).
2. Configure the A/D interrupt (if required):
 - a. Clear the AD1IF bit (IFS0[13]).
 - b. Enable the AD1IE interrupt (IEC0[13]).
 - c. Select the A/D interrupt priority (IPC3[6:4]).
3. If the module is configured for manual sampling, set the SAMP bit (AD1CON1[1]) to begin sampling.

21.2 Extended DMA Operations

In addition to the standard features available on all 12-bit A/D Converters, PIC24FJ64GP205/GU205 family devices implement a limited extension of DMA functionality. This extension adds features that work with the device's DMA Controller to expand the A/D module's data storage abilities beyond the module's built-in buffer.

The Extended DMA functionality is controlled by the DMAEN bit (AD1CON1[11]); setting this bit enables the functionality. The DMABM bit (AD1CON1[12]) configures how the DMA feature operates.

21.2.1 Extended Buffer Mode

Extended Buffer mode (DMABM = 1) maps the A/D Data Buffer registers and data from all channels, above 13, into a user-specified area of data RAM. This allows users to read the conversion results of channels above 13, which do not have their own memory-mapped A/D buffer locations, from data memory.

To accomplish this, the DMA must be configured in Peripheral Indirect Addressing mode and the DMA destination address must point to the beginning of the buffer. The DMA count must be set to generate an interrupt after the desired number of conversions.

In Extended Buffer mode, the A/D control bits will function similarly to non-DMA modes. The BUFREGEN bit will still select between FIFO mode and Channel-Aligned mode, but the number of words in the destination FIFO will be determined by the SMP1[4:0] bits in DMA mode. In FIFO mode, the BUFM bit will still split the output FIFO into two sets of 13 results (the SMP1x bits should be set accordingly) and the BUFS bit will still indicate which set of results is being written to and which can be read.

21.2.2 PIA Mode

When DMABM = 0, the A/D module is configured to function with the DMA Controller for Peripheral Indirect Addressing (PIA) mode operations. In this mode, the A/D module generates an 11-bit Indirect Address (IA). This is ORed with the destination address in the DMA Controller to define where the A/D conversion data will be stored.

In PIA mode, the buffer space is created as a series of contiguous smaller buffers, one per analog channel. The size of the channel buffer determines how many analog channels can be accommodated. The size of the buffer is selected by the DMABL[2:0] bits (AD1CON4[2:0]). The size options range from a single word per buffer to 128 words. Each channel is allocated a buffer of this size, regardless of whether or not the channel will actually have conversion data.

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

The IA is created by combining the base address within a channel buffer with three to five bits (depending on the buffer size) to identify the channel. The base address ranges from zero to seven bits wide, depending on the buffer size. The address is right-padded with a '0' in order to maintain address alignment in the Data Space. The concatenated channel and base address bits are then left-padded with zeros, as necessary, to complete the 11-bit IA.

The IA is configured to auto-increment which channel is written in each analog input's sub-buffer, during write operations, by using the SMPLx bits (AD1CON2[6:2]).

As with PIA operations for any DMA-enabled module, the base destination address in the DMADSTn register must be masked properly to accommodate the IA. [Table 21-1](#) shows how complete addresses are formed. Note that the address masking varies for each buffer size option. Because of masking requirements, some address ranges may not be available for certain buffer sizes. Users should verify that the DMA base address is compatible with the buffer size selected.


Table 21-1. Indirect Address Generation in PIA Mode

| DMABL[2:0] | Buffer Size per Channel (words) | Generated Offset Address (lower 11 bits) | Available Input Channels | Allowable DMADSTn Addresses |
|------------|---------------------------------|--|--------------------------|-----------------------------|
| 000 | 1 | 000 00cc ccc0 | 32 | xxxx xxxx xx00 0000 |
| 001 | 2 | 000 0ccc ccn0 | 32 | xxxx xxxx x000 0000 |
| 010 | 4 | 000 cccc cnn0 | 32 | xxxx xxxx 0000 0000 |
| 011 | 8 | 00c cccc nnn0 | 32 | xxxx xxx0 0000 0000 |
| 100 | 16 | 0cc ccen nnn0 | 32 | xxxx xx00 0000 0000 |
| 101 | 32 | ccc ccnn nnn0 | 32 | xxxx x000 0000 0000 |
| 110 | 64 | ccc cnnn nnn0 | 16 | xxxx x000 0000 0000 |
| 111 | 128 | ccc nnnn nnn0 | 8 | xxxx x000 0000 0000 |

Legend: ccc = Channel number (three to five bits), n = Base buffer address (zero to seven bits),
x = User-definable range of DMADSTn for base address, 0 = Masked bits of DMADSTn for IA.

[Figure 21-2](#) shows how the parts of the address define the buffer locations in data memory. In this case, the module "allocates" 256 bytes of data RAM (1000h to 1100h) for 32 buffers of four words each. However, this is not a hard allocation and nothing prevents these locations from being used for other purposes. For example, in the current case, if Analog Channels 1, 3 and 8 are being sampled and converted, conversion data will only be written to the channel buffers, starting at 1008h, 1018h and 1040h. The holes in the PIA buffer space can be used for any other purpose. It is the user's responsibility to keep track of buffer locations and prevent data overwrites.

**Figure 21-2. Example of Buffer Address Generation in PIA Mode
(4-Word Buffers per Channel)**

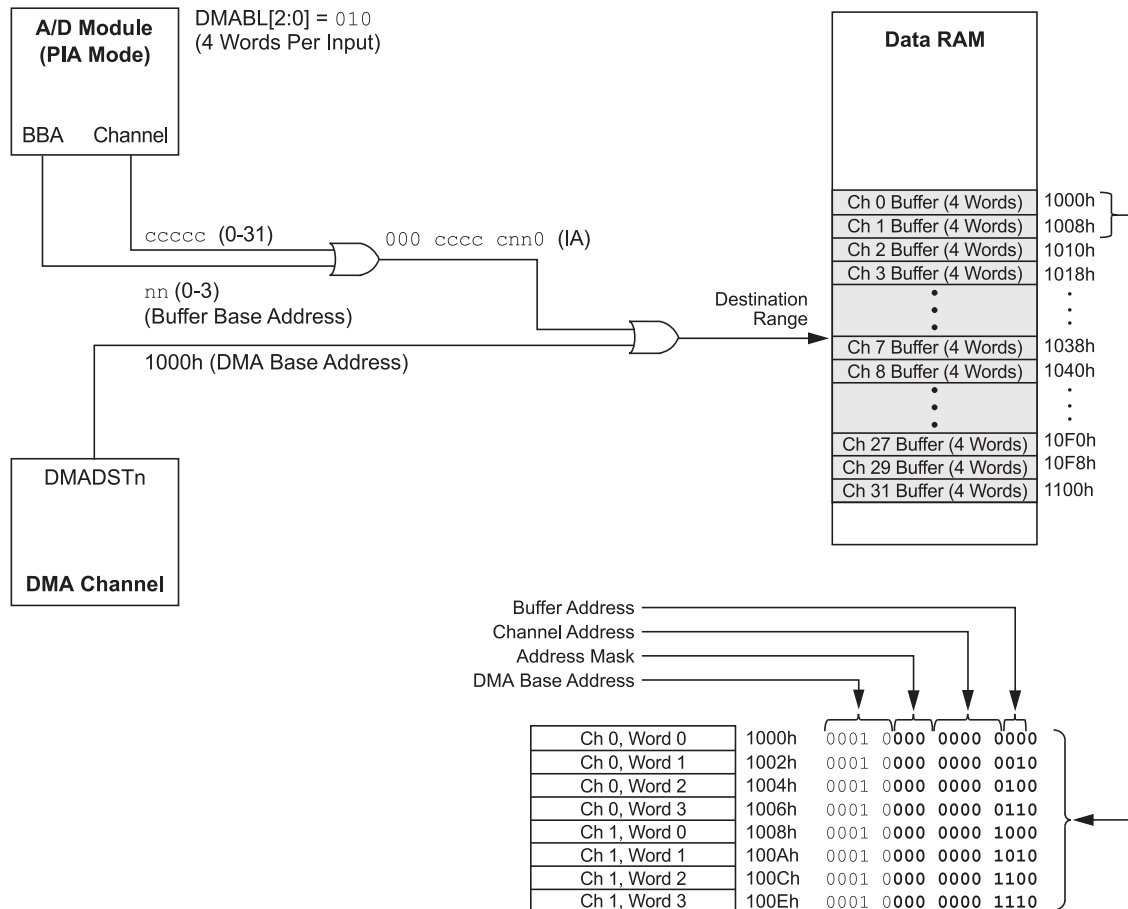


21.3 Sampling Time Requirements

The analog input model of the 12-Bit High-Speed, Multiple SARs ADC is illustrated in [Figure 21-3](#). The total acquisition time for the Analog-to-Digital conversion is a function of the Holding Capacitor (C_{HOLD}) charge time. For the ADC module to meet its specified accuracy, the Holding Capacitor (C_{HOLD}) must be allowed to fully charge to the voltage level on the analog input pin. The analog output Source Impedance (R_S), the Interconnect Impedance (R_{IC}) and the internal Sampling Switch Impedance (R_{SS}) combine to directly affect the time required to charge the C_{HOLD} . The combined impedance of the analog sources must, therefore, be small enough to fully charge the Holding Capacitor within the selected sample time.

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

Figure 21-3. 12-Bit A/D Converter Analog Input Model

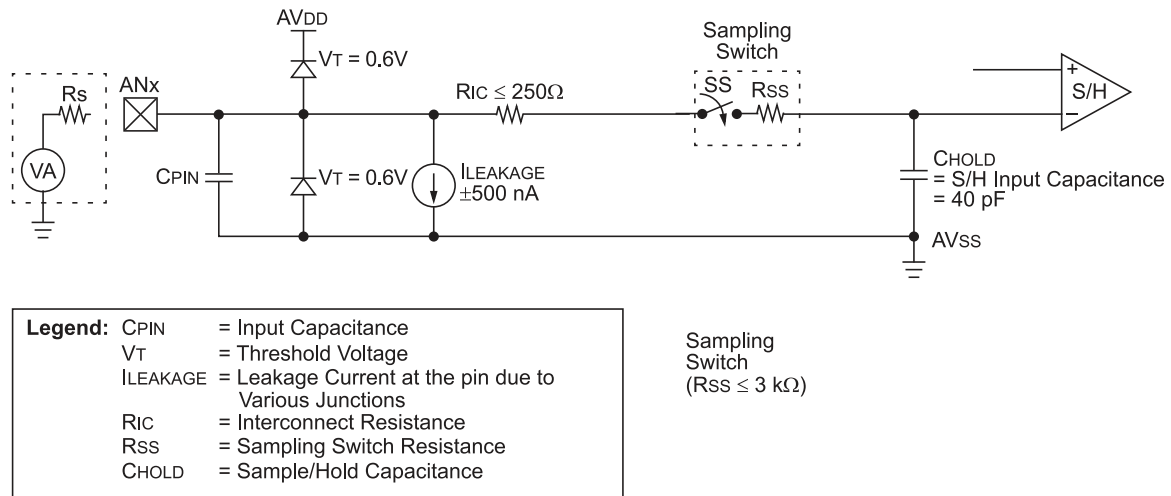

Note: The C_{PIN} value depends on the device package and is not tested. The effect of C_{PIN} is negligible if $R_S \leq 2.5 \text{ k}\Omega$.

To charge this capacitor to the input signal level with precision 0.5 LSB, the following sampling time is required:

$$T_{SAMPLE} = R_{TOTAL} \times C_{HOLD} \times \ln(2^{\text{Number Bits} + 1}) \text{ or}$$

$$T_{SAMPLE} = R_{TOTAL} \times C_{HOLD} \times \ln(2048) = 7.6 \times 40 \text{ pF} \times R_{TOTAL} \text{ for 10-bit mode and}$$

$$T_{SAMPLE} = R_{TOTAL} \times C_{HOLD} \times \ln(8192) = 9 \times 40 \text{ pF} \times R_{TOTAL} \text{ for 12-bit mode,}$$

$$\text{where } R_{TOTAL} = R_S + R_{IC} + R_{SS}$$

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4 12-Bit A/D Converter Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|-----------|-------------|-----------------------------------|--------|------------|----------|----------|------------|------------|--------|
| 0x00 ... 0x02F3 | Reserved | | | | | | | | | |
| 0x02F4 | ANCFG | 7:0 15:8 | | | | | VBGEN4 | VBGEN3 | VBGEN2 | VBGEN1 |
| 0x02F6 ... 0x06FF | Reserved | | | | | | | | | |
| 0x0700 | ADC1BUF0 | 7:0 15:8 | ADC1BUF0[7:0] ADC1BUF0[15:8] | | | | | | | |
| 0x0702 | ADC1BUF1 | 7:0 15:8 | ADC1BUF1[7:0] ADC1BUF1[15:8] | | | | | | | |
| 0x0704 | ADC1BUF2 | 7:0 15:8 | ADC1BUF2[7:0] ADC1BUF2[15:8] | | | | | | | |
| 0x0706 | ADC1BUF3 | 7:0 15:8 | ADC1BUF3[7:0] ADC1BUF3[15:8] | | | | | | | |
| 0x0708 | ADC1BUF4 | 7:0 15:8 | ADC1BUF4[7:0] ADC1BUF4[15:8] | | | | | | | |
| 0x070A | ADC1BUF5 | 7:0 15:8 | ADC1BUF5[7:0] ADC1BUF5[15:8] | | | | | | | |
| 0x070C | ADC1BUF6 | 7:0 15:8 | ADC1BUF6[7:0] ADC1BUF6[15:8] | | | | | | | |
| 0x070E | ADC1BUF7 | 7:0 15:8 | ADC1BUF7[7:0] ADC1BUF7[15:8] | | | | | | | |
| 0x0710 | ADC1BUF8 | 7:0 15:8 | ADC1BUF8[7:0] ADC1BUF8[15:8] | | | | | | | |
| 0x0712 | ADC1BUF9 | 7:0 15:8 | ADC1BUF9[7:0] ADC1BUF9[15:8] | | | | | | | |
| 0x0714 | ADC1BUF10 | 7:0 15:8 | ADC1BUF10[7:0] ADC1BUF10[15:8] | | | | | | | |
| 0x0716 | ADC1BUF11 | 7:0 15:8 | ADC1BUF11[7:0] ADC1BUF11[15:8] | | | | | | | |
| 0x0718 | ADC1BUF12 | 7:0 15:8 | ADC1BUF12[7:0] ADC1BUF12[15:8] | | | | | | | |
| 0x071A | ADC1BUF13 | 7:0 15:8 | ADC1BUF13[7:0] ADC1BUF13[15:8] | | | | | | | |
| 0x071C ... 0x0733 | Reserved | | | | | | | | | |
| 0x0734 | AD1CON1 | 7:0 15:8 | SSRC[3:0] | | | | | ASAM | SAMP | DONE |
| | | | ADON | | ADSIDL | DMABM | DMAEN | MODE12 | FORM[1:0] | |
| 0x0736 | AD1CON2 | 7:0 15:8 | BUFS | | SMP1[4:0] | | | | BUFM | ALTS |
| | | | PVCFG[1:0] | | NVCFG0 | Reserved | BUFREGEN | CSCNA | | |
| 0x0738 | AD1CON3 | 7:0 15:8 | ADCS[7:0] | | | | | | | |
| | | | ADRC | EXTSAM | PUMPEN | | | SAMC[4:0] | | |
| 0x073A | AD1CHS | 7:0 15:8 | CH0NA[2:0] | | | | | CH0SA[4:0] | | |
| | | | CH0NB[2:0] | | | | | CH0SB[2:0] | | |
| 0x073C | AD1CSSH | 7:0 15:8 | | | CSS[30:28] | | | | | |
| 0x073E | AD1CSSL | 7:0 15:8 | | | CSS[7:0] | | | | | |
| | | | | | | | | CSS[4:0] | | |
| 0x0740 | AD1CON4 | 7:0 15:8 | | | | | | DMABL[2:0] | | |
| | | | | | | | | | | |
| 0x0742 | AD1CON5 | 7:0 15:8 | | | | | WM[1:0] | | CM[1:0] | |
| | | | ASEN | LPEN | | BGREQ | | | ASINT[1:0] | |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

|continued | | | | | | | | | | |
|-------------------------|----------|----------|----------------|---|-----------|---|---|---|---|---|
| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| 0x0744 ... 0x0745 | Reserved | | | | | | | | | |
| 0x0746 | AD1CHITL | 7:0 | CHH[7:0] | | | | | | | |
| | | 15:8 | | | CHH[13:8] | | | | | |
| 0x0748 ... 0x074B | Reserved | | | | | | | | | |
| 0x074C | AD1DMBUF | 7:0 | AD1DMBUF[7:0] | | | | | | | |
| | | 15:8 | AD1DMBUF[15:8] | | | | | | | |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.1 ADC1 Buffer 0 Register

Name: ADC1BUF0
Offset: 0x700

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF0[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF0[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF0[15:0] Buffer Data bits

21.4.2 ADC1 Buffer 1 Register

Name: ADC1BUF1

Offset: 0x702

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF1[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF1[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF1[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.3 ADC1 Buffer 2 Register

Name: ADC1BUF2
Offset: 0x704

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF2[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF2[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF2[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.4 ADC1 Buffer 3 Register

Name: ADC1BUF3

Offset: 0x706

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF3[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF3[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF3[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.5 ADC1 Buffer 4 Register

Name: ADC1BUF4
Offset: 0x708

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF4[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF4[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF4[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.6 ADC1 Buffer 5 Register

Name: ADC1BUF5
Offset: 0x70A

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF5[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF5[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF5[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.7 ADC1 Buffer 6 Register

Name: ADC1BUF6
Offset: 0x70C

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF6[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF6[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF6[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.8 ADC1 Buffer 7 Register

Name: ADC1BUF7

Offset: 0x70E

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF7[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF7[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF7[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.9 ADC1 Buffer 8 Register

Name: ADC1BUF8

Offset: 0x710

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF8[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF8[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF8[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.10 ADC1 Buffer 9 Register

Name: ADC1BUF9

Offset: 0x712

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| | ADC1BUF9[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF9[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF9[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.11 ADC1 Buffer 10 Register

Name: ADC1BUF10
Offset: 0x714

| | | | | | | | | |
|--------|-----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF10[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF10[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF10[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.12 ADC1 Buffer 11 Register

Name: ADC1BUF11
Offset: 0x716

| | | | | | | | | |
|--------|-----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF11[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF11[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF11[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.13 ADC1 Buffer 12 Register

Name: ADC1BUF12
Offset: 0x718

| | | | | | | | | |
|--------|-----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF12[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF12[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF12[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.14 ADC1 Buffer 13 Register

Name: ADC1BUF13

Offset: 0x71A

| | | | | | | | | |
|--------|-----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ADC1BUF13[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ADC1BUF13[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – ADC1BUF13[15:0] Buffer Data bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.15 A/D Control Register 1

Name: AD1CON1
Offset: 0x734

Note:

1. This bit is only available when Extended DMA and buffer features are available (DMAEN = 1).

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------|----|--------|-------|-------|--------|-----------|-----|
| | ADON | | ADSIDL | DMABM | DMAEN | MODE12 | FORM[1:0] | |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|---|------|------|------|
| | SSRC[3:0] | | | | | ASAM | SAMP | DONE |
| Access | R/W | R/W | R/W | R/W | | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | | 0 | 0 | 0 |

Bit 15 – ADON A/D Operating Mode bit

| Value | Description |
|-------|----------------------------|
| 1 | A/D Converter is operating |
| 0 | A/D Converter is off |

Bit 13 – ADSIDL A/D Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 12 – DMABM Extended DMA Buffer Mode Select bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Extended Buffer mode: Buffer address is defined by the DMADSTn register |
| 0 | PIA mode: Buffer addresses are defined by the DMA Controller and AD1CON4[2:0] |

Bit 11 – DMAEN Extended DMA/Buffer Enable bit

| Value | Description |
|-------|--|
| 1 | Extended DMA and buffer features are enabled |
| 0 | Extended features are disabled |

Bit 10 – MODE12 A/D 12-Bit Operation Mode bit

| Value | Description |
|-------|----------------------|
| 1 | 12-bit A/D operation |
| 0 | 10-bit A/D operation |

Bits 9:8 – FORM[1:0] Data Output Format bits (see following formats)

| Value | Description |
|-------|--|
| 11 | Fractional result, signed, left-justified |
| 10 | Absolute fractional result, unsigned, left-justified |
| 01 | Decimal result, signed, right-justified |
| 00 | Absolute decimal result, unsigned, right-justified |

Bits 7:4 – SSRC[3:0] Sample Clock Source Select bits

| Value | Description |
|-------|---|
| 0111 | Auto-Convert mode |
| 0110 | Timer1 (may trigger during Sleep mode) |
| 0101 | Timer1 (will not trigger during Sleep mode) |
| 0011 | Reserved |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

| Value | Description |
|-------|-----------------------------|
| 0010 | Timer3 |
| 0001 | INT0 |
| 0000 | SAMP is cleared by software |

Bit 2 – ASAM A/D Sample Auto-Start bit

| Value | Description |
|-------|---|
| 1 | Sampling begins immediately after last conversion; SAMP bit is auto-set |
| 0 | Sampling begins when SAMP bit is manually set |

Bit 1 – SAMP A/D Sample Enable bit

| Value | Description |
|-------|---|
| 1 | A/D Sample-and-Hold amplifiers are sampling |
| 0 | A/D Sample-and-Hold amplifiers are holding |

Bit 0 – DONE A/D Conversion Status bit

| Value | Description |
|-------|--|
| 1 | A/D conversion cycle has completed |
| 0 | A/D conversion cycle has not started or is in progress |

21.4.16 A/D Control Register 2

Name: AD1CON2

Offset: 0x736

Legend: r = Reserved bit

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|-----|--------|----------|----------|-------|---|---|
| | PVCFG[1:0] | | NVCFG0 | Reserved | BUFREGEN | CSCNA | | |
| Access | R/W | R/W | R/W | r | R/W | R/W | | |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|------|-----------|-----|-----|-----|-----|------|------|
| | BUFS | SMPI[4:0] | | | | | BUFM | ALTS |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:14 – PVCFG[1:0] A/D Converter Positive Voltage Reference Configuration bits

| Value | Description |
|-------|---------------------------|
| 1x | Unimplemented, do not use |
| 01 | External V_{REF+} |
| 00 | AV_{DD} |

Bit 13 – NVCFG0 A/D Converter Negative Voltage Reference Configuration bit

| Value | Description |
|-------|---------------|
| 1 | Unimplemented |
| 0 | AV_{SS} |

Bit 12 – Reserved Maintain as '0'

Bit 11 – BUFREGEN A/D Buffer Register Enable bit

| Value | Description |
|-------|--|
| 1 | Conversion result is loaded into the buffer location determined by the converted channel |
| 0 | A/D result buffer is treated as a FIFO |

Bit 10 – CSCNA Scan Input Selections for CH0+ During Sample A bit

| Value | Description |
|-------|----------------------|
| 1 | Scans inputs |
| 0 | Does not scan inputs |

Bit 7 – BUFS Buffer Fill Status bit

When DMAEN = 1 and DMABM = 1:

| Value | Description |
|-------|---|
| 1 | A/D is currently filling the destination buffer from [buffer start + (buffer size/2)] to [buffer start + (buffer size – 1)]. User should access data located from [buffer start] to [buffer start + (buffer size/2) – 1]. |
| 0 | A/D is currently filling the destination buffer from [buffer start] to [buffer start + (buffer size/2) – 1]. User should access data located from [buffer start + (buffer size/2)] to [buffer start + (buffer size – 1)]. |

When DMAEN = 0:

| Value | Description |
|-------|---|
| 1 | A/D is currently filling ADC1BUF12-ADC1BUF23; user should access data in ADC1BUF0-ADC1BUF11 |
| 0 | A/D is currently filling ADC1BUF0-ADC1BUF11; user should access data in ADC1BUF12-ADC1BUF23 |

Bits 6:2 – SMPI[4:0] Interrupt Sample/DMA Increment Rate Select bits

When DMAEN = 1 and DMABM = 0:

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

| Value | Description |
|-------|---|
| 11111 | Increments the DMA address after completion of the 32nd sample/conversion operation |
| 11110 | Increments the DMA address after completion of the 31st sample/conversion operation |
| ... | |
| 00001 | Increments the DMA address after completion of the 2nd sample/conversion operation |
| 00000 | Increments the DMA address after completion of each sample/conversion operation |

When DMAEN = 1 and DMABM = 1:

| Value | Description |
|-------|--|
| 11111 | Resets the DMA offset after completion of the 32nd sample/conversion operation |
| 11110 | Resets the DMA offset after completion of the 31st sample/conversion operation |
| ... | |
| 00001 | Resets the DMA offset after completion of the 2nd sample/conversion operation |
| 00000 | Resets the DMA offset after completion of every sample/conversion operation |

When DMAEN = 0:

| Value | Description |
|-------|---|
| 11111 | Interrupts at the completion of the conversion for each 32nd sample |
| 11110 | Interrupts at the completion of the conversion for each 31st sample |
| ... | |
| 00001 | Interrupts at the completion of the conversion for every other sample |
| 00000 | Interrupts at the completion of the conversion for each sample |

Bit 1 – BUFM Buffer Fill Mode Select bit

| Value | Description |
|-------|--|
| 1 | Starts buffer filling at ADC1BUF0 on first interrupt and ADC1BUF12 on next interrupt |
| 0 | Always starts filling buffer at ADC1BUF0 |

Bit 0 – ALTS Alternate Input Sample Mode Select bit

| Value | Description |
|-------|---|
| 1 | Uses channel input selects for Sample A on first sample and Sample B on next sample |
| 0 | Always uses channel input selects for Sample A |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.17 A/D Control Register 3

Name: AD1CON3
Offset: 0x738

Notes:

1. Selecting the internal ADC RC clock requires that the ADCSx bits be '1' or greater. Setting ADCSx = 0 when ADRC = 1 will violate the T_{AD} (min) specification.
2. The user should enable the charge pump if AV_{DD} is < 2.7V. Longer sample times are required due to the increase of the internal resistance of the MUX if the charge pump is disabled.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------|--------|--------|-----------|-----|-----|-----|-----|
| | ADRC | EXTSAM | PUMPEN | SAMC[4:0] | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-----------|-----|-----|-----|-----|-----|-----|-----|
| | ADCS[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 15 – ADRC A/D Conversion Clock Source bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | Dedicated ADC RC clock generator (4 MHz nominal) |
| 0 | Clock derived from system clock |

Bit 14 – EXTSAM Extended Sampling Time bit

| Value | Description |
|-------|--------------------------------------|
| 1 | A/D is still sampling after SAMP = 0 |
| 0 | A/D is finished sampling |

Bit 13 – PUMPEN Charge Pump Enable bit⁽²⁾

| Value | Description |
|-------|--------------------------------------|
| 1 | Charge pump for switches is enabled |
| 0 | Charge pump for switches is disabled |

Bits 12:8 – SAMC[4:0] Auto-Sample Time Select bits

| Value | Description |
|-------|-------------|
| 11111 | 31 T_{AD} |
| ... | |
| 00001 | 1 T_{AD} |
| 00000 | 0 T_{AD} |

Bits 7:0 – ADCS[7:0] A/D Conversion Clock Select bits

| Value | Description |
|----------|---------------------------|
| 11111111 | 256 * T_{PB} = T_{AD} |
| ... | |
| 00000001 | 2 * T_{PB} = T_{AD} |
| 00000000 | T_{PB} = T_{AD} |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.18 A/D Sample Select Register

Name: AD1CHS

Offset: 0x73A

Note:

- These input channels do not have corresponding memory-mapped result buffers.

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|------------|-----|-----|------------|-----|-----|-----|-----|
| | CH0NB[2:0] | | | CH0SB[2:0] | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CH0NA[2:0] | | | CH0SA[4:0] | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:13 – CH0NB[2:0] Sample B Channel 0 Negative Input Select bits

| Value | Description |
|-------|------------------|
| 7–3 | Unimplemented |
| 2 | AN1 |
| 1 | Unimplemented |
| 0 | AV _{SS} |

Bits 12:8 – CH0SB[2:0] Sample B Channel 0 Positive Input Select bits

| Value | Description |
|-------|---------------------------------|
| 31 | Reserved |
| 30 | AV _{DD} ⁽¹⁾ |
| 29 | AV _{SS} ⁽¹⁾ |
| 28 | Band Gap Reference (1.2V) |
| 27–14 | Reserved |
| 13 | AN13 |
| 12 | AN12 |
| 11 | AN11 |
| 10 | AN10 |
| 9 | AN9 |
| 8 | AN8 |
| 7 | AN7 |
| 6 | AN6 |
| 5 | AN5 |
| 4 | AN4 |
| 3 | AN3 |
| 2 | AN2 |
| 1 | AN1 |
| 0 | AN0 |

Bits 7:5 – CH0NA[2:0] Sample A Channel 0 Negative Input Select bits

Same definitions as for CH0NB[2:0].

Bits 4:0 – CH0SA[4:0] Sample A Channel 0 Positive Input Select bits

Same definitions as for CH0SB[2:0].

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.19 A/D Input Scan Select Register High

Name: AD1CSSH

Offset: 0x73C

| | | | | | | | | |
|--------|----|-----|------------|-----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | CSS[30:28] | | | | | |
| Access | | R/W | R/W | R/W | | | | |
| Reset | | 0 | 0 | 0 | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 14:12 – CSS[30:28] A/D Input Scan Selection bits

| Value | Description |
|-------|---|
| 1 | Includes corresponding channel for input scan |
| 0 | Skips channel for input scan |

21.4.20 A/D Input Scan Select Register Low

Name: AD1CSSL

Offset: 0x73E

| | | | | | | | | |
|--------|----------|-----|-----|----------|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | CSS[4:0] | | | | |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CSS[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 12:8 – CSS[4:0] A/D Input Scan Selection bits

| Value | Description |
|-------|---|
| 1 | Includes corresponding channel for input scan |
| 0 | Skips channel for input scan |

Bits 7:0 – CSS[7:0] A/D Input Scan Selection bits

| Value | Description |
|-------|---|
| 1 | Includes corresponding channel for input scan |
| 0 | Skips channel for input scan |

21.4.21 A/D Control Register 4

Name: AD1CON4

Offset: 0x740

Note:

1. The DMABL[2:0] bits are only used when AD1CON1[11] = 1 and AD1CON1[12] = 0; otherwise, their value is ignored.

| | | | | | | | | |
|--------|----|----|----|----|----|-----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | DMABL[2:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 0 | 0 | 0 |

Bits 2:0 – DMABL[2:0] DMA Buffer Size Select bits⁽¹⁾

| Value | Description |
|-------|--|
| 111 | Allocates 128 words of buffer to each analog input |
| 110 | Allocates 64 words of buffer to each analog input |
| 101 | Allocates 32 words of buffer to each analog input |
| 100 | Allocates 16 words of buffer to each analog input |
| 011 | Allocates 8 words of buffer to each analog input |
| 010 | Allocates 4 words of buffer to each analog input |
| 001 | Allocates 2 words of buffer to each analog input |
| 000 | Allocates 1 word of buffer to each analog input |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.22 A/D Control Register 5

Name: AD1CON5
Offset: 0x742

| | | | | | | | | |
|--------|------|------|----|-------|----|----|------------|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ASEN | LPEN | | BGREQ | | | ASINT[1:0] | |
| Access | R/W | R/W | | R/W | | | R/W | R/W |
| Reset | 0 | 0 | | 0 | | | 0 | 0 |

| | | | | | | | | |
|--------|---|---|---|---|---------|-----|---------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | WM[1:0] | | CM[1:0] | |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 15 – ASEN Auto-Scan Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Auto-scan is enabled |
| 0 | Auto-scan is disabled |

Bit 14 – LPEN Low-Power Enable bit

| Value | Description |
|-------|----------------------------------|
| 1 | Low power is enabled after scan |
| 0 | Full power is enabled after scan |

Bit 12 – BGREQ Band Gap Request bit

| Value | Description |
|-------|--|
| 1 | Band gap is enabled when the A/D is enabled and active |
| 0 | Band gap is not enabled by the A/D |

Bits 9:8 – ASINT[1:0] Auto-Scan (Threshold Detect) Interrupt Mode bits

| Value | Description |
|-------|--|
| 11 | Interrupt after Threshold Detect sequence has completed and valid compare has occurred |
| 10 | Interrupt after valid compare has occurred |
| 01 | Interrupt after Threshold Detect sequence has completed |
| 00 | No interrupt |

Bits 3:2 – WM[1:0] Write Mode bits

| Value | Description |
|-------|---|
| 11 | Reserved |
| 10 | Auto-compare only (conversion results are not saved, but interrupts are generated when a valid match occurs, as defined by the CMx and ASINTx bits) |
| 01 | Convert and save (conversion results are saved to locations as determined by the register bits when a match occurs, as defined by the CMx bits) |
| 00 | Legacy operation (conversion data are saved to a location determined by the Buffer register bits) |

Bits 1:0 – CM[1:0] Compare Mode bits

| Value | Description |
|-------|--|
| 11 | Outside Window mode: Valid match occurs if the conversion result is outside of the window defined by the corresponding buffer pair |
| 10 | Inside Window mode: Valid match occurs if the conversion result is inside the window defined by the corresponding buffer pair |
| 01 | Greater Than mode: Valid match occurs if the result is greater than the value in the corresponding Buffer register |
| 00 | Less Than mode: Valid match occurs if the result is less than the value in the corresponding Buffer register |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.23 A/D Scan Compare Hit Register Low

Name: AD1CHITL
Offset: 0x746

| | | | | | | | | |
|--------|----------|-----|-----------|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | CHH[13:8] | | | | | |
| Access | | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | | | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CHH[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 13:0 – CHH[13:0] Compare Hit bits

If CM[1:0] = 11:

| Value | Description |
|-------|--|
| 1 | A/D Result Buffer n has been written with data or a match has occurred |
| 0 | A/D Result Buffer n has not been written with data |

For All Other Values of CM[1:0]:

| Value | Description |
|-------|---|
| 1 | A match has occurred on A/D Result Channel n |
| 0 | No match has occurred on A/D Result Channel n |

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.24 A/D Conversion Result Register (for DMA PIA mode)

Name: AD1DMBUF

Offset: 0x74C

| | | | | | | | | |
|--------|----------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | AD1DMBUF[15:8] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | AD1DMBUF[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – AD1DMBUF[15:0] ADC Conversion Result bits

PIC24FJ64GP205/GU205 Family

12-Bit A/D Converter with Threshold Detect

21.4.25 A/D Band Gap Reference Configuration Register

Name: ANCFG

Offset: 0x2F4

Note:

1. When a module requests a band gap reference voltage, that reference will be enabled automatically after a brief start-up time. The user can manually enable the band gap references using the ANCFG register, before enabling the module requesting the band gap reference, to avoid this start-up time (~1 ms).

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | VBGEN4 | VBGEN3 | VBGEN2 | VBGEN1 |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bit 3 – VBGEN4 USB Band Gap Buffer Control bit⁽¹⁾

| Value | Description |
|-------|--------------------------------|
| 1 | Band gap reference is enabled |
| 0 | Band gap reference is disabled |

Bit 2 – VBGEN3 A/D Band Gap Reference Enable bit⁽¹⁾

| Value | Description |
|-------|--------------------------------|
| 1 | Band gap reference is enabled |
| 0 | Band gap reference is disabled |

Bit 1 – VBGEN2 Comparator Band Gap Reference Enable bit⁽¹⁾

| Value | Description |
|-------|--------------------------------|
| 1 | Band gap reference is enabled |
| 0 | Band gap reference is disabled |

Bit 0 – VBGEN1 V_{REG} , BOR, HLVD, FRC, NVM and A/D Boost Band Gap Reference Enable bit ⁽¹⁾

| Value | Description |
|-------|--------------------------------|
| 1 | Band gap reference is enabled |
| 0 | Band gap reference is disabled |

22. Triple Comparator Module


Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Scalable Comparator Module**” (www.microchip.com/DS39734) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The triple comparator module provides three dual input comparators. A simplified block diagram of the module is shown in Figure 22-1.

The comparator has the following features:

- Differential, Rail-to-Rail Inputs
- Power-Down mode for Power Savings
- Integrated Results Register
- Software-Selectable Comparator Output Polarity
- Software-Selectable Edge for Trigger/Interrupt Generation
- Software-Selectable Comparator Power mode

Figure 22-1. Triple Comparator Module Block Diagram

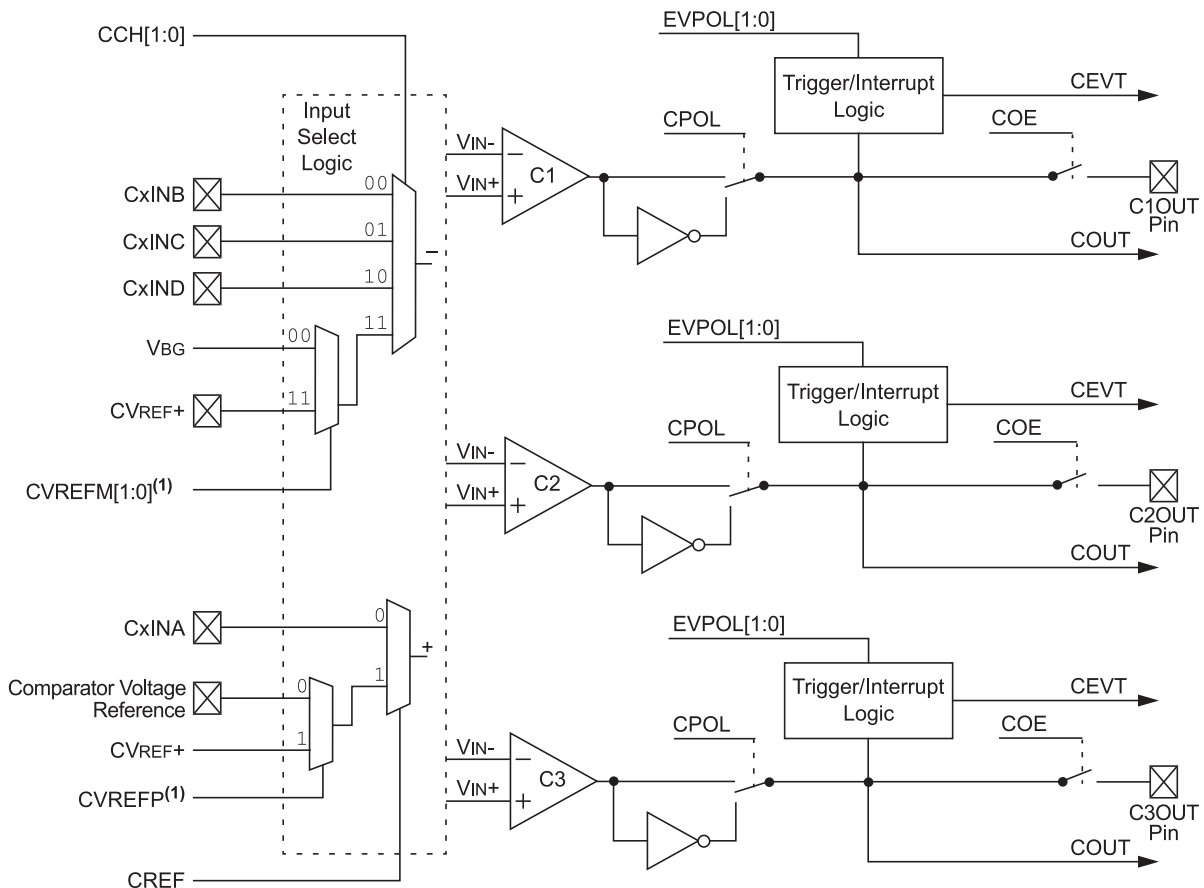

Note:

1. Refer to the CVRCON register (23.1.1. CVRCON) for bit details.

The inputs to the comparator can be configured to use any one of five external analog inputs (CxINA, CxINB, CxINC, CxIND and CVREF+) and a voltage reference input from one of the internal band gap references or the comparator voltage reference generator (VBG and CVREF).

PIC24FJ64GP205/GU205 Family

Triple Comparator Module

The comparator outputs may be directly connected to the CxOUT pins. When the respective COE bit equals '1', the I/O pad logic makes the unsynchronized output of the comparator available on the pin.

Each comparator has its own control register, CMxCON, for enabling and configuring its operation. The output and event status of all three comparators is provided in the CMSTAT register.

22.1 Triple Comparator Module Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------------|----------|----------|------------|-----|------|------|---|-------|----------|-------|
| 0x00 ... 0x02E5 | Reserved | | | | | | | | | |
| 0x02E6 | CMSTAT | 7:0 | | | | | | C3OUT | C2OUT | C1OUT |
| | | 15:8 | CMIDL | | | | | C3EVT | C2EVT | C1EVT |
| 0x02E8 ... 0x02E9 | Reserved | | | | | | | | | |
| 0x02EA | CM1CON | 7:0 | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| | | 15:8 | CON | COE | CPOL | | | | CEVT | COUT |
| 0x02EC | CM2CON | 7:0 | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| | | 15:8 | CON | COE | CPOL | | | | CEVT | COUT |
| 0x02EE | CM3CON | 7:0 | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| | | 15:8 | CON | COE | CPOL | | | | CEVT | COUT |

22.1.1 Comparator Module Status Register

Name: CMSTAT

Offset: 0x2E6

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|-------|----|----|----|----|-------|-------|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CMIDL | | | | | C3EVT | C2EVT | C1EVT |
| Access | R/W | | | | | HSC/R | HSC/R | HSC/R |
| Reset | 0 | | | | | 0 | 0 | 0 |

| | | | | | | | | |
|--------|---|---|---|---|---|-------|-------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | C3OUT | C2OUT | C1OUT |
| Access | | | | | | HSC/R | HSC/R | HSC/R |
| Reset | | | | | | 0 | 0 | 0 |

Bit 15 – CMIDL Comparator Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues operation of all comparators when device enters Idle mode |
| 0 | Continues operation of all enabled comparators in Idle mode |

Bit 10 – C3EVT Comparator 3 Event Status bit (read-only)

Shows the current event status of Comparator 3 (CM3CON[9]).

Bit 9 – C2EVT Comparator 2 Event Status bit (read-only)

Shows the current event status of Comparator 2 (CM2CON[9]).

Bit 8 – C1EVT Comparator 1 Event Status bit (read-only)

Shows the current event status of Comparator 1 (CM1CON[9]).

Bit 2 – C3OUT Comparator 3 Output Status bit (read-only)

Shows the current output of Comparator 3 (CM3CON[8]).

Bit 1 – C2OUT Comparator 2 Output Status bit (read-only)

Shows the current output of Comparator 2 (CM2CON[8]).

Bit 0 – C1OUT Comparator 1 Output Status bit (read-only)

Shows the current output of Comparator 1 (CM1CON[8]).

22.1.2 Comparator 1 Control Register

Name: CM1CON

Offset: 0x2EA

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|-----|-----|------|----|----|----|------|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CON | COE | CPOL | | | | CEVT | COUT |
| Access | R/W | R/W | R/W | | | | R/W | HSC/R |
| Reset | 0 | 0 | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|------------|-----|---|------|---|---|----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| Access | R/W | R/W | | R/W | | | R/W | R/W |
| Reset | 0 | 0 | | 0 | | | 0 | 0 |

Bit 15 – CON Comparator Enable bit

| Value | Description |
|-------|------------------------|
| 1 | Comparator is enabled |
| 0 | Comparator is disabled |

Bit 14 – COE Comparator Output Enable bit

| Value | Description |
|-------|---|
| 1 | Comparator output is present on the C1OUT pin |
| 0 | Comparator output is internal only |

Bit 13 – CPOL Comparator Output Polarity Select bit

| Value | Description |
|-------|-----------------------------------|
| 1 | Comparator output is inverted |
| 0 | Comparator output is not inverted |

Bit 9 – CEVT Comparator Event bit

| Value | Description |
|-------|---|
| 1 | Comparator event that is defined by EVPOL[1:0] has occurred; subsequent triggers and interrupts are disabled until the bit is cleared |
| 0 | Comparator event has not occurred |

Bit 8 – COUT Comparator Output bit

When CPOL = 1:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} < V_{IN-}$ |
| 0 | $V_{IN+} > V_{IN-}$ |

When CPOL = 0:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} > V_{IN-}$ |
| 0 | $V_{IN+} < V_{IN-}$ |

Bits 7:6 – EVPOL[1:0] Trigger/Event/Interrupt Polarity Select bits

| Value | Description |
|-------|--|
| 11 | Trigger/event/interrupt is generated on any change of the comparator output (while CEVT = 0) |

| Value | Description |
|-------|---|
| 10 | Trigger/event/interrupt is generated on transition of the comparator output: If $CPOL = 1$ (inverted polarity): Low-to-high transition only. If $CPOL = 0$ (noninverted polarity): High-to-low transition only. |
| 01 | Trigger/event/interrupt is generated on transition of comparator output: If $CPOL = 1$ (inverted polarity): High-to-low transition only. If $CPOL = 0$ (noninverted polarity): Low-to-high transition only. |
| 00 | Trigger/event/interrupt generation is disabled |

Bit 4 – CREF DAC Reference Source Select bit

| Value | Description |
|-------|--|
| 1 | Noninverting input connects to the internal CV_{REF} voltage |
| 0 | Noninverting input connects to the C1INA pin |

Bits 1:0 – CCH[1:0] Comparator Channel Select bits

| Value | Description |
|-------|--|
| 11 | Inverting input of the comparator connects to the internal selectable reference voltage specified by the CVREFM[1:0] bits in the CVRCON register |
| 10 | Inverting input of the comparator connects to the C1IND pin |
| 01 | Inverting input of the comparator connects to the C1INC pin |
| 00 | Inverting input of the comparator connects to the C1INB pin |

22.1.3 Comparator 2 Control Register

Name: CM2CON

Offset: 0x2EC

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|-----|-----|------|----|----|----|------|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CON | COE | CPOL | | | | CEVT | COUT |
| Access | R/W | R/W | R/W | | | | R/W | HSC/R |
| Reset | 0 | 0 | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|------------|-----|---|------|---|---|----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| Access | R/W | R/W | | R/W | | | R/W | R/W |
| Reset | 0 | 0 | | 0 | | | 0 | 0 |

Bit 15 – CON Comparator Enable bit

| Value | Description |
|-------|------------------------|
| 1 | Comparator is enabled |
| 0 | Comparator is disabled |

Bit 14 – COE Comparator Output Enable bit

| Value | Description |
|-------|---|
| 1 | Comparator output is present on the C2OUT pin |
| 0 | Comparator output is internal only |

Bit 13 – CPOL Comparator Output Polarity Select bit

| Value | Description |
|-------|-----------------------------------|
| 1 | Comparator output is inverted |
| 0 | Comparator output is not inverted |

Bit 9 – CEVT Comparator Event bit

| Value | Description |
|-------|---|
| 1 | Comparator event that is defined by EVPOL[1:0] has occurred; subsequent triggers and interrupts are disabled until the bit is cleared |
| 0 | Comparator event has not occurred |

Bit 8 – COUT Comparator Output bit

When CPOL = 1:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} < V_{IN-}$ |
| 0 | $V_{IN+} > V_{IN-}$ |

When CPOL = 0:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} > V_{IN-}$ |
| 0 | $V_{IN+} < V_{IN-}$ |

Bits 7:6 – EVPOL[1:0] Trigger/Event/Interrupt Polarity Select bits

| Value | Description |
|-------|--|
| 11 | Trigger/event/interrupt is generated on any change of the comparator output (while CEVT = 0) |

| Value | Description |
|-------|---|
| 10 | Trigger/event/interrupt is generated on transition of the comparator output: If CPOL = 1 (inverted polarity): Low-to-high transition only. If CPOL = 0 (noninverted polarity): High-to-low transition only. |
| 01 | Trigger/event/interrupt is generated on transition of comparator output: If CPOL = 1 (inverted polarity): High-to-low transition only. If CPOL = 0 (noninverted polarity): Low-to-high transition only. |
| 00 | Trigger/event/interrupt generation is disabled |

Bit 4 – CREF DAC Reference Source Select bit

| Value | Description |
|-------|--|
| 1 | Noninverting input connects to the internal CV_{REF} voltage |
| 0 | Noninverting input connects to the C2INA pin |

Bits 1:0 – CCH[1:0] Comparator Channel Select bits

| Value | Description |
|-------|--|
| 11 | Inverting input of the comparator connects to the internal selectable reference voltage specified by the CVREFM[1:0] bits in the CVRCON register |
| 10 | Inverting input of the comparator connects to the C2IND pin |
| 01 | Inverting input of the comparator connects to the C2INC pin |
| 00 | Inverting input of the comparator connects to the C2INB pin |

22.1.4 Comparator 3 Control Register

Name: CM3CON

Offset: 0x2EE

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|-----|-----|------|----|----|----|------|-------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | CON | COE | CPOL | | | | CEVT | COUT |
| Access | R/W | R/W | R/W | | | | R/W | HSC/R |
| Reset | 0 | 0 | 0 | | | | 0 | 0 |

| | | | | | | | | |
|--------|------------|-----|---|------|---|---|----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | EVPOL[1:0] | | | CREF | | | CCH[1:0] | |
| Access | R/W | R/W | | R/W | | | R/W | R/W |
| Reset | 0 | 0 | | 0 | | | 0 | 0 |

Bit 15 – CON Comparator Enable bit

| Value | Description |
|-------|------------------------|
| 1 | Comparator is enabled |
| 0 | Comparator is disabled |

Bit 14 – COE Comparator Output Enable bit

| Value | Description |
|-------|---|
| 1 | Comparator output is present on the C3OUT pin |
| 0 | Comparator output is internal only |

Bit 13 – CPOL Comparator Output Polarity Select bit

| Value | Description |
|-------|-----------------------------------|
| 1 | Comparator output is inverted |
| 0 | Comparator output is not inverted |

Bit 9 – CEVT Comparator Event bit

| Value | Description |
|-------|---|
| 1 | Comparator event that is defined by EVPOL[1:0] has occurred; subsequent triggers and interrupts are disabled until the bit is cleared |
| 0 | Comparator event has not occurred |

Bit 8 – COUT Comparator Output bit

When CPOL = 1:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} < V_{IN-}$ |
| 0 | $V_{IN+} > V_{IN-}$ |

When CPOL = 0:

| Value | Description |
|-------|---------------------|
| 1 | $V_{IN+} > V_{IN-}$ |
| 0 | $V_{IN+} < V_{IN-}$ |

Bits 7:6 – EVPOL[1:0] Trigger/Event/Interrupt Polarity Select bits

| Value | Description |
|-------|--|
| 11 | Trigger/event/interrupt is generated on any change of the comparator output (while CEVT = 0) |

| Value | Description |
|-------|---|
| 10 | Trigger/event/interrupt is generated on transition of the comparator output: If $CPOL = 1$ (inverted polarity): Low-to-high transition only. If $CPOL = 0$ (noninverted polarity): High-to-low transition only. |
| 01 | Trigger/event/interrupt is generated on transition of comparator output: If $CPOL = 1$ (inverted polarity): High-to-low transition only. If $CPOL = 0$ (noninverted polarity): Low-to-high transition only. |
| 00 | Trigger/event/interrupt generation is disabled |

Bit 4 – CREF DAC Reference Source Select bit

| Value | Description |
|-------|--|
| 1 | Noninverting input connects to the internal CV_{REF} voltage |
| 0 | Noninverting input connects to the C3INA pin |

Bits 1:0 – CCH[1:0] Comparator Channel Select bits


| Value | Description |
|-------|--|
| 11 | Inverting input of the comparator connects to the internal selectable reference voltage specified by the CVREFM[1:0] bits in the CVRCON register |
| 10 | Inverting input of the comparator connects to the C3IND pin |
| 01 | Inverting input of the comparator connects to the C3INC pin |
| 00 | Inverting input of the comparator connects to the C3INB pin |

23. Comparator Voltage Reference

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**Dual Comparator Module**” (www.microchip.com/DS39710) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The comparator voltage reference diagram is shown in [Figure 23-1](#).

Figure 23-1. Comparator Voltage Reference Block Diagram

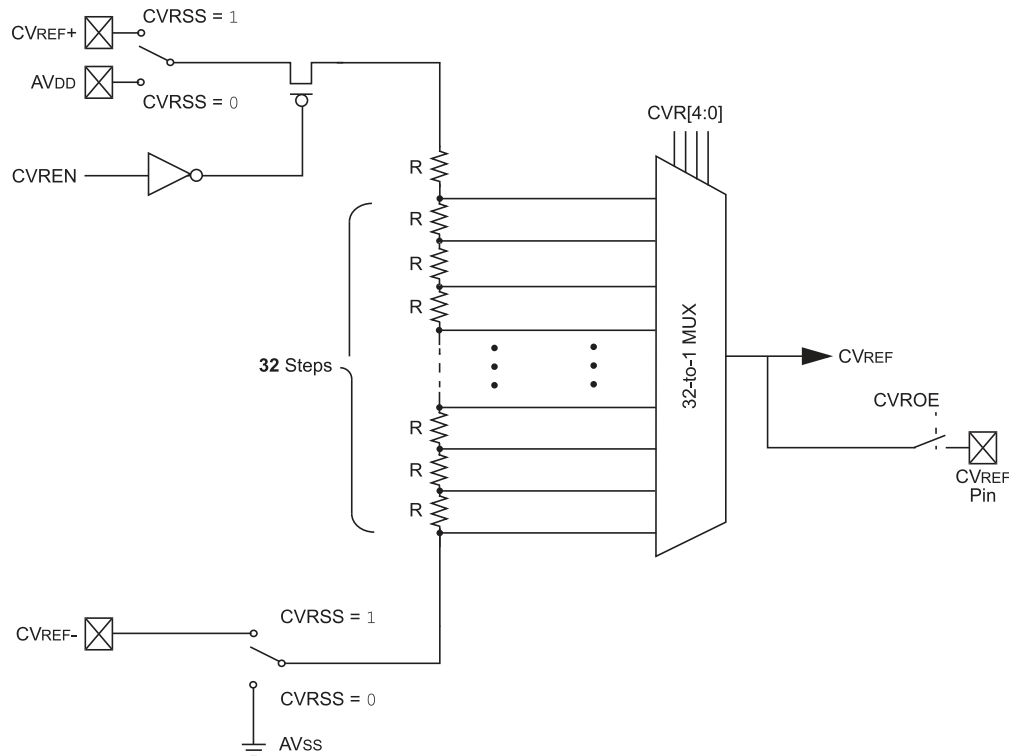

The voltage reference module is controlled through the CVRCON register. The comparator voltage reference provides two ranges of output voltage, each with 16 distinct levels. The primary difference between the ranges is the size of the steps selected by the CV_{REF} Value Selection bits (CVR[4:0]), with one range offering finer resolution.

The comparator reference supply voltage can come from either AV_{DD} and AV_{SS}, or the external CV_{REF}⁺ and CV_{REF}⁻ pins. The voltage source is selected by the CVRSS bit (CVRCON[5]).

The settling time of the comparator voltage reference must be considered when changing the CV_{REF} output.

PIC24FJ64GP205/GU205 Family

Comparator Voltage Reference

23.1 Comparator Voltage Reference Register

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|-------|-------|-------|----------|---|--------|-------------|---|
| 0x00 ... 0x02E7 | Reserved | | | | | | | | | |
| 0x02E8 | CVRCON | 7:0 | CVREN | CVROE | CVRSS | CVR[4:0] | | | | |
| | | 15:8 | | | | | | CVREFP | CVREFM[1:0] | |

23.1.1 Comparator Voltage Reference Control Register

Name: CVRCON

Offset: 0x2E8

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|----|----|--------|-------------|-----|
| | | | | | | CVREFP | CVREFM[1:0] | |
| Access | | | | | | R/W | R/W | R/W |
| Reset | | | | | | 0 | 0 | 0 |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|-------|-------|-------|----------|-----|-----|-----|-----|
| | CVREN | CVROE | CVRSS | CVR[4:0] | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 10 – CVREFP Comparator Voltage Reference Select bit (valid only when CREF is '1')

| Value | Description |
|-------|---|
| 1 | CV _{REF} ⁺ is used as a reference voltage to the comparators |
| 0 | The CVR[4:0] bits (5-bit DAC) within this module provide the reference voltage to the comparators |

Bits 9:8 – CVREFM[1:0] Comparator Band Gap Reference Source Select bits(valid only when CCH[1:0] = 11)

| Value | Description |
|-------|---|
| 11 | CV _{REF} ⁺ is provided as an input to the comparators |
| 10 | Reserved |
| 01 | Reserved |
| 00 | Band gap voltage is provided as an input to the comparators |

Bit 7 – CVREN Comparator Voltage Reference Enable bit

| Value | Description |
|-------|---|
| 1 | CV _{REF} circuit is powered on |
| 0 | CV _{REF} circuit is powered down |

Bit 6 – CVROE Comparator V_{REF} Output Enable bit

| Value | Description |
|-------|--|
| 1 | CV _{REF} voltage level is output on the CV _{REF} pin |
| 0 | CV _{REF} voltage level is disconnected from the CV _{REF} pin |

Bit 5 – CVRSS Comparator V_{REF} Source Selection bit

| Value | Description |
|-------|---|
| 1 | Comparator reference source, CV _{RSRC} = CV _{REF} ⁺ – CV _{REF} ⁻ |
| 0 | Comparator reference source, CV _{RSRC} = AV _{DD} – AV _{SS} |

Bits 4:0 – CVR[4:0] Comparator V_{REF} Value Selection bits (0 ≤ CVR[4:0] ≤ 31)

When CVRSS = 1:

$$CV_{REF} = (CV_{REF}^-) + (CVR[4:0]/32) \times (CV_{REF}^+ - CV_{REF}^-)$$

When CVRSS = 0:

$$CV_{REF} = (AV_{SS}) + (CVR[4:0]/32) \times (AV_{DD} - AV_{SS})$$

24. High/Low-Voltage Detect (HLVD)


Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information on the High/Low-Voltage Detect, refer to “**High-Level Integration with Programmable High/Low-Voltage Detect (HLVD)**” (www.microchip.com/DS39725) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

The High/Low-Voltage Detect (HLVD) module is a programmable circuit that allows the user to specify both the device voltage trip point and the direction of change. The module block diagram is shown in [Figure 24-1](#).

An interrupt flag is set if the device experiences an excursion past the trip point in the direction of change. If the interrupt is enabled, the program execution will branch to the interrupt vector address and the software can then respond to the interrupt. The HLVDIF flag may be set during a POR or BOR event. The firmware should clear the flag before the application uses it for the first time, even if the interrupt was disabled.

The HLVDCON register completely controls the operation of the HLVD module. This allows the circuitry to be “turned off” by the user under software control, which minimizes the current consumption for the device. To enable the High/Low-Voltage Detect, the HLVDEN (HLVDCON[15]) and CMPEN (HLVDCON[7]) bits must be set.

Figure 24-1. High/Low-Voltage Detect (HLVD) Module Block Diagram

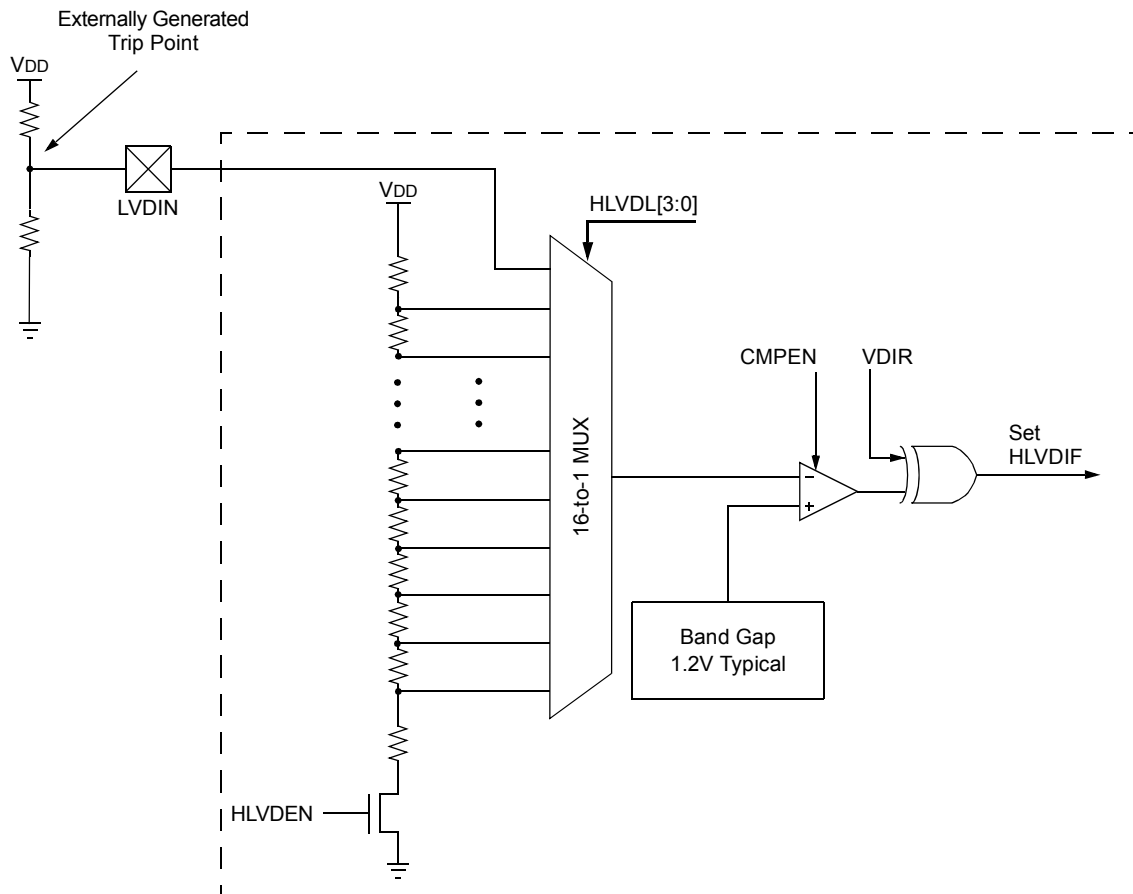

PIC24FJ64GP205/GU205 Family

High/Low-Voltage Detect (HLVD)

24.1 High/Low-Voltage Detect (HLVD) Register

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----------------------|----------|----------|--------|---|-------|---|------------|-------|-------|---------|
| 0x00 ... 0x0113 | Reserved | | | | | | | | | |
| 0x0114 | HLVDCON | 7:0 | CMPEN | | | | HLVDL[3:0] | | | |
| | | 15:8 | HLVDEN | | LSIDL | | VDIR | BGVST | IRVST | HLVDEVT |

24.1.1 High/Low-Voltage Detect Control Register

Name: HLVDCON

Offset: 0x114

Notes:

- For the actual trip point, see [30. Electrical Characteristics](#).
- The HLVDIF flag cannot be cleared by software unless HLVDEV = 0. The voltage must be monitored so that the HLVD condition (as set by VDIR and HLVDL[3:0]) is not asserted.

| | | | | | | | | |
|--------|--------|----|-------|----|------|-------|-------|--------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | HLVDEN | | LSIDL | | VDIR | BGVST | IRVST | HLVDEV |
| Access | R/W | | R/W | | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | | 0 | 0 | 0 | 0 |

| | | | | | | | | |
|--------|-------|---|---|---|-----|------------|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | CMPEN | | | | | HLVDL[3:0] | | |
| Access | R/W | | | | R/W | R/W | R/W | R/W |
| Reset | 0 | | | | 0 | 0 | 0 | 0 |

Bit 15 – HLVDEN High/Low-Voltage Detect Power Enable bit

| Value | Description |
|-------|------------------|
| 1 | HLVD is enabled |
| 0 | HLVD is disabled |

Bit 13 – LSIDL HLVD Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bit 11 – VDIR Voltage Change Direction Select bit

| Value | Description |
|-------|---|
| 1 | Event occurs when voltage equals or exceeds the trip point (HLVDL[3:0]) |
| 0 | Event occurs when voltage equals or falls below the trip point (HLVDL[3:0]) |

Bit 10 – BGVST Band Gap Voltage Stable Flag bit

| Value | Description |
|-------|---|
| 1 | Indicates that the band gap voltage is stable |
| 0 | Indicates that the band gap voltage is unstable |

Bit 9 – IRVST Internal Reference Voltage Stable Flag bit

| Value | Description |
|-------|--|
| 1 | Internal reference voltage is stable; the High-Voltage Detect logic generates the interrupt flag at the specified voltage range |
| 0 | Internal reference voltage is unstable; the High-Voltage Detect logic will not generate the interrupt flag at the specified voltage range and the HLVD interrupt should not be enabled |

Bit 8 – HLVDEV High or Low-Voltage Event Status bit⁽²⁾

| Value | Description |
|-------|---|
| 1 | HLVD event is true during current instruction cycle |
| 0 | HLVD event is not true during current instruction cycle |

Bit 7 – CMPEN High/Low-Voltage Detect Comparator Enable bit

| Value | Description |
|-------|-----------------------------|
| 1 | HLVD comparator is enabled |
| 0 | HLVD comparator is disabled |

PIC24FJ64GP205/GU205 Family

High/Low-Voltage Detect (HLVD)

Bits 3:0 – HLVDL[3:0] High/Low-Voltage Detection Limit bits⁽¹⁾

| Value | Description |
|-------|--|
| 15 | Voltage on external LVDIN pin is compared with band gap (1.2V) |
| 14 | 2.1V |
| 13 | 2.2V |
| 12 | 2.3V |
| 11 | 2.4V |
| 10 | 2.5V |
| 9 | 2.6V |
| 8 | 2.8V |
| 7 | 2.9V |
| 6 | 3.1V |
| 5 | 3.4V |
| 4-0 | Reserved |

25. Deadman Timer (DMT)

Note: This data sheet summarizes the features of the PIC24FJ64GP205/GU205 family of devices. It is not intended to be a comprehensive reference source. To complement the information in this data sheet, refer to “Deadman Timer (DMT)” (www.microchip.com/DS70005155) in the “dsPIC33/PIC24 Family Reference Manual”. The information in this data sheet supersedes the information in the FRM.


The primary function of the Deadman Timer (DMT) is to interrupt the processor in the event of a software malfunction. The DMT, which works on the system clock, is a free-running instruction fetch timer, which is clocked whenever an instruction fetch occurs, until a count match occurs. Instructions are not fetched when the processor is in Sleep mode.

DMT can be enabled in the Configuration fuse or by software in the DMTCON register by setting the ON bit. The DMT consists of a 32-bit counter with a time-out count match value, as specified by the two 16-bit Configuration Fuse registers: FDMTCNTL and FDMTCNTH.

A DMT is typically used in mission-critical and safety-critical applications, where any single failure of software functionality and sequencing must be detected.

Figure 25-1 shows a block diagram of the Deadman Timer module.

Figure 25-1. Deadman Timer Block Diagram

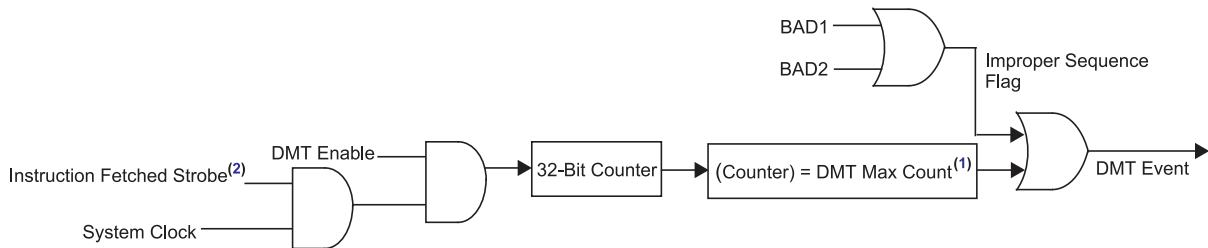

Notes:

1. DMT Max Count is controlled by the initial value of the FDMTCNTL and FDMTCNTH Configuration registers.
2. DMT window interval is controlled by the value of the FDMTIVTL and FDMTIVTH Configuration registers.

25.1 Deadman Timer (DMT) Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------------|---------------|----------|----------------|------|----------|---|---|---|---|--------|
| 0x00 ... 0x5B | Reserved | | | | | | | | | |
| 0x5C | DMTCON | 7:0 | | | | | | | | |
| | | 15:8 | ON | | | | | | | |
| 0x5E ... 0x5F | Reserved | | | | | | | | | |
| 0x60 | DMTPRECLR | 7:0 | | | | | | | | |
| | | 15:8 | STEP1[7:0] | | | | | | | |
| 0x62 ... 0x63 | Reserved | | | | | | | | | |
| 0x64 | DMTCLR | 7:0 | STEP2[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x66 ... 0x67 | Reserved | | | | | | | | | |
| 0x68 | DMTSTAT | 7:0 | BAD1 | BAD2 | DMTEVENT | | | | | WINOPN |
| | | 15:8 | | | | | | | | |
| 0x6A ... 0x6B | Reserved | | | | | | | | | |
| 0x6C | DMTCNTL | 7:0 | COUNTER[7:0] | | | | | | | |
| | | 15:8 | COUNTER[15:8] | | | | | | | |
| 0x6E | DMTCNTH | 7:0 | COUNTER[23:16] | | | | | | | |
| | | 15:8 | COUNTER[31:24] | | | | | | | |
| 0x70 | DMTHOLDREG(1) | 7:0 | UPRCNT[7:0] | | | | | | | |
| | | 15:8 | UPRCNT[15:8] | | | | | | | |
| 0x72 ... 0x73 | Reserved | | | | | | | | | |
| 0x74 | DMTPSCNTL | 7:0 | PSCNT[7:0] | | | | | | | |
| | | 15:8 | PSCNT[15:8] | | | | | | | |
| 0x76 | DMTPSCNTH | 7:0 | PSCNT[23:16] | | | | | | | |
| | | 15:8 | PSCNT[31:24] | | | | | | | |
| 0x78 | DMTPSINTVL | 7:0 | PSINTV[7:0] | | | | | | | |
| | | 15:8 | PSINTV[15:8] | | | | | | | |
| 0x7A | DMTPSINTVH | 7:0 | PSINTV[23:16] | | | | | | | |
| | | 15:8 | PSINTV[31:24] | | | | | | | |

25.1.1 Deadman Timer Control Register

Name: DMTCON

Offset: 0x5C

Note:

1. This bit has control only when DMTDIS = 0 in the FDMT Configuration Word.

| | | | | | | | | |
|--------|-----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | ON | | | | | | | |
| Access | R/W | | | | | | | |
| Reset | 0 | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bit 15 – ON DMT Module Enable bit⁽¹⁾

| Value | Description |
|-------|-------------------------------------|
| 1 | Deadman Timer module is enabled |
| 0 | Deadman Timer module is not enabled |

25.1.2 Deadman Timer Preclear Register

Name: DMTPRECLR

Offset: 0x60

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | STEP1[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bits 15:8 – STEP1[7:0] DMT Preclear Enable bits

These bits must be set to 40h to enable the Deadman Timer prescaler. All other values (improper sequence) generate the DMT event and set the BAD1 flag. These bits are cleared when a DMT Reset event occurs. STEP1[7:0] bits are also cleared if the STEP2[7:0] bits are loaded with the correct value in the correct sequence.

25.1.3 Deadman Timer Clear Register

Name: DMTCLR

Offset: 0x64

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | STEP2[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – STEP2[7:0] DMT Clear Enable bits

If the correct (40h) value was loaded in the STEP1[7:0] bits, the 04h value written into the STEP2[7:0] bits resets the Deadman Timer and clears the STEP1[7:0] bits. All other values (improper sequence) generate the DMT event and set the BAD2 flag.

25.1.4 Deadman Timer Status Register

Name: DMTSTAT

Offset: 0x68

Legend: HC = Hardware Clearable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|------|------|----------|---|---|---|---|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BAD1 | BAD2 | DMTEVENT | | | | | WINOPN |
| Access | HC/R | HC/R | HC/R | | | | | R |
| Reset | 0 | 0 | 0 | | | | | 0 |

Bit 7 – BAD1 Deadman Timer Bad STEP1[7:0] Value Detect bit

| Value | Description |
|-------|---|
| 1 | Incorrect STEP1[7:0] value was detected |
| 0 | Incorrect STEP1[7:0] value was not detected |

Bit 6 – BAD2 Deadman Timer Bad STEP2[7:0] Value Detect bit

| Value | Description |
|-------|---|
| 1 | Incorrect STEP2[7:0] value was detected |
| 0 | Incorrect STEP2[7:0] value was not detected |

Bit 5 – DMTEVENT Deadman Timer Event bit

| Value | Description |
|-------|---|
| 1 | Deadman Timer event was detected (counter expired or improper Reset sequence) |
| 0 | Deadman Timer event was not detected |

Bit 0 – WINOPN Deadman Timer Clear Window bit

| Value | Description |
|-------|--|
| 1 | Deadman Timer clear window is open |
| 0 | Deadman Timer clear window is not open |

25.1.5 Deadman Timer Count Register Low

Name: DMTCNTL

Offset: 0x6C

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------------|----|----|----|----|----|---|---|
| | COUNTER[15:8] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | COUNTER[7:0] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – COUNTER[15:0] Read Current Contents of Lower DMT Counter bits

25.1.6 Deadman Timer Count Register High

Name: DMTCNTH

Offset: 0x6E

| | | | | | | | | |
|--------|----------------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | COUNTER[31:24] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | COUNTER[23:16] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – COUNTER[31:16] Read Current Contents of Higher DMT Counter bits

25.1.7 DMT Post-Configure Count Status Register Low

Name: DMTPSCNTL

Offset: 0x74

Legend: y = Value from Configuration bit on POR

| | | | | | | | | |
|--------|-------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PSCNT[15:8] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PSCNT[7:0] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |

Bits 15:0 – PSCNT[15:0] Lower DMT Instruction Count Value Configuration Status bits

This is always the value of the FDMTCNTL Configuration register.

25.1.8 DMT Post-Configure Count Status Register High

Name: DMTPSCNTH

Offset: 0x76

Legend: y = Value from Configuration bit on POR

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PSCNT[31:24] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PSCNT[23:16] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |

Bits 15:0 – PSCNT[31:16] Higher DMT Instruction Count Value Configuration Status bits
This is always the value of the FDMTCNTH Configuration register.

25.1.9 DMT Post-Configure Interval Status Register Low

Name: DMTPSINTVL

Offset: 0x78

Legend: y = Value from Configuration bit on POR

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | PSINTV[15:8] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PSINTV[7:0] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | | | | | | | | |

Bits 15:0 – PSINTV[15:0] Lower DMT Window Interval Configuration Status bits

This is always the value of the FDMTIVTL Configuration register.

25.1.10 DMT Post-Configure Interval Status Register High

Name: DMTPSINTVH

Offset: 0x7A

Legend: y = Value from Configuration bit on POR

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|---------------|-----|-----|-----|-----|-----|-----|-----|
| | PSINTV[31:24] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PSINTV[23:16] | | | | | | | |
| Access | R-y | R-y | R-y | R-y | R-y | R-y | R-y | R-y |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – PSINTV[31:16] Higher DMT Window Interval Configuration Status bits
This is always the value of the FDMTIVTH Configuration register.

25.1.11 DMT Hold Register

Name: DMTHOLDREG⁽¹⁾

Offset: 0x70

Note:

1. The DMTHOLDREG register is initialized to '0' on Reset, and is only loaded when the DMTCNTH and DMTCNTH registers are read.

| | | | | | | | | |
|--------|--------------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | UPRCNT[15:8] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | UPRCNT[7:0] | | | | | | | |
| Access | R | R | R | R | R | R | R | R |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:0 – UPRCNT[15:0] DMTCNTH Register Value When DMTCNTH or DMTCNTH were Last Read bits

26. USB with On-The-Go (USB OTG) Support

Note: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to “**USB On-The-Go (OTG)**” (www.microchip.com/DS39721) in the “*dsPIC33/PIC24 Family Reference Manual*”. The information in this data sheet supersedes the information in the FRM.

PIC24FJ64GP205/GU205 family devices contain a full-speed and low-speed compatible, On-The-Go (OTG) USB Serial Interface Engine (SIE). The OTG capability allows the device to act as either a USB peripheral device or as a USB embedded host with limited host capabilities. The OTG capability allows the device to dynamically switch from device to host operation using OTG’s Host Negotiation Protocol (HNP).

For more details on OTG operation, refer to the “*On-The-Go Supplement*” to the “*USB 2.0 Specification*” published by the USB-IF. For more details on USB operation, refer to the “*Universal Serial Bus Specification, v2.0*”.

The USB OTG module offers these features:

- USB Functionality in Device and Host modes, and OTG Capabilities for Application-Controlled mode Switching
- Software-Selectable module Speeds of Full Speed (12 Mbps) or Low Speed (1.5 Mbps available in Host mode only)
- Support for All Four USB Transfer Types: Control, Interrupt, Bulk and Isochronous
- 16 Bidirectional Endpoints for a Total of 32 Unique Endpoints
- DMA Interface for Data RAM Access
- Queues Up to 16 Unique Endpoint Transfers without Servicing
- Integrated, On-Chip USB Transceiver with Support for Off-Chip Transceivers via a Digital Interface
- Integrated V_{BUS} Generation with On-Chip Comparators and Boost Generation, and Support of External V_{BUS} Comparators and Regulators through a Digital Interface
- Configurations for On-Chip Bus Pull-up and Pull-Down Resistors

A simplified block diagram of the USB OTG module is shown in [Figure 26-1](#).

The USB OTG module can function as a USB peripheral device or as a USB host, and may dynamically switch between Device and Host modes under software control. In either mode, the same data paths and Buffer Descriptors (BDs) are used for the transmission and reception of data.

In discussing USB operation, this section will use a controller-centric nomenclature for describing the direction of the data transfer between the microcontroller and the USB. RX (Receive) will be used to describe transfers that move data from the USB to the microcontroller and TX (Transmit) will be used to describe transfers that move data from the microcontroller to the USB. [Table 26-1](#) shows the relationship between data direction in this nomenclature and the USB tokens exchanged.

Table 26-1. Controller-Centric Data Direction for USB Host or Target

| USB Mode | Direction | |
|----------|--------------|--------------|
| | RX | TX |
| Device | OUT or SETUP | IN |
| Host | IN | OUT or SETUP |


This chapter presents the most basic operations needed to implement USB OTG functionality in an application. A complete and detailed discussion of the USB protocol and its OTG supplement are beyond the scope of this data sheet. It is assumed that the user already has a basic understanding of USB architecture and the latest version of the protocol.

Not all steps for proper USB operation (such as device enumeration) are presented here. It is recommended that application developers use an appropriate device driver to implement all of the necessary features. Microchip provides a number of application-specific resources, such as USB firmware and driver support. Refer to www.microchip.com/usb for the latest firmware and driver support.

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

Figure 26-1. USB OTG Module Block Diagram

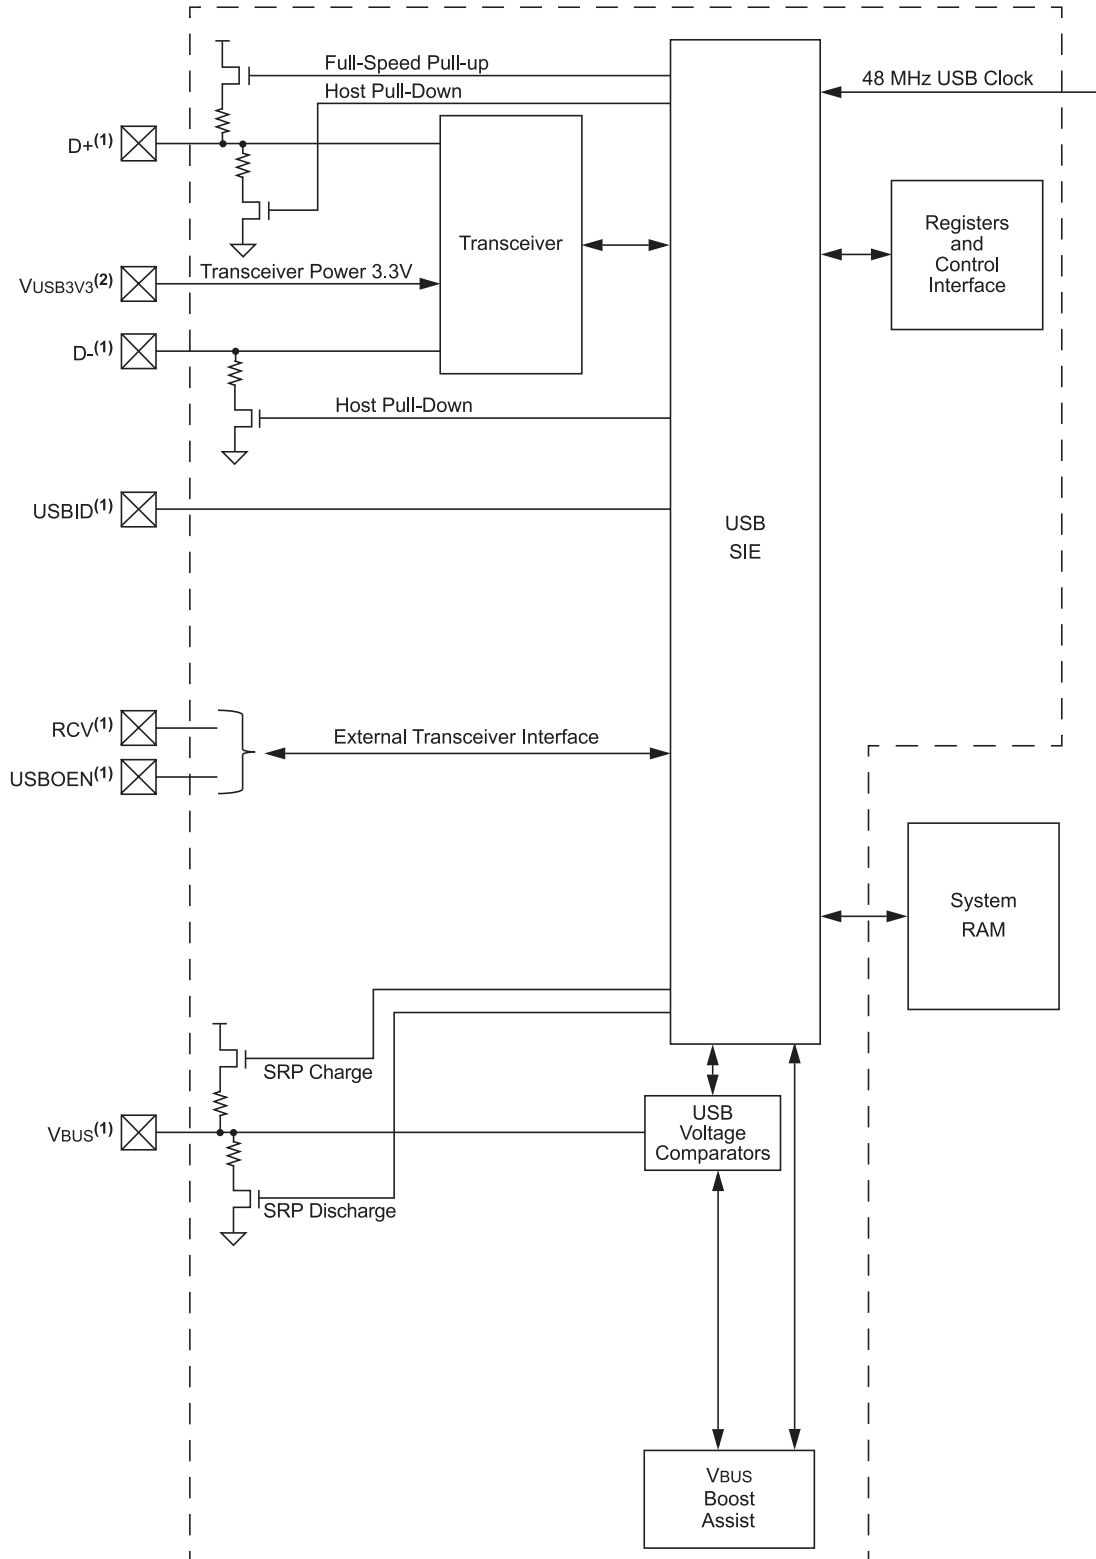

Notes:

1. Pins are multiplexed with digital I/Os and other device features.
2. Connecting V_{BUS3V3} to V_{DD} is highly recommended, as floating this input can cause increased I_{PD} currents. The pin should be tied to V_{DD} when the USB functions are not used.

26.1 Hardware Configuration

26.1.1 Device Mode

26.1.1.1 D+ Pull-up Resistor

PIC24FJ64GP205/GU205 family devices have a built-in 1.5 k Ω resistor on the D+ line that is available when the microcontroller is operating in Device mode. This is used to signal an external host that the device is operating in Full-Speed Device mode. It is engaged by setting the USBEN bit (U1CON[0]) and powering up the USB module (USBPWR = 1). If the OTGEN bit (U1OTGCON[2]) is set, then the D+ pull-up is enabled through the DPPULUP bit (U1OTGCON[7]).

26.1.1.2 The V_{BUS} Pin

In order to meet the “USB 2.0 Specification” requirement, relating to the back drive voltage on the D+/D- pins, the USB module incorporates V_{BUS} -level sensing comparators. When the comparators detect the V_{BUS} level below the $V_{A_SESS_V_{LD}}$ level, the hardware will automatically disable the D+ pull-up resistor described in [26.1.1.1. D+ Pull-up Resistor](#). This allows the device to automatically meet the back drive requirement for D+ and D-, even if the application firmware does not explicitly monitor the V_{BUS} level. Therefore, the V_{BUS} microcontroller pin should not be left floating in USB Device mode application designs and should normally be connected to the V_{BUS} pin on the USB connector/cable (either directly or through a small resistance ≤ 100 ohms).

26.1.1.3 Power Modes

Many USB applications will likely have several different sets of power requirements and configuration. The most common power modes encountered are:

- Bus Power Only mode
- Self-Power Only mode
- Suspend mode
- Dual Power with Self-Power Dominance mode

Bus Power Only mode ([Figure 26-2](#)) is effectively the simplest method. All power for the application is drawn from the USB.

To meet the inrush current requirements of the “USB 2.0 Specification”, the total effective capacitance, appearing across V_{BUS} and ground, must be no more than 10 μ F.

In the USB Suspend mode, devices must consume no more than 2.5 mA from the 5V V_{BUS} line of the USB cable. During the USB Suspend mode, the D+ or D- pull-up resistor must remain active, which will consume some of the allowed suspend current.

In Self-Power Only mode ([Figure 26-3](#)), the USB application provides its own power, with very little power being pulled from the USB. Note that an attach indication is added to indicate when the USB has been connected and the host is actively powering V_{BUS} .

To meet compliance specifications, the USB module (and the D+ or D- pull-up resistor) should not be enabled until the host actively drives V_{BUS} high. One of the 5.5V tolerant I/O pins may be used for this purpose.

The application should never source any current onto the 5V V_{BUS} pin of the USB cable when the USB module is operated in USB Device mode.

The Dual Power with Self-Power Dominance mode ([Figure 26-4](#)) allows the application to use internal power primarily, but switch to power from the USB when no internal power is available. Dual power devices must also meet all of the special requirements for inrush current and Suspend mode current previously described, and must not enable the USB module until V_{BUS} is driven high.

Figure 26-2. Bus-Powered Interface Example

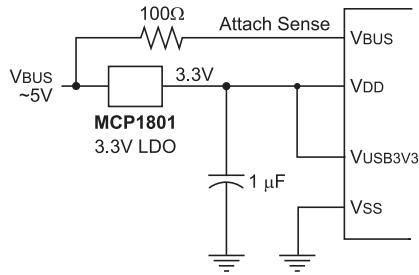


Figure 26-3. Self-Power Only


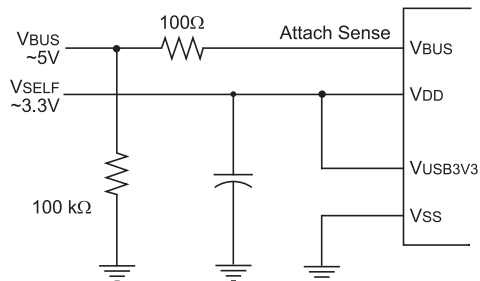


Figure 26-4. Dual Power Example

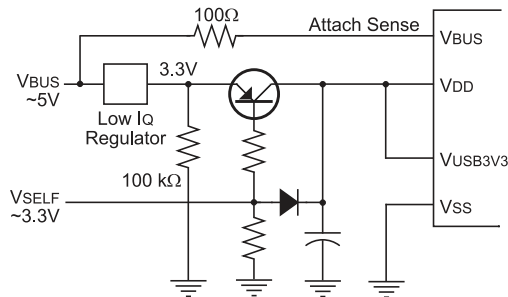

26.1.2 Host and OTG Modes

26.1.2.1 D+ and D- Pull-Down Resistors

PIC24FJ64GP205/GU205 family devices have built-in 15 kΩ pull-down resistors on the D+ and D- lines. These resistors are used in tandem to signal to the bus that the microcontroller is operating in Host mode. They are engaged by setting the HOSTEN bit (U1CON[3]). If the OTGEN bit (U1OTGCON[2]) is set, then these pull-downs are enabled by setting the DPPULDOWN and DMPULDOWN bits (U1OTGCON[5:4]).

26.1.2.2 Power Configurations

In Host mode, as well as Host mode in On-The-Go operation, the “*USB 2.0 Specification*” requires that the host application should supply power on V_{BUS} . Since the microcontroller is running below V_{BUS} , and is not able to source sufficient current, a separate power supply must be provided.

When the application is always operating in Host mode, a simple circuit can be used to supply V_{BUS} and regulate current on the bus (Figure 26-5). For OTG operation, it is necessary to be able to turn V_{BUS} on or off as needed, as the microcontroller switches between Device and Host modes. A typical example using an external charge pump is shown in Figure 26-6.

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

Figure 26-5. Host Interface Example


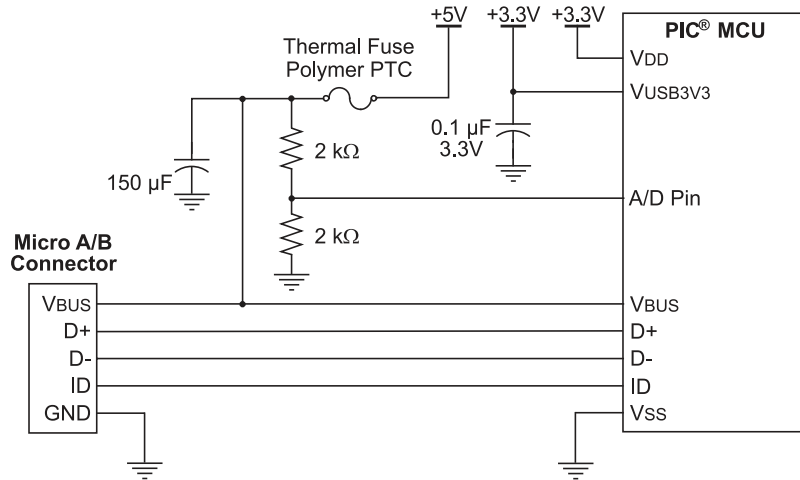


Figure 26-6. OTG Interface Example

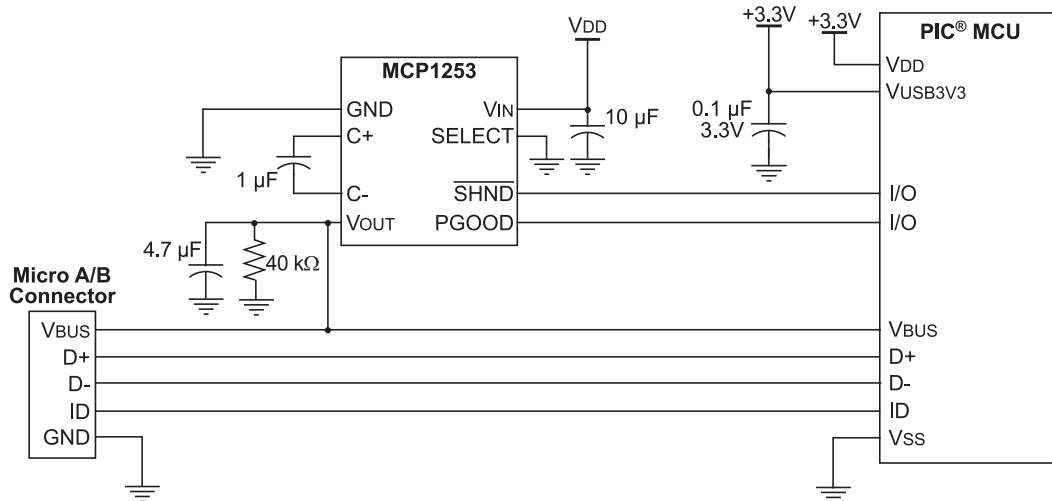

26.1.3 Calculating Transceiver Power Requirements

The USB transceiver consumes a variable amount of current depending on the characteristic impedance of the USB cable, the length of the cable, the V_{USB} supply voltage and the actual data patterns moving across the USB cable. Longer cables have larger capacitances and consume more total energy when switching output states. The total transceiver current consumption will be application-specific. Equation 26-1 can help estimate how much current actually may be required in full-speed applications.

Refer to “USB On-The-Go (OTG)” (www.microchip.com/DS39721) in the “dsPIC33/PIC24 Family Reference Manual” for a complete discussion on transceiver power consumption.

Equation 26-1. Estimating USB Transceiver Current Consumption

$$I_{XCVR} = \frac{40 \text{ mA} \cdot V_{USB} \cdot P_{ZERO} \cdot P_{IN} \cdot L_{CABLE}}{3.3\text{V} \cdot 5\text{m}} + I_{PULLUP}$$

Legend: V_{USB} – Voltage applied to the VUSB3V3 pin in volts (3.0V to 3.6V).

P_{ZERO} – Percentage (in decimal) of the IN traffic bits sent by the PIC[®] microcontroller that are a value of '0'.

P_{IN} – Percentage (in decimal) of total bus bandwidth that is used for IN traffic.

L_{CABLE} – Length (in meters) of the USB cable. The “USB 2.0 Specification” requires that full-speed applications use cables no longer than 5m.

I_{PULLUP} – Current which the nominal, 1.5 k Ω pull-up resistor (when enabled) must supply to the USB cable.

26.2 USB Buffer Descriptors and the BDT

Endpoint buffer control is handled through a structure called the Buffer Descriptor Table (BDT). This provides a flexible method for users to construct and control endpoint buffers of various lengths and configurations.

The BDT can be located in any available 512-byte, aligned block of data RAM. The BDT Pointer (U1BDTP1) contains the upper address byte of the BDT and sets the location of the BDT in RAM. The user must set this pointer to indicate the table's location.

The BDT is composed of Buffer Descriptors (BDs), which are used to define and control the actual buffers in the USB RAM space. Each BD consists of two 16-bit, “soft” (non-fixed address) registers, BDnSTAT and BDnADR, where n represents one of the 64 possible BDs (range of 0 to 63). BDnSTAT is the status register for BDn, while BDnADR specifies the starting address for the buffer associated with BDn.

Note: Since BDnADR is a 16-bit register, only the first 64 Kbytes of RAM can be accessed by the USB module.

Depending on the endpoint buffering configuration used, there are up to 64 sets of Buffer Descriptors, for a total of 256 bytes. At a minimum, the BDT must be at least eight bytes long. This is because the “USB 2.0 Specification” mandates that every device must have Endpoint 0 with both input and output for initial setup.

Endpoint mapping in the BDT is dependent on three variables:

- Endpoint number (0 to 15)
- Endpoint direction (RX or TX)
- Ping-pong settings (U1CNFG1[1:0])


Figure 26-7 illustrates how these variables are used to map endpoints in the BDT.

In Host mode, only Endpoint 0 Buffer Descriptors are used. All transfers utilize the Endpoint 0 Buffer Descriptor and Endpoint Control register (U1EP0). For received packets, the attached device's source endpoint is indicated by the value of ENDPT[3:0] in the USB Status register (U1STAT[7:4]). For transmitted packets, the attached device's destination endpoint is indicated by the value written to the USB Token register (U1TOK).

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

Figure 26-7. BDT Mapping for Endpoint Buffering Modes

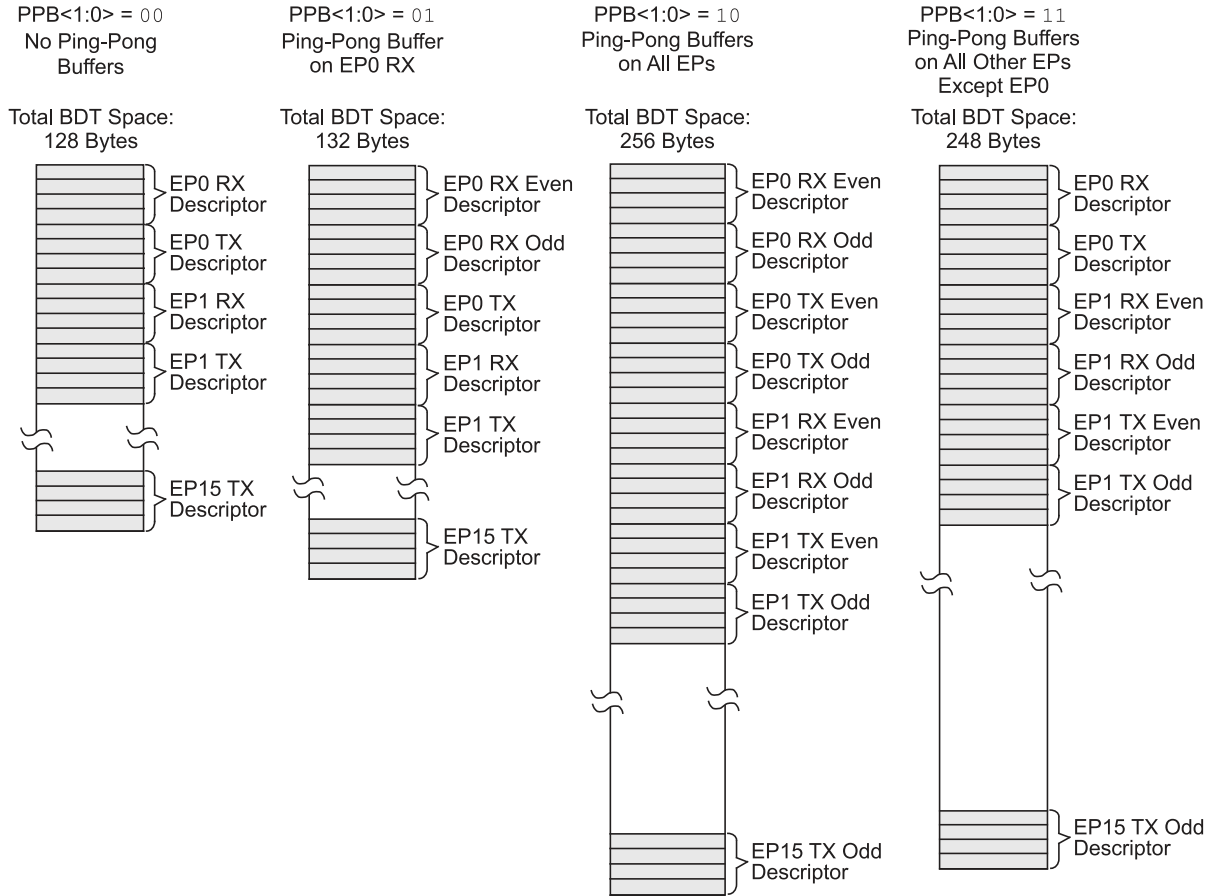

Note: Memory area is not shown to scale.

BDs have a fixed relationship to a particular endpoint, depending on the buffering configuration. [Table 26-2](#) provides the mapping of BDs to endpoints. This relationship also means that gaps may occur in the BDT if endpoints are not enabled contiguously. This, theoretically, means that the BDs for disabled endpoints could be used as buffer space. In practice, users should avoid using such spaces in the BDT unless a method of validating BD addresses is implemented.

Table 26-2. Assignment of Buffer Descriptors for the Different Buffering Modes

| Endpoint | BDs Assigned to Endpoint | | | | | | | |
|----------|--------------------------|----|---------------------------------|----|----------------------------------|----------------|--|----------------|
| | Mode 0 (No Ping-Pong) | | Mode 1 (Ping-Pong on EP0 RX) | | Mode 2 (Ping-Pong on All EPs) | | Mode 3 (Ping-Pong on All Other EPs, Except EP0) | |
| | RX | TX | RX | TX | RX | TX | RX | TX |
| 0 | 0 | 1 | 0 (E), 1 (O) | 2 | 0 (E), 1 (O) | 2 (E), 3 (O) | 0 | 1 |
| 1 | 2 | 3 | 3 | 4 | 4 (E), 5 (O) | 6 (E), 7 (O) | 2 (E), 3 (O) | 4 (E), 5 (O) |
| 2 | 4 | 5 | 5 | 6 | 8 (E), 9 (O) | 10 (E), 11 (O) | 6 (E), 7 (O) | 8 (E), 9 (O) |
| 3 | 6 | 7 | 7 | 8 | 12 (E), 13 (O) | 14 (E), 15 (O) | 10 (E), 11 (O) | 12 (E), 13 (O) |
| 4 | 8 | 9 | 9 | 10 | 16 (E), 17 (O) | 18 (E), 19 (O) | 14 (E), 15 (O) | 16 (E), 17 (O) |
| 5 | 10 | 11 | 11 | 12 | 20 (E), 21 (O) | 22 (E), 23 (O) | 18 (E), 19 (O) | 20 (E), 21 (O) |

.....continued

| Endpoint | BDs Assigned to Endpoint | | | | | | | |
|----------|--------------------------|----|---------------------------------|----|----------------------------------|----------------|---|----------------|
| | Mode 0 (No Ping-Pong) | | Mode 1 (Ping-Pong on EP0 RX) | | Mode 2 (Ping-Pong on All EPs) | | Mode 3 (Ping-Pong on All Other EPs, Except EP0) | |
| | RX | TX | RX | TX | RX | TX | RX | TX |
| 6 | 12 | 13 | 13 | 14 | 24 (E), 25 (O) | 26 (E), 27 (O) | 22 (E), 23 (O) | 24 (E), 25 (O) |
| 7 | 14 | 15 | 15 | 16 | 28 (E), 29 (O) | 30 (E), 31 (O) | 26 (E), 27 (O) | 28 (E), 29 (O) |
| 8 | 16 | 17 | 17 | 18 | 32 (E), 33 (O) | 34 (E), 35 (O) | 30 (E), 31 (O) | 32 (E), 33 (O) |
| 9 | 18 | 19 | 19 | 20 | 36 (E), 37 (O) | 38 (E), 39 (O) | 34 (E), 35 (O) | 36 (E), 37 (O) |
| 10 | 20 | 21 | 21 | 22 | 40 (E), 41 (O) | 42 (E), 43 (O) | 38 (E), 39 (O) | 40 (E), 41 (O) |
| 11 | 22 | 23 | 23 | 24 | 44 (E), 45 (O) | 46 (E), 47 (O) | 42 (E), 43 (O) | 44 (E), 45 (O) |
| 12 | 24 | 25 | 25 | 26 | 48 (E), 49 (O) | 50 (E), 51 (O) | 46 (E), 47 (O) | 48 (E), 49 (O) |
| 13 | 26 | 27 | 27 | 28 | 52 (E), 53 (O) | 54 (E), 55 (O) | 50 (E), 51 (O) | 52 (E), 53 (O) |
| 14 | 28 | 29 | 29 | 30 | 56 (E), 57 (O) | 58 (E), 59 (O) | 54 (E), 55 (O) | 56 (E), 57 (O) |
| 15 | 30 | 31 | 31 | 32 | 60 (E), 61 (O) | 62 (E), 63 (O) | 58 (E), 59 (O) | 60 (E), 61 (O) |

Legend: (E) = Even transaction buffer, (O) = Odd transaction buffer

26.2.1 Buffer Ownership

Because the buffers and their BDs are shared between the CPU and the USB module, a simple semaphore mechanism is used to distinguish which is allowed to update the BD and associated buffers in memory. This is done by using the UOWN bit as a semaphore to distinguish which is allowed to update the BD and associated buffers in memory. UOWN is the only bit that is shared between the two configurations of BDnSTAT.

When UOWN is clear, the BD entry is “owned” by the microcontroller core. When the UOWN bit is set, the BD entry and the buffer memory are “owned” by the USB peripheral. The core should not modify the BD or its corresponding data buffer during this time. Note that the microcontroller core can still read BDnSTAT while the SIE owns the buffer and vice versa.

The Buffer Descriptors have a different meaning based on the source of the register update. [26.3.1. BDnSTAT](#) and [26.3.2. BDnSTAT](#) show the differences in BDnSTAT depending on its current “ownership”.

When UOWN is set, the user can no longer depend on the values that were written to the BDs. From this point, the USB module updates the BDs as necessary, overwriting the original BD values. The BDnSTAT register is updated by the SIE with the token PID and the transfer count is updated.

26.2.2 DMA Interface

The USB OTG module uses a dedicated DMA to access both the BDT and the endpoint data buffers. Since part of the address space of the DMA is dedicated to the Buffer Descriptors, a portion of the memory connected to the DMA must comprise a contiguous address space, properly mapped for the access by the module.

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.3 USB On-The-Go Registers

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-------------------|------------|----------|--------------|--------------|----------|----------|----------|-----------|--------------------|-----------------------|
| 00 ... 05FF | Reserved | | | | | | | | | |
| 0x0600 | U1OTGIR(2) | 7:0 | IDIF | T1MSECIF | LSTATEIF | ACTVIF | SESVDF | SESENDIF | | VBUSVDIF |
| | | 15:8 | | | | | | | | |
| 0x0602 | U1OTGIE | 7:0 | IDIE | T1MSECIE | LSTATEIE | ACTVIE | SESVDF | SESENDIE | | VBUSVDIE |
| | | 15:8 | | | | | | | | |
| 0x0604 | U1OTGSTAT | 7:0 | ID | | LSTATE | | SESVDF | SESEND | | VBUSVD |
| | | 15:8 | | | | | | | | |
| 0x0606 | U1OTGCON | 7:0 | DPPULUP | DMPULUP | DPPULDWN | DMPULDWN | Reserved | OTGEN | Reserved | VBUSDIS |
| | | 15:8 | | | | | | | | |
| 0x0608 | U1PWRC | 7:0 | UACTPND | | | USLPGRD | | | USUSPND | USBPWR |
| | | 15:8 | | | | | | | | |
| 0x060A | U1IR(1) | 7:0 | STALLIF | | RESUMEIF | IDLEIF | TRNIF | SOFIF | UERRIF | URSTIF |
| | | 15:8 | | | | | | | | |
| 0x060A | U1IR(1) | 7:0 | STALLIF | ATTACHIF | RESUMEIF | IDLEIF | TRNIF | SOFIF | UERRIF | DETACHIF |
| | | 15:8 | | | | | | | | |
| 0x060C | U1IE | 7:0 | STALLIE | ATTACHIE | RESUMEIE | IDLEIE | TRNIE | SOFIE | UERRIE | URSTIE or DETACHIE |
| | | 15:8 | | | | | | | | |
| 0x060E | U1EIR(1) | 7:0 | BTSEF | | DMAEF | BTOEF | DFN8EF | CRC16EF | CRC5EF or EOFEE | PIDEF |
| | | 15:8 | | | | | | | | |
| 0x0610 | U1EIE | 7:0 | BTSEE | | DMAEE | BTOEE | DFN8EE | CRC16EE | CRC5EE or EOFEE | PIDEE |
| | | 15:8 | | | | | | | | |
| 0x0612 | U1STAT | 7:0 | ENDPT[3:0] | | | | DIR | PPBI | | |
| | | 15:8 | | | | | | | | |
| 0x0614 | U1CON | 7:0 | | SE0 | PKTDIS | | HOSTEN | RESUME | PPBRST | USBEN |
| | | 15:8 | | | | | | | | |
| 0x0614 | U1CON | 7:0 | JSTATE | SE0 | TOKBUSY | USBRST | HOSTEN | RESUME | PPBRST | SOFEN |
| | | 15:8 | | | | | | | | |
| 0x0616 | U1ADDR | 7:0 | LSPDEN | DEVADDR[6:0] | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0618 | U1BDTP1 | 7:0 | BDTPTRL[6:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x061A | U1FRML | 7:0 | FRM[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x061C | U1FRMH | 7:0 | | | | | | FRM[10:8] | | |
| | | 15:8 | | | | | | | | |
| 0x061E | U1TOK | 7:0 | PID[3:0] | | | | EP[3:0] | | | |
| | | 15:8 | | | | | | | | |
| 0x0620 | U1SOF | 7:0 | CNT[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0622 | U1BDTP2 | 7:0 | BDTPTRH[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0624 | U1BDTP3 | 7:0 | BDTPTRU[7:0] | | | | | | | |
| | | 15:8 | | | | | | | | |
| 0x0626 | U1CNFG1 | 7:0 | UTEYE | UOEMON | | USBSIDL | | | PPB[1:0] | |
| | | 15:8 | | | | | | | | |
| 0x0628 | U1CNFG2 | 7:0 | | | | PUVBUS | EXTI2CEN | | | |
| | | 15:8 | | | | | | | | |
| 0x062A | U1EP0 | 7:0 | LSPD | RETRYDIS | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x062C | U1EP1 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

.....continued

| Offset | Name | Bit Pos. | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|--------|----------|---|---|---|----------|--------|--------|---------|-------|
| 0x062E | U1EP2 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0630 | U1EP3 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0632 | U1EP4 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0634 | U1EP5 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0636 | U1EP6 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0638 | U1EP7 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x063A | U1EP8 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x063C | U1EP9 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x063E | U1EP10 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0640 | U1EP11 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0642 | U1EP12 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0644 | U1EP13 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0646 | U1EP14 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |
| 0x0648 | U1EP15 | 7:0 | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| | | 15:8 | | | | | | | | |

26.3.1 Buffer Descriptor n Status Register Prototype, USB Mode (BD0STAT through BD63STAT)

Name: BDNSTAT
Offset: User Defined

Legend: HSC = Hardware Settable/Clearable bit; x = Bit state is unknown

| | | | | | | | | |
|--------|---------|---------|----------|---------|---------|---------|---------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | UOWN | DTS | PID[3:0] | | | | BC[9:8] | |
| Access | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W |
| Reset | x | x | x | x | x | x | x | x |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BC[7:0] | | | | | | | |
| Access | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W |
| Reset | x | x | x | x | x | x | x | x |

Bit 15 – UOWN USB Own bit

| Value | Description |
|-------|---|
| 1 | The USB module owns the BD and its corresponding buffer; the CPU must not modify the BD or the buffer |

Bit 14 – DTS Data Toggle Packet bit

| Value | Description |
|-------|---------------|
| 1 | Data 1 packet |
| 0 | Data 0 packet |

Bits 13:10 – PID[3:0] Packet Identifier bits (written by the USB module)

In Device mode:

Represents the PID of the received token during the last transfer.

In Host mode:

Represents the last returned PID or the transfer status indicator.

Bits 9:0 – BC[9:0] Byte Count bits

This represents the number of bytes to be transmitted or the maximum number of bytes to be received during a transfer. Upon completion, the byte count is updated by the USB module with the actual number of bytes transmitted or received.

26.3.2 Buffer Descriptor n Status Register Prototype, CPU Mode (BD0STAT through BD63STAT)

Name: BDnSTAT
Offset: User Defined

Note:

1. This bit is ignored unless DTSEN = 1.

Legend: HSC = Hardware Settable/Clearable bit; x = Bit state is unknown

| | | | | | | | | |
|--------|---------|---------|----|----|---------|---------|---------|---------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | UOWN | DTS | | | DTSEN | BSTALL | BC[9:8] | |
| Access | HSC/R/W | HSC/R/W | | | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W |
| Reset | x | x | | | x | x | x | x |

| | | | | | | | | |
|--------|---------|---------|---------|---------|---------|---------|---------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BC[7:0] | | | | | | | |
| Access | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W | HSC/R/W |
| Reset | x | x | x | x | x | x | x | x |

Bit 15 – UOWN USB Own bit

| Value | Description |
|-------|--|
| 1 | The microcontroller core owns the BD and its corresponding buffer; the USB module ignores all other fields in the BD |

Bit 14 – DTS Data Toggle Packet bit⁽¹⁾

| Value | Description |
|-------|---------------|
| 1 | Data 1 packet |
| 0 | Data 0 packet |

Bit 11 – DTSEN Data Toggle Synchronization Enable bit

| Value | Description |
|-------|--|
| 1 | Data toggle synchronization is enabled; data packets with incorrect Sync value will be ignored |
| 0 | No data toggle synchronization is performed |

Bit 10 – BSTALL Buffer Stall Enable bit

| Value | Description |
|-------|---|
| 1 | Buffer STALL is enabled; STALL handshake issued if a token is received that would use the BD in the given location (UOWN bit remains set, BD value is unchanged), corresponding EPSTALL bit will get set on any STALL handshake |
| 0 | Buffer STALL is disabled |

Bits 9:0 – BC[9:0] Byte Count bits

This represents the number of bytes to be transmitted or the maximum number of bytes to be received during a transfer. Upon completion, the byte count is updated by the USB module with the actual number of bytes transmitted or received.

26.4 USB Interrupts

The USB OTG module has many conditions that can be configured to cause an interrupt. All interrupt sources use the same interrupt vector.

Figure 26-8 shows the interrupt logic for the USB module. There are two layers of interrupt registers in the USB module. The top level consists of overall USB status interrupts; these are enabled and flagged in the U1IE and U1IR registers, respectively. The second level consists of USB error conditions, which are enabled and flagged in the U1EIR and U1EIE registers. An interrupt condition in any of these triggers a USB Error Interrupt Flag (UERRIF) in


PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

the top level. Unlike the device-level interrupt flags in the IFSx registers, USB interrupt flags in the U1IR registers can only be cleared by writing a '1' to the bit position.

Interrupts may be used to trap routine events in a USB transaction. Figure 26-9 provides some common events within a USB frame and their corresponding interrupts.

Figure 26-8. USB OTG Interrupt Funnel

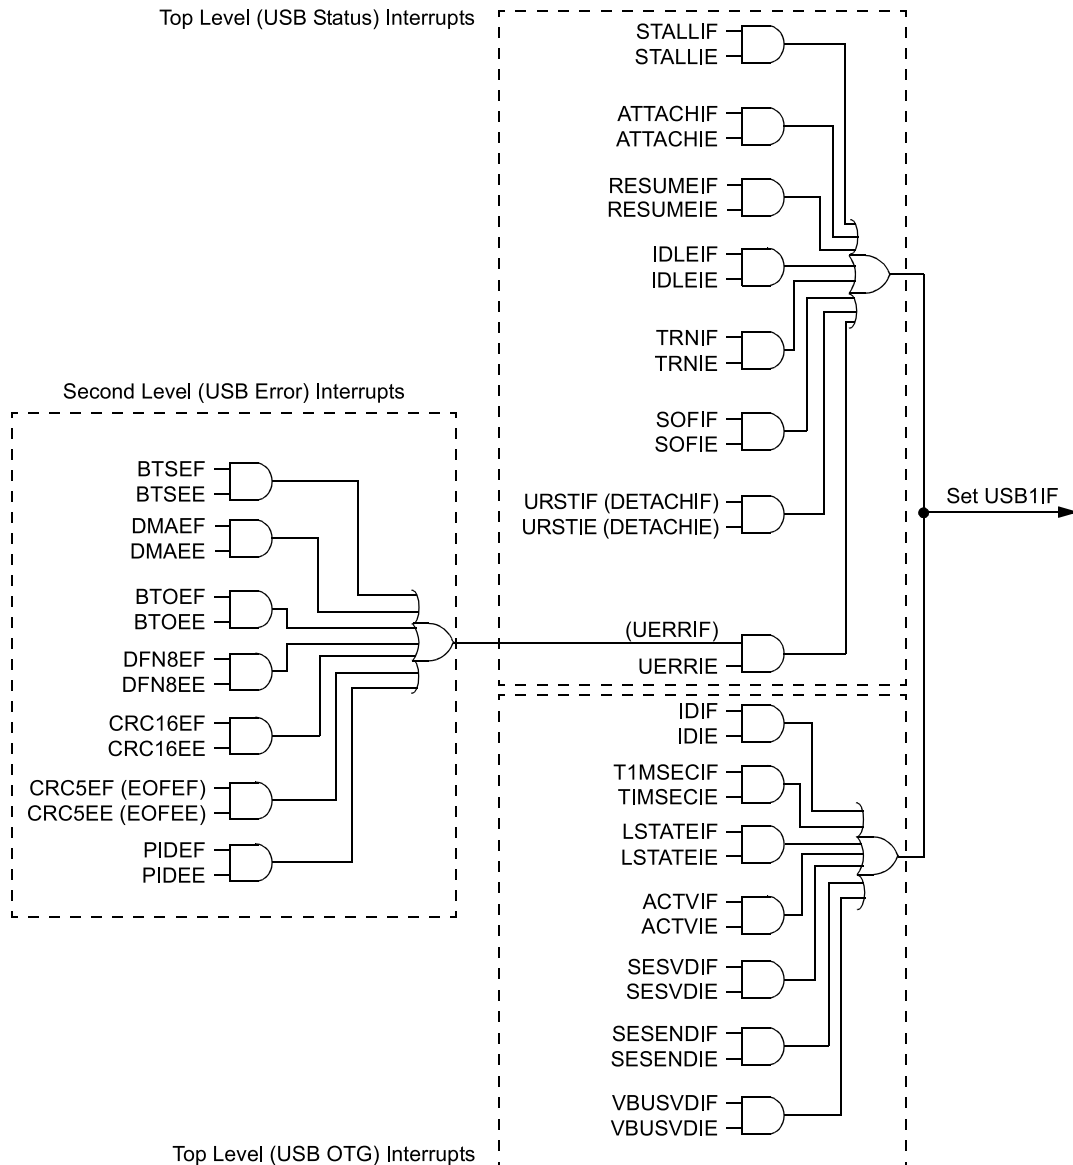


26.4.1 Clearing USB OTG Interrupts

Unlike device-level interrupts, the USB OTG interrupt status flags are not freely writable in software. All USB OTG flag bits are implemented as hardware set only bits. Additionally, these bits can only be cleared in software by writing a '1' to their locations (i.e., performing a MOV type instruction). Writing a '0' to a flag bit (i.e., a BCLR instruction) has no effect.

Note: Throughout this data sheet, a bit that can only be cleared by writing a '1' to its location is referred to as "Write '1' to Clear". In register descriptions, this function is indicated by the descriptor, "K".

Figure 26-9. Example of a USB Transaction and Interrupt Events

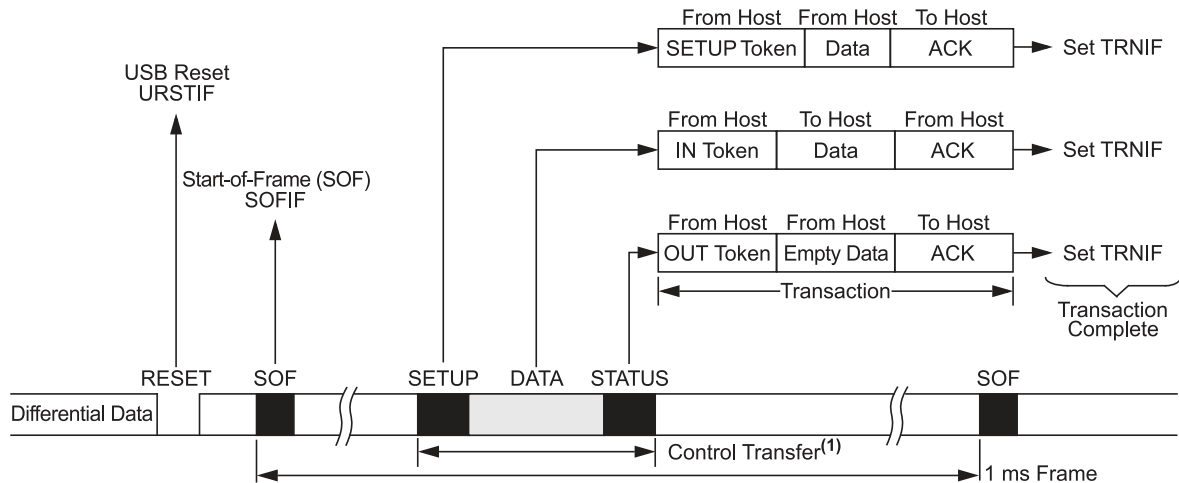

Note:

1. The control transfer shown here is only an example showing events that can occur for every transaction. Typical control transfers will spread across multiple frames.

26.5 Device Mode Operation

The following section describes how to perform a common Device mode task. In Device mode, USB transfers are performed at the transfer level. The USB module automatically performs the status phase of the transfer.

26.5.1 Enabling Device Mode

1. Reset the Ping-Pong Buffer Pointers by setting, then clearing, the Ping-Pong Buffer Reset bit, PPBRST (U1CON[1]).
2. Disable all interrupts (U1IE and U1EIE = 00h).
3. Clear any existing interrupt flags by writing FFh to U1IR and U1EIR.
4. Verify that V_{BUS} is present (non-OTG devices only).
5. Enable the USB module by setting the USBEN bit (U1CON[0]).
6. Set the OTGEN bit (U1OTGCON[2]) to enable OTG operation.
7. Enable the Endpoint 0 buffer to receive the first setup packet by setting the EPRXEN and EPHSHK bits for Endpoint 0 (U1EP0[3,0] = 1).
8. Power up the USB module by setting the USBPWR bit (U1PWRC[0]).
9. Enable the D+ pull-up resistor to signal an attach by setting the DPPULUP bit (U1OTGCON[7]).

26.5.2 Receiving an IN Token in Device Mode

1. Attach to a USB host and enumerate as described in Chapter 9 of the “USB 2.0 Specification”.
2. Create a data buffer and populate it with the data to send to the host.
3. In the appropriate (even or odd) TX BD for the desired endpoint:
 - a. Set up the status register (BDnSTAT) with the correct data toggle (DATA0/1) value and the byte count of the data buffer.
 - b. Set up the address register (BDnADR) with the starting address of the data buffer.
 - c. Set the UOWN bit of the status register to ‘1’.
4. When the USB module receives an IN token, it automatically transmits the data in the buffer. Upon completion, the module updates the status register (BDnSTAT) and sets the Token Processing Complete Interrupt Flag, TRNIF (U1IR[3]).

26.5.3 Receiving an OUT Token in Device Mode

1. Attach to a USB host and enumerate as described in Chapter 9 of the “*USB 2.0 Specification*”.
2. Create a data buffer with the amount of data you are expecting from the host.
3. In the appropriate (even or odd) TX BD for the desired endpoint:
 - a. Set up the status register (BDnSTAT) with the correct data toggle (DATA0/1) value and the byte count of the data buffer.
 - b. Set up the address register (BDnADR) with the starting address of the data buffer.
 - c. Set the UOWN bit of the status register to ‘1’.
4. When the USB module receives an OUT token, it automatically receives the data sent by the host to the buffer. Upon completion, the module updates the status register (BDnSTAT) and sets the Token Processing Complete Interrupt Flag, TRNIF (U1IR[3]).

26.6 Host Mode Operation

The following sections describe how to perform common Host mode tasks. In Host mode, USB transfers are invoked explicitly by the host software. The host software is responsible for the Acknowledge portion of the transfer. Also, all transfers are performed using the Endpoint 0 Control register (U1EP0) and Buffer Descriptors.

26.6.1 Enable Host Mode and Discover a Connected Device

1. Enable Host mode by setting the HOSTEN bit (U1CON[3]). This causes the Host mode control bits in other USB OTG registers to become available.
2. Enable the D+ and D- pull-down resistors by setting the DPPULDOWN and DMPULDOWN bits (U1OTGCON[5:4]). Disable the D+ and D- pull-up resistors by clearing the DPPULUP and DMPULUP bits (U1OTGCON[7:6]).
3. At this point, SOF generation begins with the SOF counter loaded with 12,000. Eliminate noise on the USB by clearing the SOFEN bit (U1CON[0]) to disable Start-of-Frame (SOF) packet generation.
4. Enable the device attached interrupt by setting the ATTACHIE bit (U1IE[6]).
5. Wait for the device attached interrupt (U1IR[6] = 1). This is signaled by the USB device changing the state of D+ or D- from ‘0’ to ‘1’ (SE0 to J-state). After it occurs, wait 100 ms for the device power to stabilize.
6. Check the state of the JSTATE and SE0 bits in U1CON. If the JSTATE bit (U1CON[7]) is ‘0’, the connecting device is low speed. If the connecting device is low speed, set the LSPDEN and LSPD bits (U1ADDR[7] and U1EP0[7]) to enable low-speed operation.
7. Reset the USB device by setting the USBRST bit (U1CON[4]) for at least 50 ms, sending Reset signaling on the bus. After 50 ms, terminate the Reset by clearing USBRST.
8. In order to keep the connected device from going into suspend, enable the SOF packet generation by setting the SOFEN bit.
9. Wait 10 ms for the device to recover from Reset.
10. Perform enumeration as described by Chapter 9 of the “*USB 2.0 Specification*”.

26.6.2 Complete a Control Transaction to a Connected Device

1. Follow the procedure described in [26.6.1. Enable Host Mode and Discover a Connected Device](#) to discover a device.
2. Set up the Endpoint Control register for bidirectional control transfers by writing 0Dh to U1EP0 (this sets the EPCONDIS, EPTXEN and EPHSHK bits).
3. Place a copy of the device framework setup command in a memory buffer. See Chapter 9 of the “*USB 2.0 Specification*” for information on the device framework command set.
4. Initialize the Buffer Descriptor (BD) for the current (even or odd) TX EP0 to transfer the eight bytes of command data for a device framework command (i.e., GET_DEVICE_DESCRIPTOR):
 - a. Set the BD Data Buffer Address (BD0ADR) to the starting address of the 8-byte memory buffer containing the command.
 - b. Write 8008h to BD0STAT (this sets the UOWN bit and sets a byte count of eight).

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

5. Set the USB device address of the target device in the USB Address register (U1ADDR[6:0]). After a USB bus Reset, the device USB address will be zero. After enumeration, it will be set to another value between 1 and 127.
6. Write D0h to U1TOK; this is a SETUP token to Endpoint 0, the target device's default control pipe. This initiates a SETUP token on the bus, followed by a data packet. The device handshake is returned in the PID field of BD0STAT after the packets are complete. When the USB module updates BD0STAT, a Token Processing Complete Interrupt Flag is asserted (the TRNIF flag is set). This completes the setup phase of the setup transaction, as referenced in Chapter 9 of the *"USB 2.0 Specification"*.
7. To initiate the data phase of the setup transaction (i.e., get the data for the `GET_DEVICE_DESCRIPTOR` command), set up a buffer in memory to store the received data.
8. Initialize the current (even or odd) RX or TX (RX for IN, TX for OUT) EP0 BD to transfer the data:
 - a. Write C040h to BD0STAT. This sets the UOWN bit, configures the Data Toggle Packet bit (DTS) to DATA1 and sets the byte count to the length of the data buffer (64 or 40h in this case).
 - b. Set BD0ADR to the starting address of the data buffer.
9. Write the Token register with the appropriate IN or OUT token to Endpoint 0, the target device's default control pipe (e.g., write 90h to U1TOK for an IN token for a `GET_DEVICE_DESCRIPTOR` command). This initiates an IN token on the bus, followed by a data packet from the device to the host. When the data packet completes, the BD0STAT is written and a Token Processing Complete Interrupt Flag is asserted (the TRNIF flag is set). For control transfers with a single packet data phase, this completes the data phase of the setup transaction, as referenced in Chapter 9 of the *"USB 2.0 Specification"*. If more data need to be transferred, return to Step 8.
10. To initiate the status phase of the setup transaction, set up a buffer in memory to receive or send the zero length status phase data packet.
11. Initialize the current (even or odd) TX EP0 BD to transfer the status data:
 - a. Set the BDT buffer address field to the start address of the data buffer.
 - b. Write 8000h to BD0STAT (set UOWN bit, configure DTS to DATA0 and set byte count to 0).
12. Write the Token register with the appropriate IN or OUT token to Endpoint 0, the target device's default control pipe (e.g., write 01h to U1TOK for an OUT token for a `GET_DEVICE_DESCRIPTOR` command). This initiates an OUT token on the bus, followed by a zero length data packet from the host to the device. When the data packet completes, the BD is updated with the handshake from the device and a Token Processing Complete Interrupt Flag is asserted (the TRNIF flag is set). This completes the status phase of the setup transaction, as described in Chapter 9 of the *"USB 2.0 Specification"*.

Note: Only one control transaction can be performed per frame.

26.6.3 Send a Full-Speed Bulk Data Transfer to a Target Device

1. Follow the procedure described in [26.6.1. Enable Host Mode and Discover a Connected Device](#) and [26.6.2. Complete a Control Transaction to a Connected Device](#) to discover and configure a device.
2. To enable transmit and receive transfers with handshaking enabled, write 1Dh to U1EP0. If the target device is a low-speed device, also set the LSPD (U1EP0[7]) bit. If you want the hardware to automatically retry indefinitely if the target device asserts a NAK on the transfer, clear the Retry Disable bit, RETRYDIS (U1EP0[6]).
3. Set up the BD for the current (even or odd) TX EP0 to transfer up to 64 bytes.
4. Set the USB device address of the target device in the address register (U1ADDR[6:0]).
5. Write an OUT token to the desired endpoint to U1TOK. This triggers the module's transmit state machines to begin transmitting the token and the data.
6. Wait for the Token Processing Complete Interrupt Flag, TRNIF. This indicates that the BD has been released back to the microprocessor and the transfer has completed. If the Retry Disable bit (RETRYDIS) is set, the handshake (ACK, NAK, STALL or ERROR (0Fh)) is returned in the BD PID field. If a STALL interrupt occurs, the pending packet must be dequeued and the error condition in the target device cleared. If a detach interrupt occurs (SE0 for more than 2.5 μ s), then the target has detached (U1IR[0] is set).
7. Once the Token Processing Complete Interrupt Flag occurs (TRNIF is set), the BD can be examined and the next data packet queued by returning to Step 2.

Note: USB speed, transceiver and pull-ups should only be configured during the module setup phase. It is not recommended to change these settings while the module is enabled.

26.6.4 OTG Operation

26.6.4.1 Session Request Protocol (SRP)

An OTG A-device may decide to power down the V_{BUS} supply when it is not using the USB link through the Session Request Protocol (SRP). SRP can only be initiated at full speed. Software may do this by configuring a GPIO pin to disable an external power transistor, or voltage regulator enable signal, which controls the V_{BUS} supply. When the V_{BUS} supply is powered down, the A-device is said to have ended a USB session.

An OTG A-device or embedded host may repower the V_{BUS} supply at any time (initiate a new session). An OTG B-device may also request that the OTG A-device repower the V_{BUS} supply (initiate a new session). This is accomplished via Session Request Protocol (SRP).

Prior to requesting a new session, the B-device must first check that the previous session has definitely ended. To do this, the B-device must check for two conditions:

- V_{BUS} supply is below the session valid voltage.
- Both D+ and D- have been low for at least 2 ms.

The B-device will be notified of Condition 1 by the SESENDIF (U1OTGIR[2]) interrupt. Software will have to manually check for Condition 2.

Note: When the A-device powers down the V_{BUS} supply, the B-device must disconnect its pull-up resistor from power. If the device is self-powered, it can do this by clearing DPPULUP (U1OTGCON[7]) and DMPULUP (U1OTGCON[6]).

The B-device may aid in achieving Condition 1 by discharging the V_{BUS} supply through a resistor. Software may do this by setting VBUSDIS (U1OTGCON[0]).

After these initial conditions are met, the B-device may begin requesting the new session. The B-device begins by pulsing the D+ data line. Software should do this by setting DPPULUP (U1OTGCON[7]). The data line should be held high for 5 to 10 ms.

The B-device then proceeds by pulsing the V_{BUS} supply. Software should do this by setting PUVBUS (U1CNFG2[4]). When an A-device detects SRP signaling (either via the ATTACHIF (U1IR[6]) interrupt or via the SESVDIF (U1OTGIR[3]) interrupt), the A-device must restore the V_{BUS} supply by properly configuring the general purpose I/O port pin controlling the external power source.

The B-device should not monitor the state of the V_{BUS} supply while performing V_{BUS} supply pulsing. When the B-device does detect that the V_{BUS} supply has been restored (via the SESVDIF (U1OTGIR[3]) interrupt), the B-device must reconnect to the USB link by pulling up D+ or D- (via the DPPULUP or DMPULUP bit).

The A-device must complete the SRP by driving USB Reset signaling.

26.6.4.2 Host Negotiation Protocol (HNP)

In USB OTG applications, a Dual Role Device (DRD) is a device that is capable of being either a host or a peripheral. Any OTG DRD must support Host Negotiation Protocol (HNP).

HNP allows an OTG B-device to temporarily become the USB host. The A-device must first enable the B-device to follow HNP. Refer to the *“On-The-Go Supplement”* to the *“USB 2.0 Specification”* for more information regarding HNP. HNP may only be initiated at full speed.

After being enabled for HNP by the A-device, the B-device requests being the host any time that the USB link is in the suspend state, by simply indicating a disconnect. This can be done in software by clearing DPPULUP and DMPULUP. When the A-device detects the disconnect condition (via the URSTIF (U1IR[0]) interrupt), the A-device may allow the B-device to take over as host. The A-device does this by signaling connect as a full-speed function. Software may accomplish this by setting DPPULUP.

If the A-device responds instead with resume signaling, the A-device remains as host. When the B-device detects the connect condition (via ATTACHIF, U1IR[6]), the B-device becomes host. The B-device drives Reset signaling prior to using the bus.

When the B-device has finished in its role as host, it stops all bus activity and turns on its D+ pull-up resistor by setting DPPULUP. When the A-device detects a suspend condition (Idle for 3 ms), the A-device turns off its D+ pull-up. The A-device may also power down the V_{BUS} supply to end the session. When the A-device detects the connect condition (via ATTACHIF), the A-device resumes host operation and drives Reset signaling.

26.6.5 USB OTG Module Registers

The USB OTG module registers can be divided into four general categories:

- USB OTG Module Control
- USB Interrupt
- USB Endpoint Management
- USB V_{BUS} Power Control

This total does not include the (up to) 128 BD registers in the BDT. Their prototypes, described in [26.3.1. BDnSTAT](#) and [26.3.2. BDnSTAT](#), are shown separately in [26.2. USB Buffer Descriptors and the BDT](#).

All USB OTG registers are implemented in the Least Significant Byte (LSB) of the register. Bits in the upper byte are unimplemented and have no function. Note that some registers are instantiated only in Host mode, while other registers have different bit instantiations and functions in Device and Host modes.

The registers described in the following sections are those that have bits with specific control and configuration features. The following registers are used for data or address values only:

- U1BDTP1, U1BDTP2 and U1BDTP3: Specify the 256-word page in data RAM used for the BDT; 8-bit value with bit 0 fixed as '0' for boundary alignment.
- U1FRML and U1FRMH: Contain the 11-bit byte counter for the current data frame.

26.7 USB Interrupt Registers

26.7.1 USB OTG Interrupt Status Register (Host Mode Only)

Name: U1OTGIR⁽²⁾

Offset: 0x600

Notes:

1. V_{BUS} threshold crossings may either be rising or falling.
2. Individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared.

Legend: HS = Hardware Settable bit; K = Write '1' to Clear bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|--------|----------|----------|--------|--------|----------|---|----------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IDIF | T1MSECIF | LSTATEIF | ACTVIF | SESVDF | SESENDIF | | VBUSVDIF |
| Access | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | | HS/R/K |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | | 0 |

Bit 7 – IDIF ID State Change Indicator bit

| Value | Description |
|-------|--------------------------------|
| 1 | Change in ID state is detected |
| 0 | No ID state change is detected |

Bit 6 – T1MSECIF 1 Millisecond Timer bit

| Value | Description |
|-------|---|
| 1 | The 1 millisecond timer has expired |
| 0 | The 1 millisecond timer has not expired |

Bit 5 – LSTATEIF Line State Stable Indicator bit

| Value | Description |
|-------|---|
| 1 | USB line state (as defined by the SE0 and JSTATE bits) has been stable for 1 ms, but different from the last time |
| 0 | USB line state has not been stable for 1 ms |

Bit 4 – ACTVIF Bus Activity Indicator bit

| Value | Description |
|-------|---|
| 1 | Activity on the D+/D- lines or V_{BUS} is detected |
| 0 | No activity on the D+/D- lines or V_{BUS} is detected |

Bit 3 – SESVDIF Session Valid Change Indicator bit

| Value | Description |
|-------|---|
| 1 | V_{BUS} has crossed $V_{A_SESS_END}$ (as defined in the "USB 2.0 Specification") ⁽¹⁾ |
| 0 | V_{BUS} has not crossed $V_{A_SESS_END}$ |

Bit 2 – SESENDIF B-Device V_{BUS} Change Indicator bit

| Value | Description |
|-------|---|
| 1 | V_{BUS} change on B-device is detected; V_{BUS} has crossed $V_{B_SESS_END}$ (as defined in the "USB 2.0 Specification") ⁽¹⁾ |
| 0 | V_{BUS} has not crossed $V_{B_SESS_END}$ |

Bit 0 – VBUSVDIF A-Device V_{BUS} Change Indicator bit

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

| Value | Description |
|-------|---|
| 1 | V_{BUS} change on A-device is detected; V_{BUS} has crossed $V_{A_VBUS_V_{LD}}$ (as defined in the “ <i>USB 2.0 Specification</i> ”)(1) |
| 0 | No V_{BUS} change on A-device is detected |

26.7.2 USB OTG Interrupt Enable Register (Host Mode Only)

Name: U1OTGIE

Offset: 0x602

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|------|----------|----------|--------|---------|----------|---|----------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IDIE | T1MSECIE | LSTATEIE | ACTVIE | SESVDIE | SESENDIE | | VBUSVDIE |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | | 0 |

Bit 7 – IDIE ID Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 6 – T1MSECIE 1 Millisecond Timer Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 5 – LSTATEIE Line State Stable Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 4 – ACTVIE Bus Activity Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 3 – SESVDIE Session Valid Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 2 – SESENDIE B-Device Session End Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 0 – VBUSVDIE A-Device V_{BUS} Valid Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

26.7.3 USB Interrupt Status Register (Device Mode Only)

Name: U1IR⁽¹⁾

Offset: 0x60A

Note:

- Individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared.

Legend: HS = Hardware Settable bit; K = Write '1' to Clear bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---------|---|----------|--------|--------|--------|--------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | STALLIF | | RESUMEIF | IDLEIF | TRNIF | SOFIF | UERRIF | URSTIF |
| Access | HS/R/K | | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – STALLIF STALL Handshake Interrupt bit

| Value | Description |
|-------|---|
| 1 | A STALL handshake was sent by the peripheral during the handshake phase of the transaction in Device mode |
| 0 | A STALL handshake has not been sent |

Bit 5 – RESUMEIF Resume Interrupt bit

| Value | Description |
|-------|---|
| 1 | A K-state is observed on the D+ or D- pin for 2.5 μ s (differential '1' for low speed, differential '0' for full speed) |
| 0 | No K-state is observed |

Bit 4 – IDLEIF Idle Detect Interrupt bit

| Value | Description |
|-------|--|
| 1 | Idle condition is detected (constant Idle state of 3 ms or more) |
| 0 | No Idle condition is detected |

Bit 3 – TRNIF Token Processing Complete Interrupt bit

| Value | Description |
|-------|---|
| 1 | Processing of the current token is complete; read the U1STAT register for endpoint information |
| 0 | Processing of the current token is not complete; clear the U1STAT register or load the next token from STAT (clearing this bit causes the STAT FIFO to advance) |

Bit 2 – SOFIF Start-of-Frame Token Interrupt bit

| Value | Description |
|-------|---|
| 1 | A Start-of-Frame token is received by the peripheral or the Start-of-Frame threshold is reached by the host |
| 0 | No Start-of-Frame token is received or threshold reached |

Bit 1 – UERRIF USB Error Condition Interrupt bit

| Value | Description |
|-------|--|
| 1 | An unmasked error condition has occurred; only error states enabled in the U1EIE register can set this bit |
| 0 | No unmasked error condition has occurred |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

Bit 0 – URSTIF USB Reset Interrupt bit

| Value | Description |
|-------|--|
| 1 | Valid USB Reset has occurred for at least 2.5 μ s; Reset state must be cleared before this bit can be reasserted |
| 0 | No USB Reset has occurred; individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared. |

26.7.4 USB Interrupt Status Register (Host Mode Only)

Name: U1IR⁽¹⁾

Offset: 0x60A

Note:

- Individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared.

Legend: HS = Hardware Settable bit; K = Write '1' to Clear bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---------|----------|----------|--------|--------|--------|--------|----------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | STALLIF | ATTACHIF | RESUMEIF | IDLEIF | TRNIF | SOFIF | UERRIF | DETACHIF |
| Access | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – STALLIF STALL Handshake Interrupt bit

| Value | Description |
|-------|---|
| 1 | A STALL handshake was sent by the peripheral during the handshake phase of the transaction in Device mode |
| 0 | A STALL handshake has not been sent |

Bit 6 – ATTACHIF Peripheral Attach Interrupt bit

| Value | Description |
|-------|---|
| 1 | A peripheral attachment has been detected by the module; it is set if the bus state is not SE0 and there has been no bus activity for 2.5 μ s |
| 0 | No peripheral attachment has been detected |

Bit 5 – RESUMEIF Resume Interrupt bit

| Value | Description |
|-------|---|
| 1 | A K-state is observed on the D+ or D- pin for 2.5 μ s (differential '1' for low speed, differential '0' for full speed) |
| 0 | No K-state is observed |

Bit 4 – IDLEIF Idle Detect Interrupt bit

| Value | Description |
|-------|--|
| 1 | Idle condition is detected (constant Idle state of 3 ms or more) |
| 0 | No Idle condition is detected |

Bit 3 – TRNIF Token Processing Complete Interrupt bit

| Value | Description |
|-------|---|
| 1 | Processing of the current token is complete; read the U1STAT register for endpoint information |
| 0 | Processing of the current token is not complete; clear the U1STAT register or load the next token from STAT (clearing this bit causes the STAT FIFO to advance) |

Bit 2 – SOFIF Start-of-Frame Token Interrupt bit

| Value | Description |
|-------|---|
| 1 | A Start-of-Frame token is received by the peripheral or the Start-of-Frame threshold is reached by the host |
| 0 | No Start-of-Frame token is received or threshold reached |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

Bit 1 – UERRIF USB Error Condition Interrupt bit

| Value | Description |
|-------|--|
| 1 | An unmasked error condition has occurred; only error states enabled in the U1EIE register can set this bit |
| 0 | No unmasked error condition has occurred |

Bit 0 – DETACHIF Detach Interrupt bit

| Value | Description |
|-------|---|
| 1 | A peripheral detachment has been detected by the module; Reset state must be cleared before this bit can be reasserted |
| 0 | No peripheral detachment is detected. Individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared. |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.7.5 USB Interrupt Enable Register (All USB Modes)

Name: U1IE
Offset: 0x60C

Note:

1. This bit is unimplemented in Device mode, read as '0'.

| | | | | | | | | |
|--------|---------|----------|----------|--------|-------|-------|--------|--------------------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | STALLIE | ATTACHIE | RESUMEIE | IDLEIE | TRNIE | SOFIE | UERRIE | URSTIE or DETACHIE |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – STALLIE STALL Handshake Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 6 – ATTACHIE Peripheral Attach Interrupt bit (Host mode only)⁽¹⁾

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 5 – RESUMEIE Resume Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 4 – IDLEIE Idle Detect Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 3 – TRNIE Token Processing Complete Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 2 – SOFIE Start-of-Frame Token Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 1 – UERRIE USB Error Condition Interrupt bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 0 – URSTIE or DETACHIE USB Reset Interrupt (Device mode) or USB Detach Interrupt (Host mode) Enable bit

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

26.7.6 USB Error Interrupt Status Register

Name: U1EIR⁽¹⁾

Offset: 0x60E

Note:

- Individual bits can only be cleared by writing a '1' to the bit position as part of a word write operation on the entire register. Using Boolean instructions or bitwise operations to write to a single bit position will cause all set bits, at the moment of the write, to become cleared.

Legend: K = Write '1' to Clear bit; HS = Hardware Settable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|--------|---|--------|--------|--------|---------|-----------------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BTSEF | | DMAEF | BTOEF | DFN8EF | CRC16EF | CRC5EF or EOFEE | PIDEF |
| Access | HS/R/K | | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K | HS/R/K |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – BTSEF Bit Stuff Error Flag bit

| Value | Description |
|-------|--------------------------------------|
| 1 | Bit stuff error has been detected |
| 0 | No bit stuff error has been detected |

Bit 5 – DMAEF DMA Error Flag bit

| Value | Description |
|-------|--|
| 1 | A USB DMA error condition is detected; the data size indicated by the BD byte count field is less than the number of received bytes, the received data are truncated |
| 0 | No DMA error |

Bit 4 – BTOEF Bus Turnaround Time-out Error Flag bit

| Value | Description |
|-------|---|
| 1 | Bus turnaround time-out has occurred |
| 0 | No bus turnaround time-out has occurred |

Bit 3 – DFN8EF Data Field Size Error Flag bit

| Value | Description |
|-------|--|
| 1 | Data field was not an integral number of bytes |
| 0 | Data field was an integral number of bytes |

Bit 2 – CRC16EF CRC16 Failure Flag bit

| Value | Description |
|-------|--------------|
| 1 | CRC16 failed |
| 0 | CRC16 passed |

Bit 1 – CRC5EF or EOFEE CRC5 Host Error Flag bit (For Device Mode Only)

| Value | Description |
|-------|--|
| 1 | Token packet is rejected due to CRC5 error |
| 0 | Token packet is accepted (no CRC5 error) |

Bit 1 – EOFEF End-of-Frame (EOF) Error Flag bit (For Host Mode Only)

| Value | Description |
|-------|---------------------------------|
| 1 | End-of-Frame error has occurred |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

| Value | Description |
|-------|------------------------------------|
| 0 | End-of-Frame interrupt is disabled |

Bit 0 – PIDEF PID Check Failure Flag bit

| Value | Description |
|-------|------------------|
| 1 | PID check failed |
| 0 | PID check passed |

26.7.7 USB Error Interrupt Enable Register

Name: U1EIE

Offset: 0x610

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|-------|---|-------|-------|--------|---------|-----------------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BTSEE | | DMAEE | BTOEE | DFN8EE | CRC16EE | CRC5EE or EOFEE | PIDEE |
| Access | R/W | | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – BTSEE Bit Stuff Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 5 – DMAEE DMA Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 4 – BTOEE Bus Turnaround Time-out Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 3 – DFN8EE Data Field Size Error Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 2 – CRC16EE CRC16 Failure Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 1 – CRC5EE or EOFEE CRC5 Host Error Interrupt Enable bit (**For Device Mode Only**)

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 1 – EOFEE End-of-Frame (EOF) Error interrupt Enable bit (**For Host Mode Only**)

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

Bit 0 – PIDEE PID Check Failure Interrupt Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | Interrupt is enabled |
| 0 | Interrupt is disabled |

26.8 USB OTG Registers

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.1 USB OTG Status Register (Host Mode Only)

Name: U1OTGSTAT

Offset: 0x604

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|-------|---|--------|---|-------|--------|---|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ID | | LSTATE | | SESVD | SESEND | | VBUSVD |
| Access | HSC/R | | HSC/R | | HSC/R | HSC/R | | HSC/R |
| Reset | 0 | | 0 | | 0 | 0 | | 0 |

Bit 7 – ID ID Pin State Indicator bit

| Value | Description |
|-------|--|
| 1 | No plug is attached or a Type B cable has been plugged into the USB receptacle |
| 0 | A Type A plug has been plugged into the USB receptacle |

Bit 5 – LSTATE Line State Stable Indicator bit

| Value | Description |
|-------|---|
| 1 | The USB line state (as defined by SE0 and JSTATE) has been stable for the previous 1 ms |
| 0 | The USB line state has not been stable for the previous 1 ms |

Bit 3 – SESVD Session Valid Indicator bit

| Value | Description |
|-------|--|
| 1 | The V_{BUS} voltage is above $V_{A_SESS_VLD}$ (as defined in the “USB 2.0 Specification”) on the A or B-device |
| 0 | The V_{BUS} voltage is below $V_{A_SESS_VLD}$ on the A or B-device |

Bit 2 – SESEND B Session End Indicator bit

| Value | Description |
|-------|---|
| 1 | The V_{BUS} voltage is below $V_{B_SESS_END}$ (as defined in the “USB 2.0 Specification”) on the B-device |
| 0 | The V_{BUS} voltage is above $V_{B_SESS_END}$ on the B-device |

Bit 0 – VBUSVD A V_{BUS} Valid Indicator bit

| Value | Description |
|-------|---|
| 1 | The V_{BUS} voltage is above $V_{A_VBUS_VLD}$ (as defined in the “USB 2.0 Specification”) on the A-device |
| 0 | The V_{BUS} voltage is below $V_{A_VBUS_VLD}$ on the A-device |

26.8.2 USB On-The-Go Control Register

Name: U1OTGCON

Offset: 0x606

Note:

- These bits are only used in Host mode; do not use in Device mode.

Legend: r = Reserved bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---------|---------|----------|----------|----------|-------|----------|---------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DPPULUP | DMPULUP | DPPULDWN | DMPULDWN | Reserved | OTGEN | Reserved | VBUSDIS |
| Access | R/W | R/W | R/W | R/W | r | R/W | r | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – DPPULUP D+ Pull-up Enable bit

| Value | Description |
|-------|---|
| 1 | D+ data line pull-up resistor is enabled |
| 0 | D+ data line pull-up resistor is disabled |

Bit 6 – DMPULUP D- Pull-up Enable bit

| Value | Description |
|-------|---|
| 1 | D- data line pull-up resistor is enabled |
| 0 | D- data line pull-up resistor is disabled |

Bit 5 – DPPULDWN D+ Pull-Down Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | D+ data line pull-down resistor is enabled |
| 0 | D+ data line pull-down resistor is disabled |

Bit 4 – DMPULDWN D- Pull-Down Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | D- data line pull-down resistor is enabled |
| 0 | D- data line pull-down resistor is disabled |

Bit 3 – Reserved Maintain as '0'

Bit 2 – OTGEN OTG Features Enable bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | USB OTG is enabled; all D+/D- pull-up and pull-down bits are enabled |
| 0 | USB OTG is disabled; D+/D- pull-up and pull-down bits are controlled in hardware by the settings of the HOSTEN and USBEN (U1CON[3:0]) bits |

Bit 1 – Reserved Maintain as '0'

Bit 0 – VBUSDIS V_{BUS} Discharge Enable bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | V _{BUS} line is discharged through a resistor |
| 0 | V _{BUS} line is not discharged |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.3 USB Power Control Register

Name: U1PWRC

Offset: 0x608

Note:

- Do not clear this bit unless the HOSTEN, USBEN and OTGEN bits (U1CON[3,0] and U1OTGCON[2]) are all cleared.

Legend: HC = Hardware Clearable bit; HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---------|---|---|---------|---|---|---------|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | UACTPND | | | USLPGRD | | | USUSPND | USBPWR |
| Access | HSC/R | | | R/W | | | HC/R/W | R/W |
| Reset | x | | | 0 | | | 0 | 0 |

Bit 7 – UACTPND USB Activity Pending bit

| Value | Description |
|-------|---|
| 1 | Module should not be suspended at the moment (requires the USLPGRD bit to be set) |
| 0 | Module may be suspended or powered down |

Bit 4 – USLPGRD USB Sleep/Suspend Guard bit

| Value | Description |
|-------|--|
| 1 | Indicates to the USB module that it is about to be suspended or powered down |
| 0 | No suspend |

Bit 1 – USUSPND USB Suspend Mode Enable bit

| Value | Description |
|-------|--|
| 1 | USB OTG module is in Suspend mode; USB clock is gated and the transceiver is placed in a low-power state |
| 0 | Normal USB OTG operation |

Bit 0 – USBPWR USB Operation Enable bit

| Value | Description |
|-------|---|
| 1 | USB OTG module is enabled |
| 0 | USB OTG module is disabled ⁽¹⁾ |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.4 USB Status Register

Name: U1STAT
Offset: 0x612

Note:

1. This bit is only valid for endpoints with available even and odd BD registers.

Legend: HSC = Hardware Settable/Clearable bit

| | | | | | | | | |
|--------|------------|-------|-------|-------|-------|-------|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | ENDPT[3:0] | | | | DIR | PPBI | | |
| Access | HSC/R | HSC/R | HSC/R | HSC/R | HSC/R | HSC/R | | |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | | |

Bits 7:4 – ENDPT[3:0] USB Activity Pending bits

Number of the last endpoint activity bits.

(Represents the number of the BDT updated by the last USB transfer.)

| Value | Description |
|-------|-------------|
| 1111 | Endpoint 15 |
| 1110 | Endpoint 14 |
| ... | |
| 0001 | Endpoint 1 |
| 0000 | Endpoint 0 |

Bit 3 – DIR Last BD Direction Indicator bit

| Value | Description |
|-------|---|
| 1 | The last transaction was a transmit transfer (TX) |
| 0 | The last transaction was a receive transfer (RX) |

Bit 2 – PPBI Ping-Pong BD Pointer Indicator bit⁽¹⁾

| Value | Description |
|-------|--|
| 1 | The last transaction was to the odd BD bank |
| 0 | The last transaction was to the even BD bank |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.5 USB Control Register (Device Mode)

Name: U1CON

Offset: 0x614

Legend: HSC = Hardware Settable/Clearable bit; x = Bit is unknown

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|-------|--------|---|--------|--------|--------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | | SE0 | PKTDIS | | HOSTEN | RESUME | PPBRST | USBEN |
| Reset | | HSC/R | R/W | | R/W | R/W | R/W | R/W |
| | | x | 0 | | 0 | 0 | 0 | 0 |

Bit 6 – SE0 Live Single-Ended Zero Flag bit

| Value | Description |
|-------|--|
| 1 | Single-ended zero is active on the USB bus |
| 0 | No single-ended zero is detected |

Bit 5 – PKTDIS Packet Transfer Disable bit

| Value | Description |
|-------|--|
| 1 | SIE token and packet processing are disabled; automatically set when a SETUP token is received |
| 0 | SIE token and packet processing are enabled |

Bit 3 – HOSTEN Host Mode Enable bit

| Value | Description |
|-------|---|
| 1 | USB host capability is enabled; pull-downs on D+ and D- are activated in hardware |
| 0 | USB host capability is disabled |

Bit 2 – RESUME Resume Signaling Enable bit

| Value | Description |
|-------|-------------------------------|
| 1 | Resume signaling is activated |
| 0 | Resume signaling is disabled |

Bit 1 – PPBRST Ping-Pong Buffers Reset bit

| Value | Description |
|-------|---|
| 1 | Resets all Ping-Pong Buffer Pointers to the even BD banks |
| 0 | Ping-Pong Buffer Pointers are not reset |

Bit 0 – USBEN USB Module Enable bit

| Value | Description |
|-------|--|
| 1 | USB module and supporting circuitry are enabled (device attached); D+ pull-up is activated in hardware |
| 0 | USB module and supporting circuitry are disabled (device detached) |

26.8.6 USB Control Register (Host Mode Only)

Name: U1CON

Offset: 0x614

Legend: HSC = Hardware Settable/Clearable bit; x = Bit is unknown

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|-------|-------|-----|-----|-----|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| Access | HSC/R | HSC/R | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | x | x | 0 | 0 | 0 | 0 | 0 | 0 |

Bit 7 – JSTATE Live Differential Receiver J-State Flag bit

| Value | Description |
|-------|--|
| 1 | J-state (differential '0' in low speed, differential '1' in full speed) is detected on the USB |
| 0 | No J-state is detected |

Bit 6 – SE0 Live Single-Ended Zero Flag bit

| Value | Description |
|-------|--|
| 1 | Single-ended zero is active on the USB bus |
| 0 | No single-ended zero is detected |

Bit 5 – TOKBUSY Token Busy Status bit

| Value | Description |
|-------|--|
| 1 | Token is being executed by the USB module in On-The-Go state |
| 0 | No token is being executed |

Bit 4 – USBRST USB Module Reset bit

| Value | Description |
|-------|---|
| 1 | USB Reset has been generated for a software Reset; application must set this bit for 50 ms, then clear it |
| 0 | USB Reset is terminated |

Bit 3 – HOSTEN Host Mode Enable bit

| Value | Description |
|-------|---|
| 1 | USB host capability is enabled; pull-downs on D+ and D- are activated in hardware |
| 0 | USB host capability is disabled |

Bit 2 – RESUME Resume Signaling Enable bit

| Value | Description |
|-------|--|
| 1 | Resume signaling is activated; software must set bit for 10 ms and then clear to enable remote wake-up |
| 0 | Resume signaling is disabled |

Bit 1 – PPBRST Ping-Pong Buffers Reset bit

| Value | Description |
|-------|---|
| 1 | Resets all Ping-Pong Buffer Pointers to the even BD banks |
| 0 | Ping-Pong Buffer Pointers are not reset |

Bit 0 – SOFEN Start-of-Frame Enable bit

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

| Value | Description |
|-------|---|
| 1 | Start-of-Frame token is sent every one 1 ms |
| 0 | Start-of-Frame token is disabled |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.7 USB Address Register

Name: U1ADDR

Offset: 0x616

Note:

1. Host mode only. In Device mode, this bit is unimplemented and read as '0'.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|--------|-----|-----|-----|--------------|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LSPDEN | | | | DEVADDR[6:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |


Bit 7 – LSPDEN Low-Speed Enable Indicator bit⁽¹⁾

| Value | Description |
|-------|-----------------------------------|
| 1 | USB module operates at low speed |
| 0 | USB module operates at full speed |

Bits 6:0 – DEVADDR[6:0] USB Device Address bits

26.8.8 BDT Address Low Bits Register

Name: U1BDTP1
Offset: 0x618

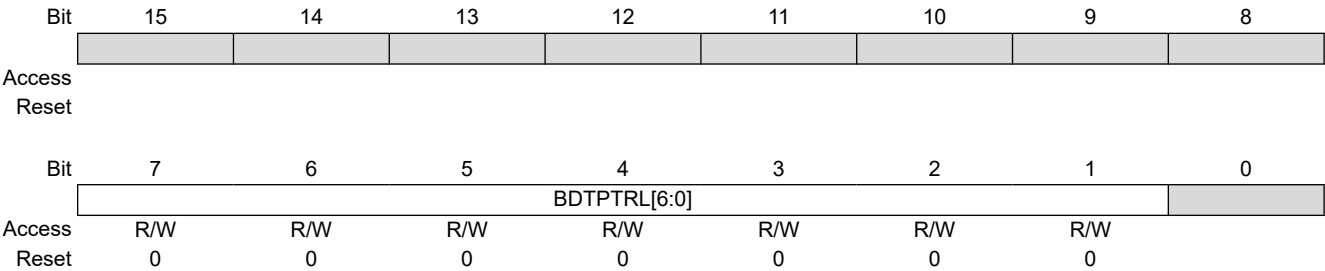

Bits 7:1 – BDTPTRL[6:0] BDT Address Low bits

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.9 Current Data Frame Counter Register Low

Name: U1FRML


Offset: 0x61A

| | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – FRM[7:0] Data Frame Counter bits

26.8.10 Current Data Frame Counter Register High

Name: U1FRMH
Offset: 0x61C

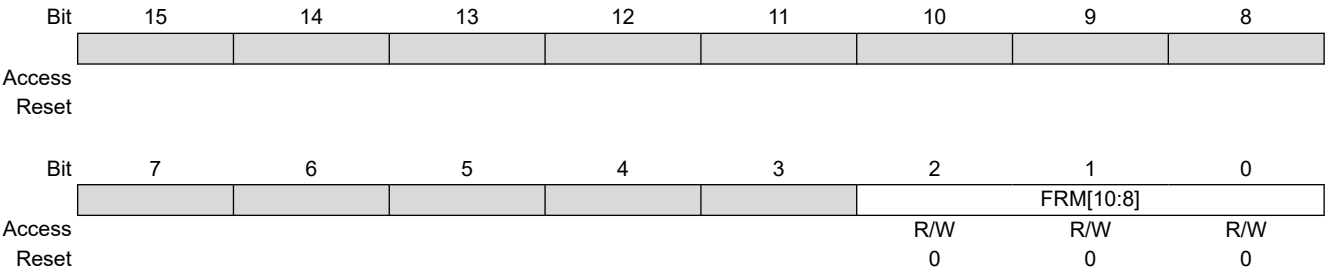

Bits 2:0 – FRM[10:8] Data Frame Counter bits

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.11 USB Token Register (Host Mode Only)

Name: U1TOK

Offset: 0x61E

Note:

1. All other combinations are reserved and are not to be used.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|----------|-----|-----|-----|---------|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | PID[3:0] | | | | EP[3:0] | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:4 – PID[3:0] Token Type Identifier bits

| Value | Description |
|-------|--|
| 1101 | SETUP (TX) token type transaction ⁽¹⁾ |
| 1001 | IN (RX) token type transaction ⁽¹⁾ |
| 0001 | OUT (TX) token type transaction ⁽¹⁾ |

Bits 3:0 – EP[3:0] Token Command Endpoint Address bits

This value must specify a valid endpoint on the attached device.

26.8.12 USB OTG Start of Token Threshold Register (Host Mode Only)

Name: U1SOF

Offset: 0x620

| | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| | | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – CNT[7:0] Start-of-Frame Size bits

Value represents 10 + (packet size of n bytes). For example:

| Value | Description |
|----------|----------------|
| 01001010 | 64-byte packet |
| 00101010 | 32-byte packet |
| 00010010 | 8-byte packet |

26.8.13 BDT Address High Bits Register

Name: U1BDTP2
Offset: 0x622

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BDTPTRH[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – BDTPTRH[7:0] BDT Address High bits

26.8.14 BDT Address Upper Bits Register

Name: U1BDTP3
Offset: 0x624

| | | | | | | | | |
|--------|--------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BDTPTRU[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 7:0 – BDTPTRU[7:0] BDT Address Upper bits

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.15 USB Configuration Register 1

Name: U1CNFG1

Offset: 0x626

Note:

1. This bit is only active when the UTRDIS bit (U1CNFG2[0]) is set.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|-------|--------|---|---------|---|---|----------|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | UTEYE | UOEMON | | USBSIDL | | | PPB[1:0] | |
| Access | R/W | R/W | | R/W | | | R/W | R/W |
| Reset | 0 | 0 | | 0 | | | 0 | 0 |

Bit 7 – UTEYE USB Eye Pattern Test Enable bit

| Value | Description |
|-------|------------------------------|
| 1 | Eye pattern test is enabled |
| 0 | Eye pattern test is disabled |

Bit 6 – UOEMON USB \overline{OE} Monitor Enable bit⁽¹⁾

| Value | Description |
|-------|---|
| 1 | \overline{OE} signal is active; it indicates intervals during which the D+/D- lines are driving |
| 0 | \overline{OE} signal is inactive |

Bit 4 – USBSIDL USB OTG Stop in Idle Mode bit

| Value | Description |
|-------|--|
| 1 | Discontinues module operation when the device enters Idle mode |
| 0 | Continues module operation in Idle mode |

Bits 1:0 – PPB[1:0] Ping-Pong Buffers Configuration bits

| Value | Description |
|-------|--|
| 11 | Even/Odd Ping-Pong Buffers are enabled for Endpoints 1 to 15 |
| 10 | Even/Odd Ping-Pong Buffers are enabled for all endpoints |
| 01 | Even/Odd Ping-Pong Buffers are enabled for RX Endpoint 0 |
| 00 | Even/Odd Ping-Pong Buffers are disabled |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.8.16 USB Configuration Register 2

Name: U1CNFG2

Offset: 0x628

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|--------|----------|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | PUVBUS | EXTI2CEN | | | |
| Access | | | | R/W | R/W | | | |
| Reset | | | | 0 | 0 | | | |

Bit 4 – PUVBUS V_{BUS} Pull-up Enable bit

| Value | Description |
|-------|--------------------------------------|
| 1 | Pull-up on V_{BUS} pin is enabled |
| 0 | Pull-up on V_{BUS} pin is disabled |

Bit 3 – EXTI2CEN I²C Interface for External Module Control Enable bit

| Value | Description |
|-------|---|
| 1 | External module(s) is controlled via the I ² C interface |
| 0 | External module(s) is controlled via the dedicated pins |

26.9 USB Endpoint Management Registers

26.9.1 USB Endpoint 0 Control Register

Name: U1EP0

Offset: 0x62A

Note:

- These bits are available only for U1EP0 and only in Host mode. For all other U1EPn registers, these bits are always unimplemented and read as '0'.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|------|----------|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | LSPD | RETRYDIS | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | R/W | R/W | | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | | 0 | 0 | 0 | 0 | 0 |

Bit 7 – LSPD Low-Speed Direct Connection Enable bit (U1EP0 only)⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Direct connection to a low-speed device is enabled |
| 0 | Direct connection to a low-speed device is disabled |

Bit 6 – RETRYDIS Retry Disable bit (U1EP0 only)⁽¹⁾

| Value | Description |
|-------|---|
| 1 | Retry NAK transactions are disabled |
| 0 | Retry NAK transactions are enabled; retry is done in hardware |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit

For All Other Combinations of EPTXEN and EPRXEN:

This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.2 USB Endpoint 1 Control Register

Name: U1EP1
Offset: 0x62C

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
For All Other Combinations of EPTXEN and EPRXEN:
This bit is ignored.
If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.3 USB Endpoint 2 Control Register

Name: U1EP2

Offset: 0x62E

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.
 If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.4 USB Endpoint 3 Control Register

Name: U1EP3

Offset: 0x630

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.5 USB Endpoint 4 Control Register

Name: U1EP4

Offset: 0x632

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.6 USB Endpoint 5 Control Register

Name: U1EP5

Offset: 0x634

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.7 USB Endpoint 6 Control Register

Name: U1EP6

Offset: 0x636

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

26.9.8 USB Endpoint 7 Control Register

Name: U1EP7

Offset: 0x638

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.9 USB Endpoint 8 Control Register

Name: U1EP8

Offset: 0x63A

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.10 USB Endpoint 9 Control Register

Name: U1EP9

Offset: 0x63C

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.
 If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.11 USB Endpoint 10 Control Register

Name: U1EP10

Offset: 0x63E

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.12 USB Endpoint 11 Control Register

Name: U1EP11

Offset: 0x640

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.13 USB Endpoint 12 Control Register

Name: U1EP12

Offset: 0x642

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.14 USB Endpoint 13 Control Register

Name: U1EP13

Offset: 0x644

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.15 USB Endpoint 14 Control Register

Name: U1EP14

Offset: 0x646

| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
|--------|----|----|----|----|----|----|---|---|
| Access | | | | | | | | |
| Reset | | | | | | | | |

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Access | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Reset | | | | R/W | R/W | R/W | R/W | R/W |
| | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
For All Other Combinations of EPTXEN and EPRXEN:
This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

PIC24FJ64GP205/GU205 Family

USB with On-The-Go (USB OTG) Support

26.9.16 USB Endpoint 15 Control Register

Name: U1EP15

Offset: 0x648

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|----------|--------|--------|---------|-------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | EPCONDIS | EPRXEN | EPTXEN | EPSTALL | EPHSK |
| Access | | | | R/W | R/W | R/W | R/W | R/W |
| Reset | | | | 0 | 0 | 0 | 0 | 0 |

Bit 4 – EPCONDIS Bidirectional Endpoint Control bit
 For All Other Combinations of EPTXEN and EPRXEN:
 This bit is ignored.

If EPTXEN and EPRXEN = 1:

| Value | Description |
|-------|--|
| 1 | Disables Endpoint n from control transfers; only TX and RX transfers are allowed |
| 0 | Enables Endpoint n for control (SETUP) transfers; TX and RX transfers are also allowed |

Bit 3 – EPRXEN Endpoint Receive Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | Endpoint n receive is enabled |
| 0 | Endpoint n receive is disabled |

Bit 2 – EPTXEN Endpoint Transmit Enable bit

| Value | Description |
|-------|---------------------------------|
| 1 | Endpoint n transmit is enabled |
| 0 | Endpoint n transmit is disabled |

Bit 1 – EPSTALL Endpoint STALL Status bit

| Value | Description |
|-------|----------------------------|
| 1 | Endpoint n was stalled |
| 0 | Endpoint n was not stalled |

Bit 0 – EPHSK Endpoint Handshake Enable bit

| Value | Description |
|-------|---|
| 1 | Endpoint handshake is enabled |
| 0 | Endpoint handshake is disabled (typically used for isochronous endpoints) |

27. Special Features

Notes: This data sheet summarizes the features of this group of PIC24F devices. It is not intended to be a comprehensive reference source. For more information, refer to the following sections of the “*dsPIC33/PIC24 Family Reference Manual*”, which are available from the Microchip website (www.microchip.com). The information in this data sheet supersedes the information in the FRM.

- “**Watchdog Timer (WDT)**” (www.microchip.com/DS39697)
- “**High-Level Device Integration**” (www.microchip.com/DS39719)
- “**Programming and Diagnostics**” (www.microchip.com/DS39716)

PIC24FJ64GP205/GU205 family devices include several features intended to maximize application flexibility and reliability, and minimize cost through elimination of external components. These are:

- Flexible Configuration
- Watchdog Timer (WDT)
- Code Protection
- JTAG Boundary Scan Interface
- In-Circuit Serial Programming™ (ICSP™)
- In-Circuit Emulation

27.1 Configuration Bits

The Configuration bits are stored in the last page location of implemented program memory. These bits can be set or cleared to select various device configurations. There are two types of Configuration bits: system operation bits and code-protect bits. The system operation bits determine the power-on settings for system-level components, such as the oscillator and the Watchdog Timer. The code-protect bits prevent program memory from being read and written.

27.1.1 Considerations for Configuring PIC24FJ64GP205/GU205 Family Devices

In PIC24FJ64GP205/GU205 family devices, the Configuration bytes are implemented as volatile memory. This means that configuration data must be programmed each time the device is powered up. Configuration data are stored in the three words at the top of the on-chip program memory space, known as the Flash Configuration Words. Their specific locations are shown in [Table 27-1](#). The configuration data are automatically loaded from the Flash Configuration Words to the proper Configuration registers during device Resets.

Note: Configuration data are reloaded on all types of device Resets.

When creating applications for these devices, users should always specifically allocate the location of the Flash Configuration Word for configuration data. This is to make certain that program code is not stored in this address when the code is compiled.

The upper byte of all Flash Configuration Words in program memory should always be ‘0000 0000’. This makes them appear to be NOP instructions in the remote event that their locations are ever executed by accident. Since Configuration bits are not implemented in the corresponding locations, writing ‘0’s to these locations has no effect on device operation.

Table 27-1. Configuration Word Addresses

| Configuration Register | PIC24FJ64GP20X/GU20X | PIC24FJ32GP20X/GU20X |
|------------------------|----------------------|----------------------|
| FSEC | 0x00AF00 | 0x005700 |
| FBSLIM | 0x00AF10 | 0x005710 |
| FSIGN | 0x00AF14 | 0x005714 |
| FOSCSEL | 0x00AF18 | 0x005718 |
| FOSC | 0x00AF1C | 0x00571C |
| FWDT | 0x00AF20 | 0x005720 |

PIC24FJ64GP205/GU205 Family

Special Features

.....continued

| Configuration Register | PIC24FJ64GP20X/GU20X | PIC24FJ32GP20X/GU20X |
|------------------------|----------------------|----------------------|
| FPOR | 0x00AF24 | 0x005724 |
| FICD | 0x00AF28 | 0x005728 |
| FDMTIVT_L | 0x00AF2C | 0x00572C |
| FDMTIVT_H | 0x00AF30 | 0x005730 |
| FDMTCNT_L | 0x00AF34 | 0x005734 |
| FDMTCNT_H | 0x00AF38 | 0x005738 |
| FDMT | 0x00AF3C | 0x00573C |
| FDEVOPT1 | 0x00AF40 | 0x005740 |

27.1.2 FSEC Configuration Register

Name: FSEC

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|---------|----|----|----|------|----------|------|------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | AIVTDIS | | | | | CSS[2:0] | | CWRP |
| Access | R/PO | | | | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | | | | 1 | 1 | 1 | 1 |

| | | | | | | | | |
|--------|----------|------|------|---|------|------|----------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | GSS[1:0] | | GWRP | | BSEN | | BSS[1:0] | BWRP |
| Access | R/PO | R/PO | R/PO | | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | | 1 | 1 | 1 | 1 |

Bit 15 – AIVTDIS Alternate Interrupt Vector Table Disable bit

| Value | Description |
|-------|---|
| 1 | Disables AIVT; INTCON2[8] (AIVTEN) bit is not available |
| 0 | Enables AIVT; INTCON2[8] (AIVTEN) bit is available |

Bits 11:9 – CSS[2:0] Configuration Segment (CS) Code Protection Level bits

| Value | Description |
|-------|---------------------------------|
| 111 | No protection (other than CWRP) |
| 110 | Standard security |
| 10x | Enhanced security |
| 0xx | High security |

Bit 8 – CWRP Configuration Segment Program Write Protection bit

| Value | Description |
|-------|--|
| 1 | Configuration Segment is not write-protected |
| 0 | Configuration Segment is write-protected |

Bits 7:6 – GSS[1:0] General Segment (GS) Code Protection Level bits

| Value | Description |
|-------|---------------------------------|
| 11 | No protection (other than GWRP) |
| 10 | Standard security |
| 0x | High security |

Bit 5 – GWRP General Segment Program Write Protection bit

| Value | Description |
|-------|--|
| 1 | General Segment is not write-protected |
| 0 | General Segment is write-protected |

Bit 3 – BSEN Boot Segment (BS) Control bit

| Value | Description |
|-------|--|
| 1 | No Boot Segment is enabled |
| 0 | Boot Segment size is determined by BSLIM[12:0] |

Bits 2:1 – BSS[1:0] Boot Segment Code Protection Level bits

| Value | Description |
|-------|---------------------------------|
| 11 | No protection (other than BWRP) |
| 10 | Standard security |
| 0x | High security |

Bit 0 – BWRP Boot Segment Program Write Protection bit

PIC24FJ64GP205/GU205 Family

Special Features

| Value | Description |
|-------|---------------------------------|
| 1 | Boot Segment can be written |
| 0 | Boot Segment is write-protected |

27.1.3 FBSLIM Configuration Register

Name: FBSLIM

Note:

1. The BSLIMx bits are a 'write-once' element. If, after the Reset sequence, they are not erased (all '1's), then programming of the FBSLIM bits is prohibited. An attempt to do so will fail to set the WR bit (NVMCON[15]), and consequently, have no effect.

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|-------------|------|------|------|------|------|------|------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | BSLIM[12:8] | | | | | | | |
| Access | | | | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | | | | 1 | 1 | 1 | 1 | 1 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | BSLIM[7:0] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 12:0 – BSLIM[12:0] Active Boot Segment Code Flash Page Address Limit (Inverted) bits⁽¹⁾

This bit field contains the last active Boot Segment Page + 1 (i.e., first page address of GS). The value is stored as an inverted page address, such that programming additional '0's can only increase the size of BS. If BSLIM[12:0] is set to all '1's (unprogrammed default), the active Boot Segment size is zero.

27.1.4 FSIGN Configuration Register

Name: FSIGN

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|------|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | SIGN | | | | | | | |
| Access | R/PO | | | | | | | |
| Reset | 0 | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|---|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

Bit 15 – SIGN Valid Configuration bit
This bit must be maintained as '0'.

27.1.5 FOSCSEL Configuration Register

Name: FOSCSEL

Legend: PO = Program Once bit; r = Reserved bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---------------|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | Reserved[1:0] | |
| Access | | | | | | | r | r |
| Reset | | | | | | | 0 | 0 |

| | | | | | | | | |
|--------|------|--------------|------|------|------|------------|------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | IESO | PLLMODE[3:0] | | | | FNOSC[2:0] | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 9:8 – Reserved[1:0] Maintain as '0'

Bit 7 – IESO Two-Speed Oscillator Start-up Enable bit

| Value | Description |
|-------|---|
| 1 | Starts up the device with FRC, then automatically switches to the user-selected oscillator when ready |
| 0 | Starts up the device with the user-selected oscillator source |

Bits 6:3 – PLLMODE[3:0] Frequency Multiplier Select bits

| Value | Description |
|-------|---|
| 1111 | No PLL is used (PLLEN bit is unavailable) |
| 1110 | 8x PLL is selected |
| 1101 | 6x PLL is selected |
| 1100 | 4x PLL is selected |
| 0111 | 96 MHz PLL is selected (Input Frequency = 48 MHz) |
| 0110 | 96 MHz PLL is selected (Input Frequency = 32 MHz) |
| 0101 | 96 MHz PLL is selected (Input Frequency = 24 MHz) |
| 0100 | 96 MHz PLL is selected (Input Frequency = 20 MHz) |
| 0011 | 96 MHz PLL is selected (Input Frequency = 16 MHz) |
| 0010 | 96 MHz PLL is selected (Input Frequency = 12 MHz) |
| 0001 | 96 MHz PLL is selected (Input Frequency = 8 MHz) |
| 0000 | 96 MHz PLL is selected (Input Frequency = 4 MHz) |

Bits 2:0 – FNOSC[2:0] Oscillator Selection bits

| Value | Description |
|-------|---|
| 111 | Oscillator with Frequency Divider (OSCFDIV) |
| 110 | Reserved |
| 101 | Low-Power RC Oscillator (LPRC) |
| 100 | Secondary Oscillator (SOSC) |
| 011 | Primary Oscillator with PLL (XTPLL, HSPLL, ECPLL) |
| 010 | Primary Oscillator (XT, HS, EC) |
| 001 | Fast RC Oscillator with PLL (FRCPLL) |
| 000 | Fast RC Oscillator (FRC) |

27.1.6 FOSC Configuration Register

Name: FOSC

Legend: PO = Program Once bit

Note:

1. PLLSS is set to PRI by default. If POSC is disabled/not present, PLLSS = PRI is an invalid configuration. PLLSS should be set to FRC in such condition.

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|------------|------|---------|-------|---------|----------|-------------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | FCKSM[1:0] | | IOL1WAY | PLLSS | SOSCSEL | OSCIOFCN | POSCMD[1:0] | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 7:6 – FCKSM[1:0] Clock Switching and Monitor Selection bits

| Value | Description |
|-------|---|
| 1x | Clock switching and the Fail-Safe Clock Monitor are disabled |
| 01 | Clock switching is enabled, Fail-Safe Clock Monitor is disabled |
| 00 | Clock switching and the Fail-Safe Clock Monitor are enabled |

Bit 5 – IOL1WAY Peripheral Pin Select Configuration bit

| Value | Description |
|-------|--|
| 1 | The IOLOCK bit can be set only once (with unlock sequence) |
| 0 | The IOLOCK bit can be set and cleared as needed (with unlock sequence) |

Bit 4 – PLLSS PLL Secondary Selection Configuration bit⁽¹⁾

This Configuration bit only takes effect when the PLL is NOT being used by the system (i.e., not selected as part of the system clock source). Used to generate an independent clock out of REFO.

| Value | Description |
|-------|--|
| 1 | PLL is fed by the Primary Oscillator |
| 0 | PLL is fed by the on-chip Fast RC (FRC) Oscillator |

Bit 3 – SOSCSEL SOSC Selection Configuration bit

| Value | Description |
|-------|--|
| 1 | Crystal (SOSCI/SOSCO) mode |
| 0 | Digital (SCLKI) Externally Supplied Clock mode |

Bit 2 – OSCIOFCN CLKO Enable Configuration bit

| Value | Description |
|-------|--|
| 1 | CLKO output signal is active on the OSCO pin (when the Primary Oscillator is disabled or configured for EC mode) |
| 0 | CLKO output is disabled |

Bits 1:0 – POSCMD[1:0] Primary Oscillator Configuration bits

| Value | Description |
|-------|---|
| 11 | Primary Oscillator mode is disabled |
| 10 | HS Oscillator mode is selected (10 MHz-32 MHz) |
| 01 | XT Oscillator mode is selected (1.5 MHz-10 MHz) |
| 00 | External Clock mode is selected |

27.1.7 FWDT Configuration Register

Name: FWDT

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----|-------------|------|----|--------|----|-------------|------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | WDTCLK[1:0] | | | WDTCMX | | WDTWIN[1:0] | |
| Access | | R/PO | R/PO | | R/PO | | R/PO | R/PO |
| Reset | | 1 | 1 | | 1 | | 1 | 1 |

| | | | | | | | | |
|--------|--------|-------------|------|-------|------------|------|------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | WINDIS | FWDTEN[1:0] | | FWPSA | WDTPS[3:0] | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 14:13 – WDTCLK[1:0] Watchdog Timer Clock Select bits (when WDTCMX = 1)

| Value | Description |
|-------|--|
| 11 | Always uses LPRC |
| 10 | Uses FRC when WINDIS = 0, system clock is not LPRC and device is not in Sleep; otherwise, uses LPRC |
| 01 | Always uses SOSC |
| 00 | Uses peripheral clock when system clock is not LPRC and device is not in Sleep; otherwise, uses LPRC |

Bit 11 – WDTCMX WDT Clock MUX Control bit

| Value | Description |
|-------|---|
| 1 | Enables WDT clock MUX, WDT clock is selected by WDTCLK[1:0] |
| 0 | WDT clock is LPRC |

Bits 9:8 – WDTWIN[1:0] Watchdog Timer Window Width bits

| Value | Description |
|-------|---------------------------------------|
| 11 | WDT window is 25% of the WDT period |
| 10 | WDT window is 37.5% of the WDT period |
| 01 | WDT window is 50% of the WDT period |
| 00 | WDT window is 75% of the WDT period |

Bit 7 – WINDIS Windowed Watchdog Timer Disable bit

| Value | Description |
|-------|--------------------------|
| 1 | Windowed WDT is disabled |
| 0 | Windowed WDT is enabled |

Bits 6:5 – FWDTEN[1:0] Watchdog Timer Enable bits

| Value | Description |
|-------|--|
| 11 | WDT is enabled |
| 10 | WDT is disabled (control is placed on the SWDTEN bit) |
| 01 | WDT is enabled only while device is active and disabled in Sleep; SWDTEN bit is disabled |
| 00 | WDT and SWDTEN are disabled |

Bit 4 – FWPSA Watchdog Timer Prescaler bit

| Value | Description |
|-------|------------------------------|
| 1 | WDT prescaler ratio of 1:128 |
| 0 | WDT prescaler ratio of 1:32 |

Bits 3:0 – WDTPS[3:0] Watchdog Timer Postscale Select bits

PIC24FJ64GP205/GU205 Family

Special Features

| Value | Description |
|-------|-------------|
| 1111 | 1:32,768 |
| 1110 | 1:16,384 |
| 1101 | 1:8,192 |
| 1100 | 1:4,096 |
| 1011 | 1:2,048 |
| 1010 | 1:1,024 |
| 1001 | 1:512 |
| 1000 | 1:256 |
| 0111 | 1:128 |
| 0110 | 1:64 |
| 0101 | 1:32 |
| 0100 | 1:16 |
| 0011 | 1:8 |
| 0010 | 1:4 |
| 0001 | 1:2 |
| 0000 | 1:1 |

27.1.8 FPOR Configuration Register

Name: FPOR

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---------|---------|------------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | LPBOREN | LPREGEN | BOREN[1:0] | |
| Access | | | | | R/PO | R/PO | R/PO | R/PO |
| Reset | | | | | 1 | 1 | 1 | 1 |

Bit 3 – LPBOREN Low-Power Brown-out Reset Enable bit

| Value | Description |
|-------|---|
| 1 | Low-power BOR is enabled and active when main BOR is inactive |
| 0 | Low-power BOR is disabled |

Bit 2 – LPREGEN Low-Voltage Regulator Control bit

| Value | Description |
|-------|---|
| 1 | Low-voltage and low-power regulator are not available |
| 0 | Low-voltage and low-power regulator are available and controlled by the RETEN bit during Sleep mode |

Bits 1:0 – BOREN[1:0] Brown-out Reset Enable bits

| Value | Description |
|-------|---|
| 11 | Brown-out Reset is enabled in hardware; SBOREN bit is disabled |
| 10 | Brown-out Reset is enabled only while device is active and is disabled in Sleep; SBOREN bit is disabled |
| 01 | Brown-out Reset is controlled with the SBOREN bit setting |
| 00 | Brown-out Reset is disabled in hardware; SBOREN bit is disabled |

27.1.9 FICD Configuration Register

Name: FICD

Legend: PO = Program Once bit; r = Reserved bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|----------|---|--------|---|---|---|----------|------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | Reserved | | JTAGEN | | | | ICS[1:0] | |
| Access | r | | R/PO | | | | R/PO | R/PO |
| Reset | 1 | | 1 | | | | 1 | 1 |

Bit 7 – Reserved Maintain as ‘1’

Bit 5 – JTAGEN JTAG Port Enable bit

| Value | Description |
|-------|-----------------------|
| 1 | JTAG port is enabled |
| 0 | JTAG port is disabled |

Bits 1:0 – ICS[1:0] ICD Communication Channel Select bits

| Value | Description |
|-------|-----------------------------|
| 11 | Communicates on PGEC1/PGED1 |
| 10 | Communicates on PGEC2/PGED2 |
| 01 | Communicates on PGEC3/PGED3 |
| 00 | Reserved; do not use |

PIC24FJ64GP205/GU205 Family

Special Features

27.1.10 FDMTIVTL Configuration Register

Name: FDMTIVTL

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|---------------|------|------|------|------|------|------|------|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMTIVTL[15:8] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DMTIVTL[7:0] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 15:0 – DMTIVTL[15:0] DMT Window Interval Lower 16 bits

27.1.11 FDMTIVTH Configuration Register

Name: FDMTIVTH

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----------------|------|------|------|------|------|------|------|
| Bit | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMTIVTH[31:24] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DMTIVTH[23:16] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

Bits 15:0 – DMTIVTH[31:16] DMT Window Interval Higher 16 bits

27.1.12 FDMTCNTL Configuration Register

Name: FDMTCNTL

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|---------------|------|------|------|------|------|------|------|
| Bit | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMTCNTL[15:8] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DMTCNTL[7:0] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Bits 15:0 – DMTCNTL[15:0] DMT Instruction Count Time-out Value Lower 16 bits

27.1.13 FDMTCNTH Configuration Register

Name: FDMTCNTH

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----------------|------|------|------|------|------|------|------|
| Bit | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | DMTCNTH[31:24] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DMTCNTH[23:16] | | | | | | | |
| Access | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO | R/PO |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |

Bits 15:0 – DMTCNTH[31:16] DMT Instruction Count Time-out Value Higher 16 bits

27.1.14 FDMT Configuration Register

Name: FDMT

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----|----|----|----|----|----|----|----|
| Bit | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|---|---|---|--------|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | | | DMTDIS |
| Access | | | | | | | | R/PO |
| Reset | | | | | | | | 1 |

Bit 0 – DMTDIS DMT Disable bit

| Value | Description |
|-------|-----------------|
| 1 | DMT is disabled |
| 0 | DMT is enabled |

27.1.15 FDEVOPT1 Configuration Register

Name: FDEVOPT1

Note:

1. SMBus mode is enabled by the SMEN bit (I2CxCONL[8]).

Legend: PO = Program Once bit

| | | | | | | | | |
|--------|----|----|---------|--------|--------|---------|---------|----|
| Bit | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | SMB3EN | | |
| Access | | | | | | R/PO | | |
| Reset | | | | | | 1 | | |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | ALTCMP2 | ALT2C1 | SOSCHP | TMPRPIN | ALTCMP1 | |
| Access | | | R/PO | R/PO | R/PO | R/PO | R/PO | |
| Reset | | | 1 | 1 | 1 | 1 | 1 | |

Bit 10 – SMB3EN SMBus 3.0 Levels Enable bit⁽¹⁾

| Value | Description |
|-------|---------------------------|
| 1 | SMBus 3.0 input levels |
| 0 | Normal SMBus input levels |

Bit 5 – ALTCMP2 Alternate Comparator Input Enable bit 2

| Value | Description |
|-------|--------------------------------------|
| 1 | C2INC and C2IND are on RA4 and RB4 |
| 0 | AC2INC and AC2IND are on RB9 and RA3 |

Bit 4 – ALT2C1 Alternate I2C1 bit

| Value | Description |
|-------|------------------------------------|
| 1 | SDA1 and SCL1 are on RB8 and RB9 |
| 0 | ASDA1 and ASCL1 are on RB5 and RB6 |

Bit 3 – SOSCHP SOSC High-Power Enable bit (valid only when SOSCSEL = 1)

| Value | Description |
|-------|--|
| 1 | SOSC High-Power mode is enabled |
| 0 | SOSC Low-Power mode is enabled (see 9.7.3. Low-Power Operation for more information) |

Bit 2 – TMPRPIN Tamper Pin Enable bit

| Value | Description |
|-------|--------------------------------|
| 1 | TMPRN pin function is disabled |
| 0 | TMPRN pin function is enabled |

Bit 1 – ALTCMP1 Alternate Comparator Input Enable bit 1

| Value | Description |
|-------|-------------------------------------|
| 1 | C1INC and C3INC are on RB13 and RA0 |
| 0 | AC1INC and AC3INC are on RB9 |

27.2 Device Identification

The PIC24FJ64GP205/GU205 devices have two Identification registers near the end of configuration memory space that store the Device ID (DEVID) and Device Revision (DEVREV). These registers are used to determine the variant and manufacturing information about the device. These registers are read-only and are shown in [27.2.2. DEVID](#) and [27.2.1. DEVREV](#).

27.2.1 Device Revision Register

Name: DEVREV

| | | | | | | | | |
|--------|----|----|----|----|----|----|---|---|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | | | | | | | | |
| Access | | | | | | | | |
| Reset | | | | | | | | |

| | | | | | | | | |
|--------|---|---|---|---|-------------|-----|-----|-----|
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | DEVREV[3:0] | | | |
| Access | | | | | R/W | R/W | R/W | R/W |
| Reset | | | | | 0 | 0 | 0 | 0 |

Bits 3:0 – DEVREV[3:0] Device Revision bits

27.2.2 DEVID Device ID Register

Name: DEVID

Note:

1. See [27.2.3. Device IDs](#) for the list of Device Identifier bits.

| | | | | | | | | |
|--------|------------|-----|-----|-----|-----|-----|-----|-----|
| Bit | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| | FAMID[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | DEV[7:0] | | | | | | | |
| Access | R/W | R/W | R/W | R/W | R/W | R/W | R/W | R/W |
| Reset | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Bits 15:8 – FAMID[7:0] Device Family Identifier bits
(23h = PIC24FJ64GU205 family)

Bits 7:0 – DEV[7:0] Individual Device Identifier bits⁽¹⁾

27.2.3 Device IDs

Table 27-2. Device IDs

| Device | DEVID | Device | DEVID |
|----------------|-------|----------------|-------|
| PIC24FJ64GP205 | 9A18 | PIC24FJ64GU205 | 9A19 |
| PIC24FJ32GP205 | 9A08 | PIC24FJ32GU205 | 9A09 |
| PIC24FJ64GP203 | 9A14 | PIC24FJ64GU203 | 9A15 |
| PIC24FJ32GP203 | 9A04 | PIC24FJ32GU203 | 9A05 |
| PIC24FJ64GP202 | 9A10 | PIC24FJ64GU202 | 9A11 |
| PIC24FJ32GP202 | 9A00 | PIC24FJ32GU202 | 9A01 |

27.3 Unique Device Identifier (UDID)

All PIC24FJ64GP205/GU205 family devices are individually encoded during final manufacturing with a Unique Device Identifier or UDID. The UDID cannot be erased by a bulk erase command or any other user-accessible means. This feature allows for manufacturing traceability of Microchip Technology devices in applications where this is a requirement. It may also be used by the application manufacturer for any number of things that may require unique identification, such as:

- Tracking the device
- Unique serial number
- Unique security key

The UDID comprises five 24-bit program words. When taken together, these fields form a unique 120-bit identifier.

The UDID is stored in five read-only locations, located between 0x801600 and 0x801608 in the device Configuration space. [Table 27-3](#) lists the addresses of the Identifier Words and shows their contents.

Table 27-3. UDID Addresses

| UDID | Address | Description |
|-------|-----------|-------------|
| UDID1 | 0x80 1600 | UDID Word 1 |
| UDID2 | 0x80 1602 | UDID Word 2 |
| UDID3 | 0x80 1604 | UDID Word 3 |
| UDID4 | 0x80 1606 | UDID Word 4 |
| UDID5 | 0x80 1608 | UDID Word 5 |


27.4 On-Chip Voltage Regulator

All PIC24FJ64GP205/GU205 family devices power their core digital logic at a nominal 1.8V. This may create an issue for designs that are required to operate at a higher typical voltage, such as 3.3V. To simplify system design, all devices in the PIC24FJ64GP205/GU205 family incorporate an on-chip regulator that allows the device to run its core logic from V_{DD} .

This regulator is always enabled. It provides a constant voltage (1.8V nominal) to the digital core logic, from a V_{DD} of 2.0V, all the way up to the device's V_{DDMAX} . It does not have the capability to boost V_{DD} levels. In order to prevent “brown-out” conditions when the voltage drops too low for the regulator, the Brown-out Reset occurs. Then, the regulator output follows V_{DD} with a typical voltage drop of 200 mV.

A low-ESR capacitor (such as ceramic) must be connected to the V_{CAP} pin (Figure 27-1). This helps to maintain the stability of the regulator. The recommended value for the Filter Capacitor (C_{EFC}) is provided in 30. [Electrical Characteristics](#).

Figure 27-1. Connections for the On-Chip Regulator

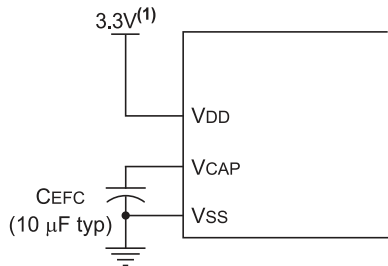

Note:

1. This is a typical operating voltage. Refer to 30. [Electrical Characteristics](#) for the full operating ranges of V_{DD} .

27.4.1 On-Chip Regulator and POR

The voltage regulator takes approximately 10 μ s for it to generate output. During this time, designated as T_{VREG} , code execution is disabled. T_{VREG} is applied every time the device resumes operation after any power-down, including Sleep mode. T_{VREG} is determined by the status of the VREGS bit (RCON[8]) and the WDTWIN[1:0] Configuration bits (FWDWT[9:8]).

27.4.2 Voltage Regulator Standby Mode

The on-chip regulator always consumes a small incremental amount of current over I_{DD}/I_{PD} , including when the device is in Sleep mode, even though the core digital logic does not require power. To provide additional savings in applications where power resources are critical, the regulator can be made to enter Standby mode, on its own, whenever the device goes into Sleep mode. This feature is controlled by the VREGS bit (RCON[8]). Clearing the VREGS bit enables the Standby mode. When waking up from Standby mode, the regulator needs to wait for T_{VREG} to expire before wake-up.

27.4.3 Low-Voltage Regulator

When in Sleep mode, PIC24FJ64GP205/GU205 family devices may use a separate low-power, low-voltage regulator to power critical circuits. This regulator, which operates from 0.9V to 1.2V, maintains power to data RAM and the RTCC while all other core digital logic is powered down. The low-voltage regulator is described in more detail in [10.2.4. Low-Voltage Regulator Mode and Band Gap Power](#).

27.5 Watchdog Timer (WDT)

For PIC24FJ64GP205/GU205 family devices, the WDT is driven by the LPRC Oscillator, the Secondary Oscillator (SOSC) or the system timer. When the device is in Sleep mode, the LPRC Oscillator will be used. When the WDT is enabled, the clock source is also enabled.

The nominal WDT clock source from LPRC is 32 kHz. This feeds a prescaler that can be configured for either 5-bit (divide-by-32) or 7-bit (divide-by-128) operation. The prescaler is set by the FWPSA Configuration bit. With a 32 kHz input, the prescaler yields a nominal WDT Time-out (T_{WDT}) period of 1 ms in 5-bit mode or 4 ms in 7-bit mode.

A variable postscaler divides down the WDT prescaler output and allows for a wide range of time-out periods. The postscaler is controlled by the WDTPS[3:0] Configuration bits (FWDT[3:0]), which allows the selection of a total of 16 settings, from 1:1 to 1:32,768. Using the prescaler and postscaler time-out periods, ranges from 1 ms to 131 seconds can be achieved.

The WDT, prescaler and postscaler are reset:

- On any device Reset
- On the completion of a clock switch, whether invoked by software (i.e., setting the OSWEN bit after changing the NOSCx bits) or by hardware (i.e., Fail-Safe Clock Monitor)
- When a `PWRSV` instruction is executed (i.e., Sleep or Idle mode is entered)
- When the device exits Sleep or Idle mode to resume normal operation
- By a `CLRWDT` instruction during normal execution

If the WDT is enabled, it will continue to run during Sleep or Idle modes. When the WDT time-out occurs, the device will wake-up and code execution will continue from where the `PWRSV` instruction was executed. The corresponding SLEEP or IDLE (RCON[3:2]) bits will need to be cleared in software after the device wakes up.

The WDT Flag bit, WDTO (RCON[4]), is not automatically cleared following a WDT time-out. To detect subsequent WDT events, the flag must be cleared in software.

Note: The `CLRWDT` and `PWRSV` instructions clear the prescaler and postscaler counts when executed.

27.5.1 Windowed Operation

The Watchdog Timer has an optional Fixed Window mode of operation. In this Windowed mode, `CLRWDT` instructions can only reset the WDT during the last 1/4 of the programmed WDT period. A `CLRWDT` instruction executed before that window causes a WDT Reset, similar to a WDT time-out.


Windowed WDT mode is enabled by programming the WINDIS Configuration bit (FWDT[7]) to '0'.

27.5.2 Control Register

The WDT is enabled or disabled by the FWDTEN[1:0] Configuration bits (FWDT[6:5]). When the Configuration bits, FWDTEN[1:0] = 11, the WDT is always enabled.

The WDT can be optionally controlled in software when the Configuration bits, FWDTEN[1:0] = 10. When FWDTEN[1:0] = 00, the Watchdog Timer is always disabled. The WDT is enabled in software by setting the SWDTEN control bit (RCON[5]). The SWDTEN control bit is cleared on any device Reset. The software WDT option allows the user to enable the WDT for critical code segments and disable the WDT during non-critical code segments for maximum power savings.

Figure 27-2. WDT Block Diagram

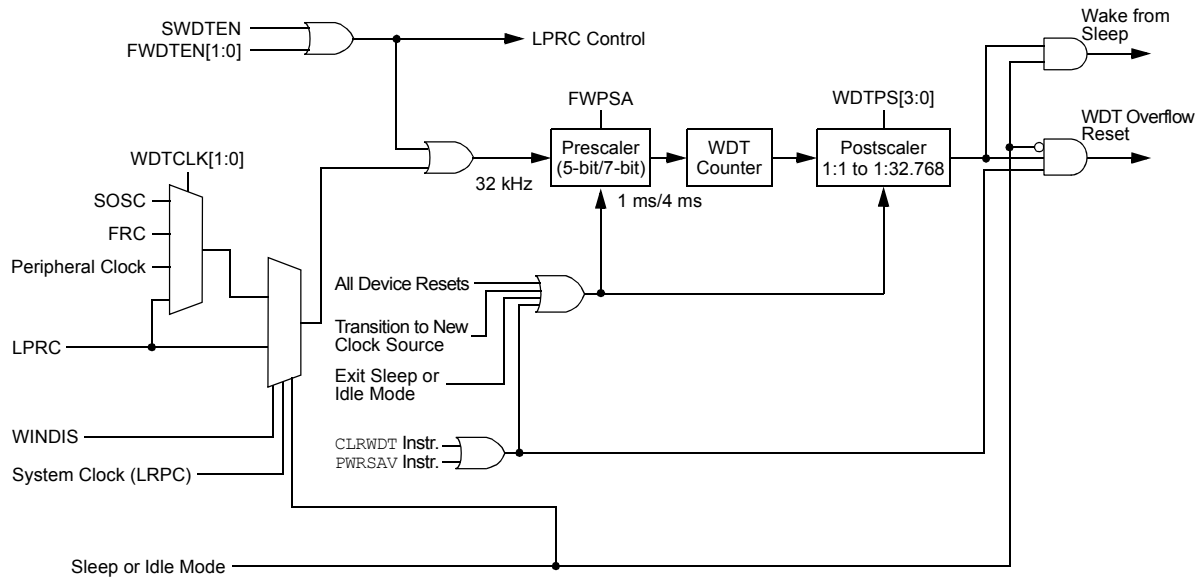

27.6 Program Verification and Code Protection

PIC24FJ64GP205/GU205 family devices offer basic implementation of CodeGuard™ Security that supports General Segment (GS) security and Boot Segment (BS) security. This feature helps protect individual intellectual property.

Note: For more information on usage, configuration and operation, refer to “CodeGuard™ Intermediate Security” (www.microchip.com/DS70005182) in the “dsPIC33/PIC24 Family Reference Manual”.

27.7 JTAG Interface

PIC24FJ64GP205/GU205 family devices implement a JTAG interface, which supports boundary scan device testing.

27.8 In-Circuit Serial Programming™ (ICSP)™

PIC24FJ64GP205/GU205 family microcontrollers can be serially programmed while in the end application circuit. This is simply done with two lines for clock (PGECx) and data (PGEDx), and three other lines for power (V_{DD}), ground (V_{SS}) and MCLR. This allows customers to manufacture boards with unprogrammed devices and then program the microcontroller just before shipping the product. This also allows the most recent firmware or a custom firmware to be programmed.

27.9 Customer OTP Memory

PIC24FJ64GP205/GU205 family devices provide 256 bytes of One-Time-Programmable (OTP) memory, located at addresses, 801700h through 8017FEh. This memory can be used for persistent storage of application-specific information that will not be erased by reprogramming the device. This includes many types of information, such as (but not limited to):

- Application checksums
- Code revision information
- Product information
- Serial numbers
- System manufacturing dates
- Manufacturing lot numbers

Customer OTP memory may be programmed in any mode, including user RTSP mode, but it cannot be erased. Data are not cleared by a chip erase.

Note: Do not write the OTP memory more than once. Writing to the OTP memory more than once may result in an ECC Double-Bit Error (ECCDBE).

27.10 In-Circuit Debugger

This function allows simple debugging functions when used with MPLAB® IDE. Debugging functionality is controlled through the PGECx (Emulation/Debug Clock) and PGEDx (Emulation/Debug Data) pins.

To use the in-circuit debugger function of the device, the design must implement ICSP connections to $\overline{\text{MCLR}}$, V_{DD} , V_{SS} and the PGECx/PGEDx pin pair, designated by the ICS[1:0] Configuration bits. In addition, when the feature is enabled, some of the resources are not available for general use. These resources include the first 80 bytes of data RAM and two I/O pins.

28. Development Support

Move a design from concept to production in record time with Microchip's award-winning development tools. Microchip tools work together to provide state of the art debugging for any project with easy-to-use Graphical User Interfaces (GUIs) in our free MPLAB® X and Atmel Studio Integrated Development Environments (IDEs), and our code generation tools. Providing the ultimate ease-of-use experience, Microchip's line of programmers, debuggers and emulators work seamlessly with our software tools. Microchip development boards help evaluate the best silicon device for an application, while our line of third party tools round out our comprehensive development tool solutions.

Microchip's MPLAB X and Atmel Studio ecosystems provide a variety of embedded design tools to consider, which support multiple devices, such as PIC® MCUs, AVR® MCUs, SAM MCUs and dsPIC® DSCs. MPLAB X tools are compatible with Windows®, Linux® and Mac® operating systems while Atmel Studio tools are compatible with Windows.

Go to the following website for more information and details:

<https://www.microchip.com/development-tools/>

29. Instruction Set Summary

Note: This chapter is a brief summary of the PIC24F Instruction Set Architecture (ISA) and is not intended to be a comprehensive reference source.

The PIC24F instruction set adds many enhancements to the previous PIC[®] MCU instruction sets, while maintaining an easy migration from previous PIC MCU instruction sets. Most instructions are a single program memory word. Only three instructions require two program memory locations.

Each single-word instruction is a 24-bit word divided into an 8-bit opcode, which specifies the instruction type and one or more operands, which further specify the operation of the instruction. The instruction set is highly orthogonal and is grouped into four basic categories:

- Word or byte-oriented operations
- Bit-oriented operations
- Literal operations
- Control operations

Table 29-1 shows the general symbols used in describing the instructions. The PIC24F instruction set summary in Table 29-2 lists all the instructions, along with the status flags affected by each instruction.

Most word or byte-oriented W register instructions (including barrel shift instructions) have three operands:

- The first source operand, which is typically a register, 'Wb', without any address modifier
- The second source operand, which is typically a register, 'Ws', with or without an address modifier
- The destination of the result, which is typically a register, 'Wd', with or without an address modifier

However, word or byte-oriented file register instructions have two operands:

- The file register specified by the value, 'f'
- The destination, which could either be the file register, 'f', or the W0 register, which is denoted as 'WREG'

Most bit-oriented instructions (including simple rotate/shift instructions) have two operands:

- The W register (with or without an address modifier) or file register (specified by the value of 'Ws' or 'f')
- The bit in the W register or file register (specified by a literal value or indirectly by the contents of register, 'Wb')

The literal instructions that involve data movement may use some of the following operands:

- A literal value to be loaded into a W register or file register (specified by the value of 'k')
- The W register or file register where the literal value is to be loaded (specified by 'Wb' or 'f')

However, literal instructions that involve arithmetic or logical operations use some of the following operands:

- The first source operand, which is a register, 'Wb', without any address modifier
- The second source operand, which is a literal value
- The destination of the result (only if not the same as the first source operand), which is typically a register, 'Wd', with or without an address modifier

The control instructions may use some of the following operands:

- A program memory address
- The mode of the Table Read and Table Write instructions

All instructions are a single word, except for certain double-word instructions, which were made double-word instructions so that all the required information is available in these 48 bits. In the second word, the eight MSBs are '0's. If this second word is executed as an instruction (by itself), it will execute as a NOP.

Most single-word instructions are executed in a single instruction cycle, unless a conditional test is true or the Program Counter is changed as a result of the instruction. In these cases, the execution takes two instruction cycles, with the additional instruction cycle(s) executed as a NOP. Notable exceptions are the BRA (unconditional/computed branch), indirect CALL/GOTO, all Table Reads and Table Writes, and RETURN/RETFIE instructions, which are single-word instructions but take two or three cycles.

Certain instructions that involve skipping over the subsequent instruction require either two or three cycles if the skip is performed, depending on whether the instruction being skipped is a single-word or two-word instruction. Moreover, double-word moves require two cycles. The double-word instructions execute in two instruction cycles.

Table 29-1. Symbols Used In Opcode Descriptions

| Field | Description |
|-----------------|---|
| #text | Means literal defined by “text” |
| (text) | Means “content of text” |
| [text] | Means “the location addressed by text” |
| { } | Optional field or operation |
| [n:m] | Register bit field |
| .b | Byte mode selection |
| .d | Double-Word mode selection |
| .S | Shadow register select |
| .w | Word mode selection (default) |
| bit4 | 4-bit Bit Selection field (used in word-addressed instructions) $\in \{0...15\}$ |
| C, DC, N, OV, Z | MCU Status bits: Carry, Digit Carry, Negative, Overflow, Sticky Zero |
| Expr | Absolute address, label or expression (resolved by the linker) |
| f | File register address $\in \{0000h...1FFFh\}$ |
| lit1 | 1-bit unsigned literal $\in \{0,1\}$ |
| lit4 | 4-bit unsigned literal $\in \{0...15\}$ |
| lit5 | 5-bit unsigned literal $\in \{0...31\}$ |
| lit8 | 8-bit unsigned literal $\in \{0...255\}$ |
| lit10 | 10-bit unsigned literal $\in \{0...255\}$ for Byte mode, $\{0...1023\}$ for Word mode |
| lit14 | 14-bit unsigned literal $\in \{0...16383\}$ |
| lit16 | 16-bit unsigned literal $\in \{0...65535\}$ |
| lit23 | 23-bit unsigned literal $\in \{0...8388607\}$; LSb must be ‘0’ |
| None | Field does not require an entry, may be blank |
| PC | Program Counter |
| Slit10 | 10-bit signed literal $\in \{-512...511\}$ |
| Slit16 | 16-bit signed literal $\in \{-32768...32767\}$ |
| Slit6 | 6-bit signed literal $\in \{-16...16\}$ |
| Wb | Base W register $\in \{W0..W15\}$ |
| Wd | Destination W register $\in \{Wd, [Wd], [Wd++] , [Wd--], [++Wd], [--Wd] \}$ |
| Wdo | Destination W register $\in \{Wnd, [Wnd], [Wnd++] , [Wnd--], [++Wnd], [--Wnd], [Wnd+Wb] \}$ |
| Wm,Wn | Dividend, Divisor Working register pair (direct addressing) |
| Wn | One of 16 Working registers $\in \{W0..W15\}$ |

|continued | |
|----------------|--|
| Field | Description |
| Wnd | One of 16 destination Working registers $\in \{W0..W15\}$ |
| Wns | One of 16 source Working registers $\in \{W0..W15\}$ |
| WREG | W0 (Working register used in file register instructions) |
| Ws | Source W register $\in \{Ws, [Ws], [Ws++] , [Ws--], [++Ws], [--Ws] \}$ |
| Wso | Source W register $\in \{Wns, [Wns], [Wns++] , [Wns--], [++Wns], [--Wns], [Wns+Wb] \}$ |

Table 29-2. Instruction Set Overview

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|----------------|---|------------|-------------|-----------------------|
| ADD | ADD | f | $f = f + \text{WREG}$ | 1 | 1 | C, DC, N, OV, Z |
| | ADD | f, WREG | $\text{WREG} = f + \text{WREG}$ | 1 | 1 | C, DC, N, OV, Z |
| | ADD | #lit10, Wn | $\text{Wd} = \text{lit10} + \text{Wd}$ | 1 | 1 | C, DC, N, OV, Z |
| | ADD | Wb, Ws, Wd | $\text{Wd} = \text{Wb} + \text{Ws}$ | 1 | 1 | C, DC, N, OV, Z |
| | ADD | Wb, #lit5, Wd | $\text{Wd} = \text{Wb} + \text{lit5}$ | 1 | 1 | C, DC, N, OV, Z |
| ADDC | ADDC | f | $f = f + \text{WREG} + (C)$ | 1 | 1 | C, DC, N, OV, Z |
| | ADDC | f, WREG | $\text{WREG} = f + \text{WREG} + (C)$ | 1 | 1 | C, DC, N, OV, Z |
| | ADDC | #lit10, Wn | $\text{Wd} = \text{lit10} + \text{Wd} + (C)$ | 1 | 1 | C, DC, N, OV, Z |
| | ADDC | Wb, Ws, Wd | $\text{Wd} = \text{Wb} + \text{Ws} + (C)$ | 1 | 1 | C, DC, N, OV, Z |
| | ADDC | Wb, #lit5, Wd | $\text{Wd} = \text{Wb} + \text{lit5} + (C)$ | 1 | 1 | C, DC, N, OV, Z |
| AND | AND | f | $f = f .\text{AND.} \text{WREG}$ | 1 | 1 | N, Z |
| | AND | f, WREG | $\text{WREG} = f .\text{AND.} \text{WREG}$ | 1 | 1 | N, Z |
| | AND | #lit10, Wn | $\text{Wd} = \text{lit10} .\text{AND.} \text{Wd}$ | 1 | 1 | N, Z |
| | AND | Wb, Ws, Wd | $\text{Wd} = \text{Wb} .\text{AND.} \text{Ws}$ | 1 | 1 | N, Z |
| | AND | Wb, #lit5, Wd | $\text{Wd} = \text{Wb} .\text{AND.} \text{lit5}$ | 1 | 1 | N, Z |
| ASR | ASR | f | $f = \text{Arithmetic Right Shift } f$ | 1 | 1 | C, N, OV, Z |
| | ASR | f, WREG | $\text{WREG} = \text{Arithmetic Right Shift } f$ | 1 | 1 | C, N, OV, Z |
| | ASR | Ws, Wd | $\text{Wd} = \text{Arithmetic Right Shift } \text{Ws}$ | 1 | 1 | C, N, OV, Z |
| | ASR | Wb, Wns, Wnd | $\text{Wnd} = \text{Arithmetic Right Shift } \text{Wb} \text{ by } \text{Wns}$ | 1 | 1 | N, Z |
| | ASR | Wb, #lit5, Wnd | $\text{Wnd} = \text{Arithmetic Right Shift } \text{Wb} \text{ by } \text{lit5}$ | 1 | 1 | N, Z |
| BCLR | BCLR | f, #bit4 | Bit Clear f | 1 | 1 | None |
| | BCLR | Ws, #bit4 | Bit Clear Ws | 1 | 1 | None |

PIC24FJ64GP205/GU205 Family

Instruction Set Summary

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|-----------|--|------------|---------------|-----------------------|
| BRA | BRA | C, Expr | Branch if Carry | 1 | 1 (2) | None |
| | BRA | GE, Expr | Branch if Greater Than or Equal | 1 | 1 (2) | None |
| | BRA | GEU, Expr | Branch if Unsigned Greater Than or Equal | 1 | 1 (2) | None |
| | BRA | GT, Expr | Branch if Greater Than | 1 | 1 (2) | None |
| | BRA | GTU, Expr | Branch if Unsigned Greater Than | 1 | 1 (2) | None |
| | BRA | LE, Expr | Branch if Less Than or Equal | 1 | 1 (2) | None |
| | BRA | LEU, Expr | Branch if Unsigned Less Than or Equal | 1 | 1 (2) | None |
| | BRA | LT, Expr | Branch if Less Than | 1 | 1 (2) | None |
| | BRA | LTU, Expr | Branch if Unsigned Less Than | 1 | 1 (2) | None |
| | BRA | N, Expr | Branch if Negative | 1 | 1 (2) | None |
| | BRA | NC, Expr | Branch if Not Carry | 1 | 1 (2) | None |
| | BRA | NN, Expr | Branch if Not Negative | 1 | 1 (2) | None |
| | BRA | NOV, Expr | Branch if Not Overflow | 1 | 1 (2) | None |
| | BRA | NZ, Expr | Branch if Not Zero | 1 | 1 (2) | None |
| | BRA | OV, Expr | Branch if Overflow | 1 | 1 (2) | None |
| | BRA | Expr | Branch Unconditionally | 1 | 2 | None |
| | BRA | Z, Expr | Branch if Zero | 1 | 1 (2) | None |
| | BRA | Wn | Computed Branch | 1 | 2 | None |
| BSET | BSET | f, #bit4 | Bit Set f | 1 | 1 | None |
| | BSET | Ws, #bit4 | Bit Set Ws | 1 | 1 | None |
| BSW | BSW.C | Ws, Wb | Write C bit to Ws[Wb] | 1 | 1 | None |
| | BSW.Z | Ws, Wb | Write Z bit to Ws[Wb] | 1 | 1 | None |
| BTG | BTG | f, #bit4 | Bit Toggle f | 1 | 1 | None |
| | BTG | Ws, #bit4 | Bit Toggle Ws | 1 | 1 | None |
| BTSC | BTSC | f, #bit4 | Bit Test f, Skip if Clear | 1 | 1 (2 or 3) | None |
| | BTSC | Ws, #bit4 | Bit Test Ws, Skip if Clear | 1 | 1 (2 or 3) | None |
| BTSS | BTSS | f, #bit4 | Bit Test f, Skip if Set | 1 | 1 (2 or 3) | None |
| | BTSS | Ws, #bit4 | Bit Test Ws, Skip if Set | 1 | 1 (2 or 3) | None |

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|-----------|--|------------|---------------|-----------------------|
| BTST | BTST | f, #bit4 | Bit Test f | 1 | 1 | Z |
| | BTST.C | Ws, #bit4 | Bit Test Ws to C | 1 | 1 | C |
| | BTST.Z | Ws, #bit4 | Bit Test Ws to Z | 1 | 1 | Z |
| | BTST.C | Ws, Wb | Bit Test Ws[Wb] to C | 1 | 1 | C |
| | BTST.Z | Ws, Wb | Bit Test Ws[Wb] to Z | 1 | 1 | Z |
| BTSTS | BTSTS | f, #bit4 | Bit Test, then Set f | 1 | 1 | Z |
| | BTSTS.C | Ws, #bit4 | Bit Test Ws to C, then Set | 1 | 1 | C |
| | BTSTS.Z | Ws, #bit4 | Bit Test Ws to Z, then Set | 1 | 1 | Z |
| CALL | CALL | lit23 | Call Subroutine | 2 | 2 | None |
| | CALL | Wn | Call Indirect Subroutine | 1 | 2 | None |
| CLR | CLR | f | f = 0x0000 | 1 | 1 | None |
| | CLR | WREG | WREG = 0x0000 | 1 | 1 | None |
| | CLR | Ws | Ws = 0x0000 | 1 | 1 | None |
| CLRWDT | CLRWDT | | Clear Watchdog Timer | 1 | 1 | WDTO, Sleep |
| COM | COM | f | f = \bar{f} | 1 | 1 | N, Z |
| | COM | f, WREG | WREG = \bar{f} | 1 | 1 | N, Z |
| | COM | Ws, Wd | Wd = \bar{Ws} | 1 | 1 | N, Z |
| CP | CP | f | Compare f with WREG | 1 | 1 | C, DC, N, OV, Z |
| | CP | Wb, #lit5 | Compare Wb with lit5 | 1 | 1 | C, DC, N, OV, Z |
| | CP | Wb, Ws | Compare Wb with Ws (Wb – Ws) | 1 | 1 | C, DC, N, OV, Z |
| CP0 | CP0 | f | Compare f with 0x0000 | 1 | 1 | C, DC, N, OV, Z |
| | CP0 | Ws | Compare Ws with 0x0000 | 1 | 1 | C, DC, N, OV, Z |
| CPB | CPB | f | Compare f with WREG, with Borrow | 1 | 1 | C, DC, N, OV, Z |
| | CPB | Wb, #lit5 | Compare Wb with lit5, with Borrow | 1 | 1 | C, DC, N, OV, Z |
| | CPB | Wb, Ws | Compare Wb with Ws, with Borrow (Wb – Ws – \bar{C}) | 1 | 1 | C, DC, N, OV, Z |
| CPSEQ | CPSEQ | Wb, Wn | Compare Wb with Wn, Skip if = | 1 | 1 (2 or 3) | None |
| CPSGT | CPSGT | Wb, Wn | Compare Wb with Wn, Skip if > | 1 | 1 (2 or 3) | None |
| CPSLT | CPSLT | Wb, Wn | Compare Wb with Wn, Skip if < | 1 | 1 (2 or 3) | None |

PIC24FJ64GP205/GU205 Family

Instruction Set Summary

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|---------------|---|------------|---------------|-----------------------|
| CPSNE | CPSNE | Wb, Wn | Compare Wb with Wn, Skip if \neq | 1 | 1 (2 or 3) | None |
| DAW | DAW.B | Wn | Wn = Decimal Adjust Wn | 1 | 1 | C |
| DEC | DEC | f | $f = f - 1$ | 1 | 1 | C, DC, N, OV, Z |
| | DEC | f, WREG | WREG = $f - 1$ | 1 | 1 | C, DC, N, OV, Z |
| | DEC | Ws, Wd | Wd = $Ws - 1$ | 1 | 1 | C, DC, N, OV, Z |
| DEC2 | DEC2 | f | $f = f - 2$ | 1 | 1 | C, DC, N, OV, Z |
| | DEC2 | f, WREG | WREG = $f - 2$ | 1 | 1 | C, DC, N, OV, Z |
| | DEC2 | Ws, Wd | Wd = $Ws - 2$ | 1 | 1 | C, DC, N, OV, Z |
| DISI | DISI | #lit14 | Disable Interrupts for k Instruction Cycles | 1 | 1 | None |
| DIV | DIV.SW | Wm, Wn | Signed 16/16-bit Integer Divide | 1 | 18 | N, Z, C, OV |
| | DIV.SD | Wm, Wn | Signed 32/16-bit Integer Divide | 1 | 18 | N, Z, C, OV |
| | DIV.UW | Wm, Wn | Unsigned 16/16-bit Integer Divide | 1 | 18 | N, Z, C, OV |
| | DIV.UD | Wm, Wn | Unsigned 32/16-bit Integer Divide | 1 | 18 | N, Z, C, OV |
| EXCH | EXCH | Wns, Wnd | Swap Wns with Wnd | 1 | 1 | None |
| FF1L | FF1L | Ws, Wnd | Find First One from Left (MSb) Side | 1 | 1 | C |
| FF1R | FF1R | Ws, Wnd | Find First One from Right (LSb) Side | 1 | 1 | C |
| GOTO | GOTO | Expr | Go to Address | 2 | 2 | None |
| | GOTO | Wn | Go to Indirect | 1 | 2 | None |
| INC | INC | f | $f = f + 1$ | 1 | 1 | C, DC, N, OV, Z |
| | INC | f, WREG | WREG = $f + 1$ | 1 | 1 | C, DC, N, OV, Z |
| | INC | Ws, Wd | Wd = $Ws + 1$ | 1 | 1 | C, DC, N, OV, Z |
| INC2 | INC2 | f | $f = f + 2$ | 1 | 1 | C, DC, N, OV, Z |
| | INC2 | f, WREG | WREG = $f + 2$ | 1 | 1 | C, DC, N, OV, Z |
| | INC2 | Ws, Wd | Wd = $Ws + 2$ | 1 | 1 | C, DC, N, OV, Z |
| IOR | IOR | f | $f = f . \text{IOR. WREG}$ | 1 | 1 | N, Z |
| | IOR | f, WREG | WREG = $f . \text{IOR. WREG}$ | 1 | 1 | N, Z |
| | IOR | #lit10, Wn | Wd = lit10 .IOR. Wd | 1 | 1 | N, Z |
| | IOR | Wb, Ws, Wd | Wd = Wb .IOR. Ws | 1 | 1 | N, Z |
| | IOR | Wb, #lit5, Wd | Wd = Wb .IOR. lit5 | 1 | 1 | N, Z |

PIC24FJ64GP205/GU205 Family

Instruction Set Summary

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|-------------------|--|------------|-------------|-----------------------|
| LNK | LNK | #lit14 | Link Frame Pointer | 1 | 1 | None |
| LSR | LSR | f | f = Logical Right Shift f | 1 | 1 | C, N, OV, Z |
| | LSR | f, WREG | WREG = Logical Right Shift f | 1 | 1 | C, N, OV, Z |
| | LSR | Ws, Wd | Wd = Logical Right Shift Ws | 1 | 1 | C, N, OV, Z |
| | LSR | Wb, Wns, Wnd | Wnd = Logical Right Shift Wb by Wns | 1 | 1 | N, Z |
| | LSR | Wb, #lit5, Wnd | Wnd = Logical Right Shift Wb by lit5 | 1 | 1 | N, Z |
| MOV | MOV | f, Wn | Move f to Wn | 1 | 1 | None |
| | MOV | [Wns+Slit10], Wnd | Move [Wns + Slit10] to Wnd | 1 | 1 | None |
| | MOV | f | Move f to f | 1 | 1 | N, Z |
| | MOV | f, WREG | Move f to WREG | 1 | 1 | N, Z |
| | MOV | #lit16, Wn | Move 16-Bit Literal to Wn | 1 | 1 | None |
| | MOV.b | #lit8, Wn | Move 8-Bit Literal to Wn | 1 | 1 | None |
| | MOV | Wn, f | Move Wn to f | 1 | 1 | None |
| | MOV | Wns, [Wns+Slit10] | Move Wns to [Wns + Slit10] | 1 | 1 | None |
| | MOV | Wso, Wdo | Move Ws to Wd | 1 | 1 | None |
| | MOV | WREG, f | Move WREG to f | 1 | 1 | N, Z |
| | MOV.D | Wns, Wd | Move Double from W(ns):W(ns + 1) to Wd | 1 | 2 | None |
| | MOV.D | Ws, Wnd | Move Double from Ws to W(nd + 1):W(nd) | 1 | 2 | None |
| | MUL.SS | Wb, Ws, Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Signed(Ws) | 1 | 1 | None |
| MUL | MUL.SU | Wb, Ws, Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | MUL.US | Wb, Ws, Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Signed(Ws) | 1 | 1 | None |
| | MUL.UU | Wb, Ws, Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Unsigned(Ws) | 1 | 1 | None |
| | MUL.SU | Wb, #lit5, Wnd | {Wnd + 1, Wnd} = Signed(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | MUL.UU | Wb, #lit5, Wnd | {Wnd + 1, Wnd} = Unsigned(Wb) * Unsigned(lit5) | 1 | 1 | None |
| | MUL | f | W3:W2 = f * WREG | 1 | 1 | None |

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|------------|--|------------|-------------|-----------------------|
| NEG | NEG | f | $f = \bar{f} + 1$ | 1 | 1 | C, DC, N, OV, Z |
| | NEG | f, WREG | WREG = $\bar{f} + 1$ | 1 | 1 | C, DC, N, OV, Z |
| | NEG | Ws, Wd | $Wd = \overline{Ws} + 1$ | 1 | 1 | C, DC, N, OV, Z |
| NOP | NOP | | No Operation | 1 | 1 | None |
| | NOPR | | No Operation | 1 | 1 | None |
| POP | POP | f | Pop f from Top-of-Stack (TOS) | 1 | 1 | None |
| | POP | Wdo | Pop from Top-of-Stack (TOS) to Wdo | 1 | 1 | None |
| | POP.D | Wnd | Pop from Top-of-Stack (TOS) to W(nd):W(nd + 1) | 1 | 2 | None |
| | POP.S | | Pop Shadow Registers | 1 | 1 | All |
| PUSH | PUSH | f | Push f to Top-of-Stack (TOS) | 1 | 1 | None |
| | PUSH | Wso | Push Wso to Top-of-Stack (TOS) | 1 | 1 | None |
| | PUSH.D | Wns | Push W(ns):W(ns + 1) to Top-of-Stack (TOS) | 1 | 2 | None |
| | PUSH.S | | Push Shadow Registers | 1 | 1 | None |
| PWRSABV | PWRSABV | #lit1 | Go into Sleep or Idle mode | 1 | 1 | WDTO, Sleep |
| RCALL | RCALL | Expr | Relative Call | 1 | 2 | None |
| | RCALL | Wn | Computed Call | 1 | 2 | None |
| REPEAT | REPEAT | #lit14 | Repeat Next Instruction lit14 + 1 times | 1 | 1 | None |
| | REPEAT | Wn | Repeat Next Instruction (Wn) + 1 times | 1 | 1 | None |
| RESET | RESET | | Software Device Reset | 1 | 1 | None |
| RETFIE | RETFIE | | Return from Interrupt | 1 | 3 (2) | None |
| RETLW | RETLW | #lit10, Wn | Return with Literal in Wn | 1 | 3 (2) | None |
| RETURN | RETURN | | Return from Subroutine | 1 | 3 (2) | None |
| RLC | RLC | f | f = Rotate Left through Carry f | 1 | 1 | C, N, Z |
| | RLC | f, WREG | WREG = Rotate Left through Carry f | 1 | 1 | C, N, Z |
| | RLC | Ws, Wd | Wd = Rotate Left through Carry Ws | 1 | 1 | C, N, Z |

PIC24FJ64GP205/GU205 Family

Instruction Set Summary

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|----------------|--------------------------------------|------------|-------------|-----------------------|
| RLNC | RLNC | f | f = Rotate Left (No Carry) f | 1 | 1 | N, Z |
| | RLNC | f, WREG | WREG = Rotate Left (No Carry) f | 1 | 1 | N, Z |
| | RLNC | Ws, Wd | Wd = Rotate Left (No Carry) Ws | 1 | 1 | N, Z |
| RRC | RRC | f | f = Rotate Right through Carry f | 1 | 1 | C, N, Z |
| | RRC | f, WREG | WREG = Rotate Right through Carry f | 1 | 1 | C, N, Z |
| | RRC | Ws, Wd | Wd = Rotate Right through Carry Ws | 1 | 1 | C, N, Z |
| RRNC | RRNC | f | f = Rotate Right (No Carry) f | 1 | 1 | N, Z |
| | RRNC | f, WREG | WREG = Rotate Right (No Carry) f | 1 | 1 | N, Z |
| | RRNC | Ws, Wd | Wd = Rotate Right (No Carry) Ws | 1 | 1 | N, Z |
| SE | SE | Ws, Wnd | Wnd = Sign-Extended Ws | 1 | 1 | C, N, Z |
| SETM | SETM | f | f = FFFFh | 1 | 1 | None |
| | SETM | WREG | WREG = FFFFh | 1 | 1 | None |
| | SETM | Ws | Ws = FFFFh | 1 | 1 | None |
| SL | SL | f | f = Left Shift f | 1 | 1 | C, N, OV, Z |
| | SL | f, WREG | WREG = Left Shift f | 1 | 1 | C, N, OV, Z |
| | SL | Ws, Wd | Wd = Left Shift Ws | 1 | 1 | C, N, OV, Z |
| | SL | Wb, Wns, Wnd | Wnd = Left Shift Wb by Wns | 1 | 1 | N, Z |
| | SL | Wb, #lit5, Wnd | Wnd = Left Shift Wb by lit5 | 1 | 1 | N, Z |
| SUB | SUB | f | f = f – WREG | 1 | 1 | C, DC, N, OV, Z |
| | SUB | f, WREG | WREG = f – WREG | 1 | 1 | C, DC, N, OV, Z |
| | SUB | #lit10, Wn | Wn = Wn – lit10 | 1 | 1 | C, DC, N, OV, Z |
| | SUB | Wb, Ws, Wd | Wd = Wb – Ws | 1 | 1 | C, DC, N, OV, Z |
| | SUB | Wb, #lit5, Wd | Wd = Wb – lit5 | 1 | 1 | C, DC, N, OV, Z |
| SUBB | SUBB | f | f = f – WREG – (\overline{C}) | 1 | 1 | C, DC, N, OV, Z |
| | SUBB | f, WREG | WREG = f – WREG – (\overline{C}) | 1 | 1 | C, DC, N, OV, Z |
| | SUBB | #lit10, Wn | Wn = Wn – lit10 – (\overline{C}) | 1 | 1 | C, DC, N, OV, Z |
| | SUBB | Wb, Ws, Wd | Wd = Wb – Ws – (\overline{C}) | 1 | 1 | C, DC, N, OV, Z |
| | SUBB | Wb, #lit5, Wd | Wd = Wb – lit5 – (\overline{C}) | 1 | 1 | C, DC, N, OV, Z |

PIC24FJ64GP205/GU205 Family

Instruction Set Summary

.....continued

| Assembly Mnemonic | Assembly Syntax | | Description | # of Words | # of Cycles | Status Flags Affected |
|-------------------|-----------------|---------------|------------------------------------|------------|-------------|-----------------------|
| SUBR | SUBR | f | $f = WREG - f$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBR | f, WREG | $WREG = WREG - f$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBR | Wb, Ws, Wd | $Wd = Ws - Wb$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBR | Wb, #lit5, Wd | $Wd = lit5 - Wb$ | 1 | 1 | C, DC, N, OV, Z |
| SUBBR | SUBBR | f | $f = WREG - f - (\overline{C})$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBBR | f, WREG | $WREG = WREG - f - (\overline{C})$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBBR | Wb, Ws, Wd | $Wd = Ws - Wb - (\overline{C})$ | 1 | 1 | C, DC, N, OV, Z |
| | SUBBR | Wb, #lit5, Wd | $Wd = lit5 - Wb - (\overline{C})$ | 1 | 1 | C, DC, N, OV, Z |
| SWAP | SWAP.b | Wn | Wn = Nibble Swap Wn | 1 | 1 | None |
| | SWAP | Wn | Wn = Byte Swap Wn | 1 | 1 | None |
| TBLRDH | TBLRDH | Ws, Wd | Read Prog[23:16] to Wd[7:0] | 1 | 2 | None |
| TBLRDL | TBLRDL | Ws, Wd | Read Prog[15:0] to Wd | 1 | 2 | None |
| TBLWTH | TBLWTH | Ws, Wd | Write Ws[7:0] to Prog[23:16] | 1 | 2 | None |
| TBLWTL | TBLWTL | Ws, Wd | Write Ws to Prog[15:0] | 1 | 2 | None |
| ULNK | ULNK | | Unlink Frame Pointer | 1 | 1 | None |
| XOR | XOR | f | $f = f .XOR. WREG$ | 1 | 1 | N, Z |
| | XOR | f, WREG | $WREG = f .XOR. WREG$ | 1 | 1 | N, Z |
| | XOR | #lit10, Wn | $Wd = lit10 .XOR. Wd$ | 1 | 1 | N, Z |
| | XOR | Wb, Ws, Wd | $Wd = Wb .XOR. Ws$ | 1 | 1 | N, Z |
| | XOR | Wb, #lit5, Wd | $Wd = Wb .XOR. lit5$ | 1 | 1 | N, Z |
| ZE | ZE | Ws, Wnd | Wnd = Zero-Extend Ws | 1 | 1 | C, Z, N |

30. Electrical Characteristics

This section provides an overview of the PIC24FJ64GP205/GU205 family electrical characteristics. Additional information will be provided in future revisions of this document as it becomes available.

Absolute maximum ratings for the PIC24FJ64GP205/GU205 family are listed below. Exposure to these maximum rating conditions for extended periods may affect device reliability. Functional operation of the device at these, or any other conditions above the parameters indicated in the operation listings of this specification, is not implied.

30.1 Absolute Maximum Ratings⁽¹⁾


| Parameter | Rating |
|---|--|
| Ambient temperature under bias | -40°C to +125°C |
| Storage temperature | -65°C to +150°C |
| Voltage on V_{DD} with respect to V_{SS} | -0.3V to +4.0V |
| Voltage on any general purpose digital/analog pin (not 5.5V tolerant) with respect to V_{SS} | -0.3V to ($V_{DD} + 0.3V$) |
| Voltage on any general purpose digital/ analog pin (5.5V tolerant, including \overline{MCLR}) with respect to V_{SS} : | |
| When $V_{DD} = 0V$: | -0.3V to +4.0V |
| When $V_{DD} \geq 2.0V$: | -0.3V to +6.0V |
| Voltage on AV_{DD} with respect to V_{SS} | ($V_{DD} - 0.3V$) to (lesser of: 4.0V or ($V_{DD} + 0.3V$)) |
| Voltage on AV_{SS} with respect to V_{SS} | -0.3V to +0.3V |
| Maximum current out of V_{SS} pin | 300 mA |
| Maximum current into V_{DD} pin ⁽²⁾ | 250 mA |
| Maximum output current sunk by any I/O pin | 25 mA |
| Maximum output current sourced by any I/O pin | 25 mA |
| Maximum current sunk by all ports | 200 mA |
| Maximum current sourced by all ports ⁽²⁾ | 200 mA |

Notes:

- Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those, or any other conditions above those indicated in the operation listings of this specification, is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.
- Maximum allowable current is a function of device maximum power dissipation (see [Table 30-1](#)).

30.2 DC Characteristics

Figure 30-1. PIC24FJ64GP205/GU205 Family Voltage-Frequency Graph (Industrial)

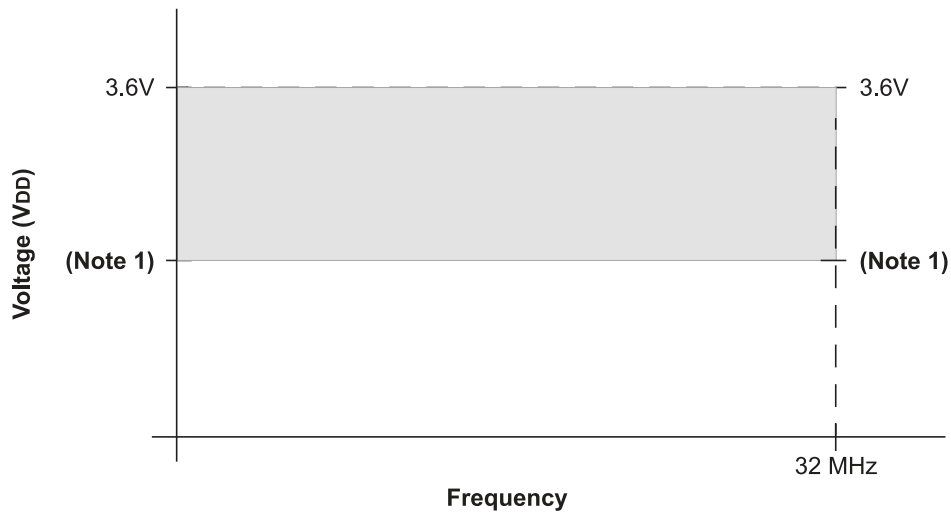

Note:

1. Lower operating boundary is 2.0V or V_{BOR} (when BOR is enabled), whichever is lower. For best analog performance, operate above 2.2V.

Table 30-1. Thermal Operating Conditions

| Rating | Symbol | Min | Typ | Max | Unit |
|--|------------|---------------------------|-----|------|------|
| PIC24FJ128GU410: | | | | | |
| Operating Junction Temperature Range | T_J | -40 | — | +135 | °C |
| Operating Ambient Temperature Range | T_A | -40 | — | +125 | °C |
| Power Dissipation: Internal Chip Power Dissipation: $P_{INT} = V_{DD} \times (I_{DD} - \sum I_{OH})$ | P_D | $P_{INT} + P_{I/O}$ | | | W |
| I/O Pin Power Dissipation: $P_{I/O} = \sum (V_{DD} - V_{OH}) \times I_{OH} + \sum V_{OL} \times I_{OL}$ | | | | | |
| Maximum Allowed Power Dissipation | P_{DMAX} | $(T_J - T_A)/\Theta_{JA}$ | | | W |

Table 30-2. Package Thermal Resistance

| Characteristic ⁽¹⁾ | Symbol | Typ | Unit |
|-------------------------------|---------------|------|------|
| 28-Pin QFN | θ_{JA} | 38.4 | °C/W |
| 28-Pin UQFN | θ_{JA} | 38.7 | °C/W |
| 28-Pin SOIC | θ_{JA} | 79.0 | °C/W |
| 28-Pin SSOP | θ_{JA} | 67.1 | °C/W |
| 36-Pin UQFN | θ_{JA} | 35.4 | °C/W |
| 48-Pin UQFN | θ_{JA} | 28.3 | °C/W |
| 48-Pin TQFP | θ_{JA} | 71.0 | °C/W |

Note:

1. Junction to ambient thermal resistance; θ_{JA} (θ_{JA}) numbers are achieved by package simulations.

Table 30-3. Temperature and Voltage Specifications

| Operating Conditions (unless otherwise stated): | | | | | | |
|---|-------------------|---|----------|-----|---------------|-------|
| $2.0V \leq V_{DD} \leq 3.6V$ | | | | | | |
| $-40^{\circ} \leq T_A \leq +85^{\circ}C$ | | | | | | |
| Param No. | Symbol | Characteristic | Min | Typ | Max | Units |
| DC10 | V_{DD} | Supply Voltage | 2.0 | — | 3.6 | V |
| DC16 | $V_{POR}^{(1)}$ | V_{DD} Start Voltage to Ensure Internal Power-on Reset Signal | V_{SS} | — | — | V |
| DC17A | $SV_{DD}^{(1,3)}$ | Recommended V_{DD} Rise Rate to Ensure Internal Power-on Reset Signal | 1V/20 ms | — | 1V/10 μ S | sec |
| DC17B | $V_{BOR}^{(2)}$ | Brown-out Reset Voltage on V_{DD} Transition, High-to-Low | 2.0 | 2.1 | 2.2 | V |

Notes:

1. If the V_{POR} or SV_{DD} parameters are not met, or the application experiences slow power-down V_{DD} ramp rates, it is recommended to enable and use BOR.
2. On a rising V_{DD} power-up sequence, application firmware execution begins at the higher of the V_{PORREL} or V_{BOR} level (when $BOREN = 1$).
3. V_{DD} rise times outside this window may not internally reset the processor and are not parametrically tested.

Table 30-4. Operating Current (I_{DD})

| Operating Conditions (unless otherwise stated): -40° ≤ T _A ≤ +125°C | | | | | |
|---|--------------------|------|-------|-----------------|--|
| Param No. | Typ ⁽¹⁾ | Max | Units | V _{DD} | Conditions ⁽²⁾ |
| DC19 | 187 | 340 | μA | 2.0V | 0.5 MIPS, F _{OSC} = 1 MHz |
| | 196 | 340 | μA | 3.3V | |
| DC20 | 339 | 530 | μA | 2.0V | 1 MIPS, F _{OSC} = 2 MHz |
| | 351 | 530 | μA | 3.3V | |
| DC23 | 1.23 | 1.58 | mA | 2.0V | 4 MIPS, F _{OSC} = 8 MHz |
| | 1.25 | 1.58 | mA | 3.3V | |
| DC24 | 5.78 | 6.2 | mA | 2.0V | 16 MIPS, F _{OSC} = 32 MHz |
| | 5.86 | 6.2 | mA | 3.3V | |
| DC31 | 45 | 200 | μA | 2.0V | LPRC (16 KIPS), F _{OSC} = 32 kHz |
| | 51 | 200 | μA | 3.3V | |
| DC32 | 1.25 | 1.64 | mA | 2.0V | FRC (4 MIPS), F _{OSC} = 8 MHz |
| | 1.26 | 1.64 | mA | 3.3V | |

Notes:

1. Data in the “Typ” column are at +25°C. Typical parameters are for design guidance only and are not tested.
2. Base I_{DD} current is measured with:
 - Oscillator is configured in EC mode without PLL (FNOSC[2:0] (FOSCSEL[2:0]) = 010, PLLMODE[3:0] (FOSCSEL[6:3]) = 1111 and POSCMOD[1:0] (FOSC[1:0]) = 00)
 - OSCI pin is driven with external square wave with levels from 0.3V to V_{DD} – 0.3V
 - OSCO is configured as an I/O in the Configuration Words (OSCIOFCN (FOSC[2]) = 0)
 - FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 11)
 - Secondary Oscillator circuit is disabled (SOSCSEL (FOSC[3]) = 0)
 - Main and low-power BOR circuits are disabled (BOREN[1:0] (FPOR[1:0]) = 00 and LPBOREN (FPOR[3]) = 0)
 - Watchdog Timer is disabled (FWDTEN[1:0] (FWDT[6:5]) = 00)
 - All I/O pins (except OSCI) are configured as outputs and driving low
 - No peripheral modules are operating or being clocked (defined PMDx bits are all ones)
 - JTAG is disabled (JTAGEN (FICD[5]) = 0)
 - NOP instructions are executed

Table 30-5. Idle Current (I_{IDLE})

| Operating Conditions (unless otherwise stated): -40° ≤ T _A ≤ +125°C | | | | | |
|---|--------------------|-----|-------|-----------------|---|
| Param No. | Typ ⁽¹⁾ | Max | Units | V _{DD} | Conditions ⁽²⁾ |
| DC40 | 111 | 270 | μA | 2.0V | 1 MIPS, F _{OSC} = 2 MHz |
| | 122 | 270 | μA | 3.3V | |
| DC43 | 329 | 520 | μA | 2.0V | 4 MIPS, F _{OSC} = 8 MHz |
| | 356 | 520 | μA | 3.3V | |
| DC47 | 1.17 | 1.8 | mA | 2.0V | 16 MIPS, F _{OSC} = 32 MHz |
| | 1.26 | 1.8 | mA | 3.3V | |
| DC50 | 370 | 570 | μA | 2.0V | FRC (4 MIPS), F _{OSC} = 8 MHz |
| | 380 | 570 | μA | 3.0V | |
| DC51 | 41 | 290 | μA | 2.0V | LPRC (16 KIPS), F _{OSC} = 32 kHz |
| | 47 | 290 | μA | 3.3V | |

Notes:

1. Data in the “Typ” column are at +25°C. Parameters are for design guidance only and are not tested.
2. Base I_{IDLE} current is measured with:
 - Oscillator is configured in EC mode without PLL (FNOSC[2:0] (FOSCSEL[2:0]) = 010, PLLMODE[3:0] (FOSCSEL[6:3]) = 1111 and POSCMOD[1:0] (FOSC[1:0]) = 00)
 - OSCI pin is driven with external square wave with levels from 0.3V to V_{DD} – 0.3V
 - OSCO is configured as an I/O in Configuration Words (OSCIOFCN (FOSC[2]) = 0)
 - FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 11)
 - Secondary Oscillator circuit is disabled (SOSCSEL (FOSC[3]) = 0)
 - Main and low-power BOR circuits are disabled (BOREN[1:0] (FPOR[1:0]) = 00 and LPBOREN (FPOR[3]) = 0)
 - Watchdog Timer is disabled (FWDTEN[1:0] (FWDT[6:5]) = 00)
 - All I/O pins (except OSCI) are configured as outputs and driving low
 - No peripheral modules are operating or being clocked (defined PMDx bits are all ones)
 - JTAG is disabled ($\overline{\text{JTAGEN}}$ (FICD[5]) = 0)
 - `pwrsav #1 (IDLE)` instruction is executed

Table 30-6. Power-Down Current (I_{PD})

| Param No. | Typ ⁽¹⁾ | Max | Units | Operating Temperature | V _{DD} | Conditions ⁽²⁾ |
|-----------|--------------------|-----|-------|-----------------------|-----------------|---|
| DC60 | 1.98 | 10 | μA | -40°C | 2.0V | Sleep with main voltage regulator in Standby mode (VREGS (RCON[8]) = 0, RETEN (RCON[12]) = 0, LPREGEN (FPOR[2]) = 1) |
| | 3.1 | 12 | μA | +25°C | | |
| | 4 | 18 | μA | +85°C | | |
| | 8.31 | 150 | μA | +125°C | | |
| | 4.3 | 10 | μA | -40°C | 3.3V | |
| | 5.1 | 12 | μA | +25°C | | |
| | 6.15 | 18 | μA | +85°C | | |
| | 11.22 | 150 | μA | +125°C | | |
| DC61 | 0.17 | — | μA | -40°C | 2.0V | Sleep with enabled low-voltage retention regulator (VREGS (RCON[8]) = 0, RETEN (RCON[12]) = 1, LPREGEN (FPOR[2]) = 0) |
| | 0.51 | — | μA | +25°C | | |
| | 0.80 | — | μA | +85°C | | |
| | 4.79 | — | μA | +125°C | | |
| | 0.33 | — | μA | -40°C | 3.3V | |
| | 0.7 | — | μA | +25°C | | |
| | 1.09 | — | μA | +85°C | | |
| | 5.77 | — | μA | +125°C | | |

Notes:

1. Data in the “Typ” column are at +25°C. Parameters are for design guidance only and are not tested.
2. Base I_{PD} current is measured with:
 - Oscillator is configured in FRC mode without PLL (FNOSC[2:0] (FOSCSEL[2:0]) = 000, PLLMODE[3:0] (FOSCSEL[6:3]) = 1111 and POSCMOD[1:0] (FOSC[1:0]) = 11)
 - OSCO is configured as an I/O in Configuration Words (OSCIOFCN (FOSC[2]) = 0)
 - FSCM is disabled (FCKSM[1:0] (FOSC[7:6]) = 11)
 - Secondary Oscillator circuit is disabled (SOSCSEL (FOSC[3]) = 0)
 - Main and low-power BOR circuits are disabled (BOREN[1:0] (FPOR[1:0]) = 00 and LPBOREN (FPOR[3]) = 0)
 - Watchdog Timer is disabled (FWDTEN[1:0] (FWDT[6:5]) = 00)
 - All I/O pins are configured as outputs and driving low
 - No peripheral modules are operating or being clocked (defined PMDx bits are all ones)
 - JTAG is disabled (\overline{JTAGEN} (FICD[5]) = 0)
 - The currents are measured on the device containing the most memory in this family
 - `pwrsav #0 (SLEEP)` instruction is executed.

Table 30-7. Incremental Peripheral Δ Current

| Operating Conditions (unless otherwise stated): -40°C ≤ T _A ≤ +125°C | | | | | | |
|--|--------------------|------|-------|-----------------------|-----------------|-------------------------------------|
| Param No. | Typ ⁽¹⁾ | Max | Units | Operating Temperature | V _{DD} | Conditions |
| Incremental Current Brown-out Reset (ΔBOR) ⁽²⁾ | | | | | | |
| DC25 | 2.22 | 5 | μA | -40°C to +85°C | 2.0V | ΔBOR |
| | 2.80 | 5 | μA | -40°C to +85°C | 3.3V | |
| | 2.23 | 10 | μA | -40°C to +125°C | 2.0V | |
| | 2.81 | 10 | μA | -40°C to +125°C | 3.3V | |
| Incremental Current Watchdog Timer (ΔWDT) ⁽²⁾ | | | | | | |
| DC71 | 0.35 | 1 | μA | -40°C to +85°C | 2.0V | ΔWDT |
| | 0.38 | 1 | μA | -40°C to +85°C | 3.3V | |
| | 0.61 | 5 | μA | -40°C to +125°C | 2.0V | |
| | 0.63 | 5 | μA | -40°C to +125°C | 3.3V | |
| Incremental Current High/Low-Voltage Detect (ΔHLVD) ⁽²⁾ | | | | | | |
| DC75 | 1.93 | 5 | μA | -40°C to +85°C | 2.0V | ΔHLVD |
| | 2.58 | 5 | μA | -40°C to +85°C | 3.3V | |
| | 2.10 | 10 | μA | -40°C to +125°C | 2.0V | |
| | 2.82 | 10 | μA | -40°C to +125°C | 3.3V | |
| Incremental Current Analog-to-Digital Converter (ΔADC) ⁽²⁾ | | | | | | |
| | 363.1 | 700 | μA | -40°C to +85°C | 2.0V | ΔADC (with internal RC Clock) |
| | 429.6 | 700 | μA | -40°C to +85°C | 3.3V | |
| | 381.3 | 750 | μA | -40°C to +125°C | 2.0V | |
| | 451.6 | 750 | μA | -40°C to +125°C | 3.3V | |
| Incremental Current Deadman Timer (ΔDMT) ⁽²⁾ | | | | | | |
| | 212.9 | 1000 | nA | -40°C to +85°C | 2.0V | ΔDMT ⁽²⁾ |
| | 215.4 | 1000 | nA | -40°C to +85°C | 3.3V | |
| | 668 | 1500 | nA | -40°C to +125°C | 2.0V | |
| | 636.5 | 1500 | nA | -40°C to +125°C | 3.3V | |
| Incremental Current Real-Time Clock and Calendar (ΔRTCC) ⁽²⁾ | | | | | | |
| DC77 | 0.63 | — | μA | -40°C to +85°C | 2.0V | With SOSC enabled in Low-Power mode |
| | 0.83 | — | μA | -40°C to +85°C | 3.3V | |
| | 0.85 | — | μA | -40°C to +125°C | 2.0V | |
| | 1 | — | μA | -40°C to +125°C | 3.3V | |

.....continued

Operating Conditions (unless otherwise stated):

$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$

| Param No. | Typ ⁽¹⁾ | Max | Units | Operating Temperature | V _{DD} | Conditions |
|--|--------------------|------|-------|-----------------------|-----------------|---------------------------------|
| DC77A | 381.6 | 1000 | nA | -40°C to +85°C | 2.0V | With LPRC enabled |
| | 407.1 | 1000 | nA | -40°C to +85°C | 3.3V | |
| | 392.8 | 1300 | nA | -40°C to +125°C | 2.0V | |
| | 473.3 | 1300 | nA | -40°C to +125°C | 3.3V | |
| Incremental Current PLL Enable (Δ PLEN) ⁽²⁾ | | | | | | |
| | 662.4 | — | μA | -40°C to +85°C | 2.0V | PLL Enabled CLKDIV[PLEN] = 1 |
| | 662.5 | — | μA | -40°C to +85°C | 3.3V | |
| | 676.7 | — | μA | -40°C to +125°C | 2.0V | |
| | 677.2 | — | μA | -40°C to +125°C | 3.3V | |

Notes:

1. Data in the “Typ” column are at +25°C. Parameters are for design guidance only and are not tested.
2. Incremental current while the module is enabled and running. This current should be added to the base I_{PD} current.

Table 30-8. I/O Pin Input Specifications

| Operating Conditions (unless otherwise stated): | | | | | | |
|---|-------------------|--|--|------------------------|--------|--|
| 2.0V < V _{DD} < 3.6V | | | | | | |
| -40°C < T _A < +85°C | | | | | | |
| Param No. | Symbol | Characteristic | Min | Max | Units | Conditions |
| | V _{IL} | Input Low Voltage ⁽²⁾ | | | | |
| DI10 | | I/O Pins with ST Buffer | V _{SS} | 0.2 V _{DD} | V | |
| DI11 | | I/O Pins with TTL Buffer | V _{SS} | 0.15 V _{DD} | V | |
| DI15 | | MCLR | V _{SS} | 0.2 V _{DD} | V | |
| DI16 | | OSCI (XT mode) | V _{SS} | 0.2 V _{DD} | V | |
| DI17 | | OSCI (HS mode) | V _{SS} | 0.2 V _{DD} | V | |
| DI18 | | I/O Pins with I ² C Buffer | V _{SS} | 0.3 V _{DD} | V | |
| DI19 | | I/O Pins with SMBus Buffer | — | 0.8 | V | SMBus is enabled |
| | V _{IH} | Input High Voltage ⁽²⁾ | | | | |
| DI20 | | I/O Pins with ST Buffer: with Analog Functions, Digital Only | 0.8 V _{DD} 0.8 V _{DD} | V _{DD} 5.5 | V V | |
| DI21 | | I/O Pins with TTL Buffer: with Analog Functions, Digital Only | 0.25 V _{DD} + 0.8 0.25 V _{DD} + 0.8 | V _{DD} 5.5 | V V | |
| DI25 | | MCLR | 0.8 V _{DD} | V _{DD} | V | |
| DI26 | | OSCI (XT mode) | 0.7 V _{DD} | V _{DD} | V | |
| DI27 | | OSCI (HS mode) | 0.7 V _{DD} | V _{DD} | V | |
| DI28 | | I/O Pins with I ² C Buffer: with Analog Functions, Digital Only | 0.7 V _{DD} 0.7 V _{DD} | V _{DD} 5.5 | V V | |
| DI29 | | I/O Pins with SMBus Buffer: with Analog Functions, Digital Only | 1.35 | — | V | 2.5V ≤ V _{PIN} ≤ V _{DD} |
| DI30 | I _{CNPU} | CNx Pull-up Current | 100 | 450 | μA | V _{DD} = 3.3V, V _{PIN} = V _{SS} |
| DI30A | I _{CNPD} | CNx Pull-Down Current | 150 | 550 | μA | V _{DD} = 3.3V, V _{PIN} = V _{DD} |

.....continued

Operating Conditions (unless otherwise stated):

$$2.0V < V_{DD} < 3.6V$$

$$-40^{\circ}C < T_A < +85^{\circ}C$$

| Param No. | Symbol | Characteristic | Min | Max | Units | Conditions |
|-----------|----------|--|-----|---------|---------|--|
| | I_{IL} | Input Leakage Current⁽¹⁾ | | | | |
| DI50 | | I/O Ports | — | ± 1 | μA | $V_{SS} \leq V_{PIN} \leq V_{DD}$, pin at high-impedance |
| DI51 | | Analog Input Pins | — | ± 1 | μA | $V_{SS} \leq V_{PIN} \leq V_{DD}$, pin at high-impedance |
| DI55 | | \overline{MCLR} | — | ± 1 | μA | $V_{SS} \leq V_{PIN} \leq V_{DD}$ |
| DI56 | | OSCI/CLKI | — | ± 1 | μA | $V_{SS} \leq V_{PIN} \leq V_{DD}$, EC, XT and HS modes |

Notes:

1. Negative current is defined as current sourced by the pin.
2. Refer to [Table 1-1](#) for I/O pin buffer types.

Table 30-9. I/O Pin Output Specifications

| Operating Conditions (unless otherwise stated): -40°C < T _A < +85°C | | | | | | |
|---|-----------------|----------------------------|------|------|-------|---|
| Param No. | Symbol | Characteristic | Min | Max | Units | Conditions |
| | V _{OL} | Output Low Voltage | | | | |
| DO10 | | I/O Ports | — | 0.4 | V | I _{OL} = 3 mA, V _{DD} = 3.6V |
| | | | — | 0.8 | V | I _{OL} = 6 mA, V _{DD} = 3.6V |
| DO16 | | OSCO/CLKO | — | 0.18 | V | I _{OL} = 3 mA, V _{DD} = 3.6V |
| | | | — | 0.2 | V | I _{OL} = 6 mA, V _{DD} = 3.6V |
| | V _{OH} | Output High Voltage | | | | |
| DO20 | | I/O Ports | 3.4 | — | V | I _{OL} = -3.0 mA, V _{DD} = 3.6V |
| | | | 3.25 | — | V | I _{OL} = -6.0 mA, V _{DD} = 3.6V |
| DO26 | | OSCO/CLKO | 3.3 | — | V | I _{OL} = -3 mA, V _{DD} = 3.6V |
| | | | 1.85 | — | V | I _{OL} = -6 mA, V _{DD} = 3.6V |

Table 30-10. Program Memory

| Operating Conditions (unless otherwise stated): 2.0V < V _{DD} < 3.6V -40°C < T _A < +85°C | | | | | |
|--|-------------------|---|-------|-----|-------|
| Param No. | Symbol | Characteristic | Min | Max | Units |
| | | Program Flash Memory | | | |
| D130 | E _P | Cell Endurance | 10000 | — | E/W |
| D133A | T _{IW} | Self-Timed Double-Word Write Cycle Time | — | 30 | μs |
| | | Self-Timed Row Write Cycle Time | — | 2 | ms |
| D133B | T _{IE} | Self-Timed Page Erase Time | — | 40 | ms |
| D134 | T _{RETD} | Characteristic Retention | 20 | — | Year |

Table 30-11. Internal Voltage Regulator Specifications

| Operating Conditions (unless otherwise stated): -40°C < T _A < +85°C | | | | | | | |
|---|--------------------|----------------------------------|------|-----|------|-------|-------------------------------|
| Param No. | Symbol | Characteristics | Min | Typ | Max | Units | Comments |
| DVR | T _{VREG} | Voltage Regulator Start-up Time | — | 10 | — | μs | VREGS = 0 with any POR or BOR |
| DVR10 | V _{BG} | Internal Band Gap Reference | 1.14 | 1.2 | 1.26 | V | |
| DVR11 | T _{BG} | Band Gap Reference Start-up Time | — | 1 | — | ms | |
| DVR20 | V _{RGOUT} | Regulator Output Voltage | — | 1.8 | — | V | V _{DD} > 1.9V |

|continued | | | | | | | |
|---|------------------|--------------------------------------|-----|-----|-----|-------|---|
| Operating Conditions (unless otherwise stated): -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristics | Min | Typ | Max | Units | Comments |
| DVR21 | C _{EFC} | External Filter Capacitor Value | 10 | — | — | μF | Series resistance < 3Ω recommended; < 5Ω required |
| DVR30 | V _{LVR} | Low-Voltage Regulator Output Voltage | 0.9 | — | 1.2 | V | RETEN = 1, LPREGEN = 0 |

Table 30-12. High/Low-Voltage Detect Characteristics

| Operating Conditions (unless otherwise stated): -40°C < T _A < +85°C | | | | | | | |
|---|--------------------|--|-------------------|------|-----|-------|---|
| Param No. | Symbol | Characteristic | Min | Typ | Max | Units | |
| DC18 | V _{HLVD} | HLVD Voltage on V _{DD} Transition | HLVDL[3:0] = 0110 | 2.93 | — | 3.39 | V |
| | | | HLVDL[3:0] = 0111 | 2.73 | — | 3.17 | V |
| | | | HLVDL[3:0] = 1000 | 2.62 | — | 3.06 | V |
| | | | HLVDL[3:0] = 1001 | 2.39 | — | 2.8 | V |
| | | | HLVDL[3:0] = 1010 | 2.29 | — | 2.68 | V |
| | | | HLVDL[3:0] = 1011 | 2.18 | — | 2.56 | V |
| | | | HLVDL[3:0] = 1100 | 2.08 | — | 2.45 | V |
| | | | HLVDL[3:0] = 1101 | 1.98 | — | 2.34 | V |
| | | | HLVDL[3:0] = 1110 | 1.88 | — | 2.23 | V |
| DC101 | V _{THL} | HLVD Voltage on LVDIN Pin Transition | HLVDL[3:0] = 1111 | — | 1.2 | — | V |
| DC105 | T _{ONLVD} | HLVD Module Enable Time | — | 5 | — | μs | |

Table 30-13. Comparator DC Specifications

| Operating Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | |
|--|-------------|--|-----|-----|----------|---------|
| Param No. | Symbol | Characteristic ⁽¹⁾ | Min | Typ | Max | Units |
| D300 | V_{IOFF} | Input Offset Voltage | — | 12 | 50 | mV |
| D301 | V_{ICM} | Input Common-Mode Voltage | 0 | — | V_{DD} | V |
| D302 | CMRR | Common-Mode Rejection Ratio | 55 | — | — | dB |
| D306 | I_{QCMP} | AV_{DD} Quiescent Current per Comparator | — | 27 | — | μA |
| D307 | T_{RESP} | Response Time ⁽²⁾ | — | 300 | — | ns |
| D308 | T_{MC2OV} | Comparator Mode Change to Valid Output | — | — | 10 | μs |
| D309 | I_{DD} | Operating Supply Current | — | 30 | — | μA |

Notes:

- Parameters are characterized but not tested.
- Measured with one input at $V_{DD}/2$ and the other transitioning from V_{SS} to V_{DD} , 40 mV step, 15 mV overdrive.

Table 30-14. Comparator Voltage Reference DC Specifications

| Operating Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | |
|--|------------|-------------------|------|------|---------|
| Param No. | Symbol | Characteristic | Min | Max | Units |
| VR310 | T_{SET} | Settling Time | — | 10 | μs |
| VRD311 | CV_{RAA} | Absolute Accuracy | -100 | +100 | mV |

30.3 AC Characteristics and Timing Parameters

Figure 30-2. Load Conditions for I/O Specifications

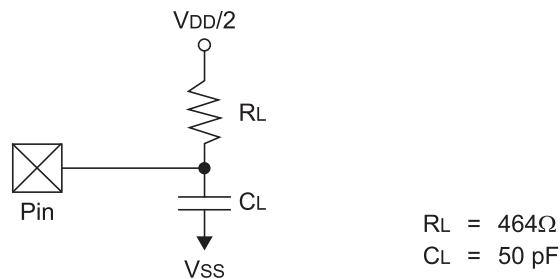


Figure 30-3. CLKO and I/O Timing Characteristics

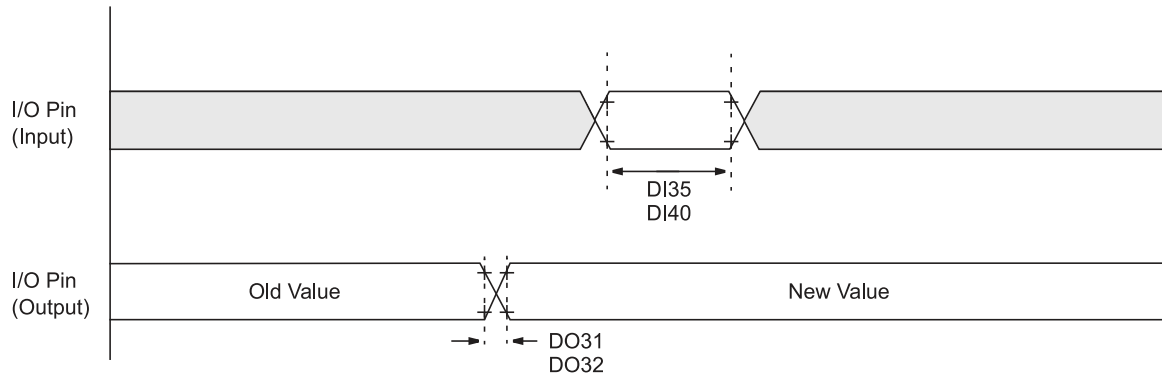


Table 30-15. I/O Timing Requirements

| Operating Conditions 2.0V to 3.6V (unless otherwise stated): | | | | | |
|--|------------|-----------------------------------|-----|-----|----------|
| $2.0V < V_{DD} < 3.6V$ | | | | | |
| $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | |
| Param No. | Symbol | Characteristic | Min | Max | Units |
| DO31 | $T_{IO R}$ | Port Output Rise Time | — | 25 | ns |
| DO32 | $T_{IO F}$ | Port Output Fall Time | — | 25 | ns |
| DI35 | T_{INP} | INTx Pin High or Low Time (input) | 1 | — | T_{CY} |
| DI40 | T_{RBP} | CNx High or Low Time (input) | 1 | — | T_{CY} |

Figure 30-4. External Clock Timing

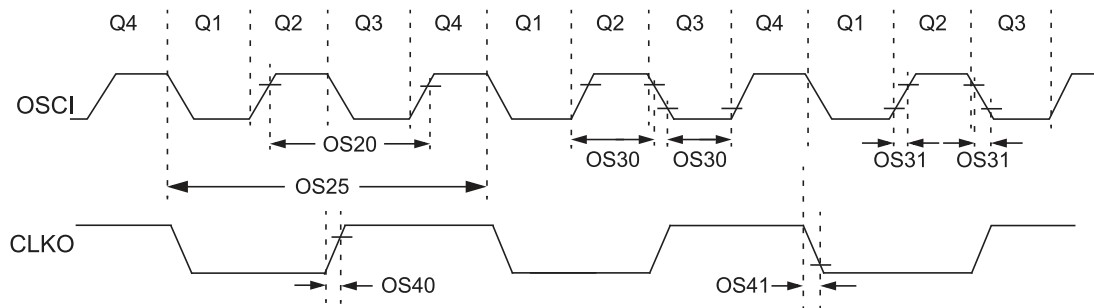


Table 30-16. External Clock Timing Requirements

| Operating Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | | |
|--|--|--|-------------------------|--------------------|----------|------------|------------|
| Param No. | Symbol | Characteristic | Min | Typ ⁽¹⁾ | Max | Units | Conditions |
| OS10 | F _{OSC} | External CLKI Frequency (External clocks allowed only in EC mode) ⁽²⁾ | — 4 | — — | 32 48 | MHz MHz | EC |
| | | Oscillator Frequency | 3.5 | — | 10 | MHz | XT |
| | | | 4 | — | 8 | MHz | XTPLL |
| | | | 10 | — | 32 | MHz | HS |
| | | | 12 | — | 24 | MHz | HSPLL |
| | | | 31 | — | 33 | kHz | SOSC |
| OS25 | T _{CY} | Instruction Cycle Time ⁽³⁾ | 62.5 | — | DC | ns | |
| OS30 | T _{OSL} , T _{OSH} | External Clock in (OSCI) High or Low Time | 0.45 x T _{OSC} | — | — | ns | EC |
| OS31 | T _{OSR} , T _{OSF} | External Clock in (OSCI) Rise or Fall Time | — | — | 20 | ns | EC |
| OS40 | T _{CKR} | CLKO Rise Time ⁽⁴⁾ | — | 15 | 30 | ns | |
| OS41 | T _{CKF} | CLKO Fall Time ⁽⁴⁾ | — | 15 | 30 | ns | |

Notes:

1. Data in the “Typ” column are at 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.
2. Represents input to the system clock prescaler. PLL dividers and postscalers must still be configured so that the system clock frequency does not exceed the maximum frequency shown in [Figure 30-1](#).
3. Instruction cycle period (T_{CY}) equals two times the input oscillator time base period. All specified values are based on characterization data for that particular oscillator type, under standard operating conditions, with the device executing code. Exceeding these specified limits may result in an unstable oscillator operation and/or higher than expected current consumption. All devices are tested to operate at “Min.” values with an external clock applied to the OSCI/CLKI pin. When an external clock input is used, the “Max.” cycle time limit is “DC” (no clock) for all devices.
4. Measurements are taken in EC mode. The CLKO signal is measured on the OSCO pin. CLKO is low for the Q1-Q2 period (1/2 T_{CY}) and high for the Q3-Q4 period (1/2 T_{CY}).

Table 30-17. PLL Clock Timing Specifications

| Operating Conditions 2.0V to 3.6V (unless otherwise stated): 2.0V < V _{DD} < 3.6V -40°C < T _A < +85°C | | | | | |
|---|--|-----|-------|-------|---|
| Sym | Characteristic | Min | Max | Units | Conditions |
| F _{IN} | Input Frequency Range | 2 | 24 | MHz | |
| F _{MIN} | Minimum Output Frequency from the Frequency Multiplier | — | 16 | MHz | 4 MHz F _{IN} with 4x feedback ratio, 2 MHz F _{IN} with 8x feedback ratio |
| F _{MAX} | Maximum Output Frequency from the Frequency Multiplier | 96 | — | MHz | 4 MHz F _{IN} with 24x net multiplication ratio, 24 MHz F _{IN} with 4x net multiplication ratio |
| F _{SLEW} | Maximum Step Function of F _{IN} at which the PLL will be Ensured to Maintain Lock | -4 | +4 | % | Full input range of F _{IN} |
| T _{LOCK} | Lock Time for VCO | — | 24 | μs | With the specified minimum, T _{REF} , and a lock timer count of one cycle, this is the maximum VCO lock time supported |
| J _{FM8} | Cumulative Jitter of Frequency Multiplier Over Voltage and Temperature during Any Eight Consecutive Cycles of the PLL Output | — | ±0.12 | % | 4 MHz F _{IN} with 4x feedback ratio |

Table 30-18. FRC Oscillator Specifications

| Operating Conditions (unless otherwise stated): 2.0V < V _{DD} < 3.6V -40°C < T _A < +85°C | | | | | | | |
|--|-----------------------|---|-------|--------------------|-------|-------|--------------------------------|
| Param No. | Symbol | Characteristic | Min | Typ ⁽³⁾ | Max | Units | Conditions |
| F20 | A _{FRC} | FRC Accuracy @ 8 MHz ⁽¹⁾ | -1.5 | +0.15 | 1.5 | % | -20°C ≤ T _A ≤ +85°C |
| | | | -2.5 | — | 2.5 | % | -40°C ≤ T _A ≤ -20°C |
| | | | -2.5 | — | 2.5 | % | 85°C ≤ T _A ≤ +125°C |
| F20A | A _{FRC} TUNE | FRC Accuracy @ 8 MHz with Enabled Self-Tune Feature | -0.20 | +0.05 | -0.20 | % | 0°C ≤ T _A ≤ +85°C |
| FR0 | T _{FRC} | FRC Oscillator Start-up Time | — | 2 | — | μs | |
| F22 | S _{TUNE} | OSCTUN Step-Size | — | 0.05 | — | %/bit | |
| F23 | T _{LOCK} | FRC Self-Tune Lock Time ⁽²⁾ | — | 5 | 8 | ms | |

Notes:

1. To achieve this accuracy, physical stress applied to the microcontroller package (ex., by flexing the PCB) must be kept to a minimum.
2. Time from reference clock stable, and in range, to FRC tuned with range specified by F20 (with self-tune).
3. Data in the “Typ” column are 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

Table 30-19. LPRC Oscillator Specifications

| Operating Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | |
|--|-------------------|---------------------------------------|-----|--------------------|-----|-------|
| Param No. | Symbol | Characteristic | Min | Typ ⁽¹⁾ | Max | Units |
| FR21 | A _{LPRC} | LPRC Accuracy @ 32 kHz | -20 | — | 20 | % |
| FR1 | T _{LPRC} | Low-Power RC Oscillator Start-up Time | — | 50 | — | μs |

Note:

1. Data in the “Typ” column are 3.3V, +25°C unless otherwise stated. Parameters are for design guidance only and are not tested.

Table 30-20. Reset and Brown-out Reset Requirements

| Operating Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | | |
|--|---------------------|--|---|-----|-------------------------|-------|--|
| Param No. | Symbol | Characteristic | Min | Typ | Max | Units | Conditions |
| SY10 | T _{MCL} | MCLR Pulse Width (Low) | 2 | — | — | μs | |
| SY12 | T _{POR} | Power-on Reset Delay | — | 2 | — | μs | |
| SY13 | T _{IOZ} | I/O High-Impedance from MCLR Low or Watchdog Timer Reset | Lesser of: (3 T _{CY} + 2) or 700 | — | (3 T _{CY} + 2) | μs | |
| SY25 | T _{BOR} | Brown-out Reset Pulse Width | 1 | — | — | μs | V _{DD} ≤ V _{BOR} |
| SY45 | T _{RST} | Internal State Reset Time | — | 50 | — | μs | |
| SY71 | T _{WAKEUP} | Wake-up Time from Sleep Mode | — | 7 | — | μs | VREGS (RCON[8]) = 1, RETEN (RCON[12]) = 0, LPCFG (FPOR[2]) = 1 |
| | | | — | 35 | — | μs | VREGS (RCON[8]) = 0, RETEN (RCON[12]) = 0, LPCFG (FPOR[2]) = 1 |
| | | | — | 195 | — | μs | VREGS (RCON[8]) = 1, RETEN (RCON[12]) = 1, LPCFG (FPOR[2]) = 0 |
| | | | — | 315 | — | μs | VREGS (RCON[8]) = 0, RETEN (RCON[12]) = 1, LPCFG (FPOR[2]) = 0 |

Figure 30-5. Timer1 External Clock Timing Characteristics

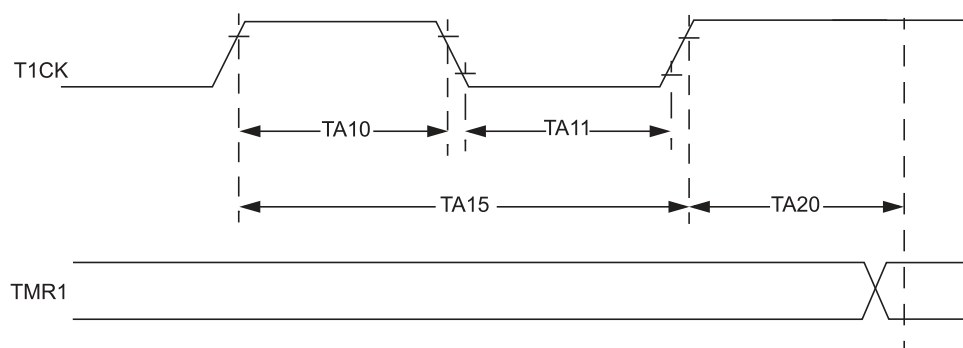


Table 30-21. Timer1 External Clock Timing Characteristics

Operating Conditions (unless otherwise stated):

2.0V < V_{DD} < 3.6V

-40°C < T_A < +85°C

| Param No. | Symbol | Characteristics ⁽¹⁾ | | Min | Max | Units | Conditions |
|-----------|-----------------------|--|--------------|-----|-----|-----------------|-------------------------------|
| TA10 | T _{CKH} | T1CK High Time | Synchronous | 1 | — | T _{CY} | Must also meet Parameter TA15 |
| | | | Asynchronous | 10 | — | ns | |
| TA11 | T _{CKL} | T1CK Low Time | Synchronous | 1 | — | T _{CY} | Must also meet Parameter TA15 |
| | | | Asynchronous | 10 | — | ns | |
| TA15 | T _{CKP} | T1CK Input Period | Synchronous | 2 | — | T _{CY} | |
| | | | Asynchronous | 20 | — | ns | |
| TA20 | T _{CKEXTMRL} | Delay from External T1CK Clock Edge to Timer Increment | | — | 3 | T _{CY} | Synchronous mode |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-6. MCCP Timer Mode External Clock Timing Characteristics

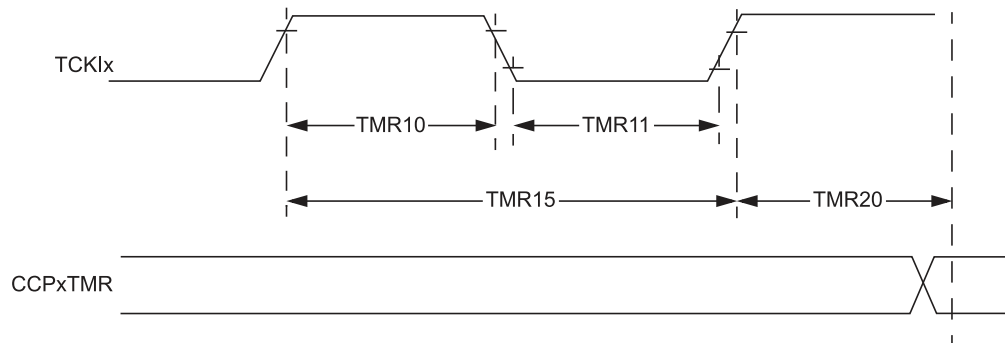


Table 30-22. MCCP Timer Mode Timing Requirements

| Operation Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | | |
|--|-----------------------|---|--------------|-----|-----|-----------------|--------------------------------|
| Param No. | Symbol | Characteristics ⁽¹⁾ | | Min | Max | Units | Conditions |
| TMR10 | T _{CKH} | TCKIx High Time | Synchronous | 1 | — | T _{CY} | Must also meet Parameter TMR15 |
| | | | Asynchronous | 10 | — | ns | |
| TMR11 | T _{CKL} | TCKIx Low Time | Synchronous | 1 | — | T _{CY} | Must also meet Parameter TMR15 |
| | | | Asynchronous | 10 | — | ns | |
| TMR15 | T _{CKP} | TCKIx Input Period | Synchronous | 2 | — | T _{CY} | |
| | | | Asynchronous | 20 | — | ns | |
| TMR20 | T _{CKEXTMRL} | Delay from External TCKIx Clock Edge to Timer Increment | | — | 1 | T _{CY} | |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-7. MCCP Input Capture Mode Timing Characteristics

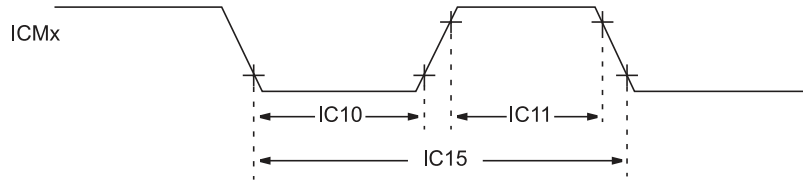


Table 30-23. MCCP Input Capture Mode Timing Requirements

| Operation Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | |
|--|------------------|--------------------------------|-----|-----|-------|-------------------------------|
| Param No. | Symbol | Characteristics ⁽¹⁾ | Min | Max | Units | Conditions |
| IC10 | T _{ICL} | ICMx Input Low Time | 25 | — | ns | Must also meet Parameter IC15 |
| IC11 | T _{ICH} | ICMx Input High Time | 25 | — | ns | Must also meet Parameter IC15 |
| IC15 | T _{ICP} | ICMx Input Period | 50 | — | ns | |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-8. M CCP PWM Mode Timing Characteristics

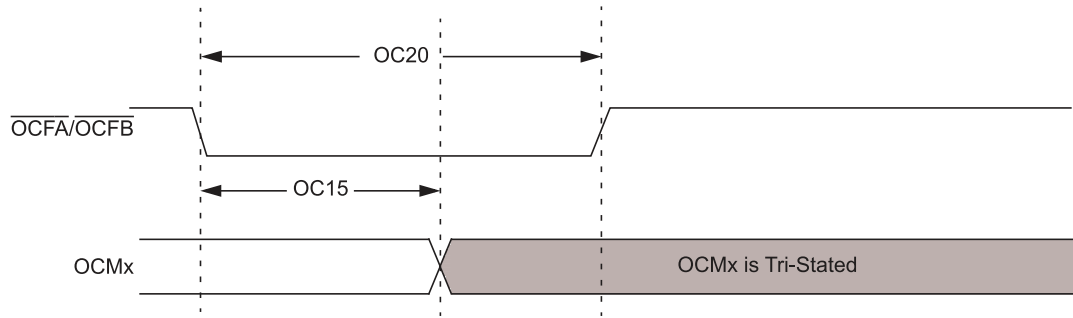


Table 30-24. M CCP PWM Mode Timing Requirements

| Operation Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | |
|--|-----------|--------------------------------|-----|-----|-------|
| Param No. | Symbol | Characteristics ⁽¹⁾ | Min | Max | Units |
| OC15 | T_{FD} | Fault Input to PWM I/O Change | — | 30 | ns |
| OC20 | T_{FLT} | Fault Input Pulse Width | 10 | — | ns |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-9. SPI Module Host Mode (CKE = 0) Timing Characteristics

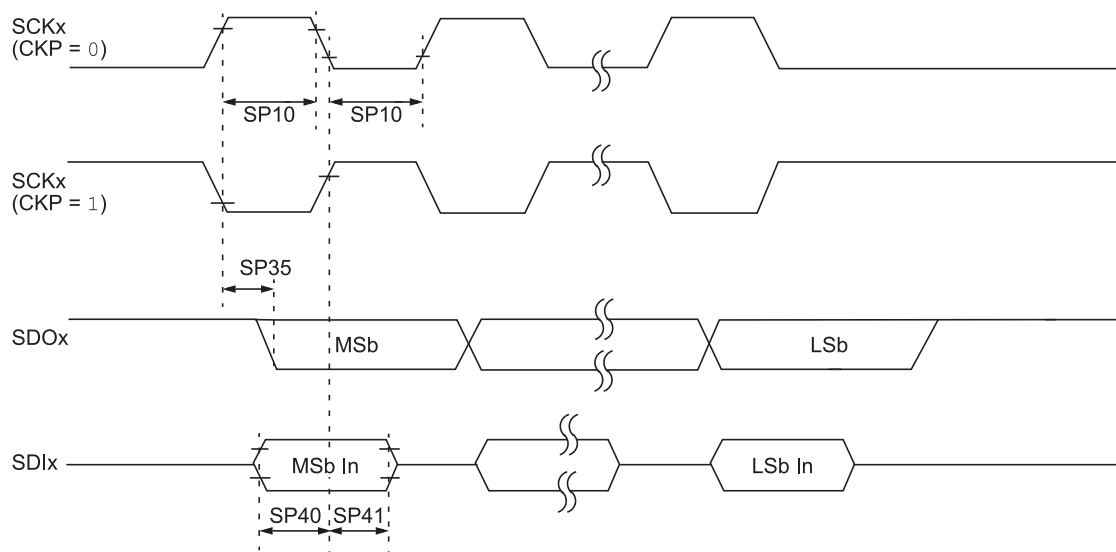


Figure 30-10. SPI Module Host Mode (CKE = 1) Timing Characteristics

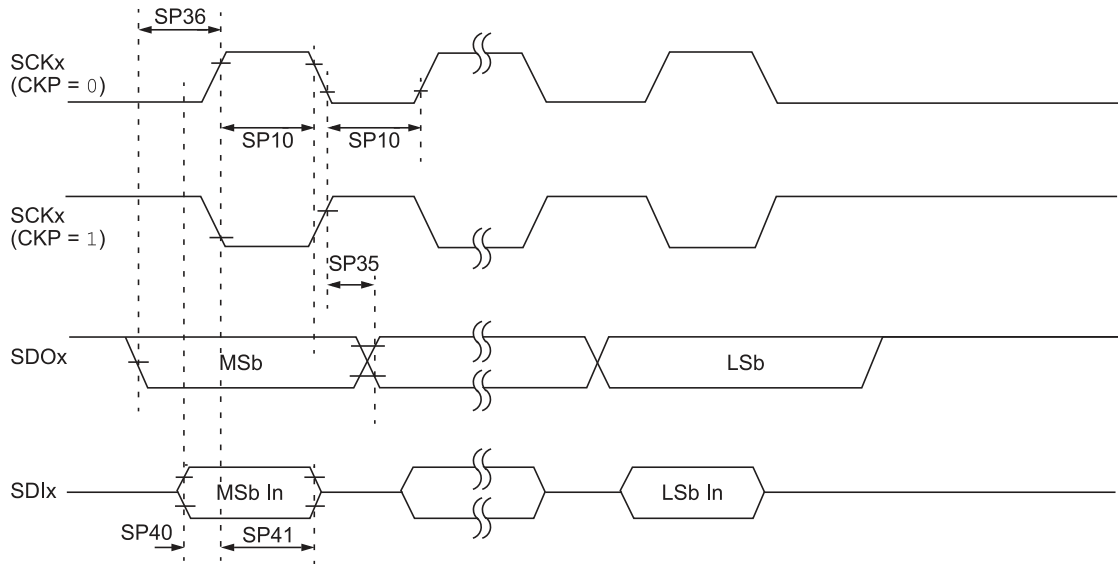


Table 30-25. SPI Module Host Mode Timing Requirements

| Operation Conditions (unless otherwise stated): | | | | | |
|---|-----------------------------|--|-----|-----|-------|
| $2.0V < V_{DD} < 3.6V$ | | | | | |
| $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | |
| Param No. | Symbol | Characteristics ⁽¹⁾ | Min | Max | Units |
| SP10 | T_{SCL}, T_{SCH} | SCKx Output Low or High Time | 20 | — | ns |
| SP35 | $T_{SCH2DOV}, T_{SCL2DOV}$ | SDOx Data Output Valid after SCKx Edge | — | 7 | ns |
| SP36 | $T_{DOV2SCL}, T_{DOV2SCH}$ | SDOx Data Output Setup to First SCKx Edge | 7 | — | ns |
| SP40 | $T_{DI}V2SCH, T_{DI}V2SCL}$ | Setup Time of SDIx Data Input to SCKx Edge | 7 | — | ns |
| SP41 | $T_{SCH2DI}L, T_{SCL2DI}L$ | Hold Time of SDIx Data Input to SCKx Edge | 7 | — | ns |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-11. SPI Module Client Mode (CKE = 0) Timing Characteristics

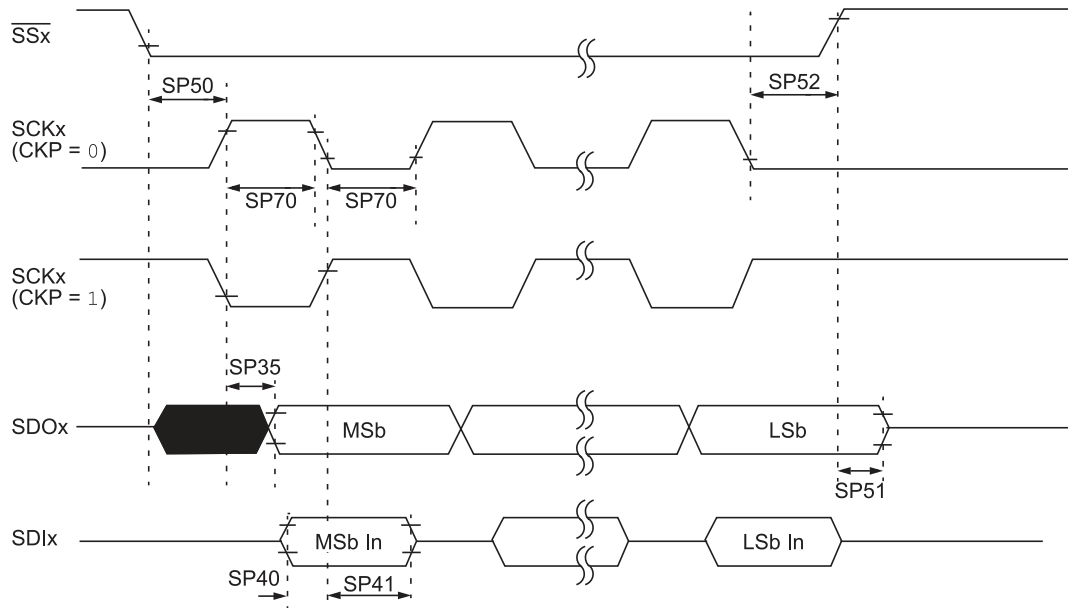


Figure 30-12. SPI Module Client Mode (CKE = 1) Timing Characteristics

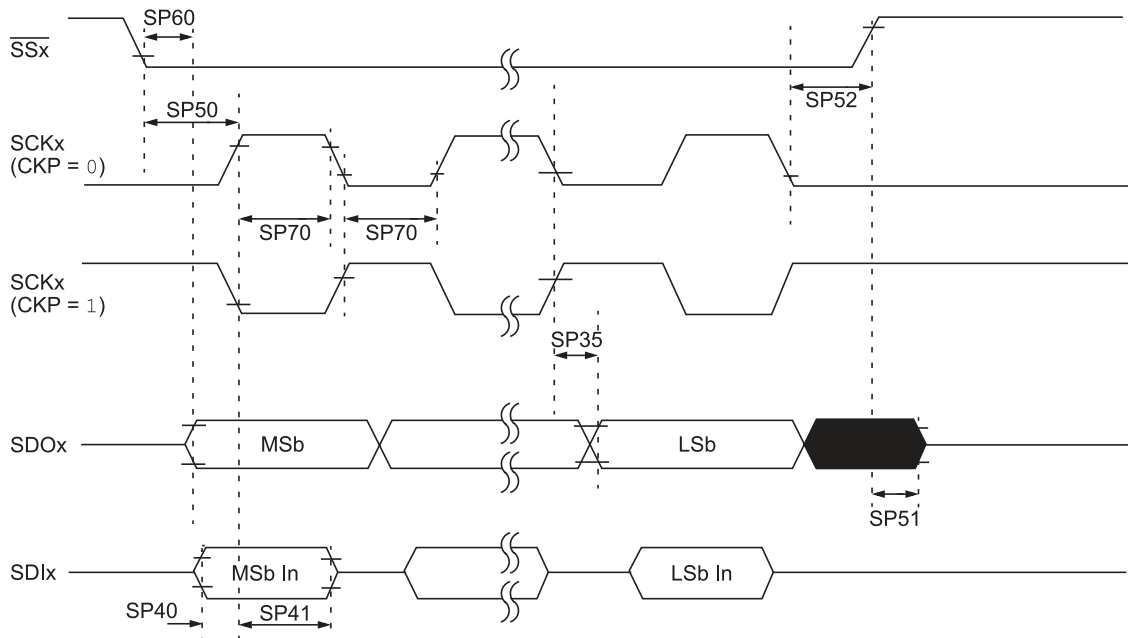


Table 30-26. SPI Module Client Mode Timing Requirements

| Operation Conditions (unless otherwise stated): $2.0V < V_{DD} < 3.6V$ $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | |
|--|----------------------------|---|-----|------|-------|
| Param No. | Symbol | Characteristics ⁽¹⁾ | Min | Max | Units |
| SP70 | T_{SCL}, T_{SCH} | SCKx Input Low Time or High Time | 20 | — | ns |
| SP35 | $T_{SCH2DOV}, T_{SCL2DOV}$ | SDOx Data Output Valid after SCKx Edge | — | 10 | ns |
| SP40 | $T_{DlV2SCH}, T_{DlV2SCL}$ | Setup Time of SDIx Data Input to SCKx Edge | 0 | — | ns |
| SP41 | $T_{SCH2DlL}, T_{SCL2DlL}$ | Hold Time of SDIx Data Input to SCKx Edge | 7 | — | ns |
| SP50 | $T_{SSL2SCH}, T_{SSL2SCL}$ | $\overline{SSx} \downarrow$ to SCKx \downarrow or SCKx \uparrow Input | 40 | — | ns |
| SP51 | $T_{SSH2SDOZ}$ | $\overline{SSx} \uparrow$ to SDOx Output High-Impedance | 2.5 | 12 | ns |
| SP52 | $T_{SCH2SSH}, T_{SCL2SSH}$ | $\overline{SSx} \uparrow$ after SCKx Edge | 10 | — | ns |
| SP60 | $T_{SSL2DOV}$ | SDOx Data Output Valid after \overline{SSx} Edge | — | 12.5 | ns |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-13. I²C Bus Start/Stop Bits Timing Characteristics (Host Mode)

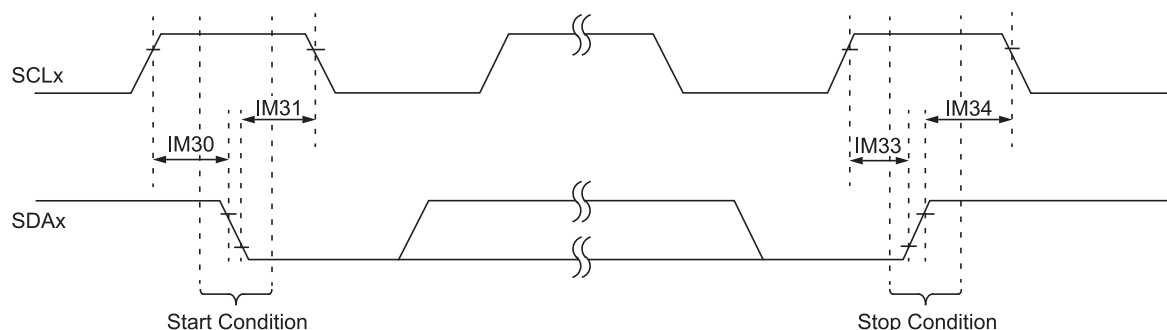


Figure 30-14. I²C Bus Data Timing Characteristics (Host Mode)

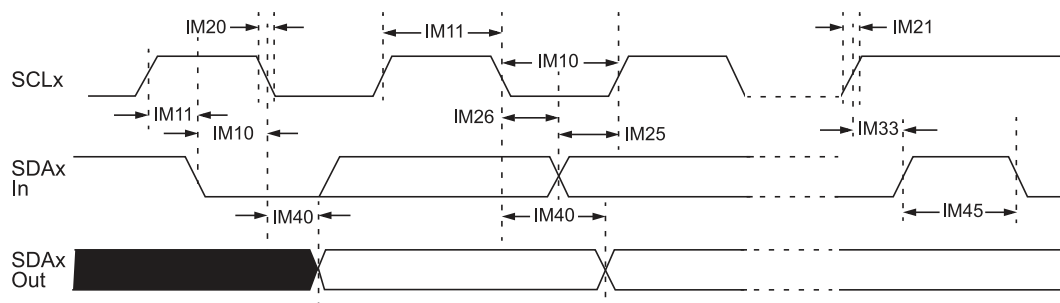


Table 30-27. I²C Bus Data Timing Requirements (Host Mode)

| Operation Conditions (unless otherwise stated): | | | | | | | |
|---|---------------------|--------------------------------|--------------|-----------------------------|------|-------|---|
| 2.0V < V _{DD} < 3.6V | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristics ⁽¹⁾ | | Min. | Max. | Units | Conditions |
| IM10 | T _{LO:SCL} | Clock Low Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | μs | |
| IM11 | T _{HI:SCL} | Clock High Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | μs | |
| IM20 | T _{F:SCL} | SDAx and SCLx Fall Time | 100 kHz mode | — | 300 | ns | |
| | | | 400 kHz mode | 20 + 0.1 C _B | 300 | ns | |
| | | | 1 MHz mode | — | 100 | ns | |
| IM21 | T _{R:SCL} | SDAx and SCLx Rise Time | 100 kHz mode | — | 1000 | ns | |
| | | | 400 kHz mode | 20 + 0.1 C _B | 300 | ns | |
| | | | 1 MHz mode | — | 300 | ns | |
| IM25 | T _{SU:DAT} | Data Input Setup Time | 100 kHz mode | 250 | — | ns | |
| | | | 400 kHz mode | 100 | — | ns | |
| | | | 1 MHz mode | 100 | — | ns | |
| IM26 | T _{HD:DAT} | Data Input Hold Time | 100 kHz mode | 0 | — | μs | |
| | | | 400 kHz mode | 0 | 0.9 | μs | |
| | | | 1 MHz mode | 0 | 0.3 | μs | |
| IM30 | T _{SU:STA} | Start Condition Setup Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | μs | Only relevant for Repeated Start condition |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | μs | |
| IM31 | T _{HD:STA} | Start Condition Hold Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | μs | After this period, the first clock pulse is generated |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | μs | |
| IM33 | T _{SU:STO} | Stop Condition Setup Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | μs | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | μs | |
| IM34 | T _{HD:STO} | Stop Condition Hold Time | 100 kHz mode | T _{CY} * (BRG + 2) | — | ns | |
| | | | 400 kHz mode | T _{CY} * (BRG + 2) | — | ns | |
| | | | 1 MHz mode | T _{CY} * (BRG + 2) | — | ns | |

.....continued

Operation Conditions (unless otherwise stated):

$$2.0V < V_{DD} < 3.6V$$

$$-40^{\circ}C < T_A < +85^{\circ}C$$

| Param No. | Symbol | Characteristics ⁽¹⁾ | Min. | Max. | Units | Conditions |
|-----------|---------------------|--------------------------------|--------------|------|-------|------------|
| IM40 | T _{AA:SCL} | Output Valid from Clock | 100 kHz mode | — | 3500 | ns |
| | | | 400 kHz mode | — | 1000 | ns |
| | | | 1 MHz mode | — | 350 | ns |
| IM45 | T _{BF:SDA} | Bus Free Time | 100 kHz mode | 4.7 | — | μs |
| | | | 400 kHz mode | 1.3 | — | μs |
| | | | 1 MHz mode | 0.5 | — | μs |
| IM50 | C _B | Bus Capacitive Loading | 100 kHz mode | — | 400 | pF |
| | | | 400 kHz mode | — | 400 | pF |
| | | | 1 MHz mode | — | 10 | pF |
| IM51 | T _{PGD} | Pulse Gobbler Delay | 52 | 312 | ns | |

Note:

- These parameters are characterized but not tested in manufacturing.

Figure 30-15. I²C Bus Start/Stop Bits Timing Characteristics (Client Mode)

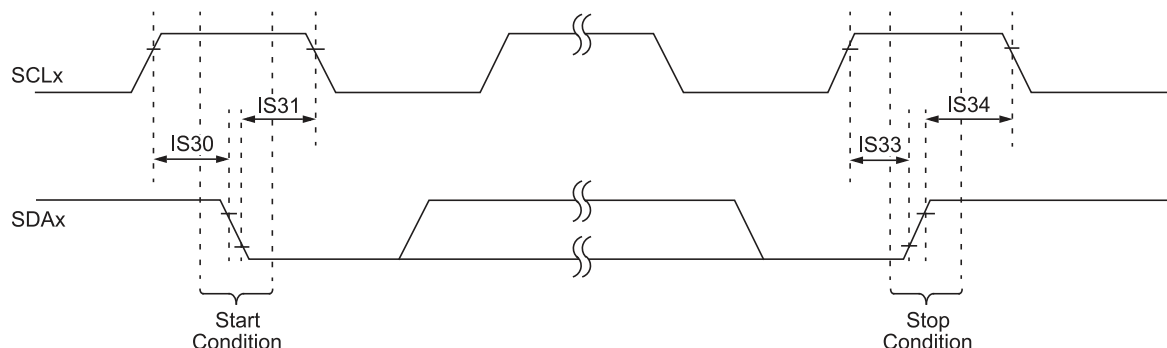


Figure 30-16. I²C Bus Data Timing Characteristics (Client Mode)

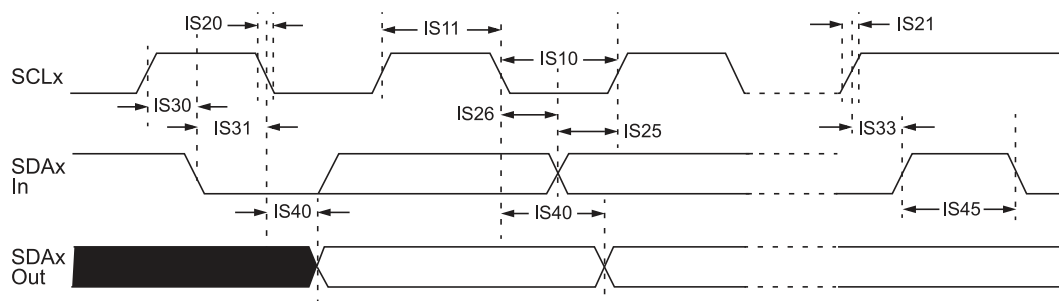


Table 30-28. I²C Bus Data Timing Requirements (Client Mode)

| Operation Conditions (unless otherwise stated): | | | | | | | |
|---|---------------------|----------------------------|--------------|-------------------------|------|-------|---|
| 2.0V < V _{DD} < 3.6V | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristics | | Min. | Max. | Units | Conditions |
| IS10 | T _{LO:SCL} | Clock Low Time | 100 kHz mode | 4.7 | — | μs | CPU clock must be a minimum of 800 kHz |
| | | | 400 kHz mode | 1.3 | — | μs | CPU clock must be a minimum of 3.2 MHz |
| | | | 1 MHz mode | 0.5 | — | μs | |
| IS11 | T _{HI:SCL} | Clock High Time | 100 kHz mode | 4.0 | — | μs | CPU clock must be a minimum of 800 kHz |
| | | | 400 kHz mode | 0.6 | — | μs | CPU clock must be a minimum of 3.2 MHz |
| | | | 1 MHz mode | 0.5 | — | μs | |
| IS20 | T _{F:SCL} | SDAx and SCLx Fall Time | 100 kHz mode | — | 300 | ns | |
| | | | 400 kHz mode | 20 + 0.1 C _B | 300 | ns | |
| | | | 1 MHz mode | — | 100 | ns | |
| IS21 | T _{R:SCL} | SDAx and SCLx Rise Time | 100 kHz mode | — | 1000 | ns | |
| | | | 400 kHz mode | 20 + 0.1 C _B | 300 | ns | |
| | | | 1 MHz mode | — | 300 | ns | |
| IS25 | T _{SU:DAT} | Data Input Setup Time | 100 kHz mode | 250 | — | ns | |
| | | | 400 kHz mode | 100 | — | ns | |
| | | | 1 MHz mode | 100 | — | ns | |
| IS26 | T _{HD:DAT} | Data Input Hold Time | 100 kHz mode | 0 | — | ns | |
| | | | 400 kHz mode | 0 | 0.9 | μs | |
| | | | 1 MHz mode | 0 | 0.3 | μs | |
| IS30 | T _{SU:STA} | Start Condition Setup Time | 100 kHz mode | 4700 | — | ns | Only relevant for Repeated Start condition |
| | | | 400 kHz mode | 600 | — | ns | |
| | | | 1 MHz mode | 250 | — | ns | |
| IS31 | T _{HD:STA} | Start Condition Hold Time | 100 kHz mode | 4000 | — | ns | After this period, the first clock pulse is generated |
| | | | 400 kHz mode | 600 | — | ns | |
| | | | 1 MHz mode | 250 | — | ns | |
| IS33 | T _{SU:STO} | Stop Condition Setup Time | 100 kHz mode | 4000 | — | ns | |
| | | | 400 kHz mode | 600 | — | ns | |
| | | | 1 MHz mode | 600 | — | ns | |

|continued | | | | | | | |
|---|---------------------|--------------------------|--------------|------|------|-------|---|
| Operation Conditions (unless otherwise stated): | | | | | | | |
| 2.0V < V _{DD} < 3.6V | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristics | | Min. | Max. | Units | Conditions |
| IS34 | T _{HD:STO} | Stop Condition Hold Time | 100 kHz mode | 4000 | — | ns | |
| | | | 400 kHz mode | 600 | — | ns | |
| | | | 1 MHz mode | 250 | — | ns | |
| IS40 | T _{AA:SCL} | Output Valid from Clock | 100 kHz mode | 0 | 3500 | ns | |
| | | | 400 kHz mode | 0 | 1000 | ns | |
| | | | 1 MHz mode | 0 | 350 | ns | |
| IS45 | T _{BF:SDA} | Bus Free Time | 100 kHz mode | 4.7 | — | μs | The amount of time the bus must be free before a new transmission can start |
| | | | 400 kHz mode | 1.3 | — | μs | |
| | | | 1 MHz mode | 0.5 | — | μs | |
| IS50 | C _B | Bus Capacitive Loading | 100 kHz mode | — | 400 | pF | |
| | | | 400 kHz mode | — | 400 | pF | |
| | | | 1 MHz mode | — | 10 | pF | |

Table 30-29. A/D Module Specifications⁽³⁾

| Operation Conditions (unless otherwise stated): | | | | | | | |
|---|------------------------------------|-------------------------------|--|------|---|-------|------------|
| 2.0V < V _{DD} < 3.6V | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristic | Min. | Typ. | Max. | Units | Conditions |
| Device Supply | | | | | | | |
| AD01 | AV _{DD} | Module V _{DD} Supply | Greater of: V _{DD} – 0.3 or 2.2 | — | Lesser of: V _{DD} + 0.3 or 3.6 | V | |
| AD02 | AV _{SS} | Module V _{SS} Supply | V _{SS} – 0.3 | — | V _{SS} + 0.3 | V | |
| Reference Inputs | | | | | | | |
| AD05 | V _{REFH} | Reference Voltage High | AV _{SS} + 1.7 | — | AV _{DD} | V | |
| AD06 | V _{REFL} | Reference Voltage Low | AV _{SS} | — | AV _{DD} – 1.7 | V | |
| AD07 | V _{REF} | Absolute Reference Voltage | AV _{SS} – 0.3 | — | AV _{DD} + 0.3 | V | |
| Analog Inputs | | | | | | | |
| AD10 | V _{INH} -V _{INL} | Full-Scale Input Span | V _{REFL} | — | V _{REFH} | V | (Note 2) |
| AD11 | V _{IN} | Absolute Input Voltage | AV _{SS} – 0.3 | — | AV _{DD} + 0.3 | V | |

PIC24FJ64GP205/GU205 Family

Electrical Characteristics

.....continued

Operation Conditions (unless otherwise stated):

$2.0V < V_{DD} < 3.6V$

$-40^{\circ}C < T_A < +85^{\circ}C$

| Param No. | Symbol | Characteristic | Min. | Typ. | Max. | Units | Conditions |
|---------------------|-----------|--|-----------------|-----------|-----------------|----------|---|
| AD12 | V_{INL} | Absolute V_{INL} Input Voltage | $AV_{SS} - 0.3$ | — | $AV_{DD}/3$ | V | |
| AD13 | | Leakage Current | — | ± 1.0 | ± 610 | nA | $V_{INL} = AV_{SS} = V_{REFL} = 0V$, $AV_{DD} = V_{REFH} = 3V$, Source Impedance = 2.5 k Ω |
| AD17 | R_{IN} | Recommended Impedance of Analog Voltage Source | — | — | 2.5k | Ω | 10-bit |
| A/D Accuracy | | | | | | | |
| AD20B | NR | Resolution | — | 12 | — | bits | |
| AD21B | INL | Integral Nonlinearity | — | ± 1 | $< \pm 2$ | LSb | $V_{INL} = AV_{SS} = V_{REFL} = 0V$, $AV_{DD} = V_{REFH} = 3V$ |
| AD22B | DNL | Differential Nonlinearity | — | — | $< \pm 1^{(3)}$ | LSb | $V_{INL} = AV_{SS} = V_{REFL} = 0V$, $AV_{DD} = V_{REFH} = 3V$ |
| AD23B | GERR | Gain Error | -2 | ± 1 | +4 | LSb | $V_{INL} = AV_{SS} = V_{REFL} = 0V$, $AV_{DD} = V_{REFH} = 3V$ |
| AD24B | E_{OFF} | Offset Error | -2 | ± 1 | +5 | LSb | $V_{INL} = AV_{SS} = V_{REFL} = 0V$, $AV_{DD} = V_{REFH} = 3V$ |
| AD25B | | Monotonicity ⁽¹⁾ | — | — | — | — | Guaranteed |

Notes:

1. The A/D conversion result never decreases with an increase in the input voltage.
2. Measurements are taken with the external V_{REF+} and V_{REF-} used as the A/D voltage reference.
3. Codes 511, 1023, 1535 and 2047 can have a DNL error of -1 LSB to $< +1$ LSB, code 2047 can have a DNL error of -1 LSB to $< +2$ LSB. Codes 2559, 3071 and 3583 can have a DNL error of -1 LSB to $< +2.5$ LSB.

Table 30-30. A/D Conversion Timing Requirements⁽¹⁾

| Operation Conditions (unless otherwise stated): | | | | | | | |
|---|-------------------|--|------|--------|------|-----------------|--|
| 2.0V < V _{DD} < 3.6V | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symbol | Characteristic | Min. | Typ | Max. | Units | Conditions |
| Clock Parameters | | | | | | | |
| AD50 | T _{AD} | A/D Clock Period | 178 | — | — | ns | |
| AD51 | t _{RC} | A/D Internal RC Oscillator Period | — | 269.18 | — | ns | |
| Conversion Rate | | | | | | | |
| AD55 | t _{CONV} | SAR Conversion Time, 12-Bit Mode | — | 14 | — | T _{AD} | |
| AD55A | | SAR Conversion Time, 10-Bit Mode is Typical 12 T _{AD} | — | 12 | — | T _{AD} | |
| AD56 | F _{CNV} | Throughput Rate | — | — | 400 | ksps | AV _{DD} > 2.7V ⁽²⁾ |
| AD57 | t _{SAMP} | Sample Time | — | 1 | — | T _{AD} | |
| Clock Synchronization | | | | | | | |
| AD61 | t _{PSS} | Sample Start Delay from Setting Sample bit (SAMP) | 1.5 | — | 2.5 | T _{AD} | |

Notes:

1. Because the sample caps will eventually lose charge, clock rates below 10 kHz can affect linearity performance, especially at elevated temperatures.
2. Throughput rate is based on AD55 + AD57 + AD61 and the period of T_{AD}.

Table 30-31. 10-Bit DAC Specifications⁽¹⁾

| Operation Conditions (unless otherwise stated): | | | | | | | |
|---|------|--|------|------|------------------|-------|----------|
| V _{DD} = AV _{DD} = DV _{REF+} = 3.3V, | | | | | | | |
| 3 kΩ Load to V _{SS} , | | | | | | | |
| -40°C < T _A < +85°C | | | | | | | |
| Param No. | Symb | Characteristic ⁽³⁾ | Min. | Typ. | Max. | Units | Comments |
| DAC01 | | Resolution | 10 | — | — | bits | |
| DAC02 | | DV _{REF+} Input Voltage Range | — | — | AV _{DD} | V | |
| DAC03 | DNL | Differentially Linearity Error | -1 | — | +1 | LSb | |
| DAC04 | INL | Integral Linearity Error | -3.0 | — | +3.0 | LSb | |
| DAC05 | | Offset Error | -20 | — | +20 | mV | |
| DAC06 | | Gain Error | -3.0 | — | +3.0 | LSb | |

PIC24FJ64GP205/GU205 Family

Electrical Characteristics

.....continued

Operation Conditions (unless otherwise stated):

$$V_{DD} = AV_{DD} = DV_{REF+} = 3.3V,$$

3 k Ω Load to V_{SS} ,

$$-40^{\circ}\text{C} < T_A < +85^{\circ}\text{C}$$

| Param No. | Symb | Characteristic ⁽³⁾ | Min. | Typ. | Max. | Units | Comments |
|-----------|------|---|----------------|------|----------------|------------|--|
| DAC07 | | Monotonicity | Note 2 | | | — | |
| DAC08 | | Maximum Output Voltage Swing | $AV_{SS} + 20$ | — | $AV_{DD} - 20$ | mV | No output load |
| DAC09 | | Slew Rate | — | 3.8 | — | V/ μ s | |
| DAC10 | | Settling Time | — | 0.9 | V | μ s | Within $\frac{1}{2}$ LSb of final value, transition from $\frac{1}{4}$ to $\frac{3}{4}$ full-scale range |
| DAC11 | | Maximum Continuous Output Current Rating (DC or AC RMS) | — | — | 6 | mA | This value is not tested in production |
| DAC12 | | AV_{DD} Quiescent Current | — | 700 | — | μ A | Module enabled, DAC reference = AV_{DD} , no output load |
| DAC13 | | DV_{REF+} Quiescent Current | — | 330 | — | μ A | Module enabled, DAC reference = DV_{REF+} |

Notes:

1. Unless otherwise stated, test conditions are with $V_{DD} = AV_{DD} = DV_{REF+} = 3.3V$, 3 k Ω load to V_{SS} .
2. DAC output voltage never decreases with an increase in the data code.
3. These parameters are characterized but not tested in manufacturing.

Table 30-32. USB OTG Electrical Specifications

| Operation Conditions (unless otherwise stated): | | | | | | |
|---|--------------|-----------------------------------|------|------|----------|--|
| $2.0V < V_{DD} < 3.6V$ | | | | | | |
| $-40^{\circ}C < T_A < +85^{\circ}C$ | | | | | | |
| Param No. | Symbol | Characteristics ⁽¹⁾ | Min. | Max. | Units | Conditions |
| USB313 | V_{USB3V3} | USB Voltage | 3.0 | 3.6 | V | Voltage on V_{USB3V3} must be in this range for proper USB operation |
| USB315 | V_{ILUSB} | Input Low Voltage for USB Buffer | — | 0.8 | V | |
| USB316 | V_{IHUSB} | Input High Voltage for USB Buffer | 2.0 | — | V | |
| USB318 | V_{DIFS} | Differential Input Sensitivity | — | 0.2 | V | The difference between D+ and D- must exceed this value while VCM is met |
| USB319 | VCM | Differential Common-Mode Range | 0.8 | 2.5 | V | |
| USB320 | Z_{OUT} | Driver Output Impedance | 28.0 | 44.0 | Ω | |
| USB321 | V_{OL} | Voltage Output Low | 0.0 | 0.3 | V | 14.25 k Ω load connected to 3.6V |
| USB322 | V_{OH} | Voltage Output High | 2.8 | 3.6 | V | 14.25 k Ω load connected to ground |


Note:

1. These parameters are characterized but not tested in manufacturing.

31. Package Information

31.1 Package Marking Information

28-Lead SOIC



Example




28-Lead SSOP



Example




28-Lead QFN (6 x 6 mm)



Example




28-Lead UQFN (6x6 mm)




Example



36-Lead UQFN (5x5 mm)



Example




Legend: XX...X Customer-specific information
Y Year code (last digit of calendar year)
YY Year code (last 2 digits of calendar year)
WW Week code (week of January 1 is week '01')
NNN Alphanumeric traceability code


Note: In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information.

31.2 Package Marking Information (Continued)


48-Lead UQFN (6x6 mm)




Example



48-Lead TQFP (7x7x1.0 mm)




Example



31.3 Package Details

28-Lead Plastic Quad Flat, No Lead Package (ML) - 6x6 mm Body [QFN] With 0.55 mm Terminal Length

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

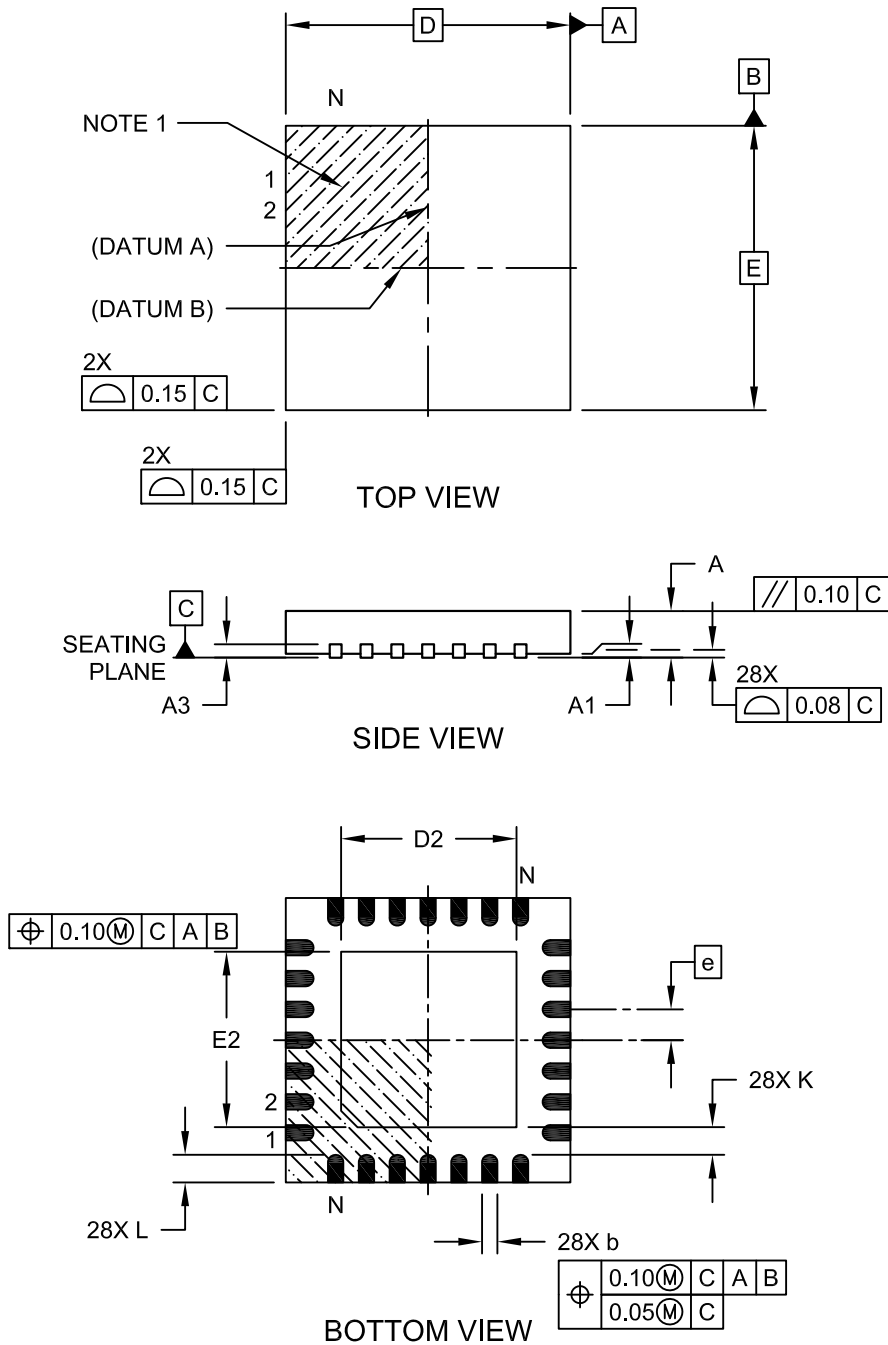


Microchip Technology Drawing C04-105C Sheet 1 of 2

PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Quad Flat, No Lead Package (ML) - 6x6 mm Body [QFN] With 0.55 mm Terminal Length

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

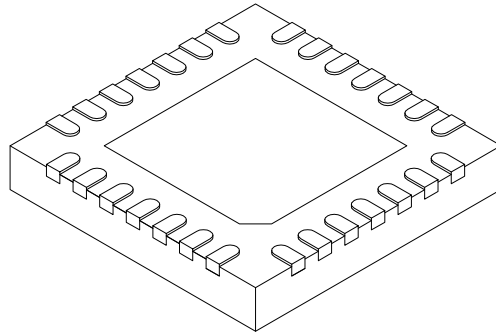

| Dimension | Units | MILLIMETERS | | |
|-------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Number of Pins | N | 28 | | |
| Pitch | e | 0.65 BSC | | |
| Overall Height | A | 0.80 | 0.90 | 1.00 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | 0.20 REF | | |
| Overall Width | E | 6.00 BSC | | |
| Exposed Pad Width | E2 | 3.65 | 3.70 | 4.20 |
| Overall Length | D | 6.00 BSC | | |
| Exposed Pad Length | D2 | 3.65 | 3.70 | 4.20 |
| Terminal Width | b | 0.23 | 0.30 | 0.35 |
| Terminal Length | L | 0.50 | 0.55 | 0.70 |
| Terminal-to-Exposed Pad | K | 0.20 | - | - |


Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M.
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-105C Sheet 2 of 2

28-Lead Plastic Quad Flat, No Lead Package (ML) – 6x6 mm Body [QFN] with 0.55 mm Contact Length

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

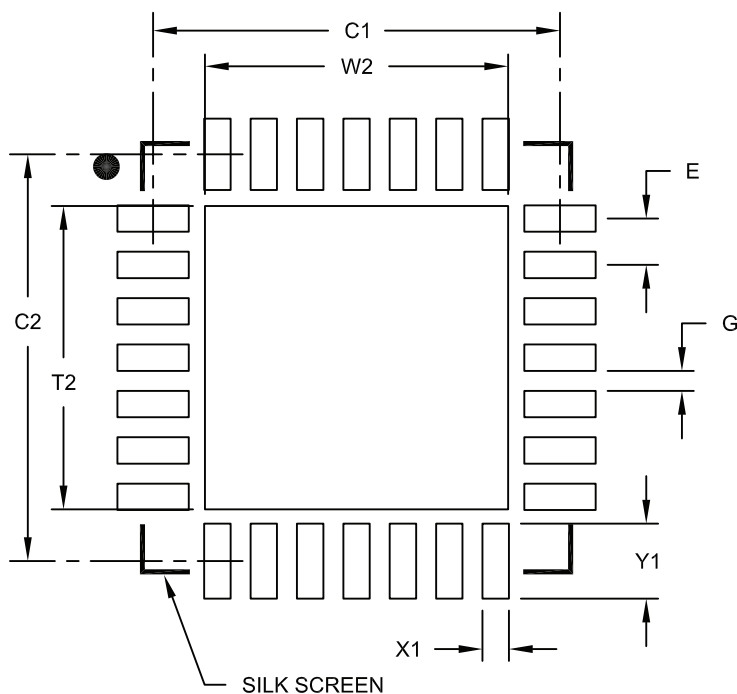

RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|----------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.65 BSC | | |
| Optional Center Pad Width | W2 | | | 4.25 |
| Optional Center Pad Length | T2 | | | 4.25 |
| Contact Pad Spacing | C1 | | 5.70 | |
| Contact Pad Spacing | C2 | | 5.70 | |
| Contact Pad Width (X28) | X1 | | | 0.37 |
| Contact Pad Length (X28) | Y1 | | | 1.00 |
| Distance Between Pads | G | 0.20 | | |

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2105A

28-Lead Plastic Ultra Thin Quad Flat, No Lead Package (MV) – 4x4x0.5 mm Body [UQFN]


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

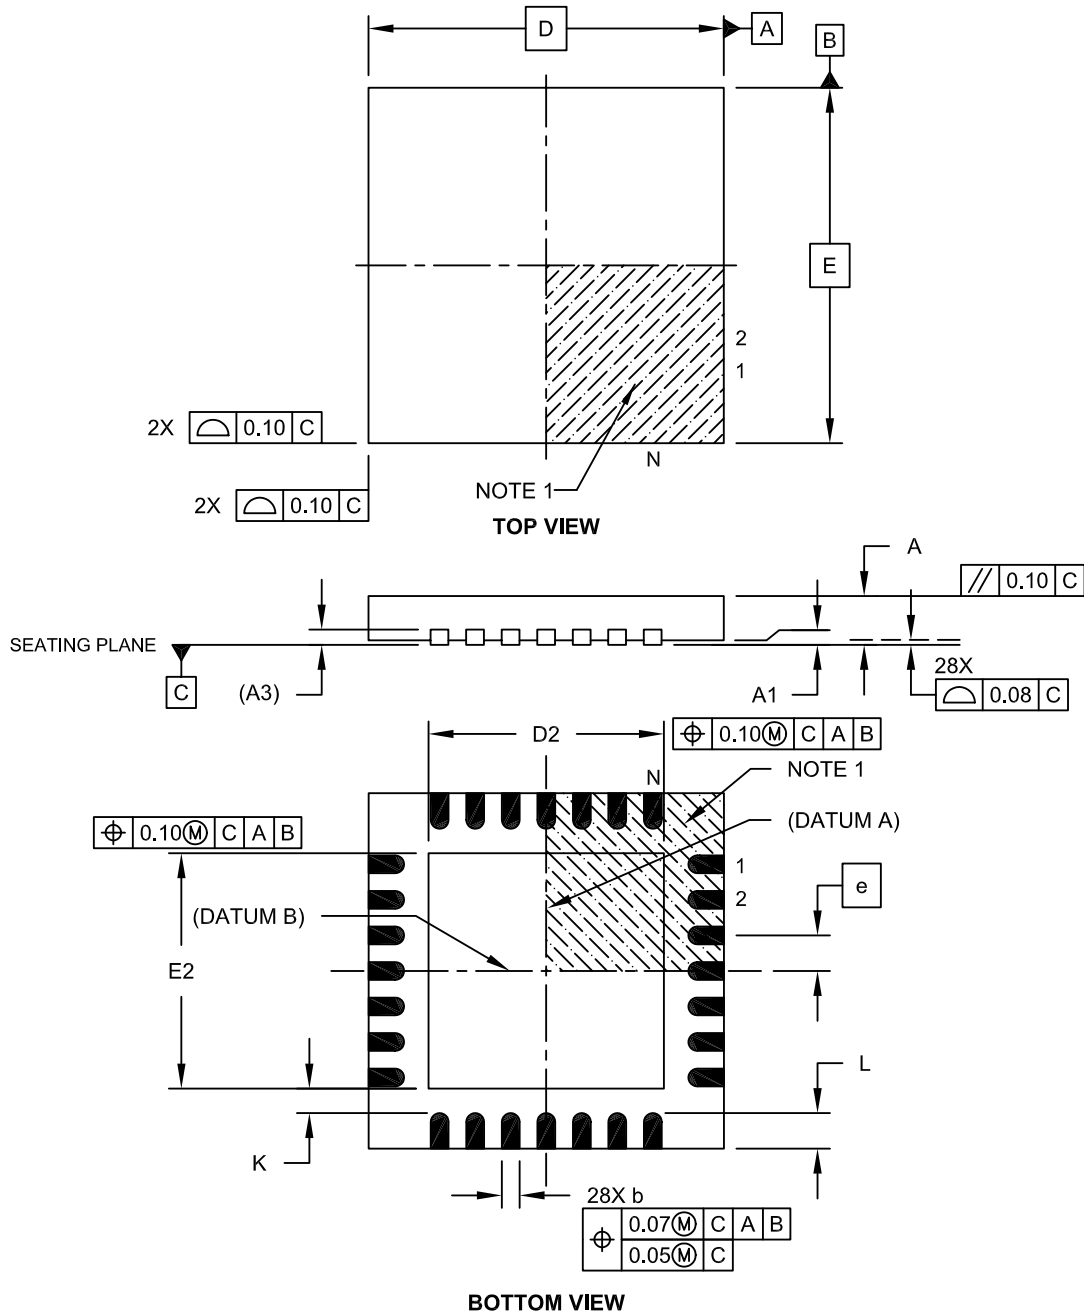

Microchip Technology Drawing C04-152A Sheet 1 of 2

28-Lead Plastic Ultra Thin Quad Flat, No Lead Package (MV) – 4x4x0.5 mm Body [UQFN]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packageing>

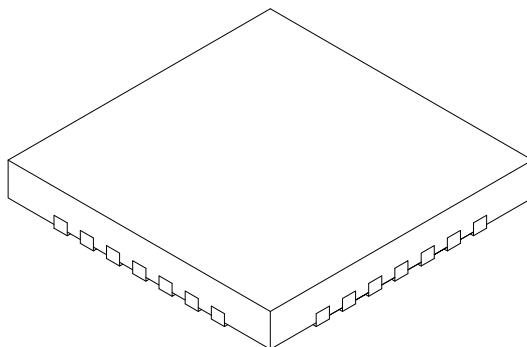

| Units | | MILLIMETERS | | |
|------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Pins | N | 28 | | |
| Pitch | e | 0.40 BSC | | |
| Overall Height | A | 0.45 | 0.50 | 0.55 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Contact Thickness | A3 | 0.127 REF | | |
| Overall Width | E | 4.00 BSC | | |
| Exposed Pad Width | E2 | 2.55 | 2.65 | 2.75 |
| Overall Length | D | 4.00 BSC | | |
| Exposed Pad Length | D2 | 2.55 | 2.65 | 2.75 |
| Contact Width | b | 0.15 | 0.20 | 0.25 |
| Contact Length | L | 0.30 | 0.40 | 0.50 |
| Contact-to-Exposed Pad | K | 0.20 | - | - |

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated.
- Dimensioning and tolerancing per ASME Y14.5M.


BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-152A Sheet 2 of 2

28-Lead Ultra Thin Plastic Quad Flat, No Lead Package (MV) - 4x4 mm Body [UQFN]
With 0.40 mm Contact Length

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

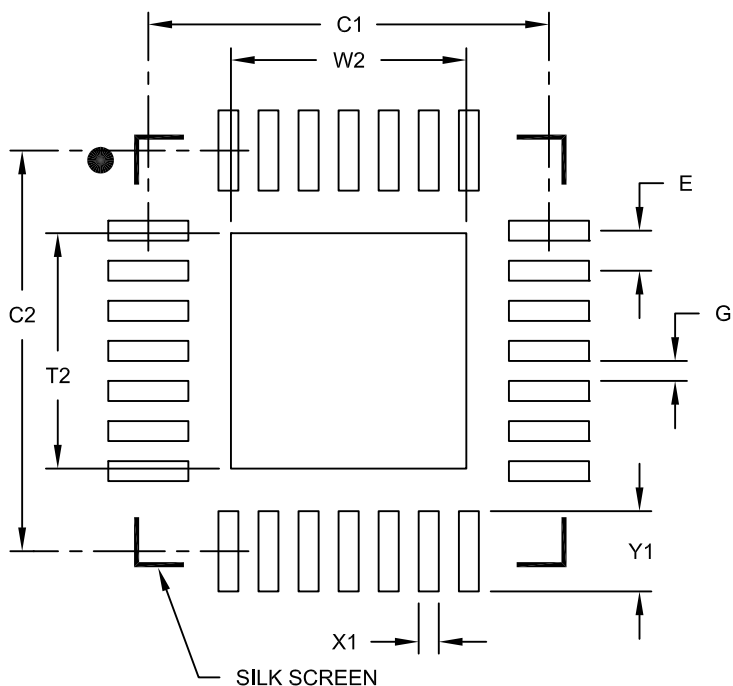

RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|----------------------------|--------|-------------|------|------|
| Dimension | Limits | MIN | NOM | MAX |
| Contact Pitch | E | 0.40 BSC | | |
| Optional Center Pad Width | W2 | | | 2.35 |
| Optional Center Pad Length | T2 | | | 2.35 |
| Contact Pad Spacing | C1 | | 4.00 | |
| Contact Pad Spacing | C2 | | 4.00 | |
| Contact Pad Width (X28) | X1 | | | 0.20 |
| Contact Pad Length (X28) | Y1 | | | 0.80 |
| Distance Between Pads | G | 0.20 | | |

Notes:


1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

Microchip Technology Drawing No. C04-2152A

Package Information

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>


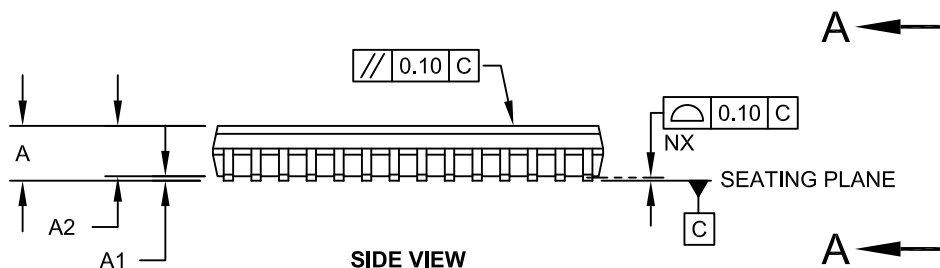


PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Small Outline (SO) - Wide, 7.50 mm Body [SOIC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

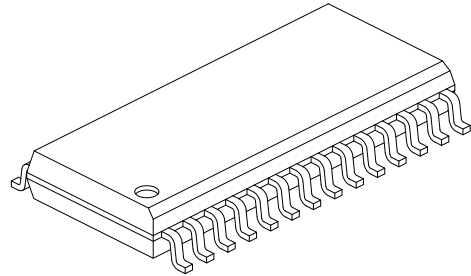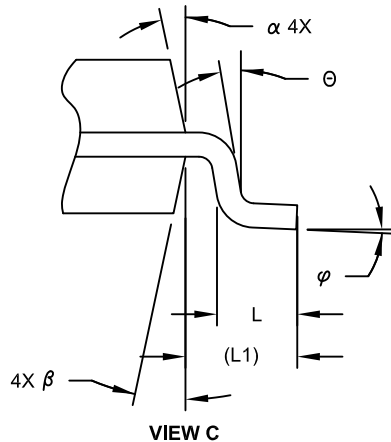

| | | Units | MILLIMETERS | | |
|--------------------------|----|-------|-------------|-----|------|
| Dimension Limits | | | MIN | NOM | MAX |
| Number of Pins | N | | 28 | | |
| Pitch | e | | 1.27 BSC | | |
| Overall Height | A | | - | - | 2.65 |
| Molded Package Thickness | A2 | | 2.05 | - | - |
| Standoff § | A1 | | 0.10 | - | 0.30 |
| Overall Width | E | | 10.30 BSC | | |
| Molded Package Width | E1 | | 7.50 BSC | | |
| Overall Length | D | | 17.90 BSC | | |
| Chamfer (Optional) | h | | 0.25 | - | 0.75 |
| Foot Length | L | | 0.40 | - | 1.27 |
| Footprint | L1 | | 1.40 REF | | |
| Lead Angle | Θ | | 0° | - | - |
| Foot Angle | φ | | 0° | - | 8° |
| Lead Thickness | c | | 0.18 | - | 0.33 |
| Lead Width | b | | 0.31 | - | 0.51 |
| Mold Draft Angle Top | α | | 5° | - | 15° |
| Mold Draft Angle Bottom | β | | 5° | - | 15° |

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- § Significant Characteristic
- Dimension D does not include mold flash, protrusions or gate burrs, which shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion, which shall not exceed 0.25 mm per side.
- Dimensioning and tolerancing per ASME Y14.5M
 - BSC: Basic Dimension. Theoretically exact value shown without tolerances.
 - REF: Reference Dimension, usually without tolerance, for information purposes only.
- Datums A & B to be determined at Datum H.


Microchip Technology Drawing C04-052C Sheet 2 of 2

PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Small Outline (SO) - Wide, 7.50 mm Body [SOIC]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

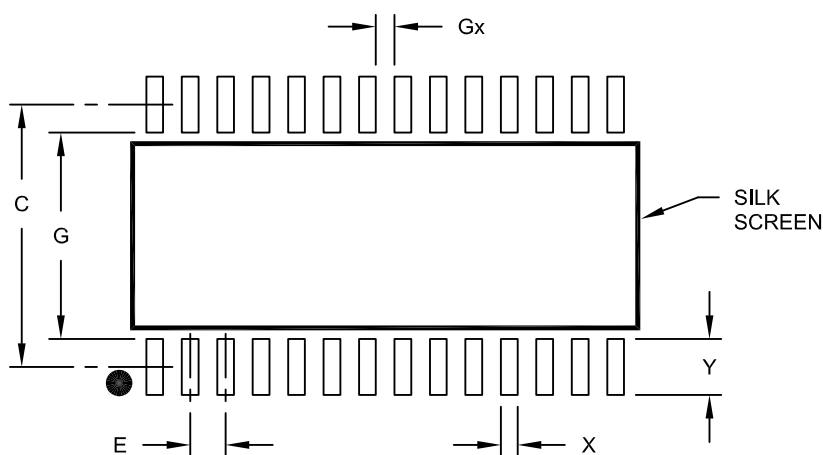

RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|--------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 1.27 BSC | | |
| Contact Pad Spacing | C | | 9.40 | |
| Contact Pad Width (X28) | X | | | 0.60 |
| Contact Pad Length (X28) | Y | | | 2.00 |
| Distance Between Pads | Gx | 0.67 | | |
| Distance Between Pads | G | 7.40 | | |

Notes:

1. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.


Microchip Technology Drawing No. C04-2052A

PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

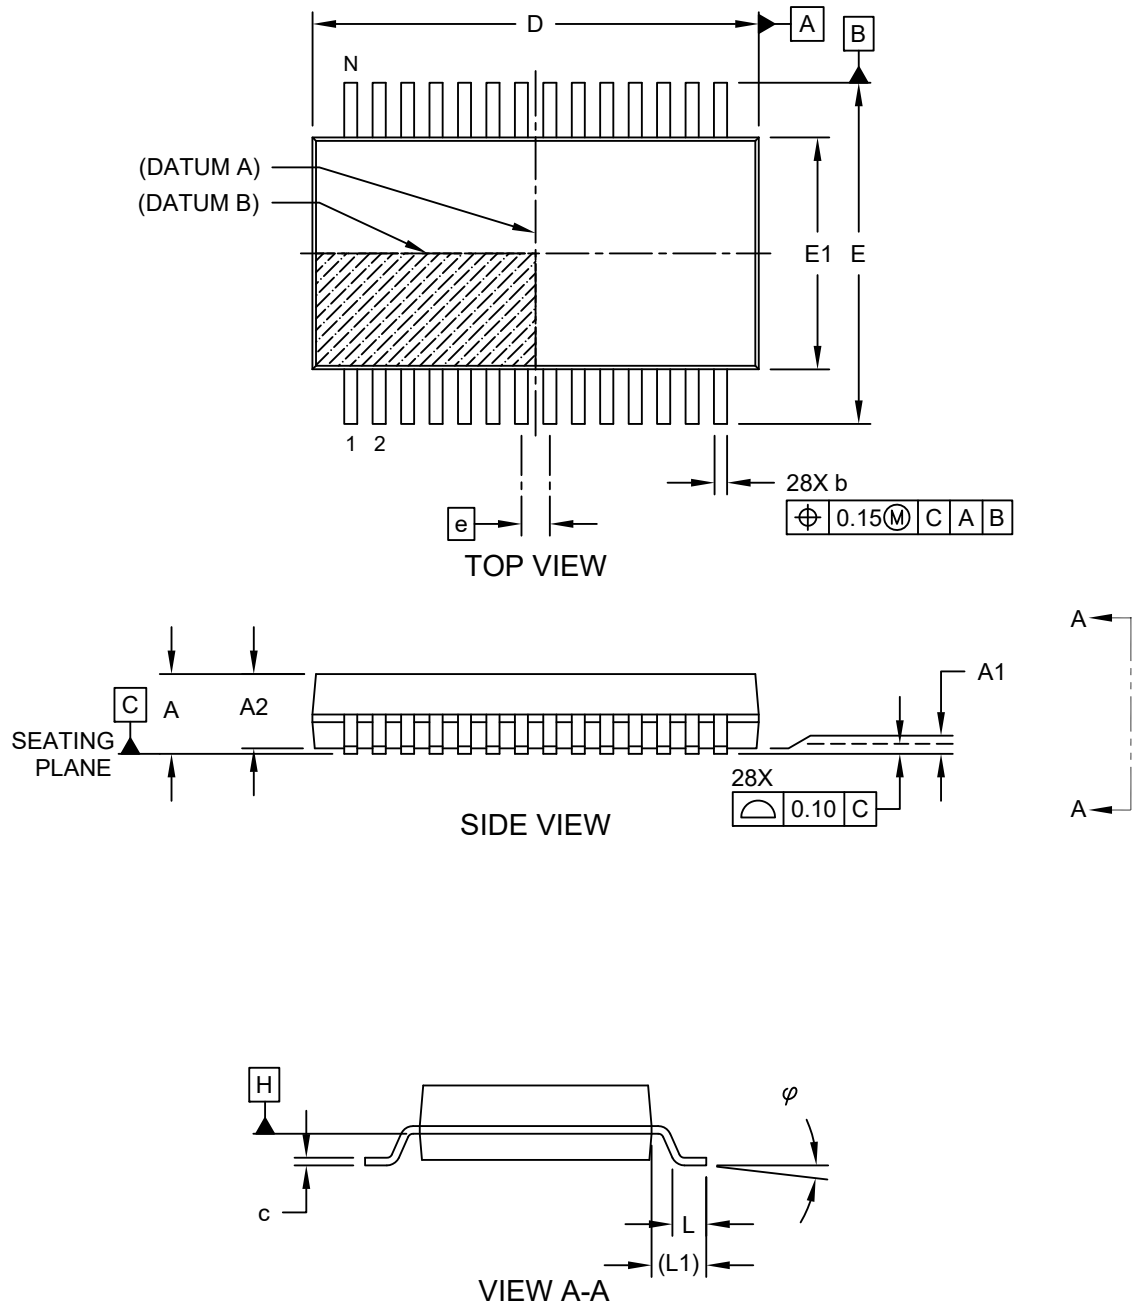


Microchip Technology Drawing C04-073 Rev C Sheet 1 of 2

PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

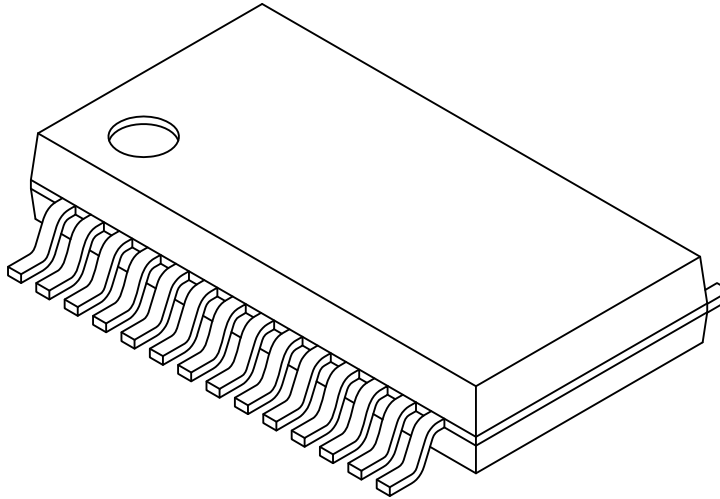

| | | Units | MILLIMETERS | | |
|--------------------------|----|-------|-------------|-------|-------|
| Dimension Limits | | | MIN | NOM | MAX |
| Number of Pins | N | | 28 | | |
| Pitch | e | | 0.65 BSC | | |
| Overall Height | A | | - | - | 2.00 |
| Molded Package Thickness | A2 | | 1.65 | 1.75 | 1.85 |
| Standoff | A1 | | 0.05 | - | - |
| Overall Width | E | | 7.40 | 7.80 | 8.20 |
| Molded Package Width | E1 | | 5.00 | 5.30 | 5.60 |
| Overall Length | D | | 9.90 | 10.20 | 10.50 |
| Foot Length | L | | 0.55 | 0.75 | 0.95 |
| Footprint | L1 | | 1.25 REF | | |
| Lead Thickness | c | | 0.09 | - | 0.25 |
| Foot Angle | φ | | 0° | 4° | 8° |
| Lead Width | b | | 0.22 | - | 0.38 |

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensions D and E1 do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.20mm per side.
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-073 Rev C Sheet 2 of 2

PIC24FJ64GP205/GU205 Family

Package Information

28-Lead Plastic Shrink Small Outline (SS) - 5.30 mm Body [SSOP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packageing>

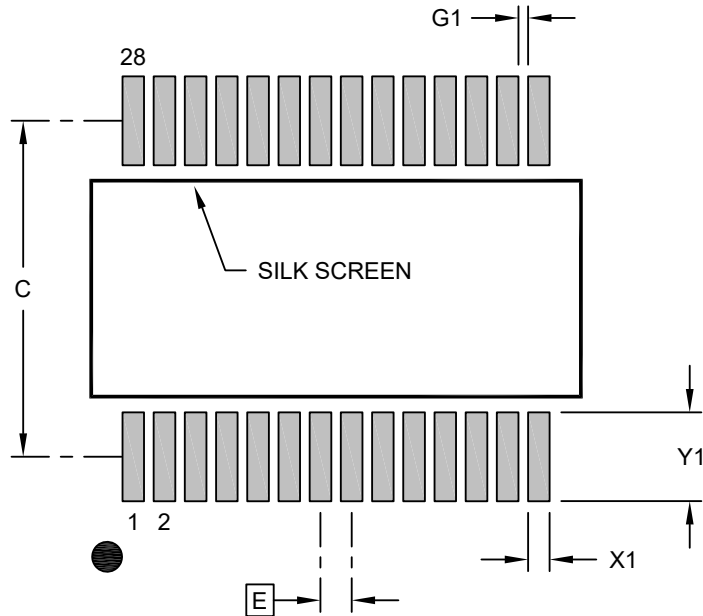

RECOMMENDED LAND PATTERN

| Dimension Limits | Units | MILLIMETERS | | |
|---------------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Contact Pitch | E | 0.65 BSC | | |
| Contact Pad Spacing | C | | 7.00 | |
| Contact Pad Width (X28) | X1 | | | 0.45 |
| Contact Pad Length (X28) | Y1 | | | 1.85 |
| Contact Pad to Center Pad (X26) | G1 | 0.20 | | |


Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2073 Rev B

Package Information

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>




PIC24FJ64GP205/GU205 Family

Package Information

36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN]

With Corner Anchors

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

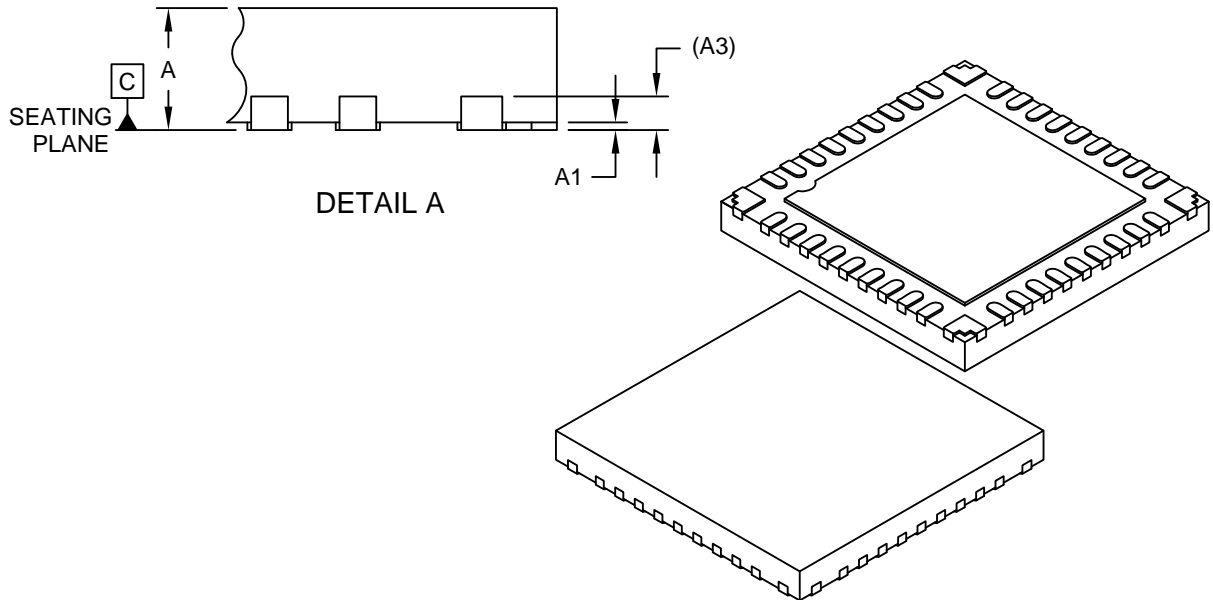

| Units | | MILLIMETERS | | |
|-------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | 36 | | |
| Pitch | e | 0.40 BSC | | |
| Overall Height | A | 0.50 | 0.55 | 0.60 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | 0.152 REF | | |
| Overall Length | D | 5.00 BSC | | |
| Exposed Pad Length | D2 | 3.60 | 3.70 | 3.80 |
| Overall Width | E | 5.00 BSC | | |
| Exposed Pad Width | E2 | 3.60 | 3.70 | 3.80 |
| Terminal Width | b | 0.15 | 0.20 | 0.25 |
| Terminal Length | L | 0.30 | 0.40 | 0.50 |
| Terminal-to-Exposed-Pad | K | 0.25 REF | | |

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Package is saw singulated
- Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-436-M5 Rev B Sheet 2 of 2

PIC24FJ64GP205/GU205 Family

Package Information

36-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M5) - 5x5 mm Body [UQFN] With Corner Anchors

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

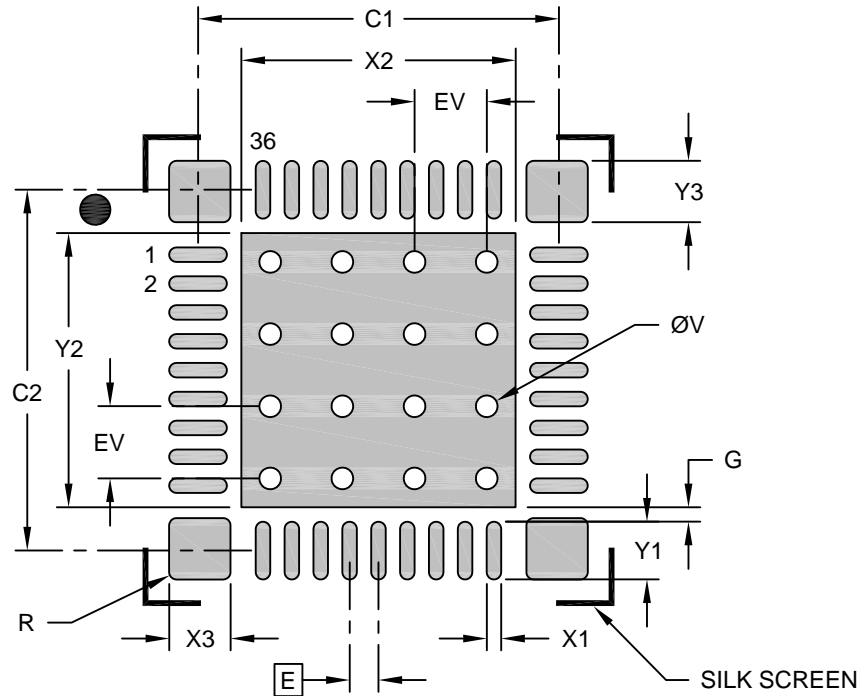

RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|---------------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.40 BSC | | |
| Center Pad Width | X2 | | | 3.80 |
| Center Pad Length | Y2 | | | 3.80 |
| Contact Pad Spacing | C1 | | 5.00 | |
| Contact Pad Spacing | C2 | | 5.00 | |
| Contact Pad Width (X36) | X1 | | | 0.20 |
| Contact Pad Length (X36) | Y1 | | | 0.80 |
| Corner Pad Width (X4) | X3 | | | 0.85 |
| Corner Pad Length (X4) | Y3 | | | 0.85 |
| Corner Pad Radius | R | | 0.10 | |
| Contact Pad to Center Pad (X36) | G | 0.20 | | |
| Thermal Via Diameter | V | | 0.30 | |
| Thermal Via Pitch | EV | | 1.00 | |


Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2436-M5 Rev B

48-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M4) - 6x6 mm Body [UQFN] With Corner Anchors and 4.6x4.6 mm Exposed Pad


Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

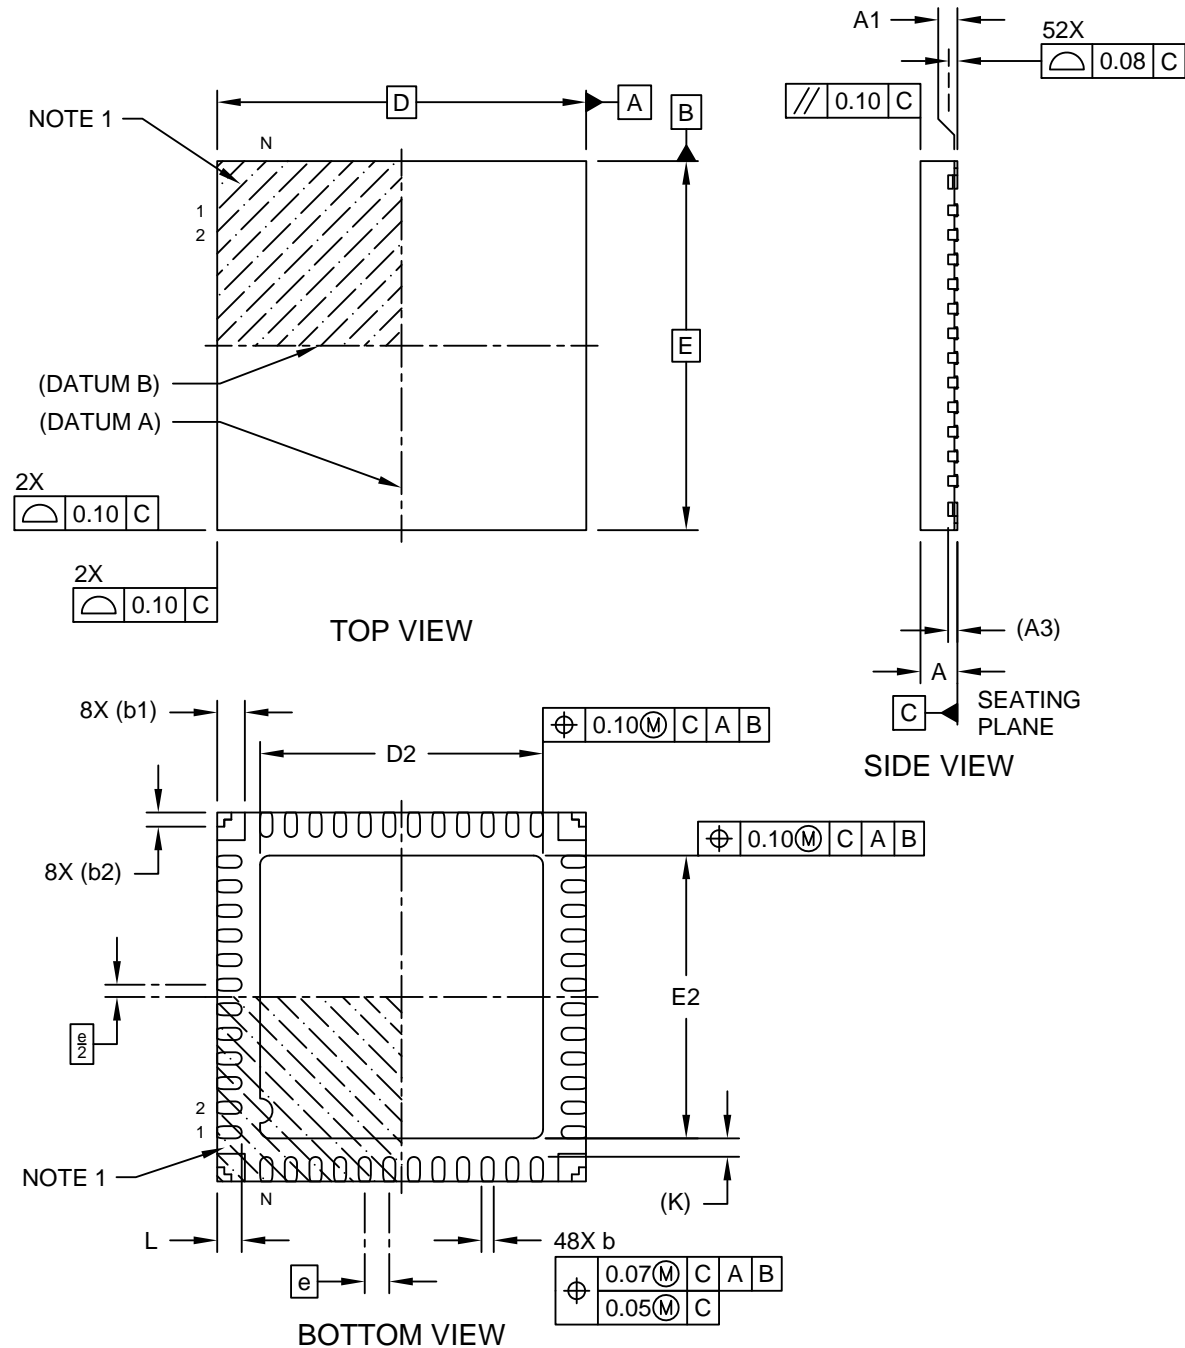

Microchip Technology Drawing C04-442A-M4 Sheet 1 of 2

48-Lead Ultra Thin Plastic Quad Flat, No Lead Package (M4) - 6x6 mm Body [UQFN] With Corner Anchors and 4.6x4.6 mm Exposed Pad

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

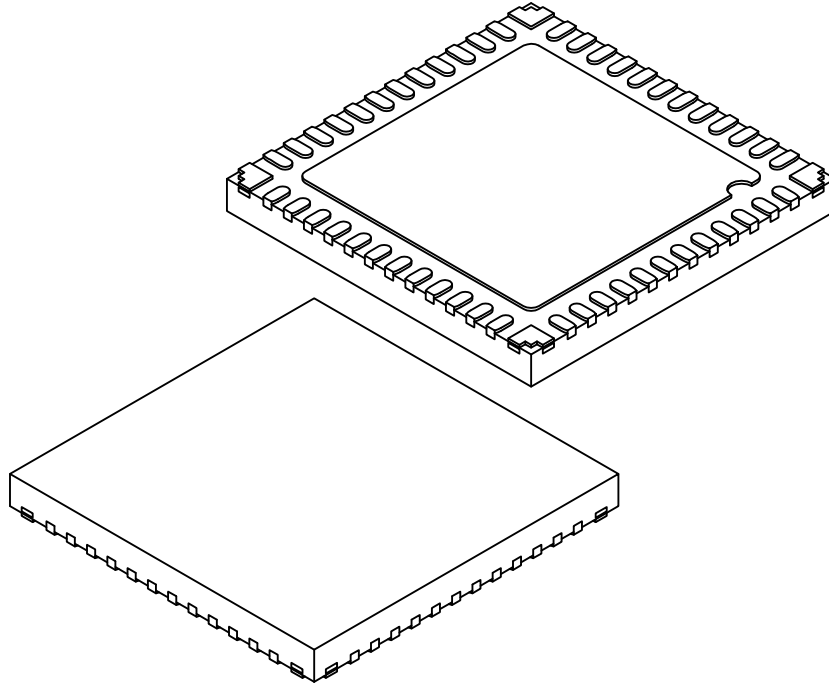

| Units | | MILLIMETERS | | |
|------------------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Number of Terminals | N | 48 | | |
| Pitch | e | 0.40 BSC | | |
| Overall Height | A | 0.50 | 0.55 | 0.60 |
| Standoff | A1 | 0.00 | 0.02 | 0.05 |
| Terminal Thickness | A3 | 0.15 REF | | |
| Overall Length | D | 6.00 BSC | | |
| Exposed Pad Length | D2 | 4.50 | 4.60 | 4.70 |
| Overall Width | E | 6.00 BSC | | |
| Exposed Pad Width | E2 | 4.50 | 4.60 | 4.70 |
| Terminal Width | b | 0.15 | 0.20 | 0.25 |
| Corner Anchor Pad | b1 | 0.45 REF | | |
| Corner Anchor Pad, Metal-free Zone | b2 | 0.23 REF | | |
| Terminal Length | L | 0.35 | 0.40 | 0.45 |
| Terminal-to-Exposed-Pad | K | 0.30 REF | | |

Notes:

1. Pin 1 visual index feature may vary, but must be located within the hatched area.
2. Package is saw singulated
3. Dimensioning and tolerancing per ASME Y14.5M

BSC: Basic Dimension. Theoretically exact value shown without tolerances.

REF: Reference Dimension, usually without tolerance, for information purposes only.

Microchip Technology Drawing C04-442A-M4 Sheet 2 of 2

Package Information

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>



Notes:

1. Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
2. For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process


Microchip Technology Drawing C04-2442A-M4

PIC24FJ64GP205/GU205 Family

Package Information

48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

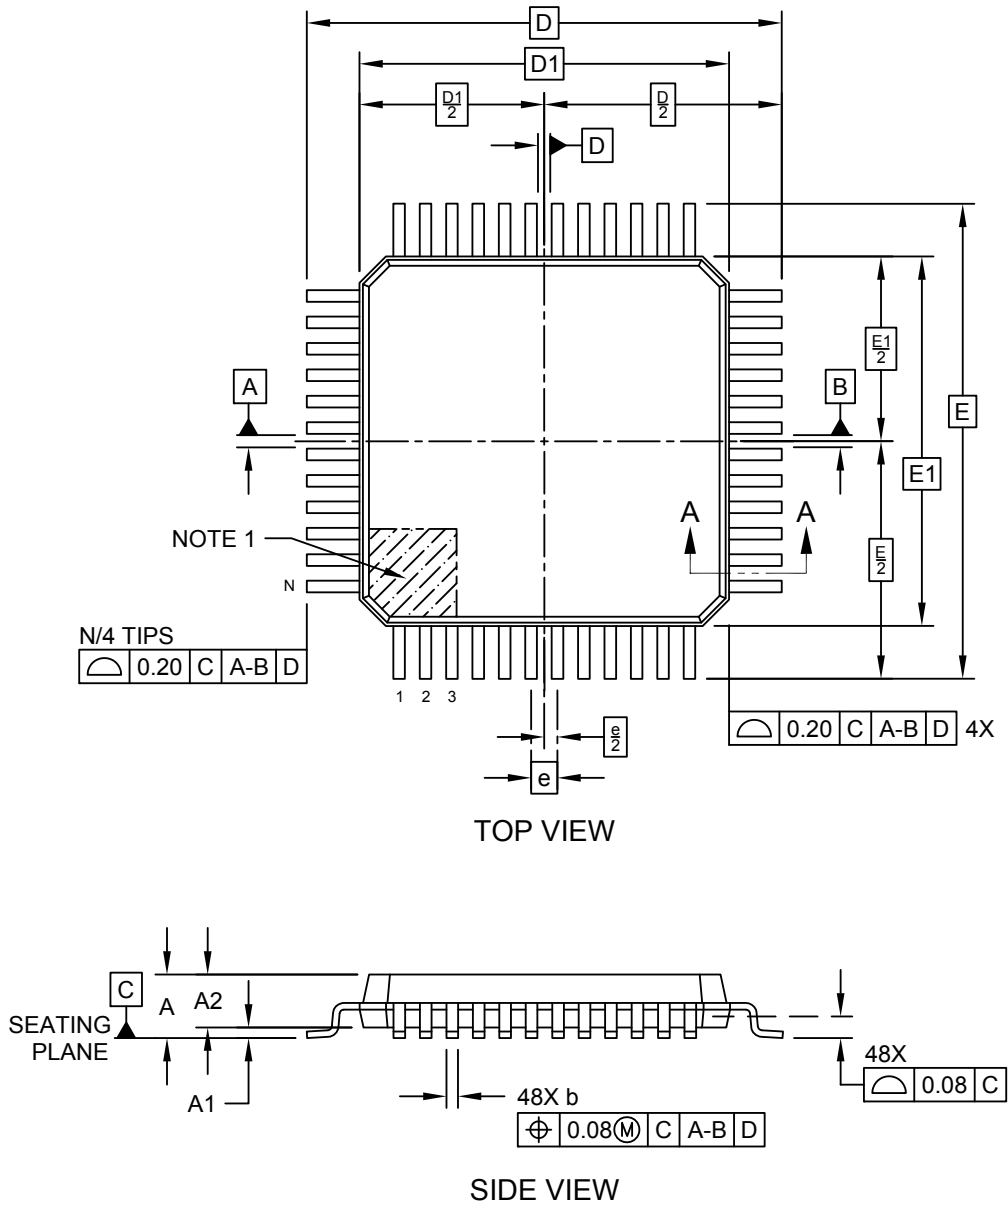


Microchip Technology Drawing C04-300-PT Rev D Sheet 1 of 2

PIC24FJ64GP205/GU205 Family

Package Information

48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

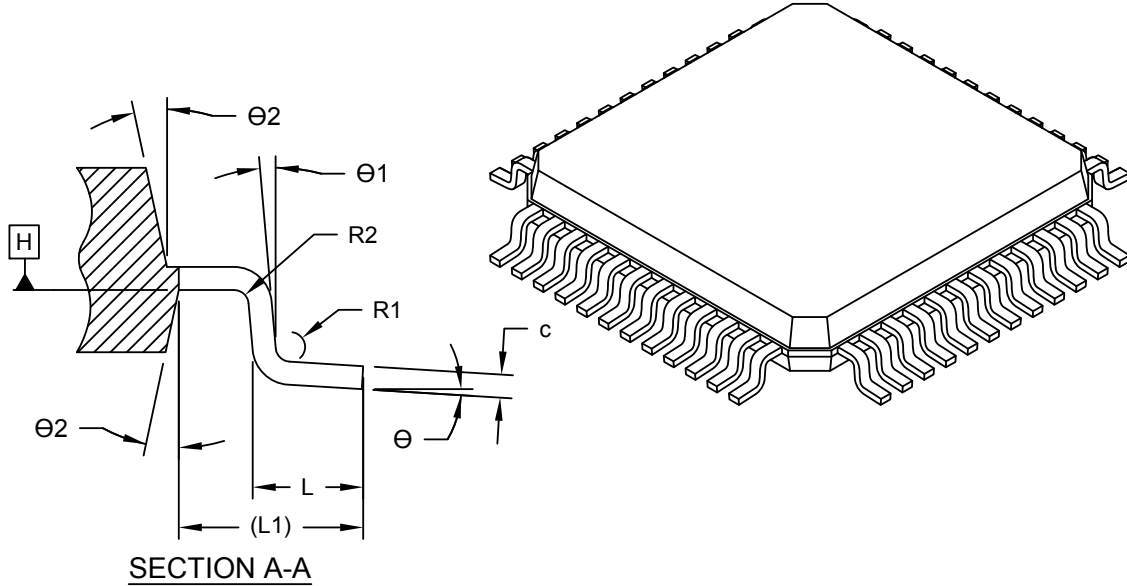

| Dimension Limits | Units | MILLIMETERS | | |
|--------------------------|-------|-------------|------|------|
| | | MIN | NOM | MAX |
| Number of Terminals | N | 48 | | |
| Pitch | e | 0.50 BSC | | |
| Overall Height | A | - | - | 1.20 |
| Standoff | A1 | 0.05 | - | 0.15 |
| Molded Package Thickness | A2 | 0.95 | 1.00 | 1.05 |
| Overall Length | D | 9.00 BSC | | |
| Molded Package Length | D1 | 7.00 BSC | | |
| Overall Width | E | 9.00 BSC | | |
| Molded Package Width | E1 | 7.00 BSC | | |
| Terminal Width | b | 0.17 | 0.22 | 0.27 |
| Terminal Thickness | c | 0.09 | - | 0.16 |
| Terminal Length | L | 0.45 | 0.60 | 0.75 |
| Footprint | L1 | 1.00 REF | | |
| Lead Bend Radius | R1 | 0.08 | - | - |
| Lead Bend Radius | R2 | 0.08 | - | 0.20 |
| Foot Angle | Θ | 0° | 3.5° | 7° |
| Lead Angle | Θ1 | 0° | - | - |
| Mold Draft Angle | Θ2 | 11° | 12° | 13° |

Notes:

- Pin 1 visual index feature may vary, but must be located within the hatched area.
- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
REF: Reference Dimension, usually without tolerance, for information purposes only.


Microchip Technology Drawing C04-300-PT Rev D Sheet 2 of 2

PIC24FJ64GP205/GU205 Family

Package Information

48-Lead Plastic Thin Quad Flatpack (PT) - 7x7x1.0 mm Body [TQFP]

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>

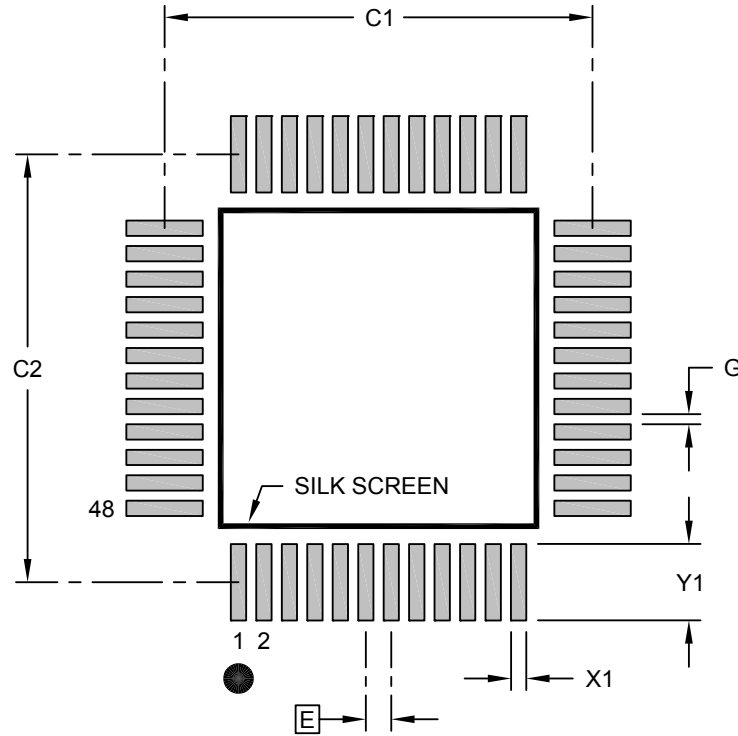

RECOMMENDED LAND PATTERN

| Units | | MILLIMETERS | | |
|--------------------------|----|-------------|------|------|
| Dimension Limits | | MIN | NOM | MAX |
| Contact Pitch | E | 0.50 BSC | | |
| Contact Pad Spacing | C1 | | 8.40 | |
| Contact Pad Spacing | C2 | | 8.40 | |
| Contact Pad Width (X48) | X1 | | | 0.30 |
| Contact Pad Length (X48) | Y1 | | | 1.50 |
| Distance Between Pads | G | 0.20 | | |

Notes:

- Dimensioning and tolerancing per ASME Y14.5M
BSC: Basic Dimension. Theoretically exact value shown without tolerances.
- For best soldering results, thermal vias, if used, should be filled or tented to avoid solder loss during reflow process

Microchip Technology Drawing C04-2300-PT Rev D

32. Revision History

32.1 Revision A (April 2020)

This is the initial version of the document.

32.2 Revision B (August 2020)

This revision incorporates the following updates:

- Sections:
 - Updates [2.1. Basic Connection Requirements](#) and [10.3. Doze Mode](#).
 -
- Registers:
 - Updates [8.3.9. IFS3](#), [8.3.10. IFS4](#), [8.3.11. IFS5](#), [8.3.12. IFS6](#), [8.3.13. IFS7](#), [8.3.27. IPC5](#), [8.3.16. IEC2](#), [8.3.17. IEC3](#), [8.3.18. IEC4](#), [8.3.19. IEC5](#), [8.3.13. IFS7](#), [8.3.27. IPC5](#), [8.3.28. IPC7](#), [8.3.31. IPC11](#), [8.3.32. IPC12](#), [8.3.33. IPC13](#), [8.3.34. IPC14](#), [8.3.35. IPC15](#), [8.3.37. IPC18](#), [8.3.38. IPC21](#), [8.3.39. IPC23](#), [8.3.42. IPC27](#), [8.3.43. IPC29](#), [8.3.44. INTTREG](#), [9.10.2. OSCTUN](#), [10.5.1. PMD1](#), [10.5.2. PMD3](#), [10.5.3. PMD4](#), [10.5.4. PMD5](#), [10.5.5. PMD7](#), [10.5.6. PMD8](#), [14.6.1. CCP1CON1L](#), [14.6.2. CCP1CON1H](#), [14.6.16. CCP2CON1L](#), [14.6.17. CCP2CON1H](#), [14.6.18. CCP2CON2L](#), [14.6.31. CCP3CON1L](#), [14.6.32. CCP3CON1H](#), [14.6.31. CCP3CON1L](#), [14.6.45. CCP4CON1H](#), [14.6.46. CCP4CON2L](#), [14.6.60. CCP5CON1H](#), [14.6.61. CCP5CON2L](#), [15.5.2. SPI1CON1H](#), [15.5.14. SPI2CON1H](#), [16.4.1. I2C1RCV](#), [20.1.4. CLC1SEL](#), [20.1.5. CLC1GLSL](#), [20.1.9. CLC2SEL](#), [20.1.14. CLC3SEL](#), [20.1.19. CLC4SEL](#), [21.4.16. AD1CON2](#) and [22.1.1. CMSTAT](#).
 - Adds [21.4.25. ANCFG](#).
 - Removes IPC6, IPC19, IPC20, IPC22, IPC25, IPC28 and PMD6.
- Tables:
 - Updates [Table 1-1](#), [Table 11-3](#), [Table 14-2](#), [Table 30-4](#), [Table 30-5](#), [Table 30-6](#), [Table 30-7](#) and [Table 30-20](#).
 - Removes 10-Bit DAC Specifications
- Figures:
 - Updates [Figure 5-1](#) and [Figure 9-1](#).

32.3 Revision C (December 2020)

This revision incorporates the following updates:

- Sections:
 - The I²C and SPI standard uses the terminology “Master” and “Slave”. The equivalent Microchip terminology used in this document is “Host” and “Client”, respectively.
 - Updates [Analog Features](#).
 - Updates all 28-Pin, 36-Pin and 48-Pin Package information.
- Registers:
 - Updates [17.8.1. U1MODE](#), [17.8.6. U2MODE](#) and [27.1.6. FOSC](#).
- Tables:
 - Updates [Table 30-3](#), [Table 30-4](#), [Table 30-5](#), [Table 30-6](#), [Table 30-7](#), [Table 30-9](#), [Table 30-11](#), [Table 30-12](#), [Table 30-13](#), [Table 30-14](#) and [Table 30-29](#).

32.4 Revision D (March 2022)

This revision incorporates the following updates:

- Sections:
 - Updates 36-Pin Diagram information.
- Registers:
 - Updates [15.5.10. SPI1IMSKH](#).
- Tables:
 - Updates [Table 30-29](#).

The Microchip Website

Microchip provides online support via our website at www.microchip.com/. This website is used to make files and information easily available to customers. Some of the content available includes:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip design partner program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

Product Change Notification Service

Microchip's product change notification service helps keep customers current on Microchip products. Subscribers will receive email notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, go to www.microchip.com/pcn and follow the registration instructions.

Customer Support

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Embedded Solutions Engineer (ESE)
- Technical Support

Customers should contact their distributor, representative or ESE for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in this document.

Technical support is available through the website at: www.microchip.com/support

Product Identification System

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

PART NO.
 Device [X]⁽¹⁾ -X /XX
 Tape Temperature Package
 and Reel Range

| | | |
|---------------------|---|-------------------------------|
| Device: | PIC24FJ64GU205, PIC24FJ64GU203, PIC24FJ64GU202, PIC24FJ32GU205, PIC24FJ32GU203, PIC24FJ32GU202, PIC24FJ64GP205, PIC24FJ64GP203, PIC24FJ64GP202, PIC24FJ32GP205, PIC24FJ32GP203, PIC24FJ32GP202 | |
| Tape & Reel Option: | Blank | = Tube |
| | T | = Tape & Reel |
| Temperature Range: | I | = -40°C to +85°C (Industrial) |
| | E | = -40°C to +125°C (Extended) |
| Package: | PT | = 48-Lead TQFP |
| | M4 | = 48-Lead UQFN |
| | M5 | = 36-Lead UQFN |
| | SS | = 28-Lead SSOP |
| | SO | = 28-Lead SOIC |
| | ML | = 28-Lead QFN |
| | MV | = 28-Lead UQFN |

Examples:

- PIC24FJ64GU205-I/PT: Industrial Temperature, 48-Lead TQFP Package

Notes:

- Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.
- Small form-factor packaging options may be available. Please check www.microchip.com/packaging for small-form factor package availability, or contact your local Sales Office.

Microchip Devices Code Protection Feature

Note the following details of the code protection feature on Microchip products:

- Microchip products meet the specifications contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is secure when used in the intended manner, within operating specifications, and under normal conditions.
- Microchip values and aggressively protects its intellectual property rights. Attempts to breach the code protection features of Microchip product is strictly prohibited and may violate the Digital Millennium Copyright Act.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of its code. Code protection does not mean that we are guaranteeing the product is “unbreakable”. Code protection is constantly evolving. Microchip is committed to continuously improving the code protection features of our products.

Legal Notice

This publication and the information herein may be used only with Microchip products, including to design, test, and integrate Microchip products with your application. Use of this information in any other manner violates these terms. Information regarding device applications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. Contact your local Microchip sales office for additional support or, obtain additional support at www.microchip.com/en-us/support/design-help/client-support-services.

THIS INFORMATION IS PROVIDED BY MICROCHIP "AS IS". MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE, OR WARRANTIES RELATED TO ITS CONDITION, QUALITY, OR PERFORMANCE.

IN NO EVENT WILL MICROCHIP BE LIABLE FOR ANY INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, OR CONSEQUENTIAL LOSS, DAMAGE, COST, OR EXPENSE OF ANY KIND WHATSOEVER RELATED TO THE INFORMATION OR ITS USE, HOWEVER CAUSED, EVEN IF MICROCHIP HAS BEEN ADVISED OF THE POSSIBILITY OR THE DAMAGES ARE FORESEEABLE. TO THE FULLEST EXTENT ALLOWED BY LAW, MICROCHIP'S TOTAL LIABILITY ON ALL CLAIMS IN ANY WAY RELATED TO THE INFORMATION OR ITS USE WILL NOT EXCEED THE AMOUNT OF FEES, IF ANY, THAT YOU HAVE PAID DIRECTLY TO MICROCHIP FOR THE INFORMATION.

Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, CryptoMemory, CryptoRF, dsPIC, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Kleer, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

AgileSwitch, APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, Flashtec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet- Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, TrueTime, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, Augmented Switching, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, Espresso T1S, EtherGREEN, GridTime, IdealBridge, In-Circuit Serial Programming, ICSP, INICnet, Intelligent Paralleling, Inter-Chip Connectivity, JitterBlocker, Knob-on-Display, maxCrypto, maxView, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, NVM Express, NVMe, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICTail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, RTAX, RTG4, SAM-ICE, Serial Quad I/O, simpleMAP, SimpliPHY, SmartBuffer, SmartHLS, SMART-I.S., storClad, SQL, SuperSwitcher, SuperSwitcher II, Switchtec, SynchroPHY, Total Endurance, TSHARC, USBCheck, VariSense, VectorBlox, VeriPHY, ViewSpan, WiperLock, XpressConnect, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, Symmcom, and Trusted Time are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020-2022, Microchip Technology Incorporated and its subsidiaries. All Rights Reserved.

ISBN: 978-1-5224-9937-4

Quality Management System

For information regarding Microchip's Quality Management Systems, please visit www.microchip.com/quality.

Worldwide Sales and Service

| AMERICAS | ASIA/PACIFIC | ASIA/PACIFIC | EUROPE |
|--|--|---|---|
| Corporate Office 2355 West Chandler Blvd. Chandler, AZ 85224-6199 Tel: 480-792-7200 Fax: 480-792-7277 Technical Support: www.microchip.com/support Web Address: www.microchip.com | Australia - Sydney Tel: 61-2-9868-6733 China - Beijing Tel: 86-10-8569-7000 China - Chengdu Tel: 86-28-8665-5511 China - Chongqing Tel: 86-23-8980-9588 China - Dongguan Tel: 86-769-8702-9880 China - Guangzhou Tel: 86-20-8755-8029 China - Hangzhou Tel: 86-571-8792-8115 China - Hong Kong SAR Tel: 852-2943-5100 China - Nanjing Tel: 86-25-8473-2460 China - Qingdao Tel: 86-532-8502-7355 China - Shanghai Tel: 86-21-3326-8000 China - Shenyang Tel: 86-24-2334-2829 China - Shenzhen Tel: 86-755-8864-2200 China - Suzhou Tel: 86-186-6233-1526 China - Wuhan Tel: 86-27-5980-5300 China - Xian Tel: 86-29-8833-7252 China - Xiamen Tel: 86-592-2388138 China - Zhuhai Tel: 86-756-3210040 | India - Bangalore Tel: 91-80-3090-4444 India - New Delhi Tel: 91-11-4160-8631 India - Pune Tel: 91-20-4121-0141 Japan - Osaka Tel: 81-6-6152-7160 Japan - Tokyo Tel: 81-3-6880-3770 Korea - Daegu Tel: 82-53-744-4301 Korea - Seoul Tel: 82-2-554-7200 Malaysia - Kuala Lumpur Tel: 60-3-7651-7906 Malaysia - Penang Tel: 60-4-227-8870 Philippines - Manila Tel: 63-2-634-9065 Singapore Tel: 65-6334-8870 Taiwan - Hsin Chu Tel: 886-3-577-8366 Taiwan - Kaohsiung Tel: 886-7-213-7830 Taiwan - Taipei Tel: 886-2-2508-8600 Thailand - Bangkok Tel: 66-2-694-1351 Vietnam - Ho Chi Minh Tel: 84-28-5448-2100 | Austria - Wels Tel: 43-7242-2244-39 Fax: 43-7242-2244-393 Denmark - Copenhagen Tel: 45-4485-5910 Fax: 45-4485-2829 Finland - Espoo Tel: 358-9-4520-820 France - Paris Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79 Germany - Garching Tel: 49-8931-9700 Germany - Haan Tel: 49-2129-3766400 Germany - Heilbronn Tel: 49-7131-72400 Germany - Karlsruhe Tel: 49-721-625370 Germany - Munich Tel: 49-89-627-144-0 Fax: 49-89-627-144-44 Germany - Rosenheim Tel: 49-8031-354-560 Israel - Ra'anana Tel: 972-9-744-7705 Italy - Milan Tel: 39-0331-742611 Fax: 39-0331-466781 Italy - Padova Tel: 39-049-7625286 Netherlands - Drunen Tel: 31-416-690399 Fax: 31-416-690340 Norway - Trondheim Tel: 47-72884388 Poland - Warsaw Tel: 48-22-3325737 Romania - Bucharest Tel: 40-21-407-87-50 Spain - Madrid Tel: 34-91-708-08-90 Fax: 34-91-708-08-91 Sweden - Gothenberg Tel: 46-31-704-60-40 Sweden - Stockholm Tel: 46-8-5090-4654 UK - Wokingham Tel: 44-118-921-5800 Fax: 44-118-921-5820 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[PIC24FJ32GP202-E/ML](#) [PIC24FJ32GP202-E/SS](#) [PIC24FJ32GP202-I/ML](#) [PIC24FJ32GP202-I/SS](#)
[PIC24FJ32GP205-E/M4](#) [PIC24FJ32GP205-E/PT](#) [PIC24FJ64GU205-I/M4](#) [PIC24FJ32GU203-I/M5](#) [PIC24FJ32GU205-](#)
[E/M4](#) [PIC24FJ64GU202-E/MV](#) [PIC24FJ64GU203-E/M5](#) [PIC24FJ64GU203T-I/M5](#) [PIC24FJ32GU203T-I/M5](#)
[PIC24FJ64GU203-I/M5](#) [PIC24FJ64GU205-E/M4](#) [PIC24FJ32GP203-E/M5](#) [PIC24FJ32GP205-I/M4](#)
[PIC24FJ64GP205T-I/M4](#) [PIC24FJ64GU202T-I/MV](#) [PIC24FJ64GU202T-I/SO](#) [PIC24FJ64GU205T-I/M4](#)
[PIC24FJ32GP202T-I/MV](#) [PIC24FJ32GP202T-I/SO](#) [PIC24FJ32GU203-E/M5](#) [PIC24FJ64GP205-E/M4](#)
[PIC24FJ64GP205-I/M4](#) [PIC24FJ64GU202-E/SO](#) [PIC24FJ64GU202-E/SS](#) [PIC24FJ64GU202-I/MV](#) [PIC24FJ64GU202-](#)
[I/SO](#) [PIC24FJ32GU202-I/SO](#) [PIC24FJ32GU202T-I/MV](#) [PIC24FJ32GU202T-I/SO](#) [PIC24FJ64GP202-E/SO](#)
[PIC24FJ64GP202-I/SO](#) [PIC24FJ64GP202T-I/SO](#) [PIC24FJ32GP202-E/SO](#) [PIC24FJ32GP202-I/MV](#) [PIC24FJ32GP202-](#)
[I/SO](#) [PIC24FJ32GU202-E/MV](#) [PIC24FJ32GU202-E/SO](#) [PIC24FJ32GU202-I/MV](#) [PIC24FJ64GU202-E/ML](#)
[PIC24FJ64GU202-I/ML](#) [PIC24FJ64GU202-I/SS](#) [PIC24FJ64GU202T-I/ML](#) [PIC24FJ64GU202T-I/SS](#)
[PIC24FJ32GP202-E/MV](#) [PIC24FJ64GP202-I/ML](#) [PIC24FJ64GP202-I/SS](#) [PIC24FJ64GP202T-I/MV](#) [PIC24FJ64GP203-](#)
[I/M5](#) [PIC24FJ64GP203T-I/M5](#) [PIC24FJ64GP205-E/PT](#) [PIC24FJ32GU202-E/SS](#) [PIC24FJ32GU202-I/SS](#)
[PIC24FJ32GU202T-I/SS](#) [PIC24FJ32GU205-I/M4](#) [PIC24FJ32GU205T-I/M4](#) [PIC24FJ64GP202-E/MV](#)
[PIC24FJ64GU205T-I/PT](#) [PIC24FJ32GP202T-I/ML](#) [PIC24FJ32GP202T-I/SS](#) [PIC24FJ32GP203-I/M5](#)
[PIC24FJ32GP203T-I/M5](#) [PIC24FJ32GP205T-I/M4](#) [PIC24FJ64GP202T-I/SS](#) [PIC24FJ64GP203-E/M5](#)
[PIC24FJ64GP205-I/PT](#) [PIC24FJ64GP205T-I/PT](#) [PIC24FJ64GU205-E/PT](#) [PIC24FJ64GU205-I/PT](#) [PIC24FJ32GU205-](#)
[I/PT](#) [PIC24FJ32GU205T-I/PT](#) [PIC24FJ64GP202-E/ML](#) [PIC24FJ64GP202-E/SS](#) [PIC24FJ64GP202-I/MV](#)
[PIC24FJ64GP202T-I/ML](#) [PIC24FJ32GP205-I/PT](#) [PIC24FJ32GP205T-I/PT](#) [PIC24FJ32GU202-E/ML](#)
[PIC24FJ32GU202-I/ML](#) [PIC24FJ32GU202T-I/ML](#) [PIC24FJ32GU205-E/PT](#)