


SERIES PBH SWITCHES

PUSHBUTTON SWITCHES



E-SWITCH®

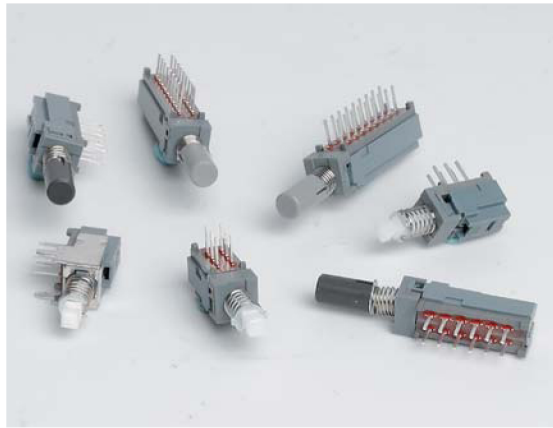

SPECIFICATIONS

Contact Rating:	100mA @ 30 VDC
Life Expectancy (Mechanical):	30,000 cycles min.
Life Expectancy (Electrical):	10,000 cycles min.
Contact Resistance:	100mΩ max.
Insulation Resistance:	100MΩ min.
Dielectric Strength:	250 VAC for 60 seconds
Actuation Force:	2 Pole: 230 ± 50 g 4 Pole: 280 ± 50 g 6 Pole: 380 ± 50 g
Operating Temperature:	-20° to + 70°C

FEATURES & BENEFITS

- ▶ Up to 6 poles available
- ▶ Latching & momentary functions
- ▶ UL 94V0 material option available

APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Networking
- ▶ Computers/servers
- ▶ Performance audio
- ▶ Instrumentation
- ▶ Low power on/off designs
- ▶ External hard drives and modems



HOW TO ORDER

SERIES PBH	POLE	MECHANICAL CONFIGURATION	BRACKET/ TERMINATION	TIMING	CONTACT MATERIAL	HOUSING/ ACTUATOR MTL	CAP	CAP COLOR
	2U 4U 6U	EE = Latching OA = Momentary	(None) = Std. PC Pin SNP = Snap-In PC Pin KZX = Mounting Bracket	N = Non-shorting	AG = Silver	(None) = UL94-HB V = UL94-V0	X = No Cap See Cap Options	



Example Ordering Number
PBH6UEESNPAGV1RLGR

Specifications subject to change without notice.

TACT
SWITCHES

NAVIGATION
SWITCHES

PUSHBUTTON
SWITCHES

TOGGLE
SWITCHES

ROCKER
SWITCHES

SLIDE
SWITCHES

SNAP-ACTION
SWITCHES

DIP
SWITCHES

KEYLOCK
SWITCHES

ROTARY
SWITCHES

DETECTOR
SWITCHES

CAP
OPTIONS





TACT
SWITCHESNAVIGATION
SWITCHESPUSHBUTTON
SWITCHESTOGGLE
SWITCHESROCKER
SWITCHESSLIDE
SWITCHESSNAP-ACTION
SWITCHESDIP
SWITCHESKEYLOCK
SWITCHESROTARY
SWITCHESDETECTOR
SWITCHESCAP
OPTIONS

SERIES PBH SWITCHES


PUSHBUTTON SWITCHES

OPTIONS

2U







P.C. MOUNTING




SCHEMATIC

4U



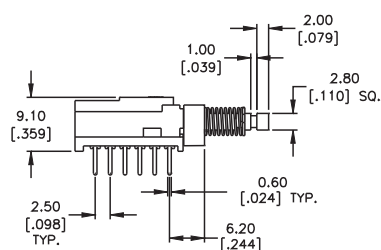
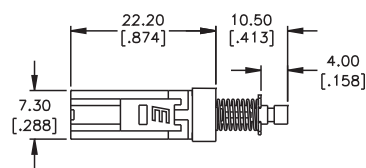


P.C. MOUNTING




SCHEMATIC

6U

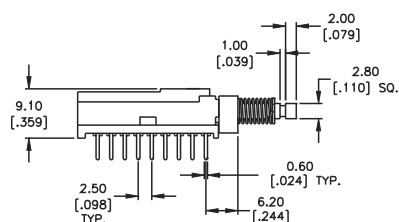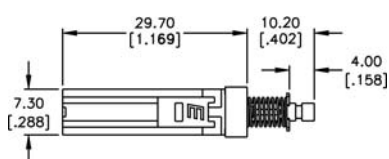

P.C. MOUNTING





SCHEMATIC




BRACKET/TERMINATION OPTIONS

SNP

SNAP-IN

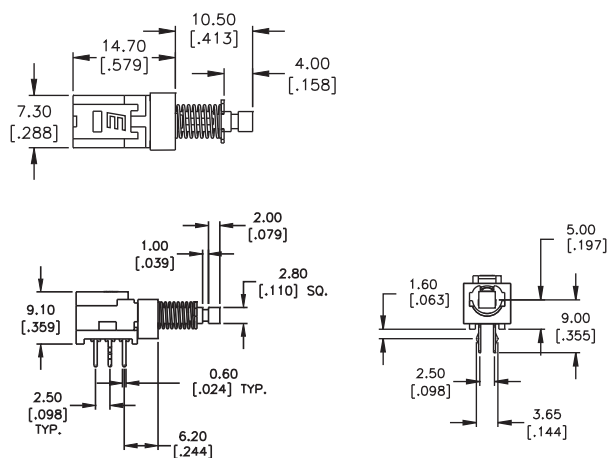



P.C. MOUNTING




SCHEMATIC

KZX


MOUNTING BRACKET

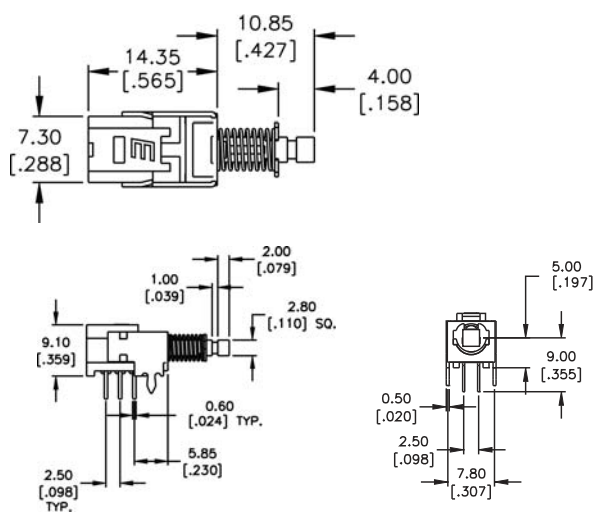

P.C. MOUNTING



SCHEMATIC



BRACKET LEG

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-Switch:

[PBH2UEESNPAGX](#) [PBH4UOANAGX](#) [PBH4UEENAGX](#) [PBH6UEENAG1DBLK](#) [PBH2UOANAGX](#) [PBH2UEENAGX](#)
[PBH2UOAKZXSAGX](#) [PBH2UEENAG1DWHT](#) [PBH6UEENAGVX](#) [PBH4UEEKZSNAG1SBLK](#) [PBH6UEENAGX](#)
[PBH4UEESNPAGV](#) [PBH4UEENAGV1SBLK-UL94V0](#) [PBH2UEEKZSNAGV1RBLK94V0](#) [PBH2UEEKZSNAGX](#)
[PBH2UEENAG1CWHT](#) [PBH2UEENAG1RLGR](#) [PBH2UEENAG1RRED](#) [PBH2UEENAG1RWHT](#) [PBH2UEENAGVX](#)
[PBH2UEESNPAG1DLGR](#) [PBH2UEESNPAG1RRED](#) [PBH2UEESNPAGV1RBLK](#) [PBH2UOAKZSNAGX](#)
[PBH2UOANAG1RRED](#) [PBH2UOANAG1RWHT](#) [PBH2UOANAGV1RBLK94V0](#) [PBH2UOASAG1RRED](#)
[PBH2UOASAGX](#) [PBH2UOASNPAGV](#) [PBH2UOASNPAGV1SDGR](#) [PBH4UEEKZSNAGV](#)
[PBH4UEEKZSNAGV1RLGR](#) [PBH4UEEKZSNAGX](#) [PBH4UEENAG1RBLK](#) [PBH4UEENAGV1RDGR](#)
[PBH4UEESNPAGV1RBLK](#) [PBH4UEESNPAGX](#) [PBH4UOANAG1RRED](#) [PBH6UEEKZSNAGX](#)
[PBH6UEENAG1RLGR](#) [PBH6UEESNPAGV](#) [PBH6UEESNPAGV1RBLK](#) [PBH6UOANAGX](#) [PBH2UEENAG1SBLK](#)
[PBH2UEEKZSNAGV](#) [PBH2UEENAG1RBLK](#) [PBH2UEESNPAGV](#) [PBH2UOAKZSNAGV](#) [PBH2UOANAGV](#)
[PBH4UEENAGVX](#) [PBH6UEENAG1RBLK](#) [PBH4UEESAGX](#) [PBH2UOANAG1CBLK](#)