

## 4G LTE 2 Click - Voice



PID: MIKROE-5287

**4G LTE 2 Click** is a compact add-on board representing a secure-cloud multi-band solution offering universal connectivity and reliable performance. This board features the [LARA-R6001](#) from [u-blox](#), the world's smallest LTE Cat 1 module with global coverage and a built-in MQTT client, providing a data and voice solution. Equipped with familiar [AT commands](#) set over the UART interface, USB interface, and Network and Status indicators, the LARA-R6001 also has a comprehensive certification scheme and multi-band/multi-mode capabilities providing excellent flexibility to support of voice/audio applications. Taking advantage of embedded IoT protocols and security features, this Click board™ is suitable for various applications, such as device management, remote device actions, and secure FOTA updates.

4G LTE 2 Click - Voice is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

### How does it work?

4G LTE 2 Click is based on the LARA-R6001 from u-blox, a multi-band and multi-mode module supporting LTE Cat 1 FDD and LTE Cat 1 TDD radio access technology (18 LTE bands), with 3G UMTS/HSPA and 2G GSM/GPRS/EGPRS fallback that provides the ideal solution for uncompromised global connectivity. This Click board™ represents a data and voice solution with global coverage and all relevant MNO certifications, offering great flexibility. Versatile interfaces and features make the LARA-R6001 ideally suited for a wide range of applications that require medium data speed, seamless connectivity, superior coverage, low latency, and streaming data such as asset tracking, telematics, remote monitoring, point-of-sale terminals, and more.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

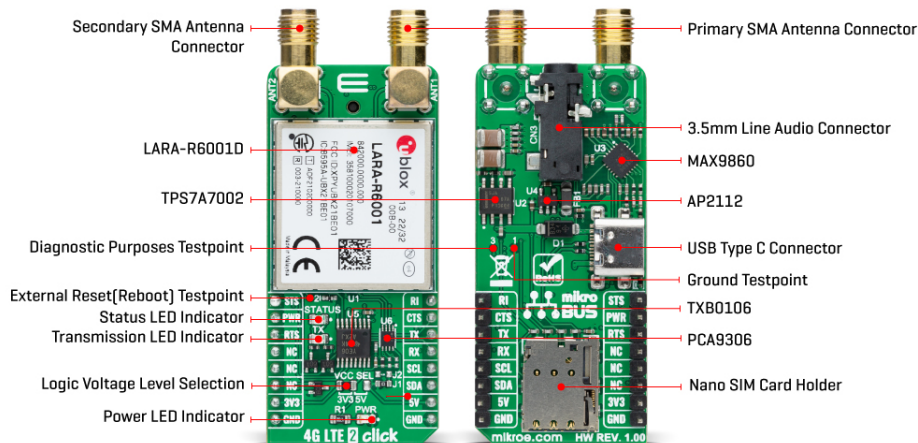

The LARA-R6001 module provides Voice over LTE (VoLTE) and Circuit-Switched-Fall-Back (CSFB) from LTE to 3G or 2G radio bearer for audio services - access is via an onboard 3.5mm audio jack. This audio interface is configurable through the AT commands to transfer digital audio data to/from an external device as an onboard audio codec.

This module requires a 3.8V power supply. Therefore, the Click board™ incorporates an integrated buck (step-down DC-DC) converter, the TPS7A7002 by Texas Instruments, which provides a stable 3.8V power supply and is capable of mitigating voltage drops at the input when a high current peak appears (typically at the StartUp of the device). The module Ignition (Power-On) pin, labelled as PWR and routed to the RST pin on the mikroBUS™ socket, enables power to be switched on and off.

The LARA-R6001 communicates with an MCU using the UART interface with commonly used UART RX and TX pins with the hardware flow control pins UART CTS, RTS, RI (Clear to Send, Ready to Send, and Ring Indicator). It operates at 115200 bps by default configuration to transmit and exchange data with the host MCU through AT commands that u-blox provides. Besides the UART interface, the LARA-R6001 also provides the possibility of using the I2C interface as an I2C host, which can communicate with I2C local devices following the I2C bus specifications. This Click board™ is also equipped with a USB type C connector, available for diagnostic purposes only. The module acts as a USB device and can be connected to any USB host equipped with compatible drivers.

Among its used pins, this Click board™ also possesses two additional LED indicators: the yellow LED labelled as STATUS, routed both to the mikroBUS™ AN pin (STS) and the LED, used to indicate the status of the network connection visually; and a red LED, labelled as TX, used to tell the transmitting status of the module.

LTE cellular networks use spatial multiplexing antenna technology, allowing more than one antenna to be used for better reception. For that reason, besides the primary TX/RX antenna, this Click board™ uses a secondary diversity RX antenna, which allows better signal reception. Alongside those SMA connectors, the 4G LTE 2 Click also has a Nano-SIM card slot that provides multiple connections and interface options alongside several test points labelled from TP1 to TP3, enabling easy reboot and testing of the module.

This Click board™ can operate with both 3.3V and 5V logic voltage levels selected via the VCC SEL jumper. This way, both 3.3V and 5V MCUs can use the communication lines properly. However, the Click board™ comes equipped with a library containing easy-to-use functions and

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).


an example code that can be used, as a reference, for further development.

## Specifications

Type	2G GPRS,4G LTE,GSM/LTE
Applications	Can be used for device management, remote device actions, and secure FOTA updates
On-board modules	LARA-R6001 - LTE Cat 1 module with global coverage from u-blox
Key Features	Universal connectivity, multi-mode, secure cloud, support of voice/audio applications, receive-diversity for reliable performance in difficult conditions, MNO certifications, professional grade, global region, compatible with u-blox services, various interfaces, and more
Interface	I2C,UART,USB
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	L (57.15 x 25.4 mm)
Input Voltage	3.3V or 5V

## Pinout diagram

This table shows how the pinout on 4G LTE 2 Click - Voice corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
Module Status	<b>STS</b>	1	AN	PWM	16	<b>RI</b>	UART RI
Power-ON	<b>PWR</b>	2	RST	INT	15	<b>CTS</b>	UART CTS
UART RTS	<b>RTS</b>	3	CS	RX	14	<b>TX</b>	UART TX
	NC	4	SCK	TX	13	<b>RX</b>	UART RX
	NC	5	MISO	SCL	12	<b>SCL</b>	I2C Clock
	NC	6	MOSI	SDA	11	<b>SDA</b>	I2C Data
Power Supply	<b>3.3V</b>	7	3.3V	5V	10	<b>5V</b>	Power Supply
Ground	<b>GND</b>	8	GND	GND	9	<b>GND</b>	Ground

## Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	TX	-	Transmission LED Indicator
LD3	STATUS	-	Status LED Indicator
JP1	VCC SEL	Left	Logic Level Voltage Selection 3V3/5V: Left

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

			position 3V3, Right position 5V
TP1	1	-	Ground Testpoint
TP2	2	-	External Reset (Reboot) Testpoint
TP3	3	-	Diagnostic Purposes Testpoint

## 4G LTE 2 Click - Voice electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	3.3	-	5	V
LTE Operating Frequency Range (Uplink)	663	-	2570	MHz
LTE Operating Frequency Range (Downlink)	617	-	2690	MHz
Operating Temperature Range	-20	+25	+65	°C

## Software Support

We provide a library for the 4G LTE 2 Voice Click as well as a demo application (example), developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

## Library Description

This library contains API for 4G LTE 2 Voice Click driver.

Key functions

- `c4glte2voice_set_power_state` This function sets a desired power state by toggling PWR pin with a specific time for high state.
- `c4glte2voice_set_sim_apn` This function sets APN for sim card.
- `c4glte2voice_send_sms_text` This function sends text message to a phone number.

## Example Description

Application example shows device capability of connecting to the network and sending SMS or TCP/UDP messages using standard "AT" commands.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log

Mikroe produces entire development toolchains for all major microcontroller architectures.  
Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

- Click.4GLTE2Voice

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MikroElektronika [compilers](#).

## mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

## Downloads

[TXB0106 datasheet](#)

[TPS7A7002 datasheet](#)

[PCA9306 datasheet](#)

[LARA-R6 AT commands](#)

[LARA-R6 series datasheet](#)

[4G LTE 2 Click - Voice example on Libstock](#)

[AP2112 datasheet](#)

[MAX9860 datasheet](#)

[4G LTE 2 Click - Voice 2D and 3D files](#)

[4G LTE 2 Click - Voice schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-5287](#)