


Thermo 19 Click



PID: MIKROE-4295

Thermo 19 Click is a compact add-on board that provides an accurate temperature measurement. This board features the [MAX31825](#), a temperature sensor that provides 8-bit to 12-bit Celsius temperature measurements with better than $\pm 1.75^{\circ}\text{C}$ from -45°C to $+145^{\circ}\text{C}$ from [Analog Devices](#). It has a unique 64-bit serial code stored in an on-chip ROM, an alarm output for detection of temperature faults, temperature resolution selection from 8 to 12 bits, and it allows temperature conversion to 10-bit digital word in a period of 80ms (max). This Click board™ makes a perfect choice for industrial control, in communication and data center equipment, or in any other temperature measurement applications.

Thermo 19 Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

How does it work?

Thermo 19 Click is based on the MAX31825, a digital thermometer that provides 12-bit temperature measurements and communicates over a 1-Wire interface from Analog Devices. The sensor provides 8-bit to 12-bit temperature measurements from -45°C to $+145^{\circ}\text{C}$ with better than $\pm 1.75^{\circ}\text{C}$ accuracy, and better than $\pm 1^{\circ}\text{C}$ accuracy from 0°C to $+70^{\circ}\text{C}$. Temperature measurements are sent to the MCU using the 1-Wire interface that requires only one data line that can also be used to parasitically power the sensor. Besides, it includes two address input pins that allow one of 64 different addresses to be selected to identify the sensor's physical location, and an interrupt that represents an alarm output for detection of temperature measurement faults.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

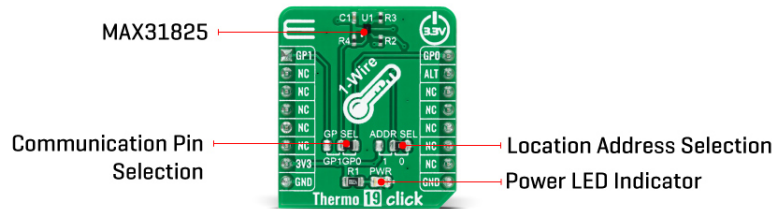

The transaction sequence for accessing the device MAX31825 through the 1-Wire interface consists of additional steps:

- **Initialization sequence** - It consists of a reset pulse transmitted by the MCU followed by the presence pulse transmitted by the MAX31825, which gives the MCU information that the MAX31825 is on the bus and is ready to operate.
- **ROM Command** - Once the MCU has detected a presence, it can issue one of the four 8-bit long ROM commands that the MAX31825 support.
- **Function Command** - Commands that allows the MCU to read from the MAX31825 scratchpad memory, and initiate temperature conversions.
- **Transaction/Data** - The idle state for the 1-Wire bus is high. If for any reason a transaction needs to be suspended, the bus **MUST** be left in the idle state if the transaction is to resume. Infinite recovery time can occur between bits so long as the 1-Wire bus is in the inactive (high) state during the recovery period. If the bus is held low for more than 480µs, all components on the bus are reset.

NOTE: It is very important to follow this sequence every time the MAX31825 is accessed, as the MAX31825 does not respond if any steps in the sequence are missing or out of order.

The Thermo 19 Click communicates with MCU using the 1-Wire interface that, by definition, requires only one data line (and ground) for communication with MCU. The 1-Wire communication line is routed to the SMD jumper labeled as GP SEL, which allows routing of the 1-Wire communication either to the PWM pin or to the AN pin of the mikroBUS™ socket. These pins are labeled as GP0 and GP1 respectively, the same as the SMD jumper positions, making the selection of the desired pin simple and straightforward.

The MAX31825 possesses an interrupt output that represents alarm output with user-definable settings for temperature fault detection routed to the INT pin on the mikroBUS™ socket, labeled as ALT. It also includes two address pins (ADD0 and ADD1). ADD0 is connected to an external resistor whose value is measured by the MAX31825 in response to the Convert Location command, resulting in five location address bits (A4:A0) stored in the Status register. In addition to ADD0, the ADD1 input can be connected to GND or VDD, labeled as 0 and 1, which can be performed by using the SMD jumper labeled as ADDR SEL.

This Click board™ is designed to be operated only with a 3.3V logic voltage level. A proper logic voltage level conversion should be performed before the Click board™ is used with MCUs with

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).


different logic levels.

Specifications

Type	Temperature & humidity
Applications	Can be used for industrial control, in communication and data center equipment, or in any other temperature measurement applications.
On-board modules	Thermo 19 Click is based on the MAX31825, a digital thermometer that provides 12-bit temperature measurements and communicates over a 1-Wire interface from Maxim Integrated.
Key Features	Better accuracy, alarm function for detection of temperature faults, selectable temperature resolution, wide temperature measurement range, can be powered from the data line, and more.
Interface	1-Wire
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on Thermo 19 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
1-Wire Data IN/OUT	GP1	1	AN	PWM	16	GP0	1-Wire Data IN/OUT
	NC	2	RST	INT	15	ALT	Alarm Output
	NC	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	NC	
	NC	6	MOSI	SDA	11	NC	
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
JP1	GP SEL	Right	Communication Pin Selection GP1/GP0:

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

			Left position GP1, Right position GP0
JP2	ADDR SEL	Right	Location Address Selection 1/0: Left position 1, Right position 0

Thermo 19 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-0.3	3.3	4	V
Temperature Measurement Error	-1.75	±0.3	1.75	°C
Temperature Resolution	8	-	12	bits
Operating Temperature Range	-45	-	+145	°C

Software Support

We provide a library for the Thermo 19 Click on our [LibStock](#) page, as well as a demo application (example), developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

Library Description

Library holds function that checks the state of the "Alarm" pin.

Key functions:

- `uint8_t thermo19_alarm_chk ();` - Function is used to check if an Alarm has occurred.

Examples description

The application is composed of three sections :

- System Initialization - Initializes GPIO and LOG structures , and sets INT pin as input.
- Application Initialization - Initializes GPIO driver, applies default settings via one wire communication and start to write log.
- Application Task - This example shows capabilities of Thermo 19 click by measuring temperature and displaying temperature in degrees Celsius via USART terminal.

Additional Functions :

- `void thermo19_one_wire_init ()` - Function initialises one wire communication.
- `void thermo19_rom_skip ()` - Function sends skip ROM command.
- `float thermo19_get_temperature ()` - Functions reads, calculates and returns temperature, and the device's status.
- `void thermo19_dev_setup (uint8_t dev_cfg, float trsh_h, float trsh_l)` - Functions sets up the configuration (`uint8_t dev_cfg`) and high (`float trsh_h`) and low (`float trsh_l`) alarm thresholds.

The full application code, and ready to use projects can be found on our [LibStock](#) page.

Other mikroE Libraries used in the example:

Mikroe produces entire development toolchains for all major microcontroller architectures.
Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

- One Wire
- UART
- Conversions

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 click](#) or [RS232 click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika [compilers](#), or any other terminal application of your choice, can be used to read the message.

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

Downloads

[Thermo 19 click example on Libstock](#)

[Thermo 19 click 2D and 3D files](#)

[MAX31825 datasheet](#)

[Thermo 19 click schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-4295](#)