



EV2172C-Q-00A

5.5V, 2A, Sync Step-Down Converter with Output Discharge in UTQFN Package

DESCRIPTION

The MP2172C is a monolithic, step-down, switch-mode converter with built-in internal power MOSFETs. It achieves 2A continuous output current from a 2.5V-to-5.5V input voltage with excellent load and line regulation. The output voltage can be regulated to as low as 0.6V.

The Constant-On-Time control scheme provides fast transient response and eases loop stabilization. Fault protections include cycle-by-cycle current limiting and thermal shutdown.

The MP2172C is available in an ultra-small UTQFN package and requires a minimal number of readily available standard external components.

The MP2172C is ideal for a wide range of applications including high performance DSPs, wireless power, portable and mobile devices, and other low-power systems.

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	V _{IN}	2.5 – 5.5	V
Output Voltage	V _{OUT}	1.2	V
Output Current	I _{OUT}	2	A

Note: V_{IN}<3.3V may need more input capacitor.

FEATURES

- Fixed Frequency PWM mode
- 1.1MHz Switching Frequency
- EN for Power Sequencing
- 1% FB Accuracy
- Wide 2.5V-to-5.5V Operating Input Range
- Output Adjustable from 0.6V
- Up to 2A Output Current
- 75mΩ and 45mΩ Internal Power MOSFET Switches
- 100% Duty On
- Output Discharge
- V_o OVP
- Short-Circuit Protection with Hiccup Mode
- Power Good Only for Fixed Output Version
- Available in UTQFN Package


APPLICATIONS

- Wireless/Networking Cards
- Portable Instruments
- Battery Powered Devices
- Low Voltage I/O System Power
- Multi Function Printer

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV1602C-TF-00A EVALUATION BOARD

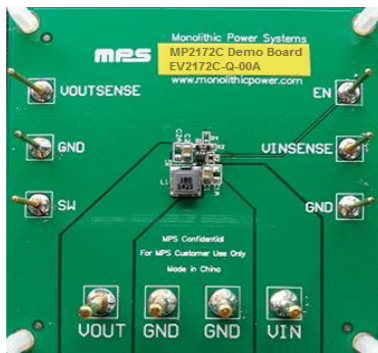

Board Number	MPS IC Number
EV2172C-Q-00A	MP2172CGQFU

Efficiency vs. Output Current

V_{IN}=5V, L=1μH (DCR=27mΩ)

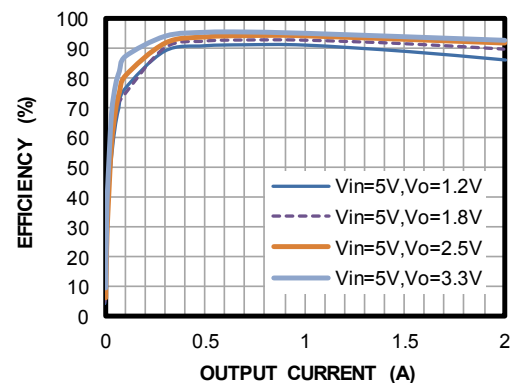

EVALUATION BOARD SCHEMATIC

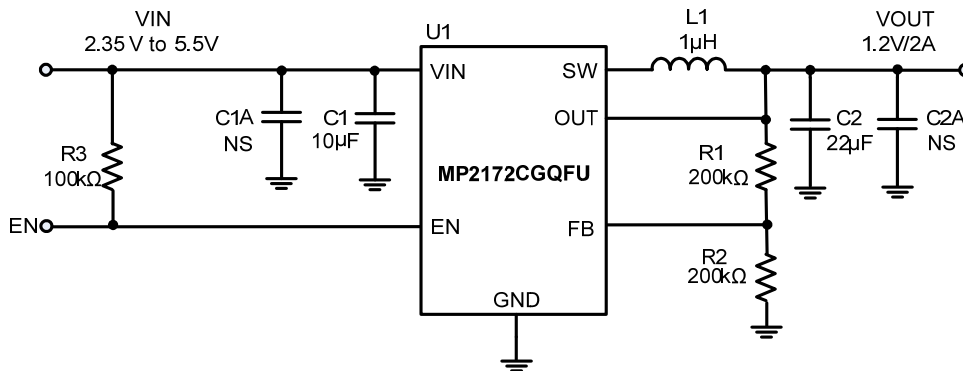


Figure 1: Typical Application Circuit for MP2172CGQFU

Note: $V_{IN} < 3.3V$ may need more input capacitor.



EV2172C-Q-00A BILL OF MATERIALS

Qty	RefDes	Value	Description	Package	Manufacturer	Manufacturer P/N
2	C1, C2	22 μ F	Ceramic Cap,10V,X5R	0805	muRata	GRM21BR61A226ME51L
2	R1,R2	200k	Film Res.1%,	0402	any	
1	R3	100k	Film Res.1%	0402	any	
1	L1	1.0 μ H	Inductor, Is=9A, DCR=27m Ω	SMD	Wurth	74437324010
1	U1		Step-down Switcher	UTQFN	MPS	MP2172CGQFU
0	C1A, C2A, R4	NS				

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 1.0\mu H$, $C_{OUT} = 22\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

Steady State


$I_{OUT} = 0A$

CH1:
 V_{out}/AC
10mV/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
1A/div.

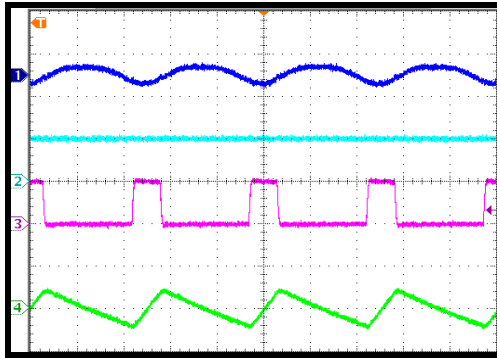

400ns/div.

Steady State


$I_{OUT} = 2A$

CH1:
 V_{out}/AC
10mV/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
2A/div.

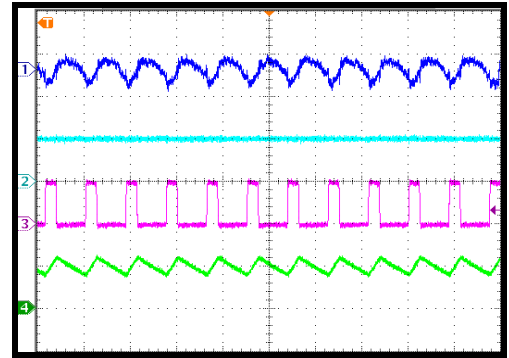

1µs/div.

V_{IN} Power-Up


$I_{OUT} = 0A$

CH1: V_{out}
1V/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
1A/div.

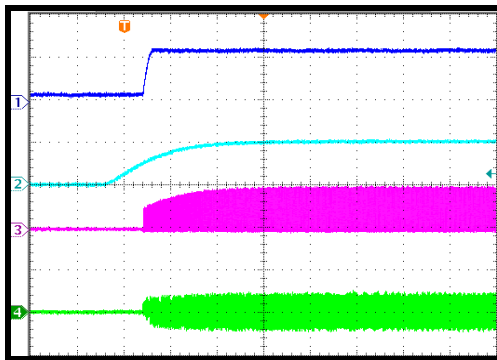

4ms/div.

V_{IN} Power-Up


$I_{OUT} = 2A$

CH1: V_{out}
1V/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
2A/div.

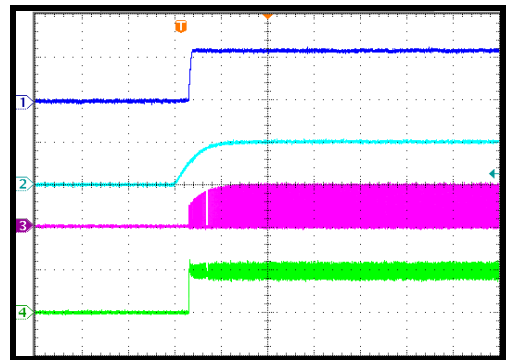

10ms/div.

V_{IN} Shutdown


$I_{OUT} = 0A$

CH1: V_{out}
500mV/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
2A/div.

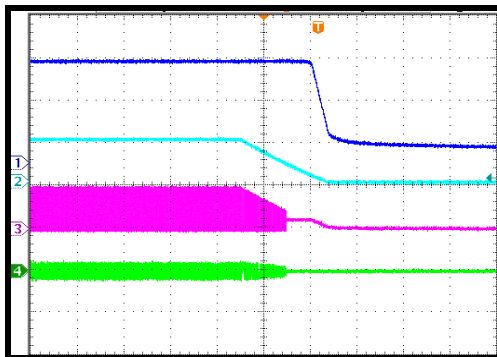

40ms/div.

V_{IN} Shutdown


$I_{OUT} = 2A$

CH1: V_{out}
1V/div.

CH2: V_{IN}
5V/div.

CH3: V_{sw}
5V/div.

CH4: I_L
2A/div.






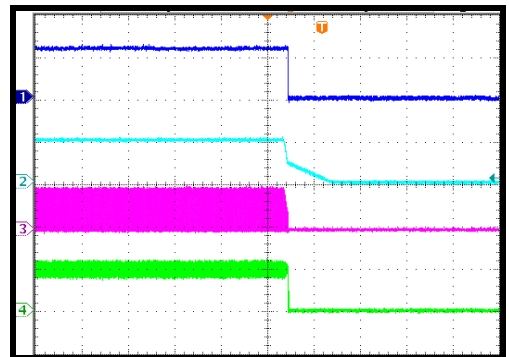


40ms/div.

EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

 $V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 1.0\mu H$, $C_{OUT} = 22\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

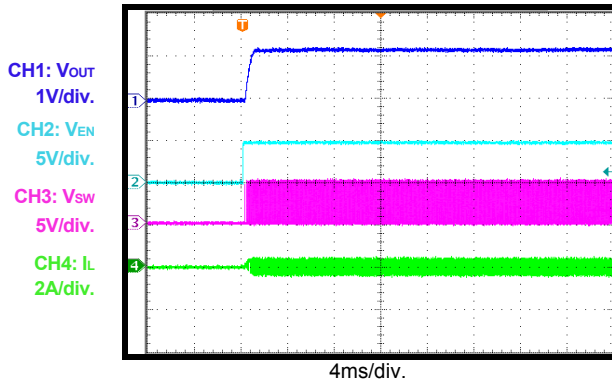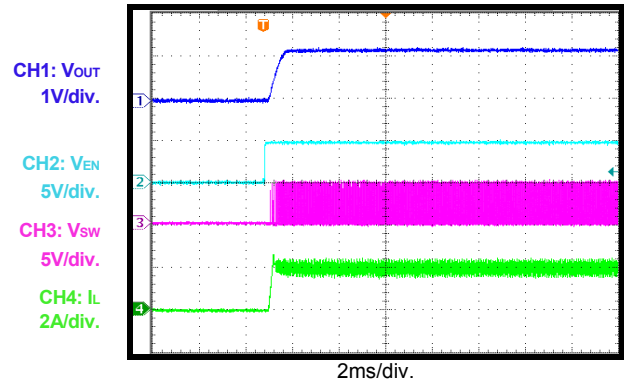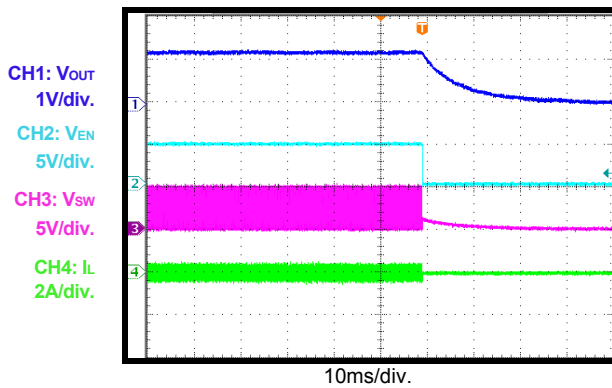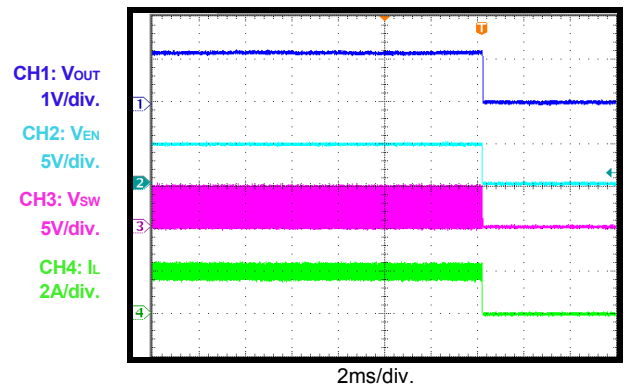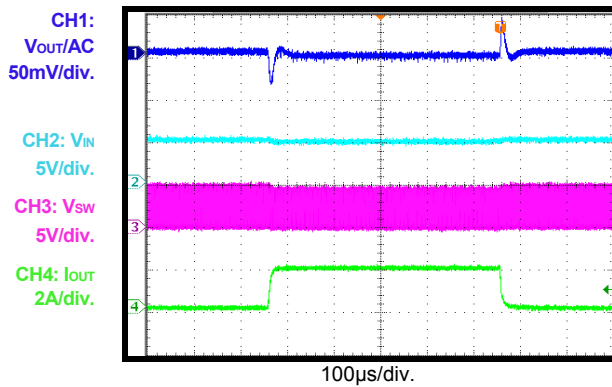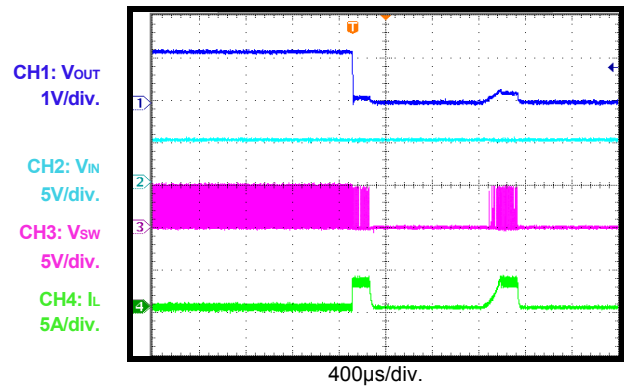
EN Power-Up
 $I_{OUT} = 0A$

EN Power-Up
 $I_{OUT} = 2A$

EN Shutdown
 $I_{OUT} = 0A$

EN Shutdown
 $I_{OUT} = 2A$

Transient
 $V_{IN} = 5V$, $I_{OUT} = 0A$ to $2A$

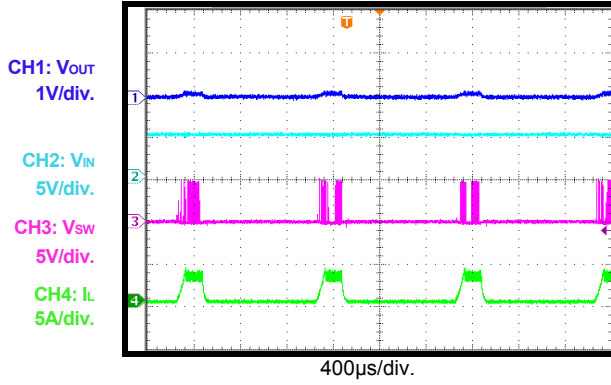Short-Circuit Entry


EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 1.0\mu H$, $C_{OUT} = 22\mu F$, $T_A = +25^\circ C$, unless otherwise noted.

Short-Circuit State



Short-Circuit Recovery

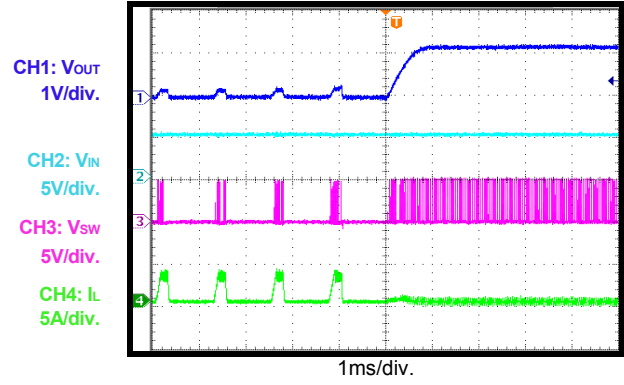

CIRCUIT BOARD LAYOUT

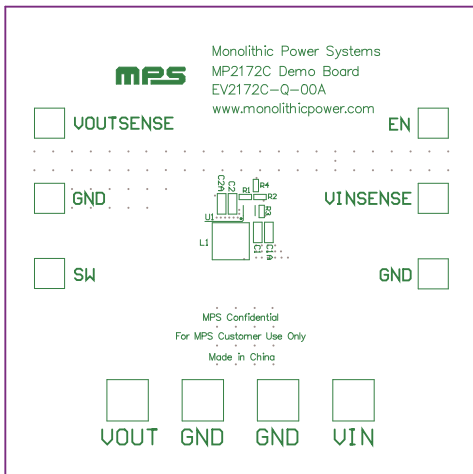


Figure 2: Top Silk Layer

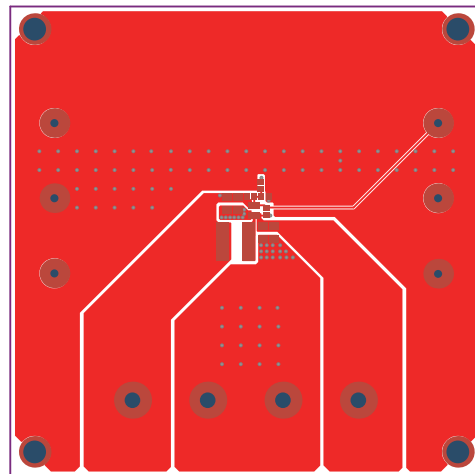


Figure 3: Top Layer

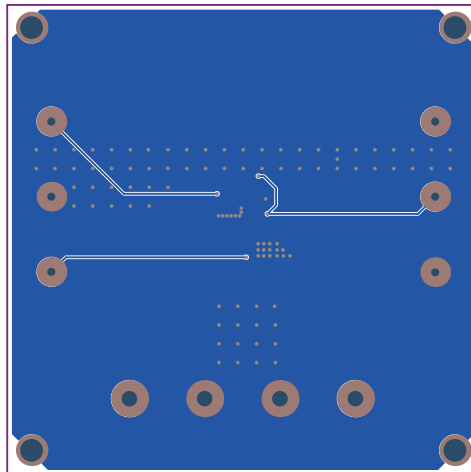


Figure 4: Bottom Layer

QUICK START GUIDE(MP2172CGQFU)

Refer to Figure1 to set up adjusted version EVB. The output voltage of this board is set externally which can be regulated as low as 0.6V by operating from +2.5V to +5.5V input. The default output voltage of this board is set to 1.2V.

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output between 2.5V and 5.5V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The board will automatically start up.
5. The Output Voltage can be changed by varying R2. Choose R1 to 200k typically. R2 is then given by:

$$R2 = \frac{R1}{\frac{V_{out}}{0.6} - 1}$$

Example: For Vout= 1.8V, R1=200kΩ, R2=100kΩ.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EV2172C-Q-00A](#)