

## DESCRIPTION

The EV4415M-QB-00A is an evaluation board for the MP/MPQ4415MGQB.

MP/MPQ4415MGQB is a synchronous, rectified, step-down, switch-mode convertor with built-in power MOSFETs and one input bypass capacitor. It offers a very compact solution to achieve a 1.5A of continuous output current with excellent load and line regulation over a wide input supply range. The MP/MPQ4415M uses synchronous mode operation to achieve high efficiency over the output current load range.

The EV4415M-QB-00A is a fully assembled and tested evaluation board, it generates 3.3V output voltage at load current up to 1.5A from a 4V to 36V input range.

## ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Value	Units
Input Voltage	$V_{IN}$	4 – 36	V
Output Voltage	$V_{OUT}$	3.3	V
Output Current	$I_{OUT}$	1.5	A

## FEATURES

- Wide 4V to 36V Operating Input Range
- 1.5A Continuous Load Current
- 90mΩ High-Side, 50mΩ Low-Side Internal Power MOSFETs
- High-Efficiency Synchronous Mode Operation
- Default 2.2MHz Switching Frequency
- 450kHz to 2.2MHz Frequency Sync
- Forced Continuous Conduction Mode (CCM)
- Internal Soft Start (SS)
- Power Good (PG) Indicator
- Over-Current Protection (OCP) with Valley-Current Detection and Hiccup
- Thermal Shutdown
- Output Adjustable from 0.8V
- Available in a QFN-13 (2.5mmx3mm) Package
- CISPR25 Class 5 Compliant
- AEC-Q100 Grade-1

## APPLICATIONS

- Automotive
- Industrial Control Systems
- Medical and Imaging Equipment
- Telecom Applications
- Distributed Power Systems


All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.

## EVALUATION BOARD




(L x W x H) 2.5" x 2.5" x 0.4"  
(6.4cm x 6.4cm x 1.0cm)


Board Number	MPS IC Number
EV4415M-QB-00A	MP/MPQ4415MGQB

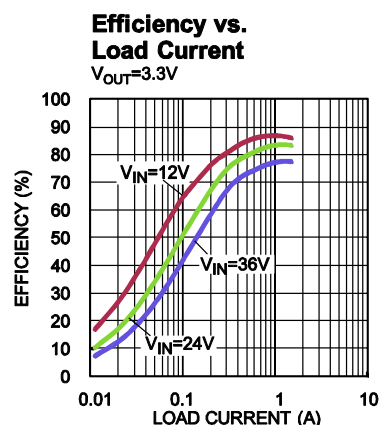

## EVALUATION BOARD SCHEMATIC

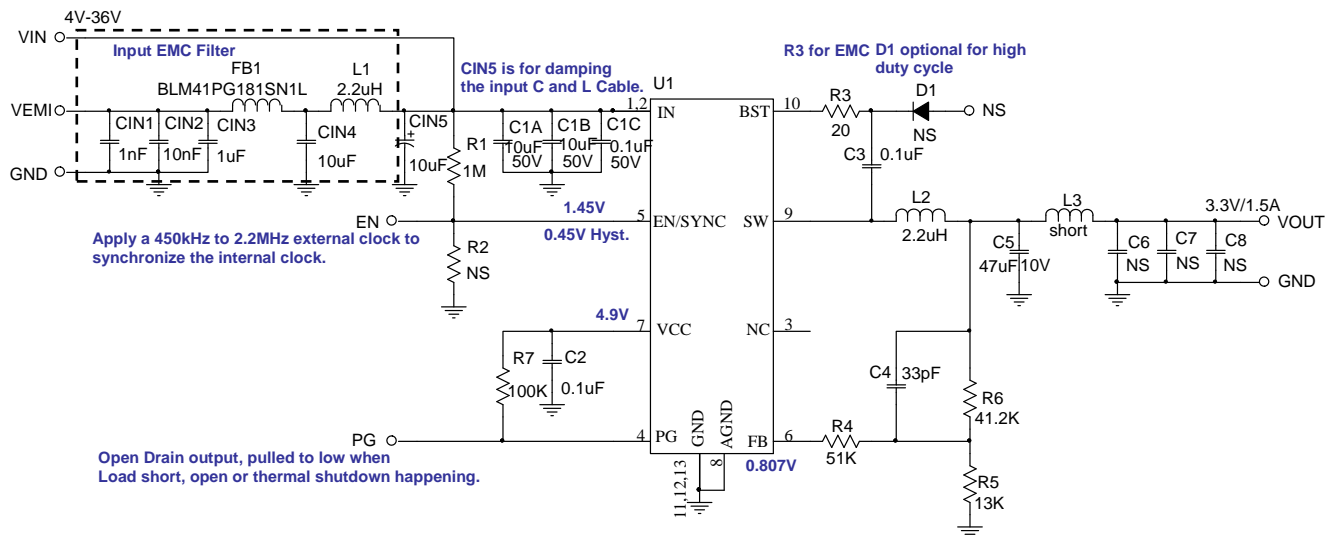

### Package reference

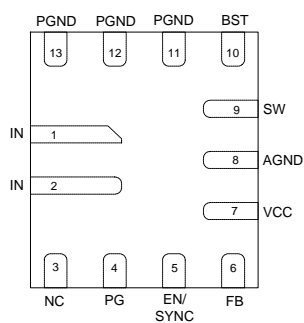

### Reference for FB divider selection


Vo(V)	R6(kΩ)	R5(kΩ)
5	41.2(1%)	7.68(1%)
2.5	41.2(1%)	19.6(1%)
1.8	41.2(1%)	33.5(1%)

**EV4415M-QB-00A BILL OF MATERIALS**


Qty	Ref	Value	Description	Package	Manufacturer	Part Number
5	CIN1, CIN5	NS				
2	C1A, C1B	10 $\mu$ F	Ceramic Cap., 50V, X5R	1206	muRata	GRM31CR61H106KA12L
1	C1C	0.1 $\mu$ F	Ceramic Cap., 50V, X7R	0603	muRata	GRM188R71H104KA93D
2	C2, C3	0.1 $\mu$ F	Ceramic Cap., 16V, X7R	0603	muRata	GRM188R71C104KA01D
1	C4	33pF	Ceramic Cap., 50V, C0G	0603	muRata	GRM1885C1H330JA01D
1	C5	47 $\mu$ F	Ceramic Cap., 10V, X5R	1210	muRata	GRM32ER61A476KE20L
3	C6, C7, C8	NS				
1	D1	NS				
1	FB1	NS				
1	L1	NS				
1	L2	2.2 $\mu$ H	Inductor, 82mOhm DCR, 3.3A	SMD	TOKO	DFE252012F-2R2MP2
1	L3	Short				
1	R1	1M	Film Res., 5%	0603	Yageo	RC0603JR-071ML
1	R3	20	Film Res., 1%	0603	Yageo	RC0603FR-0720RL
1	R4	51k	Film Res., 1%	0603	Yageo	RC0603FR-0751KL
1	R5	13k	Film Res., 1%	0603	Yageo	RC0603FR-0713KL
1	R6	41.2k	Film Res., 1%	0603	Yageo	RC0603FR-0741K2L
1	R7	100k	Film Res., 1%	0603	Yageo	RC0603FR-07100KL
1	R2	NS				
1	U1		Step-Down Regulator	QFN13(2X3)	MPS	MPQ4415MGQB
5	VIN, VEMI, GND, GND, VOUT		2.0 Golden Pin		HZ	
4	PG, GND, EN/ SYNC, GND		2.54mm Test Pin		HZ	

# TYPICAL CHARACTERISTICS


**Quiescent Current vs. Temperature**

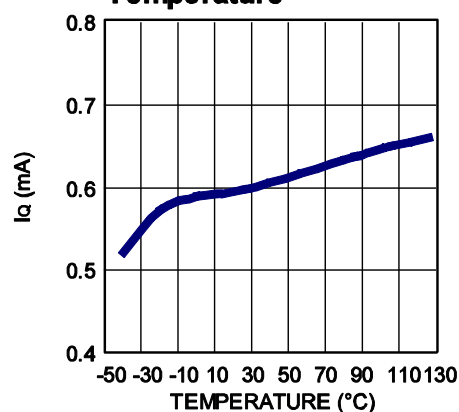


**Shutdown Current vs. Temperature**

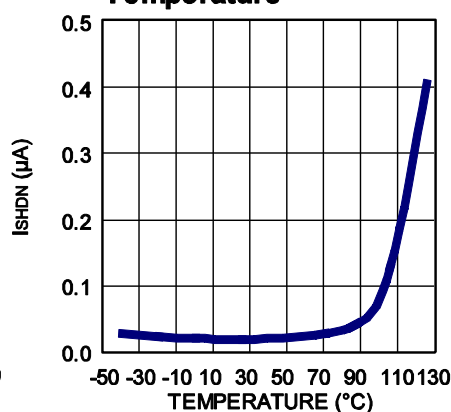


**V<sub>IN</sub> UVLO Threshold vs. Temperature**

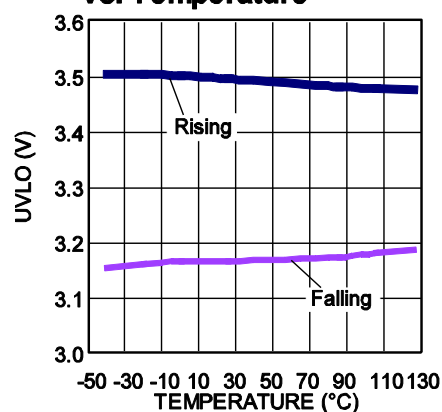


**Feedback Reference vs. Temperature**

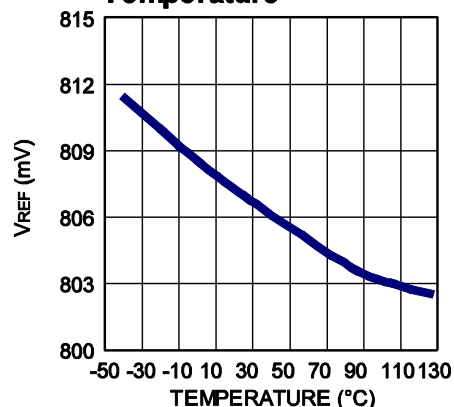


**Switching Frequency vs. Temperature**

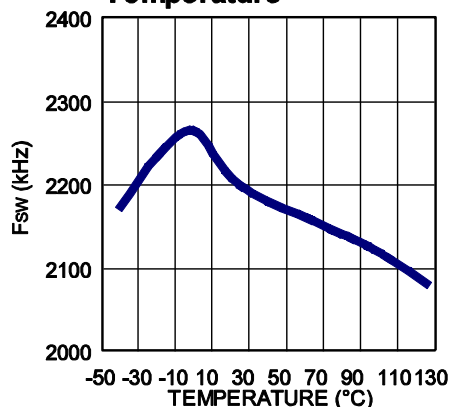


**Max Duty Cycle vs. Temperature**

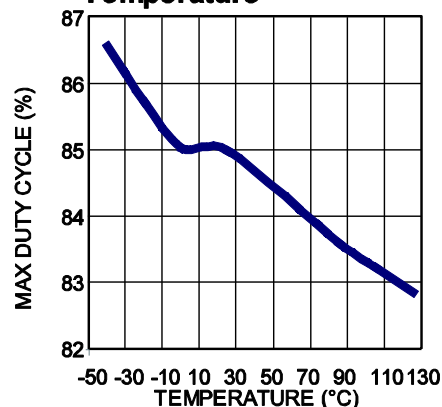


**Current Limit vs. Temperature**

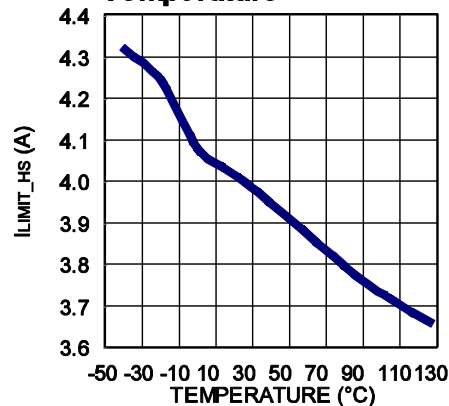


**Valley Current Limit vs. Temperature**

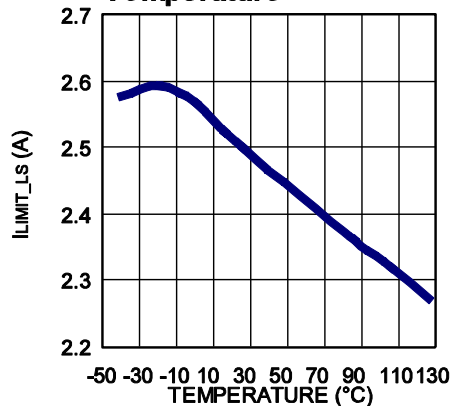

**Reverse Current Limit vs. Temperature**

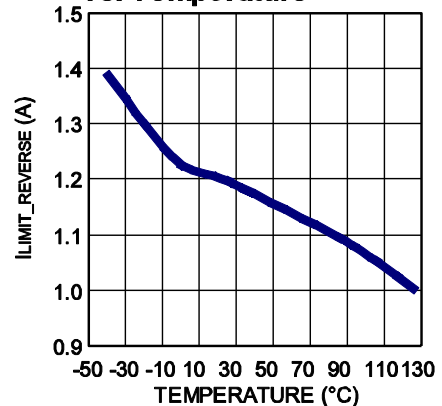










# TYPICAL CHARACTERISTICS *(continued)*

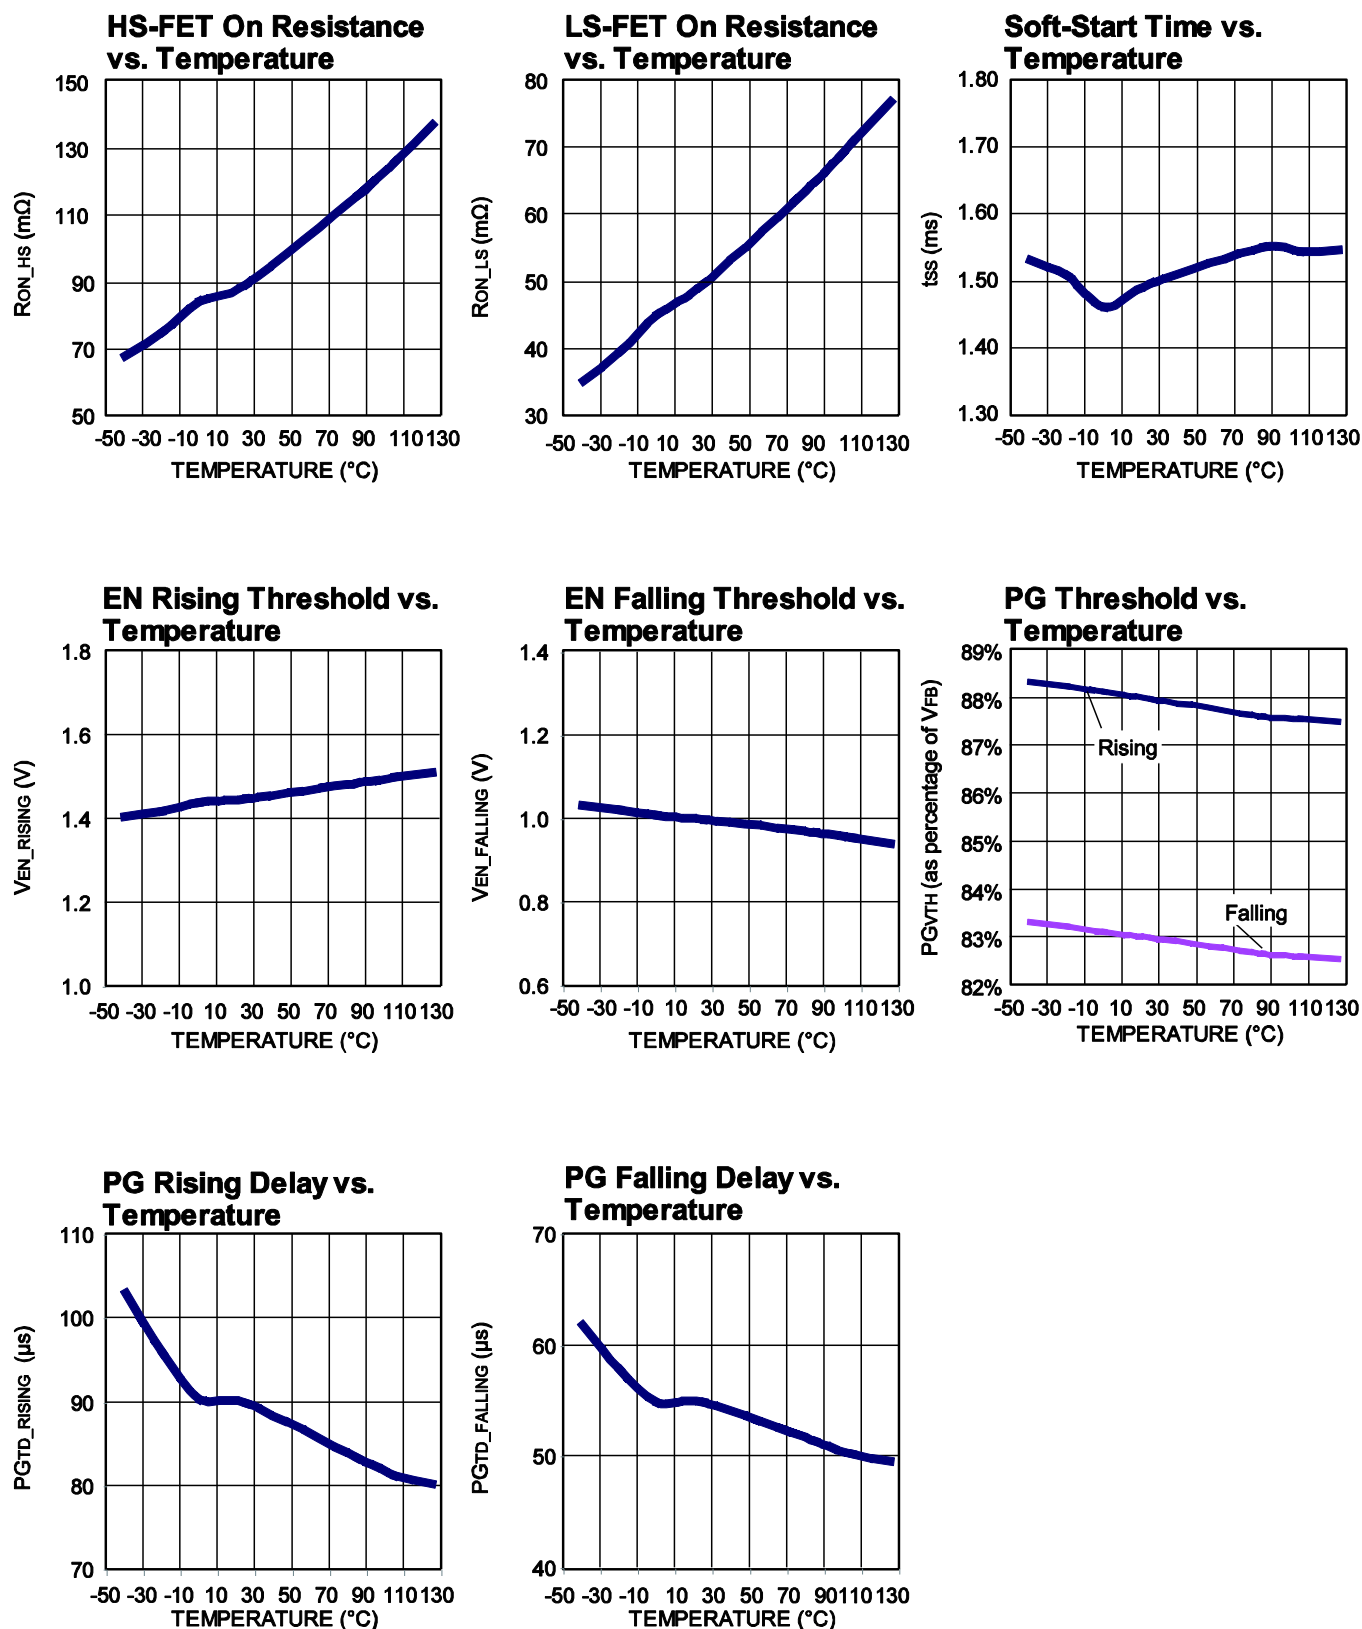

## EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 2.2\mu H$ ,  $F_{SW} = 2.2MHz$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.

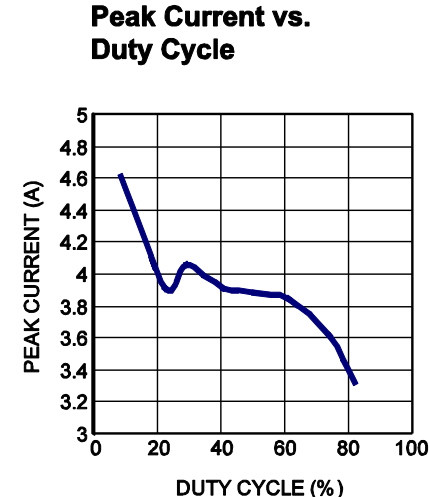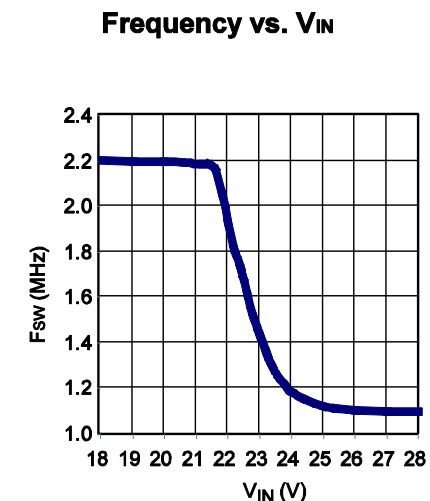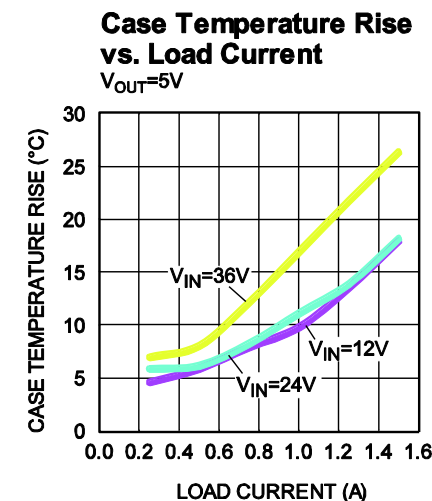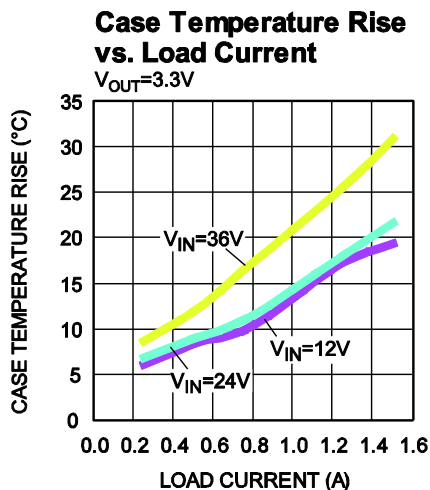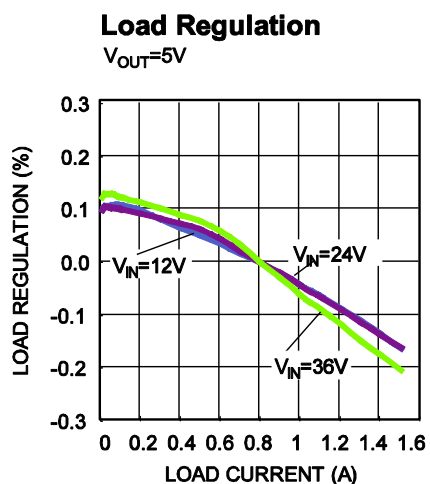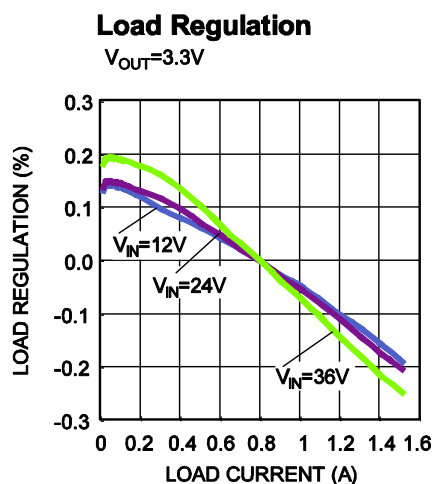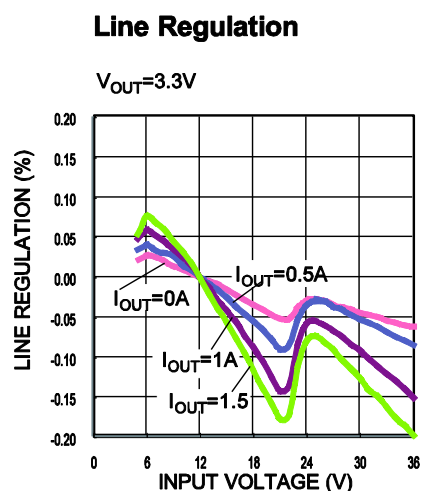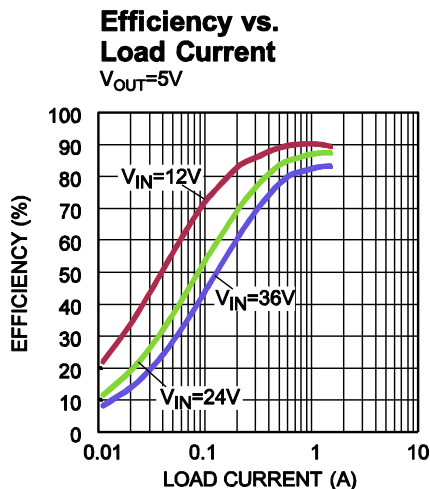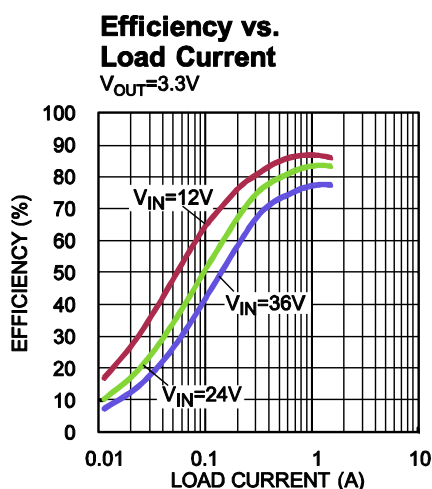


## EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 2.2\mu H$ ,  $F_{SW} = 2.2MHz$ ,  $T_A = +25^\circ C$ , unless otherwise noted.


**Steady State**

$I_{OUT} = 0A$

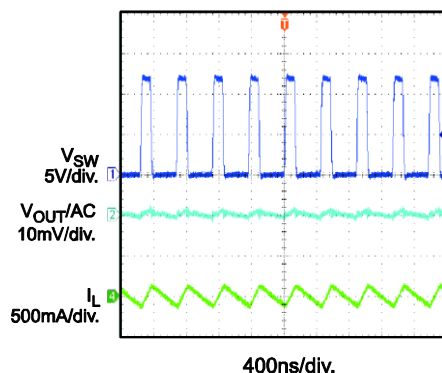


**Steady State**

$I_{OUT} = 1.5A$

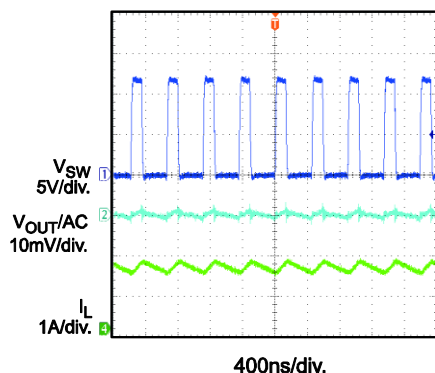


**Start-Up through Input Voltage**

$I_{OUT} = 0A$

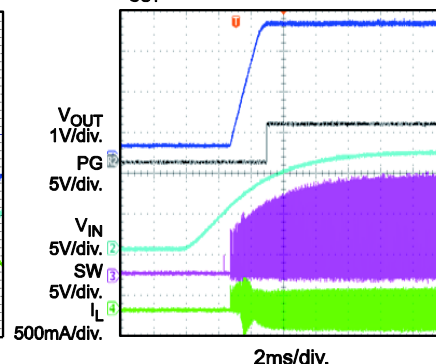


**Start-Up through Input Voltage**

$I_{OUT} = 1.5A$

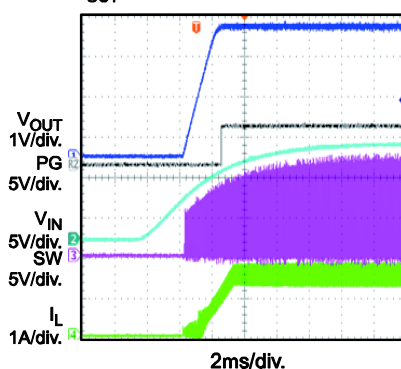


**Shutdown through Input Voltage**

$I_{OUT} = 0A$

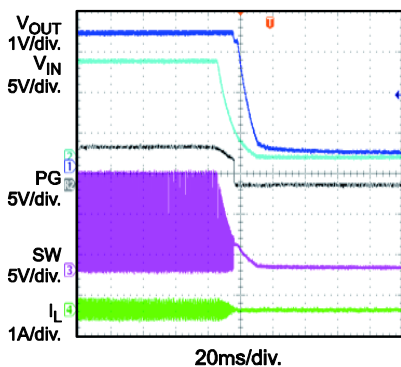


**Shutdown through Input Voltage**

$I_{OUT} = 1.5A$

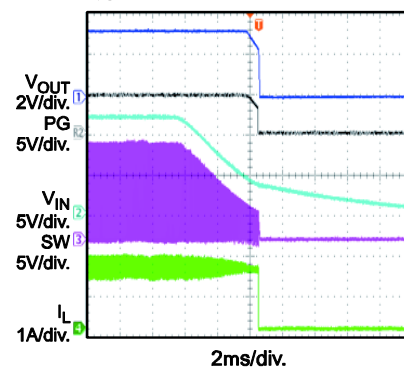


**Start-Up through Enable**

$I_{OUT} = 0A$

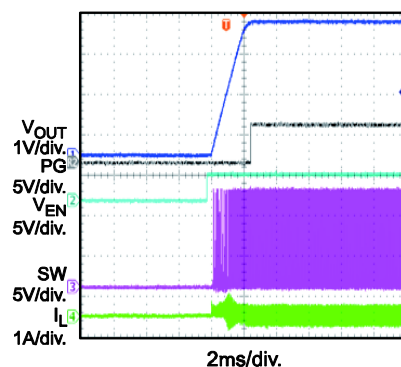


**Start-Up through Enable**

$I_{OUT} = 1.5A$

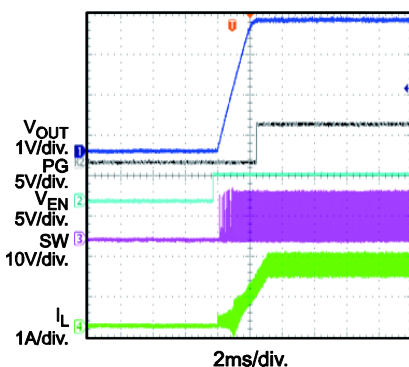

**Shutdown through Enable**

$I_{OUT} = 0A$

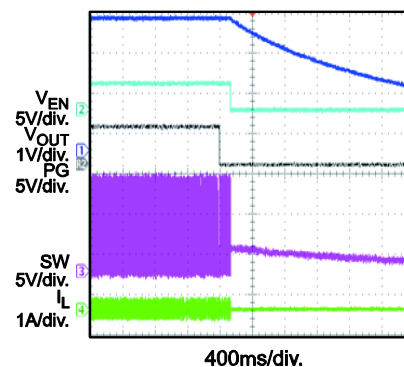




## EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 3.3V$ ,  $L = 2.2\mu H$ ,  $F_{SW} = 2.2MHz$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


### Shutdown through Enable

$I_{OUT} = 1.5A$

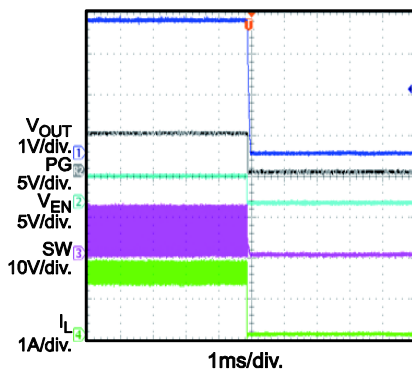


### SCP Entry

$I_{OUT} = 0A$

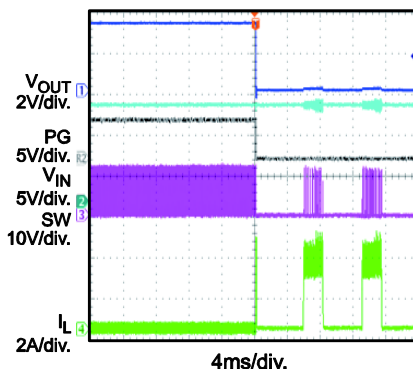


### SCP Entry

$I_{OUT} = 1.5A$

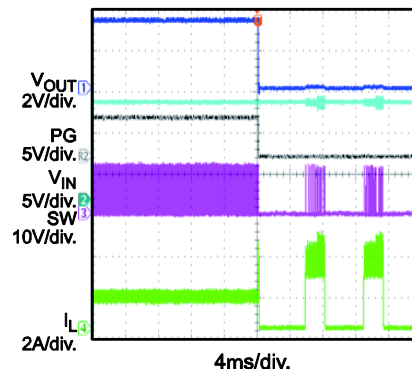


### SCP Recovery

$I_{OUT} = 0A$

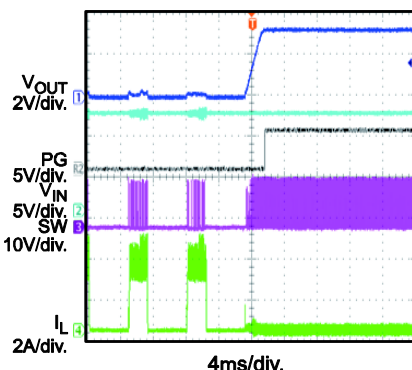


### SCP Recovery

$I_{OUT} = 1.5A$

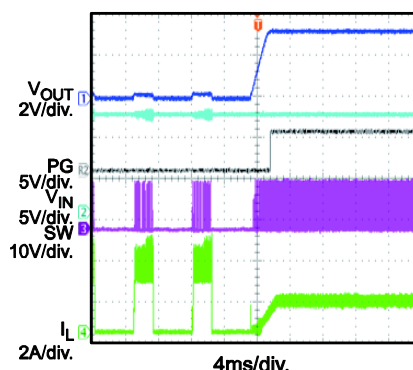


### SCP Steady State

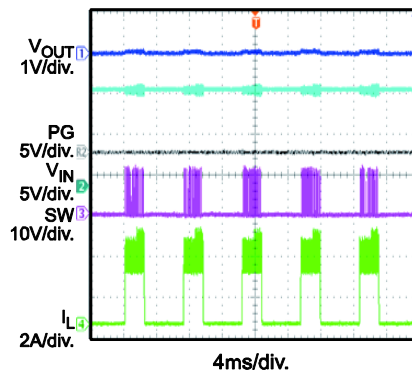


### Load Transient

$I_{OUT} = 0A - 1.5A$

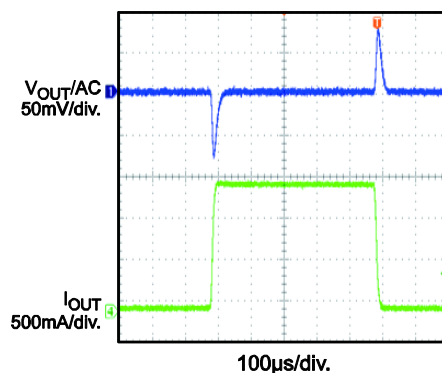


### SYNC Operation

$f_{SYNC} = 500kHz$ ,  $D = 15\%$ ,  $I_{OUT} = 0A$

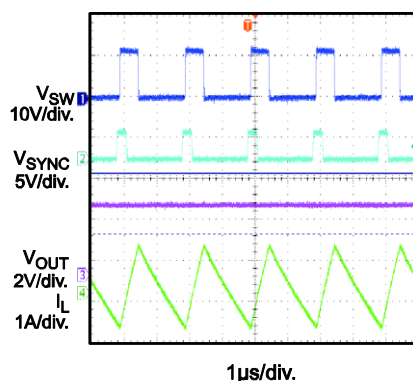

### SYNC Operation

$f_{SYNC} = 500kHz$ ,  $D = 15\%$ ,  $I_{OUT} = 1.5A$

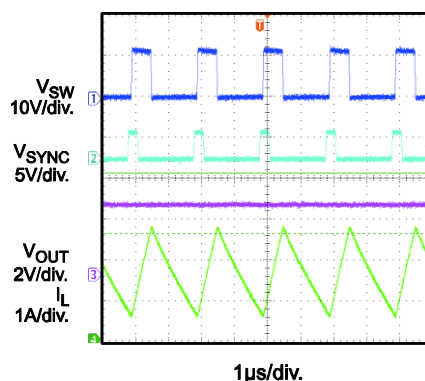



## PRINTED CIRCUIT BOARD LAYOUT

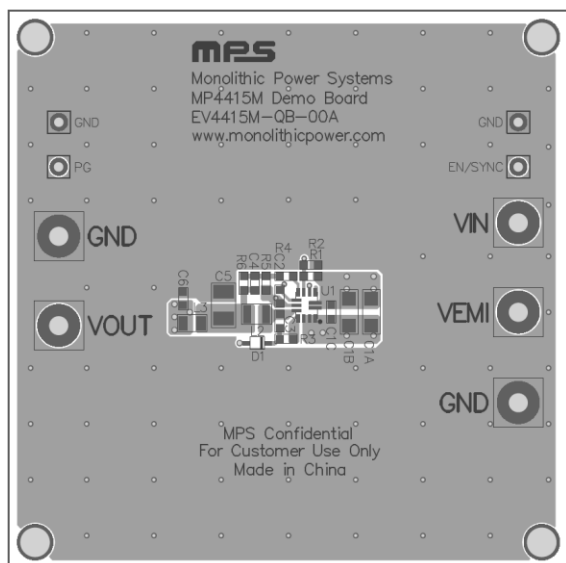


Figure 1—Top Silk Layer and Top Layer

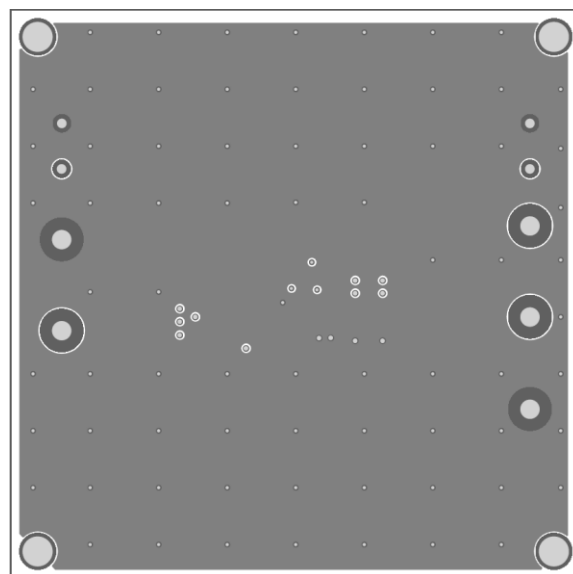


Figure 2—Inner1 Layer

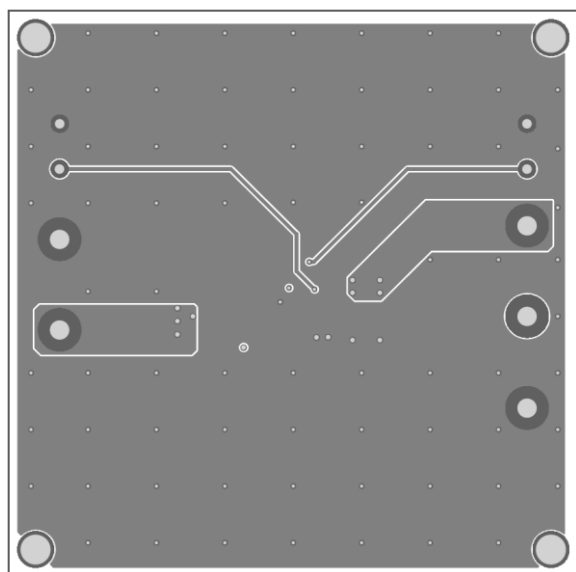


Figure 3—Inner2 Layer

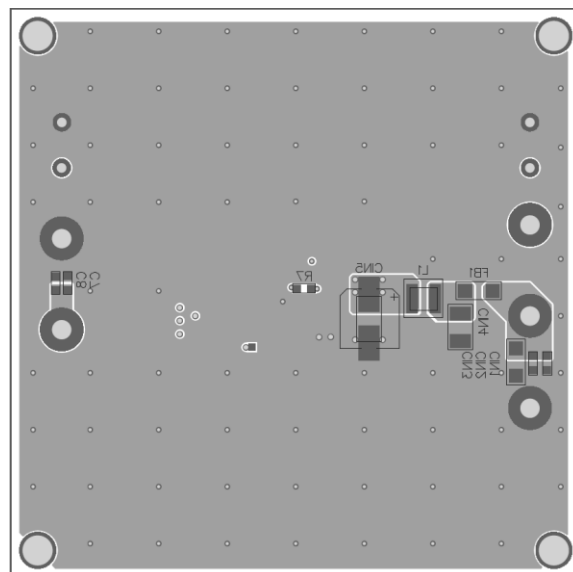


Figure 4—Bottom Silk Layer and Bottom Layer

## QUICK START GUIDE


1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.

Be aware that electronic loads represent a negative impedance to the regulator and if set to a too high current will trigger Hiccup mode.

2. Preset the power supply output to between 4 and 36V, and then turn it off.  
If longer cables are used between the source and the EVB (>0.5m total), a damping capacitor should be installed at the input terminals. Especially when  $V_{in} \geq 24V$ .
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively.
4. Turn the power supply on. The MP/MPQ4415MGQB will automatically startup.
5. To use the Enable function, apply a digital input to the EN/Sync pin. Drive EN higher than 1.45V to turn on the regulator, drive EN less than 1V to turn it off.
6. To use the Sync function, apply a 450kHz to 2.2MHz external clock to the EN/Sync pin to synchronize the internal clock rising edge.
7. The output voltage is set by the external resistor divider. The feedback resistor ( $R_{FB1}$ ) also sets the feedback loop bandwidth with the internal compensation capacitor. Choose  $R_{FB1}$  to be around 40k $\Omega$  when  $V_{OUT} \geq 1V$ .  $R_{FB2}$  can then be calculated with below equation:

$$R_{FB2} = \frac{R_{FB1}}{\frac{V_{OUT}}{0.807V} - 1}$$

8. The T-type network is highly recommended when  $V_{OUT}$  is low.

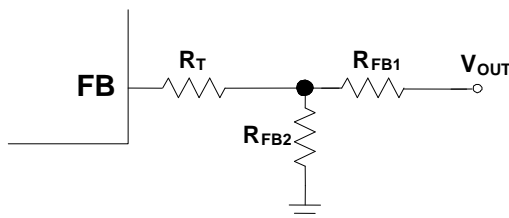

9.  $R_T + R_{FB1}$  is used to set the loop bandwidth. The lower  $R_T + R_{FB1}$  is, the higher the bandwidth. However, a high bandwidth may cause an insufficient phase margin, resulting in loop unstable. Therefore, a proper  $R_T$  value is required to make a trade-off between bandwidth and phase margin. Below table lists the recommended feedback resistor and  $R_T$  values for common output voltages.

$V_{OUT}$ (V)	$R_{FB1}$ (k $\Omega$ )	$R_{FB2}$ (k $\Omega$ )	$R_T$ (k $\Omega$ )
3.3	41.2 (1%)	13 (1%)	51 (1%)
5	41.2 (1%)	7.68 (1%)	51 (1%)

**NOTICE:** The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EV4415M-QB-00A](#)