

## JIB &amp; RMB SERIES

WELCOME FOR OEMs ORDER



JIB SERIES



RMB SERIES

**SIZE:**

ø38mmx23mm (ø1.49"x0.90")

**CONSTRUCTION :**

- Plastic base
- Metal rotor

**OPERATING TEMPERATURE :**

Ball bearing - 30°C to + 75°C

**INSULATION RESISTANCE :**10 meg Ohm min. at 500 VDC  
(between frame and terminal)**DIELECTRIC STRENGTH :**5 mA max. at 500 VAC 60Hz one minute  
(between frame and terminal)**WEIGHT :**


60 grams

## Specifications

Specifications are subject to change without notice


MODEL NO.	BEARING	RATED VOLTAGE VDC	OPERATING VOLTAGE RANGE V	RATED CURRENT A	RATED INPUT POWER W	SPEED R.P.M.
JIB0412LL	BALL	12	10.2~13.8	0.11	1.32	4900
JIB0412LM	BALL	12	10.2~13.8	0.12	1.44	5700
JIB0412LH	BALL	12	10.2~13.8	0.14	1.68	6400
JIB0412RL	BALL	12	10.2~13.8	0.11	1.32	4900
JIB0412RM	BALL	12	10.2~13.8	0.12	1.44	5700
JIB0412RH	BALL	12	10.2~13.8	0.14	1.68	6400
JIB0424LL	BALL	24	20.4~27.6	0.11	2.64	4900
JIB0424LM	BALL	24	20.4~27.6	0.12	2.88	5700
JIB0424LH	BALL	24	20.4~27.6	0.13	3.12	6400
JIB0424RL	BALL	24	20.4~27.6	0.11	2.64	4900
JIB0424RM	BALL	24	20.4~27.6	0.12	2.88	5700
JIB0424RH	BALL	24	20.4~27.6	0.13	3.12	6400
RMB0112B	BALL	12	10.2~13.8	0.08	0.96	4000

Dimensions (mm)

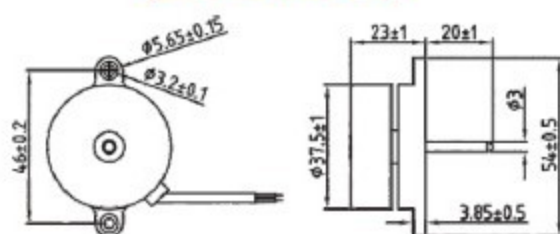

JIB

Dimensions (mm)

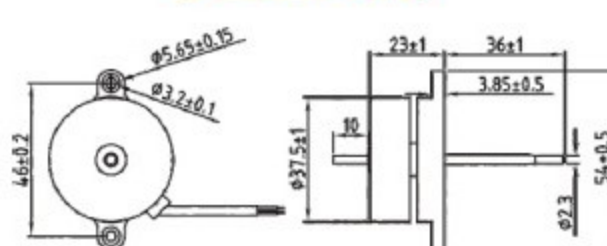

RMB

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eagle Plastic Devices:

[JIB0424RH](#) [JIB0424LM](#) [JIB0424RM](#) [RMB0212B](#)