

### **DESCRIPTION**

The EVQ8633A-LE-01A is an evaluation board for the MPQ8633A, a high efficiency, monolithic, synchronous step-down converter.

The EV board can deliver 12A continuous load current over a wide operating input range. High efficiency can be achieved over a wide output current load range.

The MPQ8633A adopts internally compensated constant-on-time (COT) control mode that provides fast transient response and eases loop stabilization.

This EV board can be turned on or off via a remote ON/OFF input (EN) that is referenced to ground. This input is compatible with popular logic devices.

### **ELECTRICAL SPECIFICATION**

| Parameter      | Symbol    | Value | Units |
|----------------|-----------|-------|-------|
| Input Voltage  | $V_{IN}$  | 8-16  | V     |
| Output Voltage | $V_{OUT}$ | 1.2   | V     |
| Output Current | $I_{OUT}$ | 12    | A     |

### **FEATURES**

- Wide Input Voltage Range from 2.7V:
  - 2.7V to 16V with External 3.3V VCC Bias
  - 4V to 16V with Internal VCC Bias or External 3.3V VCC Bias
- Differential Output Voltage Remote Sense
- Programmable Accurate Current Limit Level
- 12A Output Current
- Low  $R_{DS(ON)}$  Integrated Power MOSFETs
- Proprietary Switching Loss Reduction Technique

- Adaptive COT for Ultrafast Transient Response
- Stable with Zero-ESR Output Capacitor
- 0.5% Reference Voltage Over 0°C to +70°C Junction Temperature Range
- 1% Reference Voltage Over -40°C to +125°C Junction Temperature Range
- Selectable Pulse-Skip or Forced-CCM Operation
- Excellent Load Regulation
- Output Voltage Tracking
- Output Voltage Discharge
- PGOOD Active Clamped Low Level during Power Failure
- Programmable Soft Start Time from 1ms
- Pre-Bias Start up
- Selectable Switching Frequency of 600kHz, 800kHz and 1000kHz
- Non-latch OCP, UVP, UVLO, Thermal Shutdown, and Latch-off for OVP
- Output Adjustable from 0.6V to 90%\* $V_{IN}$ , Up to 5.5V max.
- Available in a QFN3X4 mm Package


### **APPLICATIONS**

- Telecom and Networking Systems
- Server, Cloud-Computing, Storage
- Base Stations
- General Purpose Point-of-Load (PoL)
- 12V Distribution Power Systems
- High-end TV
- Game Consoles and Graphic Cards

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Products, Quality Assurance page.

"MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.


## EVQ8633A-LE-01A EVALUATION BOARD

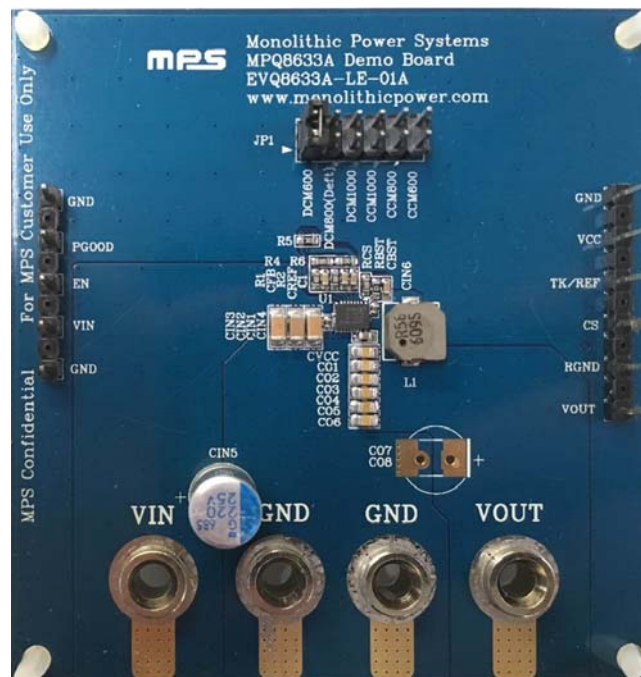

(L x W x H)81.3 mm x 77.5mm x 1.6 mm)

| Board Number    | MPS IC Number |
|-----------------|---------------|
| EVQ8633A-LE-01A | MPQ8633AGLE   |

## EVALUATION BOARD SCHEMATIC

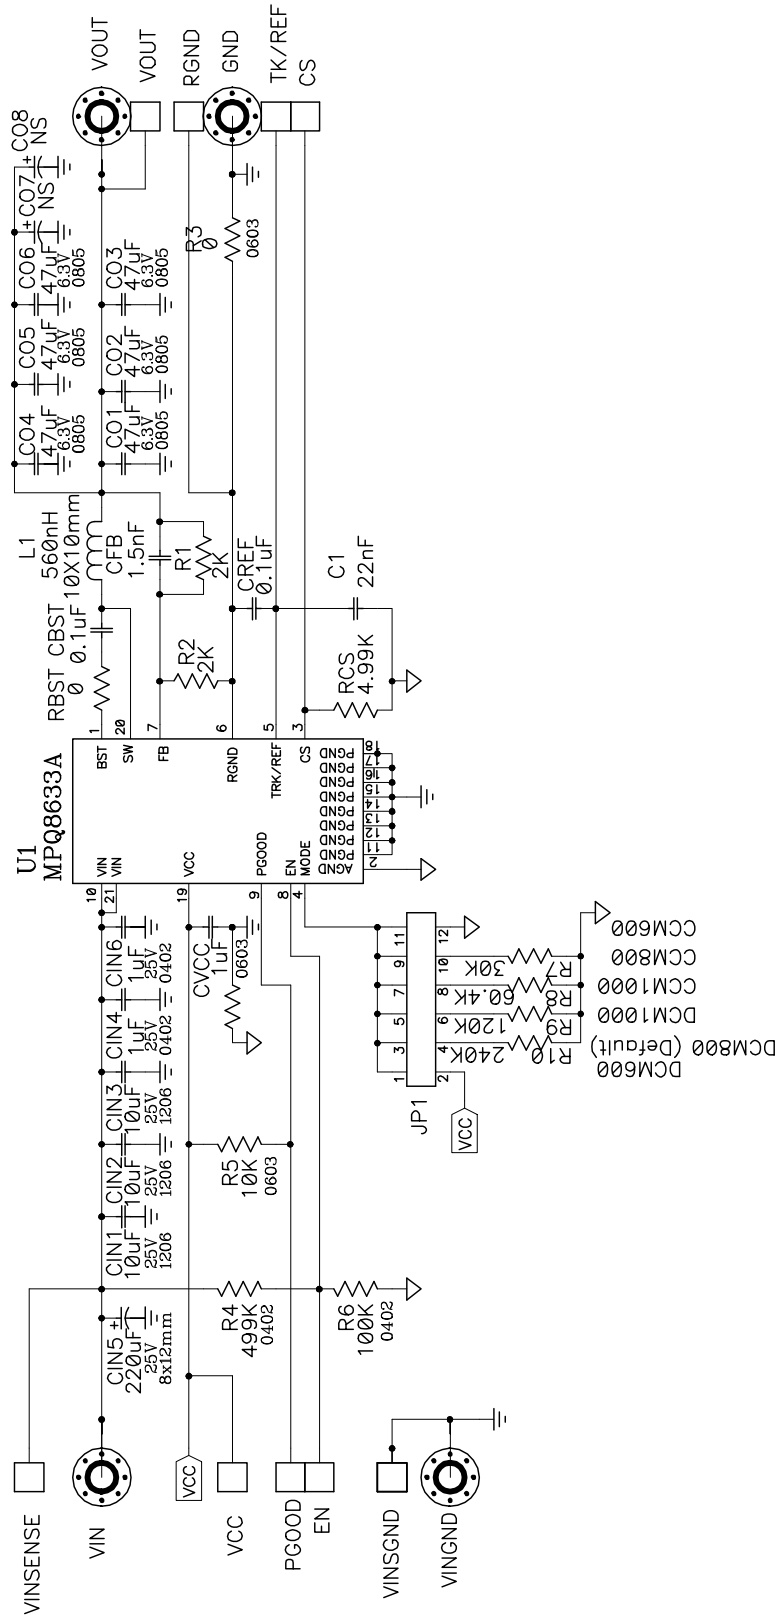


**EVQ8633A-LE-01A BILL OF MATERIALS**

| Qty | Ref                          | Value       | Description                    | Package     | Manufacturer         | Part Number        |
|-----|------------------------------|-------------|--------------------------------|-------------|----------------------|--------------------|
| 1   | C1                           | 22nF        | CAP, 25V, 10%, X7R             | CAP0603     | Generic              |                    |
| 2   | CBST, CREF                   | 0.1μF       | CAP CER 0.1μF 25V 10% X7R 0603 | CAP0603     | Generic              |                    |
| 1   | CFB                          | 1.5nF       | CAP, 50V, 10%, X7R             | CAP0603     | Generic              |                    |
| 3   | CIN1, CIN2, CIN3             | 10μF        | Capacitor, 25V, X7R, 10%       | CAP1206     | Murata or Generic    | GRM31CR71E106KA12L |
| 2   | CIN4, CIN6                   | 1μF/25V     | CAP CER 1μF 25V 10% X6S 0402   | CAP0402     | Murata or Generic    | GRM155C81E105KE11D |
| 1   | CIN5                         | 220μF       | 220μF, 25V, 16mOhm ESR         | D8P3.5mm    | Chemi-Con or Generic | APSG250ELL221MHB5S |
| 6   | CO1, CO2, CO3, CO4, CO5, CO6 | 47μF        | CAP, 6.3V, X5R, 20%            | CAP0805     | Murata or Generic    | GRM21BR60J476ME15L |
| 1   | CO7                          | NS          |                                | D2          |                      |                    |
| 1   | CO8                          | NS          |                                | D8P3.5mm    |                      |                    |
| 1   | CVCC                         | 1μF         | CAP CER 1μF 6.3V 10% X7R 0603  | CAP0603     | Generic              |                    |
| 1   | L1                           | 560nH       | Inductor ,14A, 2.8mΩ           | 7x7mm       | TOKO or Generic      | FCUL0630-H-R56M    |
| 2   | R1, R2                       | 2k          | Film Res., 1%                  | 0603        | Generic              |                    |
| 2   | R3, RBST                     | 0           | Film Res., 5%                  | 0603        | Generic              |                    |
| 1   | R4                           | 499k        | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R5                           | 10k         | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R6                           | 100k        | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R7                           | 30k         | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R8                           | 60.4k       | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R9                           | 120k        | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | R10                          | 240k        | Film Res., 1%                  |             | Generic              |                    |
| 1   | RCS                          | 4.99k       | Film Res., 1%                  | 0603        | Generic              |                    |
| 1   | U1                           | MQ8633A GLE | 16V/12A Step Down Convert      | QFN21-3x4mm | MPS                  | MQ8633AGLE         |
|     |                              |             |                                |             |                      |                    |
|     |                              |             |                                |             |                      |                    |

## EVB TEST RESULTS

Performance waveforms are tested on the EVQ8633A-LE-01A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.

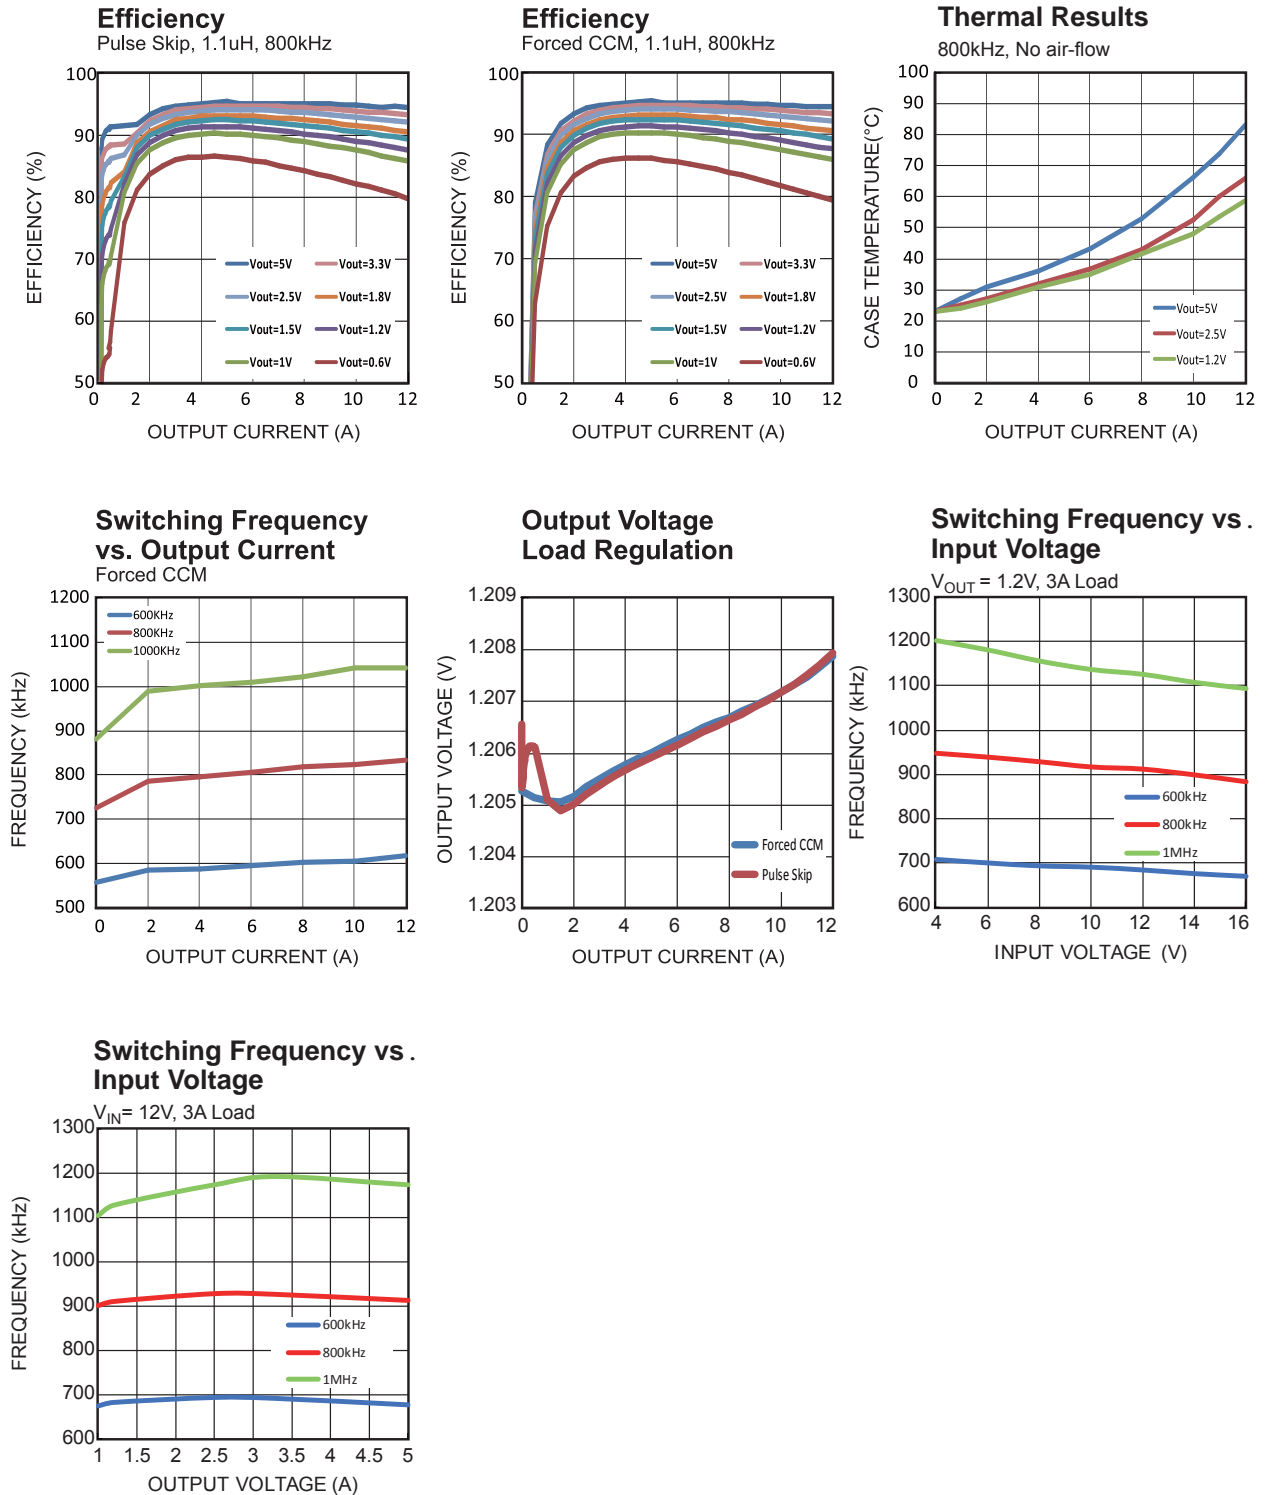


## EVB TEST RESULTS *(continued)*

Performance waveforms are tested on the EVQ8633A-LE-01A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


### Steady State

$I_{OUT} = 0A$ , Pulse Skip

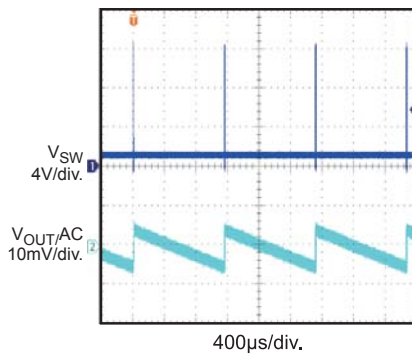


### Steady State

$I_{OUT} = 0.5A$ , Pulse Skip

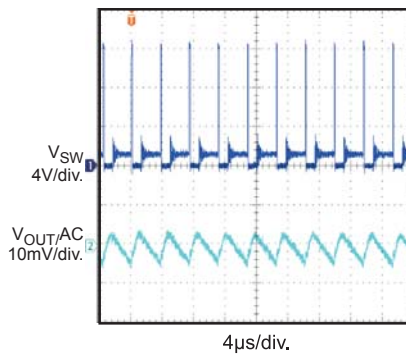


### Steady State

$I_{OUT} = 12A$ , Pulse Skip

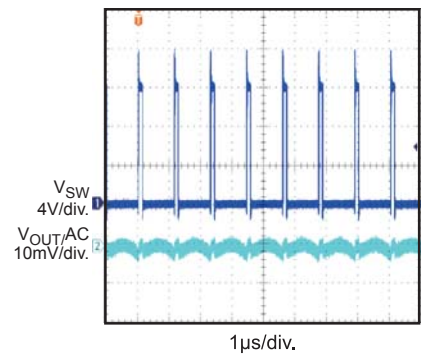


### Steady State

$I_{OUT} = 0A$ , Forced CCM

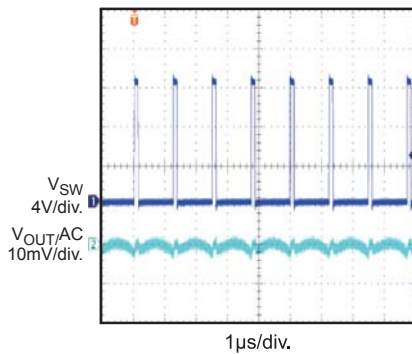


### Steady State

$I_{OUT} = 12A$ , Forced CCM

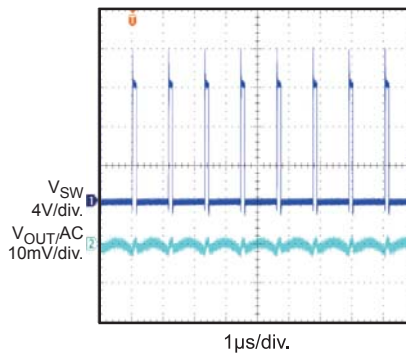


### Load Transient

$I_{OUT} = 0A-6A$ , Pulse Skip

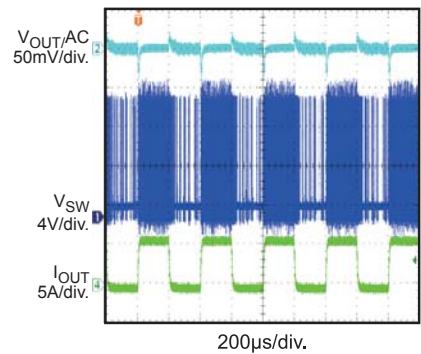


### Load Transient

$I_{OUT} = 0A-6A$ , Forced CCM

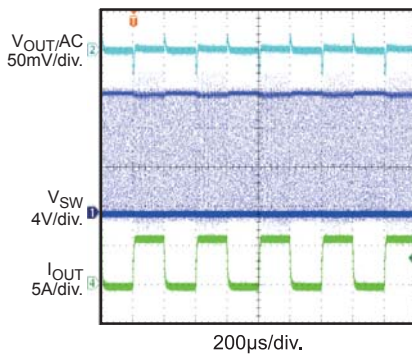


### Power Up through EN

$I_{OUT} = 0A$ , Pulse Skip

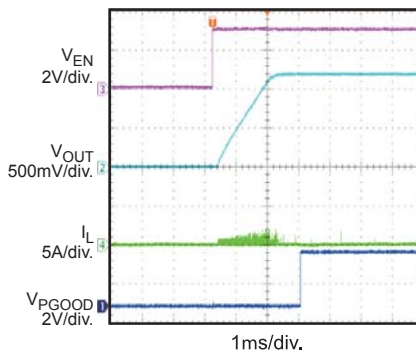

### Power Up through EN

$I_{OUT} = 12A$ , Pulse Skip

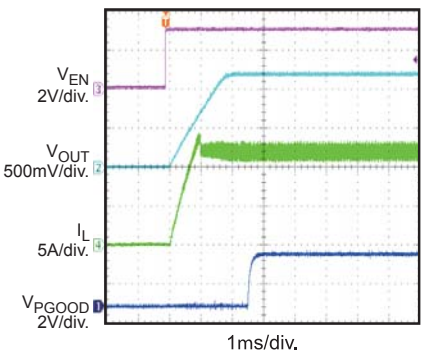




## EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the EVQ8633A-LE-01A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Power Up through EN**  
 $I_{OUT} = 0A$ , Forced CCM

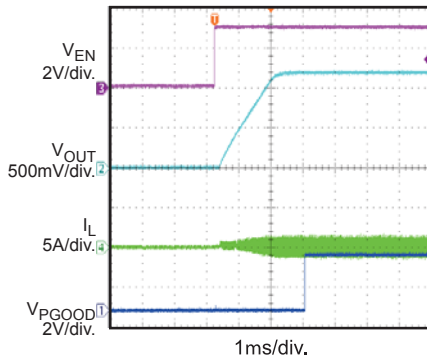


**Power Up through EN**  
 $I_{OUT} = 12A$ , Forced CCM

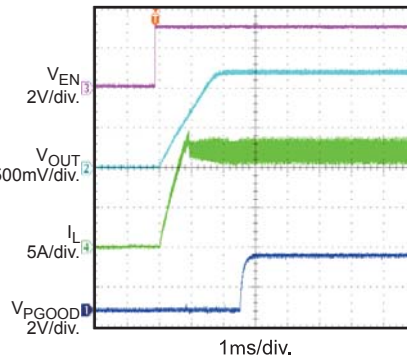


**Power Down through EN**  
 $I_{OUT} = 0A$ , Pulse Skip

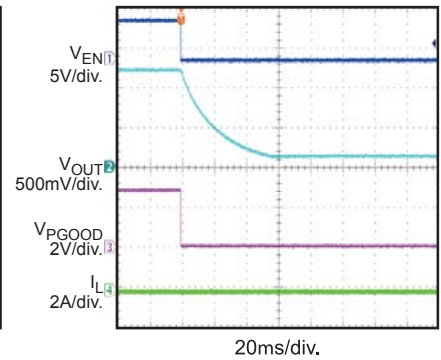


**Power Down through EN**  
 $I_{OUT} = 12A$ , Pulse Skip

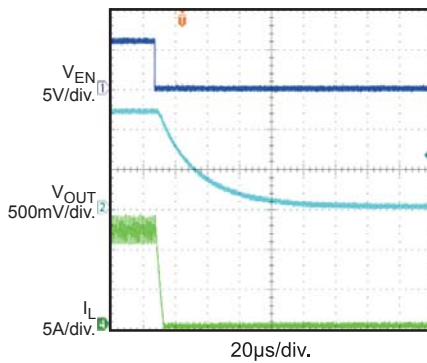


**Power Down through EN**  
 $I_{OUT} = 0A$ , Forced CCM

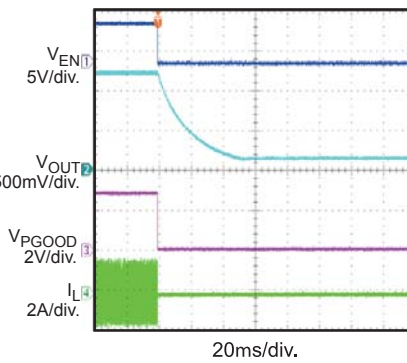


**Power Down through EN**  
 $I_{OUT} = 12A$ , Forced CCM

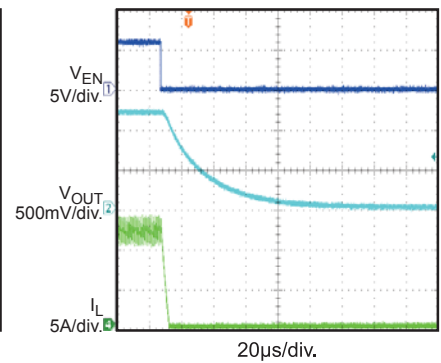


**Pre-bias Start Up**  
Pulse Skip

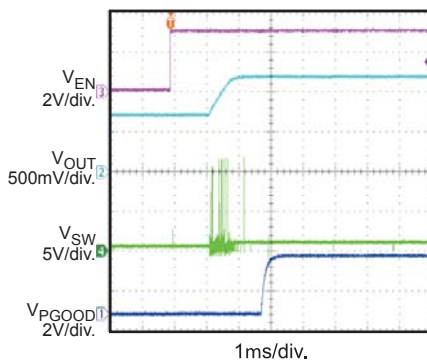

**Pre-bias Start Up**  
Forced CCM

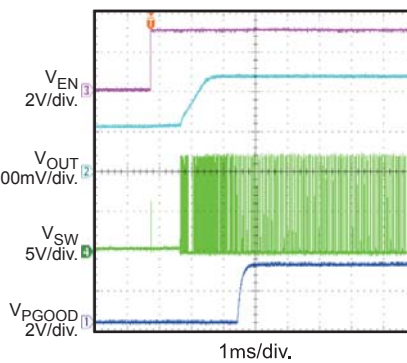

**Over-Current Protection Entry**

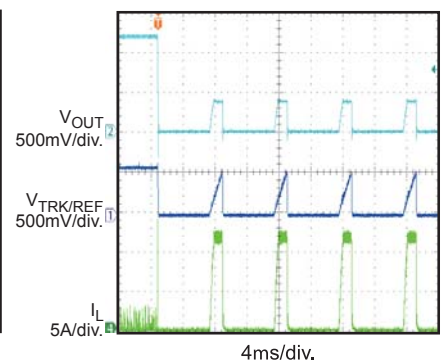


## EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the EVQ8633A-LE-01A evaluation board.

$V_{IN} = 12V$ ,  $V_{OUT} = 1.2V$ ,  $L = 560nH$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.


**Over-Current  
Protection Recovery**

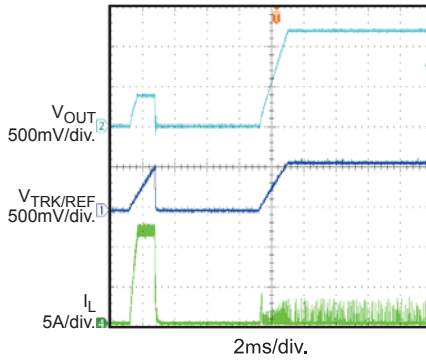


**OSM Operation**  
Pulse Skip Mode

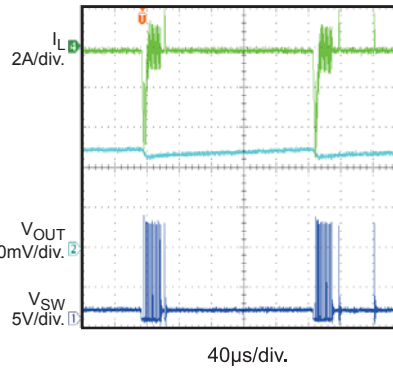

**Over-voltage Protection**  
Pulse Skip Mode

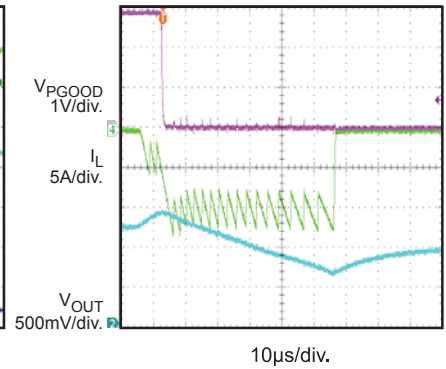

**Over-voltage Protection**  
Forced CCM

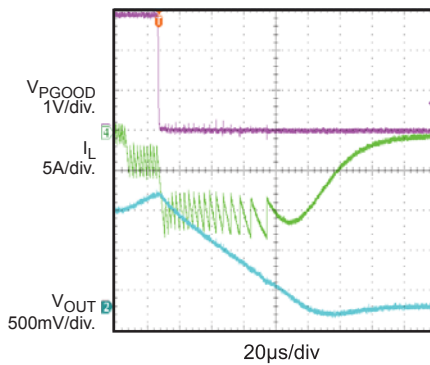



## PRINTED CIRCUIT BOARD LAYOUT

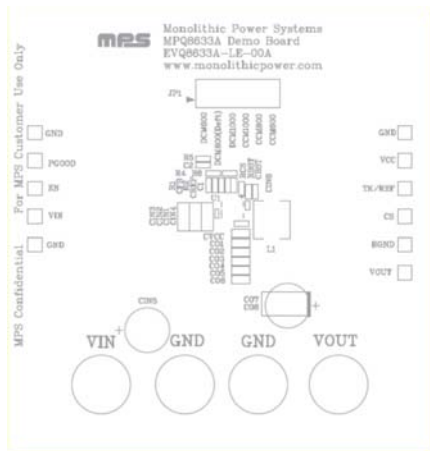


Figure 1—Top Silk Layer

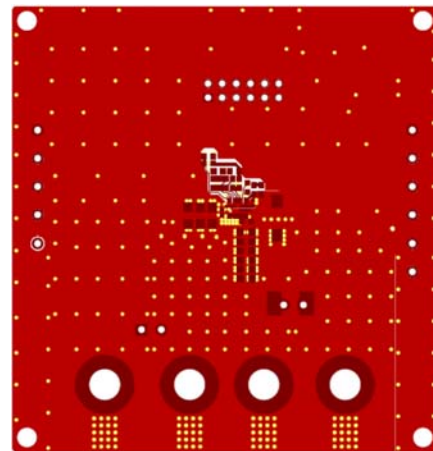


Figure 2—Top Layer

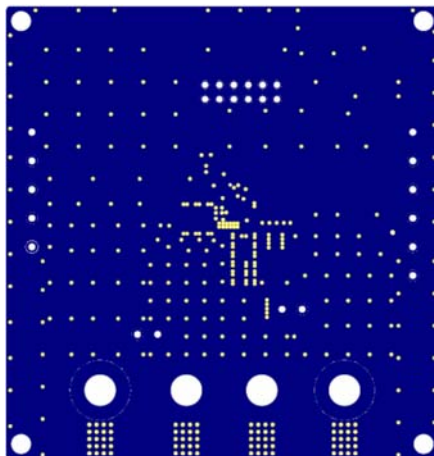


Figure 3—Inner Layer 1

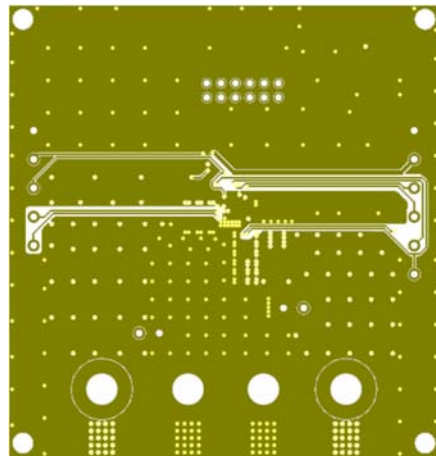


Figure 4— Inner Layer 2

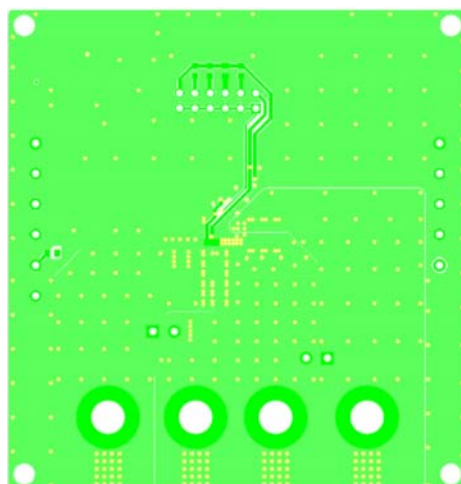


Figure 5—Bottom Layer

## QUICK START GUIDE

The input voltage of the EV board can range from 8V to 16V. The minimum 8V input voltage is limited by the EN signal, which is derived from VIN through a resistor divider (R4 and R6). Lower input voltage (as low as 2.7V with external 3.3V VCC bias) can be set by fine tuning the resistor divider values, or by over-driving the EN with an external control signal. The following is the procedure to turn on the EV board.

1. Connect the positive and negative terminals of the load to the VOUT and GND pins, respectively.
2. Preset the power supply output voltage between 8V and 16V, and then turn off the power supply.
3. Connect the positive and negative terminals of the power supply output to the VIN and GND pins, respectively. Make sure the power supply has high enough current limit to supply the power.
4. Turn the power supply on. The EVQ8633A-LE-01A will automatically startup.
5. To use the Enable function, apply a digital input to the EN pin. Drive EN higher than 1.5V to turn on the regulator or less than 0.8V to turn it off.
6. Use R1 and R2 to set the output voltage with  $V_{FB} = 0.6\text{ V}$ . Follow the Application Information section in the device datasheet to select the proper values of R1, R2, inductor and output capacitor values when output voltage is changed.
7. The JP1 jumper can be used to select the operating frequency (600kHz, 800kHz and 1000kHz) and light load operation mode (Pulse Skip/DCM and CCM).

**NOTICE:** The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Monolithic Power Systems \(MPS\):](#)

[EVQ8633A-LE-01A](#)