


AS01708MR-SC-R 17mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 17mm diameter speaker with Neodymium magnet for 88 dB sensitivity
- \bullet 0.3W continuous, 0.5 maximum power handling and 8Ω impedance
- Mylar diaphragm for moisture resistance and spring contacts for quick connection
- Less than 7 mm thick for space-limited applications



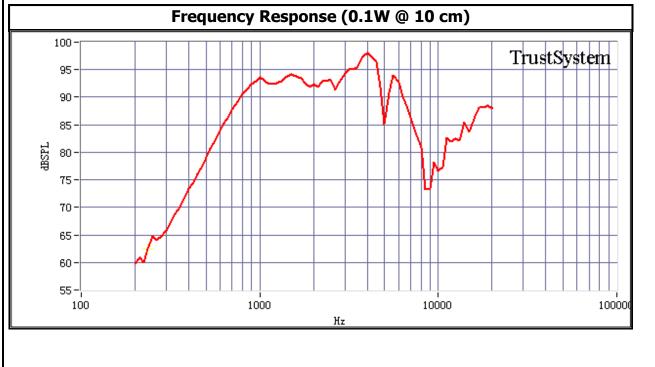




PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2016. Last Revised 9/16.




AS01708MR-SC-R

17mm Speaker

Mechanical and Environment Testing	
Test Description	Test Condition
High Temperature	60°C with random humidity for 96 hours
Low Temperature	-30°C with random humidity for 96 hours
Humidity	40°C with 90% relative humidity for 96 hours
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours each axis
Drop Test	75cm free fall onto 20 mm thick board, 6 cycles
Temperature Cycle Test	-30°C to 60°C, 5 cycles
After tests, speaker shall rest for 1 hours. SPL shall not deviate ±3 dB from pre-test measurement.	

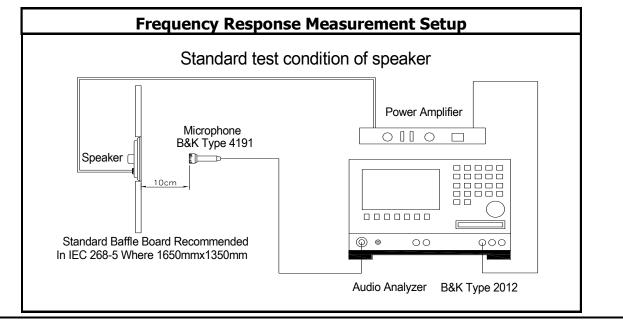

PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2016. Last Revised 9/16.

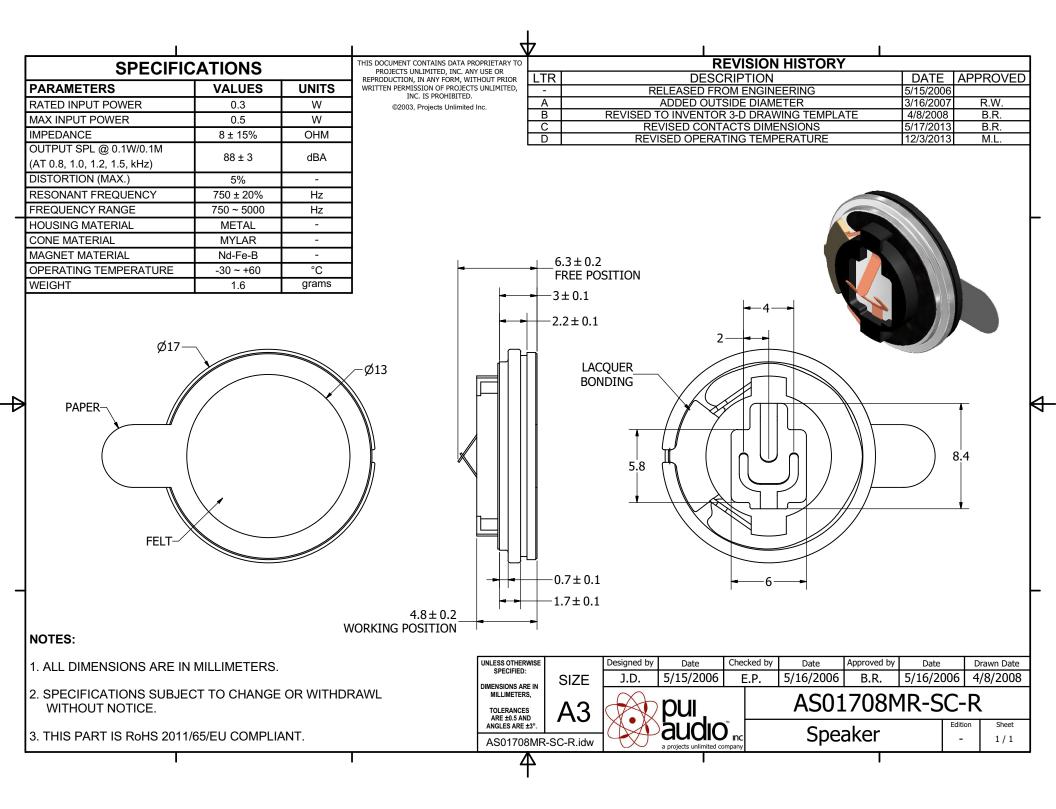

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: AS01708MR-SC-R