


AST-01532MR-R 15mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414



Product Overview


- 15mm diameter speaker with Neodymium magnet for 87 dB sensitivity
- ullet 0.3W continuous, 0.5W maximum power handling and 32 Ω impedance
- Mylar cone for wide frequency response
- Thru hole design and wave solderable for PCB mount

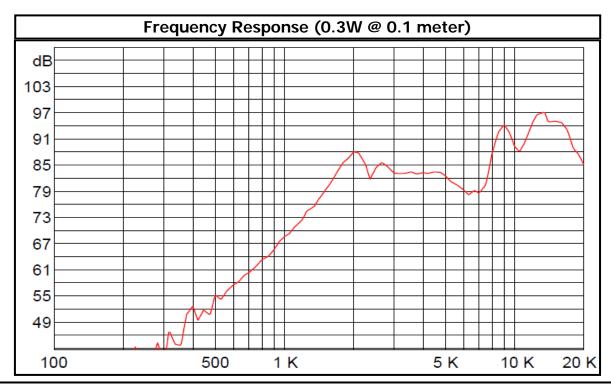








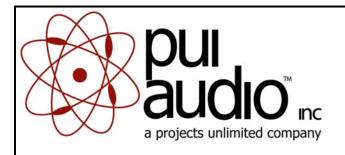


AST-01532MR-R 15mm Speaker

Mechanical and Environment Testing			
Test Description	Test Condition		
High Temperature	55°C with random humidity for 96 hours		
Low Temperature	-20°C with random humidity for 96 hours		
Humidity	40°C with 90% to 95% relative humidity for 96 hours		
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours		
Drop Test	75 cm free fall onto 40 mm thick board, 10 cy-		
Temperature Cycle Test	-20°C to 55°C, 5 cycles (refer to Temperature Cycle Test Graph)		
After tests and should neet for 1 hours CDI shall not devicte a 2 dD from the test management			

After tests, speaker shall rest for 1 hours. SPL shall not deviate ± 3 dB from pre-test measurement.

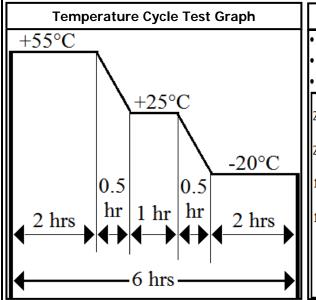

• Preheat temperature: Max 100° less than 80 seconds • Soldering bath temperature 250°C (lead)/265°C (lead-free alloy) • Wave soldering cycle time: 4 sec. (single wave), 6 sec. (dual wave) Temp. 250°C 150°C Sec./Wave 0°C 150°C Sec./Wave 0°C Sec./Wave

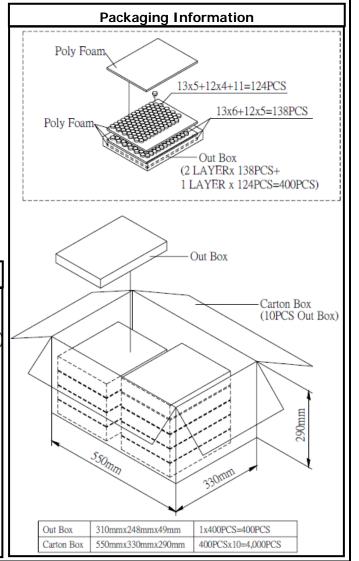



SPECIFICATIONS				
PARAMETERS	VALUES	UNITS		
RATED INPUT POWER	0.3	W		
MAX INPUT POWER	0.5	W		
IMPEDANCE	32 ± 15%	OHM		
OUTPUT SPL @ 0.3W/0.1M	87 ± 3	dBA		
(AT 2.0, 2.5, 3.0, 4.0 kHz)	0/ 13	UBA		
DISTORTION (MAX.)	10%	-		
RESONANT FREQUENCY	2,100 ± 20%	Hz		
FREQUENCY RANGE	2,100 ~ 20,000	Hz		
HOUSING MATERIAL	PBT	-		
CONE MATERIAL	MYLAR	-		
MAGNET MATERIAL	Nd-Fe-B	-		
OPERATING TEMPERATURE	-20 ~ +55	°C		
WEIGHT	2	grams		


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

REVISION HISTORY					
LTR	DESCRIPTION	DATE	APPROVED		
-	RELEASED FROM ENGINEERING	5/9/2006			
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	6/26/2008	B.R.		

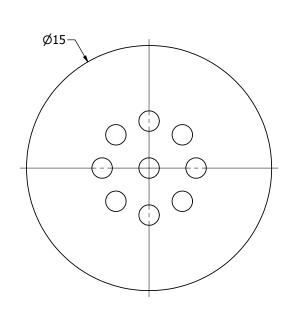

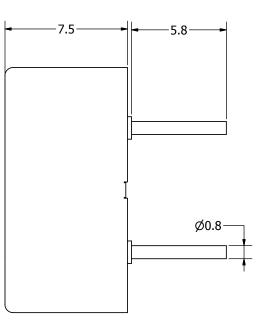

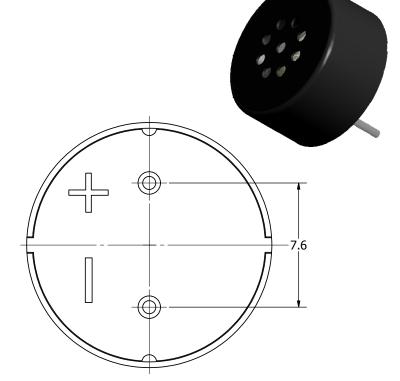

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN	SIZE
MILLIMETERS,	
TOLERANCES	Λ 2
ARE ±0.5 AND ANGLES ARE ±3°.	73
AST-01532	MR-R.idw

J.D.	5/8/2006	Е
100	וווח	
	\pui	_
1 489	A Division of Projects Unli	mited

Designed by

 Checked by
 Date
 Approved by
 Date
 Drawn Date

 E.P.
 5/8/2006
 B.R.
 5/8/2006
 6/26/2008

AST-01532MR-R

Speaker Edition Sheet

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: