

# PW128

ITE 13-32 WATT SERIES

## PW128 SWITCH-MODE POWER SUPPLY

- 100-250 VAC Universal Input
- Desktop Style or Wallplug Style
- Single Output to 32W
- Regulated Output With Low Ripple
- Meets Safety Agency Requirements
- Complies With EMI/RFI Regulations
- CE Compliant
- Impact Resistant Polycarbonate Enclosure
- Private Label Marking Available
- 1 Year Warranty
- Modified and Custom Designs Also Available

### PW128

Ault Part No.	Voltage DC	Max Amps	Max Watts
PW128XA0303_01	3.3V	4.00	13.2
PW128XA0503_01	5V	4.00	20.0
PW128XA0603_01	6V	4.00	24.0
PW128XA0703_01	7V	3.50	24.5
PW128XA0903_01	9V	3.00	27.0
PW128XA1203_01	12V	2.50	30.0
PW128XA1503_01	15V	2.00	30.0
PW128XA1803_01	18V	1.67	30.1
PW128XA2403_01	24V	1.33	31.9
PW128XA3603_01	36V	0.84	30.2
PW128XA4803_01	48V	0.67	32.2

### Ault Part No. Key

PW128	X	A	05	03	—	01
Product Family Name	Manufacturing Location (volume dependent)	Design Revision Changes	Voltage DC	Connector	Input Configuration/ Model Type (see pg. 2)	Denotes standard or custom requirements



AULT INCORPORATED

7105 Northland Terrace | Minneapolis, Minnesota 55428 | USATEL (1) 763-592-1900

FAX (1) 763-592-1911 | E-MAIL [info@aultinc.com](mailto:info@aultinc.com) | WEB [www.aultinc.com](http://www.aultinc.com)

© Copyright 2002 Ault Inc.

# PW128

ITE 13-32 WATT SERIES

## Input

Voltage	100-250 VAC -10%, +6%
Line Frequency	47 - 63 Hz
Current	TBD max at 90 VAC input
Protection	Internal primary current fuse, Inrush limiting

## Output

Combined Line and Load Voltage Regulation	±1% excluding cord
Ripple	1% V p-p max for output current of >0.175A
Transient Response	0.5 msec. for 50% load change typical
Holdup Time	18 msec min. @ 120VAC
Protection	Foldback overcurrent protection Short circuit protection
Cord and Connector	6 ft, 2 conductor, 18 AWG, Ault #3 connector. Other connectors are also available.

## Safety Approvals

Agency Listings	cULus 60950, TUV/IEC EN60950, Japanese certification available, extra fees apply
-----------------	--

## Electrical

Topology	Switching-fixed frequency flyback
Leakage Current	Less than 750 uA
Efficiency	Minimum 75%
EMI	Complies with EMC Directives
CE	CE Compliant
MTBF	100,000 Calculated Hours

## Environmental

Operating Temperature	0° to 40° C with no derating
Storage Temperature	-30° to +85° C
Relative Humidity	5% to 95% non-condensing
Altitude	0-10,000 feet
Cooling	Convectonal - non vented case

## Mechanical

Case and Dimensions	3.74L x 2.13W x 1.26H (in) 95.0L x 54.0W x 32.0H (mm)
Case Material	94V0 polycarbonate; black is standard color; other colors available - extra charges may apply
Weight	7 ounces, 198 grams

## Input Configuration



IEC320  
w/ground  
C14  
(F)



IEC320  
w/o ground  
C18  
(Q)



N. America/  
Japan  
(B)



Europe  
(M)



United  
Kingdom  
(G)




Shaver  
C8  
(N)

Inlet type : IEC320-C14, C8  
Plug type : NA, EURO, UK, SAA

Specify the Input Configuration Code in your order.

## Connector

# 3

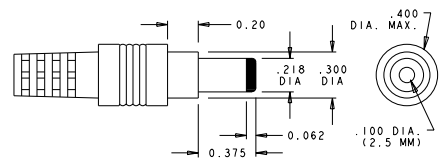

Pinout Code	Center contact: positive
Description	Switchcraft 760 plug or equivalent
Suggested Mating	Switchcraft 712A jack or equivalent
Other Connectors are available by special order	



AULT INCORPORATED

7105 Northland Terrace | Minneapolis, Minnesota 55428 | USATEL (1) 763-592-1900

FAX (1) 763-592-1911 | E-MAIL info@aultinc.com | WEB www.aultinc.com

© Copyright 2002 Ault Inc.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## SL Power:

[PW128RA2403F01](#) [PW128RA2403B01](#) [PW128RA0503F01](#) [PW128RA1203F01](#) [PW128RA1203B01](#)  
[PW128RA0903F01](#) [PW128RA4803B01](#) [PW128RA4803F01](#) [PW128RA0503B01](#) [PW128RA0903B01](#)