

Reflective Object Sensor

Type OPB733TR



Features:

- Unfocused for sensing diffuse surfaces
- Uses lensed devices for collimation of light beam
- Low-cost plastic housing
- Compact surface mount package 0.300" x 0.160" x 0.114" [7.6mmx4.1mmx2.9mm]
- Typical peak emission wavelength 890nm
- Reduced visible ambient light sensitivity
- Optimal operating distance range 0.4" [10.2mm] to 1.0" [25.4mm]



Description:


The **OPB733TR** consists of an 890nm, Infrared Light Emitting Diode (LED) and an NPN silicon Phototransistor, which are mounted "side-by-side" on parallel axes in a miniature surface mount black plastic housing. The Phototransistor is molded in a dark epoxy package, which minimizes visible ambient light sensitivity. The phototransistor responds to radiation from the LED when a reflective object passes within its field of view. This unfocused reflective object sensor is ideal for non-contact detection of materials such as paper, labels, white plastic and many other reflective materials. The OPB733TR sensors are packaged in 16mm tape on 7" [178mm] diameter reels, 500 pcs per reel. Tape and Reel package compatible with most automatic placement equipment.

Custom electrical, PCB assembly, wire and connectors are available. Contact your local OPTEK authorized representative or OPTEK for more information.


Applications:

- Assembly line automation
- ATM (Card Reader, Receipt Dispenser)
- Auto-dispense equipment
- Amusement equipment
- End-of-travel sensor
- Door sensor
- Edge detection
- Paper jam detection
- Mark detection
- Counters and sorters
- Proximity sensing
- Medical equipment
- Machine safety


Ordering Information	
Part Number	Description
OPB733TR	SMD Reflective Object Sensor

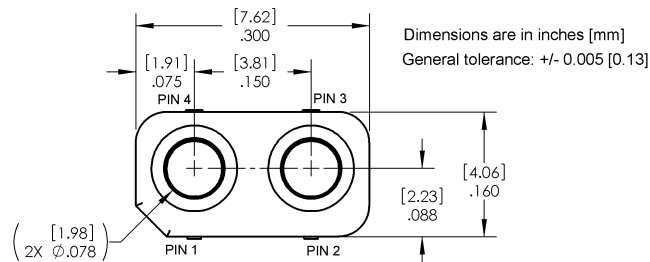



OPB733TR



Pin #	Function
1	Cathode
2	Emitter
3	Collector
4	Anode

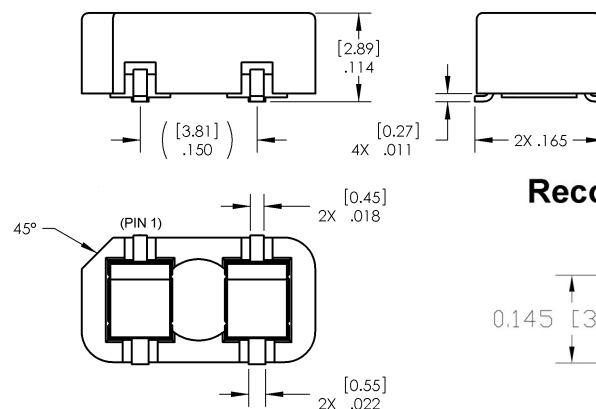

Recommended Solder Pad

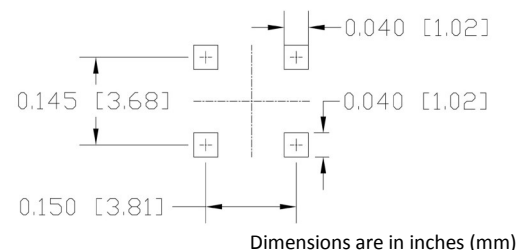

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006
Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Reflective Object Sensor

Type OPB733TR



Absolute Maximum Ratings (T _A = 25° C unless otherwise noted)						
Storage and Operating Temperature Range					-25° C to +85° C	
Soldering Temperature. (see reflow solder temperature profile figure)					260° C	
Input LED						
Forward DC Current					50 mA	
Peak Forward Current (1 μs pulse width, 300 pps)					1 A	
Reverse DC Voltage					5 V	
Power Dissipation ⁽²⁾					130 mW	
Output Phototransistor						
Collector-Emitter Voltage					30 V	
Emitter-Collector Voltage					5 V	
Collector DC Current					20 mA	
Power Dissipation ⁽³⁾					75 mW	
Electrical Characteristics (T _A = 25° C unless otherwise noted)						
SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Input IR LED (see OP271 for additional information)						
V _F	Forward Voltage	-	-	1.7	V	I _F = 20 mA
I _R	Reverse Current	-	-	10	μA	V _R = 5 V
θ _{HP}	Emission angle at half power points	-	25	-	Degree	I _F = 20 mA
λ _P	Peak Emission Wavelength	-	890	-	nm	I _F = 10mA
Output Phototransistor (see OP571 for additional information)						
V _{(BR)CEO}	Collector Emitter Breakdown Voltage	30	-	-	V	I _C = 100 μA
V _{(BR)ECO}	Emitter Collector Breakdown Voltage	5	-	-	v	I _E = 100 μA
I _{CEO}	Collector Dark Current	-	-	100	nA	V _{CE} = 10 V, I _F = 0
Tr	Rise Time	-	15	-	μs	V _{CE} = 5 Volts ⁽³⁾ I _C = 1 mA R _L = 1KΩ
Tf	Fall Time	-	15	-	μs	
Coupled Characteristics						
V _{CE(SAT)}	Collector Emitter Saturation Voltage	-	-	0.4	V	d = 0.5" (12.7 mm) ⁽¹⁾⁽²⁾ I _C = 50 μA, I _F = 20 mA
I _{C(ON)}	On-State Collector Current	0.1	-	-	mA	d = 0.5" (12.7 mm) ⁽¹⁾⁽²⁾ I _F = 20 mA, V _{CE} = 5 V

Notes:

1. "d" is the distance from the assembly's top surface to the reflective surface.
2. Measured using Eastman Kodak neutral white test card with 90% diffuse reflectance as a reflecting surface.
3. By designed but not tested.
4. Methanol or Isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006
Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com


Reflective Object Sensor

Type OPB733TR




Typical Performance Curves


LED Maximum Forward Current Vs Ambient Temperature

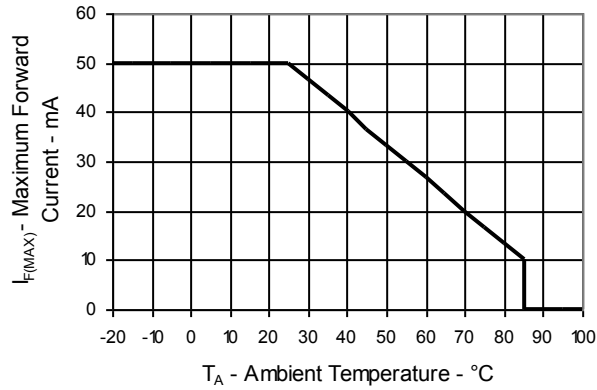


Phototransistor Collector Power Dissipation Vs Ambient Temperature

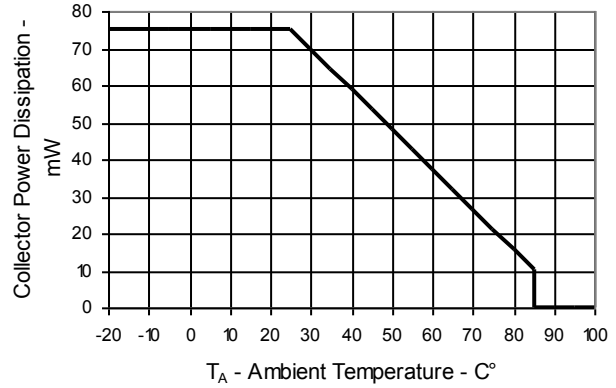


LED Forward Voltage Vs Forward Current

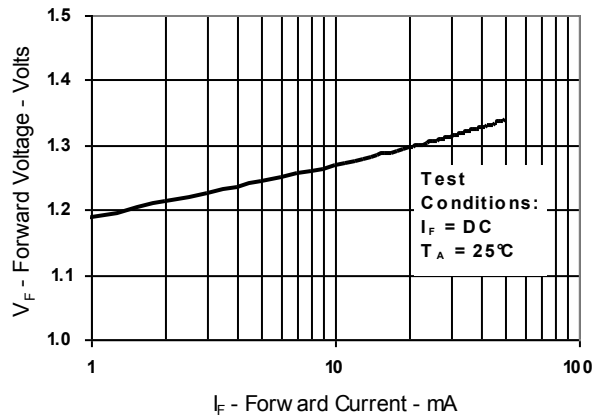


LED Relative Radiant Intensity Vs Angular Displacement

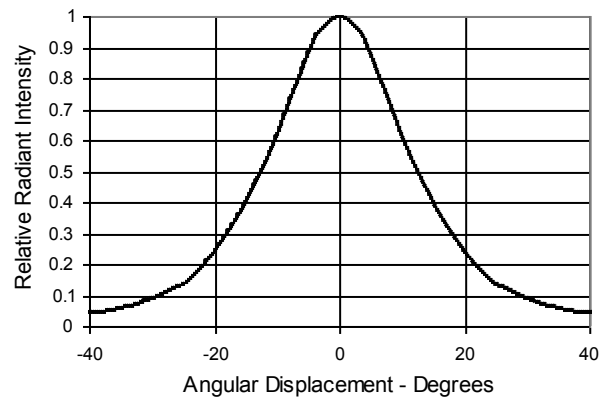

Phototransistor Relative Spectral Response Vs Wavelength

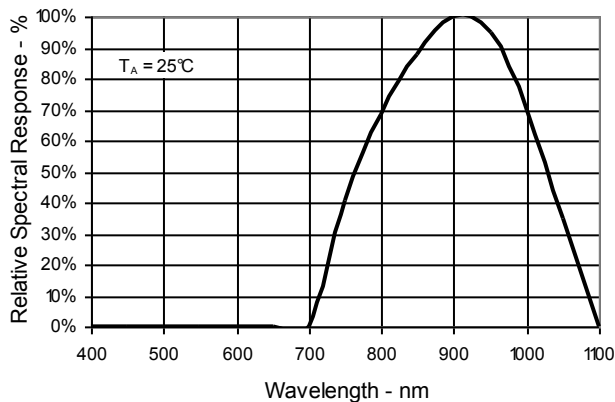

Normalized Collector Current Vs LED Forward Current

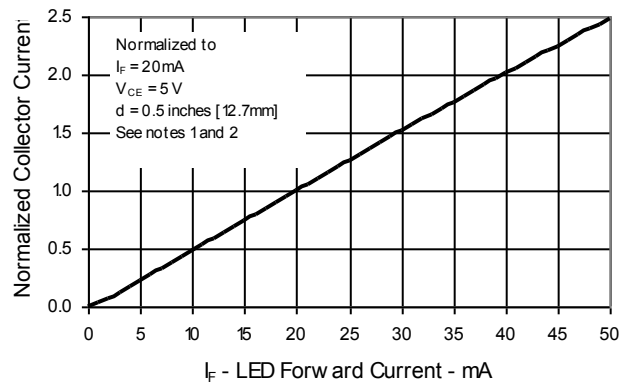

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com


Reflective Object Sensor

Type OPB733TR




Typical Performance Curves


Forward Voltage Vs Ambient Temperature

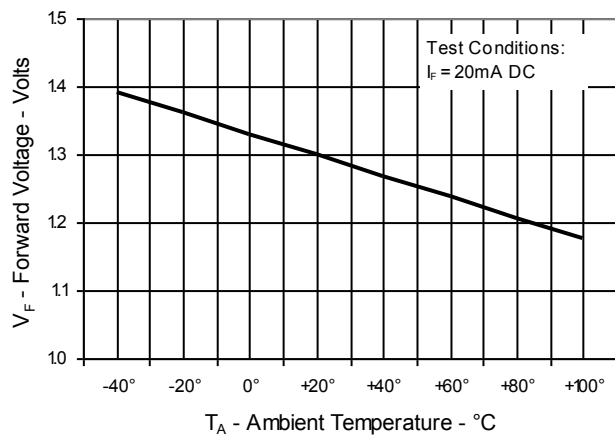

Normalized Collector Current Vs Ambient Temperature

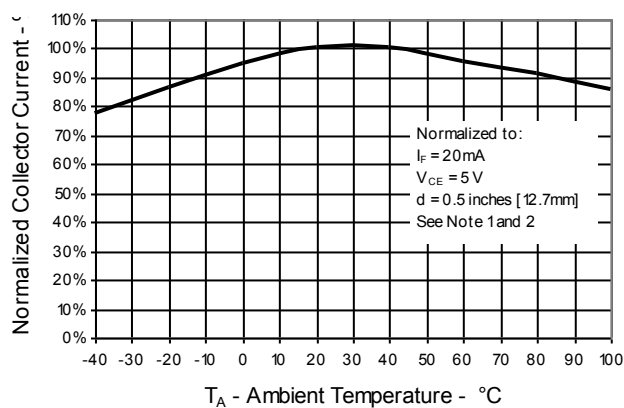

Normalized Collector Current Vs Object Distance

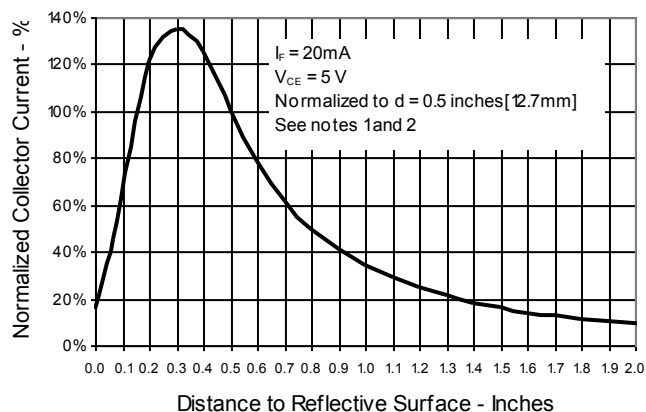

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006
Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com


Reflective Object Sensor

Type OPB733TR



Soldering Method:

- Reflow soldering profile shown below. Soldering should not exceed this curve in temperature and time.
- Avoid soldering more than once.
- Avoid exerting any type of pressure on the optical lenses and contact leads before, during, and after soldering.

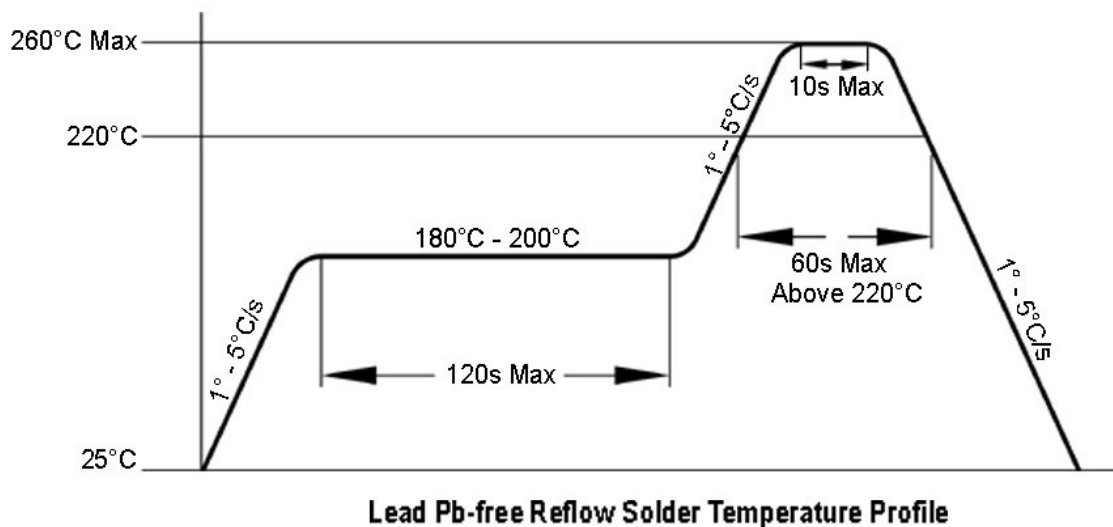


Storage:

- Storage temperature and relative humidity (R.H.) conditions are: 5°C to 30°C and 70% R.H. or less.
- Moisture proof bag should be open only if devices are ready to be used. Devices should be utilized within 72 hours after package has been opened.
- After opening the package, devices should be kept at a temperature of 5°C to 30°C and 60% R.H. or less.
- If the devices have exceeded the storage time or the humidity card indicates 60% relative humidity level, all devices should go through a baking treatment outside the original package prior to usage. Baking treatment: 60°C +/- 5°C for 24 hours.

Type OPB733TR



Tape and Reel package dimensions:

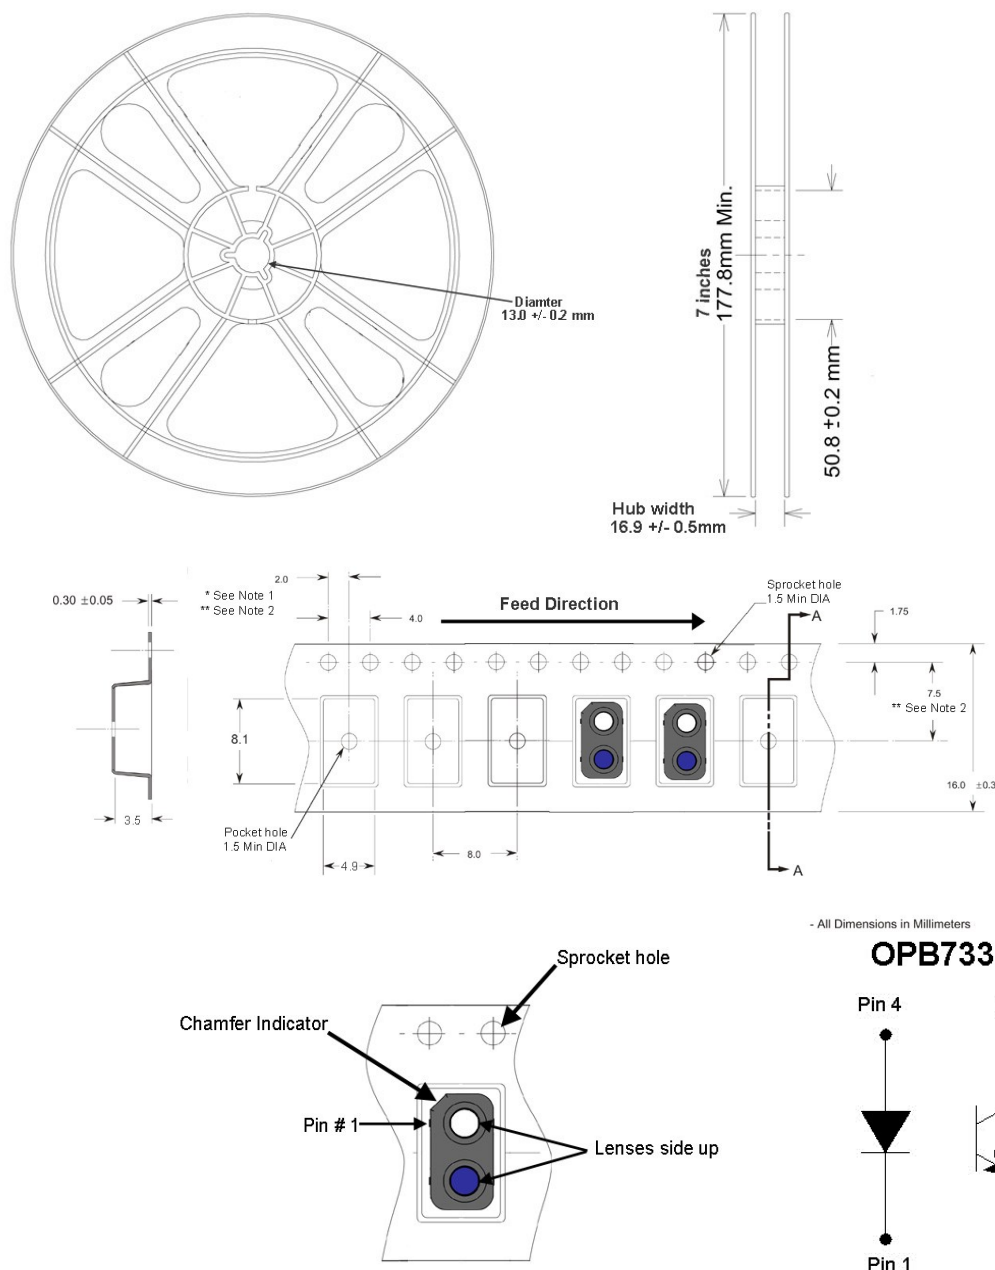

Notes:

1. * 10 sprocket hole pitch cumulative tolerance +/- 0.2mm.
2. ** Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
3. Tolerances: +/- 0.1mm, except as noted.

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

OPTEK Technology, Inc.
1645 Wallace Drive, Carrollton, TX 75006 | Ph: +1 972 323 2200
www.optekinc.com | www.ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TT Electronics:](#)

[OPB733TR](#)