

VOLTAGE DETECTOR


■ GENERAL DESCRIPTION

The NJU7719 is a low quiescent current voltage detector featuring high precision detection voltage.

The detection voltage is internally fixed with an accuracy of 1.0%.

NJU7719 is Nch. Open Drain output type.

■ PACKAGE OUTLINE




NJU7719U1

■ FEATURES

- High Precision detection Voltage $\pm 1.0\%$
- Low Quiescent Current $0.8\mu\text{A typ.}$
- Detection Voltage Range $1.3 \sim 6.0\text{V}(0.1\text{V step})$
- Output Configuration Nch. Open Drain Type
- Package Outline SOT-89-3

■ PIN CONFIGURATION




NJU7719U1

PIN FUNCTION

1. V_{DD}
2. V_{SS}
3. V_{OUT}

■ EQUIVALENT CIRCUIT

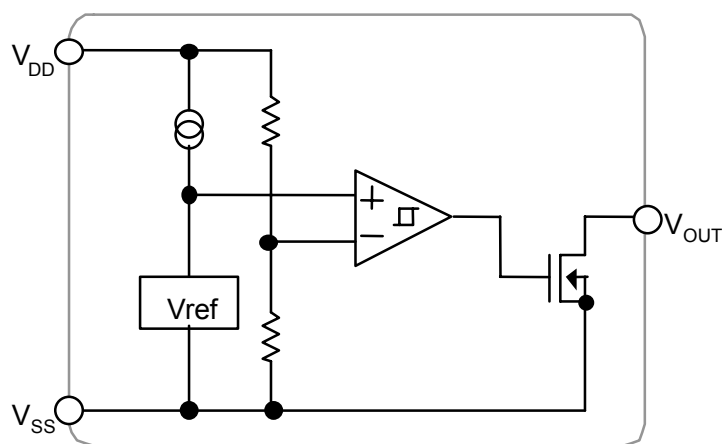

■ DETECTION VOLTAGE RANK LIST

Device Name	V_{DET}	Device Name	V_{DET}
NJU7719U1-21	2.1V	NJU7719U1-34	3.4V
NJU7719U1-23	2.3V	NJU7719U1-39	3.9V
NJU7719U1-27	2.7V	NJU7719U1-42	4.2V
NJU7719U1-29	2.9V	NJU7719U1-45	4.5V
NJU7719U1-32	3.2V		

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{DD}	+10	V
Output Voltage	V _{OUT}	V _{SS} -0.3 ~ +10	V
Output Current	I _{OUT}	50	mA
Power Dissipation	P _D	350(*1)	mW
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(*1): Device itself


■ ELECTRICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
Detection Voltage	V _{DET}			-1.0%	—	+1.0%	V
Hysterisis Voltage	V _{HYS}			V _{DET} ×0.03	V _{DET} ×0.05	V _{DET} ×0.08	V
Quiescent Current	I _{SS}	V _{DD} =V _{DET} +1V	V _{DET} =1.3V~1.7V Version	—	0.5	1.0	μA
			V _{DET} =1.8V~6.0V Version	—	0.8	1.6	μA
Output Current	I _{OUT}	Nch, V _{DS} =0.5V	V _{DD} =1.2V	0.75	2.0	—	mA
			V _{DD} =2.4V (≥2.7V Version)	4.5	7.0	—	mA
Output Leak Current	I _{LEAK}	V _{DD} =V _{OUT} =9V		—	—	0.1	μA
Detection Voltage Temperature Coefficient	ΔV _{DET} /ΔTa	Ta=0 ~ +85°C		—	±100	—	ppm/°C
Operating Voltage (*2)	V _{DD}	R _L =100kΩ		0.8	—	9	V


(*2): The minimum Operating Voltage(V_{OPL}) indicates the same value of the input voltage(V_{DD}) on condition that V_{OUT} becomes 10% or less of the input voltage(V_{DD}).

■ TEST CIRCUIT


① COMMON TEST CIRCUIT

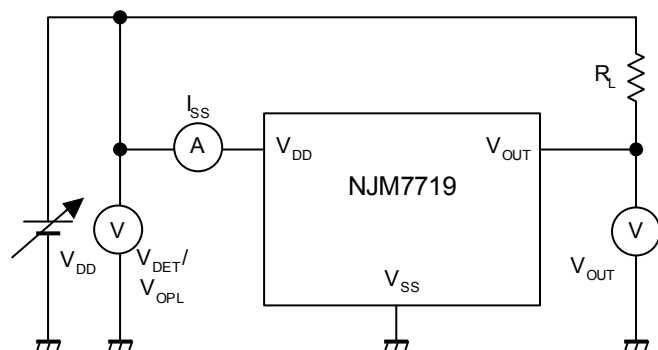





② Output Current/Output Leak Current TEST CIRCUIT

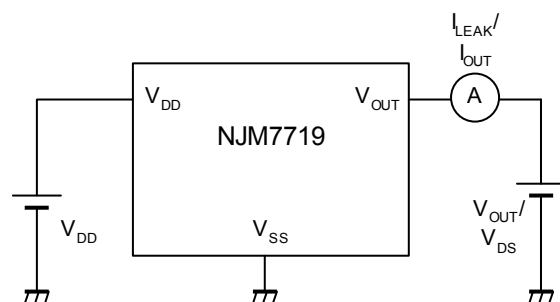





■ TYPICAL APPLICATION

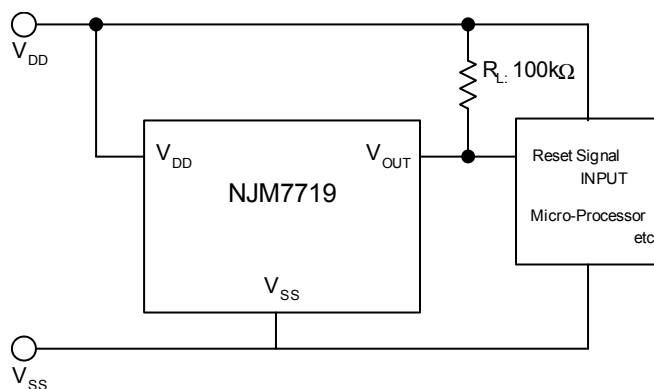


■ TYPICAL CHARACTERISTICS

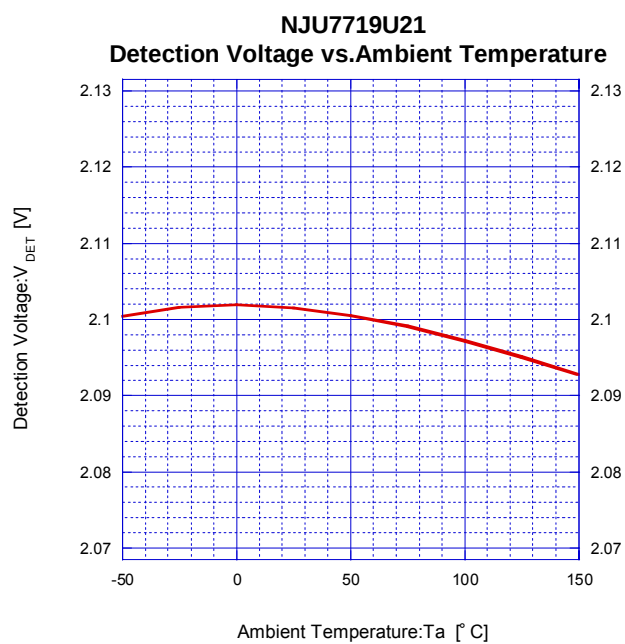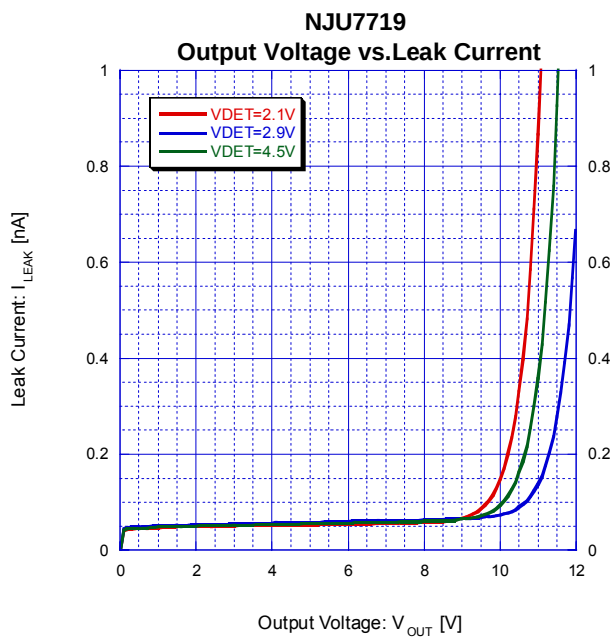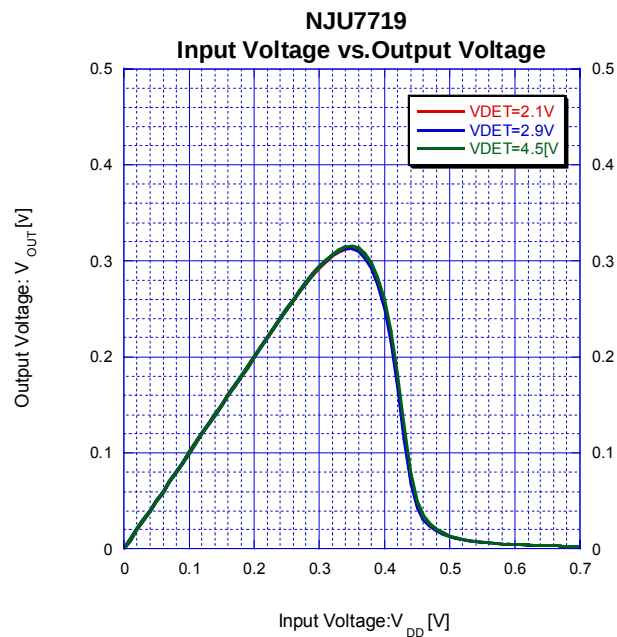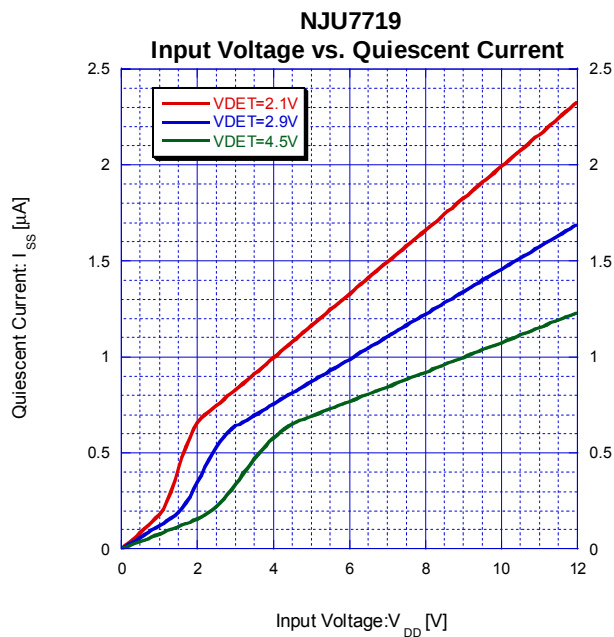

TYPICAL CHARACTERISTICS

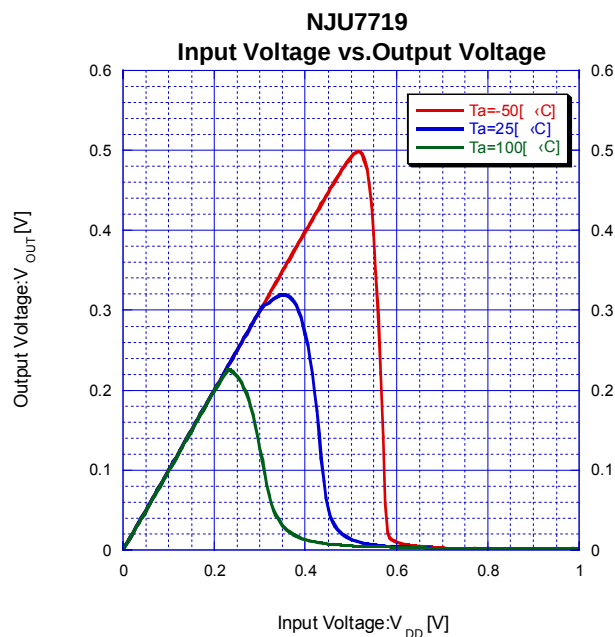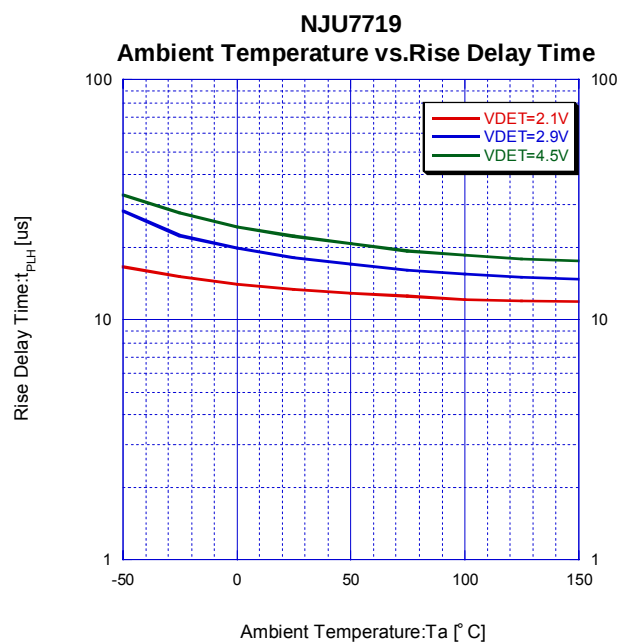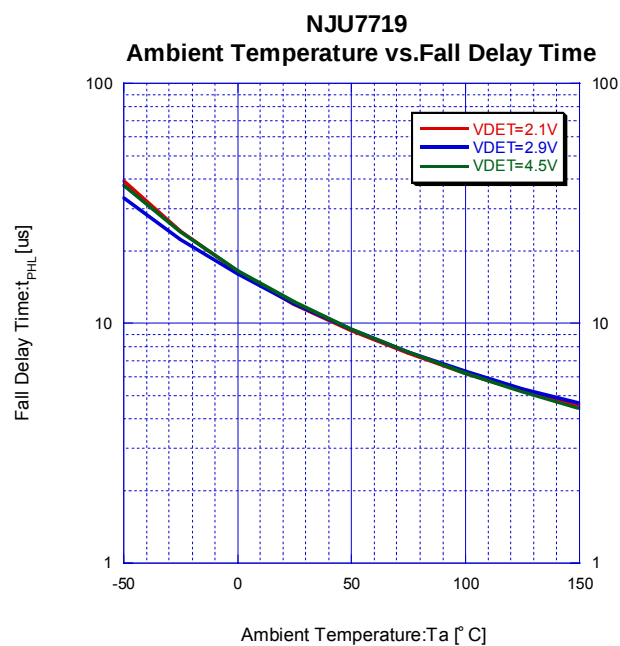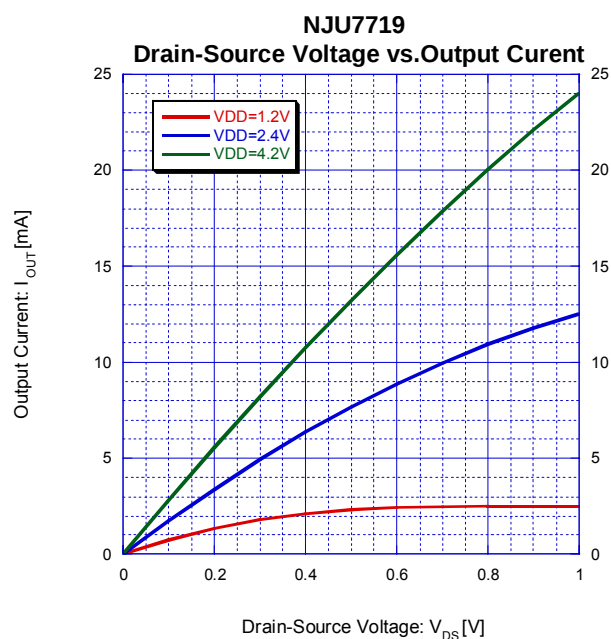


■ TYPICAL CHARACTERISTICS

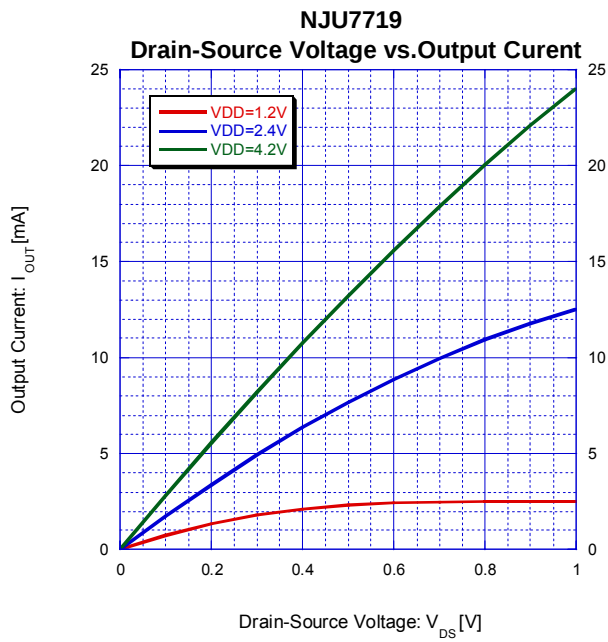

■ TYPICAL CHARACTERISTICS


Transient Response

NJU7719U29 $V_{DD}=10 \rightarrow 1V, T_f=50ns, R_L=100k\Omega$

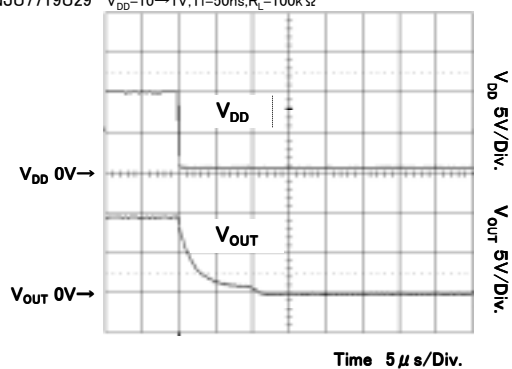

Transient Response

NJU7719U29 $V_{DD}=1 \rightarrow 10V, T_r=50ns, R_L=100k\Omega$

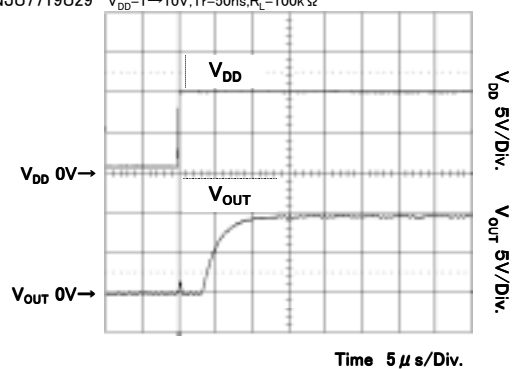

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nisshinbo Micro Devices:

[NJU7719U1-29-TE1](#) [NJU7719U1-23-TE1](#) [NJU7719U1-32-TE1](#) [NJU7719U1-42-TE1](#) [NJU7719U1-39-TE1](#)
[NJU7719U1-34-TE1](#) [NJU7719U1-45-TE1](#) [NJU7719U1-27-TE1](#) [NJU7719U1-21-TE1](#)