

## NJM1458

The NJM1458 is a monolithic pair of Internally Compensated High Performance Amplifiers, constructed using the New JRC Planar epitaxial process. They are intended for a wide range of analog applications where board space or weight are important. High common mode voltage range and absence of "latch-up" make the NJM1458 ideal for use as voltage followers. The high gain and wide range of operating voltage provides superior performance in integrator, summing amplifier and general feedback applications.


The NJM1458 is short-circuit protected and require no external components for frequency compensation. The internal 6 dB/octave roll-off insures stability in closed loop applications. For single amplifier performance, see the NJM741 data sheet.

### Absolute Maximum Ratings (Ta=25°C)

Supply Voltage	$V^+/V^-$	$\pm 18V$
Input Voltage (note)	$V_I$	$\pm 15V$
Differential Input Voltage	$V_{ID}$	$\pm 30V$
Power Dissipation	$P_D$ (D-Type)	500mW
	(M-Type)	300mW
Operating Temperature Range	$T_{opr}$	$-20 \sim +75^\circ C$
Storage Temperature Range	$T_{stg}$	$-40 \sim +125^\circ C$

(note) For supply voltages less than  $\pm 15V$ , the absolute maximum input voltage is equal to the supply voltage.

### Package Outline



NJM1458D




NJM1458M

### Electrical Characteristics (Ta=25°C, $V^+/V^- = \pm 15V$ )

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Offset Voltage	$V_{IO}$	$R_S \leq 10k\Omega$	—	2.0	6.0	mV
Input Offset Current	$I_{IO}$		—	30	200	nA
Input Bias Current	$I_B$		—	60	500	nA
Input Resistance	$R_{IN}$		0.3	1.0	—	M $\Omega$
Large-signal Voltage Gain	$A_V$	$R_L \geq 2k\Omega, V_O = \pm 10V$	86	106	—	dB
Maximum Output Voltage Swing I	$V_{OM1}$	$R_L \geq 10k\Omega$	$\pm 12$	$\pm 14$	—	V
Maximum Output Voltage Swing II	$V_{OM2}$	$R_L \geq 2k\Omega$	$\pm 10$	$\pm 13$	—	V
Input Common Mode Voltage Range	$V_{ICM}$		$\pm 12$	$\pm 13$	—	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	70	90	—	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	76.5	90	—	dB
Supply Current	$I_{CC}$		—	3.3	5.7	mA
Slew Rate	SR	$R_L \geq 2k\Omega, A_V = 1$	—	0.5	—	V/ $\mu s$
Channel Separation Ratio	CS	$f = 1kHz$	—	98	—	dB


### Equivalent Circuit

(1/2 Shown)

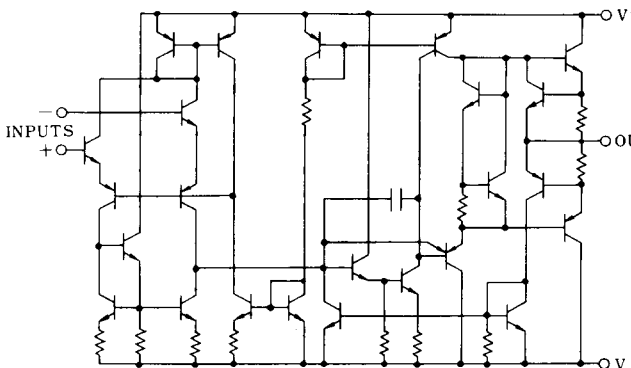

### Connection Diagram

D,M-Type  
(Top View)




PIN FUNCTION


1. A OUTPUT
2. A-INP
3. A+INP
4.  $V^-$
5. B+INP
6. B-INP
7. B OUTPUT
8.  $V^+$

## ■ Typical Characteristics


**Maximum Output Voltage Swing  
vs.  
Frequency**

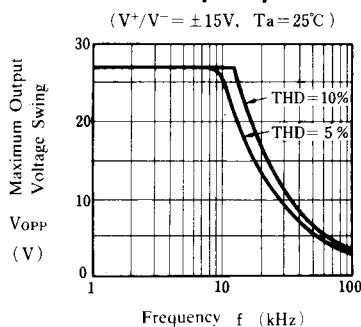


**Maximum Output Voltage Swing  
vs.  
Load Resistance**

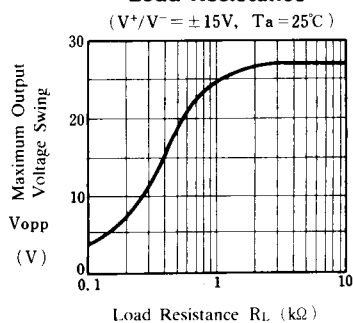


**Maximum Output Voltage Swing  
vs.  
Supply Voltage**

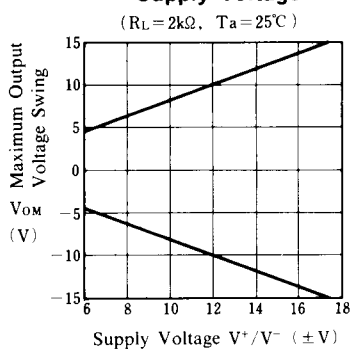


**Input Bias Current  
vs.  
Supply Voltage**



**Open Loop Frequency Response**

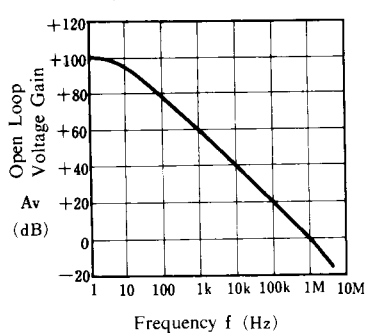

**Input Bias Current  
vs.  
Ambient Temperature**

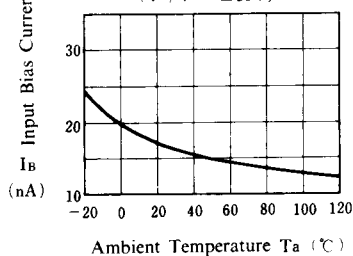

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nisshinbo Micro Devices:](#)

[NJM1458E](#)