




ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

DC/DC SWITCHING POWER SUPPLY
SINGLE CHANNEL OUTPUT
4~6 WATTS

OAS6R0-05 SERIES

RoHS

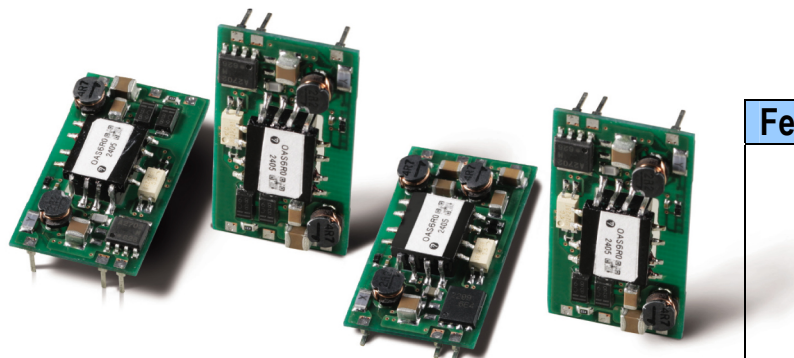

General Description

Features

Options

Application

Input

Input Voltage DC5V
Input Voltage Range: DC4.5~9V

Frequency:

Frequency Range:

Phase:

Inrush Current: *1, *4



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Output Characteristic		Models			
	Unit	OAS6R0-05_3	OAS6R0-05_5	OAS6R0-0512	OAS6R0-0515
Output Voltage	Vdc	3.3	5	12	15
Output Current (typ.)	A	1.2	1	0.5	0.4
Ripple (max)	mVpp -20 to 55°C	80	80	120	120
	mVpp -40 to -20°C	120	120	150	150
Noise (max)	mVpp -20 to 55°C	120	120	150	150
	mVpp -40 to -20°C	200	200	200	200
Voltage Adjust Range	V	±5%			
Rise time	mS	20 mS max			
Hold up time	mS	20 mS max.			
Regulation					
a. Line Regulation [max]	mV	20	20	48	60
b. Load Regulation [max]	mV	40	40	100	120
c. Temperature Coefficient	-20 to 55°C	50	50	150	180
	-40 to 55°C	80	80	240	290
d. Drift(maximum)	mV	20	20	48	60

Efficiency *1	%	72~80% typ.
Power Factor *1		No power factor needed





ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Environmental Specification	
Operating Temperature*3	-40 to +85 °C
Operating Humidity	20~95% RH non condensing
Storage Temperature	-40 to +100 °C
Storage Humidity	20~95% RH
Withstanding Voltage	
Isolation Resistance	Primary-Secondary-Frame Ground 100MΩ(minimum) by DC500V insulation tester
Vibration	10-55Hz:19.6m/s ² , 3 minute cycle each along X,Y,Z axes(non-operating) for 1 hour
Shock	196 m/s ² on x,y,z axis
Cooling	Convection/ Air forced
Leakage current	
Environmental Agencies	
Line Conducted Noise [EMI]	
Line Harmonic Distortion/Current	
Safety	UL60950-1 C-UL CE Marking : EN60950-1
Function/Protection	
Over current Protection	Vertical limiting at 105% min of rated current, automatic recovery
Over voltage Protection	
Remote Sense	
Remote Control	
Series Operation	
Parallel Operation	
Driving Indicator	
Mechanical	
Dimension [mm]	31.6W × 6.5H × 18.1L
Weight [g] (max)	4

Conditions:

- *1 Rated input and Rated output
- *2 at Output current quick change 25% to 75%
- *3 At 100% load (convection cooling)
- *4 Cold start at 25 °C Ambient temp.



ETA USA
16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com



ETA-USA

HIGH QUALITY SWITCHING POWER SUPPLIES

Derating Curves

Efficiency Curves

Block Diagram

Mechanical Drawings



ETA USA

16170 Vineyard Blvd. Suite 180, Morgan Hill, CA 95037
Phone: 1-800-ETA-POWR, (408) 778-2793 Fax: (408) 779-2753

Visit us at: www.eta-usa.com
email at: sales@eta-usa.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ETA-USA:](#)

[OAS6R0-0512](#) [OAS6R0-0515](#) [OAS6R0-05-3](#) [OAS6R0-05-5](#)