



# nRF52832 Product Specification v1.8

Key features	Applications
<ul style="list-style-type: none"> <li>2.4 GHz transceiver <ul style="list-style-type: none"> <li>-96 dBm sensitivity in <i>Bluetooth</i>® low energy mode</li> <li>Supported data rates: 1 Mbps, 2 Mbps <i>Bluetooth</i>® low energy mode</li> <li>-20 to +4 dBm TX power, configurable in 4 dB steps</li> <li>On-chip balun (single-ended RF)</li> <li>5.3 mA peak current in TX (0 dBm)</li> <li>5.4 mA peak current in RX</li> <li>RSSI (1 dB resolution)</li> </ul> </li> <li>Arm® Cortex®-M4 32-bit processor with FPU, 64 MHz <ul style="list-style-type: none"> <li>215 EEMBC CoreMark® score running from flash memory</li> <li>58 µA/MHz running from flash memory</li> <li>51.6 µA/MHz running from RAM</li> <li>Data watchpoint and trace (DWT), embedded trace macrocell (ETM), and instrumentation trace macrocell (ITM)</li> <li>Serial wire debug (SWD)</li> <li>Trace port</li> </ul> </li> <li>Flexible power management <ul style="list-style-type: none"> <li>1.7 V–3.6 V supply voltage range</li> <li>Fully automatic LDO and DC/DC regulator system</li> <li>Fast wake-up using 64 MHz internal oscillator</li> <li>0.3 µA at 3 V in System OFF mode</li> <li>0.7 µA at 3 V in System OFF mode with full 64 kB RAM retention</li> <li>1.9 µA at 3 V in System ON mode, no RAM retention, wake on RTC</li> </ul> </li> <li>Memory <ul style="list-style-type: none"> <li>512 kB flash/64 kB RAM</li> <li>256 kB flash/32 kB RAM</li> </ul> </li> <li>Nordic SoftDevice ready</li> <li>Support for concurrent multi-protocol</li> <li>Type 2 near field communication (NFC-A) tag with wakeup-on-field and touch-to-pair capabilities</li> <li>12-bit, 200 ksps ADC - 8 configurable channels with programmable gain</li> <li>64 level comparator</li> <li>15 level low power comparator with wakeup from System OFF mode</li> <li>Temperature sensor</li> <li>32 general purpose I/O pins</li> <li>3x 4-channel pulse width modulator (PWM) unit with EasyDMA</li> <li>Digital microphone interface (PDM)</li> <li>5x 32-bit timer with counter mode</li> <li>Up to 3x SPI master/slave with EasyDMA</li> <li>Up to 2x I2C compatible 2-wire master/slave</li> <li>I2S with EasyDMA</li> <li>UART (CTS/RTS) with EasyDMA</li> <li>Programmable peripheral interconnect (PPI)</li> <li>Quadrature decoder (QDEC)</li> <li>AES HW encryption with EasyDMA</li> <li>Autonomous peripheral operation without CPU intervention using PPI and EasyDMA</li> <li>3x real-time counter (RTC)</li> <li>Single crystal operation</li> <li>Package variants <ul style="list-style-type: none"> <li>QFN48 package, 6 × 6 mm</li> <li>WLCSP package, 3.0 × 3.2 mm</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>Internet of Things (IoT) <ul style="list-style-type: none"> <li>Home automation</li> <li>Sensor networks</li> <li>Building automation</li> <li>Industrial</li> <li>Retail</li> </ul> </li> <li>Personal area networks <ul style="list-style-type: none"> <li>Health/fitness sensor and monitor devices</li> <li>Medical devices</li> <li>Key fobs and wrist watches</li> </ul> </li> <li>Interactive entertainment devices <ul style="list-style-type: none"> <li>Remote controls</li> <li>Gaming controllers</li> </ul> </li> <li>Beacons <ul style="list-style-type: none"> <li>A4WP wireless chargers and devices</li> <li>Remote control toys</li> <li>Computer peripherals and I/O devices</li> </ul> </li> <li>Mouse</li> <li>Keyboard</li> <li>Multi-touch trackpad</li> <li>Gaming</li> </ul>

All rights reserved.

Reproduction in whole or in part is prohibited without the prior written permission of the copyright holder.

2021-11-01

# Contents

<b>1 Revision history.....</b>	<b>9</b>
<b>2 About this document.....</b>	<b>11</b>
2.1 Document naming and status.....	11
2.2 Peripheral naming and abbreviations.....	11
2.3 Register tables.....	11
2.4 Registers.....	12
<b>3 Block diagram.....</b>	<b>13</b>
<b>4 Pin assignments.....</b>	<b>14</b>
4.1 QFN48 pin assignments.....	14
4.2 WLCSP ball assignments.....	16
4.3 GPIO usage restrictions.....	18
<b>5 Absolute maximum ratings.....</b>	<b>20</b>
<b>6 Recommended operating conditions.....</b>	<b>21</b>
6.1 WLCSP light sensitivity.....	21
<b>7 CPU.....</b>	<b>22</b>
7.1 Floating point interrupt.....	22
7.2 Electrical specification.....	22
7.3 CPU and support module configuration.....	23
<b>8 Memory.....</b>	<b>24</b>
8.1 RAM - Random access memory.....	24
8.2 Flash - Non-volatile memory.....	25
8.3 Memory map.....	25
8.4 Instantiation.....	25
<b>9 AHB multilayer.....</b>	<b>27</b>
9.1 AHB multilayer priorities.....	27
<b>10 EasyDMA.....</b>	<b>28</b>
10.1 EasyDMA array list.....	29
<b>11 NVMC — Non-volatile memory controller.....</b>	<b>30</b>
11.1 Writing to Flash.....	30
11.2 Erasing a page in Flash.....	30
11.3 Writing to user information configuration registers (UICR).....	30
11.4 Erasing user information configuration registers (UICR).....	30
11.5 Erase all.....	31
11.6 Cache.....	31
11.7 Registers.....	31
11.8 Electrical specification.....	34
<b>12 BPROT — Block protection.....</b>	<b>35</b>
12.1 Registers.....	35
<b>13 FICR — Factory information configuration registers.....</b>	<b>44</b>
13.1 Registers.....	44
<b>14 UICR — User information configuration registers.....</b>	<b>55</b>
14.1 Registers.....	55
<b>15 Peripheral interface.....</b>	<b>69</b>
15.1 Peripheral ID.....	69
15.2 Peripherals with shared ID.....	69
15.3 Peripheral registers.....	70
15.4 Bit set and clear.....	70
15.5 Tasks.....	70
15.6 Events.....	71

15.7 Shortcuts.....	71
15.8 Interrupts.....	71
<b>16 Debug and trace.....</b>	<b>73</b>
16.1 DAP - Debug access port.....	73
16.2 Access port protection.....	73
16.3 CTRL-AP - Control access port.....	76
16.4 Debug Interface mode.....	77
16.5 Real-time debug.....	78
16.6 Trace.....	78
<b>17 Power and clock management.....</b>	<b>79</b>
17.1 Current consumption scenarios.....	79
<b>18 POWER — Power supply.....</b>	<b>81</b>
18.1 Regulators.....	81
18.2 System OFF mode.....	82
18.3 System ON mode.....	83
18.4 Power supply supervisor.....	83
18.5 RAM sections.....	85
18.6 Reset.....	85
18.7 Retained registers.....	86
18.8 Reset behavior.....	86
18.9 Registers.....	86
18.10 Electrical specification.....	102
<b>19 CLOCK — Clock control.....</b>	<b>104</b>
19.1 HFCLK clock controller.....	104
19.2 LFCLK clock controller.....	106
19.3 Registers.....	108
19.4 Electrical specification.....	112
<b>20 GPIO — General purpose input/output.....</b>	<b>114</b>
20.1 Pin configuration.....	114
20.2 GPIO located near the RADIO.....	116
20.3 Registers.....	116
20.4 Electrical specification.....	157
<b>21 GPIOTE — GPIO tasks and events.....</b>	<b>161</b>
21.1 Pin events and tasks.....	161
21.2 Port event.....	162
21.3 Tasks and events pin configuration.....	162
21.4 Registers.....	162
21.5 Electrical specification.....	171
<b>22 PPI — Programmable peripheral interconnect.....</b>	<b>172</b>
22.1 Pre-programmed channels.....	173
22.2 Registers.....	173
<b>23 RADIO — 2.4 GHz Radio.....</b>	<b>209</b>
23.1 EasyDMA.....	209
23.2 Packet configuration.....	210
23.3 Maximum packet length.....	211
23.4 Address configuration.....	211
23.5 Data whitening.....	211
23.6 CRC.....	212
23.7 Radio states.....	213
23.8 Transmit sequence.....	213
23.9 Receive sequence.....	215
23.10 Received Signal Strength Indicator (RSSI).....	216
23.11 Interframe spacing.....	216
23.12 Device address match.....	217
23.13 Bit counter.....	217
23.14 Registers.....	218
23.15 Electrical specification.....	234

<b>24 TIMER — Timer/counter</b>	<b>238</b>
24.1 Capture	239
24.2 Compare	239
24.3 Task delays	239
24.4 Task priority	239
24.5 Registers	239
24.6 Electrical specification	245
<b>25 RTC — Real-time counter</b>	<b>246</b>
25.1 Clock source	246
25.2 Resolution versus overflow and the PRESCALER	246
25.3 COUNTER register	247
25.4 Overflow features	247
25.5 TICK event	247
25.6 Event control feature	248
25.7 Compare feature	248
25.8 TASK and EVENT jitter/delay	250
25.9 Reading the COUNTER register	252
25.10 Registers	252
25.11 Electrical specification	258
<b>26 RNG — Random number generator</b>	<b>259</b>
26.1 Bias correction	259
26.2 Speed	259
26.3 Registers	259
26.4 Electrical specification	261
<b>27 TEMP — Temperature sensor</b>	<b>262</b>
27.1 Registers	262
27.2 Electrical specification	267
<b>28 ECB — AES electronic codebook mode encryption</b>	<b>268</b>
28.1 Shared resources	268
28.2 EasyDMA	268
28.3 ECB data structure	268
28.4 Registers	269
28.5 Electrical specification	270
<b>29 CCM — AES CCM mode encryption</b>	<b>271</b>
29.1 Shared resources	272
29.2 Encryption	272
29.3 Decryption	272
29.4 AES CCM and RADIO concurrent operation	273
29.5 Encrypting packets on-the-fly in radio transmit mode	273
29.6 Decrypting packets on-the-fly in radio receive mode	274
29.7 CCM data structure	275
29.8 EasyDMA and ERROR event	276
29.9 Registers	276
<b>30 AAR — Accelerated address resolver</b>	<b>280</b>
30.1 Shared resources	280
30.2 EasyDMA	280
30.3 Resolving a resolvable address	280
30.4 Use case example for chaining RADIO packet reception with address resolution using AAR	281
30.5 IRK data structure	281
30.6 Registers	282
30.7 Electrical specification	284
<b>31 SPIM — Serial peripheral interface master with EasyDMA</b>	<b>285</b>
31.1 Shared resources	285
31.2 EasyDMA	286
31.3 SPI master transaction sequence	287
31.4 Low power	288

31.5 Master mode pin configuration.....	288
31.6 Registers.....	289
31.7 Electrical specification.....	294
<b>32 SPI — Serial peripheral interface slave with EasyDMA.....</b>	<b>296</b>
32.1 Shared resources.....	296
32.2 EasyDMA.....	296
32.3 SPI slave operation.....	297
32.4 Pin configuration.....	298
32.5 Registers.....	299
32.6 Electrical specification.....	307
<b>33 TWIM — I<sup>2</sup>C compatible two-wire interface master with EasyDMA.....</b>	<b>309</b>
33.1 Shared resources.....	310
33.2 EasyDMA.....	310
33.3 Master write sequence.....	311
33.4 Master read sequence.....	312
33.5 Master repeated start sequence.....	313
33.6 Low power.....	314
33.7 Master mode pin configuration.....	314
33.8 Registers.....	314
33.9 Electrical specification.....	321
<b>34 TWIS — I<sup>2</sup>C compatible two-wire interface slave with EasyDMA.....</b>	<b>323</b>
34.1 Shared resources.....	325
34.2 EasyDMA.....	325
34.3 TWI slave responding to a read command.....	325
34.4 TWI slave responding to a write command.....	326
34.5 Master repeated start sequence.....	327
34.6 Terminating an ongoing TWI transaction.....	328
34.7 Low power.....	328
34.8 Slave mode pin configuration.....	328
34.9 Registers.....	329
34.10 Electrical specification.....	335
<b>35 UARTE — Universal asynchronous receiver/transmitter with EasyDMA....</b>	<b>337</b>
35.1 Shared resources.....	337
35.2 EasyDMA.....	337
35.3 Transmission.....	338
35.4 Reception.....	338
35.5 Error conditions.....	340
35.6 Using the UARTE without flow control.....	340
35.7 Parity configuration.....	340
35.8 Low power.....	340
35.9 Pin configuration.....	341
35.10 Registers.....	341
35.11 Electrical specification.....	349
<b>36 QDEC — Quadrature decoder.....</b>	<b>351</b>
36.1 Sampling and decoding.....	351
36.2 LED output.....	352
36.3 Debounce filters.....	352
36.4 Accumulators.....	353
36.5 Output/input pins.....	353
36.6 Pin configuration.....	353
36.7 Registers.....	354
36.8 Electrical specification.....	360
<b>37 SAADC — Successive approximation analog-to-digital converter.....</b>	<b>361</b>
37.1 Shared resources.....	361
37.2 Overview.....	361
37.3 Digital output.....	362
37.4 Analog inputs and channels.....	363

37.5 Operation modes.....	363
37.6 EasyDMA.....	365
37.7 Resistor ladder.....	366
37.8 Reference.....	367
37.9 Acquisition time.....	367
37.10 Limits event monitoring.....	368
37.11 Registers.....	369
37.12 Electrical specification.....	393
37.13 Performance factors.....	395
<b>38 COMP — Comparator.....</b>	<b>396</b>
38.1 Differential mode.....	397
38.2 Single-ended mode.....	398
38.3 Registers.....	400
38.4 Electrical specification.....	405
<b>39 LPCOMP — Low power comparator.....</b>	<b>406</b>
39.1 Shared resources.....	407
39.2 Pin configuration.....	407
39.3 Registers.....	408
39.4 Electrical specification.....	412
<b>40 WDT — Watchdog timer.....</b>	<b>413</b>
40.1 Reload criteria.....	413
40.2 Temporarily pausing the watchdog.....	413
40.3 Watchdog reset.....	413
40.4 Registers.....	414
40.5 Electrical specification.....	418
<b>41 SWI — Software interrupts.....</b>	<b>419</b>
41.1 Registers.....	419
<b>42 NFCT — Near field communication tag.....</b>	<b>420</b>
42.1 Overview.....	420
42.2 Pin configuration.....	422
42.3 EasyDMA.....	422
42.4 Collision resolution.....	423
42.5 Frame timing controller.....	424
42.6 Frame assembler.....	425
42.7 Frame disassembler.....	426
42.8 Antenna interface.....	427
42.9 NFCT antenna recommendations.....	427
42.10 Battery protection.....	427
42.11 References.....	428
42.12 Registers.....	428
42.13 Electrical specification.....	439
<b>43 PDM — Pulse density modulation interface.....</b>	<b>440</b>
43.1 Master clock generator.....	440
43.2 Module operation.....	440
43.3 Decimation filter.....	441
43.4 EasyDMA.....	441
43.5 Hardware example.....	442
43.6 Pin configuration.....	442
43.7 Registers.....	443
43.8 Electrical specification.....	447
<b>44 I<sup>2</sup>S — Inter-IC sound interface.....</b>	<b>449</b>
44.1 Mode.....	449
44.2 Transmitting and receiving.....	449
44.3 Left right clock (LRCK).....	450
44.4 Serial clock (SCK).....	450
44.5 Master clock (MCK).....	451
44.6 Width, alignment and format.....	451

44.7 EasyDMA.....	453
44.8 Module operation.....	455
44.9 Pin configuration.....	456
44.10 Registers.....	457
44.11 Electrical specification.....	464
<b>45 MWU — Memory watch unit.....</b>	<b>465</b>
45.1 Registers.....	465
<b>46 EGU — Event generator unit.....</b>	<b>492</b>
46.1 Registers.....	492
46.2 Electrical specification.....	498
<b>47 PWM — Pulse width modulation.....</b>	<b>499</b>
47.1 Wave counter.....	499
47.2 Decoder with EasyDMA.....	502
47.3 Limitations.....	507
47.4 Pin configuration.....	507
47.5 Registers.....	508
47.6 Electrical specification.....	516
<b>48 SPI — Serial peripheral interface master.....</b>	<b>517</b>
48.1 Functional description.....	517
48.2 Registers.....	520
48.3 Electrical specification.....	523
<b>49 TWI — I<sup>2</sup>C compatible two-wire interface.....</b>	<b>525</b>
49.1 Functional description.....	525
49.2 Master mode pin configuration.....	525
49.3 Shared resources.....	526
49.4 Master write sequence.....	526
49.5 Master read sequence.....	527
49.6 Master repeated start sequence.....	528
49.7 Low power.....	529
49.8 Registers.....	529
49.9 Electrical specification.....	533
<b>50 UART — Universal asynchronous receiver/transmitter.....</b>	<b>535</b>
50.1 Functional description.....	535
50.2 Pin configuration.....	535
50.3 Shared resources.....	536
50.4 Transmission.....	536
50.5 Reception.....	536
50.6 Suspending the UART.....	537
50.7 Error conditions.....	537
50.8 Using the UART without flow control.....	538
50.9 Parity configuration.....	538
50.10 Registers.....	538
50.11 Electrical specification.....	543
<b>51 Mechanical specifications.....</b>	<b>544</b>
51.1 QFN48 6 x 6 mm package.....	544
51.2 WLCSP package.....	545
<b>52 Ordering information.....</b>	<b>546</b>
52.1 IC marking.....	546
52.2 Box labels.....	546
52.3 Order code.....	547
52.4 Code ranges and values.....	547
52.5 Product options.....	548
<b>53 Reference circuitry.....</b>	<b>550</b>
53.1 Schematic QFAA and QFAB QFN48 with internal LDO setup.....	550
53.2 Schematic QFAA and QFAB QFN48 with DC/DC regulator setup.....	551
53.3 Schematic QFAA and QFAB QFN48 with DC/DC regulator and NFC setup.....	552
53.4 Schematic CIAA WLCSP with internal LDO setup.....	553

53.5 Schematic CIAA WLCSP with DC/DC regulator setup.....	554
53.6 Schematic CIAA WLCSP with DC/DC regulator and NFC setup.....	555
53.7 PCB guidelines.....	555
53.8 PCB layout example.....	556
<b>54 Legal notices.....</b>	<b>558</b>



# 1 Revision history

Date	Version	Description
November 2021	1.8	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">Ordering information</a> on page 546 - Build codes Fxx not recommended for new designs.</li> </ul>
August 2021	1.7	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">Pin assignments</a> on page 14 - Added description of standard drive and low frequency I/O</li> <li><a href="#">FICR — Factory information configuration registers</a> on page 44 - Updated INFO.VARIANT register</li> </ul>
April 2021	1.6	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">Debug and trace</a> on page 73 - Updated disabling access port protection description.</li> <li><a href="#">FICR — Factory information configuration registers</a> on page 44 - Updated INFO.VARIANT register.</li> <li><a href="#">GPIO — General purpose input/output</a> on page 114 - Updated electrical specification.</li> <li><a href="#">SPIS — Serial peripheral interface slave with EasyDMA</a> on page 296 - Updated SPIS electrical parameters <math>t_{SPIS,VDD}</math>, <math>t_{SPIS,HSD}</math>, <math>t_{SPIS,SUSI}</math>, and <math>t_{SPIS,HSI}</math>.</li> </ul>
March 2021	1.5	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">Absolute maximum ratings</a> on page 20 - Increased Flash memory retention to 10 years at 85 °C.</li> <li><a href="#">UICR — User information configuration registers</a> on page 55 - Added value HwDisabled to APPROTECT register.</li> <li><a href="#">Debug and trace</a> on page 73 - Added description of APPROTECT functionality for devices where APPROTECT is controlled by hardware and software. Added peripheral APPROTECT with necessary registers to control APPROTECT for devices where APPROTECT is controlled by hardware and software.</li> <li><a href="#">Ordering information</a> on page 546 - Added new product options.</li> </ul>
October 2017	1.4	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">Recommended operating conditions</a> on page 21 - Added WLCSP light sensitivity information.</li> <li><a href="#">FICR — Factory information configuration registers</a> on page 44 - Added registers PARTNO, HWREVISION and PRODUCTIONREVISION.</li> <li><a href="#">UICR — User information configuration registers</a> on page 55 - Changed width of PSELRESETn port fields.</li> <li><a href="#">SPIM</a> - Polarity in SPI mode table corrected.</li> <li><a href="#">COMP — Comparator</a> on page 396 - Documentation structure improvements/changes.</li> <li>Liability disclaimer updated - Directive 2011/65/EU (RoHS 2).</li> </ul>
February 2017	1.3	The following content has been added or updated: <ul style="list-style-type: none"> <li><a href="#">RADIO — 2.4 GHz Radio</a> on page 209 - Introduced 2 Mbps Bluetooth® low energy mode.</li> <li><a href="#">FICR — Factory information configuration registers</a> on page 44 - Updated INFO.PACKAGE register (new package added).</li> <li><a href="#">UARTE</a> - Corrected the pin configuration table.</li> <li><a href="#">PPI — Programmable peripheral interconnect</a> on page 172 - Timing information corrected.</li> <li>Updated the liability disclaimer.</li> </ul>
September 2016	1.2	Updated the following: <ul style="list-style-type: none"> <li>Power and clock management, <a href="#">Current consumption: Ultra-low power</a> on page 80.</li> <li>Power, <a href="#">Current consumption, sleep</a> on page 102</li> </ul>
July 2016	1.1	Added documentation for nRF52832 CIAA WLCSP. Added or updated the following content: <ul style="list-style-type: none"> <li>Cover - Added <i>Key features</i>.</li> </ul>

Date	Version	Description
		<ul style="list-style-type: none"> <li>• <a href="#">Pin assignments</a> on page 14 - Added WLCSP ball assignments. Moved GPIO usage restrictions here from GPIO/Notes on usage and restrictions.</li> <li>• <a href="#">Absolute maximum ratings</a> on page 20 - Added environmental information for WLCSP to the table.</li> <li>• <a href="#">Memory</a> on page 24 - Added QFAB and CIAA information to the table.</li> <li>• <a href="#">FICR — Factory information configuration registers</a> on page 44 - Updated INFO.PACKAGE register.</li> <li>• <a href="#">UICR — User information configuration registers</a> on page 55 - Updated APPROTECT register.</li> <li>• <a href="#">Debug and trace</a> on page 73 - Updated DAP - Debug access port.</li> <li>• <a href="#">POWER — Power supply</a> on page 81 - Updated Pin reset.</li> <li>• <a href="#">CLOCK — Clock control</a> on page 104 - Updated information on external 32 kHz clock support.</li> <li>• <a href="#">GPIO — General purpose input/output</a> on page 114 - Added GPIO located near the RADIO.</li> <li>• <a href="#">RADIO — 2.4 GHz Radio</a> on page 209 - Updated Figure 29 and Interframe spacing.</li> <li>• <a href="#">CCM</a> - Updated SCRATCHPTR register.</li> <li>• <a href="#">SPIM</a> - Updated Master mode pin configuration.</li> <li>• <a href="#">UARTE</a> - Added RXDRDY and TXDRDY events.</li> <li>• <a href="#">NFCT</a> - Updated Electrical specifications.</li> <li>• <a href="#">PWM — Pulse width modulation</a> on page 499 - Updated SEQ[1].REFRESH register.</li> <li>• <a href="#">Mechanical specifications</a> on page 544 - Added WLCSP package.</li> <li>• <a href="#">Ordering information</a> on page 546 - Updated with CIAA and QFAB information.</li> <li>• <a href="#">Reference circuitry</a> on page 550 - QFAB information added. CIAA WLCSP schematics added.</li> </ul>
February 2016	1.0	First release.

## 2 About this document

This product specification is organized into chapters based on the modules and peripherals that are available in this IC.

The peripheral descriptions are divided into separate sections that include the following information:

- A detailed functional description of the peripheral
- Register configuration for the peripheral
- Electrical specification tables, containing performance data which apply for the operating conditions described in [Recommended operating conditions](#) on page 21.

### 2.1 Document naming and status

Nordic uses three distinct names for this document, which are reflecting the maturity and the status of the document and its content.

**Table 1: Defined document names**

Document name	Description
Objective Product Specification (OPS)	Applies to document versions up to 0.7.
Preliminary Product Specification (PPS)	This product specification contains target specifications for product development. Applies to document versions 0.7 and up to 1.0.
Product Specification (PS)	This product specification contains preliminary data. Supplementary data may be published from Nordic Semiconductor ASA later. Applies to document versions 1.0 and higher.  This product specification contains final product specifications. Nordic Semiconductor ASA reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

### 2.2 Peripheral naming and abbreviations

Every peripheral has a unique capitalized name or an abbreviation of its name, e.g. TIMER, used for identification and reference. This name is used in chapter headings and references, and it will appear in the ARM® Cortex® Microcontroller Software Interface Standard (CMSIS) hardware abstraction layer to identify the peripheral.

The peripheral instance name, which is different from the peripheral name, is constructed using the peripheral name followed by a numbered postfix, starting with 0, for example, TIMER0. A postfix is normally only used if a peripheral can be instantiated more than once. The peripheral instance name is also used in the CMSIS to identify the peripheral instance.

### 2.3 Register tables

Individual registers are described using register tables. These tables are built up of two sections. The first three colored rows describe the position and size of the different fields in the register. The following rows describe the fields in more detail.

#### 2.3.1 Fields and values

The **Id (Field Id)** row specifies the bits that belong to the different fields in the register. If a field has enumerated values, then every value will be identified with a unique value id in the **Value Id** column.

A blank space means that the field is reserved and read as undefined, and it also must be written as 0 to secure forward compatibility. If a register is divided into more than one field, a unique field name is specified for each field in the **Field** column. The **Value Id** may be omitted in the single-bit bit fields when values can be substituted with a Boolean type enumerator range, e.g. true/false, disable(d)/enable(d), on/off, and so on.

Values are usually provided as decimal or hexadecimal. Hexadecimal values have a 0x prefix, decimal values have no prefix.

The **Value** column can be populated in the following ways:

- Individual enumerated values, for example 1, 3, 9.
- Range of values, e.g. [0..4], indicating all values from and including 0 and 4.
- Implicit values. If no values are indicated in the **Value** column, all bit combinations are supported, or alternatively the field's translation and limitations are described in the text instead.

If two or more fields are closely related, the **Value Id**, **Value**, and **Description** may be omitted for all but the first field. Subsequent fields will indicate inheritance with '..'.

A feature marked **Deprecated** should not be used for new designs.

## 2.4 Registers

**Table 2: Register Overview**

Register	Offset	Description
DUMMY	0x514	Example of a register controlling a dummy feature

### 2.4.1 DUMMY

Address offset: 0x514

Example of a register controlling a dummy feature

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					D	D	D	D						C	C	C								B							A	A
Reset 0x00050002	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0

Id	RW	Field	Value Id	Value	Description
A	RW	FIELD_A			Example of a field with several enumerated values
			Disabled	0	The example feature is disabled
			NormalMode	1	The example feature is enabled in normal mode
			ExtendedMode	2	The example feature is enabled along with extra functionality
B	RW	FIELD_B			Example of a deprecated field <span>Deprecated</span>
			Disabled	0	The override feature is disabled
			Enabled	1	The override feature is enabled
C	RW	FIELD_C			Example of a field with a valid range of values
			ValidRange	[2..7]	Example of allowed values for this field
D	RW	FIELD_D			Example of a field with no restriction on the values

## 3 Block diagram

This block diagram illustrates the overall system. Arrows with white heads indicate signals that share physical pins with other signals.

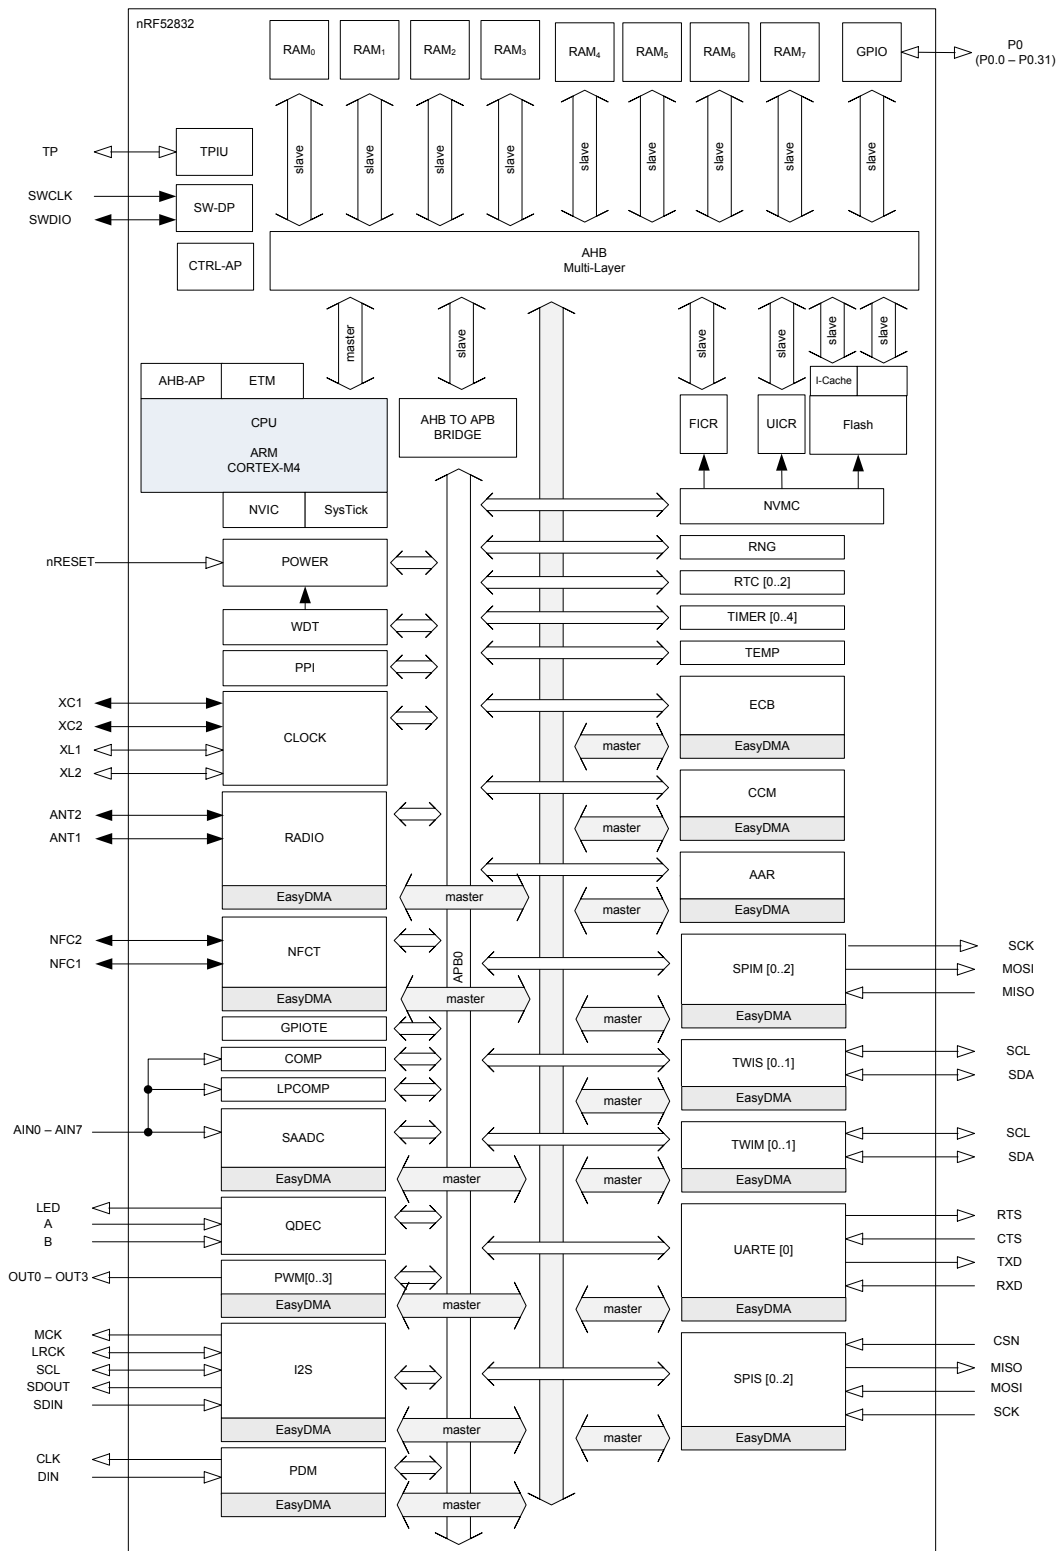


Figure 1: Block diagram

## 4 Pin assignments

Here we cover the pin assignments for each variant of the chip.

### 4.1 QFN48 pin assignments

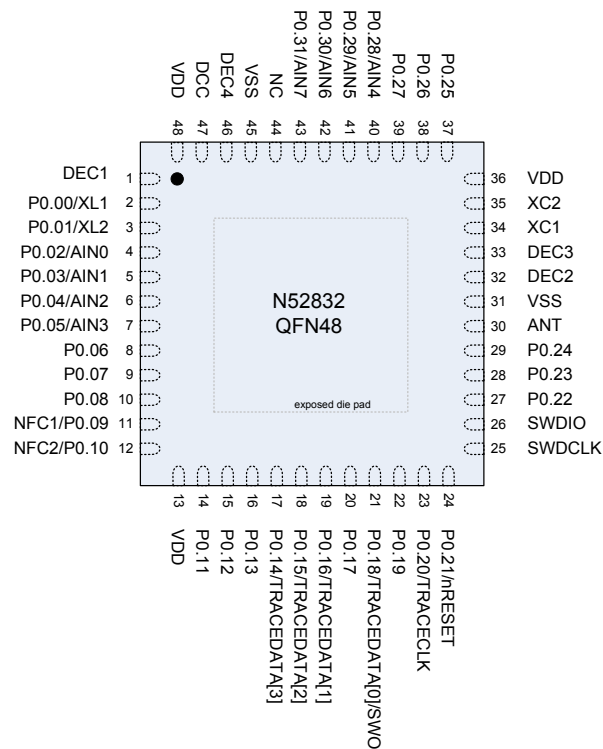


Figure 2: QFN48 pin assignments, top view

Table 3: QFN48 pin assignments

Pin	Name	Type	Description
Left Side of chip			
1	DEC1	Power	0.9 V regulator digital supply decoupling
2	P0.00	Digital I/O	General purpose I/O
	XL1	Analog input	Connection for 32.768 kHz crystal (LFXO)
3	P0.01	Digital I/O	General purpose I/O
	XL2	Analog input	Connection for 32.768 kHz crystal (LFXO)
4	P0.02	Digital I/O	General purpose I/O
	AIN0	Analog input	SAADC/COMP/LPCOMP input
5	P0.03	Digital I/O	General purpose I/O
	AIN1	Analog input	SAADC/COMP/LPCOMP input
6	P0.04	Digital I/O	General purpose I/O
	AIN2	Analog input	SAADC/COMP/LPCOMP input
7	P0.05	Digital I/O	General purpose I/O
	AIN3	Analog input	SAADC/COMP/LPCOMP input
8	P0.06	Digital I/O	General purpose I/O
9	P0.07	Digital I/O	General purpose I/O

Pin	Name	Type	Description
10	P0.08	Digital I/O	General purpose I/O
11	NFC1	NFC input	NFC antenna connection
	P0.09	Digital I/O	General purpose I/O <sup>1</sup>
12	NFC2	NFC input	NFC antenna connection
	P0.10	Digital I/O	General purpose I/O <sup>1</sup>
<b>Bottom side of chip</b>			
13	VDD	Power	Power supply
14	P0.11	Digital I/O	General purpose I/O
15	P0.12	Digital I/O	General purpose I/O
16	P0.13	Digital I/O	General purpose I/O
17	P0.14	Digital I/O	General purpose I/O
	TRACEDATA[3]		Trace port output
18	P0.15	Digital I/O	General purpose I/O
	TRACEDATA[2]		Trace port output
19	P0.16	Digital I/O	General purpose I/O
	TRACEDATA[1]		Trace port output
20	P0.17	Digital I/O	General purpose I/O
21	P0.18	Digital I/O	General purpose I/O
	TRACEDATA[0] / SWO		Single wire output
			Trace port output
22	P0.19	Digital I/O	General purpose I/O
23	P0.20	Digital I/O	General purpose I/O
	TRACECLK		Trace port clock output
24	P0.21	Digital I/O	General purpose I/O
	nRESET		Configurable as pin reset
<b>Right Side of chip</b>			
25	SWDCLK	Digital input	Serial wire debug clock input for debug and programming
26	SWDIO	Digital I/O	Serial wire debug I/O for debug and programming
27	P0.22	Digital I/O	General purpose I/O <sup>2</sup>
28	P0.23	Digital I/O	General purpose I/O <sup>2</sup>
29	P0.24	Digital I/O	General purpose I/O <sup>2</sup>
30	ANT	RF	Single-ended radio antenna connection
31	VSS	Power	Ground (Radio supply)
32	DEC2	Power	1.3 V regulator supply decoupling (Radio supply)
33	DEC3	Power	Power supply decoupling
34	XC1	Analog input	Connection for 32 MHz crystal
35	XC2	Analog input	Connection for 32 MHz crystal
36	VDD	Power	Power supply
<b>Top side of chip</b>			
37	P0.25	Digital I/O	General purpose I/O <sup>2</sup>
38	P0.26	Digital I/O	General purpose I/O <sup>2</sup>
39	P0.27	Digital I/O	General purpose I/O <sup>2</sup>
40	P0.28	Digital I/O	General purpose I/O <sup>2</sup>
	AIN4	Analog input	SAADC/COMP/LPCOMP input
41	P0.29	Digital I/O	General purpose I/O <sup>2</sup>
	AIN5	Analog input	SAADC/COMP/LPCOMP input
42	P0.30	Digital I/O	General purpose I/O <sup>2</sup>
	AIN6	Analog input	SAADC/COMP/LPCOMP input
43	P0.31	Digital I/O	General purpose I/O pin <sup>2</sup>
	AIN7	Analog input	SAADC/COMP/LPCOMP input

Pin	Name	Type	Description
44	NC		No connect Leave unconnected
45	VSS	Power	Ground
46	DEC4	Power	1.3 V regulator supply decoupling Input from DC/DC regulator Output from 1.3 V LDO
47	DCC	Power	DC/DC regulator output
48	VDD	Power	Power supply
<b>Bottom of chip</b>			
Die pad	VSS	Power	Ground pad  Exposed die pad must be connected to ground (VSS) for proper device operation.

## 4.2 WLCSP ball assignments

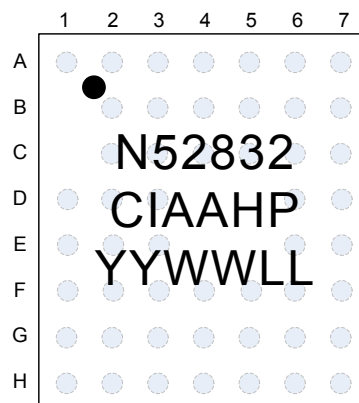


Figure 3: WLCSP ball assignments, top view

Table 4: WLCSP ball assignments

Ball	Name	Type	Description
A1	XC2	Analog input	Connection for 32 MHz crystal
A2	DEC2	Power	1.3 V regulator supply decoupling (Radio supply)
A3	P0.28	Digital I/O	General purpose I/O <sup>3</sup>
	AIN4	Analog input	SAADC/COMP/LPCOMP input
A4	P0.29	Digital I/O	General purpose I/O <sup>3</sup>
	AIN5	Analog input	SAADC/COMP/LPCOMP input
A5	P0.30	Digital I/O	General purpose I/O <sup>3</sup>
	AIN6	Analog input	SAADC/COMP/LPCOMP input
A6	DEC4	Power	1.3 V regulator supply decoupling Input from DC/DC converter. Output from 1.3 V LDO
A7	VDD	Power	Power supply
B2	XC1	Analog input	Connection for 32 MHz crystal
B3	P0.25	Digital I/O	General purpose I/O <sup>3</sup>

<sup>1</sup> See [GPIO located near the radio](#) on page 18 for more information.

<sup>2</sup> See [NFC antenna pins](#) on page 18 for more information.



Ball	Name		Description
B4	P0.27	Digital I/O	General purpose I/O <sup>3</sup>
B5	P0.31	Digital I/O	General purpose I/O <sup>3</sup>
	AIN7	Analog input	SAADC/COMP/LPCOMP input
B6	DCC	Power	DC/DC converter output
B7	DEC1	Power	0.9 V regulator digital supply decoupling
C2	DEC3	Power	Power supply decoupling
C3	NC	N/A	Not connected
C4	VSS	Power	Ground
C5	VSS	Power	Ground
C6	P0.02	Digital I/O	General purpose I/O
	AIN0	Analog input	SAADC/COMP/LPCOMP input
C7	P0.01	Digital I/O	General purpose I/O
	XL2	Analog input	Connection for 32.768 kHz crystal (LFXO)
D1	ANT	RF	Single-ended radio antenna connection
D2	VSS_PA	Power	Ground (Radio supply)
D3	P0.26	Digital I/O	General purpose I/O <sup>3</sup>
D6	P0.03	Digital I/O	General purpose I/O
	AIN1	Analog input	SAADC/COMP/LPCOMP input
D7	P0.00	Digital I/O	General purpose I/O
	XL1	Analog input	Connection for 32.768 kHz crystal (LFXO)
E1	P0.24	Digital I/O	General purpose I/O <sup>3</sup>
E2	P0.23	Digital I/O	General purpose I/O <sup>3</sup>
E3	VSS	Power	Ground
E6	P0.04	Digital I/O	General purpose I/O
	AIN2	Analog input	SAADC/COMP/LPCOMP input
E7	P0.05	Digital I/O	General purpose I/O
	AIN3	Analog input	SAADC/COMP/LPCOMP input
F1	SWDCLK	Digital input	Serial wire debug clock input for debug and programming
F2	P0.22	Digital I/O	General purpose I/O <sup>3</sup>
F3	P0.19	Digital I/O	General purpose I/O
F4	P0.11	Digital I/O	General purpose I/O
F5	VSS	Power	Ground
F6	P0.07	Digital I/O	General purpose I/O
F7	P0.06	Digital I/O	General purpose I/O
G1	SWDIO	Digital I/O	Serial wire debug I/O for debug and programming
G2	P0.20	Digital I/O	General purpose I/O
	TRACECLK		Trace port clock output
G3	P0.17	Digital I/O	General purpose I/O
G4	P0.13	Digital I/O	General purpose I/O
G5	NFC2	NFC input	NFC antenna connection
	P0.10	Digital I/O	General purpose I/O <sup>4</sup>
G6	NFC1	NFC input	NFC antenna connection
	P0.09	Digital I/O	General purpose I/O <sup>4</sup>
G7	P0.08	Digital I/O	General purpose I/O
H1	P0.21	Digital I/O	General purpose I/O
	nRESET		Configurable as pin reset
H2	P0.18	Digital I/O	General purpose I/O
	TRACEDATA[0]		Trace port output
H3	P0.16	Digital I/O	General purpose I/O
	TRACEDATA[1]		Trace port output
H4	P0.15	Digital I/O	General purpose I/O

Ball	Name	Description
H5	TRACEDATA[2]	Trace port output
	P0.14	Digital I/O
H6	TRACEDATA[3]	Trace port output
	P0.12	Digital I/O
H7	VDD	Power

## 4.3 GPIO usage restrictions

For more information on standard drive, see [GPIO — General purpose input/output](#) on page 114. Low frequency I/O is a signal with a frequency up to 10 kHz.

### 4.3.1 GPIO located near the radio

Radio performance parameters, such as sensitivity, may be affected by high frequency digital I/O with large sink/source current close to the Radio power supply and antenna pins.

[Table 5: GPIO recommended usage for QFN48 package](#) on page 18 and [Table 6: GPIO recommended usage for WLCSP package](#) on page 18 identify some GPIO that have recommended usage guidelines to maximize radio performance in an application.

**Table 5: GPIO recommended usage for QFN48 package**

Pin	GPIO	Recommended usage
27	P0.22	Low drive, low frequency I/O only.
28	P0.23	
29	P0.24	
37	P0.25	
38	P0.26	
39	P0.27	
40	P0.28	
41	P0.29	
42	P0.30	
43	P0.31	

**Table 6: GPIO recommended usage for WLCSP package**

Pin	GPIO	Recommended usage
F2	P0.22	Low drive, low frequency I/O only.
E2	P0.23	
E1	P0.24	
B3	P0.25	
D3	P0.26	
B4	P0.27	
A3	P0.28	
A4	P0.29	
A5	P0.30	
B5	P0.31	

### 4.3.2 NFC antenna pins

Two physical pins can be configured either as NFC antenna pins (factory default), or as GPIOs, as shown below.

**Table 7: GPIO pins used by NFC**

NFC pad name	GPIO
NFC1	P0.09
NFC2	P0.10

When configured as NFC antenna pins, the GPIOs on those pins will automatically be set to DISABLE state and a protection circuit will be enabled preventing the chip from being damaged in the presence of a strong

<sup>3</sup> See [GPIO located near the radio](#) on page 18 for more information.

<sup>4</sup> See [NFC antenna pins](#) on page 18 for more information.

NFC field. The protection circuit will short the two pins together if voltage difference exceeds approximately 2 V.

For information on how to configure these pins as normal GPIOs, see [NFCT — Near field communication tag](#) on page 420 and [UICR — User information configuration registers](#) on page 55. Note that the device will not be protected against strong NFC field damage if the pins are configured as GPIO and an NFC antenna is connected to the device. The pins will always be configured as NFC pins during power-on reset until the configuration is set according to the UICR register.


These two pins will have some limitations when configured as GPIO. The pin capacitance will be higher on these pins, and there is some current leakage between the two pins if they are driven to different logical values. To avoid leakage between the pins when configured as GPIO, these GPIOs should always be at the same logical value whenever entering one of the device power saving modes. See [Electrical specification](#).

## 5 Absolute maximum ratings

Maximum ratings are the extreme limits to which the chip can be exposed for a limited amount of time without permanently damaging it. Exposure to absolute maximum ratings for prolonged periods of time may affect the reliability of the device.

**Table 8: Absolute maximum ratings**

	Min.	Max.	Unit
<b>Supply voltages</b>			
VDD	-0.3	+3.9	V
VSS		0	V
<b>I/O pin voltage</b>			
V <sub>I/O</sub> , VDD ≤ 3.6 V	-0.3	VDD + 0.3 V	V
V <sub>I/O</sub> , VDD > 3.6 V	-0.3	3.9 V	V
<b>NFC antenna pin current</b>			
I <sub>NFC1/2</sub>		80	mA
<b>Radio</b>			
RF input level		10	dBm
<b>Environmental QFN48, 6×6 mm package</b>			
Storage temperature	-40	+125	°C
MSL (moisture sensitivity level)		2	
ESD HBM (human body model)		4	kV
ESD CDM (charged device model)		1000	V
<b>Environmental WLCSP, 3.0×3.2 mm package</b>			
Storage temperature	-40	+125	°C
MSL		1	
ESD HBM		2	kV
ESD CDM		500	V
<b>Flash memory</b>			
Endurance	10 000		Write/erase cycles
Retention	10 years at 85°C		

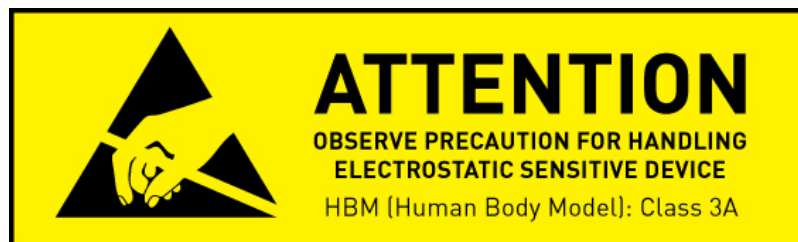

## 6 Recommended operating conditions

The operating conditions are the physical parameters that the chip can operate within.

**Table 9: Recommended operating conditions**

Symbol	Parameter	Notes	Min.	Nom.	Max.	Units
VDD	Supply voltage, independent of DCDC enable		1.7	3.0	3.6	V
t <sub>R_VDD</sub>	Supply rise time (0 V to 1.7 V)				60	ms
TA	Operating temperature		-40	25	85	°C

**Important:** The on-chip power-on reset circuitry may not function properly for rise times longer than the specified maximum.

### 6.1 WLCSP light sensitivity

All WLCSP package variants are sensitive to visible and close-range infrared light. This means that a final product design must shield the chip properly, either by final product encapsulation or by shielding/coating of the WLCSP device.

## 7 CPU

The ARM® Cortex®-M4 processor with floating-point unit (FPU) has a 32-bit instruction set (Thumb®-2 technology) that implements a superset of 16 and 32-bit instructions to maximize code density and performance.

This processor implements several features that enable energy-efficient arithmetic and high-performance signal processing including:

- Digital signal processing (DSP) instructions
- Single-cycle multiply and accumulate (MAC) instructions
- Hardware divide
- 8 and 16-bit single instruction multiple data (SIMD) instructions
- Single-precision floating-point unit (FPU)

The ARM Cortex Microcontroller Software Interface Standard (CMSIS) hardware abstraction layer for the ARM Cortex processor series is implemented and available for the M4 CPU.

Real-time execution is highly deterministic in thread mode, to and from sleep modes, and when handling events at configurable priority levels via the Nested Vectored Interrupt Controller (NVIC).

Executing code from flash will have a wait state penalty on the nRF52 Series. An instruction cache can be enabled to minimize flash wait states when fetching instructions. For more information on cache, see [Cache](#) on page 31. The section [Electrical specification](#) on page 22 shows CPU performance parameters including wait states in different modes, CPU current and efficiency, and processing power and efficiency based on the CoreMark® benchmark.

### 7.1 Floating point interrupt

The floating point unit (FPU) may generate exceptions when used due to e.g. overflow or underflow. These exceptions will trigger the FPU interrupt (see [Instantiation](#) on page 25). To clear the IRQ line when an exception has occurred, the relevant exception bit within the FPSCR register needs to be cleared. For more information about the FPSCR or other FPU registers, see *Cortex-M4 Devices Generic User Guide*.

## 7.2 Electrical specification

### 7.2.1 CPU performance

The CPU clock speed is 64 MHz. Current and efficiency data is taken when in System ON and the CPU is executing the CoreMark™ benchmark. It includes power regulator and clock base currents. All other blocks are IDLE.

Symbol	Description	Min.	Typ.	Max.	Units
W <sub>FLASH</sub>	CPU wait states, running from flash, cache disabled	0		2	
W <sub>FLASHCACHE</sub>	CPU wait states, running from flash, cache enabled	0		3	
W <sub>RAM</sub>	CPU wait states, running from RAM			0	
I <sub>DDFLASHCACHE</sub>	CPU current, running from flash, cache enabled, LDO		7.4		mA
I <sub>DDFLASHCACHEDCDC</sub>	CPU current, running from flash, cache enabled, DCDC 3V		3.7		mA
I <sub>DDFLASH</sub>	CPU current, running from flash, cache disabled, LDO		8.0		mA
I <sub>DDFLASHDCDC</sub>	CPU current, running from flash, cache disabled, DCDC 3V		3.9		mA
I <sub>DDRAM</sub>	CPU current, running from RAM, LDO		6.7		mA
I <sub>DDRAMDCDC</sub>	CPU current, running from RAM, DCDC 3V		3.3		mA
I <sub>DDFLASH/MHz</sub>	CPU efficiency, running from flash, cache enabled, LDO		125		μA/ MHz
I <sub>DDFLASHDCDC/MHz</sub>	CPU efficiency, running from flash, cache enabled, DCDC 3V		58		μA/ MHz

Symbol	Description	Min.	Typ.	Max.	Units
CM <sub>FLASH</sub>	CoreMark <sup>5</sup> , running from flash, cache enabled		215		CoreM
CM <sub>FLASH/MHz</sub>	CoreMark per MHz, running from flash, cache enabled		3.36		CoreM MHz
CM <sub>FLASH/mA</sub>	CoreMark per mA, running from flash, cache enabled, DCDC 3V		58		CoreM mA

## 7.3 CPU and support module configuration

The ARM® Cortex®-M4 processor has a number of CPU options and support modules implemented on the device.

Option / Module	Description	Implemented
Core options		
NVIC	Nested Vector Interrupt Controller	37 vectors
PRIORITIES	Priority bits	3
WIC	Wakeup Interrupt Controller	NO
Endianness	Memory system endianness	Little endian
Bit Banding	Bit banded memory	NO
DWT	Data Watchpoint and Trace	YES
SysTick	System tick timer	YES
Modules		
MPU	Memory protection unit	YES
FPU	Floating point unit	YES
DAP	Debug Access Port	YES
ETM	Embedded Trace Macrocell	YES
ITM	Instrumentation Trace Macrocell	YES
TPIU	Trace Port Interface Unit	YES
ETB	Embedded Trace Buffer	NO
FPB	Flash Patch and Breakpoint Unit	YES
HTM	AHB Trace Macrocell	NO

<sup>5</sup> Using IAR v6.50.1.4452 with flags --endian=little --cpu=Cortex-M4 -e --fpu=VFPv4\_sp -Ohs --no\_size\_constraints

## 8 Memory


The nRF52832 contains flash and RAM that can be used for code and data storage.

The amount of RAM and flash will vary depending on variant, see [Table 10: Memory variants](#) on page 24.

**Table 10: Memory variants**

Device name	RAM	Flash	Comments
nRF52832-QFAA	64 kB	512 kB	
nRF52832-QFAB	32 kB	256 kB	
nRF52832-CIAA	64 kB	512 kB	

The CPU and the EasyDMA can access memory via the AHB multilayer interconnect. The CPU is also able to access peripherals via the AHB multilayer interconnect, as illustrated in [Figure 4: Memory layout](#) on page 24.

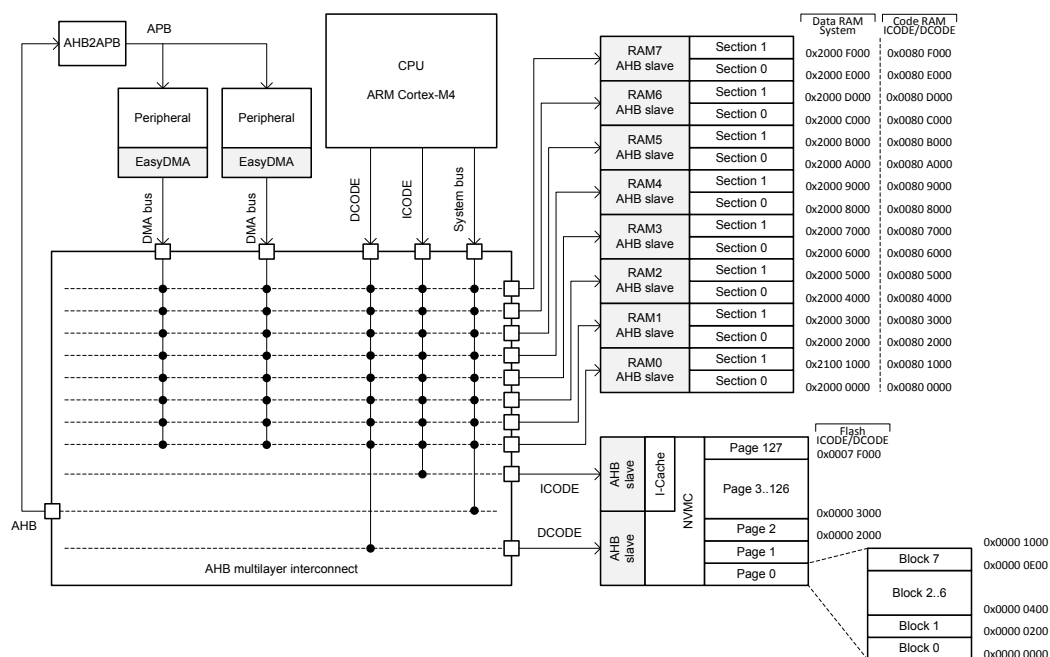

**Figure 4: Memory layout**

See [AHB multilayer](#) on page 27 and [EasyDMA](#) on page 28 for more information about the AHB multilayer interconnect and the EasyDMA.

The same physical RAM is mapped to both the Data RAM region and the Code RAM region. It is up to the application to partition the RAM within these regions so that one does not corrupt the other.

### 8.1 RAM - Random access memory

The RAM interface is divided into multiple RAM AHB slaves.

Each RAM AHB slave is connected to two 4-kilobyte RAM sections, see Section 0 and Section 1 in [Figure 4: Memory layout](#) on page 24.

Each of the RAM sections have separate power control for System ON and System OFF mode operation, which is configured via RAM register (see the [POWER — Power supply](#) on page 81).



## 8.2 Flash - Non-volatile memory

The Flash can be read an unlimited number of times by the CPU, but it has restrictions on the number of times it can be written and erased and also on how it can be written.

Writing to Flash is managed by the Non-volatile memory controller (NVMC), see [NVMC — Non-volatile memory controller](#) on page 30.

The Flash is divided into multiple pages that can be accessed by the CPU via both the ICODE and DCODE buses as shown in, [Figure 4: Memory layout](#) on page 24. Each page is divided into 8 blocks.

## 8.3 Memory map

The complete memory map is shown in [Figure 5: Memory map](#) on page 25. As described in [Memory](#) on page 24, Code RAM and the Data RAM are the same physical RAM.

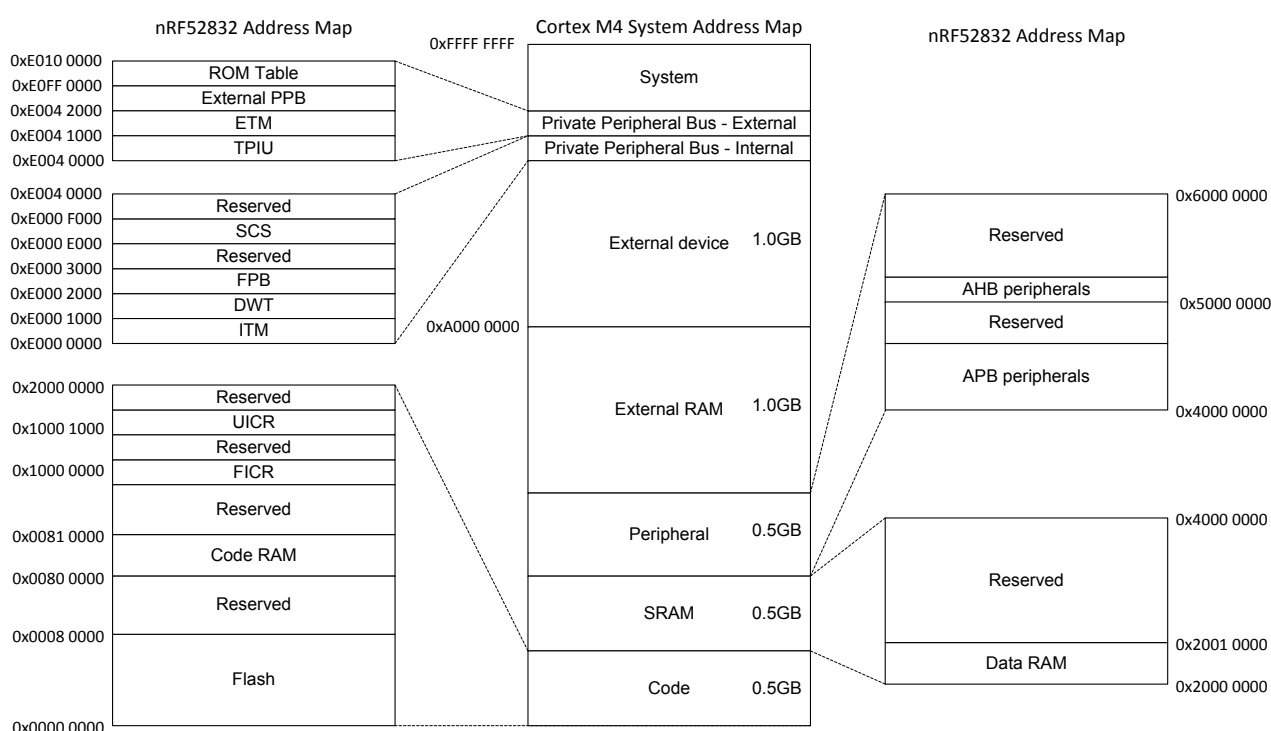


Figure 5: Memory map

## 8.4 Instantiation

Table 11: Instantiation table

ID	Base Address	Peripheral	Instance	Description
0	0x40000000	POWER	POWER	Power control
0	0x40000000	CLOCK	CLOCK	Clock control
0	0x40000000	APPROTECT	APPROTECT	APPROTECT control
0	0x40000000	BPROT	BPROT	Block Protect
1	0x40001000	RADIO	RADIO	2.4 GHz radio
2	0x40002000	UARTE	UARTE0	Universal Asynchronous Receiver/Transmitter with EasyDMA
2	0x40002000	UART	UART0	Universal Asynchronous Receiver/Transmitter
3	0x40003000	SPIM	SPIM0	SPI master 0
3	0x40003000	SPIS	SPIS0	SPI slave 0
3	0x40003000	SPI	SPI0	SPI master 0
3	0x40003000	TWIM	TWIM0	Two-wire interface master 0

ID	Base Address	Peripheral	Instance	Description	
3	0x40003000	TWIS	TWIS0	Two-wire interface slave 0	
3	0x40003000	TWI	TWI0	Two-wire interface master 0	Deprecated
4	0x40004000	TWI	TWI1	Two-wire interface master 1	Deprecated
4	0x40004000	TWIM	TWIM1	Two-wire interface master 1	
4	0x40004000	TWIS	TWIS1	Two-wire interface slave 1	
4	0x40004000	SPI	SPI1	SPI master 1	Deprecated
4	0x40004000	SPIM	SPIM1	SPI master 1	
4	0x40004000	SPIS	SPIS1	SPI slave 1	
5	0x40005000	NFCT	NFCT	Near Field Communication Tag	
6	0x40006000	GPIOE	GPIOE	GPIO Tasks and Events	
7	0x40007000	SAADC	SAADC	Analog to digital converter	
8	0x40008000	TIMER	TIMER0	Timer 0	
9	0x40009000	TIMER	TIMER1	Timer 1	
10	0x4000A000	TIMER	TIMER2	Timer 2	
11	0x4000B000	RTC	RTC0	Real-time counter 0	
12	0x4000C000	TEMP	TEMP	Temperature sensor	
13	0x4000D000	RNG	RNG	Random number generator	
14	0x4000E000	ECB	ECB	AES Electronic Code Book (ECB) mode block encryption	
15	0x4000F000	CCM	CCM	AES CCM Mode Encryption	
15	0x4000F000	AAR	AAR	Accelerated Address Resolver	
16	0x40010000	WDT	WDT	Watchdog timer	
17	0x40011000	RTC	RTC1	Real-time counter 1	
18	0x40012000	QDEC	QDEC	Quadrature decoder	
19	0x40013000	LPCOMP	LPCOMP	Low power comparator	
19	0x40013000	COMP	COMP	General purpose comparator	
20	0x40014000	EGU	EGU0	Event Generator Unit 0	
20	0x40014000	SWI	SWI0	Software interrupt 0	
21	0x40015000	EGU	EGU1	Event Generator Unit 1	
21	0x40015000	SWI	SWI1	Software interrupt 1	
22	0x40016000	SWI	SWI2	Software interrupt 2	
22	0x40016000	EGU	EGU2	Event Generator Unit 2	
23	0x40017000	SWI	SWI3	Software interrupt 3	
23	0x40017000	EGU	EGU3	Event Generator Unit 3	
24	0x40018000	SWI	SWI4	Software interrupt 4	
24	0x40018000	EGU	EGU4	Event Generator Unit 4	
25	0x40019000	SWI	SWI5	Software interrupt 5	
25	0x40019000	EGU	EGU5	Event Generator Unit 5	
26	0x4001A000	TIMER	TIMER3	Timer 3	
27	0x4001B000	TIMER	TIMER4	Timer 4	
28	0x4001C000	PWM	PWM0	Pulse Width Modulation Unit 0	
29	0x4001D000	PDM	PDM	Pulse Density Modulation (Digital Microphone Interface)	
30	0x4001E000	NVMC	NVMC	Non-Volatile Memory Controller	
31	0x4001F000	PPI	PPI	Programmable Peripheral Interconnect	
32	0x40020000	MWU	MWU	Memory Watch Unit	
33	0x40021000	PWM	PWM1	Pulse Width Modulation Unit 1	
34	0x40022000	PWM	PWM2	Pulse Width Modulation Unit 2	
35	0x40023000	SPIS	SPIS2	SPI slave 2	
35	0x40023000	SPI	SPI2	SPI master 2	Deprecated
35	0x40023000	SPIM	SPIM2	SPI master 2	
36	0x40024000	RTC	RTC2	Real-time counter 2	
37	0x40025000	I2S	I2S	Inter-IC Sound Interface	
38	0x40026000	FPU	FPU	FPU interrupt	
0	0x50000000	GPIO	GPIO	General purpose input and output	Deprecated
0	0x50000000	GPIO	P0	General purpose input and output	
N/A	0x10000000	FICR	FICR	Factory Information Configuration	
N/A	0x10001000	UICR	UICR	User Information Configuration	

## 9 AHB multilayer

The CPU and all of the EasyDMAs are AHB bus masters on the AHB multilayer, while the RAM and various other modules are AHB slaves.

See [Block diagram](#) on page 13 for an overview of which peripherals implement EasyDMA.

The CPU has exclusive access to all AHB slaves except for the RAM that can also be accessed by the EasyDMA.

Access rights to each of the RAM AHB slaves are resolved using the priority of the different bus masters in the system

See [AHB multilayer priorities](#) on page 27 for information about the priority of the different AHB bus masters in the system. It is possible for two or more bus masters to have the same priority in cases where it is guaranteed by design that the related masters will never be able to access the same slave at the same time.

### 9.1 AHB multilayer priorities

Each master connected to the AHB multilayer is assigned a priority.

**Table 12: AHB bus masters**


Bus master name	Priority	Description
CPU	Highest priority	
SPIS1		Applies to SPIM1, SPIS1, TWIM1, TWIS1
RADIO		
CCM/ECB/AAR		
SAADC		
UARTE		
SERIAL0		Applies to SPIM0, SPIS0, TWIM0, TWIS0
SERIAL2		Applies to SPIM2, SPIS2
NFCT		
I2S		I2S
PDM		PDM
PWM	Lowest priority	Applies to PWM0, PWM1, PWM2

## 10 EasyDMA

EasyDMA is an easy-to-use direct memory access module that some peripherals implement to gain direct access to Data RAM.

The EasyDMA is an AHB bus master similar to the CPU and it is connected to the AHB multilayer interconnect for direct access to the Data RAM. The EasyDMA is not able to access the Flash.

A peripheral can implement multiple EasyDMA instances, for example to provide a dedicated channel for reading data from RAM into the peripheral at the same time as a second channel is dedicated for writing data to the RAM from the peripheral. This concept is illustrated in [Figure 6: EasyDMA example](#) on page 28

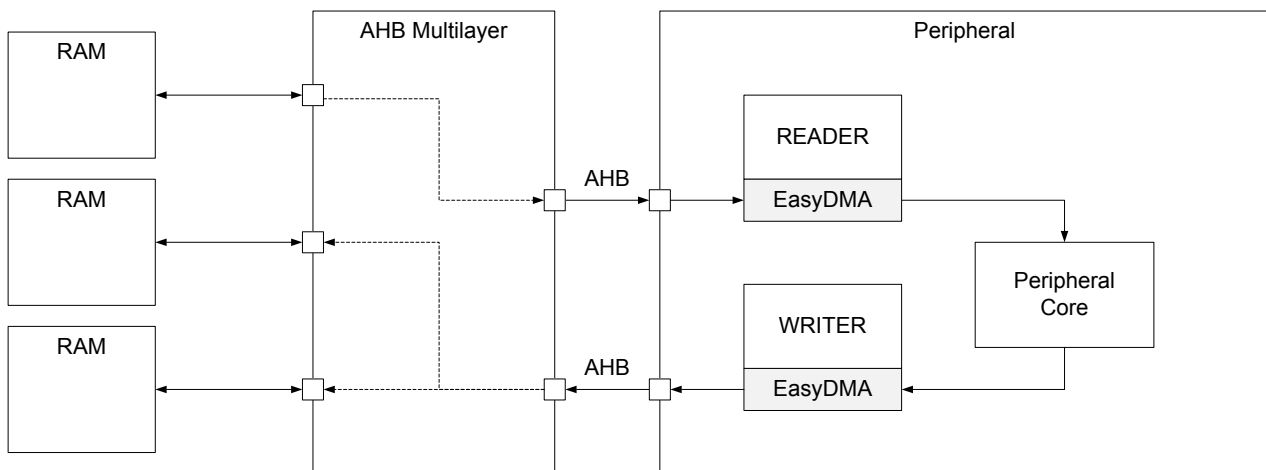

**Figure 6: EasyDMA example**

An EasyDMA channel is usually exposed to the user in the form illustrated below, but some variations may occur:

```

READERBUFFER_SIZE 5
WRITERBUFFER_SIZE 6

uint8_t readerBuffer[READERBUFFER_SIZE] __at__ 0x20000000;
uint8_t writerBuffer[WRITERBUFFER_SIZE] __at__ 0x20000005;

// Configuring the READER channel
MYPERIPHERAL->READER.MAXCNT = READERBUFFER_SIZE;
MYPERIPHERAL->READER.PTR = &readerBuffer;

// Configure the WRITER channel
MYPERIPHERAL->WRITER.MAXCNT = WRITERBUFFER_SIZE;
MYPERIPHERAL->WRITER.PTR = &writerBuffer;
  
```

This example shows a peripheral called MYPERIPHERAL that implements two EasyDMA channels, one for reading, called READER, and one for writing, called WRITER. When the peripheral is started, it is here assumed that the peripheral will read 5 bytes from the readerBuffer located in RAM at address 0x20000000, process the data and then write no more than 6 bytes back to the writerBuffer located in RAM at address 0x20000005. The memory layout of these buffers is illustrated in [Figure 7: EasyDMA memory layout](#) on page 29.

0x20000000	readerBuffer[0]	readerBuffer[1]	readerBuffer[2]	readerBuffer[3]
0x20000004	readerBuffer[4]	writerBuffer[0]	writerBuffer[1]	writerBuffer[2]
0x20000008	writerBuffer[3]	writerBuffer[4]	writerBuffer[5]	

**Figure 7: EasyDMA memory layout**

The EasyDMA channel's MAXCNT register cannot be specified larger than the actual size of the buffer. If, for example, the WRITER.MAXCNT register is specified larger than the size of the writerBuffer, the WRITER EasyDMA channel may overflow the writerBuffer.

After the peripheral has completed the EasyDMA transfer, the CPU can read the EasyDMA channel's AMOUNT register to see how many bytes that were transferred, e.g. it is possible for the CPU to read the MYPERIPHERAL->WRITER.AMOUNT register to see how many bytes the WRITER wrote to RAM.

## 10.1 EasyDMA array list

The EasyDMA is able to operate in a mode called array list.

The EasyDMA array list can be represented by the data structure ArrayList\_type illustrated in the code example below.

This data structure includes only a buffer with size equal to READER.MAXCNT. EasyDMA will use the READER.MAXCNT register to determine when the buffer is full.


This array list does not provide a mechanism to explicitly specify where the next item in the list is located. Instead, it assumes that the list is organized as a linear array where items are located one after the other in RAM.

```
#define BUFFER_SIZE 4

typedef struct ArrayList
{
    uint8_t buffer[BUFFER_SIZE];
} ArrayList_type;

ArrayList_type ReaderList[3];

READER.MAXCNT = BUFFER_SIZE;
READER.PTR = &ReaderList;
```

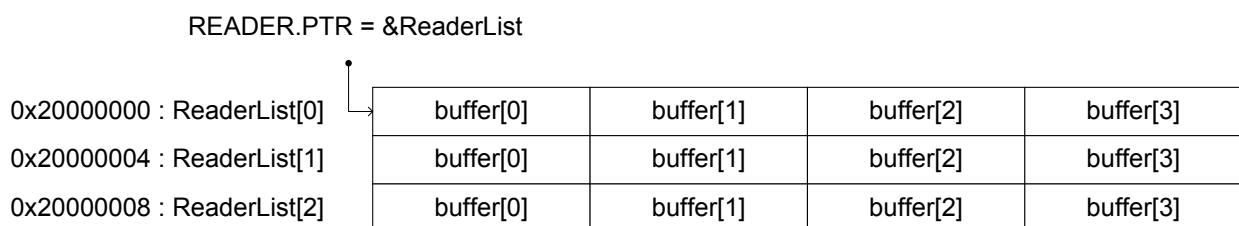

**Figure 8: EasyDMA array list**

## 11 NVMC — Non-volatile memory controller

The Non-volatile memory controller (NVMC) is used for writing and erasing the internal Flash memory and the UICR.

Before a write can be performed, the NVMC must be enabled for writing in CONFIG.WEN. Similarly, before an erase can be performed, the NVMC must be enabled for erasing in CONFIG.EEN, see [CONFIG](#) on page 32. The user must make sure that writing and erasing are not enabled at the same time. Failing to do so may result in unpredictable behavior.

### 11.1 Writing to Flash

When writing is enabled, the Flash is written by writing a full 32-bit word to a word-aligned address in the Flash.

The NVMC is only able to write '0' to bits in the Flash that are erased, that is, set to '1'. It cannot write back a bit to '1'.

As illustrated in [Memory](#) on page 24, the Flash is divided into multiple pages that are further divided into multiple blocks. The same block in the Flash can only be written  $n_{WRITE}$  number of times before an erase must be performed using [ERASEPAGE](#) or [ERASEALL](#). See the memory size and organization in [Memory](#) on page 24 for block size.

Only full 32-bit words can be written to Flash using the NVMC interface. To write less than 32 bits to Flash, write the data as a word, and set all the bits that should remain unchanged in the word to '1'. Note that the restriction about the number of writes (see above) still applies in this case.

The time it takes to write a word to the Flash is specified by  $t_{WRITE}$ . The CPU is halted while the NVMC is writing to the Flash.

Only word-aligned writes are allowed. Byte or half-word-aligned writes will result in a hard fault.

### 11.2 Erasing a page in Flash

When erase is enabled, the Flash can be erased page by page using the [ERASEPAGE](#) register.

After erasing a Flash page, all bits in the page are set to '1'. The time it takes to erase a page is specified by  $t_{ERASEPAGE}$ . The CPU is halted while the NVMC performs the erase operation.

### 11.3 Writing to user information configuration registers (UICR)

User information configuration registers (UICR) are written in the same way as Flash. After UICR has been written, the new UICR configuration will only take effect after a reset.

UICR can only be written  $n_{WRITE}$  number of times before an erase must be performed using [ERASEUICR](#) or [ERASEALL](#).

The time it takes to write a word to the UICR is specified by  $t_{WRITE}$ . The CPU is halted while the NVMC is writing to the UICR.

### 11.4 Erasing user information configuration registers (UICR)

When erase is enabled, UICR can be erased using the [ERASEUICR](#) register.

After erasing UICR all bits in UICR are set to '1'. The time it takes to erase UICR is specified by  $t_{ERASEPAGE}$ . The CPU is halted while the NVMC performs the erase operation.

## 11.5 Erase all

When erase is enabled, the whole Flash and UICR can be erased in one operation by using the ERASEALL register. ERASEALL will not erase the factory information configuration registers (FICR).

The time it takes to perform an ERASEALL command is specified by  $t_{ERASEALL}$ . The CPU is halted while the NVMC performs the erase operation.

## 11.6 Cache

An instruction cache (I-Cache) can be enabled for the ICODE bus in the NVMC.

See the Memory map in [Memory map](#) on page 25 for the location of Flash.

A cache hit is an instruction fetch from the cache, and it has a 0 wait-state delay. The number of wait-states for a cache miss, where the instruction is not available in the cache and needs to be fetched from Flash, depends on the processor frequency and is shown in [CPU](#) on page 22.

Enabling the cache can increase CPU performance and reduce power consumption by reducing the number of wait cycles and the number of flash accesses. This will depend on the cache hit rate. Cache will use some current when enabled. If the reduction in average current due to reduced flash accesses is larger than the cache power requirement, the average current to execute the program code will reduce.

When disabled, the cache does not use current and does not retain its content.

It is possible to enable cache profiling to analyze the performance of the cache for your program using the [ICACHECNF](#) register. When profiling is enabled, the [IHIT](#) and [IMISS](#) registers are incremented for every instruction cache hit or miss respectively. The hit and miss profiling registers do not wrap around after reaching the maximum value. If the maximum value is reached, consider profiling for a shorter duration to get correct numbers.

## 11.7 Registers

**Table 13: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001E000	NVMC	NVMC	Non-Volatile Memory Controller	

**Table 14: Register Overview**

Register	Offset	Description
<a href="#">READY</a>	0x400	Ready flag
<a href="#">CONFIG</a>	0x504	Configuration register
<a href="#">ERASEPAGE</a>	0x508	Register for erasing a page in Code area
<a href="#">ERASEPCR1</a>	0x508	Register for erasing a page in Code area. Equivalent to ERASEPAGE. <span>Deprecated</span>
<a href="#">ERASEALL</a>	0x50C	Register for erasing all non-volatile user memory
<a href="#">ERASEPCRO</a>	0x510	Register for erasing a page in Code area. Equivalent to ERASEPAGE. <span>Deprecated</span>
<a href="#">ERASEUICR</a>	0x514	Register for erasing User Information Configuration Registers
<a href="#">ICACHECNF</a>	0x540	I-Code cache configuration register.
<a href="#">IHIT</a>	0x548	I-Code cache hit counter.
<a href="#">IMISS</a>	0x54C	I-Code cache miss counter.

### 11.7.1 READY

Address offset: 0x400

Ready flag

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																																				A
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value	Description																														
A	R	READY				NVMC is ready or busy																														
			Busy		0	NVMC is busy (on-going write or erase operation)																														
			Ready		1	NVMC is ready																														

## 11.7.2 CONFIG

Address offset: 0x504

Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	WEN				Program memory access mode. It is strongly recommended to only activate erase and write modes when they are actively used. Enabling write or erase will invalidate the cache and keep it invalidated.																													
			Ren		0	Read only access																													
			Wen		1	Write Enabled																													
			Een		2	Erase enabled																													

## 11.7.3 ERASEPAGE

Address offset: 0x508

Register for erasing a page in Code area

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																												
A	RW	ERASEPAGE							Register for starting erase of a page in Code area																												
									The value is the address to the page to be erased. (Addresses of first word in page). Note that code erase has to be enabled by CONFIG.EEN before the page can be erased. Attempts to erase pages that are outside the code area may result in undesirable behaviour, e.g. the wrong page may be erased.																												

## 11.7.4 ERASEPCR1 ( Deprecated )

Address offset: 0x508

Register for erasing a page in Code area. Equivalent to ERASEPAGE.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value			Description																												
A	RW	ERASEPCR1						Register for erasing a page in Code area. Equivalent to ERASEPAGE.																												

## 11.7.5 ERASEALL

Address offset: 0x50C

Register for erasing all non-volatile user memory



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ERASEALL				Erase all non-volatile memory including UICR registers. Note that code erase has to be enabled by CONFIG.EEN before the UICR can be erased.																													
			NoOperation	0		No operation																													
			Erase	1		Start chip erase																													

### 11.7.6 ERASEPCR0 ( Deprecated )

Address offset: 0x510

Register for erasing a page in Code area. Equivalent to ERASEPAGE.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	ERASEPCR0					Register for starting erase of a page in Code area. Equivalent to ERASEPAGE.																													

### 11.7.7 ERASEUICR

Address offset: 0x514

Register for erasing User Information Configuration Registers

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ERASEUICR				Register starting erase of all User Information Configuration Registers. Note that code erase has to be enabled by CONFIG.EEN before the UICR can be erased.																													
			NoOperation	0		No operation																													
			Erase	1		Start erase of UICR																													

### 11.7.8 ICACHECNF

Address offset: 0x540

I-Code cache configuration register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																												B		A					
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CACHEEN				Cache enable																													
			Disabled	0	Disable cache. Invalidates all cache entries.																														
			Enabled	1	Enable cache																														
B	RW	CACHEPROFEN				Cache profiling enable																													
			Disabled	0	Disable cache profiling																														
			Enabled	1	Enable cache profiling																														

### 11.7.9 IHIT

Address offset: 0x548

I-Code cache hit counter.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	HITS						Number of cache hits																												

### 11.7.10 IMISS

Address offset: 0x54C

I-Code cache miss counter.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	MISSES						Number of cache misses																												

## 11.8 Electrical specification

### 11.8.1 Flash programming

Symbol	Description	Min.	Typ.	Max.	Units
$\Omega_{\text{WRITE,BLOCK}}$	Amount of writes allowed in a block between erase			181	
$t_{\text{WRITE}}$	Time to write one word	67.5		338	$\mu\text{s}$
$t_{\text{ERASEPAGE}}$	Time to erase one page	2.05		89.7	ms
$t_{\text{ERASEALL}}$	Time to erase all flash	6.72		295.3	ms

### 11.8.2 Cache size

Symbol	Description	Min.	Typ.	Max.	Units
$\text{Size}_{\text{ICODE}}$	I-Code cache size		2048		Bytes

## 12 BPROT — Block protection

The mechanism for protecting non-volatile memory can be used to prevent application code from erasing or writing to protected blocks.

Non-volatile memory can be protected from erases and writes depending on the settings in the CONFIG registers. One bit in a CONFIG register represents one protected block of 4 kB. There are four CONFIG registers of 32 bits, which means there are 128 protectable blocks in total.

**Important:** If an erase or write to a protected block is detected, the CPU will hard fault. If an ERASEALL operation is attempted from the CPU while any block is protected, it will be blocked and the CPU will hard fault.

On reset, all the protection bits are cleared. To ensure safe operation, the first task after reset must be to set the protection bits. The only way of clearing protection bits is by resetting the device from any reset source.

The protection mechanism is turned off when in debug interface mode (a debugger is connected) and the DISABLEINDEBUG register is set to disable. For more information, see [Debug and trace](#) on page 73.

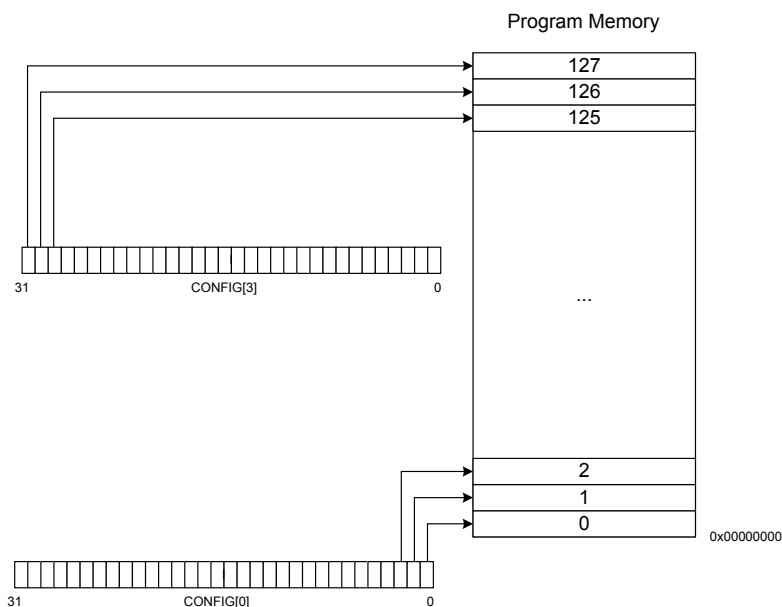


Figure 9: Protected regions of program memory

### 12.1 Registers

Table 15: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40000000	BPROT	BPROT	Block Protect	

Table 16: Register Overview

Register	Offset	Description
<a href="#">CONFIG0</a>	0x600	Block protect configuration register 0
<a href="#">CONFIG1</a>	0x604	Block protect configuration register 1
<a href="#">DISABLEINDEBUG</a>	0x608	Disable protection mechanism in debug interface mode
	0x60C	Reserved
<a href="#">CONFIG2</a>	0x610	Block protect configuration register 2
<a href="#">CONFIG3</a>	0x614	Block protect configuration register 3



Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
			Enabled	1	Protection enable
R	RW	REGION17	Disabled	0	Enable protection for region 17. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
S	RW	REGION18	Disabled	0	Enable protection for region 18. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
T	RW	REGION19	Disabled	0	Enable protection for region 19. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
U	RW	REGION20	Disabled	0	Enable protection for region 20. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
V	RW	REGION21	Disabled	0	Enable protection for region 21. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
W	RW	REGION22	Disabled	0	Enable protection for region 22. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
X	RW	REGION23	Disabled	0	Enable protection for region 23. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
Y	RW	REGION24	Disabled	0	Enable protection for region 24. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
Z	RW	REGION25	Disabled	0	Enable protection for region 25. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
a	RW	REGION26	Disabled	0	Enable protection for region 26. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
b	RW	REGION27	Disabled	0	Enable protection for region 27. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
c	RW	REGION28	Disabled	0	Enable protection for region 28. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
d	RW	REGION29	Disabled	0	Enable protection for region 29. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
e	RW	REGION30	Disabled	0	Enable protection for region 30. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable
f	RW	REGION31	Disabled	0	Enable protection for region 31. Write '0' has no effect. Protection disabled
			Enabled	1	Protection enable

## 12.1.2 CONFIG1

Address offset: 0x604

Block protect configuration register 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	REGION32					Enable protection for region 32. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
B	RW	REGION33					Enable protection for region 33. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
C	RW	REGION34					Enable protection for region 34. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
D	RW	REGION35					Enable protection for region 35. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
E	RW	REGION36					Enable protection for region 36. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
F	RW	REGION37					Enable protection for region 37. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
G	RW	REGION38					Enable protection for region 38. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
H	RW	REGION39					Enable protection for region 39. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
I	RW	REGION40					Enable protection for region 40. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
J	RW	REGION41					Enable protection for region 41. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
K	RW	REGION42					Enable protection for region 42. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
L	RW	REGION43					Enable protection for region 43. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
M	RW	REGION44					Enable protection for region 44. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
N	RW	REGION45					Enable protection for region 45. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
O	RW	REGION46					Enable protection for region 46. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
P	RW	REGION47					Enable protection for region 47. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
Q	RW	REGION48					Enable protection for region 48. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
R	RW	REGION49					Enable protection for region 49. Write '0' has no effect.																												
			Disabled	0		Protection disabled																													
			Enabled	1		Protection enabled																													
S	RW	REGION50					Enable protection for region 50. Write '0' has no effect.																												

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
T	RW	REGION51	Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			Enable protection for region 51. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																	
U	RW	REGION52	Enabled	1	Protection enabled																																	
			Enable protection for region 52. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
V	RW	REGION53	Enable protection for region 53. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			W	RW	REGION54	Enable protection for region 54. Write '0' has no effect.																																
Disabled	0	Protection disabled																																				
Enabled	1	Protection enabled																																				
X	RW	REGION55				Enable protection for region 55. Write '0' has no effect.																																
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			Y	RW	REGION56	Enable protection for region 56. Write '0' has no effect.																																
Disabled	0	Protection disabled																																				
Enabled	1	Protection enabled																																				
Z	RW	REGION57				Enable protection for region 57. Write '0' has no effect.																																
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			a	RW	REGION58	Enable protection for region 58. Write '0' has no effect.																																
Disabled	0	Protection disabled																																				
Enabled	1	Protection enabled																																				
b	RW	REGION59				Enable protection for region 59. Write '0' has no effect.																																
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			c	RW	REGION60	Enable protection for region 60. Write '0' has no effect.																																
Disabled	0	Protection disabled																																				
Enabled	1	Protection enabled																																				
d	RW	REGION61				Enable protection for region 61. Write '0' has no effect.																																
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
			e	RW	REGION62	Enable protection for region 62. Write '0' has no effect.																																
Disabled	0	Protection disabled																																				
Enabled	1	Protection enabled																																				
f	RW	REGION63				Enable protection for region 63. Write '0' has no effect.																																
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	

### 12.1.3 DISABLEINDEBUB

Address offset: 0x608

Disable protection mechanism in debug interface mode

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A																															
Reset 0x00000001					0 1																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	DISABLEINDEBUB			Disable the protection mechanism for NVM regions while in debug interface mode. This register will only disable the protection mechanism if the device is in debug interface mode.																															
			Disabled	1	Disable in debug																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value Id	Value				Description																											
			Enabled	0				Enable in debug																											

## 12.1.4 CONFIG2

Address offset: 0x610

Block protect configuration register 2

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id								f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																																			
A	RW	REGION64			Enable protection for region 64. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
B	RW	REGION65			Enable protection for region 65. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
C	RW	REGION66			Enable protection for region 66. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
D	RW	REGION67			Enable protection for region 67. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
E	RW	REGION68			Enable protection for region 68. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
F	RW	REGION69			Enable protection for region 69. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
G	RW	REGION70			Enable protection for region 70. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
H	RW	REGION71			Enable protection for region 71. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
I	RW	REGION72			Enable protection for region 72. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
J	RW	REGION73			Enable protection for region 73. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
K	RW	REGION74			Enable protection for region 74. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
L	RW	REGION75			Enable protection for region 75. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
M	RW	REGION76			Enable protection for region 76. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
N	RW	REGION77			Enable protection for region 77. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			
			Enabled	1	Protection enabled																																			
O	RW	REGION78			Enable protection for region 78. Write '0' has no effect.																																			
			Disabled	0	Protection disabled																																			



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
P	RW	REGION79	Enabled	1	Protection enabled																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
Q	RW	REGION80			Enable protection for region 80. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
R	RW	REGION81			Enable protection for region 81. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
S	RW	REGION82			Enable protection for region 82. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
T	RW	REGION83			Enable protection for region 83. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
U	RW	REGION84			Enable protection for region 84. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
V	RW	REGION85			Enable protection for region 85. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
W	RW	REGION86			Enable protection for region 86. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
X	RW	REGION87			Enable protection for region 87. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
Y	RW	REGION88			Enable protection for region 88. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
Z	RW	REGION89			Enable protection for region 89. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
a	RW	REGION90			Enable protection for region 90. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
b	RW	REGION91			Enable protection for region 91. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
c	RW	REGION92			Enable protection for region 92. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
d	RW	REGION93			Enable protection for region 93. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
e	RW	REGION94			Enable protection for region 94. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	
f	RW	REGION95			Enable protection for region 95. Write '0' has no effect.																																	
			Disabled	0	Protection disabled																																	
			Enabled	1	Protection enabled																																	



Page 43

## 13 FICR — Factory information configuration registers

Factory information configuration registers (FICR) are pre-programmed in factory and cannot be erased by the user. These registers contain chip-specific information and configuration.

### 13.1 Registers

**Table 17: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x10000000	FICR	FICR	Factory Information Configuration	

**Table 18: Register Overview**

Register	Offset	Description
<a href="#">CODEPAGESIZE</a>	0x010	Code memory page size
<a href="#">CODESIZE</a>	0x014	Code memory size
<a href="#">DEVICEID[0]</a>	0x060	Device identifier
<a href="#">DEVICEID[1]</a>	0x064	Device identifier
<a href="#">ER[0]</a>	0x080	Encryption Root, word 0
<a href="#">ER[1]</a>	0x084	Encryption Root, word 1
<a href="#">ER[2]</a>	0x088	Encryption Root, word 2
<a href="#">ER[3]</a>	0x08C	Encryption Root, word 3
<a href="#">IR[0]</a>	0x090	Identity Root, word 0
<a href="#">IR[1]</a>	0x094	Identity Root, word 1
<a href="#">IR[2]</a>	0x098	Identity Root, word 2
<a href="#">IR[3]</a>	0x09C	Identity Root, word 3
<a href="#">DEVICEADDRTYPE</a>	0x0A0	Device address type
<a href="#">DEVICEADDR[0]</a>	0x0A4	Device address 0
<a href="#">DEVICEADDR[1]</a>	0x0A8	Device address 1
<a href="#">INFO.PART</a>	0x100	Part code
<a href="#">INFO.VARIANT</a>	0x104	Part Variant, Hardware version and Production configuration
<a href="#">INFO.PACKAGE</a>	0x108	Package option
<a href="#">INFO.RAM</a>	0x10C	RAM variant
<a href="#">INFO.FLASH</a>	0x110	Flash variant
	0x114	Reserved
	0x118	Reserved
	0x11C	Reserved
<a href="#">TEMP.A0</a>	0x404	Slope definition A0.
<a href="#">TEMP.A1</a>	0x408	Slope definition A1.
<a href="#">TEMP.A2</a>	0x40C	Slope definition A2.
<a href="#">TEMP.A3</a>	0x410	Slope definition A3.
<a href="#">TEMP.A4</a>	0x414	Slope definition A4.
<a href="#">TEMP.A5</a>	0x418	Slope definition A5.
<a href="#">TEMP.B0</a>	0x41C	y-intercept B0.
<a href="#">TEMP.B1</a>	0x420	y-intercept B1.
<a href="#">TEMP.B2</a>	0x424	y-intercept B2.
<a href="#">TEMP.B3</a>	0x428	y-intercept B3.
<a href="#">TEMP.B4</a>	0x42C	y-intercept B4.
<a href="#">TEMP.B5</a>	0x430	y-intercept B5.
<a href="#">TEMP.T0</a>	0x434	Segment end T0.
<a href="#">TEMP.T1</a>	0x438	Segment end T1.
<a href="#">TEMP.T2</a>	0x43C	Segment end T2.
<a href="#">TEMP.T3</a>	0x440	Segment end T3.
<a href="#">TEMP.T4</a>	0x444	Segment end T4.

Register	Offset	Description
<a href="#">NFC.TAGHEADER0</a>	0x450	Default header for NFC Tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER1</a>	0x454	Default header for NFC Tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER2</a>	0x458	Default header for NFC Tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER3</a>	0x45C	Default header for NFC Tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.

### 13.1.1 CODEPAGESIZE

Address offset: 0x010

Code memory page size

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	R	CODEPAGESIZE							Code memory page size																										

### 13.1.2 CODESIZE

Address offset: 0x014

Code memory size

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	R	CODESIZE													Code memory size in number of pages																					
															Total code space is: CODEPAGESIZE * CODESIZE																					

### 13.1.3 DEVICEID[0]

Address offset: 0x060

Device identifier

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																				
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A																																					
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																																					
Id	RW	Field	Value	Id	Value																																		Description																																	
A	R	DEVICEID																																					64 bit unique device identifier																																	
																																							DEVICEID[0] contains the least significant bits of the device identifier. DEVICEID[1] contains the most significant bits of the device identifier.																																	

### 13.1.4 DEVICEID[1]

Address offset: 0x064

Device identifier

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	R	DEVICEID							64 bit unique device identifier																										

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value	Id	Value	Description																																
						DEVICEID[0] contains the least significant bits of the device identifier. DEVICEID[1] contains the most significant bits of the device identifier.																																

### 13.1.5 ER[0]

Address offset: 0x080

Encryption Root, word 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	ER						Encryption Root, word n																												

### 13.1.6 ER[1]

Address offset: 0x084

Encryption Root, word 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value										Description																					
A	R	ER													Encryption Root, word n																					

### 13.1.7 ER[2]

Address offset: 0x088

Encryption Root, word 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id			Value			Description																											
A	R	ER							Encryption Root, word n																											

### 13.1.8 ER[3]

Address offset: 0x08C

Encryption Root, word 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id		Value										Description																								
A	R	ER													Encryption Root, word n																								

### 13.1.9 IR[0]

Address offset: 0x090

Identity Root, word 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	R	IR									Identity Root, word n																									

### 13.1.10 IR[1]

Address offset: 0x094

Identity Root, word 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word n																												

### 13.1.11 IR[2]

Address offset: 0x098

Identity Root, word 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word n																												

### 13.1.12 IR[3]

Address offset: 0x09C

Identity Root, word 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word n																												

### 13.1.13 DEVICEADDRTYPE

Address offset: 0x0A0

Device address type

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																				A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																														
A	R	DEVICEADDRTYPE				Device address type																														
			Public		0	Public address																														
			Random		1	Random address																														

### 13.1.14 DEVICEADDR[0]

Address offset: 0x0A4

Device address 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Id	RW	Field	Value Id	Value	Description
A	R	DEVICEADDR			48 bit device address
					DEVICEADDR[0] contains the least significant bits of the device address. DEVICEADDR[1] contains the most significant bits of the device address. Only bits [15:0] of DEVICEADDR[1] are used.

### 13.1.15 DEVICEADDR[1]

Address offset: 0x0A8

Device address 1

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Id	RW	Field	Value Id	Value	Description
A	R	DEVICEADDR			48 bit device address
					DEVICEADDR[0] contains the least significant bits of the device address. DEVICEADDR[1] contains the most significant bits of the device address. Only bits [15:0] of DEVICEADDR[1] are used.

### 13.1.16 INFO.PART

Address offset: 0x100

Part code

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00052832	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	0	1	0	0	0	0	0	0	1	1	0	0	1	0

Id	RW	Field	Value Id	Value	Description
A	R	PART			Part code
			N52832	0x52832	nRF52832
			Unspecified	0xFFFFFFFF	Unspecified

### 13.1.17 INFO.VARIANT

Address offset: 0x104

Part Variant, Hardware version and Production configuration

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x41414142	0	1	0	0	0	0	0	1	0	1	0	0	0	0	0	1	0	1	0	0	0	0	0	1	0	1	0	0	0	0	1	0

Id	RW	Field	Value Id	Value	Description
A	R	VARIANT			Part Variant, Hardware version and Production configuration, encoded as ASCII
			AAAA	0x41414141	AAAA
			AAAC	0x41414143	AAAC
			AABA	0x41414241	AABA
			AABB	0x41414242	AABB
			AAB0	0x41414230	AAB0
			ABB0	0x41424230	ABB0
			AAE0	0x41414530	AAE0
			ABE0	0x41424530	ABE0
			AAGB	0x41414742	AAGB
			ABGB	0x41424742	ABGB
			AAG0	0x41414730	AAG0
			ABG0	0x41424730	ABG0



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x41414142				0	1	0	0	0	0	0	1	0	1	0	0	0	0	0	1	0	1	0	0	0	0	0	0	1	0	1	0	0	0	0	1	0		
Id	RW	Field	Value Id	Value	Description																																	

## 13.1.18 INFO.PACKAGE

Address offset: 0x108

Package option

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00002000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	PACKAGE			Package option																														
			QF	0x2000	QFxx - 48-pin QFN																														
			CH	0x2001	CHxx - 7x8 WLCSP 56 balls																														
			CI	0x2002	CIxx - 7x8 WLCSP 56 balls																														
			CK	0x2005	CKxx - 7x8 WLCSP 56 balls with backside coating for light protection																														
			Unspecified	0xFFFFFFFF	Unspecified																														

## 13.1.19 INFO.RAM

Address offset: 0x10C

RAM variant

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000040				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	RAM			RAM variant																														
			K16	0x10	16 kByte RAM																														
			K32	0x20	32 kByte RAM																														
			K64	0x40	64 kByte RAM																														
			Unspecified	0xFFFFFFFF	Unspecified																														

## 13.1.20 INFO.FLASH

Address offset: 0x110

Flash variant

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000200				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																													
A	R	FLASH				Flash variant																													
			K128	0x80		128 kByte FLASH																													
			K256	0x100		256 kByte FLASH																													
			K512	0x200		512 kByte FLASH																													
			Unspecified	0xFFFFFFFF		Unspecified																													

## 13.1.21 TEMP.A0

Address offset: 0x404

Slope definition A0.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000320										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	1	0	0	0	0	0
Id	RW	Field	Value Id										Value										Description																					
A	R	A																					A (slope definition) register.																					

### 13.1.22 TEMP.A1

Address offset: 0x408

Slope definition A1.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																															A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000343										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	0	0	0	1	1
Id	RW	Field	Value Id										Value										Description																					
A	R	A																					A (slope definition) register.																					

### 13.1.23 TEMP.A2

Address offset: 0x40C

Slope definition A2.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x0000035D										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	1	1	0	1
Id	RW	Field	Value										Id	Value										Description																				
A	R	A																						A (slope definition) register.																				

### 13.1.24 TEMP.A3

Address offset: 0x410

Slope definition A3.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000400										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value										Id	Value										Description																				
A	R	A																						A (slope definition) register.																				

### 13.1.25 TEMP.A4

Address offset: 0x414

Slope definition A4.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000452										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0	1	0	1	0	1
Id	RW	Field	Value										Id	Value										Description																				
A	R	A																						A (slope definition) register.																				

### 13.1.26 TEMP.A5

Address offset: 0x418

Slope definition A5.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000037B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	1	1	1	0	1
Id	RW	Field	Value	Id	Value	Description																										
A	R	A				A (slope definition) register.																										

### 13.1.27 TEMP.B0

Address offset: 0x41C

y-intercept B0.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003FCC	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	1	1
Id	RW	Field	Value	Id	Value	Description																										
A	R	B				B (y-intercept)																										

### 13.1.28 TEMP.B1

Address offset: 0x420

y-intercept B1.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003F98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	1	1	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	B				B (y-intercept)																										

### 13.1.29 TEMP.B2

Address offset: 0x424

y-intercept B2.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003F98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	1	1	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	B				B (y-intercept)																										

### 13.1.30 TEMP.B3

Address offset: 0x428

y-intercept B3.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000012	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	B				B (y-intercept)																										

### 13.1.31 TEMP.B4

Address offset: 0x42C

y-intercept B4.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000004D	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1	0	1
Id	RW	Field	Value Id	Value	Description																											
A	R	B			B (y-intercept)																											

### 13.1.32 TEMP.B5

Address offset: 0x430

y-intercept B5.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003E10	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	1	0	0	0
Id	RW	Field	Value Id	Value	Description																											
A	R	B			B (y-intercept)																											

### 13.1.33 TEMP.T0

Address offset: 0x434

Segment end T0.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x000000E2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																											
A	R	T			T (segment end)register.																											

### 13.1.34 TEMP.T1

Address offset: 0x438

Segment end T1.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																											
A	R	T			T (segment end)register.																											

### 13.1.35 TEMP.T2

Address offset: 0x43C

Segment end T2.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000014	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0
Id	RW	Field	Value Id	Value	Description																											
A	R	T			T (segment end)register.																											

### 13.1.36 TEMP.T3

Address offset: 0x440

Segment end T3.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																												A	A	A	A	A	A	A	A	
Reset 0x00000019				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	1
Id	RW	Field	Value Id	Value	Description																															
A	R	T			T (segment end)register.																															

### 13.1.37 TEMP.T4

Address offset: 0x444

Segment end T4.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A	A	A	A	A		
Reset 0x00000050										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0
Id	RW	Field	Value Id										Value										Description																						
A	R	T																					T (segment end)register.																						

### 13.1.38 NFC.TAGHEADER0

Address offset: 0x450

Default header for NFC Tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id									D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0xFFFFFFFF5F									1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	1	1	1	1
Id	RW	Field	Value Id			Value			Description																																
A	R	MFGID							Default Manufacturer ID: Nordic Semiconductor ASA has ICM 0x5F																																
B	R	UD1							Unique identifier byte 1																																
C	R	UD2							Unique identifier byte 2																																
D	R	UD3							Unique identifier byte 3																																

### 13.1.39 NFC.TAGHEADER1

Address offset: 0x454

Default header for NFC Tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	R	UD4			Unique identifier byte 4																														
B	R	UD5			Unique identifier byte 5																														
C	R	UD6			Unique identifier byte 6																														
D	R	UD7			Unique identifier byte 7																														

### 13.1.40 NFC.TAGHEADER2

Address offset: 0x458

Default header for NFC Tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	
Reset 0xFFFFFFFF									1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id			Value			Description																																	
A	R	UD8							Unique identifier byte 8																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D D D D D D D D C C C C C C C B B B B B B B A A A A A A A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
B	R	UD9			Unique identifier byte 9																														
C	R	UD10			Unique identifier byte 10																														
D	R	UD11			Unique identifier byte 11																														

### 13.1.41 NFC.TAGHEADER3

Address offset: 0x45C

Default header for NFC Tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D D D D D D D D C C C C C C C B B B B B B B A A A A A A A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	R	UD12			Unique identifier byte 12																														
B	R	UD13			Unique identifier byte 13																														
C	R	UD14			Unique identifier byte 14																														
D	R	UD15			Unique identifier byte 15																														

## 14 UICR — User information configuration registers

The user information configuration registers (UICRs) are non-volatile memory (NVM) registers for configuring user specific settings.

For information on writing UICR registers, see the [NVMC — Non-volatile memory controller](#) on page 30 and [Memory](#) on page 24 chapters.

### 14.1 Registers

**Table 19: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x10001000	UICR	UICR	User Information Configuration	

**Table 20: Register Overview**

Register	Offset	Description
	0x000	Reserved
	0x004	Reserved
	0x008	Reserved
	0x010	Reserved
<a href="#">NRFFW[0]</a>	0x014	Reserved for Nordic firmware design
<a href="#">NRFFW[1]</a>	0x018	Reserved for Nordic firmware design
<a href="#">NRFFW[2]</a>	0x01C	Reserved for Nordic firmware design
<a href="#">NRFFW[3]</a>	0x020	Reserved for Nordic firmware design
<a href="#">NRFFW[4]</a>	0x024	Reserved for Nordic firmware design
<a href="#">NRFFW[5]</a>	0x028	Reserved for Nordic firmware design
<a href="#">NRFFW[6]</a>	0x02C	Reserved for Nordic firmware design
<a href="#">NRFFW[7]</a>	0x030	Reserved for Nordic firmware design
<a href="#">NRFFW[8]</a>	0x034	Reserved for Nordic firmware design
<a href="#">NRFFW[9]</a>	0x038	Reserved for Nordic firmware design
<a href="#">NRFFW[10]</a>	0x03C	Reserved for Nordic firmware design
<a href="#">NRFFW[11]</a>	0x040	Reserved for Nordic firmware design
<a href="#">NRFFW[12]</a>	0x044	Reserved for Nordic firmware design
<a href="#">NRFFW[13]</a>	0x048	Reserved for Nordic firmware design
<a href="#">NRFFW[14]</a>	0x04C	Reserved for Nordic firmware design
<a href="#">NRFHW[0]</a>	0x050	Reserved for Nordic hardware design
<a href="#">NRFHW[1]</a>	0x054	Reserved for Nordic hardware design
<a href="#">NRFHW[2]</a>	0x058	Reserved for Nordic hardware design
<a href="#">NRFHW[3]</a>	0x05C	Reserved for Nordic hardware design
<a href="#">NRFHW[4]</a>	0x060	Reserved for Nordic hardware design
<a href="#">NRFHW[5]</a>	0x064	Reserved for Nordic hardware design
<a href="#">NRFHW[6]</a>	0x068	Reserved for Nordic hardware design
<a href="#">NRFHW[7]</a>	0x06C	Reserved for Nordic hardware design
<a href="#">NRFHW[8]</a>	0x070	Reserved for Nordic hardware design
<a href="#">NRFHW[9]</a>	0x074	Reserved for Nordic hardware design
<a href="#">NRFHW[10]</a>	0x078	Reserved for Nordic hardware design
<a href="#">NRFHW[11]</a>	0x07C	Reserved for Nordic hardware design
<a href="#">CUSTOMER[0]</a>	0x080	Reserved for customer
<a href="#">CUSTOMER[1]</a>	0x084	Reserved for customer
<a href="#">CUSTOMER[2]</a>	0x088	Reserved for customer
<a href="#">CUSTOMER[3]</a>	0x08C	Reserved for customer
<a href="#">CUSTOMER[4]</a>	0x090	Reserved for customer
<a href="#">CUSTOMER[5]</a>	0x094	Reserved for customer
<a href="#">CUSTOMER[6]</a>	0x098	Reserved for customer

Register	Offset	Description
<i>CUSTOMER[7]</i>	0x09C	Reserved for customer
<i>CUSTOMER[8]</i>	0x0A0	Reserved for customer
<i>CUSTOMER[9]</i>	0x0A4	Reserved for customer
<i>CUSTOMER[10]</i>	0x0A8	Reserved for customer
<i>CUSTOMER[11]</i>	0x0AC	Reserved for customer
<i>CUSTOMER[12]</i>	0x0B0	Reserved for customer
<i>CUSTOMER[13]</i>	0x0B4	Reserved for customer
<i>CUSTOMER[14]</i>	0x0B8	Reserved for customer
<i>CUSTOMER[15]</i>	0x0BC	Reserved for customer
<i>CUSTOMER[16]</i>	0x0C0	Reserved for customer
<i>CUSTOMER[17]</i>	0x0C4	Reserved for customer
<i>CUSTOMER[18]</i>	0x0C8	Reserved for customer
<i>CUSTOMER[19]</i>	0x0CC	Reserved for customer
<i>CUSTOMER[20]</i>	0x0D0	Reserved for customer
<i>CUSTOMER[21]</i>	0x0D4	Reserved for customer
<i>CUSTOMER[22]</i>	0x0D8	Reserved for customer
<i>CUSTOMER[23]</i>	0x0DC	Reserved for customer
<i>CUSTOMER[24]</i>	0x0E0	Reserved for customer
<i>CUSTOMER[25]</i>	0x0E4	Reserved for customer
<i>CUSTOMER[26]</i>	0x0E8	Reserved for customer
<i>CUSTOMER[27]</i>	0x0EC	Reserved for customer
<i>CUSTOMER[28]</i>	0x0F0	Reserved for customer
<i>CUSTOMER[29]</i>	0x0F4	Reserved for customer
<i>CUSTOMER[30]</i>	0x0F8	Reserved for customer
<i>CUSTOMER[31]</i>	0x0FC	Reserved for customer
<i>PSELRESET[0]</i>	0x200	Mapping of the nRESET function (see POWER chapter for details)
<i>PSELRESET[1]</i>	0x204	Mapping of the nRESET function (see POWER chapter for details)
<i>APPROTECT</i>	0x208	Access port protection
<i>NFCPINS</i>	0x20C	Setting of pins dedicated to NFC functionality: NFC antenna or GPIO

### 14.1.1 NRFFW[0]

Address offset: 0x014

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	NRFFW														Reserved for Nordic firmware design																				

### 14.1.2 NRFFW[1]

Address offset: 0x018

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	NRFFW								Reserved for Nordic firmware design																										

### 14.1.3 NRFFW[2]

Address offset: 0x01C

Reserved for Nordic firmware design



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 14.1.4 NRFFW[3]

Address offset: 0x020

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value												Description																		
A	RW	NRFFW																Reserved for Nordic firmware design																		

### 14.1.5 NRFFW[4]

Address offset: 0x024

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	NRFFW														Reserved for Nordic firmware design																				

### 14.1.6 NRFFW[5]

Address offset: 0x028

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFFW								Reserved for Nordic firmware design																										

### 14.1.7 NRFFW[6]

Address offset: 0x02C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																				
A	RW	NRFFW														Reserved for Nordic firmware design																				

### 14.1.8 NRFFW[7]

Address offset: 0x030

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value		Description																													
A	RW	NRFFW					Reserved for Nordic firmware design																													

### 14.1.9 NRFFW[8]

Address offset: 0x034

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

#### 14.1.10 NRFFW[9]

Address offset: 0x038

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value										Description																				
A	RW	NRFFW													Reserved for Nordic firmware design																				

### 14.1.11 NRFFW[10]

Address offset: 0x03C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																											
A	RW	NRFFW							Reserved for Nordic firmware design																											

#### 14.1.12 NRFFW[11]

Address offset: 0x040

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	NRFFW													Reserved for Nordic firmware design																					

### 14.1.13 NRFFW[12]

Address offset: 0x044

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	NRFFW							Reserved for Nordic firmware design																											

#### 14.1.14 NRFFW[13]

Address offset: 0x048

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 14.1.15 NRFFW[14]

Address offset: 0x04C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value												Description																		
A	RW	NRFFW																Reserved for Nordic firmware design																		

### 14.1.16 NRFHW[0]

Address offset: 0x050

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																													
A	RW	NRFHW					Reserved for Nordic hardware design																													

### 14.1.17 NRFHW[1]

Address offset: 0x054

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	NRFHW														Reserved for Nordic hardware design																				

### 14.1.18 NRFHW[2]

Address offset: 0x058

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>		<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	NRFHW								Reserved for Nordic hardware design																										

### 14.1.19 NRFHW[3]

Address offset: 0x05C

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	RW	NRFHW													Reserved for Nordic hardware design																					

### 14.1.20 NRFHW[4]

Address offset: 0x060

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	NRFHW				Reserved for Nordic hardware design																													

### 14.1.21 NRFHW[5]

Address offset: 0x064

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value				Description																											
A	RW	NRFHW							Reserved for Nordic hardware design																											

### 14.1.22 NRFHW[6]

Address offset: 0x068

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	RW	NRFHW									Reserved for Nordic hardware design																									

### 14.1.23 NRFHW[7]

Address offset: 0x06C

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																									
A	RW	NRFHW								Reserved for Nordic hardware design																									

### 14.1.24 NRFHW[8]

Address offset: 0x070

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	NRFHW							Reserved for Nordic hardware design																											

### 14.1.25 NRFHW[9]

Address offset: 0x074

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFHW				Reserved for Nordic hardware design																														

### 14.1.26 NRFHW[10]

Address offset: 0x078

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFHW								Reserved for Nordic hardware design																										

### 14.1.27 NRFHW[11]

Address offset: 0x07C

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																													
A	RW	NRFHW					Reserved for Nordic hardware design																													

### 14.1.28 CUSTOMER[0]

Address offset: 0x080

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 14.1.29 CUSTOMER[1]

Address offset: 0x084

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 14.1.30 CUSTOMER[2]

Address offset: 0x088

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	CUSTOMER							Reserved for customer																										

### 14.1.31 CUSTOMER[3]

Address offset: 0x08C

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value			Description																												
A	RW	CUSTOMER						Reserved for customer																												

### 14.1.32 CUSTOMER[4]

Address offset: 0x090

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.33 CUSTOMER[5]

Address offset: 0x094

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	CUSTOMER													Reserved for customer																					

### 14.1.34 CUSTOMER[6]

Address offset: 0x098

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.35 CUSTOMER[7]

Address offset: 0x09C

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.36 CUSTOMER[8]

Address offset: 0x0A0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.37 CUSTOMER[9]

Address offset: 0x0A4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.38 CUSTOMER[10]

Address offset: 0x0A8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 14.1.39 CUSTOMER[11]

Address offset: 0x0AC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 14.1.40 CUSTOMER[12]

Address offset: 0x0B0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 14.1.41 CUSTOMER[13]

Address offset: 0x0B4

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	CUSTOMER							Reserved for customer																										

### 14.1.42 CUSTOMER[14]

Address offset: 0x0B8

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	CUSTOMER							Reserved for customer																										

### 14.1.43 CUSTOMER[15]

Address offset: 0x0BC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.44 CUSTOMER[16]

Address offset: 0x0C0

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>													<b>Description</b>																	
A	RW	CUSTOMER																Reserved for customer																	

### 14.1.45 CUSTOMER[17]

Address offset: 0x0C4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.46 CUSTOMER[18]

Address offset: 0x0C8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.47 CUSTOMER[19]

Address offset: 0x0CC

Reserved for customer



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.48 CUSTOMER[20]

Address offset: 0x0D0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.49 CUSTOMER[21]

Address offset: 0x0D4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	RW	CUSTOMER									Reserved for customer																									

### 14.1.50 CUSTOMER[22]

Address offset: 0x0D8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value					Description																										
A	RW	CUSTOMER								Reserved for customer																										

### 14.1.51 CUSTOMER[23]

Address offset: 0x0DC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	CUSTOMER													Reserved for customer																					

### 14.1.52 CUSTOMER[24]

Address offset: 0x0E0

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CUSTOMER				Reserved for customer																													

### 14.1.53 CUSTOMER[25]

Address offset: 0x0E4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value				Description																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.54 CUSTOMER[26]

Address offset: 0x0E8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.55 CUSTOMER[27]

Address offset: 0x0EC

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CUSTOMER				Reserved for customer																													

### 14.1.56 CUSTOMER[28]

Address offset: 0x0F0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.57 CUSTOMER[29]

Address offset: 0x0F4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 14.1.58 CUSTOMER[30]

Address offset: 0x0F8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.59 CUSTOMER[31]

Address offset: 0x0FC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 14.1.60 PSELRESET[0]

Address offset: 0x200

Mapping of the nRESET function (see POWER chapter for details)

All PSELRESET registers have to contain the same value for a pin mapping to be valid. If values are not the same, there will be no nRESET function exposed on a GPIO. As a result, the device will always start independently of the levels present on any of the GPIOs.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id					B																																					A	A	A	A	A	A																					
Reset 0xFFFFFFFF					1																																1					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1						
Id	RW	Field	Value	Id	Value																																Description																															
A	RW	PIN			21																																GPIO number P0.n onto which Reset is exposed																															
B	RW	CONNECT																																			Connection																															
			Disconnected		1																																Disconnect																															
			Connected		0																																Connect																															

### 14.1.61 PSELRESET[1]

Address offset: 0x204

Mapping of the nRESET function (see POWER chapter for details)

All PSELRESET registers have to contain the same value for a pin mapping to be valid. If values are not the same, there will be no nRESET function exposed on a GPIO. As a result, the device will always start independently of the levels present on any of the GPIOs.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																										
Id					B																																				A	A	A	A	A	A																
Reset 0xFFFFFFFF					1																																1				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																																																							
A	RW	PIN			21		GPIO number P0.n onto which Reset is exposed																																																							
B	RW	CONNECT					Connection																																																							
			Disconnected		1		Disconnect																																																							
			Connected		0		Connect																																																							

### 14.1.62 APPROTECT

Address offset: 0x208

Access port protection

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PALL				Enable or disable access port protection.																													
			Disabled		0xFF	See <a href="#">Debug and trace</a> on page 73 for more information.																													
			HwDisabled		0x5A	Hardware disable of access port protection for devices where access port protection is controlled by hardware																													
						Hardware disable of access port protection for devices where access port protection is controlled by hardware and software																													
			Enabled		0x00	Enable																													

## 14.1.63 NFCPINS


Address offset: 0x20C

Setting of pins dedicated to NFC functionality: NFC antenna or GPIO

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A		
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PROTECT				Setting of pins dedicated to NFC functionality																																
			Disabled		0	Operation as GPIO pins. Same protection as normal GPIO pins.																																
			NFC		1	Operation as NFC antenna pins. Configures the protection for NFC operation.																																

## 15 Peripheral interface

Peripherals are controlled by the CPU by writing to configuration registers and task registers. Peripheral events are indicated to the CPU by event registers and interrupts if they are configured for a given event.

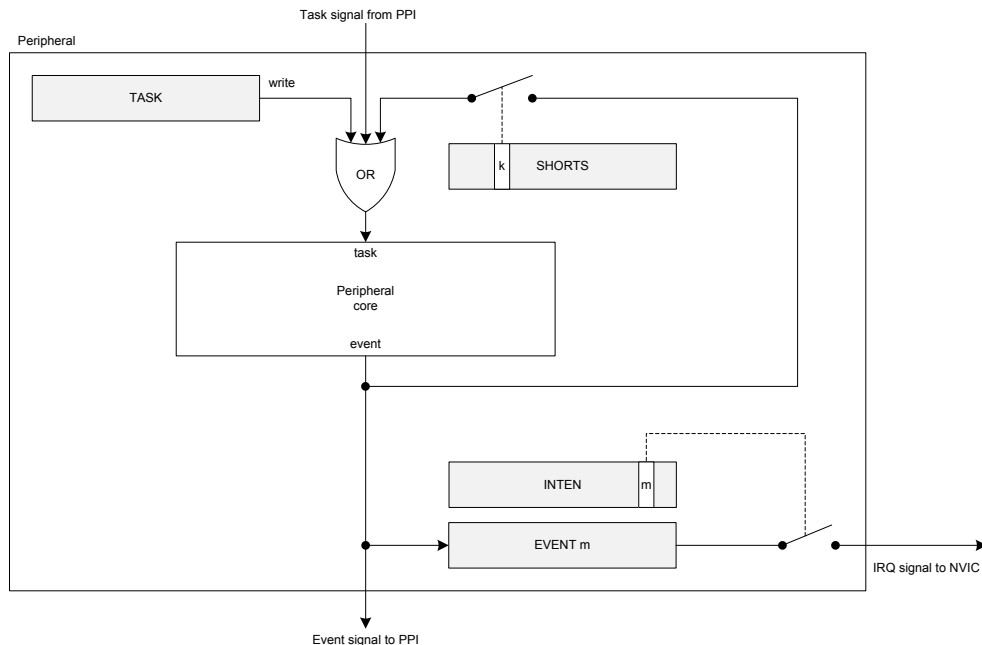

**Figure 10: Tasks, events, shortcuts, and interrupts**

### 15.1 Peripheral ID

Every peripheral is assigned a fixed block of 0x1000 bytes of address space, which is equal to 1024 x 32 bit registers.

See [Instantiation](#) on page 25 for more information about which peripherals are available and where they are located in the address map.

There is a direct relationship between the peripheral ID and base address. For example, a peripheral with base address 0x40000000 is assigned ID=0, a peripheral with base address 0x40001000 is assigned ID=1, and a peripheral with base address 0x4001F000 is assigned ID=31.

Peripherals may share the same ID, which may impose one or more of the following limitations:

- Some peripherals share some registers or other common resources.
- Operation is mutually exclusive. Only one of the peripherals can be used at a time.
- Switching from one peripheral to another must follow a specific pattern (disable the first, then enable the second peripheral).

### 15.2 Peripherals with shared ID

In general, and with the exception of ID 0, peripherals sharing an ID and base address may not be used simultaneously. The user can only enable one at the time on this specific ID.

When switching between two peripherals that share an ID, the user should do the following to prevent unwanted behavior:

- Disable the previously used peripheral

- Remove any PPI connections set up for the peripheral that is being disabled
- Clear all bits in the INTEN register, i.e. INTENCLR = 0xFFFFFFFF.
- Explicitly configure the peripheral that you enable and do not rely on configuration values that may be inherited from the peripheral that was disabled.
- Enable the now configured peripheral.

For each of the rows in the following table, the instance ID listed is shared by the peripherals in the same row.

**Table 21: Peripherals sharing an ID**

Instance						
ID 2 (0x40002000)	UARTE	UART				
-						
ID 3 (0x40003000)	SPIM	SPIS	SPI	TWIM	TWIS	TWI
ID 4 (0x40004000)	SPIM	SPIS	SPI	TWIM	TWIS	TWI
ID 35 (0x40023000)	SPIM	SPIS	SPI			
-						
ID 15 (0x4000F000)	AAR	CCM				
-						
ID 19 (0x40013000)	COMP	LPCOMP				
-						
ID 20 (0x40014000)	SWI	EGU				
ID 21 (0x40015000)	SWI	EGU				
ID 22 (0x40016000)	SWI	EGU				
ID 23 (0x40017000)	SWI	EGU				
ID 24 (0x40018000)	SWI	EGU				
ID 25 (0x40019000)	SWI	EGU				

## 15.3 Peripheral registers

Most peripherals feature an ENABLE register. Unless otherwise specified in the relevant chapter, the peripheral registers (in particular the PSEL registers) must be configured before enabling the peripheral.

Note that the peripheral must be enabled before tasks and events can be used.

## 15.4 Bit set and clear

Registers with multiple single-bit bit fields may implement the "set-and-clear" pattern. This pattern enables firmware to set and clear individual bits in a register without having to perform a read-modify-write operation on the main register.

This pattern is implemented using three consecutive addresses in the register map where the main register is followed by a dedicated SET and CLR register in that order.

The SET register is used to set individual bits in the main register while the CLR register is used to clear individual bits in the main register. Writing a '1' to a bit in the SET or CLR register will set or clear the same bit in the main register respectively. Writing a '0' to a bit in the SET or CLR register has no effect. Reading the SET or CLR registers returns the value of the main register.

**Restriction:** The main register may not be visible and hence not directly accessible in all cases.

## 15.5 Tasks

Tasks are used to trigger actions in a peripheral, for example, to start a particular behavior. A peripheral can implement multiple tasks with each task having a separate register in that peripheral's task register group.

A task is triggered when firmware writes a '1' to the task register or when the peripheral itself or another peripheral toggles the corresponding task signal. See [Figure 10: Tasks, events, shortcuts, and interrupts](#) on page 69.

## 15.6 Events

Events are used to notify peripherals and the CPU about events that have happened, for example, a state change in a peripheral. A peripheral may generate multiple events with each event having a separate register in that peripheral's event register group.

An event is generated when the peripheral itself toggles the corresponding event signal, and the event register is updated to reflect that the event has been generated. See [Figure 10: Tasks, events, shortcuts, and interrupts](#) on page 69. An event register is only cleared when firmware writes a '0' to it.

Events can be generated by the peripheral even when the event register is set to '1'.

## 15.7 Shortcuts

A shortcut is a direct connection between an event and a task within the same peripheral. If a shortcut is enabled, its associated task is automatically triggered when its associated event is generated.

Using a shortcut is the equivalent to making the same connection outside the peripheral and through the PPI. However, the propagation delay through the shortcut is usually shorter than the propagation delay through the PPI.

Shortcuts are predefined, which means their connections cannot be configured by firmware. Each shortcut can be individually enabled or disabled through the shortcut register, one bit per shortcut, giving a maximum of 32 shortcuts for each peripheral.

## 15.8 Interrupts

All peripherals support interrupts. Interrupts are generated by events.

A peripheral only occupies one interrupt, and the interrupt number follows the peripheral ID. For example, the peripheral with ID=4 is connected to interrupt number 4 in the Nested Vectored Interrupt Controller (NVIC).

Using the INTEN, INTENSET and INTENCLR registers, every event generated by a peripheral can be configured to generate that peripheral's interrupt. Multiple events can be enabled to generate interrupts simultaneously. To resolve the correct interrupt source, the event registers in the event group of peripheral registers will indicate the source.

Some peripherals implement only INTENSET and INTENCLR, and the INTEN register is not available on those peripherals. Refer to the individual chapters for details. In all cases, however, reading back the INTENSET or INTENCLR register returns the same information as in INTEN.

Each event implemented in the peripheral is associated with a specific bit position in the INTEN, INTENSET and INTENCLR registers.

The relationship between tasks, events, shortcuts, and interrupts is shown in [Figure 10: Tasks, events, shortcuts, and interrupts](#) on page 69.

### 15.8.1 Interrupt clearing

When clearing an interrupt by writing "0" to an event register, or disabling an interrupt using the INTENCLR register, it can take up to four CPU clock cycles to take effect. This means that an interrupt may reoccur immediately even if a new event has not come, if the program exits an interrupt handler after the interrupt is cleared or disabled, but before four clock cycles have passed.

**Important:** To avoid an interrupt reoccurring before a new event has come, the program should perform a read from one of the peripheral registers, for example, the event register that has been cleared, or the INTENCLR register that has been used to disable the interrupt.


This will cause a one to three-cycle delay and ensure the interrupt is cleared before exiting the interrupt handler. Care should be taken to ensure the compiler does not remove the read operation as an optimization. If the program can guarantee a four-cycle delay after event clear or interrupt disable another way, then a read of a register is not required.





## 16 Debug and trace

The debug and trace system offers a flexible and powerful mechanism for non-intrusive debugging.

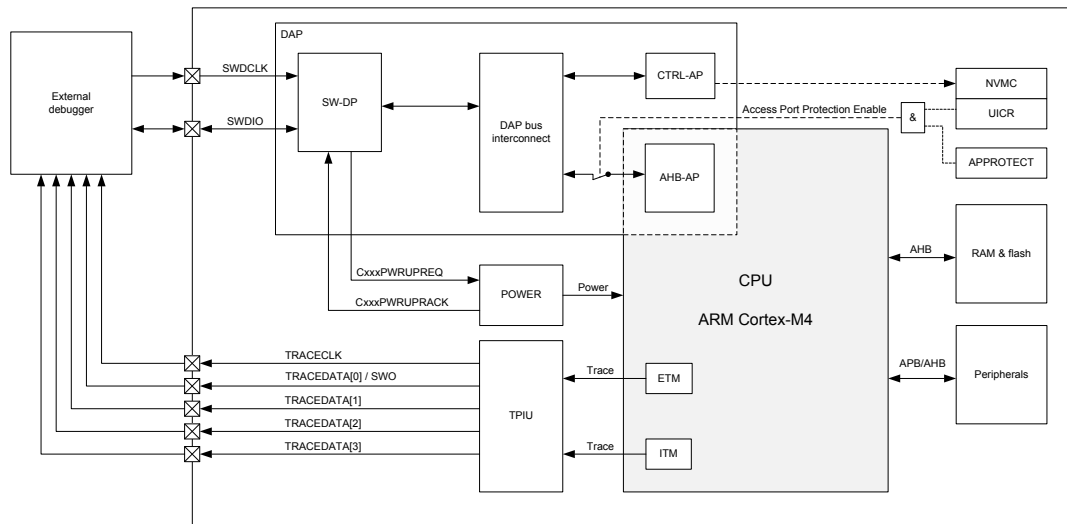

### Figure 11: Debug and trace overview

The main features of the debug and trace system are the following:

- Two-pin serial wire debug (SWD) interface
- Flash patch and breakpoint (FPB) unit that supports the following comparators:
  - Two literal comparators
  - Six instruction comparators
- Data watchpoint and trace (DWT) unit with four comparators
- Instrumentation trace macrocell (ITM)
- Embedded trace macrocell (ETM)
- Trace port interface unit (TPIU)
  - 4-bit parallel trace of ITM and ETM trace data
  - Serial wire output (SWO) trace of ITM data

## 16.1 DAP - Debug access port

An external debugger can access the device via the DAP.

The debug access port (DAP) implements a standard ARM® CoreSight™ serial wire debug port (SW-DP), which implements the serial wire debug protocol (SWD). SWD is a two-pin serial interface, see SWDCLK and SWDIO in [Figure 11: Debug and trace overview](#) on page 73.

In addition to the default access port in CPU (AHB-AP), the DAP includes a custom control access port (CTRL-AP). The CTRL-AP is described in more detail in [CTRL-AP - Control access port](#) on page 76.

**Note:**

- The SWDIO line has an internal pull-up resistor.
- The SWDCLK line has an internal pull-down resistor.

## 16.2 Access port protection

Access port protection blocks the debugger from read and write access to all CPU registers and memory-mapped addresses when enabled.

Access port protection is enabled and disabled differently depending on the build code of the device.

## 16.2 Access port protection controlled by hardware

This information refers to build codes Fxx and earlier.

By default, access port protection is disabled.

Access port protection is enabled by writing [UICR.APPROTECT](#) to Enabled and performing any reset. See [Reset](#) on page 85 for more information.

Access port protection is disabled by issuing an ERASEALL command via CTRL-AP. This command will erase the flash, UICR, and RAM, including [UICR.APPROTECT](#). Erasing UICR will set [UICR.APPROTECT](#) value to Disabled. CTRL-AP is described in more detail in [CTRL-AP - Control access port](#) on page 76.

## 16.2 Access port protection controlled by hardware and software

This information refers to build codes Gxx and later.

By default, access port protection is enabled.

Access port protection is disabled by issuing an ERASEALL command via CTRL-AP. Read [CTRL-AP.APPROTECTSTATUS](#) to ensure that access port protection is disabled, and repeat the ERASEALL command if needed. This command will erase the flash, UICR, and RAM. CTRL-AP is described in more detail in [CTRL-AP - Control access port](#) on page 76. Access port protection will remain disabled until one of the following occurs:


- Pin reset
- Power or brownout reset
- Watchdog reset if not in Debug Interface Mode, see [Debug Interface mode](#) on page 77
- Wake from System OFF if not in Emulated System OFF

To keep access port protection disabled, the following actions must be performed:

- Program [UICR.APPROTECT](#) to HwDisabled. This disables the hardware part of the access port protection scheme after the first reset of any type. The hardware part of the access port protection will stay disabled as long as UICR.APPROTECT is not overwritten.
- Firmware must write [APPROTECT.DISABLE](#) to SwDisable. This disables the software part of the access port protection scheme.

**Note:** Register [APPROTECT.DISABLE](#) is reset after pin reset, power or brownout reset, watchdog reset, or wake from System OFF as mentioned above.

The following figure is an example on how a device with access port protection enabled can be erased, programmed, and configured to allow debugging. Operations sent from debugger as well as registers written by firmware will affect the access port state.

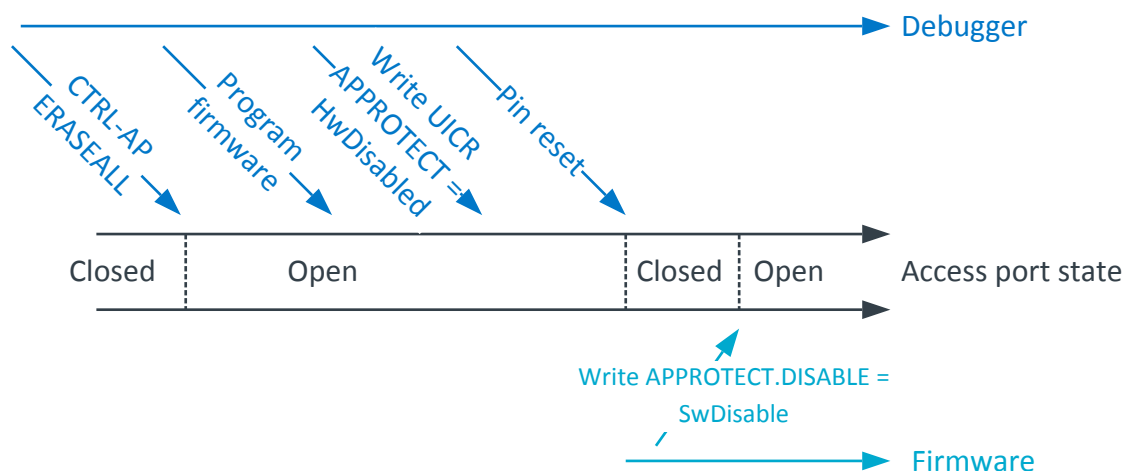

**Figure 12: Access port unlocking**

Access port protection is enabled when the disabling conditions are not present. For additional security, it is recommended to write `Enabled` to `UICR.APPROTECT`, and have firmware write `Force` to `APPROTECT.FORCEPROTECT`. This is illustrated in the following figure.

**Note:** Register `APPROTECT.FORCEPROTECT` is reset after any reset.

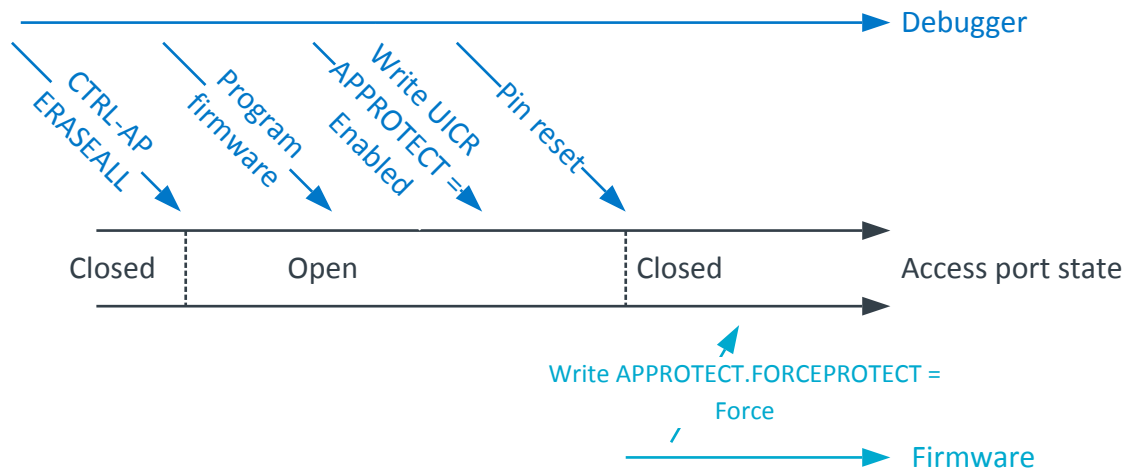


Figure 13: Force access port protection

## 16.2.1 Registers

Table 22: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40000000	APPROTECT	APPROTECT	APPROTECT control	

Table 23: Register Overview

Register	Offset	Description
<code>FORCEPROTECT</code>	0x550	Software force enable APPROTECT mechanism until next reset.  This register can only be written once.
<code>DISABLE</code>	0x558	Software disable APPROTECT mechanism

### FORCEPROTECT

Address offset: 0x550

Software force enable APPROTECT mechanism until next reset.

This register can only be written once.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### DISABLE

Address offset: 0x558

Software disable APPROTECT mechanism

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																												A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value		Description																															
A	RW	DISABLE				Software disable APPROTECT mechanism																															
			SwDisable	0x5A		Software disable APPROTECT mechanism																															

## 16.3 CTRL-AP - Control access port

The control access port (CTRL-AP) is a custom access port that enables control of the device when other access ports in the DAP are disabled by the access port protection.

Access port protection is described in more detail in [Access port protection](#) on page 73.

Control access port has the following features:

- Soft reset - see [Reset](#) on page 85 for more information
- Disabling of access port protection - device control is allowed through CTRL-AP even when all other access ports in DAP are disabled by access port protection

### 16.3.1 Registers

**Table 24: Register Overview**

Register	Offset	Description
<a href="#">RESET</a>	0x000	Soft reset triggered through CTRL-AP
<a href="#">ERASEALL</a>	0x004	Erase all
<a href="#">ERASEALLSTATUS</a>	0x008	Status register for the ERASEALL operation
<a href="#">APPROTECTSTATUS</a>	0x00C	Status register for access port protection
<a href="#">IDR</a>	0x0FC	CTRL-AP identification register, IDR

#### RESET

Address offset: 0x000

Soft reset triggered through CTRL-AP

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	RESET			Soft reset triggered through CTRL-AP. See Reset behavior in POWER chapter for more details.																															
			NoReset	0	Reset is not active																															
			Reset	1	Reset is active. Device is held in reset.																															

#### ERASEALL

Address offset: 0x004

Erase all

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value Id	Value	Description																										
A	W	ERASEALL			Erase all flash and RAM																										
			NoOperation	0	No operation																										
			Erase	1	Erase all flash and RAM																										

#### ERASEALLSTATUS

Address offset: 0x008

### Status register for the ERASEALL operation

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	ERASEALLSTATUS			Status register for the ERASEALL operation																														
			Ready	0	ERASEALL is ready																														
			Busy	1	ERASEALL is busy (on-going)																														

### APPROTECTSTATUS

Address offset: 0x00C

### Status register for access port protection

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	APPROTECTSTATUS			Status register for access port protection																														
			Enabled	0	Access port protection enabled																														
			Disabled	1	Access port protection not enabled																														

### IDR

Address offset: 0x0FC

### CTRL-AP identification register, IDR

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				E E E E D D D C C C C C C C B B B A A A A A A A A																																			
Reset 0x02880000				0 0 0 0 0 0 1 0 1 0 0 0 1 0																																			
Id	RW	Field	Value Id	Value	Description																																		
A	R	APID			AP identification																																		
B	R	CLASS			Access port (AP) class																																		
			NotDefined	0x0	No defined class																																		
			MEMAP	0x8	Memory access port																																		
C	R	JEP106ID			JEDEC JEP106 identity code																																		
D	R	JEP106CONT			JEDEC JEP106 continuation code																																		
E	R	REVISION			Revision																																		

## 16.3.2 Electrical specification

### Control access port

Symbol	Description	Min.	Typ.	Max.	Units
R <sub>pull</sub>	Internal SWDIO and SWDCLK pull up/down resistance	..	..	..	kΩ
f <sub>SWDCLK</sub>	SWDCLK frequency	..	..	..	MHz

## 16.4 Debug Interface mode

Before an external debugger can access either CPU's access port (AHB-AP) or the control access port (CTRL-AP), the debugger must first request the device to power up via CxxxPWRUPREQ in the SWJ-DP.

If the device is in System OFF when power is requested via CxxxPWRUPREQ, the system will wake up and the DIF flag in [RESETREAS](#) on page 88 will be set. The device is in the Debug Interface mode as long as the debugger is requesting power via CxxxPWRUPREQ. Once the debugger stops requesting power via CxxxPWRUPREQ, the device is back in normal mode. Some peripherals behave differently in Debug Interface mode compared to normal mode. These differences are described in more detail in the chapters of the peripherals that are affected.

When a debug session is over, the external debugger must make sure to put the device back into normal mode since the overall power consumption is higher in Debug Interface mode than in normal mode.

For details on how to use the debug capabilities, read the debug documentation of your IDE.

## 16.5 Real-time debug

The nRF52832 supports real-time debugging.

Real-time debugging allows interrupts to execute to completion in real time when breakpoints are set in Thread mode or lower priority interrupts. This enables developers to set breakpoints and single-step through the code without the risk of real-time event-driven threads running at higher priority failing. For example, this enables the device to continue to service the high-priority interrupts of an external controller or sensor without failure or loss of state synchronization while the developer steps through code in a low-priority thread.

## 16.6 Trace

The device supports ETM and ITM trace.

Trace data from the ETM and the ITM is sent to an external debugger via a 4-bit wide parallel trace port interface unit (TPIU), see TRACEDATA[0] through TRACEDATA[3] and TRACECLK in [Figure 11: Debug and trace overview](#) on page 73.

In addition to parallel trace, the TPIU supports serial trace via the serial wire output (SWO) trace protocol. Parallel and serial trace cannot be used at the same time. ETM trace is only supported in Parallel Trace mode, while ITM trace is supported in both Parallel and Serial Trace modes.

For details on how to use the trace capabilities, read the debug documentation of your IDE.

TPIU's trace pins are multiplexed with GPIOs. SWO and TRACEDATA[0] use the same GPIO. See [Pin assignments](#) on page 14 for more information.

Trace speed is configured in register [TRACECONFIG](#) on page 111. The speed of the trace pins depends on the DRIVE setting of the GPIOs that the trace pins are multiplexed with. Only S0S1 and H0H1 drives are suitable for debugging. S0S1 is the default DRIVE setting at reset. If parallel or serial trace port signals are not fast enough with the default settings, all GPIOs in use for tracing should be set to high drive (H0H1). The DRIVE setting for these GPIOs should not be overwritten by firmware during the debugging session.

### 16.6.1 Electrical specification


#### Trace port

Symbol	Description	Min.	Typ.	Max.	Units
T <sub>cyc</sub>	Clock period as defined by Arm in the Timing specifications for Trace Port Physical Interface of the Embedded Trace Macrocell Architecture Specification	62.5		500	ns

## 17 Power and clock management

Power and clock management in nRF52832 is optimized for ultra-low power applications.

The core of the power and clock management system is the Power Management Unit (PMU) illustrated in [Figure 14: Power Management Unit](#) on page 79.

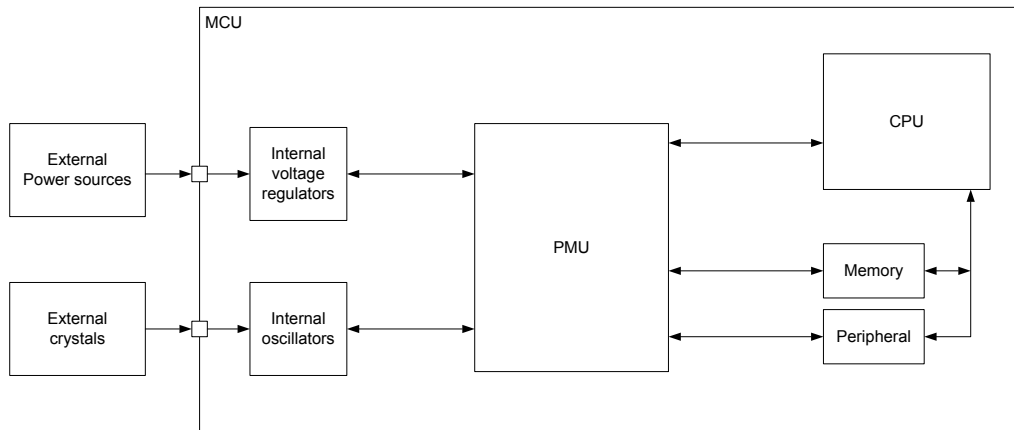

**Figure 14: Power Management Unit**

The user application is not required to actively control power and clock, since the PMU is able to automatically detect which resources are required by the different components in the system at any given time. The PMU will continuously optimize the system based on this information to achieve the lowest power consumption possible without user interaction.

### 17.1 Current consumption scenarios

As the system is being constantly tuned by the PMU, estimating the energy consumption of an application can be challenging if the designer is not able to do measurements on the hardware directly. See [Electrical specification](#) on page 79 for application scenarios showing average current drawn from the VDD supply.

Each scenario specifies a set of active operations and conditions applying to the given scenario. [Table 25: Current consumption scenarios, common conditions](#) on page 79 shows the conditions used for a scenario unless otherwise is stated in the scenario description.

**Table 25: Current consumption scenarios, common conditions**

Condition	Value
VDD	3 V
Temperature	25°C
CPU	WFI/WFE sleep
Peripherals	All idle
Clock	Not running
Regulator	DCDC

#### 17.1.1 Electrical specification

##### Current consumption: Radio

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RADIO_TX0</sub>	0 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO		7.1		mA
I <sub>RADIO_TX1</sub>	-40 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO		4.1		mA
I <sub>RADIO_RX0</sub>	Radio RX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO		6.5		mA

### Current consumption: Radio protocol configurations

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>S0</sub>	CPU running CoreMark from Flash, Radio 0 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Cache enabled		9.2		mA
I <sub>S1</sub>	CPU running CoreMark from Flash, Radio RX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Cache enabled		9.2		mA

### Current consumption: Ultra-low power

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>ON_RAMOFF_EVENT</sub>	System ON, No RAM retention, Wake on any event		1.2		μA
I <sub>ON_RAMON_EVENT</sub>	System ON, Full RAM retention, Wake on any event		1.5		μA
I <sub>ON_RAMOFF_RTC</sub>	System ON, No RAM retention, Wake on RTC		1.9		μA
I <sub>OFF_RAMOFF_RESET</sub>	System OFF, No RAM retention, Wake on reset		0.3		μA
I <sub>OFF_RAMOFF_GPIO</sub>	System OFF, No RAM retention, Wake on GPIO		0.3		μA
I <sub>OFF_RAMOFF_LPCOMP</sub>	System OFF, No RAM retention, Wake on LPCOMP		1.9		μA
I <sub>OFF_RAMOFF_NFC</sub>	System OFF, No RAM retention, Wake on NFC field		0.7		μA
I <sub>OFF_RAMON_RESET</sub>	System OFF, Full 64 kB RAM retention, Wake on reset		0.7		μA



## 18 POWER — Power supply

This device has the following power supply features:

- On-chip LDO and DC/DC regulators
- Global System ON/OFF modes
- Individual RAM section power control for all system modes
- Analog or digital pin wakeup from System OFF
- Supervisor HW to manage power on reset, brownout, and power fail
- Auto-controlled refresh modes for LDO and DC/DC regulators to maximize efficiency
- Automatic switching between LDO and DC/DC regulator based on load to maximize efficiency

**Note:** Two additional external passive components are required to use the DC/DC regulator.


### 18.1 Regulators

The following internal power regulator alternatives are supported:


- Internal LDO regulator
- Internal DC/DC regulator

The LDO is the default regulator.

The DC/DC regulator can be used as an alternative to the LDO regulator and is enabled through the [DCDCEN](#) on page 91 register. Using the DC/DC regulator will reduce current consumption compared to when using the LDO regulator, but the DC/DC regulator requires an external LC filter to be connected, as shown in [Figure 16: DC/DC regulator setup](#) on page 82.

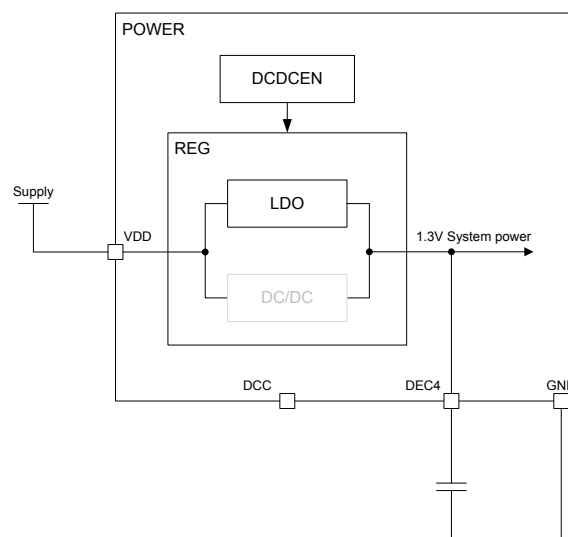

**Figure 15: LDO regulator setup**

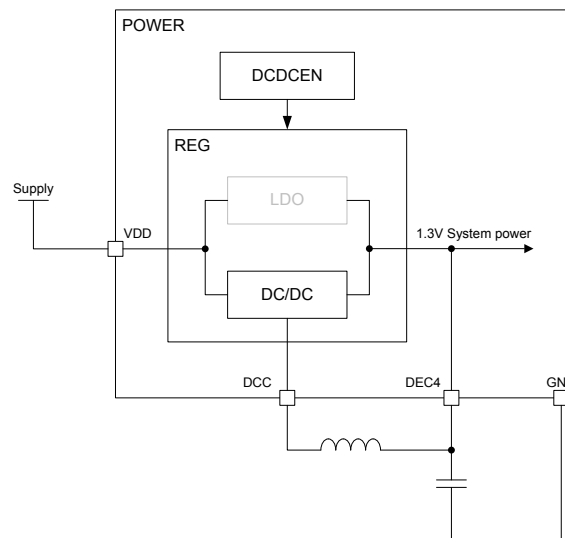

**Figure 16: DC/DC regulator setup**

## 18.2 System OFF mode

System OFF is the deepest power saving mode the system can enter. In this mode, the system's core functionality is powered down and all ongoing tasks are terminated.

The device can be put into System OFF mode using the POWER register interface. When in System OFF mode, the device can be woken up through one of the following signals:

1. The DETECT signal, optionally generated by the GPIO peripheral
2. The ANADETECT signal, optionally generated by the LPCOMP module
3. The SENSE signal, optionally generated by the NFC module to “wake-on-field”
4. A reset

When the system wakes up from System OFF mode, it gets reset. For more details, see [Reset behavior](#) on page 86.

One or more RAM sections can be retained in System OFF mode depending on the settings in the RAM[n].POWER registers.

RAM[n].POWER are retained registers, see [Reset behavior](#). Note that these registers are usually overwritten by the startup code provided with the nRF application examples.

Before entering System OFF mode, the user must make sure that all on-going EasyDMA transactions have been completed. This is usually accomplished by making sure that the EasyDMA enabled peripheral is not active when entering System OFF.

### 18.2.1 Emulated System OFF mode

If the device is in debug interface mode, System OFF will be emulated to secure that all required resources needed for debugging are available during System OFF.

See [Debug and trace](#) on page 73 for more information. Required resources needed for debugging include the following key components: [Debug and trace](#) on page 73, [CLOCK — Clock control](#) on page 104, [POWER — Power supply](#) on page 81, [NVMC — Non-volatile memory controller](#) on page 30, CPU, Flash, and RAM. Since the CPU is kept on in an emulated System OFF mode, it is recommended to add an infinite loop directly after entering System OFF, to prevent the CPU from executing code that normally should not be executed.

## 18.3 System ON mode

System ON is the default state after power-on reset. In System ON, all functional blocks such as the CPU or peripherals, can be in IDLE or RUN mode, depending on the configuration set by the software and the state of the application executing.

Register [RESETREAS](#) on page 88 provides information about the source that caused the wakeup or reset.

The system can switch on and off the appropriate internal power sources, depending on how much power is needed at any given time. The power requirement of a peripheral is directly related to its activity level, and the activity level of a peripheral is usually raised and lowered when specific tasks are triggered or events are generated.

### 18.3.1 Sub power modes

In System ON mode, when both the CPU and all the peripherals are in IDLE mode, the system can reside in one of the two sub power modes.

The sub power modes are:

- Constant latency
- Low power

In constant latency mode the CPU wakeup latency and the PPI task response will be constant and kept at a minimum. This is secured by forcing a set of base resources on while in sleep. The advantage of having a constant and predictable latency will be at the cost of having increased power consumption. The constant latency mode is selected by triggering the CONSTLAT task.


In low power mode the automatic power management system, described in [System ON mode](#) on page 83, ensures the most efficient supply option is chosen to save the most power. The advantage of having the lowest power possible will be at the cost of having varying CPU wakeup latency and PPI task response. The low power mode is selected by triggering the LOWPWR task.

When the system enters System ON mode, it will, by default, reside in the low power sub-power mode.

## 18.4 Power supply supervisor

The power supply supervisor initializes the system at power-on and provides an early warning of impending power failure.

In addition, the power supply supervisor puts the system in a reset state if the supply voltage is too low for safe operation (brownout). The power supply supervisor is illustrated in [Figure 17: Power supply supervisor](#) on page 84.

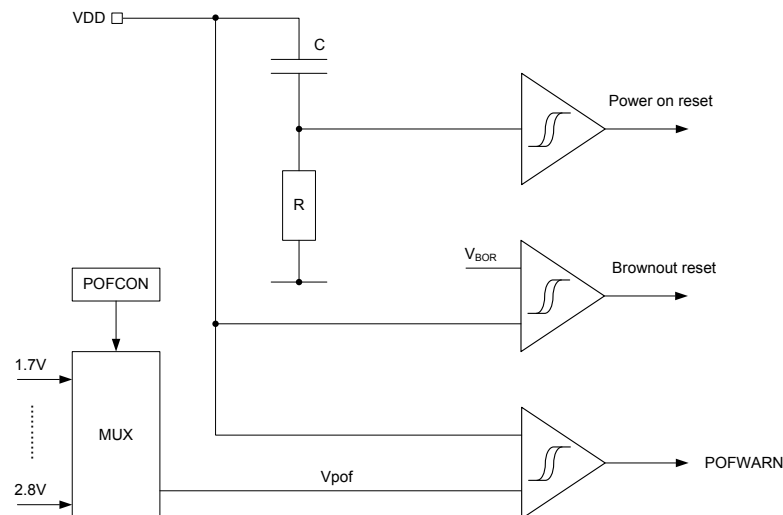


**Figure 17: Power supply supervisor**

### 18.4.1 Power-fail comparator

The power-fail comparator (POF) can provide the CPU with an early warning of impending power failure. It will not reset the system, but give the CPU time to prepare for an orderly power-down.

The comparator features a hysteresis of  $V_{HYST}$ , as illustrated in [Figure 18: Power-fail comparator \(BOR = Brownout reset\)](#) on page 84. The threshold  $V_{POF}$  is set in register [POFCON](#) on page 89. If the POF is enabled and the supply voltage falls below  $V_{POF}$ , the POWARN event will be generated. This event will also be generated if the supply voltage is already below  $V_{POF}$  at the time the POF is enabled, or if  $V_{POF}$  is re-configured to a level above the supply voltage.

If power-fail warning is enabled and the supply voltage is below  $V_{POF}$  the power-fail comparator will prevent the NVMC from performing write operations to the NVM. See [NVMC — Non-volatile memory controller](#) on page 30 for more information about the NVMC.

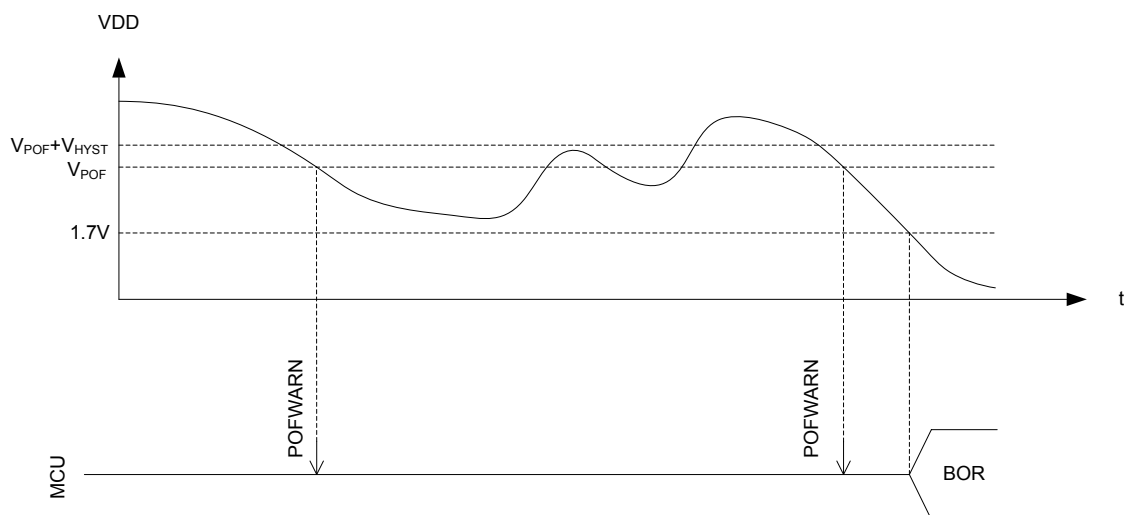

**Figure 18: Power-fail comparator (BOR = Brownout reset)**

To save power, the power-fail comparator is not active in System OFF or in System ON when HFCLK is not running.

## 18.5 RAM sections

RAM section power control is used for retention in System OFF mode and for powering down unused sections in System ON mode.

Each RAM section can power up and down independently in both System ON and System OFF mode. See chapter [Memory](#) on page 24 for more information on RAM sections.

## 18.6 Reset

There are multiple sources that may trigger a reset.

After a reset has occurred, register [RESETREAS](#) can be read to determine which source generated the reset.

### 18.6.1 Power-on reset

The power-on reset generator initializes the system at power-on.

The system is held in reset state until the supply has reached the minimum operating voltage and the internal voltage regulators have started.

A step increase in supply voltage of 300 mV or more, with rise time of 300 ms or less, within the valid supply range, may result in a system reset.

### 18.6.2 Pin reset

A pin reset is generated when the physical reset pin on the device is asserted.

Pin reset is configured via the [PSELRESET\[0\]](#) and [PSELRESET\[1\]](#) registers.

**Note:** Pin reset is not available on all pins.

### 18.6.3 Wakeup from System OFF mode reset

The device is reset when it wakes up from System OFF mode.

The DAP is not reset following a wake up from System OFF mode if the device is in debug interface mode. Refer to chapter [Debug and trace](#) on page 73 for more information.

### 18.6.4 Soft reset

A soft reset is generated when the SYSRESETREQ bit of the Application Interrupt and Reset Control Register (AIRCRR register) in the ARM® core is set.

Refer to [ARM documentation](#) for more details.

A soft reset can also be generated via the [RESET](#) on page 76 register in the CTRL-AP.

### 18.6.5 Watchdog reset

A Watchdog reset is generated when the watchdog times out.

Refer to chapter [WDT — Watchdog timer](#) on page 413 for more information.

### 18.6.6 Brown-out reset

The brown-out reset generator puts the system in reset state if the supply voltage drops below the brownout reset (BOR) threshold.

Refer to section [Power fail comparator](#) on page 102 for more information.

## 18.7 Retained registers

A retained register is a register that will retain its value in System OFF mode and through a reset, depending on reset source. See individual peripheral chapters for information of which registers are retained for the various peripherals.

## 18.8 Reset behavior

Reset source	Reset target CPU	Peripherals	GPIO	Debug <sup>a</sup>	SWJ-DP	RAM	WDT	Retained registers	RESETREAS
CPU lockup <sup>6</sup>	x	x	x						
Soft reset	x	x	x						
Wakeup from System OFF mode reset	x	x		x <sup>7</sup>		x <sup>8</sup>			
Watchdog reset <sup>9</sup>	x	x	x	x		x	x	x	
Pin reset	x	x	x	x		x	x	x	
Brownout reset	x	x	x	x	x	x	x	x	x
Power on reset	x	x	x	x	x	x	x	x	x

**Note:** The RAM is never reset, but depending on reset source, RAM content may be corrupted.

## 18.9 Registers

Table 26: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40000000	POWER	POWER	Power control	

Table 27: Register Overview

Register	Offset	Description	
TASKS_CONSTLAT	0x078	Enable constant latency mode	
TASKS_LOWPWR	0x07C	Enable low power mode (variable latency)	
EVENTS_POFWARN	0x108	Power failure warning	
EVENTS_SLEEPEXIT	0x114	CPU entered WFI/WFE sleep	
EVENTS_SLEEPEXIT	0x118	CPU exited WFI/WFE sleep	
INTENSET	0x304	Enable interrupt	
INTENCLR	0x308	Disable interrupt	
RESETREAS	0x400	Reset reason	
RAMSTATUS	0x428	RAM status register	Deprecated
SYSTEMOFF	0x500	System OFF register	
POFCON	0x510	Power failure comparator configuration	
GPREGRET	0x51C	General purpose retention register	
GPREGRET2	0x520	General purpose retention register	
RAMON	0x524	RAM on/off register (this register is retained)	Deprecated
RAMONB	0x554	RAM on/off register (this register is retained)	Deprecated
DCDCEN	0x578	DC/DC enable register	
RAM[0].POWER	0x900	RAM0 power control register	

<sup>a</sup> All debug components excluding SWJ-DP. See [Debug and trace](#) on page 73 chapter for more information about the different debug components in the system.

<sup>6</sup> Reset from CPU lockup is disabled if the device is in debug interface mode. CPU lockup is not possible in System OFF.

<sup>7</sup> The Debug components will not be reset if the device is in debug interface mode.

<sup>8</sup> RAM is not reset on wakeup from OFF mode, but depending on settings in the RAM register parts, or the whole RAM, may not be retained after the device has entered System OFF mode.

<sup>9</sup> Watchdog reset is not available in System OFF.

Register	Offset	Description
<a href="#">RAM[0].POWERSET</a>	0x904	RAM0 power control set register
<a href="#">RAM[0].POWERCLR</a>	0x908	RAM0 power control clear register
<a href="#">RAM[1].POWER</a>	0x910	RAM1 power control register
<a href="#">RAM[1].POWERSET</a>	0x914	RAM1 power control set register
<a href="#">RAM[1].POWERCLR</a>	0x918	RAM1 power control clear register
<a href="#">RAM[2].POWER</a>	0x920	RAM2 power control register
<a href="#">RAM[2].POWERSET</a>	0x924	RAM2 power control set register
<a href="#">RAM[2].POWERCLR</a>	0x928	RAM2 power control clear register
<a href="#">RAM[3].POWER</a>	0x930	RAM3 power control register
<a href="#">RAM[3].POWERSET</a>	0x934	RAM3 power control set register
<a href="#">RAM[3].POWERCLR</a>	0x938	RAM3 power control clear register
<a href="#">RAM[4].POWER</a>	0x940	RAM4 power control register
<a href="#">RAM[4].POWERSET</a>	0x944	RAM4 power control set register
<a href="#">RAM[4].POWERCLR</a>	0x948	RAM4 power control clear register
<a href="#">RAM[5].POWER</a>	0x950	RAM5 power control register
<a href="#">RAM[5].POWERSET</a>	0x954	RAM5 power control set register
<a href="#">RAM[5].POWERCLR</a>	0x958	RAM5 power control clear register
<a href="#">RAM[6].POWER</a>	0x960	RAM6 power control register
<a href="#">RAM[6].POWERSET</a>	0x964	RAM6 power control set register
<a href="#">RAM[6].POWERCLR</a>	0x968	RAM6 power control clear register
<a href="#">RAM[7].POWER</a>	0x970	RAM7 power control register
<a href="#">RAM[7].POWERSET</a>	0x974	RAM7 power control set register
<a href="#">RAM[7].POWERCLR</a>	0x978	RAM7 power control clear register

## 18.9.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																									
Id																						C		B		A			
Reset 0x00000000				0 0																									
Id	RW	Field	Value Id	Value	Description																								
A	RW	POFWARN			Write '1' to Enable interrupt for POFWARN event																								
					See <a href="#">EVENTS_POFWARN</a>																								
		Set	1		Enable																								
		Disabled	0		Read: Disabled																								
		Enabled	1		Read: Enabled																								
B	RW	SLEEPENTER			Write '1' to Enable interrupt for SLEEPENTER event																								
					See <a href="#">EVENTS_SLEEPENTER</a>																								
		Set	1		Enable																								
		Disabled	0		Read: Disabled																								
		Enabled	1		Read: Enabled																								
C	RW	SLEEPEXIT			Write '1' to Enable interrupt for SLEEPEXIT event																								
					See <a href="#">EVENTS_SLEEPEXIT</a>																								
		Set	1		Enable																								
		Disabled	0		Read: Disabled																								
		Enabled	1		Read: Enabled																								

## 18.9.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	POFWARN			Write '1' to Disable interrupt for POFWARN event																														
					See <a href="#">EVENTS_POFWARN</a>																														
		Clear		1	Disable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
B	RW	SLEEPENTER			Write '1' to Disable interrupt for SLEEPENTER event																														
					See <a href="#">EVENTS_SLEEPENTER</a>																														
		Clear		1	Disable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
C	RW	SLEEPEXIT			Write '1' to Disable interrupt for SLEEPEXIT event																														
					See <a href="#">EVENTS_SLEEPEXIT</a>																														
		Clear		1	Disable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														

### 18.9.3 RESETREAS

Address offset: 0x400

Reset reason

Unless cleared, the RESETREAS register will be cumulative. A field is cleared by writing '1' to it. If none of the reset sources are flagged, this indicates that the chip was reset from the on-chip reset generator, which will indicate a power-on-reset or a brownout reset.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	RESETPIN				Reset from pin-reset detected																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
B	RW	DOG				Reset from watchdog detected																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
C	RW	SREQ				Reset from soft reset detected																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
D	RW	LOCKUP				Reset from CPU lock-up detected																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
E	RW	OFF				Reset due to wake up from System OFF mode when wakeup is triggered from DETECT signal from GPIO																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
F	RW	LPCOMP				Reset due to wake up from System OFF mode when wakeup is triggered from ANADETECT signal from LPCOMP																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															
G	RW	DIF				Reset due to wake up from System OFF mode when wakeup is triggered from entering into debug interface mode																															
			NotDetected		0	Not detected																															
			Detected		1	Detected																															



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				H																G	F	E													D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value												Description																					
H	RW	NFC															Reset due to wake up from System OFF mode by NFC field detect																					
			NotDetected	0													Not detected																					
			Detected	1													Detected																					

## 18.9.4 RAMSTATUS ( Deprecated )

Address offset: 0x428

RAM status register

Since this register is deprecated the following substitutions have been made: RAM block 0 is equivalent to a block comprising RAM0.S0 and RAM1.S0, RAM block 1 is equivalent to a block comprising RAM2.S0 and RAM3.S0, RAM block 2 is equivalent to a block comprising RAM4.S0 and RAM5.S0 and RAM block 3 is equivalent to a block comprising RAM6.S0 and RAM7.S0. A RAM block field will indicate ON as long as any of the RAM sections associated with a block are on.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	RAMBLOCK0				RAM block 0 is on or off/powering up																													
			Off	0		Off																													
			On	1		On																													
B	R	RAMBLOCK1				RAM block 1 is on or off/powering up																													
			Off	0		Off																													
			On	1		On																													
C	R	RAMBLOCK2				RAM block 2 is on or off/powering up																													
			Off	0		Off																													
			On	1		On																													
D	R	RAMBLOCK3				RAM block 3 is on or off/powering up																													
			Off	0		Off																													
			On	1		On																													

## 18.9.5 SYSTEMOFF

Address offset: 0x500

System OFF register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	W	SYSTEMOFF				Enable System OFF mode																													
			Enter	1		Enable System OFF mode																													

## 18.9.6 POFCON

Address offset: 0x510

Power failure comparator configuration

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																												B				B				B				A							
Reset 0x00000000				0																								0				0				0				0				0			
Id	RW	Field	Value	Id	Value																								Description																		
A	RW	POF																											Enable or disable power failure comparator																		
			Disabled	0																									Disable																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				B	B	B	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value																																Description				
			Enabled	1																																Enable				
B	RW	THRESHOLD																																		Power failure comparator threshold setting				
			V17	4																																Set threshold to 1.7 V				
			V18	5																																Set threshold to 1.8 V				
			V19	6																																Set threshold to 1.9 V				
			V20	7																																Set threshold to 2.0 V				
			V21	8																																Set threshold to 2.1 V				
			V22	9																																Set threshold to 2.2 V				
			V23	10																																Set threshold to 2.3 V				
			V24	11																																Set threshold to 2.4 V				
			V25	12																																Set threshold to 2.5 V				
			V26	13																																Set threshold to 2.6 V				
			V27	14																																Set threshold to 2.7 V				
			V28	15																																Set threshold to 2.8 V				

## 18.9.7 GPREGRET

Address offset: 0x51C

General purpose retention register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	GPREGRET						General purpose retention register																											
								This register is a retained register																											

## 18.9.8 GPREGRET2

Address offset: 0x520

General purpose retention register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	GPREGRET						General purpose retention register																											
								This register is a retained register																											

## 18.9.9 RAMON ( Deprecated )

Address offset: 0x524

RAM on/off register (this register is retained)

Since this register is deprecated the following substitutions have been made: RAM block 0 is equivalent to a block comprising RAM0.S0 and RAM0.S1 and RAM block 1 is equivalent to a block comprising RAM1.S0 and RAM1.S1. For new designs it is recommended to use the POWER.RAM-0.POWER and its sibling registers instead.

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			D C B A																														
Reset 0x00000003			0 0																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				D C																B A																		
Reset 0x00000003				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1			
Id	RW	Field	Value Id	Value		Description																																
B	RW	ONRAM1	RAM0On	1		On																																
			RAM1Off	0		Keep RAM block 1 on or off in system ON Mode																																
			RAM1On	1		Off																																
C	RW	OFFRAM0	RAM1On	1		On																																
			RAM0Off	0		Keep retention on RAM block 0 when RAM block is switched off																																
			RAM0On	1		Off																																
D	RW	OFFRAM1	RAM0On	1		On																																
			RAM1Off	0		Keep retention on RAM block 1 when RAM block is switched off																																
			RAM1On	1		Off																																

### 18.9.10 RAMONB ( Deprecated )

Address offset: 0x554

RAM on/off register (this register is retained)

Since this register is deprecated the following substitutions have been made: RAM block 2 is equivalent to a block comprising RAM2.S0 and RAM2.S1 and RAM block 3 is equivalent to a block comprising RAM3.S0 and RAM3.S1. For new designs it is recommended to use the POWER.RAM-0.POWER and its sibling registers instead.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D C																B A															
Reset 0x00000003				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	ONRAM2			Keep RAM block 2 on or off in system ON Mode																														
			RAM2Off	0	Off																														
			RAM2On	1	On																														
B	RW	ONRAM3			Keep RAM block 3 on or off in system ON Mode																														
			RAM3Off	0	Off																														
			RAM3On	1	On																														
C	RW	OFFRAM2			Keep retention on RAM block 2 when RAM block is switched off																														
			RAM2Off	0	Off																														
			RAM2On	1	On																														
D	RW	OFFRAM3			Keep retention on RAM block 3 when RAM block is switched off																														
			RAM3Off	0	Off																														
			RAM3On	1	On																														

### 18.9.11 DCDCEEN

Address offset: 0x578

DC/DC enable register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	DCDCEN																																	
			Disabled	0	Disable																														
			Enabled	1	Enable																														

### 18.9.12 RAM[0].POWER

Address offset: 0x900

RAM0 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																				D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value Id	Value	Description																																
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																																
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																																
					All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																																
			On	1	On																																
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																																
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																																
					All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																																
			On	1	On																																
C	RW	S0RETENTION			Keep retention on RAM section S0 when RAM section is in OFF																																
			Off	0	Off																																
			On	1	On																																
D	RW	S1RETENTION			Keep retention on RAM section S1 when RAM section is in OFF																																
			Off	0	Off																																
			On	1	On																																

### 18.9.13 RAM[0].POWERSET

Address offset: 0x904

RAM0 power control set register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																					D		C														B		A	
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value	Id	Value	Description																																		
A	W	S0POWER				Keep RAM section S0 of RAM0 on or off in System ON mode																																		
			On		1	On																																		
B	W	S1POWER				Keep RAM section S1 of RAM0 on or off in System ON mode																																		
			On		1	On																																		
C	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																																		
			On		1	On																																		
D	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																																		
			On		1	On																																		

### 18.9.14 RAM[0].POWERCLR

Address offset: 0x908

RAM0 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																					D		C													B	A
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value		Description																													
A	W	S0POWER						Keep RAM section S0 of RAM0 on or off in System ON mode																													
				Off		1		Off																													
B	W	S1POWER						Keep RAM section S1 of RAM0 on or off in System ON mode																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D C																B A															
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
C	W	S0RETENTION	Off	1	Off																														
			Off	1	Keep retention on RAM section S0 when RAM section is switched off																														
D	W	S1RETENTION	Off	1	Off																														
			Off	1	Keep retention on RAM section S1 when RAM section is switched off																														

### 18.9.15 RAM[1].POWER

Address offset: 0x910

RAM1 power control register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					D C																B A															
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																														
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																														
						All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																															
			On	1	On																															
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.																														
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																														
						All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																															
			On	1	On																															
C	RW	S0RETENTION				Keep retention on RAM section S0 when RAM section is in OFF																														
			Off	0	Off																															
			On	1	On																															
D	RW	S1RETENTION				Keep retention on RAM section S1 when RAM section is in OFF																														
			Off	0	Off																															
			On	1	On																															

### 18.9.16 RAM[1].POWERSET

Address offset: 0x914

RAM1 power control set register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D C																B A															
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	W	S0POWER	On		1	Keep RAM section S0 of RAM1 on or off in System ON mode																													
B	W	S1POWER	On		1	Keep RAM section S1 of RAM1 on or off in System ON mode																													
C	W	S0RETENTION	On		1	Keep retention on RAM section S0 when RAM section is switched off																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C																B A															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
D	W	S1RETENTION	On	1	On	Keep retention on RAM section S1 when RAM section is switched off																													

### 18.9.17 RAM[1].POWERCLR

Address offset: 0x918

RAM1 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D																C												B		A	
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	W	S0POWER	Off	1	Off	Keep RAM section S0 of RAM1 on or off in System ON mode																													
B	W	S1POWER	Off	1	Off	Keep RAM section S1 of RAM1 on or off in System ON mode																													
C	W	S0RETENTION	Off	1	Off	Keep retention on RAM section S0 when RAM section is switched off																													
D	W	S1RETENTION	Off	1	Off	Keep retention on RAM section S1 when RAM section is switched off																													

### 18.9.18 RAM[2].POWER

Address offset: 0x920

RAM2 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C																B A															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																													
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
			Off	0	Off	All RAM sections will be OFF in System OFF mode.																													
			On	1	On																														
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.																													
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
			Off	0	Off	All RAM sections will be OFF in System OFF mode.																													
			On	1	On																														
C	RW	S0RETENTION				Keep retention on RAM section S0 when RAM section is in OFF																													
			Off	0	Off																														
			On	1	On																														
D	RW	S1RETENTION				Keep retention on RAM section S1 when RAM section is in OFF																													
			Off	0	Off																														
			On	1	On																														

### 18.9.19 RAM[2].POWERSET

Address offset: 0x924

RAM2 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																				D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value Id	Value	Description																																
A	W	S0POWER	On	1	Keep RAM section S0 of RAM2 on or off in System ON mode																																
B	W	S1POWER	On	1	Keep RAM section S1 of RAM2 on or off in System ON mode																																
C	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																
D	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																

### 18.9.20 RAM[2].POWERCLR

Address offset: 0x928

RAM2 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																							D	C											B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM2 on or off in System ON mode																																	
					Off																																	
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM2 on or off in System ON mode																																	
					Off																																	
C	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off																																	
					Off																																	
D	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off																																	
					Off																																	

### 18.9.21 RAM[3].POWER

Address offset: 0x930

RAM3 power control register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					D C																															
Reset 0x0000FFFF					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																															
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																															
					All RAM sections will be OFF in System OFF mode.																															
			Off	0	Off																															
			On	1	On																															
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					D C																								B A							
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION. All RAM sections will be OFF in System OFF mode.																														
						Off		0	Off																											
						On		1	On																											
C	RW	S0RETENTION						Keep retention on RAM section S0 when RAM section is in OFF																												
Off		0						Off																												
On		1						On																												
D	RW	S1RETENTION						Keep retention on RAM section S1 when RAM section is in OFF																												
Off		0						Off																												
On		1						On																												

## 18.9.22 RAM[3].POWERSET

Address offset: 0x934

RAM3 power control set register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				D C																																B A		
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
A	W	S0POWER	On	1	Keep RAM section S0 of RAM3 on or off in System ON mode																																	
B	W	S1POWER	On	1	Keep RAM section S1 of RAM3 on or off in System ON mode																																	
C	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																	
D	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																	

## 18.9.23 RAM[3].POWERCLR

Address offset: 0x938

RAM3 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				D C																																B A		
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value	Id	Value	Description																																
A	W	S0POWER	Off		1	Keep RAM section S0 of RAM3 on or off in System ON mode																																
			Off		1	Off																																
B	W	S1POWER	Off		1	Keep RAM section S1 of RAM3 on or off in System ON mode																																
			Off		1	Off																																
C	W	S0RETENTION	Off		1	Keep retention on RAM section S0 when RAM section is switched off																																
			Off		1	Off																																
D	W	S1RETENTION	Off		1	Keep retention on RAM section S1 when RAM section is switched off																																
			Off		1	Off																																



## 18.9.24 RAM[4].POWER

Address offset: 0x940

RAM4 power control register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																			D C																B A			
Reset 0x0000FFFF					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																																	
			Off	0	Off																																	
			On	1	On																																	
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																																	
			Off	0	Off																																	
			On	1	On																																	
C	RW	S0RETENTION			Keep retention on RAM section S0 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
D	RW	S1RETENTION			Keep retention on RAM section S1 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	

## 18.9.25 RAM[4].POWERSET

Address offset: 0x944

RAM4 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																		D C																B A			
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value Id	Value	Description																																
A	W	S0POWER	On	1	Keep RAM section S0 of RAM4 on or off in System ON mode																																
B	W	S1POWER	On	1	Keep RAM section S1 of RAM4 on or off in System ON mode																																
C	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																
D	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																

## 18.9.26 RAM[4].POWERCLR

Address offset: 0x948

RAM4 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																					D		C													B	A
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																															
A	W	S0POWER	Off	1	1	Keep RAM section S0 of RAM4 on or off in System ON mode																															
			Off			Off																															
B	W	S1POWER	Off	1	1	Keep RAM section S1 of RAM4 on or off in System ON mode																															
			Off			Off																															
C	W	S0RETENTION	Off	1	1	Keep retention on RAM section S0 when RAM section is switched off																															
			Off			Off																															
D	W	S1RETENTION	Off	1	1	Keep retention on RAM section S1 when RAM section is switched off																															
			Off			Off																															

## 18.9.27 RAM[5].POWER

Address offset: 0x950

RAM5 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																			D C														B	A
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																												
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.  All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.  All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
C	RW	S0RETENTION	Off	0	Off																													
			On	1	On																													
D	RW	S1RETENTION	Off	0	Off																													
			On	1	On																													

## 18.9.28 RAM[5].POWERSET

Address offset: 0x954

RAM5 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																				D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value	Id	Value	Description																															
A	W	S0POWER	On	1	1	Keep RAM section S0 of RAM5 on or off in System ON mode																															
B	W	S1POWER	On	1	1	Keep RAM section S1 of RAM5 on or off in System ON mode																															

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																				D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value	Id	Value	Description																															
C	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																															
			On		1	On																															
D	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																															
			On		1	On																															

### 18.9.29 RAM[5].POWERCLR

Address offset: 0x958

RAM5 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																				D		C													B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																														
A	W	S0POWER				Keep RAM section S0 of RAM5 on or off in System ON mode																														
			Off		1	Off																														
B	W	S1POWER				Keep RAM section S1 of RAM5 on or off in System ON mode																														
			Off		1	Off																														
C	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																														
			Off		1	Off																														
D	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																														
			Off		1	Off																														

### 18.9.30 RAM[6].POWER

Address offset: 0x960

RAM6 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				D C														B	A
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																													
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
						All RAM sections will be OFF in System OFF mode.																													
			Off		0	Off																													
			On		1	On																													
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.																													
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
						All RAM sections will be OFF in System OFF mode.																													
			Off		0	Off																													
			On		1	On																													
C	RW	S0RETENTION				Keep retention on RAM section S0 when RAM section is in OFF																													
			Off		0	Off																													
			On		1	On																													
D	RW	S1RETENTION				Keep retention on RAM section S1 when RAM section is in OFF																													
			Off		0	Off																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				D C B A																																
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																
Id	RW	Field	Value	Id	Value																Description															
			On		1																On															

### 18.9.31 RAM[6].POWERSET

Address offset: 0x964

RAM6 power control set register

When read, this register will return the value of the POWER register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																				
Id				D																C												B												A											
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																			
Id	RW	Field	Value	Id	Value	Description																																																	
A	W	S0POWER	On		1	Keep RAM section S0 of RAM6 on or off in System ON mode																																																	
B	W	S1POWER	On		1	Keep RAM section S1 of RAM6 on or off in System ON mode																																																	
C	W	S0RETENTION	On		1	Keep retention on RAM section S0 when RAM section is switched off																																																	
D	W	S1RETENTION	On		1	Keep retention on RAM section S1 when RAM section is switched off																																																	

### 18.9.32 RAM[6].POWERCLR

Address offset: 0x968

RAM6 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM6 on or off in System ON mode																														
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM6 on or off in System ON mode																														
C	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off																														
D	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off																														

### 18.9.33 RAM[7].POWER

Address offset: 0x970

RAM7 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C																B A															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																		D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	Off																														
			B	RW	S1POWER	Off	0	Keep RAM section S1 ON or OFF in System ON mode.																											
						On	1	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION. All RAM sections will be OFF in System OFF mode.																											
			Off	0	Off																														
			On	1	On																														
			C	RW	S0RETENTION	Off	0	Keep retention on RAM section S0 when RAM section is in OFF																											
						On	1	Off																											
			Off	0	Off																														
			On	1	On																														
			D	RW	S1RETENTION	Off	0	Keep retention on RAM section S1 when RAM section is in OFF																											
						On	1	Off																											

### 18.9.34 RAM[7].POWERSET

Address offset: 0x974

RAM7 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																				D C																B A	
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value Id	Value	Description																																
A	W	S0POWER	On	1	Keep RAM section S0 of RAM7 on or off in System ON mode																																
B	W	S1POWER	On	1	Keep RAM section S1 of RAM7 on or off in System ON mode																																
C	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																
D	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																

### 18.9.35 RAM[7].POWERCLR

Address offset: 0x978

RAM7 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																		D C														B A					
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																	
Id	RW	Field	Value	Id	Value	Description																															
A	W	S0POWER				Keep RAM section S0 of RAM7 on or off in System ON mode																															
			Off		1	Off																															
B	W	S1POWER				Keep RAM section S1 of RAM7 on or off in System ON mode																															
			Off		1	Off																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																				D	C																	B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value	Id	Value	Description																																	
C	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																																	
			Off	1		Off																																	
D	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																																	
			Off	1		Off																																	

## 18.10 Electrical specification

### 18.10.1 Current consumption, sleep

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>OFF</sub>	System OFF current, no RAM retention		0.3		μA
I <sub>ON</sub>	System ON base current, no RAM retention		1.2		μA
I <sub>RAM</sub>	Additional RAM retention current per 4 KB RAM section		20		nA

### 18.10.2 Device startup times

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>POR</sub>	Time in Power on Reset after VDD reaches 1.7 V for all supply voltages and temperatures. Dependent on supply rise time. <sup>10</sup>				
t <sub>POR,10us</sub>	VDD rise time 10us		1		ms
t <sub>POR,10ms</sub>	VDD rise time 10ms		9		ms
t <sub>POR,60ms</sub>	VDD rise time 60ms		23		ms
t <sub>PINR</sub>	If a GPIO pin is configured as reset, the maximum time taken to pull up the pin and release reset after power on reset. Dependent on the pin capacitive load (C) <sup>11</sup> : t=5RC, R = 13kOhm				
t <sub>PINR,500nF</sub>	C = 500nF			32.5	ms
t <sub>PINR,10uF</sub>	C = 10uF			650	ms
t <sub>R2ON</sub>	Time from reset to ON (CPU execute)				
t <sub>R2ON,NOTCONF</sub>	If reset pin not configured	t <sub>POR</sub>			ms
t <sub>R2ON,CONF</sub>	If reset pin configured	t <sub>POR</sub> + t <sub>PINR</sub>			ms
t <sub>OFF2ON</sub>	Time from OFF to CPU execute		16.5		μs
t <sub>IDLE2CPU</sub>	Time from IDLE to CPU execute		3.0		μs
t <sub>EVTSET,CL1</sub>	Time from HW event to PPI event in Constant Latency System ON mode		0.0625		μs
t <sub>EVTSET,CL0</sub>	Time from HW event to PPI event in Low Power System ON mode		0.0625		μs

### 18.10.3 Power fail comparator

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>POF</sub>	Current consumption when enabled <sup>12</sup>		<4		μA
V <sub>POF</sub>	Nominal power level warning thresholds (falling supply voltage). Levels are configurable between Min. and Max. in 100mV increments.	1.7		2.8	V
V <sub>POFTOL</sub>	Threshold voltage tolerance		±1	±5	%

<sup>10</sup> A step increase in supply voltage of 300 mV or more, with rise time of 300 ms or less, within the valid supply range, may result in a system reset.

<sup>11</sup> To decrease maximum time a device could hold in reset, a strong external pullup resistor can be used.

<sup>12</sup> To save power, POF will not operate nor consume in System OFF, or while HFCLK is not running, even if left enabled by software


Symbol	Description	Min.	Typ.	Max.	Units
$V_{POFHYST}$	Threshold voltage hysteresis		50		mV
$V_{BOR,OFF}$	Brown out reset voltage range SYSTEM OFF mode	1.2		1.7	V
$V_{BOR,ON}$	Brown out reset voltage range SYSTEM ON mode	1.5		1.7	V

## 19 CLOCK — Clock control

The clock control system can source the system clocks from a range of internal or external high and low frequency oscillators and distribute them to modules based upon a module's individual requirements. Clock distribution is automated and grouped independently by module to limit current consumption in unused branches of the clock tree.

Listed here are the main features for CLOCK:

- 64 MHz on-chip oscillator
- 64 MHz crystal oscillator, using external 32 MHz crystal
- 32.768 kHz +/-250 ppm RC oscillator
- 32.768 kHz crystal oscillator, using external 32.768 kHz crystal
- 32.768 kHz oscillator synthesized from 64 MHz oscillator
- Firmware (FW) override control of oscillator activity for low latency start up
- Automatic oscillator and clock control, and distribution for ultra-low power

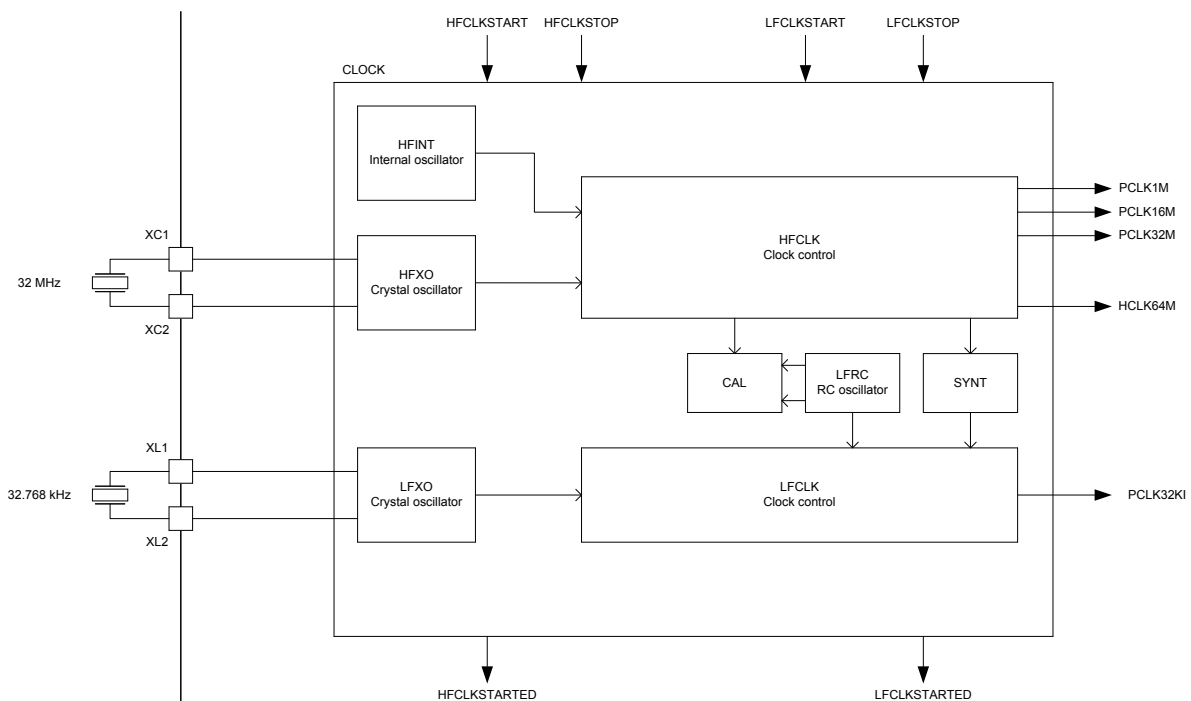

**Figure 19: Clock control**

### 19.1 HFCLK clock controller

The HFCLK clock controller provides the following clocks to the system.

- HCLK64M: 64 MHz CPU clock
- PCLK1M: 1 MHz peripheral clock
- PCLK16M: 16 MHz peripheral clock
- PCLK32M: 32 MHz peripheral clock

The HFCLK controller supports the following high frequency clock (HFCLK) sources:

- 64 MHz internal oscillator (HFINT)
- 64 MHz crystal oscillator (HFXO)

For illustration, see [Figure 19: Clock control](#) on page 104.



When the system requests one or more clocks from the HFCLK controller, the HFCLK controller will automatically provide them. If the system does not request any clocks provided by the HFCLK controller, the controller will enter a power saving mode.

These clocks are only available when the system is in ON mode. When the system enters ON mode, the internal oscillator (HFINT) clock source will automatically start to be able to provide the required HFCLK clock(s) for the system.

The HFINT will be used when HFCLK is requested and HFXO has not been started. The HFXO is started by triggering the HFCLKSTART task and stopped using the HFCLKSTOP task. A HFCLKSTARTED event will be generated when the HFXO has started and its frequency is stable.


The HFXO must be running to use the RADIO, NFC module or the calibration mechanism associated with the 32.768 kHz RC oscillator.

### 19.1.1 64 MHz crystal oscillator (HFXO)

The 64 MHz crystal oscillator (HFXO) is controlled by a 32 MHz external crystal

The crystal oscillator is designed for use with an AT-cut quartz crystal in parallel resonant mode. To achieve correct oscillation frequency, the load capacitance must match the specification in the crystal data sheet.

*Figure 20: Circuit diagram of the 64 MHz crystal oscillator* on page 105 shows how the 32 MHz crystal is connected to the 64 MHz crystal oscillator.

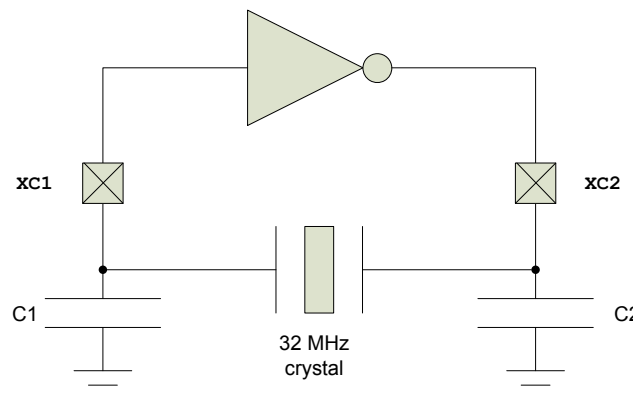

**Figure 20: Circuit diagram of the 64 MHz crystal oscillator**

The load capacitance (CL) is the total capacitance seen by the crystal across its terminals and is given by:

$$CL = \frac{(C1' \cdot C2')}{(C1' + C2')}$$

$$C1' = C1 + C_{pcb1} + C_{pin}$$

$$C2' = C2 + C_{pcb2} + C_{pin}$$

C1 and C2 are ceramic SMD capacitors connected between each crystal terminal and ground. For more information, see [Reference circuitry](#) on page 550.  $C_{pcb1}$  and  $C_{pcb2}$  are stray capacitances on the PCB.  $C_{pin}$  is the pin input capacitance on the XC1 and XC2 pins. See table [64 MHz crystal oscillator \(HFXO\)](#) on page 112. The load capacitors C1 and C2 should have the same value.

For reliable operation, the crystal load capacitance, shunt capacitance, equivalent series resistance, and drive level must comply with the specifications in table [64 MHz crystal oscillator \(HFXO\)](#) on page 112. It is recommended to use a crystal with lower than maximum load capacitance and/or shunt capacitance. A low load capacitance will reduce both start up time and current consumption.

## 19.2 LFCLK clock controller

The system supports several low frequency clock sources.

As illustrated in [Figure 19: Clock control](#) on page 104, the system supports the following low frequency clock sources:

- 32.768 kHz RC oscillator (LFRC)
- 32.768 kHz crystal oscillator (LFXO)
- 32.768 kHz synthesized from HFCLK (LFSYNT)

The LFCLK clock is started by first selecting the preferred clock source in register [LFCLKSRC](#) on page 111 and then triggering the LFCLKSTART task. If the LFXO is selected as the clock source, the LFCLK will initially start running from the 32.768 kHz LFRC while the LFXO is starting up and automatically switch to using the LFXO once this oscillator is running. The LFCLKSTARTED event will be generated when the LFXO has been started.

The LFCLK clock is stopped by triggering the LFCLKSTOP task.

It is not allowed to write to register [LFCLKSRC](#) on page 111 when the LFCLK is running.

A LFCLKSTOP task will stop the LFCLK oscillator. However, the LFCLKSTOP task can only be triggered after the STATE field in register [LFCLKSTAT](#) on page 110 indicates a 'LFCLK running' state.

The LFCLK clock controller and all of the LFCLK clock sources are always switched off when in OFF mode.

### 19.2.1 32.768 kHz RC oscillator (LFRC)

The default source of the low frequency clock (LFCLK) is the 32.768 kHz RC oscillator (LFRC).

The LFRC frequency will be affected by variation in temperature. The LFRC oscillator can be calibrated to improve accuracy by using the HFCLK as a reference oscillator during calibration. See Table [32.768 kHz RC oscillator \(LFRC\)](#) on page 112 for details on the default and calibrated accuracy of the LFRC oscillator.

The LFRC oscillator does not require additional external components.

### 19.2.2 Calibrating the 32.768 kHz RC oscillator


After the 32.768 kHz RC oscillator is started and running, it can be calibrated by triggering the CAL task. In this case, the HFCLK will be temporarily switched on and used as a reference.

A DONE event will be generated when calibration has finished. The calibration mechanism will only work as long as HFCLK is generated from the HFCLK crystal oscillator, it is therefore necessary to explicitly start this crystal oscillator before calibration can be started, see HFCLKSTART task.

### 19.2.3 Calibration timer

The calibration timer can be used to time the calibration interval of the 32.768 kHz RC oscillator.

The calibration timer is started by triggering the CTSTART task and stopped by triggering the CTSTOP task. The calibration timer will always start counting down from the value specified in CTIV and generate a CTTO timeout event when it reaches 0. The Calibration timer will stop by itself when it reaches 0.

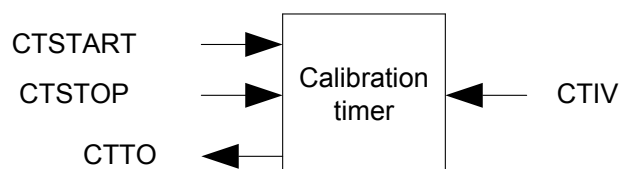

**Figure 21: Calibration timer**

Due to limitations in the calibration timer, only one task related to calibration, that is, CAL, CTSTART and CTSTOP, can be triggered for every period of LFCLK.

### 19.2.4 32.768 kHz crystal oscillator (LFXO)

For higher LFCLK accuracy (when better than +/- 250 ppm accuracy is required), the low frequency crystal oscillator (LFXO) must be used.

The following external clock sources are supported:


- Low swing clock signal applied to the XL1 pin. The XL2 pin shall then be grounded.
- Rail-to-rail clock signal applied to the XL1 pin. The XL2 pin shall then be grounded or left unconnected.

The [LFCLKSRC](#) on page 111 register controls the clock source, and its allowed swing. The truth table for various situations is as follows:

**Table 28: LFCLKSRC configuration depending on clock source**

SRC	EXTERNAL	BYPASS	Comment
0	0	0	Normal operation, RC is source
0	0	1	DO NOT USE
0	1	X	DO NOT USE
1	0	0	Normal XTAL operation
1	1	0	Apply external low swing signal to XL1, ground XL2
1	1	1	Apply external full swing signal to XL1, leave XL2 grounded or unconnected
1	0	1	DO NOT USE
2	0	0	Normal operation, synth is source
2	0	1	DO NOT USE
2	1	X	DO NOT USE

To achieve correct oscillation frequency, the load capacitance must match the specification in the crystal data sheet. [Figure 22: Circuit diagram of the 32.768 kHz crystal oscillator](#) on page 107 shows the LFXO circuitry.

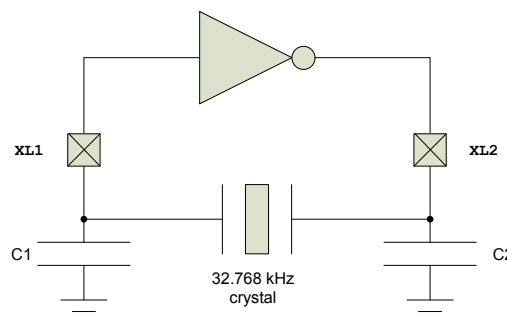

**Figure 22: Circuit diagram of the 32.768 kHz crystal oscillator**

The load capacitance (CL) is the total capacitance seen by the crystal across its terminals and is given by:

$$CL = \frac{(C1' \cdot C2')}{(C1' + C2')}$$

$$C1' = C1 + C_{pcb1} + C_{pin}$$

$$C2' = C2 + C_{pcb2} + C_{pin}$$

C1 and C2 are ceramic SMD capacitors connected between each crystal terminal and ground.  $C_{pcb1}$  and  $C_{pcb2}$  are stray capacitances on the PCB.  $C_{pin}$  is the pin input capacitance on the XC1 and XC2 pins (see [32.768 kHz crystal oscillator \(LFXO\)](#) on page 112). The load capacitors C1 and C2 should have the same value.

For more information, see [Reference circuitry](#) on page 550.

### 19.2.5 32.768 kHz synthesized from HFCLK (LFSYNT)

LFCLK can also be synthesized from the HFCLK clock source. The accuracy of LFCLK will then be the accuracy of the HFCLK.

Using the LFSYNT clock avoids the requirement for a 32.768 kHz crystal, but increases average power consumption as the HFCLK will need to be requested in the system.

## 19.3 Registers

**Table 29: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40000000	CLOCK	CLOCK	Clock control	

**Table 30: Register Overview**

Register	Offset	Description
TASKS_HFCLKSTART	0x000	Start HFCLK crystal oscillator
TASKS_HFCLKSTOP	0x004	Stop HFCLK crystal oscillator
TASKS_LFCLKSTART	0x008	Start LFCLK source
TASKS_LFCLKSTOP	0x00C	Stop LFCLK source
TASKS_CAL	0x010	Start calibration of LFRC oscillator
TASKS_CTSTART	0x014	Start calibration timer
TASKS_CTSTOP	0x018	Stop calibration timer
EVENTS_HFCLKSTARTED	0x100	HFCLK oscillator started
EVENTS_LFCLKSTARTED	0x104	LFCLK started
EVENTS_DONE	0x10C	Calibration of LFCLK RC oscillator complete event
EVENTS_CTTO	0x110	Calibration timer timeout
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
HFCLKRUN	0x408	Status indicating that HFCLKSTART task has been triggered
HFCLKSTAT	0x40C	HFCLK status
LFCLKRUN	0x414	Status indicating that LFCLKSTART task has been triggered
LFCLKSTAT	0x418	LFCLK status
LFCLKSRCCOPY	0x41C	Copy of LFCLKSRC register, set when LFCLKSTART task was triggered
LFCLKSRC	0x518	Clock source for the LFCLK
CTIV	0x538	Calibration timer interval
TRACECONFIG	0x55C	Clocking options for the Trace Port debug interface

### 19.3.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																	D	C		B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	HFCLKSTARTED			Write '1' to Enable interrupt for HFCLKSTARTED event																																	
					See <a href="#">EVENTS_HFCLKSTARTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
B	RW	LFCLKSTARTED			Write '1' to Enable interrupt for LFCLKSTARTED event																																	
					See <a href="#">EVENTS_LFCLKSTARTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
C	RW	DONE				Write '1' to Enable interrupt for DONE event																													
						See <a href="#">EVENTS_DONE</a>																													
		Set	1			Enable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
D	RW	CTTO				Write '1' to Enable interrupt for CTTO event																													
						See <a href="#">EVENTS_CTTO</a>																													
		Set	1			Enable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 19.3.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	HFCLKSTARTED			Write '1' to Disable interrupt for HFCLKSTARTED event																																		
					See <a href="#">EVENTS_HFCLKSTARTED</a>																																		
		Clear		1	Disable																																		
		Disabled		0	Read: Disabled																																		
		Enabled		1	Read: Enabled																																		
B	RW	LFCLKSTARTED			Write '1' to Disable interrupt for LFCLKSTARTED event																																		
					See <a href="#">EVENTS_LFCLKSTARTED</a>																																		
		Clear		1	Disable																																		
		Disabled		0	Read: Disabled																																		
		Enabled		1	Read: Enabled																																		
C	RW	DONE			Write '1' to Disable interrupt for DONE event																																		
					See <a href="#">EVENTS_DONE</a>																																		
		Clear		1	Disable																																		
		Disabled		0	Read: Disabled																																		
		Enabled		1	Read: Enabled																																		
D	RW	CTTO			Write '1' to Disable interrupt for CTTO event																																		
					See <a href="#">EVENTS_CTTO</a>																																		
		Clear		1	Disable																																		
		Disabled		0	Read: Disabled																																		
		Enabled		1	Read: Enabled																																		

### 19.3.3 HFCLKRUN

Address offset: 0x408

Status indicating that HFCLKSTART task has been triggered

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	R	STATUS			HFCLKSTART task triggered or not																															
		NotTriggered		0	Task not triggered																															
		Triggered		1	Task triggered																															

### 19.3.4 HFCLKSTAT

Address offset: 0x40C

HFCLK status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			B												A					
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	R	SRC			Source of HFCLK																															
			RC	0	64 MHz internal oscillator (HFINT)																															
			Xtal	1	64 MHz crystal oscillator (HFXO)																															
B	R	STATE			HFCLK state																															
			NotRunning	0	HFCLK not running																															
			Running	1	HFCLK running																															

### 19.3.5 LFCLKRUN

Address offset: 0x414

Status indicating that LFCLKSTART task has been triggered

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																
Reset 0x00000000	0 0																															
Id	RW	Field	Value Id	Value	Description																											
A	R	STATUS			LFCLKSTART task triggered or not																											
			NotTriggered	0	Task not triggered																											
			Triggered	1	Task triggered																											

### 19.3.6 LFCLKSTAT

Address offset: 0x418

LFCLK status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			B												A		A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	R	SRC			Source of LFCLK																															
			RC	0	32.768 kHz RC oscillator																															
			Xtal	1	32.768 kHz crystal oscillator																															
			Synth	2	32.768 kHz synthesized from HFCLK																															
B	R	STATE			LFCLK state																															
			NotRunning	0	LFCLK not running																															
			Running	1	LFCLK running																															

### 19.3.7 LFCLKSRCCOPY

Address offset: 0x41C

Copy of LFCLKSRC register, set when LFCLKSTART task was triggered

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																
A	R	SRC			Clock source																																
			RC	0	32.768 kHz RC oscillator																																
			Xtal	1	32.768 kHz crystal oscillator																																
			Synth	2	32.768 kHz synthesized from HFCLK																																

### 19.3.8 LFCLKSRC

Address offset: 0x518

Clock source for the LFCLK

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																			C		B														A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	SRC			Clock source																																	
			RC	0	32.768 kHz RC oscillator																																	
			Xtal	1	32.768 kHz crystal oscillator																																	
			Synth	2	32.768 kHz synthesized from HFCLK																																	
B	RW	BYPASS			Enable or disable bypass of LFCLK crystal oscillator with external clock source																																	
			Disabled	0	Disable (use with Xtal or low-swing external source)																																	
			Enabled	1	Enable (use with rail-to-rail external source)																																	
C	RW	EXTERNAL			Enable or disable external source for LFCLK																																	
			Disabled	0	Disable external source (use with Xtal)																																	
			Enabled	1	Enable use of external source instead of Xtal (SRC needs to be set to Xtal)																																	

### 19.3.9 CTIV ( Retained )

Address offset: 0x538

This register is a retained register

Calibration timer interval

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	CTIV			Calibration timer interval in multiple of 0.25 seconds. Range: 0.25 seconds to 31.75 seconds.																														

### 19.3.10 TRACECONFIG

Address offset: 0x55C

Clocking options for the Trace Port debug interface

This register is a retained register. Reset behavior is the same as debug components.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id																		B		B														A		A		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	TRACEPORTSPEED			Speed of Trace Port clock. Note that the TRACECLK pin will output this clock divided by two.																																	
			32MHz	0	32 MHz Trace Port clock (TRACECLK = 16 MHz)																																	
			16MHz	1	16 MHz Trace Port clock (TRACECLK = 8 MHz)																																	
			8MHz	2	8 MHz Trace Port clock (TRACECLK = 4 MHz)																																	
			4MHz	3	4 MHz Trace Port clock (TRACECLK = 2 MHz)																																	
B	RW	TRACEMUX			Pin multiplexing of trace signals.																																	
			GPIO	0	GPIOs multiplexed onto all trace-pins																																	
			Serial	1	SWO multiplexed onto P0.18, GPIO multiplexed onto other trace pins																																	
			Parallel	2	TRACECLK and TRACEDATA multiplexed onto P0.20, P0.18, P0.16, P0.15 and P0.14.																																	

## 19.4 Electrical specification

### 19.4.1 64 MHz internal oscillator (HFINT)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_HFINT}}$	Nominal output frequency		64		MHz
$f_{\text{TOL\_HFINT}}$	Frequency tolerance		$<\pm 1.5$	$<\pm 6$	%
$I_{\text{HFINT}}$	Run current		60		$\mu\text{A}$
$I_{\text{START\_HFINT}}$	Average startup current		$I_{\text{HFINT}}$		$\mu\text{A}$
$t_{\text{START\_HFINT}}$	Startup time		3		us

### 19.4.2 64 MHz crystal oscillator (HFXO)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_HFXO}}$	Nominal output frequency		64		MHz
$f_{\text{XTAL\_HFXO}}$	External crystal frequency		32		MHz
$f_{\text{TOL\_HFXO}}$	Frequency tolerance requirement for 2.4 GHz proprietary radio applications			$\pm 60$	ppm
$f_{\text{TOL\_HFXO\_BLE}}$	Frequency tolerance requirement, Bluetooth low energy applications			$\pm 40$	ppm
$C_{\text{L\_HFXO}}$	Load capacitance			12	pF
$C_{\text{O\_HFXO}}$	Shunt capacitance			7	pF
$R_{\text{S\_HFXO\_7PF}}$	Equivalent series resistance $C_0 = 7$ pF			60	ohm
$R_{\text{S\_HFXO\_5PF}}$	Equivalent series resistance $C_0 = 5$ pF			80	ohm
$R_{\text{S\_HFXO\_3PF}}$	Equivalent series resistance $C_0 = 3$ pF			100	ohm
$P_{\text{D\_HFXO}}$	Drive level			100	uW
$C_{\text{PIN\_HFXO}}$	Input capacitance XC1 and XC2		4		pF
$I_{\text{STBY\_X32M}}$	Core standby current <sup>13</sup>		50		$\mu\text{A}$
$I_{\text{HFXO}}$	Run current		250		$\mu\text{A}$
$I_{\text{START\_HFXO}}$	Average startup current, first 1 ms		0.4		mA
$t_{\text{START\_HFXO}}$	Startup time		0.36		ms

### 19.4.3 32.768 kHz RC oscillator (LFRC)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_LFRC}}$	Nominal frequency		32.768		kHz
$f_{\text{TOL\_LFRC}}$	Frequency tolerance			$\pm 2$	%
$f_{\text{TOL\_CAL\_LFRC}}$	Frequency tolerance for LFRC after calibration <sup>14</sup>			$\pm 250$	ppm
$I_{\text{LFRC}}$	Run current for 32.768 kHz RC oscillator		0.6	1	$\mu\text{A}$
$t_{\text{START\_LFRC}}$	Startup time for 32.768 kHz RC oscillator		600		us

### 19.4.4 32.768 kHz crystal oscillator (LFXO)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_LFXO}}$	Crystal frequency		32.768		kHz
$f_{\text{TOL\_LFXO\_BLE}}$	Frequency tolerance requirement for BLE stack			$\pm 250$	ppm
$f_{\text{TOL\_LFXO\_ANT}}$	Frequency tolerance requirement for ANT stack			$\pm 50$	ppm
$C_{\text{L\_LFXO}}$	Load capacitance			12.5	pF
$C_{\text{O\_LFXO}}$	Shunt capacitance			2	pF
$R_{\text{S\_LFXO}}$	Equivalent series resistance			100	kohm
$P_{\text{D\_LFXO}}$	Drive level			1	uW
$C_{\text{pin}}$	Input capacitance on XL1 and XL2 pads		4		pF
$I_{\text{LFXO}}$	Run current for 32.768 kHz crystal oscillator		0.25		$\mu\text{A}$

<sup>13</sup> Current drawn if HFXO is forced on through for instance using the low latency power mode.

<sup>14</sup> Constant temperature within  $\pm 0.5$  °C and calibration performed at least every 8 seconds



Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{START\_LFXO}}$	Startup time for 32.768 kHz crystal oscillator		0.25		s
$V_{\text{AMP\_IN\_XO\_LOW}}$	Peak to peak amplitude for external low swing clock. Input signal must not swing outside supply rails.	200		1000	mV

### 19.4.5 32.768 kHz synthesized from HFCLK (LFSYNT)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_LFSYNT}}$	Nominal frequency		32.768		kHz
$f_{\text{TOL\_LFSYNT}}$	Frequency tolerance in addition to HFCLK tolerance <sup>15</sup>		8		ppm
$I_{\text{LFSYNT}}$	Run current for synthesized 32.768 kHz		100		μA
$t_{\text{START\_LFSYNT}}$	Startup time for synthesized 32.768 kHz		100		us

<sup>15</sup> Frequency tolerance will be derived from the HFCLK source clock plus the LFSYNT tolerance

## 20 GPIO — General purpose input/output

The general purpose input/output (GPIO) is organized as one port with up to 32 I/Os (dependent on package) enabling access and control of up to 32 pins through one port. Each GPIO can be accessed individually.

GPIO has the following user-configurable features:

- Up to 32 GPIO
- 8 GPIO with Analog channels for SAADC, COMP or LPCOMP inputs
- Configurable output drive strength
- Internal pull-up and pull-down resistors
- Wake-up from high or low level triggers on all pins
- Trigger interrupt on state changes on any pin
- All pins can be used by the PPI task/event system
- One or more GPIO outputs can be controlled through PPI and GPIOTE channels
- All pins can be individually mapped to interface blocks for layout flexibility
- GPIO state changes captured on SENSE signal can be stored by LATCH register

The GPIO Port peripheral implements up to 32 pins, `PIN0` through `PIN31`. Each of these pins can be individually configured in the `PIN_CNF[n]` registers ( $n=0..31$ ).

The following parameters can be configured through these registers:


- Direction
- Drive strength
- Enabling of pull-up and pull-down resistors
- Pin sensing
- Input buffer disconnect
- Analog input (for selected pins)

The `PIN_CNF` registers are retained registers. See [POWER — Power supply](#) on page 81 chapter for more information about retained registers.

### 20.1 Pin configuration

Pins can be individually configured, through the `SENSE` field in the `PIN_CNF[n]` register, to detect either a high level or a low level on their input.

When the correct level is detected on any such configured pin, the sense mechanism will set the `DETECT` signal high. Each pin has a separate `DETECT` signal, and the default behaviour, as defined by the `DETECTMODE` register, is that the `DETECT` signal from all pins in the GPIO Port are combined into a common `DETECT` signal that is routed throughout the system, which then can be utilized by other peripherals, see [Figure 23: GPIO Port and the GPIO pin details](#) on page 115. This mechanism is functional in both ON and OFF mode.

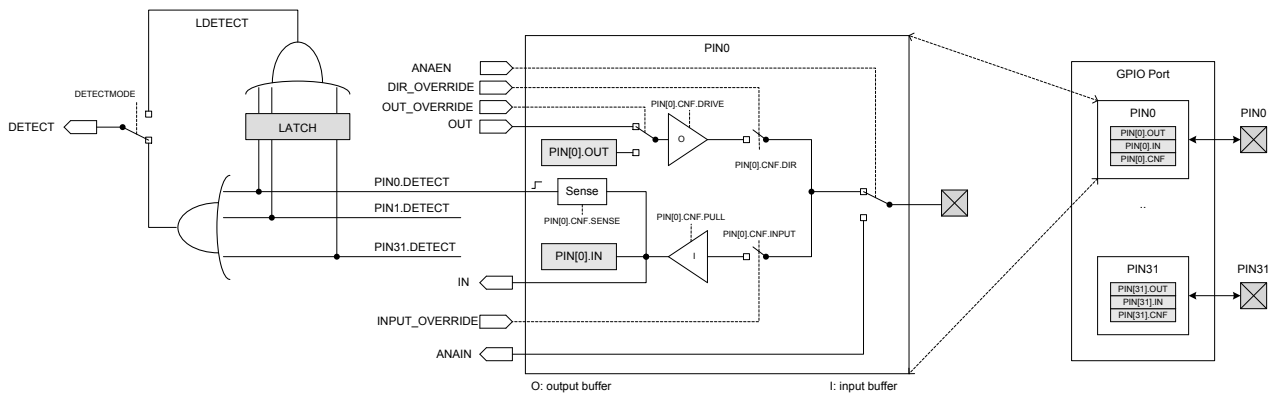

**Figure 23: GPIO Port and the GPIO pin details**

[Figure 23: GPIO Port and the GPIO pin details](#) on page 115 illustrates the GPIO port containing 32 individual pins, where `PIN0` is illustrated in more detail as a reference. All the signals on the left side of the illustration are used by other peripherals in the system, and therefore, are not directly available to the CPU.

Make sure that a pin is in a level that cannot trigger the sense mechanism before enabling it. Detect will go high immediately if the sense condition configured in the `PIN_CNF` registers is met when the sense mechanism is enabled. This will trigger a PORT event if the DETECT signal was low before enabling the sense mechanism. See [GPITE — GPIO tasks and events](#) on page 161.

See the following peripherals for more information about how the DETECT signal is used:

- **POWER:** uses the DETECT signal to exit from System OFF.
- **GPITE:** uses the DETECT signal to generate the PORT event.

When a pin's `PINx.DETECT` signal goes high, a flag will be set in the LATCH register, e.g. when the `PIN0.DETECT` signal goes high, bit 0 in the LATCH register will be set to '1'.

The LATCH register will only be cleared if the CPU explicitly clears it by writing a '1' to the bit that shall be cleared, i.e. the LATCH register will not be affected by a `PINx.DETECT` signal being set low.


If the CPU performs a clear operation on a bit in the LATCH register when the associated `PINx.DETECT` signal is high, the bit in the LATCH register will not be cleared.

The LDETECT signal will be set high when one or more bits in the LATCH register are '1'. The LDETECT signal will be set low when all bits in the LATCH register are successfully cleared to '0'.

If one or more bits in the LATCH register are '1' after the CPU has performed a clear operation on the LATCH registers, a rising edge will be generated on the LDETECT signal, this is illustrated in [Figure 24: DETECT signal behavior](#) on page 116.

**Important:** The CPU can read the LATCH register at any time to check if a SENSE condition has been met on one or more of the the GPIO pins even if that condition is no longer met at the time the CPU queries the LATCH register. This mechanism will work even if the LDETECT signal is not used as the DETECT signal.

The LDETECT signal is by default not connected to the GPIO port's DETECT signal, but via the DETECTMODE register it is possible to change the behaviour of the GPIO port's DETECT signal from the default behaviour described above to instead be derived directly from the LDETECT signal, see [Figure 23: GPIO Port and the GPIO pin details](#) on page 115. [Figure 24: DETECT signal behavior](#) on page 116 illustrates the DETECT signals behaviour for these two alternatives.

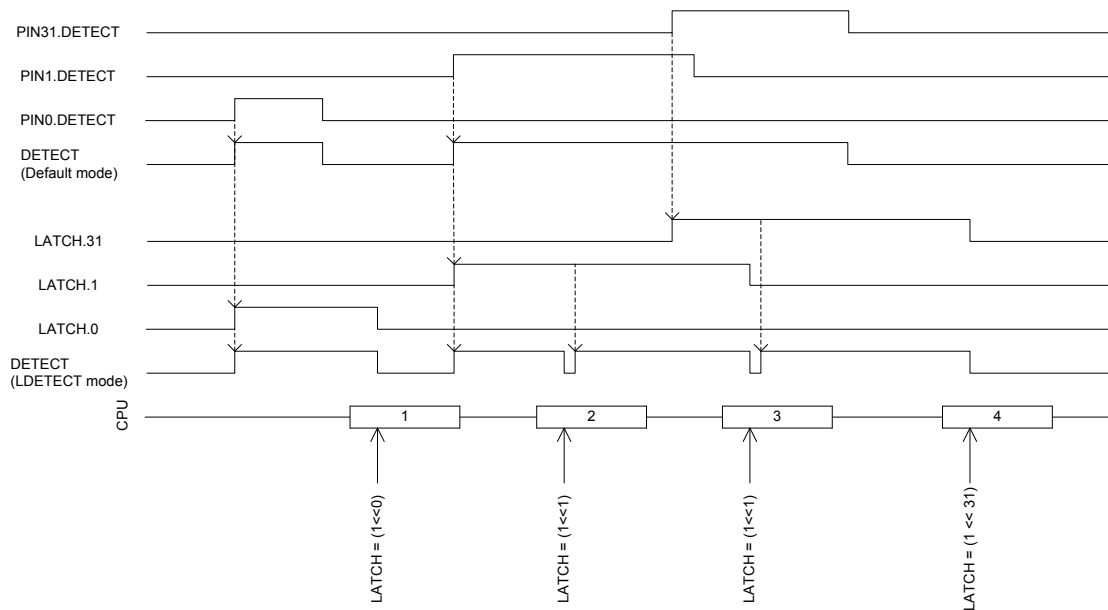

**Figure 24: DETECT signal behavior**

The input buffer of a GPIO pin can be disconnected from the pin to enable power savings when the pin is not used as an input, see [Figure 23: GPIO Port and the GPIO pin details](#) on page 115. Inputs must be connected in order to get a valid input value in the IN register and for the sense mechanism to get access to the pin.

Other peripherals in the system can attach themselves to GPIO pins and override their output value and configuration, or read their analog or digital input value, see [Figure 23: GPIO Port and the GPIO pin details](#) on page 115.

Selected pins also support analog input signals, see ANAIN in [Figure 23: GPIO Port and the GPIO pin details](#) on page 115. The assignment of the analog pins can be found in [Pin assignments](#) on page 14.

**Important:** When a pin is configured as digital input, care has been taken in the nRF52832 design to minimize increased current consumption when the input voltage is between  $V_{IL}$  and  $V_{IH}$ . However, it is a good practice to ensure that the external circuitry does not drive that pin to levels between  $V_{IL}$  and  $V_{IH}$  for a long period of time.

## 20.2 GPIO located near the RADIO

Radio performance parameters, such as sensitivity, may be affected by high frequency digital I/O with large sink/source current close to the radio power supply and antenna pins.

Refer to [Pin assignments](#) on page 14 for recommended usage guidelines to maximize radio performance in an application.

## 20.3 Registers

**Table 31: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x50000000	GPIO	GPIO	General purpose input and output	Deprecated
0x50000000	GPIO	P0	General purpose input and output	

**Table 32: Register Overview**

Register	Offset	Description
<i>OUT</i>	0x504	Write GPIO port
<i>OUTSET</i>	0x508	Set individual bits in GPIO port
<i>OUTCLR</i>	0x50C	Clear individual bits in GPIO port
<i>IN</i>	0x510	Read GPIO port
<i>DIR</i>	0x514	Direction of GPIO pins
<i>DIRSET</i>	0x518	DIR set register
<i>DIRCLR</i>	0x51C	DIR clear register
<i>LATCH</i>	0x520	Latch register indicating what GPIO pins that have met the criteria set in the PIN_CNF[n].SENSE registers
<i>DETECTMODE</i>	0x524	Select between default DETECT signal behaviour and LDETECT mode
<i>PIN_CNF[0]</i>	0x700	Configuration of GPIO pins
<i>PIN_CNF[1]</i>	0x704	Configuration of GPIO pins
<i>PIN_CNF[2]</i>	0x708	Configuration of GPIO pins
<i>PIN_CNF[3]</i>	0x70C	Configuration of GPIO pins
<i>PIN_CNF[4]</i>	0x710	Configuration of GPIO pins
<i>PIN_CNF[5]</i>	0x714	Configuration of GPIO pins
<i>PIN_CNF[6]</i>	0x718	Configuration of GPIO pins
<i>PIN_CNF[7]</i>	0x71C	Configuration of GPIO pins
<i>PIN_CNF[8]</i>	0x720	Configuration of GPIO pins
<i>PIN_CNF[9]</i>	0x724	Configuration of GPIO pins
<i>PIN_CNF[10]</i>	0x728	Configuration of GPIO pins
<i>PIN_CNF[11]</i>	0x72C	Configuration of GPIO pins
<i>PIN_CNF[12]</i>	0x730	Configuration of GPIO pins
<i>PIN_CNF[13]</i>	0x734	Configuration of GPIO pins
<i>PIN_CNF[14]</i>	0x738	Configuration of GPIO pins
<i>PIN_CNF[15]</i>	0x73C	Configuration of GPIO pins
<i>PIN_CNF[16]</i>	0x740	Configuration of GPIO pins
<i>PIN_CNF[17]</i>	0x744	Configuration of GPIO pins
<i>PIN_CNF[18]</i>	0x748	Configuration of GPIO pins
<i>PIN_CNF[19]</i>	0x74C	Configuration of GPIO pins
<i>PIN_CNF[20]</i>	0x750	Configuration of GPIO pins
<i>PIN_CNF[21]</i>	0x754	Configuration of GPIO pins
<i>PIN_CNF[22]</i>	0x758	Configuration of GPIO pins
<i>PIN_CNF[23]</i>	0x75C	Configuration of GPIO pins
<i>PIN_CNF[24]</i>	0x760	Configuration of GPIO pins
<i>PIN_CNF[25]</i>	0x764	Configuration of GPIO pins
<i>PIN_CNF[26]</i>	0x768	Configuration of GPIO pins
<i>PIN_CNF[27]</i>	0x76C	Configuration of GPIO pins
<i>PIN_CNF[28]</i>	0x770	Configuration of GPIO pins
<i>PIN_CNF[29]</i>	0x774	Configuration of GPIO pins
<i>PIN_CNF[30]</i>	0x778	Configuration of GPIO pins
<i>PIN_CNF[31]</i>	0x77C	Configuration of GPIO pins

### 20.3.1 OUT

Address offset: 0x504

Write GPIO port

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN0			Pin 0																														
			Low	0	Pin driver is low																														
			High	1	Pin driver is high																														
B	RW	PIN1			Pin 1																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
C	RW	PIN2			Pin 2																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
D	RW	PIN3			Pin 3																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
E	RW	PIN4			Pin 4																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
F	RW	PIN5			Pin 5																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
G	RW	PIN6			Pin 6																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
H	RW	PIN7			Pin 7																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
I	RW	PIN8			Pin 8																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
J	RW	PIN9			Pin 9																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
K	RW	PIN10			Pin 10																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
L	RW	PIN11			Pin 11																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
M	RW	PIN12			Pin 12																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
N	RW	PIN13			Pin 13																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
O	RW	PIN14			Pin 14																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
P	RW	PIN15			Pin 15																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
Q	RW	PIN16			Pin 16																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
R	RW	PIN17			Pin 17																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
S	RW	PIN18			Pin 18																																	
			Low	0	Pin driver is low																																	
			High	1	Pin driver is high																																	
T	RW	PIN19			Pin 19																																	
			Low	0	Pin driver is low																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					f	e	d	c	b	a	z	y	x	w	v	u	t	s	r	q	p	o	n	m	l	k	j	i	h	g	f	e	d	c	b	a			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
					High	1	Pin driver is high																																
U	RW	PIN20				Pin 20																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
V	RW	PIN21				Pin 21																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
W	RW	PIN22				Pin 22																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
X	RW	PIN23				Pin 23																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
Y	RW	PIN24				Pin 24																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
Z	RW	PIN25				Pin 25																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
a	RW	PIN26				Pin 26																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
b	RW	PIN27				Pin 27																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
c	RW	PIN28				Pin 28																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
d	RW	PIN29				Pin 29																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
e	RW	PIN30				Pin 30																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																
f	RW	PIN31				Pin 31																																	
					Low	0	Pin driver is low																																
					High	1	Pin driver is high																																

### 20.3.2 OUTSET

Address offset: 0x508

## Set individual bits in GPIO port

Read: reads value of OUT register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	PIN0					Pin 0																												
			Low		0		Read: pin driver is low																												
			High		1		Read: pin driver is high																												
			Set		1		Write: writing a '1' sets the pin high; writing a '0' has no effect																												
B	RW	PIN1					Pin 1																												
			Low		0		Read: pin driver is low																												

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
C	RW	PIN2	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 2																																			
			Low	0	Read: pin driver is low																																	
D	RW	PIN3	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 3																																			
			Low	0	Read: pin driver is low																																	
E	RW	PIN4	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 4																																			
			Low	0	Read: pin driver is low																																	
F	RW	PIN5	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 5																																			
			Low	0	Read: pin driver is low																																	
G	RW	PIN6	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 6																																			
			Low	0	Read: pin driver is low																																	
H	RW	PIN7	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 7																																			
			Low	0	Read: pin driver is low																																	
I	RW	PIN8	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 8																																			
			Low	0	Read: pin driver is low																																	
J	RW	PIN9	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 9																																			
			Low	0	Read: pin driver is low																																	
K	RW	PIN10	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 10																																			
			Low	0	Read: pin driver is low																																	
L	RW	PIN11	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 11																																			
			Low	0	Read: pin driver is low																																	
M	RW	PIN12	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 12																																			
			Low	0	Read: pin driver is low																																	
N	RW	PIN13	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 13																																			
			Low	0	Read: pin driver is low																																	
O	RW	PIN14	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 14																																			
			Low	0	Read: pin driver is low																																	
P	RW	PIN15	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Pin 15																																			
			Low	0	Read: pin driver is low																																	



Page 121

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
d	RW	PIN29				Pin 29																													
			Low		0	Read: pin driver is low																													
			High		1	Read: pin driver is high																													
			Set		1	Write: writing a '1' sets the pin high; writing a '0' has no effect																													
e	RW	PIN30				Pin 30																													
			Low		0	Read: pin driver is low																													
			High		1	Read: pin driver is high																													
			Set		1	Write: writing a '1' sets the pin high; writing a '0' has no effect																													
f	RW	PIN31				Pin 31																													
			Low		0	Read: pin driver is low																													
			High		1	Read: pin driver is high																													
			Set		1	Write: writing a '1' sets the pin high; writing a '0' has no effect																													

### 20.3.3 OUTCLR

Address offset: 0x50C

Clear individual bits in GPIO port

Read: reads value of OUT register.

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
A	RW	PIN0				Pin 0																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
B	RW	PIN1				Pin 1																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
C	RW	PIN2				Pin 2																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
D	RW	PIN3				Pin 3																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
E	RW	PIN4				Pin 4																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
F	RW	PIN5				Pin 5																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
G	RW	PIN6				Pin 6																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																				
H	RW	PIN7				Pin 7																																				
			Low		0	Read: pin driver is low																																				
			High		1	Read: pin driver is high																																				

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
I	RW	PIN8	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
J	RW	PIN9	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 9																																
K	RW	PIN10	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 10																																
L	RW	PIN11	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 11																																
M	RW	PIN12	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 12																																
N	RW	PIN13	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 13																																
O	RW	PIN14	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 14																																
P	RW	PIN15	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 15																																
Q	RW	PIN16	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 16																																
R	RW	PIN17	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 17																																
S	RW	PIN18	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 18																																
T	RW	PIN19	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 19																																
U	RW	PIN20	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 20																																
V	RW	PIN21	Low	0	Read: pin driver is low																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
		PIN22	High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
W	RW	PIN22	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
		PIN23	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 23																																
X	RW	PIN23	Low	0	Read: pin driver is low																														
		PIN24	High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 24																																
			Low	0	Read: pin driver is low																														
Y	RW	PIN24	High	1	Read: pin driver is high																														
		PIN25	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 25																																
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
Z	RW	PIN25	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
		PIN26	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 26																																
a	RW	PIN26	Low	0	Read: pin driver is low																														
		PIN27	High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 27																																
			Low	0	Read: pin driver is low																														
b	RW	PIN27	High	1	Read: pin driver is high																														
		PIN28	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 28																																
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
c	RW	PIN28	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
		PIN29	Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 29																																
d	RW	PIN29	Low	0	Read: pin driver is low																														
		PIN30	High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 30																																
			Low	0	Read: pin driver is low																														
e	RW	PIN30	High	1	Read: pin driver is high																														
		PIN31	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Pin 31																																
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
f	RW	PIN31	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														

### 20.3.4 IN

Address offset: 0x510

Read GPIO port

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	R	PINO																																	
			Low	0			Pin input is low																												
			High	1			Pin input is high																												

Page 125

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 20																																
U	R	PIN20																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 21																																
V	R	PIN21																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 22																																
W	R	PIN22																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 23																																
X	R	PIN23																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 24																																
Y	R	PIN24																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 25																																
Z	R	PIN25																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 26																																
a	R	PIN26																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 27																																
b	R	PIN27																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 28																																
c	R	PIN28																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 29																																
d	R	PIN29																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 30																																
e	R	PIN30																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														
			Pin 31																																
f	R	PIN31																																	
			Low	0	Pin input is low																														
			High	1	Pin input is high																														

### 20.3.5 DIR

Address offset: 0x514

### Direction of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value				Description																										
A	RW	PIN0							Pin 0																										
				Input	0				Pin set as input																										
				Output	1				Pin set as output																										
B	RW	PIN1							Pin 1																										
				Input	0				Pin set as input																										
				Output	1				Pin set as output																										
C	RW	PIN2							Pin 2																										

Page 127

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	z	y	x	w	v	u	t	s	r	q	p	o	n	m	l	k	j	i	h	g	f	e	d	c	b	a			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
V	RW	PIN21	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
W	RW	PIN22	Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
X	RW	PIN23	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
Y	RW	PIN24	Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
Z	RW	PIN25	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
a	RW	PIN26	Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
b	RW	PIN27	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
c	RW	PIN28	Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
d	RW	PIN29	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
e	RW	PIN30	Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
f	RW	PIN31	Output	1	Pin set as output																																	
			Input	0	Pin set as input																																	
			Output	1	Pin set as output																																	

### 20.3.6 DIRSET

Address offset: 0x518

DIR set register

Read: reads value of DIR register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	PIN0					Set as output pin 0																												
			Input		0		Read: pin set as input																												
			Output		1		Read: pin set as output																												
			Set		1		Write: writing a '1' sets pin to output; writing a '0' has no effect																												
B	RW	PIN1					Set as output pin 1																												
			Input		0		Read: pin set as input																												
			Output		1		Read: pin set as output																												
			Set		1		Write: writing a '1' sets pin to output; writing a '0' has no effect																												
C	RW	PIN2					Set as output pin 2																												



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
D	RW	PIN3	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 3																																			
E	RW	PIN4	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 4																																			
F	RW	PIN5	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 5																																			
G	RW	PIN6	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 6																																			
H	RW	PIN7	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 7																																			
I	RW	PIN8	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 8																																			
J	RW	PIN9	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 9																																			
K	RW	PIN10	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 10																																			
L	RW	PIN11	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 11																																			
M	RW	PIN12	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 12																																			
N	RW	PIN13	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 13																																			
O	RW	PIN14	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 14																																			
P	RW	PIN15	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 15																																			

Page 130

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
e	RW	PIN30	Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Input	0	Set as output pin 30																																	
			Output	1	Read: pin set as input																																	
			Set	1	Read: pin set as output																																	
f	RW	PIN31	Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Input	0	Set as output pin 31																																	
			Output	1	Read: pin set as input																																	
			Set	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Input	0																																		
			Output	1																																		
			Set	1																																		

### 20.3.7 DIRCLR

Address offset: 0x51C

DIR clear register

Read: reads value of DIR register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	PIN0			Set as input pin 0																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
B	RW	PIN1			Set as input pin 1																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
C	RW	PIN2			Set as input pin 2																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
D	RW	PIN3			Set as input pin 3																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
E	RW	PIN4			Set as input pin 4																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
F	RW	PIN5			Set as input pin 5																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
G	RW	PIN6			Set as input pin 6																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
H	RW	PIN7			Set as input pin 7																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
I	RW	PIN8			Set as input pin 8																																	
			Input	0	Read: pin set as input																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
J	RW	PIN9	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
K	RW	PIN10	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
L	RW	PIN11	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
M	RW	PIN12	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
N	RW	PIN13	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
O	RW	PIN14	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
P	RW	PIN15	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
Q	RW	PIN16	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
R	RW	PIN17	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
S	RW	PIN18	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
T	RW	PIN19	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
U	RW	PIN20	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
V	RW	PIN21	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
W	RW	PIN22			Set as input pin 22																																	

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
X	RW	PIN23				Set as input pin 23																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
Y	RW	PIN24				Set as input pin 24																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
Z	RW	PIN25				Set as input pin 25																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
a	RW	PIN26				Set as input pin 26																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
b	RW	PIN27				Set as input pin 27																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
c	RW	PIN28				Set as input pin 28																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
d	RW	PIN29				Set as input pin 29																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
e	RW	PIN30				Set as input pin 30																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
f	RW	PIN31				Set as input pin 31																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				

## 20.3.8 LATCH

Address offset: 0x520

Latch register indicating what GPIO pins that have met the criteria set in the PIN\_CNF[n].SENSE registers

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PIN0				Status on whether PIN0 has met criteria set in PIN_CNF0.SENSE register. Write '1' to clear.																														
			NotLatched	0	Criteria has not been met																															
			Latched	1	Criteria has been met																															
B	RW	PIN1				Status on whether PIN1 has met criteria set in PIN_CNF1.SENSE register. Write '1' to clear.																														

Page 134

Page 135

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
			Latched		1	Criteria has been met																																
d	RW	PIN29				Status on whether PIN29 has met criteria set in PIN_CNF29.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																
e	RW	PIN30				Status on whether PIN30 has met criteria set in PIN_CNF30.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																
f	RW	PIN31				Status on whether PIN31 has met criteria set in PIN_CNF31.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																

### 20.3.9 DETECTMODE

Address offset: 0x524

Select between default DETECT signal behaviour and LDETECT mode

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																							A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value		Description																																
A	RW	DETECTMODE					Select between default DETECT signal behaviour and LDETECT mode																																
			Default		0		DETECT directly connected to PIN DETECT signals																																
			LDETECT		1		Use the latched LDETECT behaviour																																

### 20.3.10 PIN\_CNF[0]

Address offset: 0x700

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			E	E						D	D	D						C	C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	DIR				Pin direction. Same physical register as DIR register																															
			Input		0	Configure pin as an input pin																															
			Output		1	Configure pin as an output pin																															
B	RW	INPUT				Connect or disconnect input buffer																															
			Connect		0	Connect input buffer																															
			Disconnect		1	Disconnect input buffer																															
C	RW	PULL				Pull configuration																															
			Disabled		0	No pull																															
			Pulldown		1	Pull down on pin																															
			Pullup		3	Pull up on pin																															
D	RW	DRIVE				Drive configuration																															
			S0S1		0	Standard '0', standard '1'																															
			H0S1		1	High drive '0', standard '1'																															
			S0H1		2	Standard '0', high drive '1'																															
			H0H1		3	High drive '0', high 'drive '1'																															
			D0S1		4	Disconnect '0' standard '1' (normally used for wired-or connections)																															



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																		E		E					D			D	D				C	C	B	A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE		Pin sensing mechanism																																		
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 20.3.11 PIN\_CNF[1]

Address offset: 0x704

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id														E		E					D			D	D				C	C	B	A			
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	DIR			Pin direction. Same physical register as DIR register																														
			Input	0	Configure pin as an input pin																														
			Output	1	Configure pin as an output pin																														
B	RW	INPUT			Connect or disconnect input buffer																														
			Connect	0	Connect input buffer																														
			Disconnect	1	Disconnect input buffer																														
C	RW	PULL			Pull configuration																														
			Disabled	0	No pull																														
			Pulldown	1	Pull down on pin																														
			Pullup	3	Pull up on pin																														
D	RW	DRIVE			Drive configuration																														
			S0S1	0	Standard '0', standard '1'																														
			H0S1	1	High drive '0', standard '1'																														
			S0H1	2	Standard '0', high drive '1'																														
			H0H1	3	High drive '0', high 'drive '1''																														
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																														
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.12 PIN\_CNF[2]

Address offset: 0x708

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.13 PIN\_CNF[3]

Address offset: 0x70C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id														E		E					D			D		D					C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	DIR				Pin direction. Same physical register as DIR register																																			
			Input	0	Configure pin as an input pin																																				
			Output	1	Configure pin as an output pin																																				
B	RW	INPUT				Connect or disconnect input buffer																																			
			Connect	0	Connect input buffer																																				
			Disconnect	1	Disconnect input buffer																																				
C	RW	PULL				Pull configuration																																			
			Disabled	0	No pull																																				
			Pulldown	1	Pull down on pin																																				
			Pullup	3	Pull up on pin																																				
D	RW	DRIVE				Drive configuration																																			
			S0S1	0	Standard '0', standard '1'																																				
			H0S1	1	High drive '0', standard '1'																																				
			S0H1	2	Standard '0', high drive '1'																																				
			H0H1	3	High drive '0', high 'drive '1''																																				
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																				

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																		E	E				D	D	D				C	C	B	A			
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.14 PIN\_CNF[4]

Address offset: 0x710

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E		D			D			D			C			C			B			A		
Reset 0x00000002				0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1''																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																				
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 20.3.15 PIN\_CNF[5]

Address offset: 0x714

Configuration of GPIO pins

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				E E D D D C C B A																														
Reset 0x00000002				0 1 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	DIR			Pin direction. Same physical register as DIR register																													
			Input	0	Configure pin as an input pin																													
			Output	1	Configure pin as an output pin																													
B	RW	INPUT			Connect or disconnect input buffer																													
			Connect	0	Connect input buffer																													
			Disconnect	1	Disconnect input buffer																													
C	RW	PULL			Pull configuration																													
			Disabled	0	No pull																													
			Pulldown	1	Pull down on pin																													
			Pullup	3	Pull up on pin																													
D	RW	DRIVE			Drive configuration																													
			S0S1	0	Standard '0', standard '1'																													
			H0S1	1	High drive '0', standard '1'																													
			S0H1	2	Standard '0', high drive '1'																													
			H0H1	3	High drive '0', high 'drive '1''																													
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																													
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																													
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																													
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																
E	RW	SENSE			Pin sensing mechanism																													
			Disabled	0	Disabled																													
			High	2	Sense for high level																													
			Low	3	Sense for low level																													

### 20.3.16 PIN\_CNF[6]

Address offset: 0x718

## Configuration of GPIO pins

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				E E D D D C C B A																														
Reset 0x00000002				0 1 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	DIR				Pin direction. Same physical register as DIR register																												
			Input	0	Configure pin as an input pin																													
			Output	1	Configure pin as an output pin																													
B	RW	INPUT				Connect or disconnect input buffer																												
			Connect	0	Connect input buffer																													
			Disconnect	1	Disconnect input buffer																													
C	RW	PULL				Pull configuration																												
			Disabled	0	No pull																													
			Pulldown	1	Pull down on pin																													
			Pullup	3	Pull up on pin																													
D	RW	DRIVE				Drive configuration																												
			S0S1	0	Standard '0', standard '1'																													
			H0S1	1	High drive '0', standard '1'																													
			S0H1	2	Standard '0', high drive '1'																													
			H0H1	3	High drive '0', high 'drive '1"																													
D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																		E		E					D			D		D					C	C	B	A
Reset 0x00000002				0 1 0																																		
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 20.3.17 PIN\_CNF[7]

Address offset: 0x71C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id														E		E					D			D			D						C			C			B			A			
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																								
A	RW	DIR			Pin direction. Same physical register as DIR register																																								
			Input	0	Configure pin as an input pin																																								
			Output	1	Configure pin as an output pin																																								
B	RW	INPUT			Connect or disconnect input buffer																																								
			Connect	0	Connect input buffer																																								
			Disconnect	1	Disconnect input buffer																																								
C	RW	PULL			Pull configuration																																								
			Disabled	0	No pull																																								
			Pulldown	1	Pull down on pin																																								
			Pullup	3	Pull up on pin																																								
D	RW	DRIVE			Drive configuration																																								
			S0S1	0	Standard '0', standard '1'																																								
			H0S1	1	High drive '0', standard '1'																																								
			S0H1	2	Standard '0', high drive '1'																																								
			H0H1	3	High drive '0', high 'drive '1''																																								
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																								
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																								
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																								
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																											
E	RW	SENSE			Pin sensing mechanism																																								
			Disabled	0	Disabled																																								
			High	2	Sense for high level																																								
			Low	3	Sense for low level																																								

### 20.3.18 PIN\_CNF[8]

Address offset: 0x720

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.19 PIN\_CNF[9]

Address offset: 0x724

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D			D		D					C		C		B		A		
Reset 0x00000002				0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.20 PIN\_CNF[10]

Address offset: 0x728

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
Id														E		E		D			D			D			C			C			B			A												
Reset 0x00000002				0																																			0									
Id	RW	Field	Value Id	Value	Description																																											
A	RW	DIR			Pin direction. Same physical register as DIR register																																											
			Input	0	Configure pin as an input pin																																											
			Output	1	Configure pin as an output pin																																											
B	RW	INPUT			Connect or disconnect input buffer																																											
			Connect	0	Connect input buffer																																											
			Disconnect	1	Disconnect input buffer																																											
C	RW	PULL			Pull configuration																																											
			Disabled	0	No pull																																											
			Pulldown	1	Pull down on pin																																											
			Pullup	3	Pull up on pin																																											
D	RW	DRIVE			Drive configuration																																											
			S0S1	0	Standard '0', standard '1'																																											
			H0S1	1	High drive '0', standard '1'																																											
			S0H1	2	Standard '0', high drive '1'																																											
			H0H1	3	High drive '0', high 'drive '1'																																											
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																											
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																											
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																											
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																														
E	RW	SENSE			Pin sensing mechanism																																											
			Disabled	0	Disabled																																											
			High	2	Sense for high level																																											
			Low	3	Sense for low level																																											

### 20.3.21 PIN\_CNF[11]

Address offset: 0x72C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id														E		E													D		D			D			C		C		B		A				
Reset 0x00000002				0										0		0			0			0										0		0			0			0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																									
A	RW	DIR				Pin direction. Same physical register as DIR register																																									
			Input	0	Configure pin as an input pin																																										
			Output	1	Configure pin as an output pin																																										
B	RW	INPUT				Connect or disconnect input buffer																																									
			Connect	0	Connect input buffer																																										
			Disconnect	1	Disconnect input buffer																																										
C	RW	PULL				Pull configuration																																									
			Disabled	0	No pull																																										
			Pulldown	1	Pull down on pin																																										
			Pullup	3	Pull up on pin																																										
D	RW	DRIVE				Drive configuration																																									
			S0S1	0	Standard '0', standard '1'																																										
			H0S1	1	High drive '0', standard '1'																																										
			S0H1	2	Standard '0', high drive '1'																																										
			H0H1	3	High drive '0', high 'drive '1''																																										
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																										
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE				Pin sensing mechanism																																									
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 20.3.22 PIN\_CNF[12]

Address offset: 0x730

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D		D		D				C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.23 PIN\_CNF[13]

Address offset: 0x734

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
Id														E		E		D			D			D			C			C			B			A												
Reset 0x00000002				0																																			0									
Id	RW	Field	Value Id	Value	Description																																											
A	RW	DIR			Pin direction. Same physical register as DIR register																																											
			Input	0	Configure pin as an input pin																																											
			Output	1	Configure pin as an output pin																																											
B	RW	INPUT			Connect or disconnect input buffer																																											
			Connect	0	Connect input buffer																																											
			Disconnect	1	Disconnect input buffer																																											
C	RW	PULL			Pull configuration																																											
			Disabled	0	No pull																																											
			Pulldown	1	Pull down on pin																																											
			Pullup	3	Pull up on pin																																											
D	RW	DRIVE			Drive configuration																																											
			S0S1	0	Standard '0', standard '1'																																											
			H0S1	1	High drive '0', standard '1'																																											
			S0H1	2	Standard '0', high drive '1'																																											
			H0H1	3	High drive '0', high 'drive '1''																																											
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																											
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																											
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																											
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																														
E	RW	SENSE			Pin sensing mechanism																																											
			Disabled	0	Disabled																																											
			High	2	Sense for high level																																											
			Low	3	Sense for low level																																											

### 20.3.24 PIN\_CNF[14]

Address offset: 0x738

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id															E		E				D			D	D				C			C	B	A		
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	DIR				Pin direction. Same physical register as DIR register																														
			Input	0	Configure pin as an input pin																															
			Output	1	Configure pin as an output pin																															
B	RW	INPUT				Connect or disconnect input buffer																														
			Connect	0	Connect input buffer																															
			Disconnect	1	Disconnect input buffer																															
C	RW	PULL				Pull configuration																														
			Disabled	0	No pull																															
			Pulldown	1	Pull down on pin																															
			Pullup	3	Pull up on pin																															
D	RW	DRIVE				Drive configuration																														
			S0S1	0	Standard '0', standard '1'																															
			H0S1	1	High drive '0', standard '1'																															
			S0H1	2	Standard '0', high drive '1'																															
			H0H1	3	High drive '0', high 'drive '1''																															
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																															
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																															
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																															
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																															
E	RW	SENSE				Pin sensing mechanism																														
			Disabled	0	Disabled																															
			High	2	Sense for high level																															
			Low	3	Sense for low level																															

### 20.3.25 PIN\_CNF[15]

Address offset: 0x73C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																	E	E				D	D	D				C	C	B	A				
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.26 PIN\_CNF[16]

Address offset: 0x740

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E				D		D		D						C		C		B		A			
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																		
A	RW	DIR			Pin direction. Same physical register as DIR register																																		
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT			Connect or disconnect input buffer																																		
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL			Pull configuration																																		
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE			Drive configuration																																		
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1'																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																					
E	RW	SENSE			Pin sensing mechanism																																		
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.27 PIN\_CNF[17]

Address offset: 0x744

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															E		E					D			D			D						C			C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.28 PIN\_CNF[18]

Address offset: 0x748

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id														E		E					D			D			D			C			C			B			A							
Reset 0x00000002				0										0		0		0		0			0			0			0			0			0			0			1			0		
Id	RW	Field	Value	Id	Value	Description																																								
A	RW	DIR				Pin direction. Same physical register as DIR register																																								
			Input	0	Configure pin as an input pin																																									
			Output	1	Configure pin as an output pin																																									
B	RW	INPUT				Connect or disconnect input buffer																																								
			Connect	0	Connect input buffer																																									
			Disconnect	1	Disconnect input buffer																																									
C	RW	PULL				Pull configuration																																								
			Disabled	0	No pull																																									
			Pulldown	1	Pull down on pin																																									
			Pullup	3	Pull up on pin																																									
D	RW	DRIVE				Drive configuration																																								
			S0S1	0	Standard '0', standard '1'																																									
			H0S1	1	High drive '0', standard '1'																																									
			S0H1	2	Standard '0', high drive '1'																																									
			H0H1	3	High drive '0', high 'drive '1''																																									
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																									

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																
Id																								E	E											D	D	D											C	C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0														
Id	RW	Field	Value	Id	Value	Description																																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																															
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																															
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																															
E	RW	SENSE						Pin sensing mechanism																																												
			Disabled	0	Disabled																																															
			High	2	Sense for high level																																															
			Low	3	Sense for low level																																															

### 20.3.29 PIN\_CNF[19]

Address offset: 0x74C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E		D			D			D			C			C			B			A		
Reset 0x00000002				0 1 0																																		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	DIR				Pin direction. Same physical register as DIR register																																
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT				Connect or disconnect input buffer																																
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL				Pull configuration																																
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE				Drive configuration																																
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1'																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																				
E	RW	SENSE				Pin sensing mechanism																																
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 20.3.30 PIN\_CNF[20]

Address offset: 0x750

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.31 PIN\_CNF[21]

Address offset: 0x754

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D			D		D					C		C		B		A		
Reset 0x00000002				0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.32 PIN\_CNF[22]

Address offset: 0x758

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															E		E		D			D			D			C			C			B			A		
Reset 0x00000002					0 1 0																																		
Id	RW	Field	Value Id	Value	Description																																		
A	RW	DIR			Pin direction. Same physical register as DIR register																																		
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT			Connect or disconnect input buffer																																		
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL			Pull configuration																																		
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE			Drive configuration																																		
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																					
E	RW	SENSE			Pin sensing mechanism																																		
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.33 PIN\_CNF[23]

Address offset: 0x75C

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id															E		E					D			D			D						C			C			B			A		
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0							
Id	RW	Field	Value	Id	Value	Description																																							
A	RW	DIR				Pin direction. Same physical register as DIR register																																							
			Input	0	Configure pin as an input pin																																								
			Output	1	Configure pin as an output pin																																								
B	RW	INPUT				Connect or disconnect input buffer																																							
			Connect	0	Connect input buffer																																								
			Disconnect	1	Disconnect input buffer																																								
C	RW	PULL				Pull configuration																																							
			Disabled	0	No pull																																								
			Pulldown	1	Pull down on pin																																								
			Pullup	3	Pull up on pin																																								
D	RW	DRIVE				Drive configuration																																							
			S0S1	0	Standard '0', standard '1'																																								
			H0S1	1	High drive '0', standard '1'																																								
			S0H1	2	Standard '0', high drive '1'																																								
			H0H1	3	High drive '0', high 'drive '1''																																								
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																								
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																								
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																								
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																								
E	RW	SENSE				Pin sensing mechanism																																							
			Disabled	0	Disabled																																								
			High	2	Sense for high level																																								
			Low	3	Sense for low level																																								

### 20.3.34 PIN\_CNF[24]

Address offset: 0x760

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D			D			D			C			C			B	A		
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		1	0
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.35 PIN\_CNF[25]

Address offset: 0x764

Configuration of GPIO pins

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id																				E		E		D			D		D		C		C		B		A	
Reset 0x00000002				0 1 0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1''																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																				
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 20.3.36 PIN\_CNF[26]

Address offset: 0x768

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id														E		E			D			D			D			C			C			B			A								
Reset 0x00000002				0										0		0			0			0			0			0			0			0			0			1			0		
Id	RW	Field	Value	Id	Value	Description																																							
A	RW	DIR				Pin direction. Same physical register as DIR register																																							
			Input	0	Configure pin as an input pin																																								
			Output	1	Configure pin as an output pin																																								
B	RW	INPUT				Connect or disconnect input buffer																																							
			Connect	0	Connect input buffer																																								
			Disconnect	1	Disconnect input buffer																																								
C	RW	PULL				Pull configuration																																							
			Disabled	0	No pull																																								
			Pulldown	1	Pull down on pin																																								
			Pullup	3	Pull up on pin																																								
D	RW	DRIVE				Drive configuration																																							
			S0S1	0	Standard '0', standard '1'																																								
			H0S1	1	High drive '0', standard '1'																																								
			S0H1	2	Standard '0', high drive '1'																																								
			H0H1	3	High drive '0', high 'drive '1''																																								
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																								
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																								
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																								
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																								
E	RW	SENSE				Pin sensing mechanism																																							
			Disabled	0	Disabled																																								
			High	2	Sense for high level																																								
			Low	3	Sense for low level																																								

### 20.3.37 PIN\_CNF[27]

Address offset: 0x76C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D		D		D				C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.38 PIN\_CNF[28]

Address offset: 0x770

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id															E		E					D			D			D						C			C			B			A					
Reset 0x00000002					0										0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																											
A	RW	DIR			Pin direction. Same physical register as DIR register																																											
			Input	0	Configure pin as an input pin																																											
			Output	1	Configure pin as an output pin																																											
B	RW	INPUT			Connect or disconnect input buffer																																											
			Connect	0	Connect input buffer																																											
			Disconnect	1	Disconnect input buffer																																											
C	RW	PULL			Pull configuration																																											
			Disabled	0	No pull																																											
			Pulldown	1	Pull down on pin																																											
			Pullup	3	Pull up on pin																																											
D	RW	DRIVE			Drive configuration																																											
			S0S1	0	Standard '0', standard '1'																																											
			H0S1	1	High drive '0', standard '1'																																											
			S0H1	2	Standard '0', high drive '1'																																											
			H0H1	3	High drive '0', high 'drive '1'																																											
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																											
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																											
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																											
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																														
E	RW	SENSE			Pin sensing mechanism																																											
			Disabled	0	Disabled																																											
			High	2	Sense for high level																																											
			Low	3	Sense for low level																																											

### 20.3.39 PIN\_CNF[29]

Address offset: 0x774

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															E		E					D			D			D						C			C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 20.3.40 PIN\_CNF[30]

Address offset: 0x778

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				E	E				D	D	D				C	C	B	A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 20.3.41 PIN\_CNF[31]

Address offset: 0x77C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E		D		D		D				C		C		B		A						
Reset 0x00000002				0 1 0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1'																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

## 20.4 Electrical specification

### 20.4.1 GPIO Electrical Specification


Symbol	Description	Min.	Typ.	Max.	Units
V <sub>IH</sub>	Input high voltage	0.7 x VDD		VDD	V

Symbol	Description	Min.	Typ.	Max.	Units
$V_{IL}$	Input low voltage	VSS		$0.3 \times V_{DD}$	V
$V_{OH,SD}$	Output high voltage, standard drive, 0.5 mA, $V_{DD} \geq 1.7$	$V_{DD}-0.4$		VDD	V
$V_{OH,HDH}$	Output high voltage, high drive, 5 mA, $V_{DD} \geq 2.7$ V	$V_{DD}-0.4$		VDD	V
$V_{OH,HDL}$	Output high voltage, high drive, 3 mA, $V_{DD} \geq 1.7$ V	$V_{DD}-0.4$		VDD	V
$V_{OL,SD}$	Output low voltage, standard drive, 0.5 mA, $V_{DD} \geq 1.7$	VSS		$V_{SS}+0.4$	V
$V_{OL,HDH}$	Output low voltage, high drive, 5 mA, $V_{DD} \geq 2.7$ V	VSS		$V_{SS}+0.4$	V
$V_{OL,HDL}$	Output low voltage, high drive, 3 mA, $V_{DD} \geq 1.7$ V	VSS		$V_{SS}+0.4$	V
$I_{OL,SD}$	Current at $V_{SS}+0.4$ V, output set low, standard drive, $V_{DD} \geq 1.7$	1	2	4	mA
$I_{OL,HDH}$	Current at $V_{SS}+0.4$ V, output set low, high drive, $V_{DD} \geq 2.7$ V	6	10	15	mA
$I_{OL,HDL}$	Current at $V_{SS}+0.4$ V, output set low, high drive, $V_{DD} \geq 1.7$ V	3			mA
$I_{OH,SD}$	Current at $V_{DD}-0.4$ V, output set high, standard drive, $V_{DD} \geq 1.7$	1	2	4	mA
$I_{OH,HDH}$	Current at $V_{DD}-0.4$ V, output set high, high drive, $V_{DD} \geq 2.7$ V	6	9	14	mA
$I_{OH,HDL}$	Current at $V_{DD}-0.4$ V, output set high, high drive, $V_{DD} \geq 1.7$ V	3			mA
$t_{RF,15pF}$	Rise/fall time, low drive mode, 10-90%, 15 pF load <sup>1</sup>		9		ns
$t_{RF,25pF}$	Rise/fall time, low drive mode, 10-90%, 25 pF load <sup>1</sup>		13		ns
$t_{RF,50pF}$	Rise/fall time, low drive mode, 10-90%, 50 pF load <sup>1</sup>		25		ns
$t_{HRF,15pF}$	Rise/Fall time, high drive mode, 10-90%, 15 pF load <sup>1</sup>		4		ns
$t_{HRF,25pF}$	Rise/Fall time, high drive mode, 10-90%, 25 pF load <sup>1</sup>		5		ns
$t_{HRF,50pF}$	Rise/Fall time, high drive mode, 10-90%, 50 pF load <sup>1</sup>		8		ns
$R_{PU}$	Pull-up resistance	11	13	16	k $\Omega$
$R_{PD}$	Pull-down resistance	11	13	16	k $\Omega$
$C_{PAD}$	Pad capacitance		3		pF
$C_{PAD\_NFC}$	Pad capacitance on NFC pads		4		pF
$I_{NFC\_LEAK}$	Leakage current between NFC pads when driven to different states		2	10	$\mu$ A

The current drawn from the battery when GPIO is active as an output is calculated as follows:


$$I_{GPIO} = V_{DD} C_{load} f$$

$C_{load}$  being the load capacitance and “f” is the switching frequency.

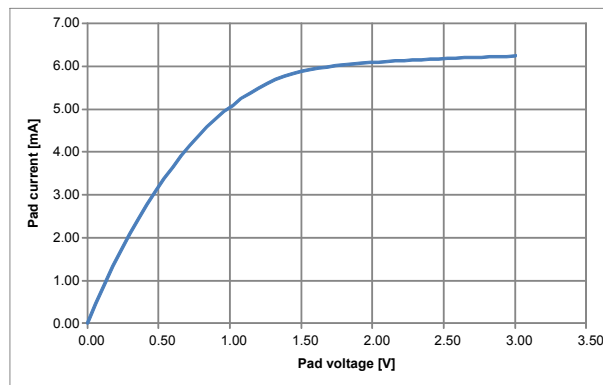


**Figure 25: GPIO drive strength vs Voltage, standard drive,  $V_{DD} = 3.0$  V**

<sup>1</sup> Rise and fall times based on simulations

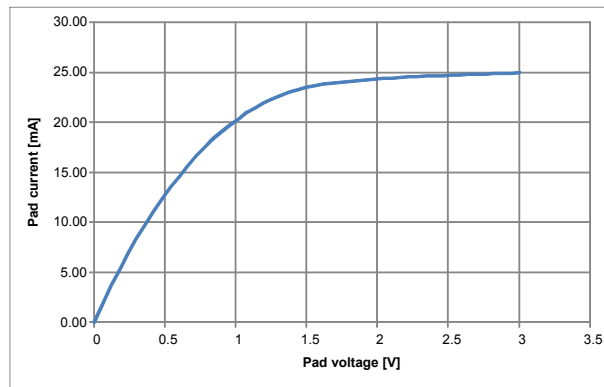


**Figure 26: GPIO drive strength vs Voltage, high drive, VDD = 3.0 V**

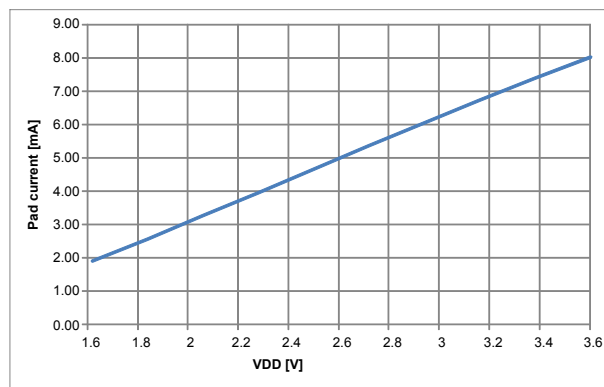


**Figure 27: Max sink current vs Voltage, standard drive**

To ensure optimal performance, it is not recommended to sink/source more than 15 mA combined from the GPIO pins.

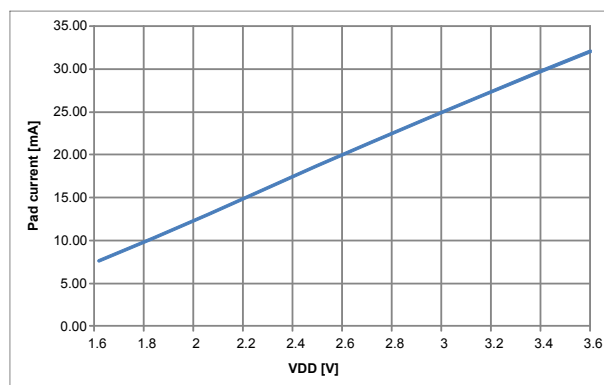

**Figure 28: Max sink current vs Voltage, high drive**

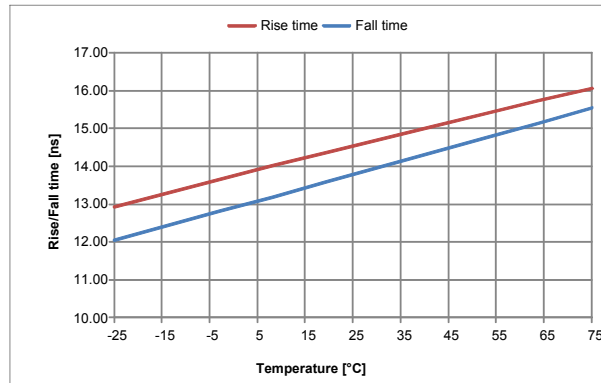

**Figure 29: Rise and fall time vs Temperature, 10%-90%, 25pF load capacitance, VDD = 3.0 V**



## 21 GPIOTE — GPIO tasks and events

The GPIO tasks and events (GPIOTE) module provides functionality for accessing GPIO pins using tasks and events. Each GPIOTE channel can be assigned to one pin.

A GPIOTE block enables GPIOs to generate events on pin state change which can be used to carry out tasks through the PPI system. A GPIO can also be driven to change state on system events using the PPI system. Low power detection of pin state changes is possible when in System ON or System OFF.

**Table 33: GPIOTE properties**

Instance	Number of GPIOTE channels
GPIOTE	8

Up to three tasks can be used in each GPIOTE channel for performing write operations to a pin. Two tasks are fixed (SET and CLR), and one (OUT) is configurable to perform following operations:

- Set
- Clear
- Toggle

An event can be generated in each GPIOTE channel from one of the following input conditions:

- Rising edge
- Falling edge
- Any change

### 21.1 Pin events and tasks

The GPIOTE module has a number of tasks and events that can be configured to operate on individual GPIO pins.

The tasks (SET[n], CLR[n] and OUT[n]) can be used for writing to individual pins, and the events (IN[n]) can be generated from changes occurring at the inputs of individual pins.

The SET task will set the pin selected in CONFIG[n].PSEL to high.

The CLR task will set the pin low.

The effect of the OUT task on the pin is configurable in CONFIG[n].POLARITY , and can either set the pin high, set it low, or toggle it.

The tasks and events are configured using the CONFIG[n] registers. Every set of SET, CLR and OUT[n] tasks and IN[n] events has one CONFIG[n] register associated with it.

As long as a SET[n], CLR[n] and OUT[n] task or an IN[n] event is configured to control a pin *n*, the pin's output value will only be updated by the GPIOTE module. The pin's output value as specified in the GPIO will therefore be ignored as long as the pin is controlled by GPIOTE. Attempting to write a pin as a normal GPIO pin will have no effect. When the GPIOTE is disconnected from a pin, see MODE field in CONFIG[n] register, the associated pin will get the output and configuration values specified in the GPIO module.

When conflicting tasks are triggered simultaneously (i.e. during the same clock cycle) in one channel, the precedence of the tasks will be as described in [Table 34: Task priorities](#) on page 161.

**Table 34: Task priorities**

Priority	Task
1	OUT
2	CLR
3	SET

When setting the CONFIG[n] registers, MODE=Disabled does not have the same effect as MODE=Task and POLARITY=None. In the latter case, a CLR or SET task occurring at the exact same time as OUT will end up with no change on the pin, according to the priorities described in the table above.

When a GPIOTE channel is configured to operate on a pin as a task, the initial value of that pin is configured in the OUTINIT field of CONFIG[n].

## 21.2 Port event

PORT is an event that can be generated from multiple input pins using the GPIO DETECT signal.

The event will be generated on the rising edge of the DETECT signal. See [GPIO — General purpose input/output](#) on page 114 for more information about the DETECT signal.

Putting the system into System ON IDLE while DETECT is high will not cause DETECT to wake the system up again. Make sure to clear all DETECT sources before entering sleep. If the LATCH register is used as a source, if any bit in LATCH is still high after clearing all or part of the register (for instance due to one of the PINx.DETECT signal still high), a new rising edge will be generated on DETECT, see [Pin configuration](#) on page 114.

Trying to put the system to System OFF while DETECT is high will cause a wakeup from System OFF reset.

This feature is always enabled although the peripheral itself appears to be IDLE, that is, no clocks or other power intensive infrastructure have to be requested to keep this feature enabled. This feature can therefore be used to wake up the CPU from a WFI or WFE type sleep in System ON with all peripherals and the CPU idle, that is, lowest power consumption in System ON mode.

In order to prevent spurious interrupts from the PORT event while configuring the sources, the user shall first disable interrupts on the PORT event (through INTENCLR.PORT), then configure the sources (PIN\_CNF[n].SENSE), clear any potential event that could have occurred during configuration (write '1' to EVENTS\_PORT), and finally enable interrupts (through INTENSET.PORT).

## 21.3 Tasks and events pin configuration

Each GPIOTE channel is associated with one physical GPIO pin through the CONFIG.PSEL field.

When Event mode is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will be configured as an input, overriding the DIR setting in GPIO. Similarly, when Task mode is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will be configured as an output overriding the DIR setting and OUT value in GPIO. When Disabled is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will use its configuration from the PIN[n].CNF registers in GPIO.

Only one GPIOTE channel can be assigned to one physical pin. Failing to do so may result in unpredictable behavior.

## 21.4 Registers

**Table 35: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40006000	GPIOTE	GPIOTE	GPIO Tasks and Events	

**Table 36: Register Overview**

Register	Offset	Description
TASKS_OUT[0]	0x000	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is configured in CONFIG[0].POLARITY.
TASKS_OUT[1]	0x004	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is configured in CONFIG[1].POLARITY.

Register	Offset	Description
TASKS_OUT[2]	0x008	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is configured in CONFIG[2].POLARITY.
TASKS_OUT[3]	0x00C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is configured in CONFIG[3].POLARITY.
TASKS_OUT[4]	0x010	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is configured in CONFIG[4].POLARITY.
TASKS_OUT[5]	0x014	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is configured in CONFIG[5].POLARITY.
TASKS_OUT[6]	0x018	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is configured in CONFIG[6].POLARITY.
TASKS_OUT[7]	0x01C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is configured in CONFIG[7].POLARITY.
TASKS_SET[0]	0x030	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is to set it high.
TASKS_SET[1]	0x034	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is to set it high.
TASKS_SET[2]	0x038	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is to set it high.
TASKS_SET[3]	0x03C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is to set it high.
TASKS_SET[4]	0x040	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is to set it high.
TASKS_SET[5]	0x044	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is to set it high.
TASKS_SET[6]	0x048	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is to set it high.
TASKS_SET[7]	0x04C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is to set it high.
TASKS_CLR[0]	0x060	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is to set it low.
TASKS_CLR[1]	0x064	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is to set it low.
TASKS_CLR[2]	0x068	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is to set it low.
TASKS_CLR[3]	0x06C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is to set it low.
TASKS_CLR[4]	0x070	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is to set it low.
TASKS_CLR[5]	0x074	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is to set it low.
TASKS_CLR[6]	0x078	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is to set it low.
TASKS_CLR[7]	0x07C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is to set it low.
EVENTS_IN[0]	0x100	Event generated from pin specified in CONFIG[0].PSEL
EVENTS_IN[1]	0x104	Event generated from pin specified in CONFIG[1].PSEL
EVENTS_IN[2]	0x108	Event generated from pin specified in CONFIG[2].PSEL
EVENTS_IN[3]	0x10C	Event generated from pin specified in CONFIG[3].PSEL
EVENTS_IN[4]	0x110	Event generated from pin specified in CONFIG[4].PSEL
EVENTS_IN[5]	0x114	Event generated from pin specified in CONFIG[5].PSEL
EVENTS_IN[6]	0x118	Event generated from pin specified in CONFIG[6].PSEL
EVENTS_IN[7]	0x11C	Event generated from pin specified in CONFIG[7].PSEL
EVENTS_PORT	0x17C	Event generated from multiple input GPIO pins with SENSE mechanism enabled
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
CONFIG[0]	0x510	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[1]	0x514	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[2]	0x518	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[3]	0x51C	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[4]	0x520	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[5]	0x524	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[6]	0x528	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[7]	0x52C	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

### 21.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					I																H G F E D C B A															
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value																Description															
A	RW	IN0																			Write '1' to Enable interrupt for IN[0] event															



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	IN0				Write '1' to Disable interrupt for IN[0] event																													
						See <a href="#">EVENTS_IN[0]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	IN1				Write '1' to Disable interrupt for IN[1] event																													
						See <a href="#">EVENTS_IN[1]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	IN2				Write '1' to Disable interrupt for IN[2] event																													
						See <a href="#">EVENTS_IN[2]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
D	RW	IN3				Write '1' to Disable interrupt for IN[3] event																													
						See <a href="#">EVENTS_IN[3]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
E	RW	IN4				Write '1' to Disable interrupt for IN[4] event																													
						See <a href="#">EVENTS_IN[4]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
F	RW	IN5				Write '1' to Disable interrupt for IN[5] event																													
						See <a href="#">EVENTS_IN[5]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
G	RW	IN6				Write '1' to Disable interrupt for IN[6] event																													
						See <a href="#">EVENTS_IN[6]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
H	RW	IN7				Write '1' to Disable interrupt for IN[7] event																													
						See <a href="#">EVENTS_IN[7]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
I	RW	PORT				Write '1' to Disable interrupt for PORT event																													
						See <a href="#">EVENTS_PORT</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 21.4.3 CONFIG[0]

Address offset: 0x510

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																D		C		C				B		B	B	B	B											A	A
Reset 0x00000000						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	MODE				Mode																																			
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																				
			Event	1	Event mode																																				
			Task	3	The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																				
			Task	3	Task mode																																				
						The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																			
B	RW	PSEL			[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																			
C	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																			
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																				
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																				
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																				
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																				
D	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																			
			Low	0	Task mode: Initial value of pin before task triggering is low																																				
			High	1	Task mode: Initial value of pin before task triggering is high																																				

## 21.4.4 CONFIG[1]

Address offset: 0x514

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																									
Id																				D		C		C				B		B	B	B	B											A	A
Reset 0x00000000				0 0																																									
Id	RW	Field	Value	Id	Value	Description																																							
A	RW	MODE				Mode																																							
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																								
			Event	1	Event mode																																								
			Task	3	The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																								
						Task mode																																							
						The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																							

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id															D		C		C				B		B		B		B						A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
B	RW	PSEL			[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																
C	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																
			None		0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																
			LoToHi		1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																
			HiToLo		2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																
			Toggle		3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																
D	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																
			Low		0	Task mode: Initial value of pin before task triggering is low																																
			High		1	Task mode: Initial value of pin before task triggering is high																																

## 21.4.5 CONFIG[2]

Address offset: 0x518

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id														D		C		C		B		B		B		B				A		A		
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	MODE																																
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																													
			Event	1	Event mode																													
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																													
			Task	3	Task mode																													
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																													
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																													
C	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																													
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																													
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																													
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																													
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id															D		C		C				B	B	B	B	B	B					A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
D	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																															
		Low	0			Task mode: Initial value of pin before task triggering is low																															
		High	1			Task mode: Initial value of pin before task triggering is high																															

### 21.4.6 CONFIG[3]

Address offset: 0x51C

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id														D		C		C				B	B	B	B	B											A	A
Reset 0x00000000				0 0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	MODE			Mode																																	
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																	
			Event	1	Event mode																																	
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																	
			Task	3	Task mode																																	
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																	
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																	
C	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																	
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																	
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																	
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																	
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																	
D	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																	
			Low	0	Task mode: Initial value of pin before task triggering is low																																	
			High	1	Task mode: Initial value of pin before task triggering is high																																	

### 21.4.7 CONFIG[4]

Address offset: 0x520

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event



Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																		
Id												D						C						C						B						B						B						B						A						A											
Reset 0x00000000						0						0						0						0						0						0						0						0						0						0						0					
Id		RW		Field		Value Id		Value		Description																																																													
A		RW		MODE		Disabled		0		Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																																													
						Event		1		Event mode																																																													
						Task		3		The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																																													
								Task mode																																																															
								3		The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																																													
B		RW		PSEL				[0..31]		GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																																													
C		RW		POLARITY						When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																																													
						None		0		Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																																													
						LoToHi		1		Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																																													
						HiToLo		2		Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																																													
						Toggle		3		Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																																													
D		RW		OUTINIT						When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																																													
						Low		0		Task mode: Initial value of pin before task triggering is low																																																													
						High		1		Task mode: Initial value of pin before task triggering is high																																																													

## 21.4.8 CONFIG[5]

Address offset: 0x524

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																		
Id												D						C						C						B						B						B						B						A						A											
Reset 0x00000000						0						0						0						0						0						0						0						0						0						0						0					
Id		RW		Field		Value Id		Value		Description																																																													
A		RW		MODE						Mode																																																													
				Disabled		0		Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																																															
				Event		1		Event mode																																																															
								The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																																															
				Task		3		Task mode																																																															
								The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																																															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id															D		C		C				B		B		B		B						A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
B	RW	PSEL			[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																
C	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																
			None		0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																
			LoToHi		1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																
			HiToLo		2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																
			Toggle		3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																
D	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																
			Low		0	Task mode: Initial value of pin before task triggering is low																																
			High		1	Task mode: Initial value of pin before task triggering is high																																

## 21.4.9 CONFIG[6]

Address offset: 0x528

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id														D		C		C		B		B		B		B				A		A		
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	MODE																																
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																													
			Event	1	Event mode																													
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																													
			Task	3	Task mode																													
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																													
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																													
C	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																													
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																													
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																													
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																													
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																D		C		C					B	B	B	B	B					A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
D	RW	OUTINIT					When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																													
		Low	0				Task mode: Initial value of pin before task triggering is low																													
		High	1				Task mode: Initial value of pin before task triggering is high																													

## 21.4.10 CONFIG[7]

Address offset: 0x52C

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																			D		C		C				B		B	B	B	B			A		A
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value	Description																																
A	RW	MODE																																			
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																
			Event	1	Event mode																																
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																
			Task	3	Task mode																																
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																
C	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																
D	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																
			Low	0	Task mode: Initial value of pin before task triggering is low																																
			High	1	Task mode: Initial value of pin before task triggering is high																																


## 21.5 Electrical specification

### 21.5.1 GPIOTE Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>GPIOTE,IN</sub>	Run current with 1 or more GPIOTE active channels in Input mode		0.1	0.5	μA

## 22 PPI — Programmable peripheral interconnect

The Programmable peripheral interconnect (PPI) enables peripherals to interact autonomously with each other using tasks and events independent of the CPU. The PPI allows precise synchronization between peripherals when real-time application constraints exist and eliminates the need for CPU activity to implement behavior which can be predefined using PPI.

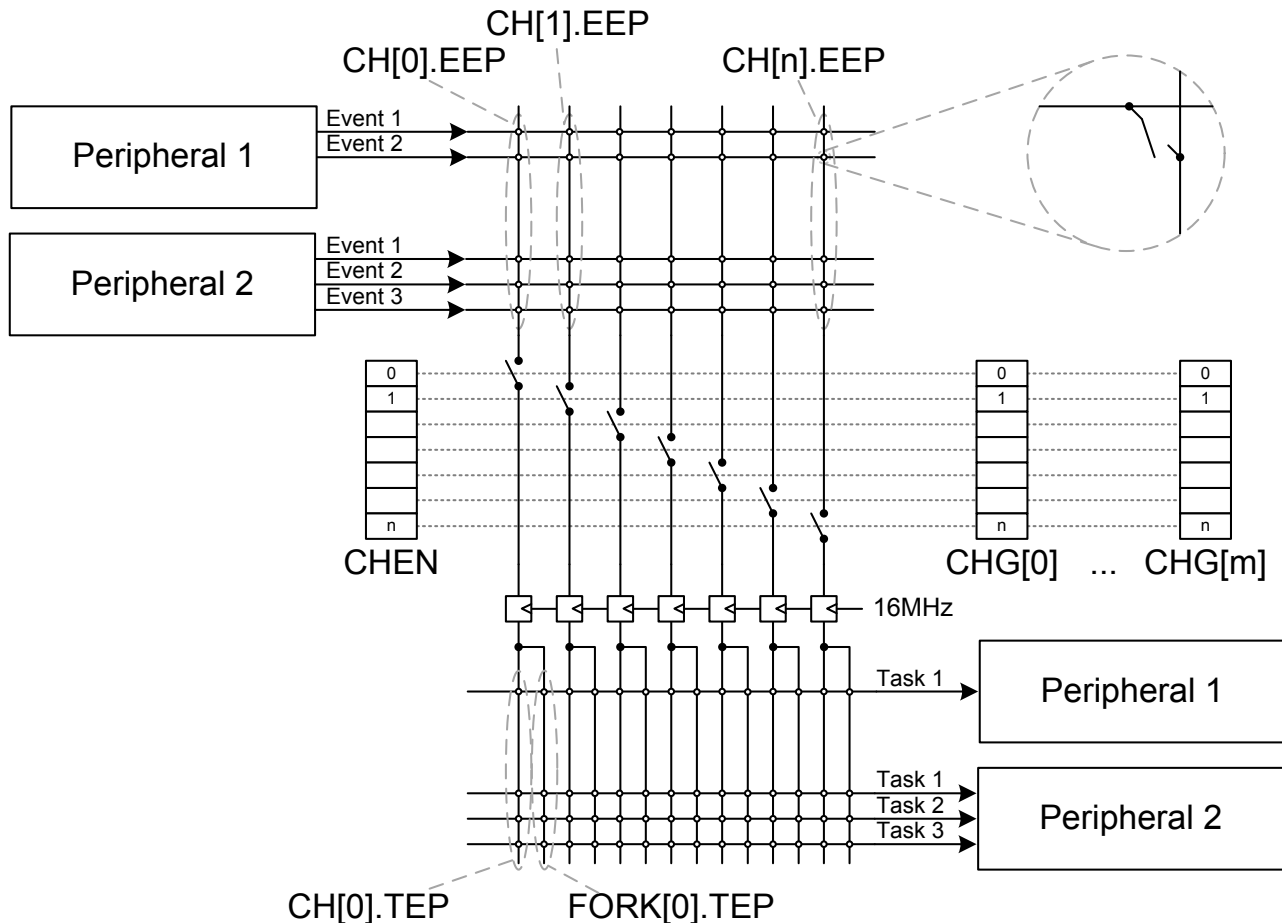

**Figure 30: PPI block diagram**

The PPI system has, in addition to the fully programmable peripheral interconnections, a set of channels where the event end point (EEP) and task end points (TEP) are fixed in hardware. These fixed channels can be individually enabled, disabled, or added to PPI channel groups in the same way as ordinary PPI channels.

**Table 37: Configurable and fixed PPI channels**

Instance	Channel	Number of channels	Number of groups
PPI	0-19	20	6
PPI (fixed)	20-31	12	

The PPI provides a mechanism to automatically trigger a task in one peripheral as a result of an event occurring in another peripheral. A task is connected to an event through a PPI channel. The PPI channel is composed of three end point registers, one EEP and two TEPs. A peripheral task is connected to a TEP using the address of the task register associated with the task. Similarly, a peripheral event is connected to an EEP using the address of the event register associated with the event.

On each PPI channel, the signals are synchronized to the 16 MHz clock, to avoid any internal violation of setup and hold timings. As a consequence, events that are synchronous to the 16 MHz clock will be delayed by one clock period, while other asynchronous events will be delayed by up to one 16 MHz clock period.

Note that shortcuts (as defined in the SHORTS register in each peripheral) are not affected by this 16 MHz synchronization, and are therefore not delayed.

Each TEP implements a fork mechanism that enables a second task to be triggered at the same time as the task specified in the TEP is triggered. This second task is configured in the task end point register in the FORK registers groups, e.g. FORK.TEP[0] is associated with PPI channel CH[0].

There are two ways of enabling and disabling PPI channels:

- Enable or disable PPI channels individually using the CHEN, CHENSET, and CHENCLR registers.
- Enable or disable PPI channels in PPI channel groups through the groups' ENABLE and DISABLE tasks. Prior to these tasks being triggered, the PPI channel group must be configured to define which PPI channels belongs to which groups.

Note that when a channel belongs to two groups m and n, and CHG[m].EN and CHG[n].DIS occur simultaneously (m and n can be equal or different), EN on that channel has priority.

PPI tasks (for example, CHG[0].EN) can be triggered through the PPI like any other task, which means they can be hooked up to a PPI channel as a TEP. One event can trigger multiple tasks by using multiple channels and one task can be triggered by multiple events in the same way.

## 22.1 Pre-programmed channels

Some of the PPI channels are pre-programmed. These channels cannot be configured by the CPU, but can be added to groups and enabled and disabled like the general purpose PPI channels. The FORK TEP for these channels are still programmable and can be used by the application.

For a list of pre-programmed PPI channels, see the table below.

**Table 38: Pre-programmed channels**

Channel	EEP	TEP
20	TIMERO->EVENTS_COMPARE[0]	RADIO->TASKS_TXEN
21	TIMERO->EVENTS_COMPARE[0]	RADIO->TASKS_RXEN
22	TIMERO->EVENTS_COMPARE[1]	RADIO->TASKS_DISABLE
23	RADIO->EVENTS_BCMATCH	AAR->TASKS_START
24	RADIO->EVENTS_READY	CCM->TASKS_KSGEN
25	RADIO->EVENTS_ADDRESS	CCM->TASKS_CRYPT
26	RADIO->EVENTS_ADDRESS	TIMERO->TASKS_CAPTURE[1]
27	RADIO->EVENTS_END	TIMERO->TASKS_CAPTURE[2]
28	RTCO->EVENTS_COMPARE[0]	RADIO->TASKS_TXEN
29	RTCO->EVENTS_COMPARE[0]	RADIO->TASKS_RXEN
30	RTCO->EVENTS_COMPARE[0]	TIMERO->TASKS_CLEAR
31	RTCO->EVENTS_COMPARE[0]	TIMERO->TASKS_START

## 22.2 Registers

**Table 39: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001F000	PPI	PPI	Programmable Peripheral Interconnect	

**Table 40: Register Overview**

Register	Offset	Description
TASKS_CHG[0].EN	0x000	Enable channel group 0
TASKS_CHG[0].DIS	0x004	Disable channel group 0
TASKS_CHG[1].EN	0x008	Enable channel group 1
TASKS_CHG[1].DIS	0x00C	Disable channel group 1
TASKS_CHG[2].EN	0x010	Enable channel group 2
TASKS_CHG[2].DIS	0x014	Disable channel group 2
TASKS_CHG[3].EN	0x018	Enable channel group 3
TASKS_CHG[3].DIS	0x01C	Disable channel group 3
TASKS_CHG[4].EN	0x020	Enable channel group 4

Register	Offset	Description
TASKS_CHG[4].DIS	0x024	Disable channel group 4
TASKS_CHG[5].EN	0x028	Enable channel group 5
TASKS_CHG[5].DIS	0x02C	Disable channel group 5
CHEN	0x500	Channel enable register
CHENSET	0x504	Channel enable set register
CHENCLR	0x508	Channel enable clear register
CH[0].EEP	0x510	Channel 0 event end-point
CH[0].TEP	0x514	Channel 0 task end-point
CH[1].EEP	0x518	Channel 1 event end-point
CH[1].TEP	0x51C	Channel 1 task end-point
CH[2].EEP	0x520	Channel 2 event end-point
CH[2].TEP	0x524	Channel 2 task end-point
CH[3].EEP	0x528	Channel 3 event end-point
CH[3].TEP	0x52C	Channel 3 task end-point
CH[4].EEP	0x530	Channel 4 event end-point
CH[4].TEP	0x534	Channel 4 task end-point
CH[5].EEP	0x538	Channel 5 event end-point
CH[5].TEP	0x53C	Channel 5 task end-point
CH[6].EEP	0x540	Channel 6 event end-point
CH[6].TEP	0x544	Channel 6 task end-point
CH[7].EEP	0x548	Channel 7 event end-point
CH[7].TEP	0x54C	Channel 7 task end-point
CH[8].EEP	0x550	Channel 8 event end-point
CH[8].TEP	0x554	Channel 8 task end-point
CH[9].EEP	0x558	Channel 9 event end-point
CH[9].TEP	0x55C	Channel 9 task end-point
CH[10].EEP	0x560	Channel 10 event end-point
CH[10].TEP	0x564	Channel 10 task end-point
CH[11].EEP	0x568	Channel 11 event end-point
CH[11].TEP	0x56C	Channel 11 task end-point
CH[12].EEP	0x570	Channel 12 event end-point
CH[12].TEP	0x574	Channel 12 task end-point
CH[13].EEP	0x578	Channel 13 event end-point
CH[13].TEP	0x57C	Channel 13 task end-point
CH[14].EEP	0x580	Channel 14 event end-point
CH[14].TEP	0x584	Channel 14 task end-point
CH[15].EEP	0x588	Channel 15 event end-point
CH[15].TEP	0x58C	Channel 15 task end-point
CH[16].EEP	0x590	Channel 16 event end-point
CH[16].TEP	0x594	Channel 16 task end-point
CH[17].EEP	0x598	Channel 17 event end-point
CH[17].TEP	0x59C	Channel 17 task end-point
CH[18].EEP	0x5A0	Channel 18 event end-point
CH[18].TEP	0x5A4	Channel 18 task end-point
CH[19].EEP	0x5A8	Channel 19 event end-point
CH[19].TEP	0x5AC	Channel 19 task end-point
CHG[0]	0x800	Channel group 0
CHG[1]	0x804	Channel group 1
CHG[2]	0x808	Channel group 2
CHG[3]	0x80C	Channel group 3
CHG[4]	0x810	Channel group 4
CHG[5]	0x814	Channel group 5
FORK[0].TEP	0x910	Channel 0 task end-point
FORK[1].TEP	0x914	Channel 1 task end-point
FORK[2].TEP	0x918	Channel 2 task end-point
FORK[3].TEP	0x91C	Channel 3 task end-point
FORK[4].TEP	0x920	Channel 4 task end-point
FORK[5].TEP	0x924	Channel 5 task end-point

Register	Offset	Description
<i>FORK[6].TEP</i>	0x928	Channel 6 task end-point
<i>FORK[7].TEP</i>	0x92C	Channel 7 task end-point
<i>FORK[8].TEP</i>	0x930	Channel 8 task end-point
<i>FORK[9].TEP</i>	0x934	Channel 9 task end-point
<i>FORK[10].TEP</i>	0x938	Channel 10 task end-point
<i>FORK[11].TEP</i>	0x93C	Channel 11 task end-point
<i>FORK[12].TEP</i>	0x940	Channel 12 task end-point
<i>FORK[13].TEP</i>	0x944	Channel 13 task end-point
<i>FORK[14].TEP</i>	0x948	Channel 14 task end-point
<i>FORK[15].TEP</i>	0x94C	Channel 15 task end-point
<i>FORK[16].TEP</i>	0x950	Channel 16 task end-point
<i>FORK[17].TEP</i>	0x954	Channel 17 task end-point
<i>FORK[18].TEP</i>	0x958	Channel 18 task end-point
<i>FORK[19].TEP</i>	0x95C	Channel 19 task end-point
<i>FORK[20].TEP</i>	0x960	Channel 20 task end-point
<i>FORK[21].TEP</i>	0x964	Channel 21 task end-point
<i>FORK[22].TEP</i>	0x968	Channel 22 task end-point
<i>FORK[23].TEP</i>	0x96C	Channel 23 task end-point
<i>FORK[24].TEP</i>	0x970	Channel 24 task end-point
<i>FORK[25].TEP</i>	0x974	Channel 25 task end-point
<i>FORK[26].TEP</i>	0x978	Channel 26 task end-point
<i>FORK[27].TEP</i>	0x97C	Channel 27 task end-point
<i>FORK[28].TEP</i>	0x980	Channel 28 task end-point
<i>FORK[29].TEP</i>	0x984	Channel 29 task end-point
<i>FORK[30].TEP</i>	0x988	Channel 30 task end-point
<i>FORK[31].TEP</i>	0x98C	Channel 31 task end-point

### 22.2.1 CHEN

Address offset: 0x500

## Channel enable register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	CH0					Enable or disable channel 0																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
B	RW	CH1					Enable or disable channel 1																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
C	RW	CH2					Enable or disable channel 2																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
D	RW	CH3					Enable or disable channel 3																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
E	RW	CH4					Enable or disable channel 4																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
F	RW	CH5					Enable or disable channel 5																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
G	RW	CH6					Enable or disable channel 6																												
			Disabled	0	Disable channel																														
			Enabled	1	Enable channel																														
H	RW	CH7					Enable or disable channel 7																												

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 8																																			
I	RW	CH8	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 8																																			
J	RW	CH9	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 9																																			
K	RW	CH10	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 10																																			
L	RW	CH11	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 11																																			
M	RW	CH12	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 12																																			
N	RW	CH13	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 13																																			
O	RW	CH14	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 14																																			
P	RW	CH15	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 15																																			
Q	RW	CH16	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 16																																			
R	RW	CH17	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 17																																			
S	RW	CH18	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 18																																			
T	RW	CH19	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 19																																			
U	RW	CH20	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 20																																			
V	RW	CH21	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 21																																			
W	RW	CH22	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 22																																			
X	RW	CH23	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 23																																			
Y	RW	CH24	Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 24																																			
Z	RW	CH25	Disabled	0	Disable channel																																	
			Enable or disable channel 25																																			



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
a	RW	CH26	Enabled	1		Enable channel																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													
b	RW	CH27	Enabled	1		Enable or disable channel 26																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													
c	RW	CH28	Enabled	1		Enable or disable channel 27																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													
d	RW	CH29	Enabled	1		Enable or disable channel 28																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													
e	RW	CH30	Enabled	1		Enable or disable channel 29																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													
f	RW	CH31	Enabled	1		Enable or disable channel 30																													
			Disabled	0		Disable channel																													
			Enabled	1		Enable channel																													

## 22.2.2 CHENSET

Address offset: 0x504

Channel enable set register

Read: reads value of CH{i} field in CHEN register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CH0			Channel 0 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
B	RW	CH1			Channel 1 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
C	RW	CH2			Channel 2 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
D	RW	CH3			Channel 3 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
E	RW	CH4			Channel 4 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
F	RW	CH5			Channel 5 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																													
G	RW	CH6			Channel 6 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
H	RW	CH7			Channel 7 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
I	RW	CH8			Channel 8 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
J	RW	CH9			Channel 9 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
K	RW	CH10			Channel 10 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
L	RW	CH11			Channel 11 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
M	RW	CH12			Channel 12 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
N	RW	CH13			Channel 13 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
O	RW	CH14			Channel 14 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
P	RW	CH15			Channel 15 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
Q	RW	CH16			Channel 16 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
R	RW	CH17			Channel 17 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
S	RW	CH18			Channel 18 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
T	RW	CH19			Channel 19 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
			Set		1		Write: Enable channel																												
U	RW	CH20					Channel 20 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
V	RW	CH21					Channel 21 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
W	RW	CH22					Channel 22 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
X	RW	CH23					Channel 23 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
Y	RW	CH24					Channel 24 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
Z	RW	CH25					Channel 25 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
a	RW	CH26					Channel 26 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
b	RW	CH27					Channel 27 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
c	RW	CH28					Channel 28 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
d	RW	CH29					Channel 29 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
e	RW	CH30					Channel 30 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												
f	RW	CH31					Channel 31 enable set register. Writing '0' has no effect																												
			Disabled		0		Read: channel disabled																												
			Enabled		1		Read: channel enabled																												
			Set		1		Write: Enable channel																												

### 22.2.3 CHENCLR

Address offset: 0x508

### Channel enable clear register

Read: reads value of CH{i} field in CHEN register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	CH0			Channel 0 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
B	RW	CH1			Channel 1 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
C	RW	CH2			Channel 2 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
D	RW	CH3			Channel 3 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
E	RW	CH4			Channel 4 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
F	RW	CH5			Channel 5 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
G	RW	CH6			Channel 6 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
H	RW	CH7			Channel 7 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
I	RW	CH8			Channel 8 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
J	RW	CH9			Channel 9 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
K	RW	CH10			Channel 10 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
L	RW	CH11			Channel 11 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
M	RW	CH12			Channel 12 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
N	RW	CH13			Channel 13 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
			Channel 14 enable clear register. Writing '0' has no effect																																			
O	RW	CH14	Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
P	RW	CH15	Channel 15 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
Q	RW	CH16	Channel 16 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
R	RW	CH17	Channel 17 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
S	RW	CH18	Channel 18 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
T	RW	CH19	Channel 19 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
U	RW	CH20	Channel 20 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
V	RW	CH21	Channel 21 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
W	RW	CH22	Channel 22 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
X	RW	CH23	Channel 23 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
Y	RW	CH24	Channel 24 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
Z	RW	CH25	Channel 25 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
a	RW	CH26	Channel 26 enable clear register. Writing '0' has no effect																																			
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
b	RW	CH27				Channel 27 enable clear register. Writing '0' has no effect																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
c	RW	CH28				Channel 28 enable clear register. Writing '0' has no effect																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
d	RW	CH29				Channel 29 enable clear register. Writing '0' has no effect																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
e	RW	CH30				Channel 30 enable clear register. Writing '0' has no effect																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																
f	RW	CH31				Channel 31 enable clear register. Writing '0' has no effect																																
			Disabled		0	Read: channel disabled																																
			Enabled		1	Read: channel enabled																																
			Clear		1	Write: disable channel																																

## 22.2.4 CH[0].EEP

Address offset: 0x510

Channel 0 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																																

## 22.2.5 CH[0].TEP

Address offset: 0x514

Channel 0 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																																

## 22.2.6 CH[1].EEP

Address offset: 0x518

Channel 1 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value												Description																			
A	RW	EEP														Pointer to event register. Accepts only addresses to registers from the Event group.																			

### 22.2.7 CH[1].TEP

Address offset: 0x51C

Channel 1 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

### 22.2.8 CH[2].EEP

Address offset: 0x520

Channel 2 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

### 22.2.9 CH[2].TEP

Address offset: 0x524

Channel 2 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

### 22.2.10 CH[3].EEP

Address offset: 0x528

Channel 3 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

### 22.2.11 CH[3].TEP

Address offset: 0x52C

Channel 3 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>												<b>Description</b>																			
A	RW	TEP														Pointer to task register. Accepts only addresses to registers from the Task group.																			

## 22.2.12 CH[4].EEP

Address offset: 0x530

Channel 4 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.13 CH[4].TEP

Address offset: 0x534

Channel 4 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.14 CH[5].EEP

Address offset: 0x538

Channel 5 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.15 CH[5].TEP

Address offset: 0x53C

Channel 5 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>																<b>Description</b>															
A	RW	TEP																		Pointer to task register. Accepts only addresses to registers from the Task group.															

## 22.2.16 CH[6].EEP

Address offset: 0x540

Channel 6 event end-point



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.17 CH[6].TEP

Address offset: 0x544

Channel 6 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.18 CH[7].EEP

Address offset: 0x548

Channel 7 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.19 CH[7].TEP

Address offset: 0x54C

Channel 7 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.20 CH[8].EEP

Address offset: 0x550

Channel 8 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value		Description																												
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																												

## 22.2.21 CH[8].TEP

Address offset: 0x554

Channel 8 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

## 22.2.22 CH[9].EEP

Address offset: 0x558

Channel 9 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.23 CH[9].TEP

Address offset: 0x55C

Channel 9 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.24 CH[10].EEP

Address offset: 0x560

Channel 10 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>												<b>Description</b>																			
A	RW	EEP														Pointer to event register. Accepts only addresses to registers from the Event group.																			

## 22.2.25 CH[10].TEP

Address offset: 0x564

Channel 10 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

## 22.2.26 CH[11].EEP

Address offset: 0x568

Channel 11 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																																	

## 22.2.27 CH[11].TEP

Address offset: 0x56C

Channel 11 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.28 CH[12].EEP

Address offset: 0x570

Channel 12 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value												Description																			
A	RW	EEP														Pointer to event register. Accepts only addresses to registers from the Event group.																			

## 22.2.29 CH[12].TEP

Address offset: 0x574

Channel 12 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																															

## 22.2.30 CH[13].EEP

Address offset: 0x578

Channel 13 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 22.2.31 CH[13].TEP

Address offset: 0x57C

Channel 13 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

## 22.2.32 CH[14].EEP

Address offset: 0x580

Channel 14 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.33 CH[14].TEP

Address offset: 0x584

Channel 14 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value												Description																			
A	RW	TEP														Pointer to task register. Accepts only addresses to registers from the Task group.																			

## 22.2.34 CH[15].EEP

Address offset: 0x588

Channel 15 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.35 CH[15].TEP

Address offset: 0x58C

Channel 15 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>																<b>Description</b>															
A	RW	TEP																		Pointer to task register. Accepts only addresses to registers from the Task group.															

## 22.2.36 CH[16].EEP

Address offset: 0x590

Channel 16 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value		Description																																
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																																

## 22.2.37 CH[16].TEP

Address offset: 0x594

Channel 16 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	TEP																Pointer to task register. Accepts only addresses to registers from the Task group.																	

## 22.2.38 CH[17].EEP

Address offset: 0x598

Channel 17 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																																	

## 22.2.39 CH[17].TEP

Address offset: 0x59C

Channel 17 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																																	

## 22.2.40 CH[18].EEP

Address offset: 0x5A0

Channel 18 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 22.2.41 CH[18].TEP

Address offset: 0x5A4

Channel 18 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																																	

## 22.2.42 CH[19].EEP

Address offset: 0x5A8

Channel 19 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 22.2.43 CH[19].TEP

Address offset: 0x5AC

Channel 19 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 22.2.44 CHG[0]

Address offset: 0x800

Channel group 0

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id						f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id		Value				Description																											
A	RW	CH0						Include or exclude channel 0																													
				Excluded		0	Exclude																														
				Included		1	Include																														
B	RW	CH1						Include or exclude channel 1																													
				Excluded		0	Exclude																														
				Included		1	Include																														
C	RW	CH2						Include or exclude channel 2																													
				Excluded		0	Exclude																														
				Included		1	Include																														
D	RW	CH3						Include or exclude channel 3																													
				Excluded		0	Exclude																														
				Included		1	Include																														
E	RW	CH4						Include or exclude channel 4																													
				Excluded		0	Exclude																														
				Included		1	Include																														
F	RW	CH5						Include or exclude channel 5																													
				Excluded		0	Exclude																														
				Included		1	Include																														
G	RW	CH6						Include or exclude channel 6																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
H	RW	CH7	Excluded		0				Exclude																											
			Included		1				Include																											
			Include or exclude channel 7																																	
			Excluded		0				Exclude																											
I	RW	CH8	Included		1				Include																											
			Include or exclude channel 8																																	
			Excluded		0				Exclude																											
			Included		1				Include																											
J	RW	CH9	Include or exclude channel 9																																	
			Excluded		0				Exclude																											
			Included		1				Include																											
			K	RW	CH10	Include or exclude channel 10																														
Excluded		0				Exclude																														
Included		1				Include																														
L	RW	CH11				Include or exclude channel 11																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			M	RW	CH12	Include or exclude channel 12																														
Excluded		0				Exclude																														
Included		1				Include																														
N	RW	CH13				Include or exclude channel 13																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			O	RW	CH14	Include or exclude channel 14																														
Excluded		0				Exclude																														
Included		1				Include																														
P	RW	CH15				Include or exclude channel 15																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			Q	RW	CH16	Include or exclude channel 16																														
Excluded		0				Exclude																														
Included		1				Include																														
R	RW	CH17				Include or exclude channel 17																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			S	RW	CH18	Include or exclude channel 18																														
Excluded		0				Exclude																														
Included		1				Include																														
T	RW	CH19				Include or exclude channel 19																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			U	RW	CH20	Include or exclude channel 20																														
Excluded		0				Exclude																														
Included		1				Include																														
V	RW	CH21				Include or exclude channel 21																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			W	RW	CH22	Include or exclude channel 22																														
Excluded		0				Exclude																														
Included		1				Include																														
X	RW	CH23				Include or exclude channel 23																														
			Excluded		0				Exclude																											
			Included		1				Include																											
			Y	RW	CH24	Include or exclude channel 24																														
Excluded		0				Exclude																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
Z	RW	CH25	Included	1	Include																														
			Excluded	0	Include or exclude channel 25																														
			Included	1	Exclude																														
a	RW	CH26	Included	1	Include																														
			Excluded	0	Include or exclude channel 26																														
			Included	1	Exclude																														
b	RW	CH27	Included	1	Include																														
			Excluded	0	Include or exclude channel 27																														
			Included	1	Exclude																														
c	RW	CH28	Included	1	Include																														
			Excluded	0	Include or exclude channel 28																														
			Included	1	Exclude																														
d	RW	CH29	Included	1	Include																														
			Excluded	0	Include or exclude channel 29																														
			Included	1	Exclude																														
e	RW	CH30	Included	1	Include																														
			Excluded	0	Include or exclude channel 30																														
			Included	1	Exclude																														
f	RW	CH31	Included	1	Include																														
			Excluded	0	Include or exclude channel 31																														
			Included	1	Exclude																														

### 22.2.45 CHG[1]

Address offset: 0x804

Channel group 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																												
A	RW	CH0					Include or exclude channel 0																												
			Excluded	0	Exclude																														
			Included	1	Include																														
B	RW	CH1					Include or exclude channel 1																												
			Excluded	0	Exclude																														
			Included	1	Include																														
C	RW	CH2					Include or exclude channel 2																												
			Excluded	0	Exclude																														
			Included	1	Include																														
D	RW	CH3					Include or exclude channel 3																												
			Excluded	0	Exclude																														
			Included	1	Include																														
E	RW	CH4					Include or exclude channel 4																												
			Excluded	0	Exclude																														
			Included	1	Include																														
F	RW	CH5					Include or exclude channel 5																												
			Excluded	0	Exclude																														
			Included	1	Include																														
G	RW	CH6					Include or exclude channel 6																												
			Excluded	0	Exclude																														
			Included	1	Include																														
H	RW	CH7					Include or exclude channel 7																												
			Excluded	0	Exclude																														



Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																						
			Included	1	Include																																						
I	RW	CH8			Include or exclude channel 8																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
J	RW	CH9			Include or exclude channel 9																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
K	RW	CH10			Include or exclude channel 10																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
L	RW	CH11			Include or exclude channel 11																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
M	RW	CH12			Include or exclude channel 12																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
N	RW	CH13			Include or exclude channel 13																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
O	RW	CH14			Include or exclude channel 14																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
P	RW	CH15			Include or exclude channel 15																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
Q	RW	CH16			Include or exclude channel 16																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
R	RW	CH17			Include or exclude channel 17																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
S	RW	CH18			Include or exclude channel 18																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
T	RW	CH19			Include or exclude channel 19																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
U	RW	CH20			Include or exclude channel 20																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
V	RW	CH21			Include or exclude channel 21																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
W	RW	CH22			Include or exclude channel 22																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
X	RW	CH23			Include or exclude channel 23																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
Y	RW	CH24			Include or exclude channel 24																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						
Z	RW	CH25			Include or exclude channel 25																																						
			Excluded	0	Exclude																																						
			Included	1	Include																																						

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id		Value		Description																																
a	RW	CH26							Include or exclude channel 26																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	
b	RW	CH27							Include or exclude channel 27																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	
c	RW	CH28							Include or exclude channel 28																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	
d	RW	CH29							Include or exclude channel 29																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	
e	RW	CH30							Include or exclude channel 30																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	
f	RW	CH31							Include or exclude channel 31																																
				Excluded		0		Exclude																																	
				Included		1		Include																																	

## 22.2.46 CHG[2]

Address offset: 0x808

Channel group 2

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
A	RW	CH0				Include or exclude channel 0																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
B	RW	CH1				Include or exclude channel 1																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
C	RW	CH2				Include or exclude channel 2																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
D	RW	CH3				Include or exclude channel 3																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
E	RW	CH4				Include or exclude channel 4																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
F	RW	CH5				Include or exclude channel 5																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
G	RW	CH6				Include or exclude channel 6																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
H	RW	CH7				Include or exclude channel 7																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					
I	RW	CH8				Include or exclude channel 8																																				
			Excluded	0	Exclude																																					
			Included	1	Include																																					

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
J	RW	CH9				Include or exclude channel 9																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
K	RW	CH10				Include or exclude channel 10																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
L	RW	CH11				Include or exclude channel 11																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
M	RW	CH12				Include or exclude channel 12																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
N	RW	CH13				Include or exclude channel 13																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
O	RW	CH14				Include or exclude channel 14																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
P	RW	CH15				Include or exclude channel 15																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Q	RW	CH16				Include or exclude channel 16																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
R	RW	CH17				Include or exclude channel 17																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
S	RW	CH18				Include or exclude channel 18																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
T	RW	CH19				Include or exclude channel 19																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
U	RW	CH20				Include or exclude channel 20																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
V	RW	CH21				Include or exclude channel 21																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
W	RW	CH22				Include or exclude channel 22																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
X	RW	CH23				Include or exclude channel 23																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Y	RW	CH24				Include or exclude channel 24																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Z	RW	CH25				Include or exclude channel 25																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
a	RW	CH26				Include or exclude channel 26																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
b	RW	CH27				Include or exclude channel 27																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
				Excluded	0		Exclude																												
				Included	1		Include																												
c	RW	CH28			Include or exclude channel 28																														
					Excluded	0		Exclude																											
				Included	1		Include																												
d	RW	CH29			Include or exclude channel 29																														
					Excluded	0		Exclude																											
				Included	1		Include																												
e	RW	CH30			Include or exclude channel 30																														
					Excluded	0		Exclude																											
				Included	1		Include																												
f	RW	CH31			Include or exclude channel 31																														
					Excluded	0		Exclude																											
				Included	1		Include																												

### 22.2.47 CHG[3]

Address offset: 0x80C

Channel group 3

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																														
Reset 0x00000000				0 0																														
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																									
A	RW	CH0							Include or exclude channel 0																									
			Excluded		0				Exclude																									
			Included		1				Include																									
B	RW	CH1							Include or exclude channel 1																									
			Excluded		0				Exclude																									
			Included		1				Include																									
C	RW	CH2							Include or exclude channel 2																									
			Excluded		0				Exclude																									
			Included		1				Include																									
D	RW	CH3							Include or exclude channel 3																									
			Excluded		0				Exclude																									
			Included		1				Include																									
E	RW	CH4							Include or exclude channel 4																									
			Excluded		0				Exclude																									
			Included		1				Include																									
F	RW	CH5							Include or exclude channel 5																									
			Excluded		0				Exclude																									
			Included		1				Include																									
G	RW	CH6							Include or exclude channel 6																									
			Excluded		0				Exclude																									
			Included		1				Include																									
H	RW	CH7							Include or exclude channel 7																									
			Excluded		0				Exclude																									
			Included		1				Include																									
I	RW	CH8							Include or exclude channel 8																									
			Excluded		0				Exclude																									
			Included		1				Include																									
J	RW	CH9							Include or exclude channel 9																									
			Excluded		0				Exclude																									
			Included		1				Include																									
K	RW	CH10							Include or exclude channel 10																									

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value			Description																												
L	RW	CH11	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
M	RW	CH12	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
N	RW	CH13	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
O	RW	CH14	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
P	RW	CH15	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
Q	RW	CH16	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
R	RW	CH17	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
S	RW	CH18	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
T	RW	CH19	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
U	RW	CH20	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
V	RW	CH21	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
W	RW	CH22	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
X	RW	CH23	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
Y	RW	CH24	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
Z	RW	CH25	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
a	RW	CH26	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
b	RW	CH27	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												
c	RW	CH28	Excluded		0			Exclude																												
			Included		1			Include																												
			Excluded		0			Exclude																												
			Included		1			Include																												

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
d	RW	CH29	Included	1	Include																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
e	RW	CH30	Included	1	Include or exclude channel 30																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
f	RW	CH31	Included	1	Include or exclude channel 31																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	

## 22.2.48 CHG[4]

Address offset: 0x810

Channel group 4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CH0			Include or exclude channel 0																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
B	RW	CH1			Include or exclude channel 1																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
C	RW	CH2			Include or exclude channel 2																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
D	RW	CH3			Include or exclude channel 3																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
E	RW	CH4			Include or exclude channel 4																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
F	RW	CH5			Include or exclude channel 5																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
G	RW	CH6			Include or exclude channel 6																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
H	RW	CH7			Include or exclude channel 7																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
I	RW	CH8			Include or exclude channel 8																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
J	RW	CH9			Include or exclude channel 9																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
K	RW	CH10			Include or exclude channel 10																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
L	RW	CH11			Include or exclude channel 11																																	
			Excluded	0	Exclude																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
M	RW	CH12	Included	1	Include																														
			Excluded	0	Exclude																														
			Included	1	Include																														
N	RW	CH13			Include or exclude channel 13																														
			Excluded	0	Exclude																														
			Included	1	Include																														
O	RW	CH14			Include or exclude channel 14																														
			Excluded	0	Exclude																														
			Included	1	Include																														
P	RW	CH15			Include or exclude channel 15																														
			Excluded	0	Exclude																														
			Included	1	Include																														
Q	RW	CH16			Include or exclude channel 16																														
			Excluded	0	Exclude																														
			Included	1	Include																														
R	RW	CH17			Include or exclude channel 17																														
			Excluded	0	Exclude																														
			Included	1	Include																														
S	RW	CH18			Include or exclude channel 18																														
			Excluded	0	Exclude																														
			Included	1	Include																														
T	RW	CH19			Include or exclude channel 19																														
			Excluded	0	Exclude																														
			Included	1	Include																														
U	RW	CH20			Include or exclude channel 20																														
			Excluded	0	Exclude																														
			Included	1	Include																														
V	RW	CH21			Include or exclude channel 21																														
			Excluded	0	Exclude																														
			Included	1	Include																														
W	RW	CH22			Include or exclude channel 22																														
			Excluded	0	Exclude																														
			Included	1	Include																														
X	RW	CH23			Include or exclude channel 23																														
			Excluded	0	Exclude																														
			Included	1	Include																														
Y	RW	CH24			Include or exclude channel 24																														
			Excluded	0	Exclude																														
			Included	1	Include																														
Z	RW	CH25			Include or exclude channel 25																														
			Excluded	0	Exclude																														
			Included	1	Include																														
a	RW	CH26			Include or exclude channel 26																														
			Excluded	0	Exclude																														
			Included	1	Include																														
b	RW	CH27			Include or exclude channel 27																														
			Excluded	0	Exclude																														
			Included	1	Include																														
c	RW	CH28			Include or exclude channel 28																														
			Excluded	0	Exclude																														
			Included	1	Include																														
d	RW	CH29			Include or exclude channel 29																														
			Excluded	0	Exclude																														
			Included	1	Include																														

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
e	RW	CH30				Include or exclude channel 30																																				
			Excluded		0	Exclude																																				
			Included		1	Include																																				
f	RW	CH31				Include or exclude channel 31																																				
			Excluded		0	Exclude																																				
			Included		1	Include																																				

## 22.2.49 CHG[5]

Address offset: 0x814

Channel group 5

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CH0				Include or exclude channel 0																													
			Excluded		0	Exclude																													
			Included		1	Include																													
B	RW	CH1				Include or exclude channel 1																													
			Excluded		0	Exclude																													
			Included		1	Include																													
C	RW	CH2				Include or exclude channel 2																													
			Excluded		0	Exclude																													
			Included		1	Include																													
D	RW	CH3				Include or exclude channel 3																													
			Excluded		0	Exclude																													
			Included		1	Include																													
E	RW	CH4				Include or exclude channel 4																													
			Excluded		0	Exclude																													
			Included		1	Include																													
F	RW	CH5				Include or exclude channel 5																													
			Excluded		0	Exclude																													
			Included		1	Include																													
G	RW	CH6				Include or exclude channel 6																													
			Excluded		0	Exclude																													
			Included		1	Include																													
H	RW	CH7				Include or exclude channel 7																													
			Excluded		0	Exclude																													
			Included		1	Include																													
I	RW	CH8				Include or exclude channel 8																													
			Excluded		0	Exclude																													
			Included		1	Include																													
J	RW	CH9				Include or exclude channel 9																													
			Excluded		0	Exclude																													
			Included		1	Include																													
K	RW	CH10				Include or exclude channel 10																													
			Excluded		0	Exclude																													
			Included		1	Include																													
L	RW	CH11				Include or exclude channel 11																													
			Excluded		0	Exclude																													
			Included		1	Include																													
M	RW	CH12				Include or exclude channel 12																													
			Excluded		0	Exclude																													
			Included		1	Include																													



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
N	RW	CH13				Include or exclude channel 13																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
O	RW	CH14				Include or exclude channel 14																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
P	RW	CH15				Include or exclude channel 15																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Q	RW	CH16				Include or exclude channel 16																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
R	RW	CH17				Include or exclude channel 17																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
S	RW	CH18				Include or exclude channel 18																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
T	RW	CH19				Include or exclude channel 19																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
U	RW	CH20				Include or exclude channel 20																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
V	RW	CH21				Include or exclude channel 21																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
W	RW	CH22				Include or exclude channel 22																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
X	RW	CH23				Include or exclude channel 23																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Y	RW	CH24				Include or exclude channel 24																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Z	RW	CH25				Include or exclude channel 25																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
a	RW	CH26				Include or exclude channel 26																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
b	RW	CH27				Include or exclude channel 27																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
c	RW	CH28				Include or exclude channel 28																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
d	RW	CH29				Include or exclude channel 29																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
e	RW	CH30				Include or exclude channel 30																																
			Excluded	0	Exclude																																	
			Included	1	Include																																	
f	RW	CH31				Include or exclude channel 31																																

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
			Value Id																													
			Excluded																													
			Included																													

## 22.2.50 FORK[0].TEP

Address offset: 0x910

Channel 0 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	TEP																														
			Value Id																													
			Excluded																													
			Included																													

Pointer to task register

## 22.2.51 FORK[1].TEP

Address offset: 0x914

Channel 1 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	TEP																														
			Value Id																													
			Excluded																													
			Included																													

Pointer to task register

## 22.2.52 FORK[2].TEP

Address offset: 0x918

Channel 2 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	TEP																														
			Value Id																													
			Excluded																													
			Included																													

Pointer to task register

## 22.2.53 FORK[3].TEP

Address offset: 0x91C

Channel 3 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	TEP																														
			Value Id																													
			Excluded																													
			Included																													

Pointer to task register

## 22.2.54 FORK[4].TEP

Address offset: 0x920

Channel 4 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

### 22.2.55 FORK[5].TEP

Address offset: 0x924

Channel 5 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

### 22.2.56 FORK[6].TEP

Address offset: 0x928

Channel 6 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

### 22.2.57 FORK[7].TEP

Address offset: 0x92C

Channel 7 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

### 22.2.58 FORK[8].TEP

Address offset: 0x930

Channel 8 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

### 22.2.59 FORK[9].TEP

Address offset: 0x934

Channel 9 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

## 22.2.60 FORK[10].TEP

Address offset: 0x938

Channel 10 task end-point

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																													
Id	A A																													
Reset 0x00000000	0 0																													
Id	RW	Field	Value Id		Value		Description																							
A	RW	TEP					Pointer to task register																							

## 22.2.61 FORK[11].TEP

Address offset: 0x93C

Channel 11 task end-point

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value				Description																											
A	RW	TEP							Pointer to task register																											

## 22.2.62 FORK[12].TEP

Address offset: 0x940

Channel 12 task end-point

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value																Description															
A	RW	TEP																			Pointer to task register															

## 22.2.63 FORK[13].TEP

Address offset: 0x944

Channel 13 task end-point

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

## 22.2.64 FORK[14].TEP

Address offset: 0x948

Channel 14 task end-point

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

## 22.2.65 FORK[15].TEP

Address offset: 0x94C

Channel 15 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

## 22.2.66 FORK[16].TEP

Address offset: 0x950

Channel 16 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

## 22.2.67 FORK[17].TEP

Address offset: 0x954

Channel 17 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	TEP								Pointer to task register																										

## 22.2.68 FORK[18].TEP

Address offset: 0x958

Channel 18 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	TEP							Pointer to task register																											

## 22.2.69 FORK[19].TEP

Address offset: 0x95C

Channel 19 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	RW	TEP								Pointer to task register																										

## 22.2.70 FORK[20].TEP

Address offset: 0x960

Channel 20 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>										<b>Description</b>																					
A	RW	TEP													Pointer to task register																					

### 22.2.71 FORK[21].TEP

Address offset: 0x964

Channel 21 task end-point

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																													
Id	A A																													
Reset 0x00000000	0 0																													
Id	RW	Field	Value	Id	Value	Description																								
A	RW	TEP				Pointer to task register																								

### 22.2.72 FORK[22].TEP

Address offset: 0x968

Channel 22 task end-point

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value				Description																										
A	RW	TEP							Pointer to task register																										

### 22.2.73 FORK[23].TEP

Address offset: 0x96C

Channel 23 task end-point

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	TEP							Pointer to task register																											

### 22.2.74 FORK[24].TEP

Address offset: 0x970

Channel 24 task end-point

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value								Description																							
A	RW	TEP											Pointer to task register																							

### 22.2.75 FORK[25].TEP

Address offset: 0x974

Channel 25 task end-point

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	TEP							Pointer to task register																											

### 22.2.76 FORK[26].TEP

Address offset: 0x978

Channel 26 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

### 22.2.77 FORK[27].TEP

Address offset: 0x97C

Channel 27 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

### 22.2.78 FORK[28].TEP

Address offset: 0x980

Channel 28 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

### 22.2.79 FORK[29].TEP

Address offset: 0x984

Channel 29 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													

### 22.2.80 FORK[30].TEP

Address offset: 0x988

Channel 30 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	TEP					Pointer to task register																													

### 22.2.81 FORK[31].TEP

Address offset: 0x98C

Channel 31 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	TEP					Pointer to task register																													






## 23 RADIO — 2.4 GHz Radio

The RADIO contains a 2.4 GHz radio receiver and a 2.4 GHz radio transmitter that is compatible with Nordic's proprietary 1 Mbps and 2 Mbps radio modes in addition to 1 Mbps and 2 Mbps *Bluetooth*® low energy mode.

EasyDMA in combination with an automated packet assembler and packet disassembler, and an automated CRC generator and CRC checker, makes it very easy to configure and use the RADIO. See [Figure 31: RADIO block diagram](#) on page 209 for details.

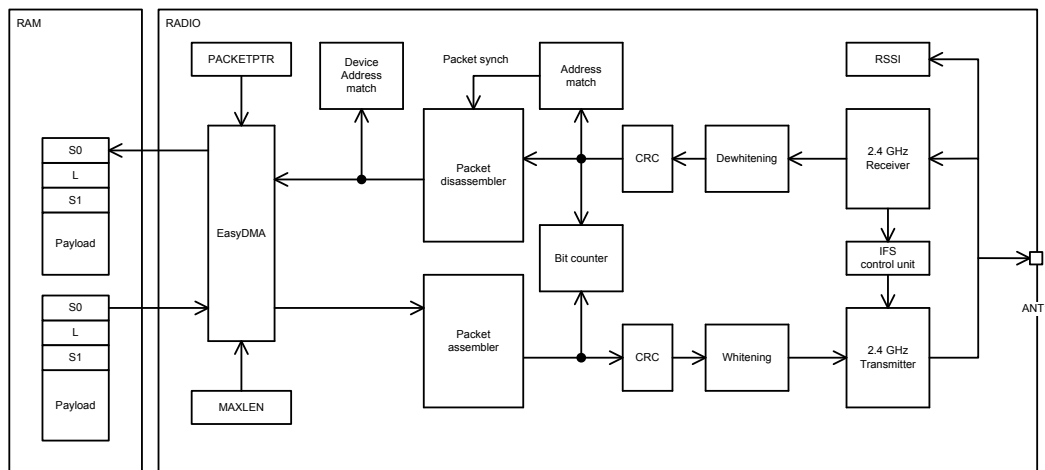

**Figure 31: RADIO block diagram**

The RADIO includes a Device Address Match unit and an interframe spacing control unit that can be utilized to simplify address white listing and interframe spacing respectively, in *Bluetooth* Smart and similar applications.

The RADIO also includes a Received Signal Strength Indicator (RSSI) and a bit counter. The bit counter generates events when a preconfigured number of bits have been sent or received by the RADIO.

### 23.1 EasyDMA

The RADIO use EasyDMA for reading and writing of data packets from and to the RAM without CPU involvement.

As illustrated in [Figure 31: RADIO block diagram](#) on page 209, the RADIO's EasyDMA utilizes the same PACKETPTR for receiving and transmitting packets. The CPU should reconfigure this pointer every time before the RADIO is started via the START task.

The structure of a radio packet is described in detail in [Packet configuration](#) on page 210. The data that is stored in Data RAM and transported by EasyDMA consists of S0, LENGTH, S1, the payload itself, and a static add-on sent immediately after the payload.

The size of each of the above elements in the frame is configurable (see [Packet configuration](#) on page 210), and the space occupied in RAM depends on these settings. A size of zero is possible for any of the fields, it is up to the user to make sure that the resulting frame complies with the RF protocol chosen.

For the field sizes defined in bits, the occupation in RAM will always be rounded up to the next full byte size (for instance 3 bit length will allocate 1 byte in RAM, 9 bit length will allocate 2 bytes, etc.).

In addition, the S0INCL field in PCNF0 determines if S0 is present in RAM at all if its length is zero. If present, one byte is allocated in RAM.

The size of S0 is configured through the S0LEN field in PCNF0. The size of LENGTH is configured through the LLEN field in PCNF0. The size of S1 is configured through the S1LEN field in PCNF0. The size of the payload is configured through the value in RAM corresponding to the LENGTH field. The size of the static add-on to the payload is configured through the STATLEN field in PCNF1.

The MAXLEN field in the PCNF1 register configures the maximum packet payload plus add-on size in number of bytes that can be transmitted or received by the RADIO. This feature can be used to ensure that the RADIO does not overwrite, or read beyond, the RAM assigned to the packet payload. This means that if the packet payload length defined by PCNF1.STATLEN and the LENGTH field in the packet specifies a packet larger than MAXLEN, the payload will be truncated at MAXLEN.

Note that MAXLEN includes the payload and the add-on, but excludes the size occupied by the S0, LENGTH and S1 fields. This has to be taken into account when allocating RAM.

If the payload plus add-on length is specified larger than MAXLEN, the RADIO will still transmit or receive in the same way as before except the payload is now truncated to MAXLEN. The packet's LENGTH field will not be altered when the payload is truncated. The RADIO will calculate CRC as if the packet length is equal to MAXLEN.


If the PACKETPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The DISABLED event indicates that the EasyDMA has finished accessing the RAM.

## 23.2 Packet configuration

A Radio packet contains the following fields: PREAMBLE, ADDRESS, S0, LENGTH, S1, PAYLOAD and CRC.


See [Figure 32: On-air packet layout](#) on page 210. Not shown in the figure is the static payload add-on (the length of which is defined in STATLEN, and which is 0 bytes long in a standard BLE packet), and would be sent between PAYLOAD and CRC. The Radio sends the different fields in the packet in the order they are illustrated below, from left to right. The preamble will be sent least significant bit first on-air.

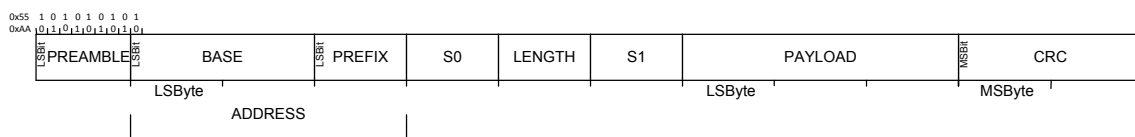

**Figure 32: On-air packet layout**

For all modes, except for 2 Mbit/s Bluetooth Low Energy mode, the preamble is one byte long. For 2 Mbit/s Bluetooth Low Energy mode the preamble is 2 bytes long. If the first bit of the ADDRESS is 0 the preamble will be set to 0xAA otherwise the PREAMBLE will be set to 0x55.

Radio packets are stored in memory inside instances of a radio packet data structure as illustrated in [Figure 33: In-RAM representation of radio packet, S0, LENGTH and S1 are optional](#) on page 210. The PREAMBLE, ADDRESS and CRC fields are omitted in this data structure.



**Figure 33: In-RAM representation of radio packet, S0, LENGTH and S1 are optional**

The byte ordering on air is always Least Significant Byte First for the ADDRESS and PAYLOAD fields and Most Significant Byte First for the CRC field. The ADDRESS fields are always transmitted and received least significant bit first on-air. The CRC field is always transmitted and received Most Significant Bit first. The bit-endian, i.e. which order the bits are sent and received in, of the S0, LENGTH, S1 and PAYLOAD fields can be configured via the ENDIAN in PCNF1.

The S0INCL field in PCNF0 determines if S0 is present in RAM at all if its length is zero. If present, one byte is allocated in RAM.

The sizes of the S0, LENGTH and S1 fields can be individually configured via S0LEN, LLEN and S1LEN in PCNF0 respectively. If any of these fields are configured to be less than 8 bit long the, the least significant bits of the fields, as seen from the RAM representation, are used.

If S0, LENGTH or S1 are specified with zero length their fields will be omitted in memory, otherwise each field will be represented as a separate byte, regardless of the number of bits in their on-air counterpart.

## 23.3 Maximum packet length

Independent of the configuration of MAXLEN, the combined length of S0, LENGTH, S1 and PAYLOAD cannot exceed 258 bytes.

## 23.4 Address configuration

The on-air radio ADDRESS field is composed of two parts, the base address field and the address prefix field.

The size of the base address field is configurable via BALEN in PCNF1. The base address is truncated from LSByte if the BALEN is less than 4. See [Table 41: Definition of logical addresses](#) on page 211.

The on-air addresses are defined in the BASEn and PREFIXn registers, and it is only when writing these registers the user will have to relate to actual on-air addresses. For other radio address registers such as the TXADDRESS, RXADDRESSES and RXMATCH registers, logical radio addresses ranging from 0 to 7 are being used. The relationship between the on-air radio addresses and the logical addresses is described in [Table 41: Definition of logical addresses](#) on page 211.

**Table 41: Definition of logical addresses**


Logical address	Base address	Prefix byte
0	BASE0	PREFIX0.AP0
1	BASE1	PREFIX0.AP1
2	BASE1	PREFIX0.AP2
3	BASE1	PREFIX0.AP3
4	BASE1	PREFIX1.AP4
5	BASE1	PREFIX1.AP5
6	BASE1	PREFIX1.AP6
7	BASE1	PREFIX1.AP7

## 23.5 Data whitening

The RADIO is able to do packet whitening and de-whitening.

See WHITEEN in PCNF1 register for how to enable whitening. When enabled, whitening and de-whitening will be handled by the RADIO automatically as packets are sent and received.

The whitening word is generated using polynomial  $g(D) = D^7 + D^4 + 1$ , which then is XORed with the data packet that is to be whitened, or de-whitened. See the figure below.

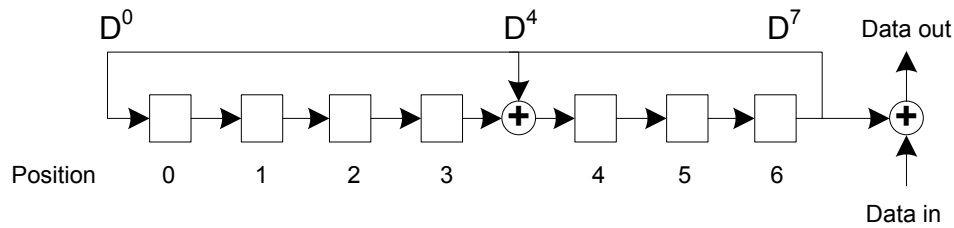

**Figure 34: Data whitening and de-whitening**

Whitening and de-whitening will be performed over the whole packet (except for the preamble and the address field).


The linear feedback shift register, illustrated in [Figure 34: Data whitening and de-whitening](#) on page 212 can be initialised via the DATAWHITEIV register.

## 23.6 CRC

The CRC generator in the RADIO calculates the CRC over the whole packet excluding the preamble. If desirable, the address field can be excluded from the CRC calculation as well

See CRCCNF register for more information.

The CRC polynomial is configurable as illustrated in [Figure 35: CRC generation of an n bit CRC](#) on page 212 where bit 0 in the CRCPOLY register corresponds to  $X^0$  and bit 1 corresponds to  $X^1$  etc. See CRCPOLY for more information.

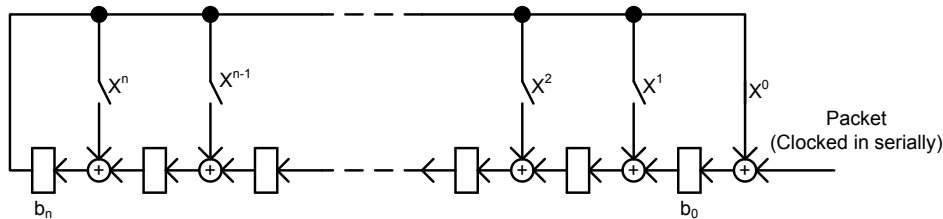

**Figure 35: CRC generation of an n bit CRC**

As illustrated in [Figure 35: CRC generation of an n bit CRC](#) on page 212, the CRC is calculated by feeding the packet serially through the CRC generator. Before the packet is clocked through the CRC generator, the CRC generator's latches  $b_0$  through  $b_n$  will be initialized with a predefined value specified in the CRCINIT register. When the whole packet is clocked through the CRC generator, latches  $b_0$  through  $b_n$  will hold the resulting CRC. This value will be used by the RADIO during both transmission and reception but it is not available to be read by the CPU at any time. A received CRC can however be read by the CPU via the RXCRC register independent of whether or not it has passed the CRC check.

The length ( $n$ ) of the CRC is configurable, see CRCCNF for more information.

After the whole packet including the CRC has been received, the RADIO will generate a CRCOK event if no CRC errors were detected, or alternatively generate a CRCERROR event if CRC errors were detected.

The status of the CRC check can be read from the CRCSTATUS register after a packet has been received.


## 23.7 Radio states

The RADIO can enter a number of states.

The RADIO can enter the states described the table below. An overview state diagram for the RADIO is illustrated in [Figure 36: Radio states](#) on page 213. This figure shows how the tasks and events relate to the RADIO's operation. The RADIO does not prevent a task from being triggered from the wrong state. If a task is triggered from the wrong state, for example if the RXEN task is triggered from the RXDISABLE state, this may lead to incorrect behaviour. As illustrated in [Figure 36: Radio states](#) on page 213, the PAYLOAD event is always generated even if the payload is zero.

**Table 42: RADIO state diagram**

State	Description
DISABLED	No operations are going on inside the radio and the power consumption is at a minimum
RXRU	The radio is ramping up and preparing for reception
RXIDLE	The radio is ready for reception to start
RX	Reception has been started and the addresses enabled in the RXADDRESSES register are being monitored
TXRU	The radio is ramping up and preparing for transmission
TXIDLE	The radio is ready for transmission to start
TX	The radio is transmitting a packet
RXDISABLE	The radio is disabling the receiver
TXDISABLE	The radio is disabling the transmitter

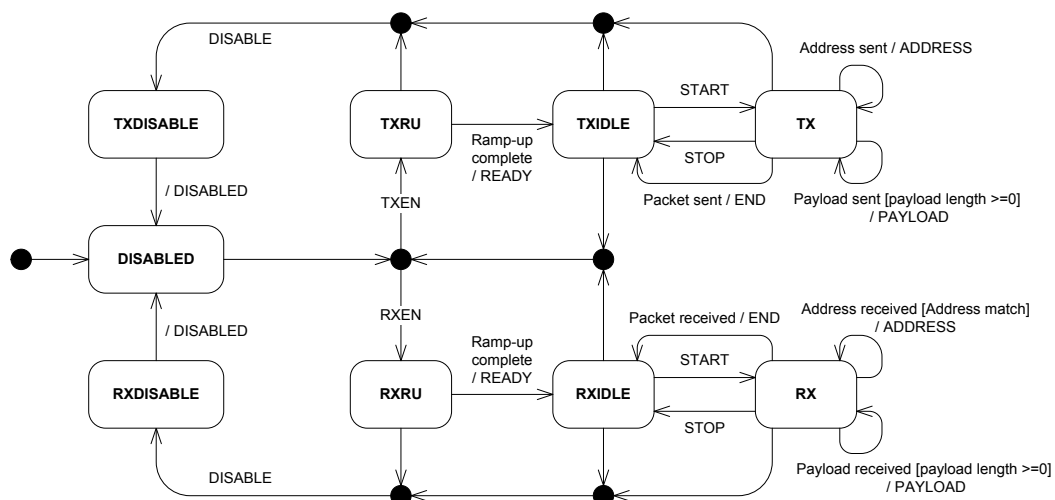

**Figure 36: Radio states**

## 23.8 Transmit sequence


Before the RADIO is able to transmit a packet, it must first ramp-up in TX mode.

See TXRU in [Figure 36: Radio states](#) on page 213 and [Figure 37: Transmit sequence](#) on page 214.

A TXRU ramp-up sequence is initiated when the TXEN task is triggered. After the radio has successfully ramped up it will generate the READY event indicating that a packet transmission can be initiate. A packet transmission is initiated by triggering the START task. As illustrated in [Figure 36: Radio states](#) on page 213 the START task can first be triggered after the RADIO has entered into the TXIDLE state.


[Figure 37: Transmit sequence](#) on page 214 illustrates a single packet transmission where the CPU manually triggers the different tasks needed to control the flow of the RADIO, i.e. no shortcuts are used. If shortcuts are not used, a certain amount of delay caused by CPU execution is expected between READY and START, and between END and DISABLE. As illustrated in [Figure 37: Transmit sequence](#) on page 214

the RADIO will by default transmit '1's between READY and START, and between END and DISABLED. What is transmitted can be programmed through the DTX field in the MODECNF0 register.

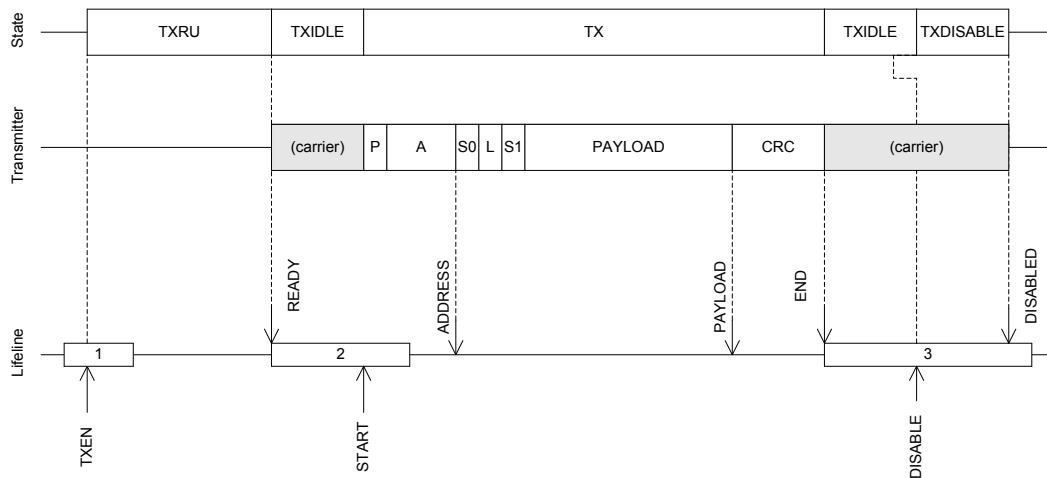


**Figure 37: Transmit sequence**

A slightly modified version of the transmit sequence from [Figure 37: Transmit sequence](#) on page 214 is illustrated in [Figure 38: Transmit sequence using shortcuts to avoid delays](#) on page 214 where the RADIO is configured to use shortcuts between READY and START, and between END and DISABLE, which means that no delay is introduced.

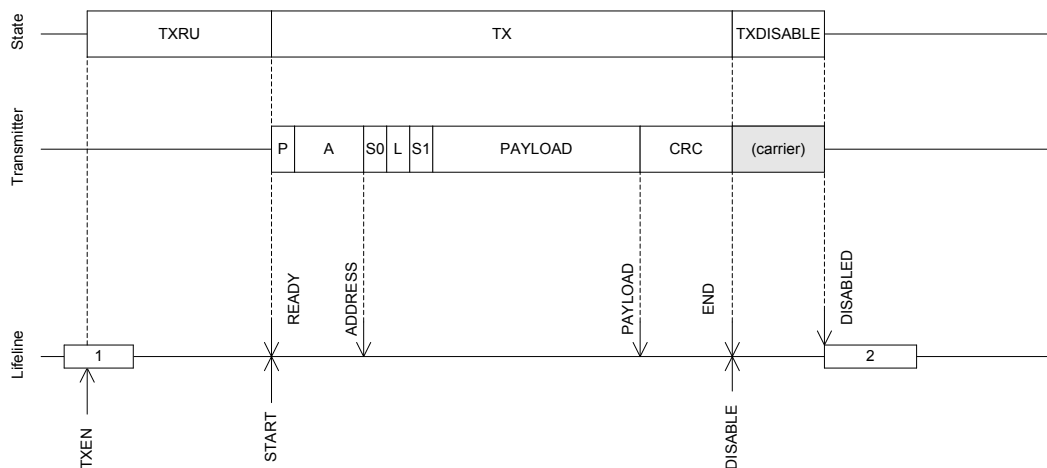

**Figure 38: Transmit sequence using shortcuts to avoid delays**

The RADIO is able to send multiple packets one after the other without having to disable and re-enable the RADIO between packets, this is illustrated in [Figure 39: Transmission of multiple packets](#) on page 215.

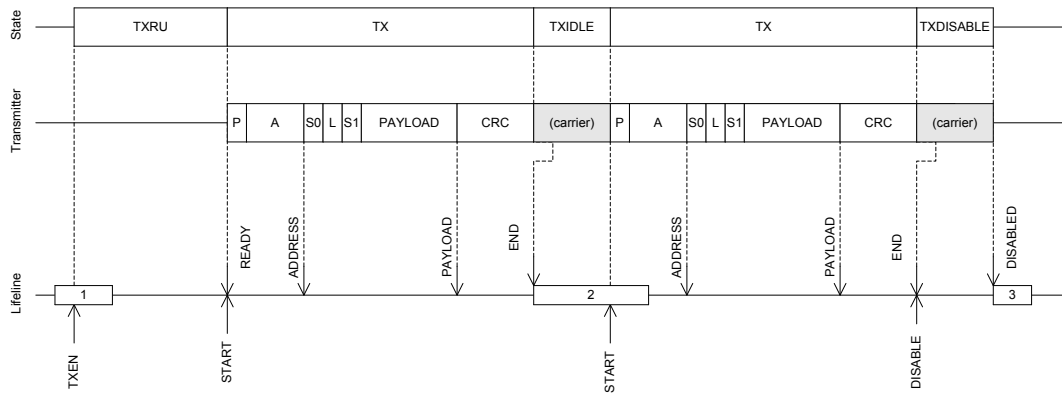

**Figure 39: Transmission of multiple packets**


## 23.9 Receive sequence

Before the RADIO is able to receive a packet, it must first ramp up in RX mode

See RXRU in [Figure 36: Radio states](#) on page 213 and [Figure 40: Receive sequence](#) on page 215.


An RXRU ramp-up sequence is initiated when the RXEN task is triggered. After the radio has successfully ramped up it will generate the READY event indicating that a packet reception can be initiated. A packet reception is initiated by triggering the START task. As illustrated in [Figure 36: Radio states](#) on page 213 the START task can, first be triggered after the RADIO has entered into the RXIDLE state.

[Figure 40: Receive sequence](#) on page 215 illustrates a single packet reception where the CPU manually triggers the different tasks needed to control the flow of the RADIO, i.e. no shortcuts are used. If shortcuts are not used, a certain amount of delay, caused by CPU execution, is expected between READY and START, and between END and DISABLE. As illustrated [Figure 40: Receive sequence](#) on page 215 the RADIO will be listening and possibly receiving undefined data, illustrated with an 'X', from START and until a packet with valid preamble (P) is received.

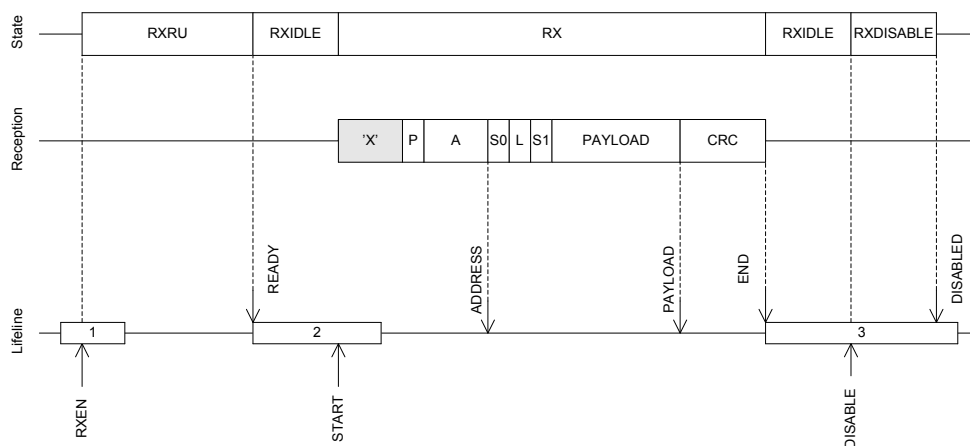


**Figure 40: Receive sequence**

A slightly modified version of the receive sequence from [Figure 40: Receive sequence](#) on page 215 is illustrated in [Figure 41: Receive sequence using shortcuts to avoid delays](#) on page 216 where the RADIO is configured to use shortcuts between READY and START, and between END and DISABLE, which means that no delay is introduced.

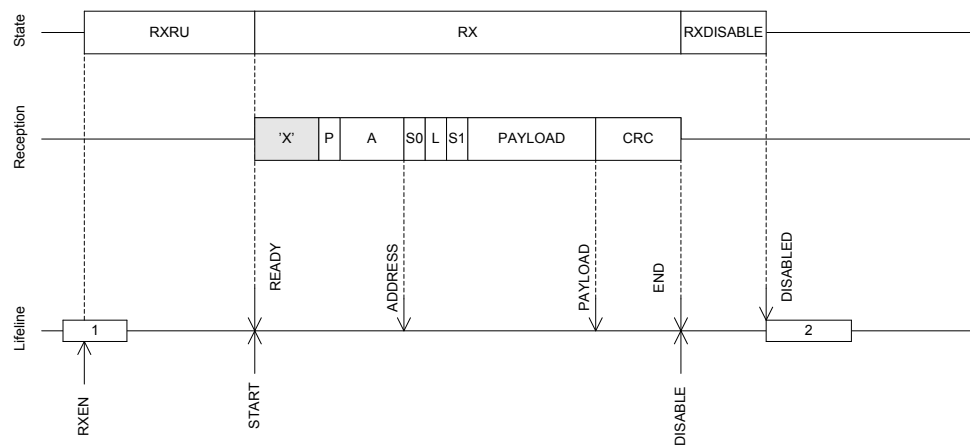

**Figure 41: Receive sequence using shortcuts to avoid delays**

The RADIO is able to receive multiple packets one after the other without having to disable and re-enable the RADIO between packets, this is illustrated [Figure 42: Reception of multiple packets](#) on page 216.

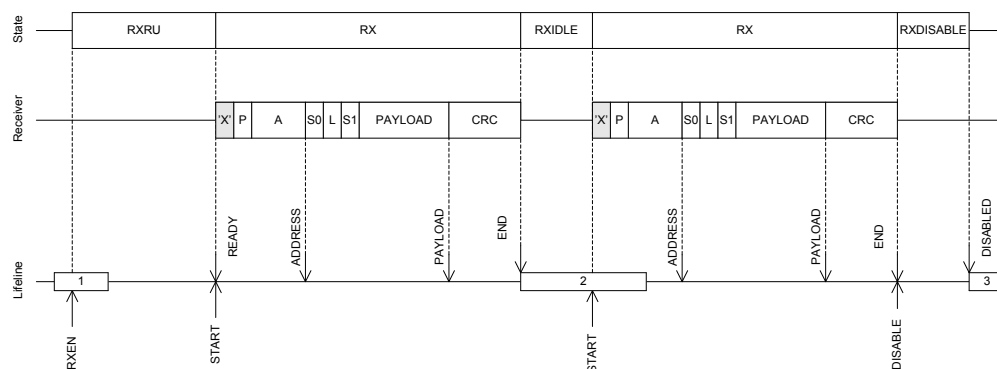

**Figure 42: Reception of multiple packets**

## 23.10 Received Signal Strength Indicator (RSSI)

The radio implements a mechanism for measuring the power in the received radio signal. This feature is called Received Signal Strength Indicator (RSSI).

Sampling of the received signal strength is started by using the RSSISTART task. The sample can be read from the RSSISAMPLE register.

The sample period of the RSSI is defined by  $RSSI_{PERIOD}$ , see the device product specification for details. The RSSI sample will hold the average received signal strength during this sample period.

For the RSSI sample to be valid the radio has to be enabled in receive mode (RXEN task) and the reception has to be started (READY event followed by START task).

## 23.11 Interframe spacing

Interframe spacing is the time interval between two consecutive packets.

It is defined as the time, in micro seconds, from the end of the last bit of the previous packet received and to the start of the first bit of the subsequent packet that is transmitted. The RADIO is able to enforce this



interval as specified in the TIFS register as long as TIFS is not specified to be shorter than the RADIO's turn-around time, i.e. the time needed to switch off the receiver, and switch back on the transmitter.

TIFS is only enforced if `END_DISABLE` and `DISABLED_TXEN` or `END_DISABLE` and `DISABLED_RXEN` shortcuts are enabled. TIFS is only qualified for use in `BLE_1MBIT` mode, and default ramp-up mode.

## 23.12 Device address match

The device address match feature is tailored for address white listing in a Bluetooth Smart and similar implementations.

This feature enables on-the-fly device address matching while receiving a packet on air. This feature only works in receive mode and as long as RADIO is configured for little endian, see `PCNF1.ENDIAN`.

The Device Address match unit assumes that the 48 first bits of the payload is the device address and that bit number 6 in `S0` is the `TxAdd` bit. See the Bluetooth Core Specification for more information about device addresses, `TxAdd` and whitelisting.

The RADIO is able to listen for eight different device addresses at the same time. These addresses are specified in a `DAB/DAP` register pair, one pair per address, in addition to a `TxAdd` bit configured in the `DACNF` register. The `DAB` register specifies the 32 least significant bits of the device address, while the `DAP` register specifies the 16 most significant bits of the device address.

Each of the device addresses can be individually included or excluded from the matching mechanism. This is configured in the `DACNF` register.

## 23.13 Bit counter

The RADIO implements a simple counter that can be configured to generate an event after a specific number of bits have been transmitted or received.

By using shortcuts, this counter can be started from different events generated by the RADIO and hence count relative to these.

The bit counter is started by triggering the `BCSTART` task, and stopped by triggering the `BCSTOP` task. A `BCMATCH` event will be generated when the bit counter has counted the number of bits specified in the `BCC` register. The bit counter will continue to count bits until the `DISABLED` event is generated or until the `BCSTOP` task is triggered. The CPU can therefore, after a `BCMATCH` event, reconfigure the `BCC` value for new `BCMATCH` events within the same packet.

The bit counter can only be started after the RADIO has received the `ADDRESS` event.

The bit counter will stop and reset on `BCSTOP`, `STOP`, `END` and `DISABLE` tasks.

The figure below illustrates how the bit counter can be used to generate a `BCMATCH` event in the beginning of the packet payload, and again generate a second `BCMATCH` event after sending 2 bytes (16 bits) of the payload.

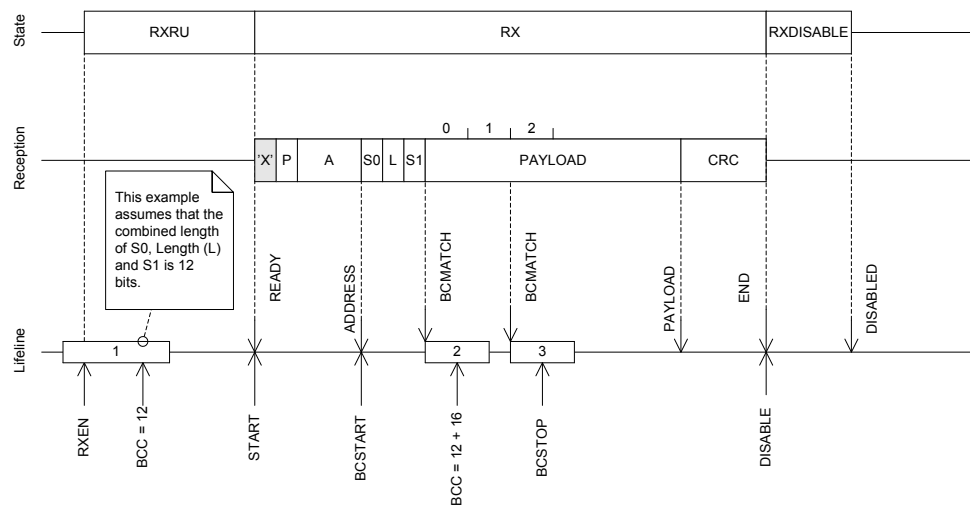


Figure 43: Bit counter example

## 23.14 Registers

Table 43: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40001000	RADIO	RADIO	2.4 GHz radio	

Table 44: Register Overview

Register	Offset	Description
TASKS_TXEN	0x000	Enable RADIO in TX mode
TASKS_RXEN	0x004	Enable RADIO in RX mode
TASKS_START	0x008	Start RADIO
TASKS_STOP	0x00C	Stop RADIO
TASKS_DISABLE	0x010	Disable RADIO
TASKS_RSSISTART	0x014	Start the RSSI and take one single sample of the receive signal strength.
TASKS_RSSISTOP	0x018	Stop the RSSI measurement
TASKS_BCSTART	0x01C	Start the bit counter
TASKS_BCSTOP	0x020	Stop the bit counter
EVENTS_READY	0x100	RADIO has ramped up and is ready to be started
EVENTS_ADDRESS	0x104	Address sent or received
EVENTS_PAYLOAD	0x108	Packet payload sent or received
EVENTS_END	0x10C	Packet sent or received
EVENTS_DISABLED	0x110	RADIO has been disabled
EVENTS_DEVMATCH	0x114	A device address match occurred on the last received packet
EVENTS_DEVMISS	0x118	No device address match occurred on the last received packet
EVENTS_RSSIEND	0x11C	Sampling of receive signal strength complete.
EVENTS_BCMATCH	0x128	Bit counter reached bit count value.
EVENTS_CRCOK	0x130	Packet received with CRC ok
EVENTS_CRCERROR	0x134	Packet received with CRC error
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
CRCSTATUS	0x400	CRC status
RXMATCH	0x408	Received address
RXCRC	0x40C	CRC field of previously received packet

Register	Offset	Description
<a href="#">DAI</a>	0x410	Device address match index
<a href="#">PACKETPTR</a>	0x504	Packet pointer
<a href="#">FREQUENCY</a>	0x508	Frequency
<a href="#">TXPOWER</a>	0x50C	Output power
<a href="#">MODE</a>	0x510	Data rate and modulation
<a href="#">PCNF0</a>	0x514	Packet configuration register 0
<a href="#">PCNF1</a>	0x518	Packet configuration register 1
<a href="#">BASE0</a>	0x51C	Base address 0
<a href="#">BASE1</a>	0x520	Base address 1
<a href="#">PREFIX0</a>	0x524	Prefixes bytes for logical addresses 0-3
<a href="#">PREFIX1</a>	0x528	Prefixes bytes for logical addresses 4-7
<a href="#">TXADDRESS</a>	0x52C	Transmit address select
<a href="#">RXADDRESSES</a>	0x530	Receive address select
<a href="#">CRCCNF</a>	0x534	CRC configuration
<a href="#">CRCPOLY</a>	0x538	CRC polynomial
<a href="#">CRCINIT</a>	0x53C	CRC initial value
	0x540	Reserved
<a href="#">TIFS</a>	0x544	Inter Frame Spacing in us
<a href="#">RSSISAMPLE</a>	0x548	RSSI sample
<a href="#">STATE</a>	0x550	Current radio state
<a href="#">DATAWHITEIV</a>	0x554	Data whitening initial value
<a href="#">BCC</a>	0x560	Bit counter compare
<a href="#">DAB[0]</a>	0x600	Device address base segment 0
<a href="#">DAB[1]</a>	0x604	Device address base segment 1
<a href="#">DAB[2]</a>	0x608	Device address base segment 2
<a href="#">DAB[3]</a>	0x60C	Device address base segment 3
<a href="#">DAB[4]</a>	0x610	Device address base segment 4
<a href="#">DAB[5]</a>	0x614	Device address base segment 5
<a href="#">DAB[6]</a>	0x618	Device address base segment 6
<a href="#">DAB[7]</a>	0x61C	Device address base segment 7
<a href="#">DAP[0]</a>	0x620	Device address prefix 0
<a href="#">DAP[1]</a>	0x624	Device address prefix 1
<a href="#">DAP[2]</a>	0x628	Device address prefix 2
<a href="#">DAP[3]</a>	0x62C	Device address prefix 3
<a href="#">DAP[4]</a>	0x630	Device address prefix 4
<a href="#">DAP[5]</a>	0x634	Device address prefix 5
<a href="#">DAP[6]</a>	0x638	Device address prefix 6
<a href="#">DAP[7]</a>	0x63C	Device address prefix 7
<a href="#">DACNF</a>	0x640	Device address match configuration
<a href="#">MODECNFO</a>	0x650	Radio mode configuration register 0
<a href="#">POWER</a>	0xFFC	Peripheral power control

### 23.14.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					H G F E D C B A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	READY_START				Shortcut between READY event and START task																														
			Disabled	0		See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_START</a>																														
			Enabled	1		Disable shortcut																														
						Enable shortcut																														
B	RW	END_DISABLE				Shortcut between END event and DISABLE task																														
						See <a href="#">EVENTS_END</a> and <a href="#">TASKS_DISABLE</a>																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
C	RW	DISABLED_TXEN						Shortcut between DISABLED event and TXEN task																												
								See <a href="#">EVENTS_DISABLED</a> and <a href="#">TASKS_TXEN</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
D	RW	DISABLED_RXEN						Shortcut between DISABLED event and RXEN task																												
								See <a href="#">EVENTS_DISABLED</a> and <a href="#">TASKS_RXEN</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
E	RW	ADDRESS_RSSISTART						Shortcut between ADDRESS event and RSSISTART task																												
								See <a href="#">EVENTS_ADDRESS</a> and <a href="#">TASKS_RSSISTART</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
F	RW	END_START						Shortcut between END event and START task																												
								See <a href="#">EVENTS_END</a> and <a href="#">TASKS_START</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
G	RW	ADDRESS_BCSTART						Shortcut between ADDRESS event and BCSTART task																												
								See <a href="#">EVENTS_ADDRESS</a> and <a href="#">TASKS_BCSTART</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
H	RW	DISABLED_RSSISTOP						Shortcut between DISABLED event and RSSISTOP task																												
								See <a href="#">EVENTS_DISABLED</a> and <a href="#">TASKS_RSSISTOP</a>																												
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														

### 23.14.2 INTENSET

Address offset: 0x304

### Enable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	L K I H G F E D C B A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	READY				Write '1' to Enable interrupt for READY event																									
						See <a href="#">EVENTS_READY</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									
B	RW	ADDRESS				Write '1' to Enable interrupt for ADDRESS event																									
						See <a href="#">EVENTS_ADDRESS</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									
C	RW	PAYLOAD				Write '1' to Enable interrupt for PAYLOAD event																									
						See <a href="#">EVENTS_PAYLOAD</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									
D	RW	END				Write '1' to Enable interrupt for END event																									



Page 222

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
Id																													L					K				I				H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0												
Id	RW	Field	Value	Id	Value				Description																																								
		Enabled	1						Read: Enabled																																								

## 23.14.4 CRCSTATUS

Address offset: 0x400

CRC status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id				A																																	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>																																<b>Description</b>
A	R	CRCSTATUS																																			CRC status of packet received
		CRRError	0																																		Packet received with CRC error
		CRCOk	1																																		Packet received with CRC ok

## 23.14.5 RXMATCH

Address offset: 0x408

Received address

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A A A																															
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																															
A	R	RXMATCH			Received address																															
					Logical address of which previous packet was received																															

## 23.14.6 RXCRC

Address offset: 0x40C

CRC field of previously received packet

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id														A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	R	RXCRC				CRC field of previously received packet																															
						CRC field of previously received packet																															

## 23.14.7 DAI

Address offset: 0x410

Device address match index

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A A A																															
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	R	DAI					Device address match index																													
							Index (n) of device address, see DAB[n] and DAP[n], that got an address match.																													

## 23.14.8 PACKETPTR

Address offset: 0x504

## Packet pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	PACKETPTR							Packet pointer																											
									Packet address to be used for the next transmission or reception. When transmitting, the packet pointed to by this address will be transmitted and when receiving, the received packet will be written to this address. This address is a byte aligned ram address.																											

## 23.14.9 FREQUENCY

Address offset: 0x508

### Frequency

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												B	A	A	A	A	A	A	A	
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	FREQUENCY			[0..100]	Radio channel frequency																														
						Frequency = 2400 + FREQUENCY (MHz).																														
B	RW	MAP				Channel map selection.																														
			Default		0	Channel map between 2400 MHZ .. 2500 MHz																														
			Low		1	Frequency = 2400 + FREQUENCY (MHz) Channel map between 2360 MHZ .. 2460 MHz																														
						Frequency = 2360 + FREQUENCY (MHz)																														

## 23.14.10 TXPOWER

Address offset: 0x50C

### Output power

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value	Description																															
A	RW	TXPOWER				RADIO output power.																															
						Output power in number of dBm, i.e. if the value -20 is specified the output power will be set to -20dBm.																															
				Pos4dBm	0x04	+4 dBm																															
				Pos3dBm	0x03	+3 dBm																															
				0dBm	0x00	0 dBm																															
				Neg4dBm	0xFC	-4 dBm																															
				Neg8dBm	0xF8	-8 dBm																															
				Neg12dBm	0xF4	-12 dBm																															
				Neg16dBm	0xF0	-16 dBm																															
				Neg20dBm	0xEC	-20 dBm																															
				Neg30dBm	0xD8	-40 dBm																															
				Neg40dBm	0xD8	-40 dBm																															
						Deprecated																															

Deprecated

## 23.14.11 MODE

Address offset: 0x510

### Data rate and modulation



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	MODE				Radio data rate and modulation setting. The radio supports Frequency-shift Keying (FSK) modulation.																														
			Nrf_1Mbit	0		1 Mbit/s Nordic proprietary radio mode																														
			Nrf_2Mbit	1		2 Mbit/s Nordic proprietary radio mode																														
			Nrf_250Kbit	2		250 kbit/s Nordic proprietary radio mode																														
			Ble_1Mbit	3		1 Mbit/s Bluetooth Low Energy																														
			Ble_2Mbit	4		2 Mbit/s Bluetooth Low Energy																														

## 23.14.12 PCNF0

Address offset: 0x514

Packet configuration register 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id													G			F	E	E	E	E								C					A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	LFLEN				Length on air of LENGTH field in number of bits.																																
C	RW	SOLEN				Length on air of S0 field in number of bytes.																																
E	RW	S1LEN				Length on air of S1 field in number of bits.																																
F	RW	S1INCL				Include or exclude S1 field in RAM																																
			Automatic	0		Include S1 field in RAM only if S1LEN > 0																																
			Include	1		Always include S1 field in RAM independent of S1LEN																																
G	RW	PLEN				Length of preamble on air. Decision point: TASKS_START task																																
			8bit	0		8-bit preamble																																
			16bit	1		16-bit preamble																																

## 23.14.13 PCNF1

Address offset: 0x518

Packet configuration register 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					E D																C C C B B B B B B B A A A A A A A A A A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	MAXLEN			[0..255]	Maximum length of packet payload. If the packet payload is larger than MAXLEN, the radio will truncate the payload to MAXLEN.																														
B	RW	STATLEN			[0..255]	Static length in number of bytes  The static length parameter is added to the total length of the payload when sending and receiving packets, e.g. if the static length is set to N the radio will receive or send N bytes more than what is defined in the LENGTH field of the packet.																														
C	RW	BALEN			[2..4]	Base address length in number of bytes  The address field is composed of the base address and the one byte long address prefix, e.g. set BALEN=2 to get a total address of 3 bytes.																														
D	RW	ENDIAN				On air endianness of packet, this applies to the S0, LENGTH, S1 and the PAYLOAD fields.																														
			Little	0		Least Significant bit on air first																														
			Big	1		Most significant bit on air first																														
E	RW	WHITEEN				Enable or disable packet whitening																														
			Disabled	0		Disable																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D																C C C B B B B B B A A A A A A A A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
			Enabled	1				Enable																											

## 23.14.14 BASE0

Address offset: 0x51C

Base address 0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	BASE0						Base address 0																											
								Radio base address 0.																											

## 23.14.15 BASE1

Address offset: 0x520

Base address 1

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

## 23.14.16 PREFIX0

Address offset: 0x524

Prefixes bytes for logical addresses 0-3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id		Value		Description																												
A	RW	AP0						Address prefix 0.																												
B	RW	AP1						Address prefix 1.																												
C	RW	AP2						Address prefix 2.																												
D	RW	AP3						Address prefix 3.																												

## 23.14.17 PREFIX1

Address offset: 0x528

Prefixes bytes for logical addresses 4-7

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value Id</b>		<b>Value</b>		<b>Description</b>																											
A	RW	AP4						Address prefix 4.																											
B	RW	AP5						Address prefix 5.																											
C	RW	AP6						Address prefix 6.																											
D	RW	AP7						Address prefix 7.																											



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Three	3	CRC length is three bytes and CRC calculation is enabled																														
B	RW	SKIPADDR			Include or exclude packet address field out of CRC calculation.																														
			Include	0																															
			Skip	1																													CRC calculation includes address field		
					CRC calculation does not include address field. The CRC calculation will start at the first byte after the address.																														

### 23.14.21 CRCPOLY

Address offset: 0x538

CRC polynomial

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value					Id	Value					Description																													
A	RW	CRCPOLY												CRC polynomial																													

CRC polynomial

Each term in the CRC polynomial is mapped to a bit in this register which index corresponds to the term's exponent. The least significant term/bit is hard-wired internally to 1, and bit number 0 of the register content is ignored by the hardware. The following example is for an 8 bit CRC polynomial:  $x^8 + x^7 + x^3 + x^2 + 1 = 1\ 1000\ 1101$ .

### 23.14.22 CRCINIT

Address offset: 0x53C

CRC initial value

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																								A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>			<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																									
A	RW	CRCINIT																															

CRC initial value

Initial value for CRC calculation.

### 23.14.23 TIFS

Address offset: 0x544

Inter Frame Spacing in us

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																													A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field			Value	Id	Value		Description																													
A	RW	TIFS			Inter Frame Spacing in us																																	

Inter Frame Spacing in us

Inter frame space is the time interval between two consecutive packets. It is defined as the time, in micro seconds, from the end of the last bit of the previous packet to the start of the first bit of the subsequent packet.

### 23.14.24 RSSISAMPLE

Address offset: 0x548

RSSI sample

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	R	RSSISAMPLE		[0..127]	RSSI sample

RSSI sample result. The value of this register is read as a positive value while the actual received signal strength is a negative value. Actual received signal strength is therefore as follows:  
received signal strength = -A dBm

## 23.14.25 STATE

Address offset: 0x550

Current radio state

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	R	STATE			Current radio state
		Disabled	0		RADIO is in the Disabled state
		RxRu	1		RADIO is in the RXRU state
		RxIdle	2		RADIO is in the RXIDLE state
		Rx	3		RADIO is in the RX state
		RxDisable	4		RADIO is in the RXDISABLED state
		TxRu	9		RADIO is in the TXRU state
		TxIdle	10		RADIO is in the TXIDLE state
		Tx	11		RADIO is in the TX state
		TxDisable	12		RADIO is in the TXDISABLED state

## 23.14.26 DATAWHITEIV

Address offset: 0x554

Data whitening initial value

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000040	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	RW	DATAWHITEIV			Data whitening initial value. Bit 6 is hard-wired to '1', writing '0' to it has no effect, and it will always be read back and used by the device as '1'.

Bit 0 corresponds to Position 6 of the LSFR, Bit 1 to Position 5, etc.

## 23.14.27 BCC

Address offset: 0x560

Bit counter compare

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	RW	BCC			Bit counter compare

Bit counter compare register

### 23.14.28 DAB[0]

Address offset: 0x600

Device address base segment 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	DAB						Device address base segment 0																												

### 23.14.29 DAB[1]

Address offset: 0x604

Device address base segment 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	DAB							Device address base segment 1																										

### 23.14.30 DAB[2]

Address offset: 0x608

Device address base segment 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	DAB							Device address base segment 2																										

### 23.14.31 DAB[3]

Address offset: 0x60C

Device address base segment 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	DAB					Device address base segment 3																													

### 23.14.32 DAB[4]

Address offset: 0x610

Device address base segment 4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value				Description																											
A	RW	DAB							Device address base segment 4																											

### 23.14.33 DAB[5]

Address offset: 0x614

Device address base segment 5

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	DAB						Device address base segment 5																												

### 23.14.34 DAB[6]

Address offset: 0x618

Device address base segment 6

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	DAB						Device address base segment 6																												

### 23.14.35 DAB[7]

Address offset: 0x61C

Device address base segment 7

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	RW	DAB						Device address base segment 7																												

### 23.14.36 DAP[0]

Address offset: 0x620

Device address prefix 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																						A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value				Description																											
A	RW	DAP								Device address prefix 0																											

### 23.14.37 DAP[1]

Address offset: 0x624

Device address prefix 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																						A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>					<b>Description</b>																											
A	RW	DAP								Device address prefix 1																											

### 23.14.38 DAP[2]

Address offset: 0x628

Device address prefix 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																						A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value	Description																														
A	RW	DAP				Device address prefix 2																														

### 23.14.39 DAP[3]

Address offset: 0x62C

Device address prefix 3

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	RW	DAP						Device address prefix 3																											

### 23.14.40 DAP[4]

Address offset: 0x630

Device address prefix 4

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																				A A A A A A A A A A A A A A A A																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	DAP							Device address prefix 4																											

### 23.14.41 DAP[5]

Address offset: 0x634

Device address prefix 5

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																				A A A A A A A A A A A A A A A A																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	DAP							Device address prefix 5																											

### 23.14.42 DAP[6]

Address offset: 0x638

Device address prefix 6

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				A A A A A A A A A A A A A A A A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	DAP				Device address prefix 6																													

### 23.14.43 DAP[7]

Address offset: 0x63C

Device address prefix 7

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				A A A A A A A A A A A A A A A A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	DAP				Device address prefix 7																													

### 23.14.44 DACNF

Address offset: 0x640

Device address match configuration



Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					P O N M L K J I H G F E D C B A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	ENA0			Enable or disable device address matching using device address 0																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
B	RW	ENA1			Enable or disable device address matching using device address 1																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
C	RW	ENA2			Enable or disable device address matching using device address 2																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
D	RW	ENA3			Enable or disable device address matching using device address 3																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
E	RW	ENA4			Enable or disable device address matching using device address 4																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
F	RW	ENA5			Enable or disable device address matching using device address 5																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
G	RW	ENA6			Enable or disable device address matching using device address 6																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
H	RW	ENA7			Enable or disable device address matching using device address 7																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
I	RW	TXADD0			TxAdd for device address 0																															
J	RW	TXADD1			TxAdd for device address 1																															
K	RW	TXADD2			TxAdd for device address 2																															
L	RW	TXADD3			TxAdd for device address 3																															
M	RW	TXADD4			TxAdd for device address 4																															
N	RW	TXADD5			TxAdd for device address 5																															
O	RW	TXADD6			TxAdd for device address 6																															
P	RW	TXADD7			TxAdd for device address 7																															

## 23.14.45 MODECNF0

Address offset: 0x650

Radio mode configuration register 0

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id																												C				C				A			
Reset 0x00000200				0 0																																			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	RU				Radio ramp-up time																																	
			Default	0	Default ramp-up time (tRXEN), compatible with firmware written for nRF51																																		
			Fast	1	Fast ramp-up (tRXEN,FAST), see electrical specification for more information																																		

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C C A																															
Reset 0x00000200				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
C	RW	DTX				Default TX value																													
						Specifies what the RADIO will transmit when it is not started, i.e. between:																													
						RADIO.EVENTS_READY and RADIO.TASKS_START																													
						RADIO.EVENTS_END and RADIO.TASKS_START																													
						RADIO.EVENTS_END and RADIO.EVENTS_DISABLED																													
			B1	0		Transmit '1'																													
			B0	1		Transmit '0'																													
			Center	2		Transmit center frequency																													
						When tuning the crystal for centre frequency, the RADIO must be set in DTX = Center mode to be able to achieve the expected accuracy.																													

## 23.14.46 POWER

Address offset: 0xFFC

Peripheral power control

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000001				0 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	POWER				Peripheral power control. The peripheral and its registers will be reset to its initial state by switching the peripheral off and then back on again.																													
			Disabled	0		Peripheral is powered off																													
			Enabled	1		Peripheral is powered on																													

## 23.15 Electrical specification

### 23.15.1 General Radio Characteristics

Symbol	Description	Min.	Typ.	Max.	Units
$f_{OP}$	Operating frequencies	2360		2500	MHz
$f_{PLL,PROG,RES}$	PLL programming resolution		2		kHz
$f_{PLL,CH,SP}$	PLL channel spacing		1		MHz
$f_{\Delta,1M}$	Frequency deviation @ 1 Msps		±170		kHz
$f_{\Delta,BLE,1M}$	Frequency deviation @ BLE 1Msps		±250		kHz
$f_{\Delta,2M}$	Frequency deviation @ 2 Msps		±320		kHz
$f_{\Delta,BLE,2M}$	Frequency deviation @ BLE 2 Msps		±500		kHz
$f_{skSPS}$	On-the-air data rate	1		2	Msps

### 23.15.2 Radio current consumption (Transmitter)

Symbol	Description	Min.	Typ.	Max.	Units
$I_{TX,PLUS4dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = +4$ dBm		7.5		mA
$I_{TX,PLUS4dBm}$	TX only run current $P_{RF} = +4$ dBm		16.6		mA
$I_{TX,0dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = 0$ dBm		5.3		mA
$I_{TX,0dBm}$	TX only run current $P_{RF} = 0$ dBm		11.6		mA
$I_{TX,MINUS4dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -4$ dBm		4.2		mA
$I_{TX,MINUS4dBm}$	TX only run current $P_{RF} = -4$ dBm		9.3		mA
$I_{TX,MINUS8dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -8$ dBm		3.8		mA

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>TX,MINUS8dBm</sub>	TX only run current $P_{RF} = -8$ dBm		8.4		mA
I <sub>TX,MINUS12dBm,DCDC</sub>	TX only run current DCDC, 3V $P_{RF} = -12$ dBm		3.5		mA
I <sub>TX,MINUS12dBm</sub>	TX only run current $P_{RF} = -12$ dBm		7.7		mA
I <sub>TX,MINUS16dBm,DCDC</sub>	TX only run current DCDC, 3V $P_{RF} = -16$ dBm		3.3		mA
I <sub>TX,MINUS16dBm</sub>	TX only run current $P_{RF} = -16$ dBm		7.3		mA
I <sub>TX,MINUS20dBm,DCDC</sub>	TX only run current DCDC, 3V $P_{RF} = -20$ dBm		3.2		mA
I <sub>TX,MINUS20dBm</sub>	TX only run current $P_{RF} = -20$ dBm		7.0		mA
I <sub>TX,MINUS40dBm,DCDC</sub>	TX only run current DCDC, 3V $P_{RF} = -40$ dBm		2.7		mA
I <sub>TX,MINUS40dBm</sub>	TX only run current $P_{RF} = -40$ dBm		5.9		mA
I <sub>START,TX,DCDC</sub>	TX start-up current DCDC, 3V, $P_{RF} = 4$ dBm		4.0		mA
I <sub>START,TX</sub>	TX start-up current, $P_{RF} = 4$ dBm		8.8		mA

### 23.15.3 Radio current consumption (Receiver)

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RX,1M,DCDC</sub>	RX only run current (DCDC, 3V) 1Msps / 1Msps BLE		5.4		mA
I <sub>RX,1M</sub>	RX only run current 1Msps / 1Msps BLE		11.7		mA
I <sub>RX,2M,DCDC</sub>	RX only run current (DCDC, 3V) 2Msps / 2Msps BLE		5.8		mA
I <sub>RX,2M</sub>	RX only run current 2Msps / 2Msps BLE		12.9		mA
I <sub>START,RX,DCDC</sub>	RX start-up current (DCDC 3V)		3.5		mA
I <sub>START,RX,LDO</sub>	RX start-up current (LDO 3V)		7.5		mA

### 23.15.4 Transmitter specification

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>RF</sub>	Maximum output power		4	6	dBm
P <sub>RFC</sub>	RF power control range		24		dB
P <sub>RFCR</sub>	RF power accuracy			±4	dB
P <sub>RF1,1</sub>	1st Adjacent Channel Transmit Power 1 MHz (1 Msps Nordic proprietary mode)		-25		dBc
P <sub>RF2,1</sub>	2nd Adjacent Channel Transmit Power 2 MHz (1 Msps Nordic proprietary mode)		-50		dBc
P <sub>RF1,2</sub>	1st Adjacent Channel Transmit Power 2 MHz (2 Msps Nordic proprietary mode)		-25		dBc
P <sub>RF2,2</sub>	2nd Adjacent Channel Transmit Power 4 MHz (2 Msps Nordic proprietary mode)		-50		dBc
P <sub>RF1,2,BLE</sub>	1st Adjacent Channel Transmit Power 2 MHz (2 Msps BLE mode)		-20		dBc
P <sub>RF2,2,BLE</sub>	2nd Adjacent Channel Transmit Power 4 MHz (2 Msps BLE mode)		-50		dBc

### 23.15.5 Receiver operation

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>RX,MAX</sub>	Maximum received signal strength at < 0.1% BER		0		dBm
P <sub>SENS,IT,1M</sub>	Sensitivity, 1Msps nRF mode <sup>16</sup>		-93		dBm
P <sub>SENS,IT,SP,1M,BLE</sub>	Sensitivity, 1Msps BLE ideal transmitter, ≤37 bytes BER=1E-3 <sup>17</sup>		-96		dBm
P <sub>SENS,IT,LP,1M,BLE</sub>	Sensitivity, 1Msps BLE ideal transmitter ≥128 bytes BER=1E-4 <sup>18</sup>		-95		dBm
P <sub>SENS,IT,2M</sub>	Sensitivity, 2Msps nRF mode <sup>19</sup>		-89		dBm

<sup>16</sup> Typical sensitivity applies when ADDR0 is used for receiver address correlation. When ADDR[1...7] are used for receiver address correlation, the typical sensitivity for this mode is degraded by 3dB.

<sup>17</sup> As defined in the Bluetooth Core Specification v4.0 Volume 6: Core System Package (Low Energy Controller Volume)

<sup>18</sup> Equivalent BER limit < 10E-04

<sup>19</sup> Typical sensitivity applies when ADDR0 is used for receiver address correlation. When ADDR[1...7] are used for receiver address correlation, the typical sensitivity for this mode is degraded by 3dB.

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>SENS,IT,SP,2M,BLE</sub>	Sensitivity, 2Msps BLE ideal transmitter, Packet length <=37bytes		-93		dBm
P <sub>SENS,DT,SP,2M,BLE</sub>	Sensitivity, 2Msps BLE dirty transmitter, Packet length <=37bytes		-93		dBm
P <sub>SENS,IT,LP,2M,BLE</sub>	Sensitivity, 2Msps BLE ideal transmitter >= 128bytes		-92		dBm
P <sub>SENS,DT,LP,2M,BLE</sub>	Sensitivity, 2Msps BLE dirty transmitter, Packet length >= 128bytes		-92		dBm

## 23.15.6 RX selectivity

RX selectivity with equal modulation on interfering signal<sup>20</sup>

Symbol	Description	Min.	Typ.	Max.	Units
C/I <sub>1M,co-channel</sub>	1Msps mode, Co-Channel interference		9		dB
C/I <sub>1M,-1MHz</sub>	1 Msps mode, Adjacent (-1 MHz) interference		-2		dB
C/I <sub>1M,+1MHz</sub>	1 Msps mode, Adjacent (+1 MHz) interference		-10		dB
C/I <sub>1M,-2MHz</sub>	1 Msps mode, Adjacent (-2 MHz) interference		-19		dB
C/I <sub>1M,+2MHz</sub>	1 Msps mode, Adjacent (+2 MHz) interference		-42		dB
C/I <sub>1M,-3MHz</sub>	1 Msps mode, Adjacent (-3 MHz) interference		-38		dB
C/I <sub>1M,+3MHz</sub>	1 Msps mode, Adjacent (+3 MHz) interference		-48		dB
C/I <sub>1M,±6MHz</sub>	1 Msps mode, Adjacent (≥6 MHz) interference		-50		dB
C/I <sub>1MBLE,co-channel</sub>	1 Msps BLE mode, Co-Channel interference		6		dB
C/I <sub>1MBLE,-1MHz</sub>	1 Msps BLE mode, Adjacent (-1 MHz) interference		-2		dB
C/I <sub>1MBLE,+1MHz</sub>	1 Msps BLE mode, Adjacent (+1 MHz) interference		-9		dB
C/I <sub>1MBLE,-2MHz</sub>	1 Msps BLE mode, Adjacent (-2 MHz) interference		-22		dB
C/I <sub>1MBLE,+2MHz</sub>	1 Msps BLE mode, Adjacent (+2 MHz) interference		-46		dB
C/I <sub>1MBLE,&gt;3MHz</sub>	1 Msps BLE mode, Adjacent (≥3 MHz) interference		-50		dB
C/I <sub>1MBLE,image</sub>	Image frequency Interference		-22		dB
C/I <sub>1MBLE,image,1MHz</sub>	Adjacent (1 MHz) interference to in-band image frequency		-35		dB
C/I <sub>2M,co-channel</sub>	2Msps mode, Co-Channel interference		10		dB
C/I <sub>2M,-2MHz</sub>	2 Msps mode, Adjacent (-2 MHz) interference		6		dB
C/I <sub>2M,+2MHz</sub>	2 Msps mode, Adjacent (+2 MHz) interference		-14		dB
C/I <sub>2M,-4MHz</sub>	2 Msps mode, Adjacent (-4 MHz) interference		-20		dB
C/I <sub>2M,+4MHz</sub>	2 Msps mode, Adjacent (+4 MHz) interference		-44		dB
C/I <sub>2M,-6MHz</sub>	2 Msps mode, Adjacent (-6 MHz) interference		-42		dB
C/I <sub>2M,+6MHz</sub>	2 Msps mode, Adjacent (+6 MHz) interference		-47		dB
C/I <sub>2M,≥12MHz</sub>	2 Msps mode, Adjacent (≥12 MHz) interference		-52		dB
C/I <sub>2MBLE,co-channel</sub>	2 Msps BLE mode, Co-Channel interference		7		dB
C/I <sub>2MBLE,±2MHz</sub>	2 Msps BLE mode, Adjacent (±2 MHz) interference		0		dB
C/I <sub>2MBLE,±4MHz</sub>	2 Msps BLE mode, Adjacent (±4 MHz) interference		-47		dB
C/I <sub>2MBLE,≥6MHz</sub>	2 Msps BLE mode, Adjacent (≥6 MHz) interference		-49		dB
C/I <sub>2MBLE,image</sub>	Image frequency Interference		-21		dB
C/I <sub>2MBLE,image,2MHz</sub>	Adjacent (2 MHz) interference to in-band image frequency		-36		dB

## 23.15.7 RX intermodulation

RX intermodulation<sup>21</sup>

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>IMD,1M</sub>	IMD performance, 1 Msps (3 MHz, 4 MHz, and 5 MHz offset)		-33		dBm
P <sub>IMD,1M,BLE</sub>	IMD performance, BLE 1 Msps (3 MHz, 4 MHz, and 5 MHz offset)		-30		dBm
P <sub>IMD,2M</sub>	IMD performance, 2 Msps (6 MHz, 8 MHz, and 10 MHz offset)		-33		dBm

<sup>20</sup> Wanted signal level at PIN = -67 dBm. One interferer is used, having equal modulation as the wanted signal. The input power of the interferer where the sensitivity equals BER = 0.1% is presented

<sup>21</sup> Wanted signal level at PIN = -64 dBm. Two interferers with equal input power are used. The interferer closest in frequency is not modulated, the other interferer is modulated equal with the wanted signal. The input power of the interferers where the sensitivity equals BER = 0.1% is presented.

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>IMD,2M,BLE</sub>	IMD performance, BLE 2 Msps (6 MHz, 8 MHz, and 10 MHz offset)		-32		dBm

## 23.15.8 Radio timing

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TXEN</sub>	Time between TXEN task and READY event after channel FREQUENCY configured		140		us
t <sub>TXEN,FAST</sub>	Time between TXEN task and READY event after channel FREQUENCY configured (Fast Mode)		40		us
t <sub>TXDISABLE</sub>	Time between DISABLE task and DISABLED event when the radio was in TX and mode is set to 1Msps		6		us
t <sub>TXDISABLE,2M</sub>	Time between DISABLE task and DISABLED event when the radio was in TX and mode is set to 2Msps		4		us
t <sub>RXEN</sub>	Time between the RXEN task and READY event after channel FREQUENCY configured in default mode		140		us
t <sub>RXEN,FAST</sub>	Time between the RXEN task and READY event after channel FREQUENCY configured in fast mode		40		us
t <sub>SWITCH</sub>	The minimum time taken to switch from RX to TX or TX to RX (channel FREQUENCY unchanged)		20		us
t <sub>RXDISABLE</sub>	Time between DISABLE task and DISABLED event when the radio was in RX		0		us
t <sub>TXCHAIN</sub>	TX chain delay		0.6		us
t <sub>RXCHAIN</sub>	RX chain delay		9.4		us
t <sub>RXCHAIN,2M</sub>	RX chain delay in 2Msps mode		5		us

## 23.15.9 Received Signal Strength Indicator (RSSI) specifications

Symbol	Description	Min.	Typ.	Max.	Units
RSSI <sub>ACC</sub>	RSSI Accuracy Valid range -90 to -20 dBm		±2		dB
RSSI <sub>RESOLUTION</sub>	RSSI resolution		1		dB
RSSI <sub>PERIOD</sub>	Sample period		0.25		us

## 23.15.10 Jitter


Symbol	Description	Min.	Typ.	Max.	Units
t <sub>DISABLED</sub> JITTER	Jitter on DISABLED event relative to END event when shortcut between END and DISABLE is enabled.		0.25		us
t <sub>READY</sub> JITTER	Jitter on READY event relative to TXEN and RXEN task.		0.25		us

## 23.15.11 Delay when disabling the RADIO

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TXDISABLE,1M</sub>	Disable delay from TX.  Delay between DISABLE and DISABLED for MODE = Nrf_1Mbit and MODE = Ble_1Mbit		6		us
t <sub>RXDISABLE,1M</sub>	Disable delay from RX.  Delay between DISABLE and DISABLED for MODE = Nrf_1Mbit and MODE = Ble_1Mbit		0		us

## 24 TIMER — Timer/counter

The TIMER can operate in two modes: timer and counter.

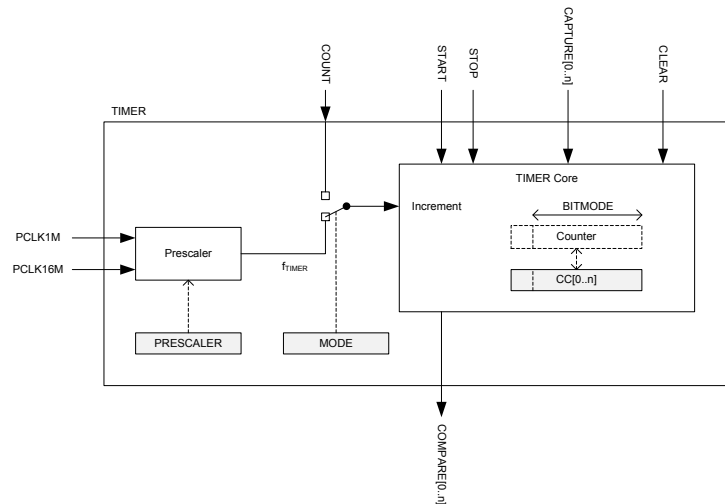

**Figure 44: Block schematic for timer/counter**

The timer/counter runs on the high-frequency clock source (HFCLK) and includes a four-bit (1/2X) prescaler that can divide the timer input clock from the HFCLK controller. Clock source selection between PCLK16M and PCLK1M is automatic according to TIMER base frequency set by the prescaler. The TIMER base frequency is always given as 16 MHz divided by the prescaler value.

The PPI system allows a TIMER event to trigger a task of any other system peripheral of the device. The PPI system also enables the TIMER task/event features to generate periodic output and PWM signals to any GPIO. The number of input/outputs used at the same time is limited by the number of GPIOTE channels.

The TIMER can operate in two modes, Timer mode and Counter mode. In both modes, the TIMER is started by triggering the START task, and stopped by triggering the STOP task. After the timer is stopped the timer can resume timing/counting by triggering the START task again. When timing/counting is resumed, the timer will continue from the value it had prior to being stopped.

In Timer mode, the TIMER's internal Counter register is incremented by one for every tick of the timer frequency  $f_{\text{TIMER}}$  as illustrated in [Figure 44: Block schematic for timer/counter](#) on page 238. The timer frequency is derived from PCLK16M as shown below, using the values specified in the PRESCALER register:

$$f_{\text{TIMER}} = 16 \text{ MHz} / (2^{\text{PRESCALER}})$$

When  $f_{\text{TIMER}} \leq 1 \text{ MHz}$  the TIMER will use PCLK1M instead of PCLK16M for reduced power consumption.

In counter mode, the TIMER's internal Counter register is incremented by one each time the COUNT task is triggered, that is, the timer frequency and the prescaler are not utilized in counter mode. Similarly, the COUNT task has no effect in Timer mode.

The TIMER's maximum value is configured by changing the bit-width of the timer in the [BITMODE](#) on page 243 register.

[PRESCALER](#) on page 243 and the [BITMODE](#) on page 243 must only be updated when the timer is stopped. If these registers are updated while the TIMER is started then this may result in unpredictable behavior.

When the timer is incremented beyond its maximum value the Counter register will overflow and the TIMER will automatically start over from zero.

The Counter register can be cleared, that is, its internal value set to zero explicitly, by triggering the CLEAR task.

The TIMER implements multiple capture/compare registers.

Independent of prescaler setting the accuracy of the TIMER is equivalent to one tick of the timer frequency  $f_{\text{TIMER}}$  as illustrated in [Figure 44: Block schematic for timer/counter](#) on page 238.

## 24.1 Capture

The TIMER implements one capture task for every available capture/compare register.

Every time the CAPTURE[n] task is triggered, the Counter value is copied to the CC[n] register.

## 24.2 Compare

The TIMER implements one COMPARE event for every available capture/compare register.

A COMPARE event is generated when the Counter is incremented and then becomes equal to the value specified in one of the capture compare registers. When the Counter value becomes equal to the value specified in a capture compare register CC[n], the corresponding compare event COMPARE[n] is generated.

[BITMODE](#) on page 243 specifies how many bits of the Counter register and the capture/compare register that are used when the comparison is performed. Other bits will be ignored.

## 24.3 Task delays

After the TIMER is started, the CLEAR task, COUNT task and the STOP task will guarantee to take effect within one clock cycle of the PCLK16M.

## 24.4 Task priority

If the START task and the STOP task are triggered at the same time, that is, within the same period of PCLK16M, the STOP task will be prioritized.

## 24.5 Registers

**Table 45: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40008000	TIMER	TIMER0	Timer 0	This timer instance has 4 CC registers (CC[0..3])
0x40009000	TIMER	TIMER1	Timer 1	This timer instance has 4 CC registers (CC[0..3])
0x4000A000	TIMER	TIMER2	Timer 2	This timer instance has 4 CC registers (CC[0..3])
0x4001A000	TIMER	TIMER3	Timer 3	This timer instance has 6 CC registers (CC[0..5])
0x4001B000	TIMER	TIMER4	Timer 4	This timer instance has 6 CC registers (CC[0..5])

**Table 46: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start Timer

Register	Offset	Description
TASKS_STOP	0x004	Stop Timer
TASKS_COUNT	0x008	Increment Timer (Counter mode only)
TASKS_CLEAR	0x00C	Clear time
TASKS_SHUTDOWN	0x010	Shut down timer <span>Deprecated</span>
TASKS_CAPTURE[0]	0x040	Capture Timer value to CC[0] register
TASKS_CAPTURE[1]	0x044	Capture Timer value to CC[1] register
TASKS_CAPTURE[2]	0x048	Capture Timer value to CC[2] register
TASKS_CAPTURE[3]	0x04C	Capture Timer value to CC[3] register
TASKS_CAPTURE[4]	0x050	Capture Timer value to CC[4] register
TASKS_CAPTURE[5]	0x054	Capture Timer value to CC[5] register
EVENTS_COMPARE[0]	0x140	Compare event on CC[0] match
EVENTS_COMPARE[1]	0x144	Compare event on CC[1] match
EVENTS_COMPARE[2]	0x148	Compare event on CC[2] match
EVENTS_COMPARE[3]	0x14C	Compare event on CC[3] match
EVENTS_COMPARE[4]	0x150	Compare event on CC[4] match
EVENTS_COMPARE[5]	0x154	Compare event on CC[5] match
<b>SHORTS</b>	0x200	Shortcut register
<b>INTENSET</b>	0x304	Enable interrupt
<b>INTENCLR</b>	0x308	Disable interrupt
<b>MODE</b>	0x504	Timer mode selection
<b>BITMODE</b>	0x508	Configure the number of bits used by the TIMER
<b>PRESCALER</b>	0x510	Timer prescaler register
<b>CC[0]</b>	0x540	Capture/Compare register 0
<b>CC[1]</b>	0x544	Capture/Compare register 1
<b>CC[2]</b>	0x548	Capture/Compare register 2
<b>CC[3]</b>	0x54C	Capture/Compare register 3
<b>CC[4]</b>	0x550	Capture/Compare register 4
<b>CC[5]</b>	0x554	Capture/Compare register 5

## 24.5.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	COMPARE0_CLEAR			Shortcut between COMPARE[0] event and CLEAR task																														
					See <a href="#">EVENTS_COMPARE[0]</a> and <a href="#">TASKS_CLEAR</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
B	RW	COMPARE1_CLEAR			Shortcut between COMPARE[1] event and CLEAR task																														
					See <a href="#">EVENTS_COMPARE[1]</a> and <a href="#">TASKS_CLEAR</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
C	RW	COMPARE2_CLEAR			Shortcut between COMPARE[2] event and CLEAR task																														
					See <a href="#">EVENTS_COMPARE[2]</a> and <a href="#">TASKS_CLEAR</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
D	RW	COMPARE3_CLEAR			Shortcut between COMPARE[3] event and CLEAR task																														
					See <a href="#">EVENTS_COMPARE[3]</a> and <a href="#">TASKS_CLEAR</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
E	RW	COMPARE4_CLEAR			Shortcut between COMPARE[4] event and CLEAR task																														
					See <a href="#">EVENTS_COMPARE[4]</a> and <a href="#">TASKS_CLEAR</a>																														



Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																					L K J I H G F E D C B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[5] event and CLEAR task																															
					See <a href="#">EVENTS_COMPARE[5]</a> and <a href="#">TASKS_CLEAR</a>																															
F	RW	COMPARE5_CLEAR	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[0] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[0]</a> and <a href="#">TASKS_STOP</a>																															
G	RW	COMPARE0_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[1] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[1]</a> and <a href="#">TASKS_STOP</a>																															
H	RW	COMPARE1_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[2] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[2]</a> and <a href="#">TASKS_STOP</a>																															
I	RW	COMPARE2_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[3] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[3]</a> and <a href="#">TASKS_STOP</a>																															
J	RW	COMPARE3_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[4] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[4]</a> and <a href="#">TASKS_STOP</a>																															
K	RW	COMPARE4_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
					Shortcut between COMPARE[5] event and STOP task																															
					See <a href="#">EVENTS_COMPARE[5]</a> and <a href="#">TASKS_STOP</a>																															
L	RW	COMPARE5_STOP	Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															

## 24.5.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	COMPARE0			Write '1' to Enable interrupt for COMPARE[0] event																														
					See <a href="#">EVENTS_COMPARE[0]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	COMPARE1			Write '1' to Enable interrupt for COMPARE[1] event																														
					See <a href="#">EVENTS_COMPARE[1]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	COMPARE2			Write '1' to Enable interrupt for COMPARE[2] event																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_COMPARE[2]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	COMPARE3			Write '1' to Enable interrupt for COMPARE[3] event																														
					See <a href="#">EVENTS_COMPARE[3]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	COMPARE4			Write '1' to Enable interrupt for COMPARE[4] event																														
					See <a href="#">EVENTS_COMPARE[4]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	COMPARE5			Write '1' to Enable interrupt for COMPARE[5] event																														
					See <a href="#">EVENTS_COMPARE[5]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 24.5.3 INTENCLR

Address offset: 0x308

## Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				F E D C B A																																
Reset 0x00000000				0 0																																
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																															
A	RW	COMPARE0			Write '1' to Disable interrupt for COMPARE[0] event																															
					See <a href="#">EVENTS_COMPARE[0]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
B	RW	COMPARE1			Write '1' to Disable interrupt for COMPARE[1] event																															
					See <a href="#">EVENTS_COMPARE[1]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
C	RW	COMPARE2			Write '1' to Disable interrupt for COMPARE[2] event																															
					See <a href="#">EVENTS_COMPARE[2]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
D	RW	COMPARE3			Write '1' to Disable interrupt for COMPARE[3] event																															
					See <a href="#">EVENTS_COMPARE[3]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
E	RW	COMPARE4			Write '1' to Disable interrupt for COMPARE[4] event																															
					See <a href="#">EVENTS_COMPARE[4]</a>																															
			Clear	1	Disable																															

## 24.5.4 MODE

## Timer mode selection

## 24.5.5 BITMODE

### Configure the number of bits used by the TIMER

## 24.5.6 PRESCALER

Timer prescaler register

### 24.5.7 CC[0]

### Capture/Compare register 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																																
A	RW	CC					Capture/Compare value																																
																												Only the number of bits indicated by BITMODE will be used by the TIMER.											

## 24.5.8 CC[1]

Address offset: 0x544

Capture/Compare register 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value				Description																														
A	RW	CC						Capture/Compare value																														
																									Only the number of bits indicated by BITMODE will be used by the TIMER.													

## 24.5.9 CC[2]

Address offset: 0x548

Capture/Compare register 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																																
A	RW	CC					Capture/Compare value																																
																												Only the number of bits indicated by BITMODE will be used by the TIMER.											

## 24.5.10 CC[3]

Address offset: 0x54C

Capture/Compare register 3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value				Description																															
A	RW	CC						Capture/Compare value																															
																									Only the number of bits indicated by BITMODE will be used by the TIMER.														

## 24.5.11 CC[4]

Address offset: 0x550

Capture/Compare register 4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	CC					Capture/Compare value																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											

Only the number of bits indicated by BITMODE will be used by the TIMER.

## 24.5.12 CC[5]

Address offset: 0x554

Capture/Compare register 5

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											

A RW CC

Capture/Compare value

Only the number of bits indicated by BITMODE will be used by the TIMER.


## 24.6 Electrical specification

### 24.6.1 Timers Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>TIMER_1M</sub>	Run current with 1 MHz clock input (PCLK1M)	3	5	8	μA
I <sub>TIMER_16M</sub>	Run current with 16 MHz clock input (PCLK16M)	50	70	120	μA
t <sub>TIMER,START</sub>	Time from START task is given until timer starts counting		0.25		μs

## 25 RTC — Real-time counter

The Real-time counter (RTC) module provides a generic, low power timer on the low-frequency clock source (LFCLK).

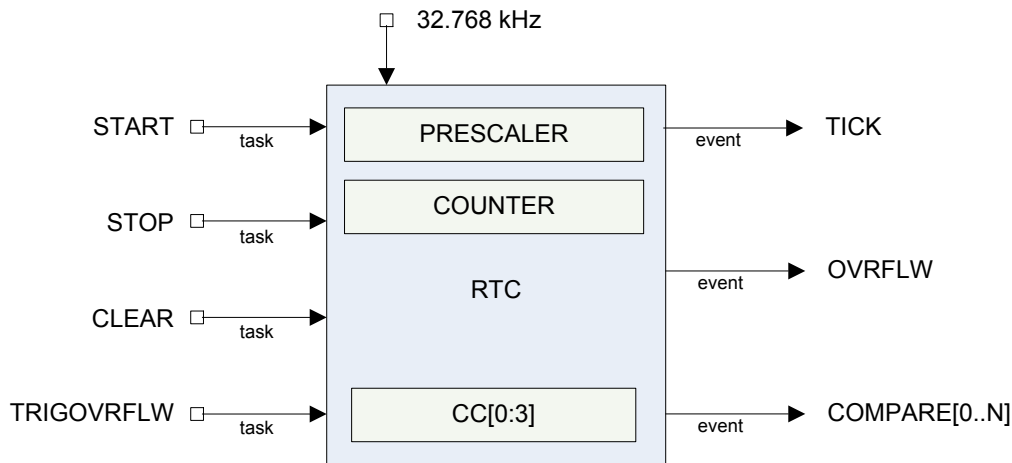

**Figure 45: RTC block schematic**

The RTC module features a 24-bit COUNTER, a 12-bit (1/X) prescaler, capture/compare registers, and a tick event generator for low power, tickless RTOS implementation.

### 25.1 Clock source

The RTC will run off the LFCLK.

The COUNTER resolution will therefore be 30.517  $\mu$ s. Depending on the source, the RTC is able to run while the HFCLK is OFF and PCLK16M is not available.

The software has to explicitly start LFCLK before using the RTC.

See [CLOCK — Clock control](#) on page 104 for more information about clock sources.

### 25.2 Resolution versus overflow and the PRESCALER

Counter increment frequency:

$$f_{\text{RTC}} [\text{kHz}] = 32.768 / (\text{PRESCALER} + 1)$$

The PRESCALER register is read/write when the RTC is stopped. The PRESCALER register is read-only once the RTC is STARTed. Writing to the PRESCALER register when the RTC is started has no effect.

The PRESCALER is restarted on START, CLEAR and TRIGOVFLW, that is, the prescaler value is latched to an internal register (<<PRESC>>) on these tasks.

Examples:

1. Desired COUNTER frequency 100 Hz (10 ms counter period)

$$\text{PRESCALER} = \text{round}(32.768 \text{ kHz} / 100 \text{ Hz}) - 1 = 327$$

$$f_{\text{RTC}} = 99.9 \text{ Hz}$$

10009.576  $\mu$ s counter period

- Desired COUNTER frequency 8 Hz (125 ms counter period)

PRESALER =  $\text{round}(32.768 \text{ kHz} / 8 \text{ Hz}) - 1 = 4095$

$f_{\text{RTC}} = 8 \text{ Hz}$


125 ms counter period

**Table 47: RTC resolution versus overflow**


Prescaler	Counter resolution	Overflow
0	30.517 $\mu$ s	512 seconds
$2^8 - 1$	7812.5 $\mu$ s	131072 seconds
$2^{12} - 1$	125 ms	582.542 hours

## 25.3 COUNTER register

The COUNTER increments on LFCLK when the internal PRESCALER register (<<PRESC>>) is 0x00. <<PRESC>> is reloaded from the PRESCALER register. If enabled, the TICK event occurs on each increment of the COUNTER. The TICK event is disabled by default.

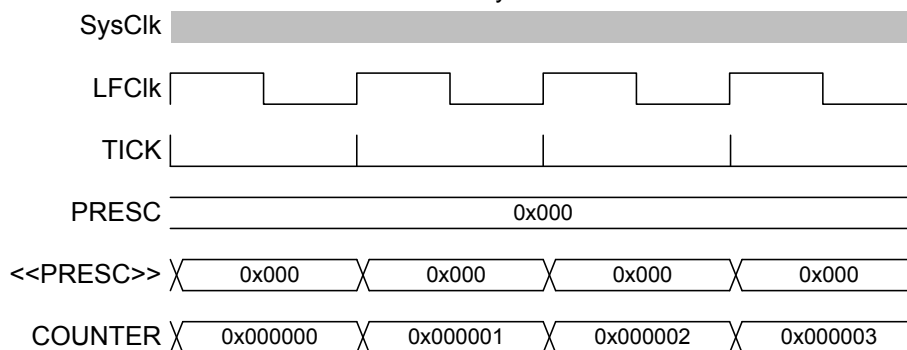

**Figure 46: Timing diagram - COUNTER\_PRESCALER\_0**

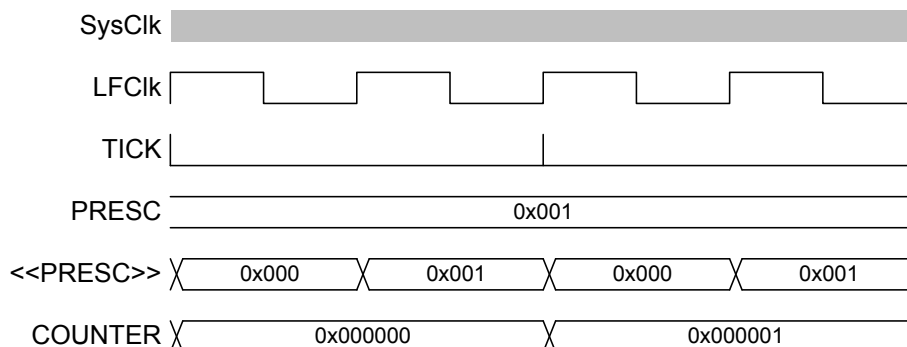

**Figure 47: Timing diagram - COUNTER\_PRESCALER\_1**

## 25.4 Overflow features

The TRIGOVFLW task sets the COUNTER value to 0xFFFFF0 to allow SW test of the overflow condition. OVRFLW occurs when COUNTER overflows from 0xFFFFF to 0.

**Important:** The OVRFLW event is disabled by default.

## 25.5 TICK event

The TICK event enables low power "tick-less" RTOS implementation as it optionally provides a regular interrupt source for a RTOS without the need to use the ARM® SysTick feature.

Using the RTC TICK event rather than the SysTick allows the CPU to be powered down while still keeping RTOS scheduling active.


**Important:** The TICK event is disabled by default.

## 25.6 Event control feature

To optimize RTC power consumption, events in the RTC can be individually disabled to prevent PCLK16M and HFCLK being requested when those events are triggered. This is managed using the EVTEN register.

For example, if the TICK event is not required for an application, this event should be disabled as it is frequently occurring and may increase power consumption if HFCLK otherwise could be powered down for long durations.

This means that the RTC implements a slightly different task and event system compared to the standard system described in [Peripheral interface](#) on page 69. The RTC task and event system is illustrated in [Figure 48: Tasks, events and interrupts in the RTC](#) on page 248.

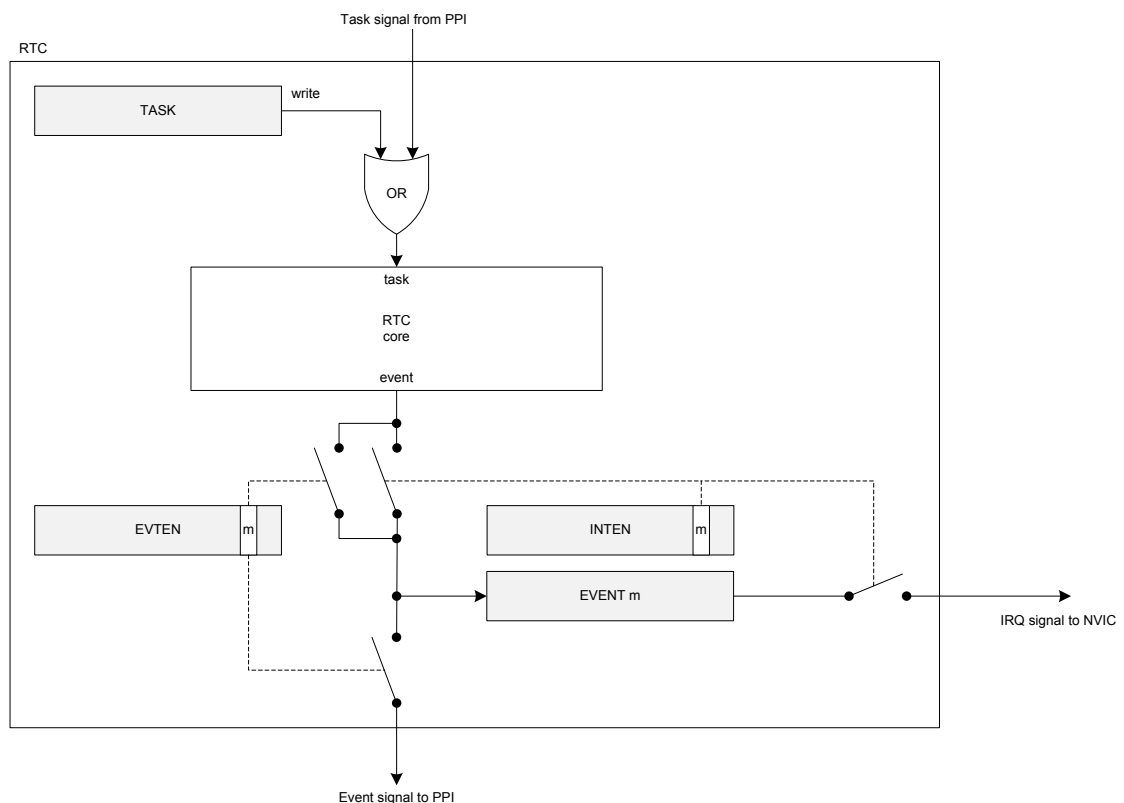

**Figure 48: Tasks, events and interrupts in the RTC**

## 25.7 Compare feature


There are a number of Compare registers.

For more information, see [Registers](#) on page 252.

When setting a compare register, the following behavior of the RTC compare event should be noted:


- If a CC register value is 0 when a CLEAR task is set, this will not trigger a COMPARE event.



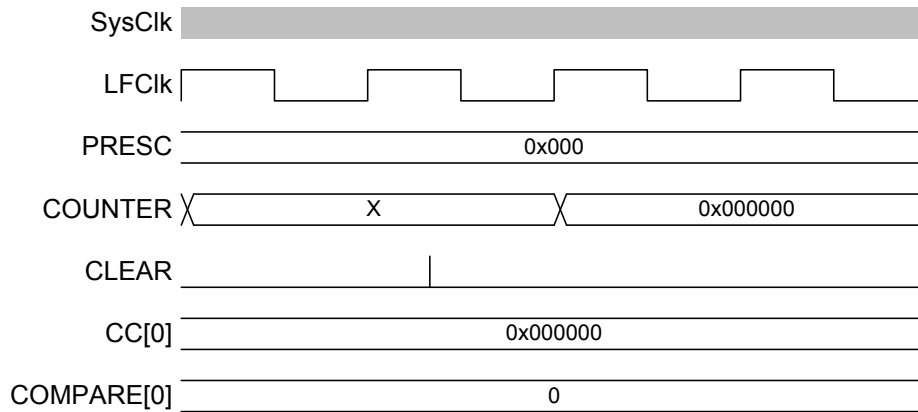


**Figure 49: Timing diagram - COMPARE\_CLEAR**

- If a CC register is N and the COUNTER value is N when the START task is set, this will not trigger a COMPARE event.

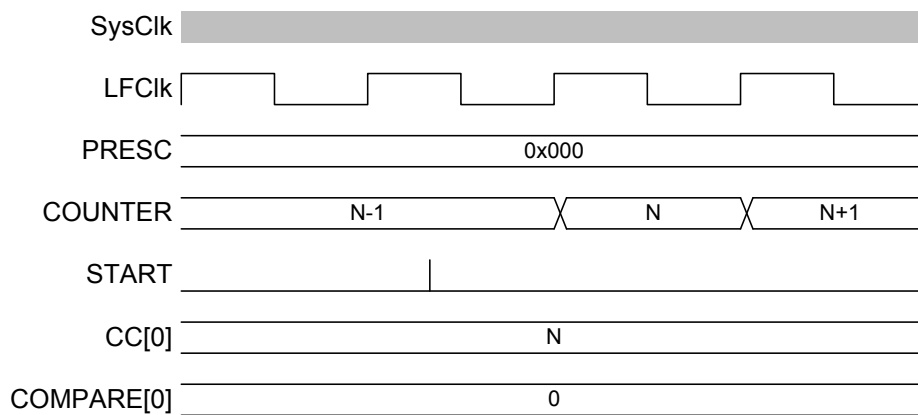


**Figure 50: Timing diagram - COMPARE\_START**

- COMPARE occurs when a CC register is N and the COUNTER value transitions from N-1 to N.

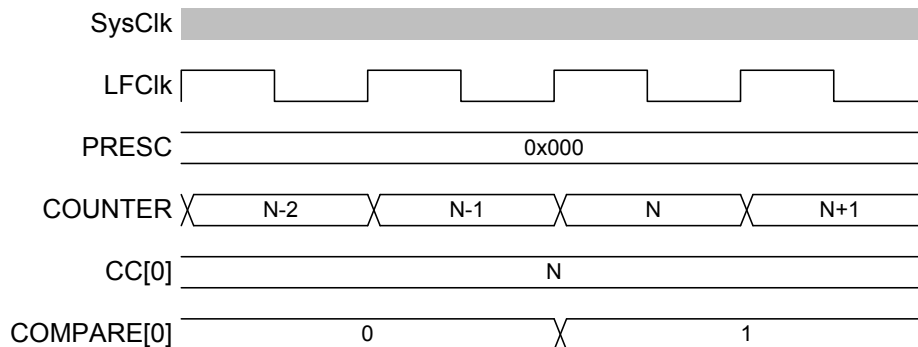


**Figure 51: Timing diagram - COMPARE**

- If the COUNTER is N, writing N+2 to a CC register is guaranteed to trigger a COMPARE event at N+2.

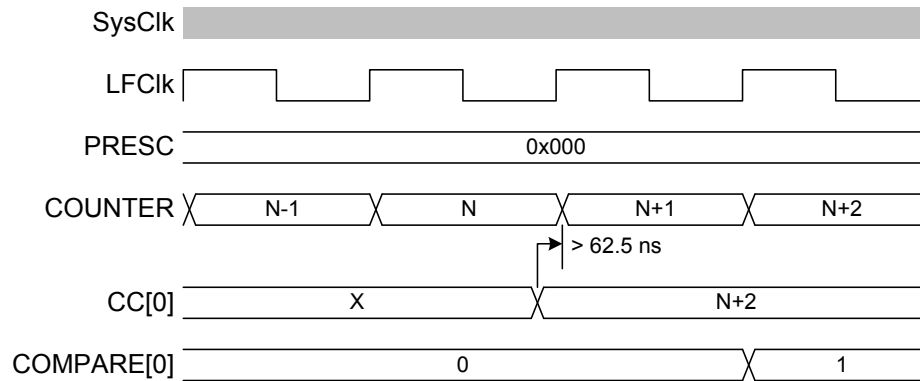


**Figure 52: Timing diagram - COMPARE\_N+2**

- If the COUNTER is N, writing N or N+1 to a CC register may not trigger a COMPARE event.

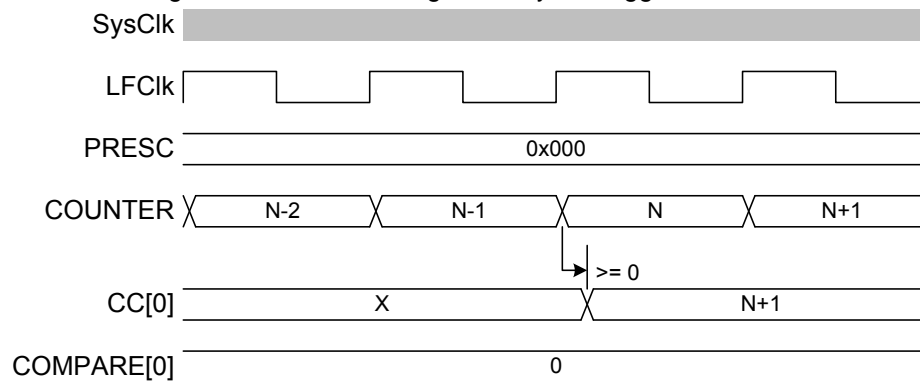

**Figure 53: Timing diagram - COMPARE\_N+1**

- If the COUNTER is N and the current CC register value is N+1 or N+2 when a new CC value is written, a match may trigger on the previous CC value before the new value takes effect. If the current CC value greater than N+2 when the new value is written, there will be no event due to the old value.

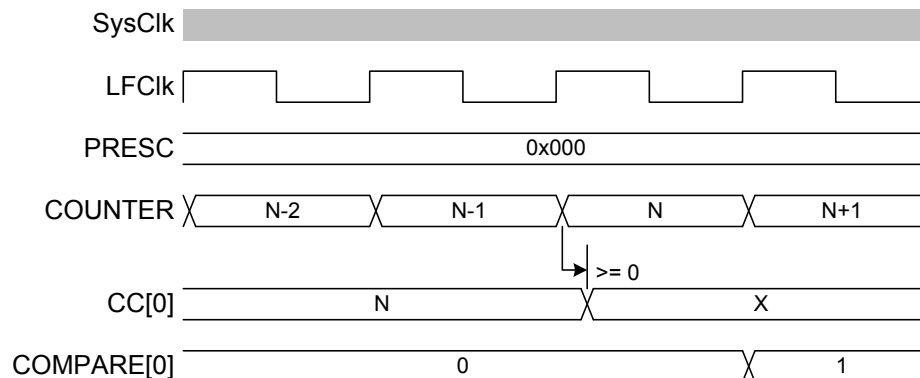

**Figure 54: Timing diagram - COMPARE\_N-1**

## 25.8 TASK and EVENT jitter/delay

Jitter or delay in the RTC is due to the peripheral clock being a low frequency clock (LFCLK) which is not synchronous to the faster PCLK16M.

Registers in the peripheral interface, part of the PCLK16M domain, have a set of mirrored registers in the LFCLK domain. For example, the COUNTER value accessible from the CPU is in the PCLK16M domain and is latched on read from an internal register called COUNTER in the LFCLK domain. COUNTER is the register which is actually modified each time the RTC ticks. These registers must be synchronised between clock domains (PCLK16M and LFCLK).

The following is a summary of the jitter introduced on tasks and events. Figures illustrating jitter follow.



**Table 48: RTC jitter magnitudes on tasks**

Task	Delay
CLEAR, STOP, START, TRIGOVRFLOW	+15 to 46 $\mu$ s

**Table 49: RTC jitter magnitudes on events**

Operation/Function	Jitter
START to COUNTER increment	+/- 15 $\mu$ s
COMPARE to COMPARE <sup>22</sup>	+/- 62.5 ns

1. CLEAR and STOP (and TRIGOVRFLOW; not shown) will be delayed as long as it takes for the peripheral to clock a falling edge and rising of the LFCLK. This is between 15.2585  $\mu$ s and 45.7755  $\mu$ s – rounded to 15  $\mu$ s and 46  $\mu$ s for the remainder of the section.

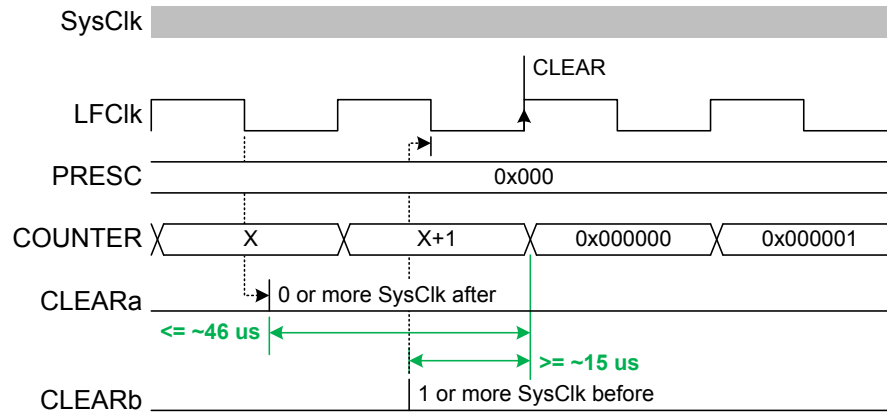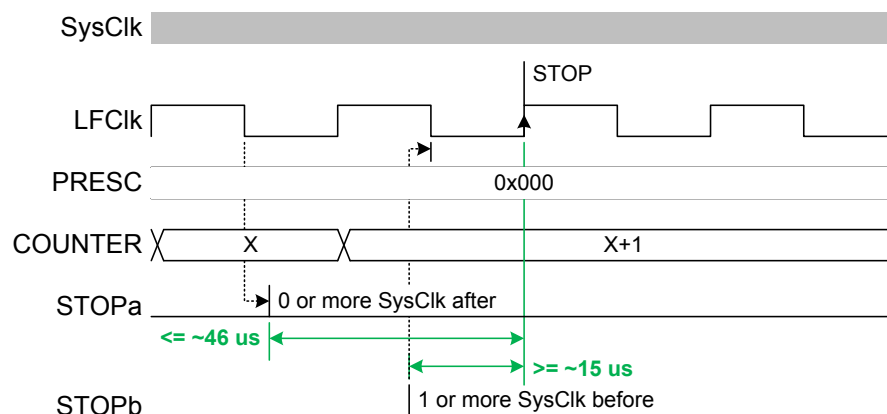
**Figure 55: Timing diagram - DELAY\_CLEAR**

**Figure 56: Timing diagram - DELAY\_STOP**

2. The START task will start the RTC. Assuming that the LFCLK was previously running and stable, the first increment of COUNTER (and instance of TICK event) will be typically after 30.5  $\mu$ s +/- 15  $\mu$ s. In some cases, in particular if the RTC is STARTed before the LFCLK is running, that timing can be up to ~250  $\mu$ s. The software should therefore wait for the first TICK if it has to make sure the RTC is running. Sending a TRIGOVRFLOW task sets the COUNTER to a value close to overflow. However, since the update of COUNTER relies on a stable LFCLK, sending this task while LFCLK is not running will start LFCLK, but the update will then be delayed by the same amount of time of up to ~250  $\mu$ s. The figures show the smallest and largest delays to on the START task which appears as a +/- 15  $\mu$ s jitter on the first COUNTER increment.

<sup>22</sup> Assumes RTC runs continuously between these events.

**Note:** 32.768 kHz clock jitter is additional to the numbers provided above.

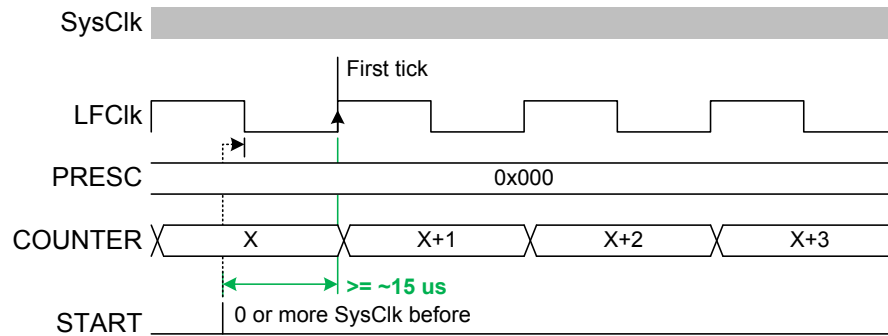


Figure 57: Timing diagram - JITTER\_START-

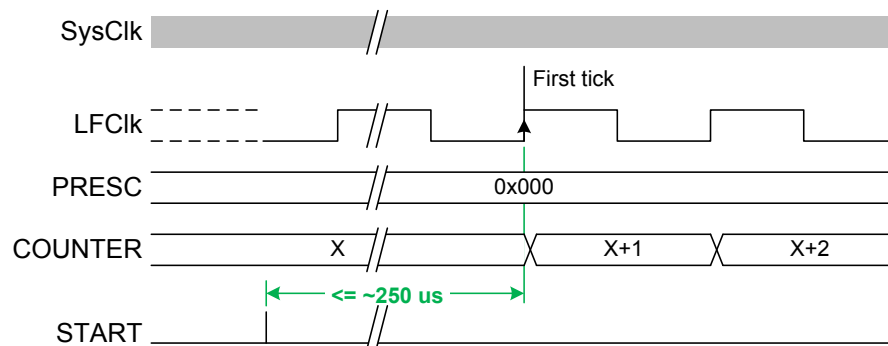


Figure 58: Timing diagram - JITTER\_START+

## 25.9 Reading the COUNTER register

To read the COUNTER register, the internal  $\ll\text{COUNTER}\gg$  value is sampled.

To ensure that the  $\ll\text{COUNTER}\gg$  is safely sampled (considering an LFCLK transition may occur during a read), the CPU and core memory bus are halted for three cycles by lowering the core PREADY signal. The Read takes the CPU 2 cycles in addition resulting in the COUNTER register read taking a fixed five PCLK16M clock cycles.

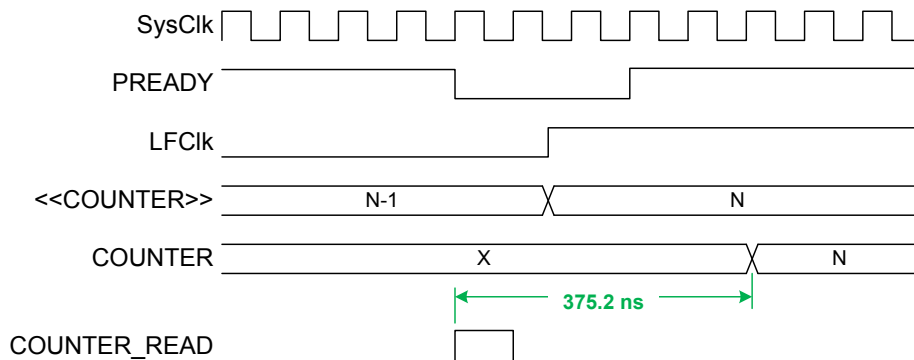


Figure 59: Timing diagram - COUNTER\_READ

## 25.10 Registers

Table 50: Instances

Base address	Peripheral	Instance	Description	Configuration
0x4000B000	RTC	RTC0	Real-time counter 0	CC[0..2] implemented, CC[3] not implemented
0x40011000	RTC	RTC1	Real-time counter 1	CC[0..3] implemented



Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													F	E	D	C													B	A		
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Id	RW	Field	Value	Id	Value	Description
E	RW	COMPARE2				Write '1' to Enable interrupt for COMPARE[2] event
						See <a href="#">EVENTS_COMPARE[2]</a>
		Set	1			Enable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
F	RW	COMPARE3				Write '1' to Enable interrupt for COMPARE[3] event
						See <a href="#">EVENTS_COMPARE[3]</a>
		Set	1			Enable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled

## 25.10.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													F	E	D	C													B	A		
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Id	RW	Field	Value	Id	Value	Description
A	RW	TICK				Write '1' to Disable interrupt for TICK event
						See <a href="#">EVENTS_TICK</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
B	RW	OVRFLW				Write '1' to Disable interrupt for OVRFLW event
						See <a href="#">EVENTS_OVRFLW</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
C	RW	COMPARE0				Write '1' to Disable interrupt for COMPARE[0] event
						See <a href="#">EVENTS_COMPARE[0]</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
D	RW	COMPARE1				Write '1' to Disable interrupt for COMPARE[1] event
						See <a href="#">EVENTS_COMPARE[1]</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
E	RW	COMPARE2				Write '1' to Disable interrupt for COMPARE[2] event
						See <a href="#">EVENTS_COMPARE[2]</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled
F	RW	COMPARE3				Write '1' to Disable interrupt for COMPARE[3] event
						See <a href="#">EVENTS_COMPARE[3]</a>
		Clear	1			Disable
		Disabled	0			Read: Disabled
		Enabled	1			Read: Enabled

### 25.10.3 EVTEN

Address offset: 0x340

Enable or disable event routing

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					F E D C																B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TICK				Enable or disable event routing for TICK event																														
						See <a href="#">EVENTS_TICK</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
B	RW	OVRFLW				Enable or disable event routing for OVRFLW event																														
						See <a href="#">EVENTS_OVRFLW</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
C	RW	COMPARE0				Enable or disable event routing for COMPARE[0] event																														
						See <a href="#">EVENTS_COMPARE[0]</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
D	RW	COMPARE1				Enable or disable event routing for COMPARE[1] event																														
						See <a href="#">EVENTS_COMPARE[1]</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
E	RW	COMPARE2				Enable or disable event routing for COMPARE[2] event																														
						See <a href="#">EVENTS_COMPARE[2]</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
F	RW	COMPARE3				Enable or disable event routing for COMPARE[3] event																														
						See <a href="#">EVENTS_COMPARE[3]</a>																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														

### 25.10.4 EVTENSET

Address offset: 0x344

Enable event routing

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id				F E D C																										B A							
Reset 0x00000000				0 0																																	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	TICK				Write '1' to Enable event routing for TICK event																															
						See <a href="#">EVENTS_TICK</a>																															
			Set		1	Enable																															
			Disabled		0	Read: Disabled																															
			Enabled		1	Read: Enabled																															
B	RW	OVRFLW				Write '1' to Enable event routing for OVRFLW event																															
						See <a href="#">EVENTS_OVRFLW</a>																															
			Set		1	Enable																															
			Disabled		0	Read: Disabled																															
			Enabled		1	Read: Enabled																															
C	RW	COMPARE0				Write '1' to Enable event routing for COMPARE[0] event																															
						See <a href="#">EVENTS_COMPARE[0]</a>																															
			Set		1	Enable																															

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id																														F E D C								B A	
Reset 0x00000000				0 0																																			
Id	RW	Field	Value Id	Value	Description																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable event routing for COMPARE[1] event																																				
			See <a href="#">EVENTS_COMPARE[1]</a>																																				
			Set	1	Enable																																		
D	RW	COMPARE1	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable event routing for COMPARE[2] event																																				
			See <a href="#">EVENTS_COMPARE[2]</a>																																				
			Set	1	Enable																																		
E	RW	COMPARE2	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable event routing for COMPARE[2] event																																				
			See <a href="#">EVENTS_COMPARE[2]</a>																																				
			Set	1	Enable																																		
F	RW	COMPARE3	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable event routing for COMPARE[3] event																																				
			See <a href="#">EVENTS_COMPARE[3]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		

## 25.10.5 EVTENCLR

Address offset: 0x348

Disable event routing

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																													F E D C				B A			
Reset 0x00000000			0 0																																	
Id	RW	Field	Value Id	Value	Description																															
A	RW	TICK			Write '1' to Disable event routing for TICK event																															
					See <a href="#">EVENTS_TICK</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
		Enabled	1	Read: Enabled																																
B	RW	OVRFLW			Write '1' to Disable event routing for OVRFLW event																															
					See <a href="#">EVENTS_OVRFLW</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
		Enabled	1	Read: Enabled																																
C	RW	COMPARE0			Write '1' to Disable event routing for COMPARE[0] event																															
					See <a href="#">EVENTS_COMPARE[0]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
		Enabled	1	Read: Enabled																																
D	RW	COMPARE1			Write '1' to Disable event routing for COMPARE[1] event																															
					See <a href="#">EVENTS_COMPARE[1]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
		Enabled	1	Read: Enabled																																
E	RW	COMPARE2			Write '1' to Disable event routing for COMPARE[2] event																															
					See <a href="#">EVENTS_COMPARE[2]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
		Enabled	1	Read: Enabled																																



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				F	E	D	C													B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																															
F	RW	COMPARE3				Write '1' to Disable event routing for COMPARE[3] event																															
						See <a href="#">EVENTS_COMPARE[3]</a>																															
			Clear	1	Disable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																

## 25.10.6 COUNTER

Address offset: 0x504

Current COUNTER value

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																					A A															
Reset 0x00000000					0 0 0 0 0 0 0 0								0 0																							
Id	RW	Field	Value Id		Value								Description																							
A	R	COUNTER											Counter value																							

## 25.10.7 PRESCALER

Address offset: 0x508

12 bit prescaler for COUNTER frequency  $(32768 / (\text{PRESCALER} + 1))$ . Must be written when RTC is stopped

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																									A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field	Value		Id	Value		Description																																				
A	RW	PRESCALER						Prescaler value																																				

## 25.10.8 CC[0]

Address offset: 0x540

Compare register 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id															A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																													
A	RW	COMPARE						Compare value																													

## 25.10.9 CC[1]

Address offset: 0x544

Compare register 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value		Id	Value		Description																															
A	RW	COMPARE						Compare value																															

## 25.10.10 CC[2]

Address offset: 0x548

Compare register 2

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id				Value				Description																														
A	RW	COMPARE									Compare value																														

## 25.10.11 CC[3]

Address offset: 0x54C

Compare register 3

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id				Value				Description																															
A	RW	COMPARE									Compare value																															


## 25.11 Electrical specification

### 25.11.1 RTC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RTC</sub>	Run current Real Time Counter (LFCLK source)		0.1		μA

## 26 RNG — Random number generator

The Random number generator (RNG) generates true non-deterministic random numbers based on internal thermal noise that are suitable for cryptographic purposes. The RNG does not require a seed value.

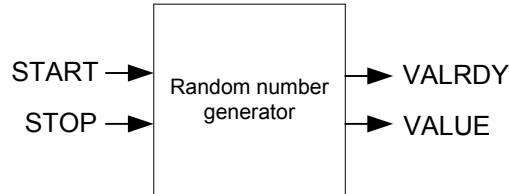

**Figure 60: Random number generator**

The RNG is started by triggering the START task and stopped by triggering the STOP task. When started, new random numbers are generated continuously and written to the VALUE register when ready. A VALRDY event is generated for every new random number that is written to the VALUE register. This means that after a VALRDY event is generated the CPU has the time until the next VALRDY event to read out the random number from the VALUE register before it is overwritten by a new random number.

### 26.1 Bias correction

A bias correction algorithm is employed on the internal bit stream to remove any bias toward '1' or '0'. The bits are then queued into an eight-bit register for parallel readout from the VALUE register.

It is possible to enable bias correction in the CONFIG register. This will result in slower value generation, but will ensure a statistically uniform distribution of the random values.

### 26.2 Speed

The time needed to generate one random byte of data is unpredictable, and may vary from one byte to the next. This is especially true when bias correction is enabled.

### 26.3 Registers

**Table 52: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x400D000	RNG	RNG	Random number generator	

**Table 53: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Task starting the random number generator
TASKS_STOP	0x004	Task stopping the random number generator
EVENTS_VALRDY	0x100	Event being generated for every new random number written to the VALUE register
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
CONFIG	0x504	Configuration register
VALUE	0x508	Output random number

#### 26.3.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	VALRDY_STOP				Shortcut between VALRDY event and STOP task																									
						See <a href="#">EVENTS_VALRDY</a> and <a href="#">TASKS_STOP</a>																									
			Disabled		0	Disable shortcut																									
			Enabled		1	Enable shortcut																									

## 26.3.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	VALRDY				Write '1' to Enable interrupt for VALRDY event																									
						See <a href="#">EVENTS_VALRDY</a>																									
			Set		1	Enable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									

## 26.3.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value		Description																														
A	RW	VALRDY					Write '1' to Disable interrupt for VALRDY event																														
							See <a href="#">EVENTS_VALRDY</a>																														
			Clear		1	Disable																															
			Disabled		0	Read: Disabled																															
			Enabled		1	Read: Enabled																															

## 26.3.4 CONFIG

Address offset: 0x504

Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	DERCEN			Bias correction																														
			Disabled	0	Disabled																														
			Enabled	1	Enabled																														

## 26.3.5 VALUE

Address offset: 0x508

Output random number

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>										<b>Value</b>										<b>Description</b>									
A	R	VALUE											[0..255]										Generated random number									

## 26.4 Electrical specification

### 26.4.1 RNG Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{\text{RNG}}$	Run current, CPU sleeping.		500		$\mu\text{A}$
$t_{\text{RNG,START}}$	Time from setting the START task to generation begins. This is a one-time delay on START signal and does not apply between samples.		128		$\mu\text{s}$
$t_{\text{RNG,RAW}}$	Run time per byte without bias correction. Uniform distribution of 0 and 1 is not guaranteed.		30		$\mu\text{s}$
$t_{\text{RNG,BC}}$	Run time per byte with bias correction. Uniform distribution of 0 and 1 is guaranteed. Time to generate a byte cannot be guaranteed.		120		$\mu\text{s}$

## 27 TEMP — Temperature sensor

The temperature sensor measures die temperature over the temperature range of the device. Linearity compensation can be implemented if required by the application.

Listed here are the main features for TEMP:

- Temperature range is greater than or equal to operating temperature of the device
- Resolution is 0.25 degrees

TEMP is started by triggering the START task.

When the temperature measurement is completed, a DATARDY event will be generated and the result of the measurement can be read from the TEMP register.

To achieve the measurement accuracy stated in the electrical specification, the crystal oscillator must be selected as the HFCLK source, see [CLOCK — Clock control](#) on page 104 for more information.

When the temperature measurement is completed, TEMP analog electronics power down to save power.

TEMP only supports one-shot operation, meaning that every TEMP measurement has to be explicitly started using the START task.

### 27.1 Registers

**Table 54: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000C000	TEMP	TEMP	Temperature sensor	

**Table 55: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start temperature measurement
TASKS_STOP	0x004	Stop temperature measurement
EVENTS_DATARDY	0x100	Temperature measurement complete, data ready
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
TEMP	0x508	Temperature in °C (0.25° steps)
A0	0x520	Slope of 1st piece wise linear function
A1	0x524	Slope of 2nd piece wise linear function
A2	0x528	Slope of 3rd piece wise linear function
A3	0x52C	Slope of 4th piece wise linear function
A4	0x530	Slope of 5th piece wise linear function
A5	0x534	Slope of 6th piece wise linear function
B0	0x540	y-intercept of 1st piece wise linear function
B1	0x544	y-intercept of 2nd piece wise linear function
B2	0x548	y-intercept of 3rd piece wise linear function
B3	0x54C	y-intercept of 4th piece wise linear function
B4	0x550	y-intercept of 5th piece wise linear function
B5	0x554	y-intercept of 6th piece wise linear function
T0	0x560	End point of 1st piece wise linear function
T1	0x564	End point of 2nd piece wise linear function
T2	0x568	End point of 3rd piece wise linear function
T3	0x56C	End point of 4th piece wise linear function
T4	0x570	End point of 5th piece wise linear function

### 27.1.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																							A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DATARDY				Write '1' to Enable interrupt for DATARDY event																																	
						See <a href="#">EVENTS_DATARDY</a>																																	
		Set	1			Enable																																	
		Disabled	0			Read: Disabled																																	
		Enabled	1			Read: Enabled																																	

### 27.1.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	DATARDY				Write '1' to Disable interrupt for DATARDY event																																
						See <i>EVENTS_DATARDY</i>																																
		Clear	1			Disable																																
		Disabled	0			Read: Disabled																																
		Enabled	1			Read: Enabled																																

### 27.1.3 TEMP

Address offset: 0x508

Temperature in °C (0.25° steps)

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	R	TEMP				Temperature in °C (0.25° steps)																														
						Result of temperature measurement. Die temperature in °C, 2's complement format, 0.25 °C steps																														
						Decision point: DATARDY																														

### 27.1.4 A0

Address offset: 0x520

Slope of 1st piece wise linear function

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 27.1.5 A1

Address offset: 0x524

### Slope of 2nd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000343	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	0	0	0	1	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A1					Slope of 2nd piece wise linear function																									

## 27.1.6 A2

Address offset: 0x528

### Slope of 3rd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000035D	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	1	1	0	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A2					Slope of 3rd piece wise linear function																									

## 27.1.7 A3

Address offset: 0x52C

### Slope of 4th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000400	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	A3					Slope of 4th piece wise linear function																									

## 27.1.8 A4

Address offset: 0x530

### Slope of 5th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000047F	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	1	1	1	1	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A4					Slope of 5th piece wise linear function																									

## 27.1.9 A5

Address offset: 0x534

### Slope of 6th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000037B	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	1	1	1	0	1	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A5					Slope of 6th piece wise linear function																									

## 27.1.10 B0

Address offset: 0x540

### y-intercept of 1st piece wise linear function



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003FCC					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	1	1	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	RW	B0					y-intercept of 1st piece wise linear function																																		

### 27.1.11 B1

Address offset: 0x544

y-intercept of 2nd piece wise linear function

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003F98					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	1	1	0	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	RW	B1					y-intercept of 2nd piece wise linear function																																		

### 27.1.12 B2

Address offset: 0x548

y-intercept of 3rd piece wise linear function

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003F98					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	1	1	0	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	RW	B2					y-intercept of 3rd piece wise linear function																																		

### 27.1.13 B3

Address offset: 0x54C

y-intercept of 4th piece wise linear function

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

### 27.1.14 B4

Address offset: 0x550

y-intercept of 5th piece wise linear function

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000006A					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	RW	B4					y-intercept of 5th piece wise linear function																																		

### 27.1.15 B5

Address offset: 0x554

y-intercept of 6th piece wise linear function

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003DD0					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1	1	1	0	1	0	0	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	RW	B5					y-intercept of 6th piece wise linear function																																		

### 27.1.16 T0

Address offset: 0x560

End point of 1st piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x000000E2				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	1	0
Id	RW	Field		Value Id				Value				Description																							
A	RW	T0										End point of 1st piece wise linear function																							

### 27.1.17 T1

Address offset: 0x564

End point of 2nd piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id				Value				Description																							
A	RW	T1										End point of 2nd piece wise linear function																							

### 27.1.18 T2

Address offset: 0x568

End point of 3rd piece wise linear function

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A A A A A A A																														
Reset 0x00000014				0 1 0 1 0 0																														
Id	RW	Field	Value Id	Value Description																														
A	RW	T2		End point of 3rd piece wise linear function																														

### 27.1.19 T3

Address offset: 0x56C

End point of 4th piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																												A	A	A	A	A	A	A	A	
Reset 0x00000019				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	1
Id	RW	Field		Value Id				Value				Description																								
A	RW	T3										End point of 4th piece wise linear function																								

### 27.1.20 T4

Address offset: 0x570

End point of 5th piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000050				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0
Id	RW	Field		Value Id				Value				Description																							
A	RW	T4										End point of 5th piece wise linear function																							

## 27.2 Electrical specification

### 27.2.1 Temperature Sensor Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TEMP</sub>	Time required for temperature measurement		36		μs
T <sub>TEMP,RANGE</sub>	Temperature sensor range	-40		85	°C
T <sub>TEMP,ACC</sub>	Temperature sensor accuracy	-5		5	°C
T <sub>TEMP,RES</sub>	Temperature sensor resolution		0.25		°C
T <sub>TEMP,STB</sub>	Sample to sample stability at constant device temperature		+/-0.25		°C
T <sub>TEMP,OFFST</sub>	Sample offset at 25°C	-2.5		2.5	°C

## 28 ECB — AES electronic codebook mode encryption

The AES electronic codebook mode encryption (ECB) can be used for a range of cryptographic functions like hash generation, digital signatures, and keystream generation for data encryption/decryption. The ECB encryption block supports 128 bit AES encryption (encryption only, not decryption).

AES ECB operates with EasyDMA access to system Data RAM for in-place operations on cleartext and ciphertext during encryption. ECB uses the same AES core as the CCM and AAR blocks and is an asynchronous operation which may not complete if the AES core is busy.

AES ECB features:

- 128 bit AES encryption
- Supports standard AES ECB block encryption
- Memory pointer support
- DMA data transfer

AES ECB performs a 128 bit AES block encrypt. At the STARTECB task, data and key is loaded into the algorithm by EasyDMA. When output data has been written back to memory, the ENDECB event is triggered.

AES ECB can be stopped by triggering the STOPECB task.

### 28.1 Shared resources

The ECB, CCM, and AAR share the same AES module. The ECB will always have lowest priority and if there is a sharing conflict during encryption, the ECB operation will be aborted and an ERRORECB event will be generated.

### 28.2 EasyDMA

The ECB implements an EasyDMA mechanism for reading and writing to the Data RAM. This DMA cannot access the program memory or any other parts of the memory area except RAM.

If the ECBDATAPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The EasyDMA will have finished accessing the Data RAM when the ENDECB or ERRORECB is generated.

### 28.3 ECB data structure

Input to the block encrypt and output from the block encrypt are stored in the same data structure. ECBDATAPTR should point to this data structure before STARTECB is initiated.

**Table 56: ECB data structure overview**

Property	Address offset	Description
KEY	0	16 byte AES key
CLEARTEXT	16	16 byte AES cleartext input block
CIPHERTEXT	32	16 byte AES ciphertext output block

## 28.4 Registers

**Table 57: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000E000	ECB	ECB	AES Electronic Code Book (ECB) mode block encryption	

**Table 58: Register Overview**

Register	Offset	Description
TASKS_STARTECB	0x000	Start ECB block encrypt
TASKS_STOPECB	0x004	Abort a possible executing ECB operation
EVENTS_ENDECB	0x100	ECB block encrypt complete
EVENTS_ERRORECB	0x104	ECB block encrypt aborted because of a STOPECB task or due to an error
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>ECBDATAPTR</i>	0x504	ECB block encrypt memory pointers

### 28.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																		B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENDECB				Write '1' to Enable interrupt for ENDECB event																													
						See <a href="#">EVENTS_ENDECB</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	ERRORECB				Write '1' to Enable interrupt for ERRORECB event																													
						See <a href="#">EVENTS_ERRORECB</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 28.4.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																		B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value		Description																											
A	RW	ENDECB						Write '1' to Disable interrupt for ENDECB event																											
								See <a href="#">EVENTS_ENDECB</a>																											
			Clear	1				Disable																											
			Disabled	0				Read: Disabled																											
			Enabled	1				Read: Enabled																											
B	RW	ERRORECB						Write '1' to Disable interrupt for ERRORECB event																											
								See <a href="#">EVENTS_ERRORECB</a>																											
			Clear	1				Disable																											
			Disabled	0				Read: Disabled																											

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				B A	
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value			Description																														
			Enabled	1			Read: Enabled																														

### 28.4.3 ECBDATAPTR

Address offset: 0x504

ECB block encrypt memory pointers

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ECBDATAPTR				Pointer to the ECB data structure (see Table 1 ECB data structure overview)																													

## 28.5 Electrical specification

### 28.5.1 ECB Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{ECB}$	Run time per 16 byte block in all modes		6		$\mu s$

## 29 CCM — AES CCM mode encryption

Cipher block chaining - message authentication code (CCM) mode is an authenticated encryption algorithm designed to provide both authentication and confidentiality during data transfer. CCM combines counter mode encryption and CBC-MAC authentication. The CCM terminology "Message authentication code (MAC)" is called the "Message integrity check (MIC)" in *Bluetooth* terminology and also in this document.


The CCM block generates an encrypted keystream that is applied to input data using the XOR operation and generates the 4 byte MIC field in one operation. The CCM and radio can be configured to work synchronously. The CCM will encrypt in time for transmission and decrypt after receiving bytes into memory from the Radio. All operations can complete within the packet RX or TX time. CCM on this device is implemented according to *Bluetooth* requirements and the algorithm as defined in IETF [RFC3610](#), and depends on the AES-128 block cipher. A description of the CCM algorithm can also be found in [NIST Special Publication 800-38C](#). The *Bluetooth* specification describes the configuration of counter mode blocks and encryption blocks to implement compliant encryption for BLE.

The CCM block uses EasyDMA to load key, counter mode blocks (including the nonce required), and to read/write plain text and cipher text.

The AES CCM supports three operations: key-stream generation, packet encryption, and packet decryption. All these operations are done in compliance with the *Bluetooth* specification.<sup>23</sup> A new key-stream must be generated before a new packet encryption or packet decryption operation can be started.

A key-stream is generated by triggering the KSGEN task. An ENDKSGEN event will be generated when the new key-stream has been generated. The key-stream will be stored in the AES CCM's temporary memory area, specified by the SCRATCHPTR, where it will be used in subsequent encryption and decryption operations.

Encryption is started by triggering the CRYPT task with the MODE register set to ENCRYPTION. Similarly, decryption is started by triggering the same task with MODE set to DECRYPTION. An ENDCRYPT event will be generated when packet encryption is completed as well as when packet decryption is completed, see [Figure 61: Key-stream generation followed by encryption or decryption. The shortcut is optional.](#) on page 271.

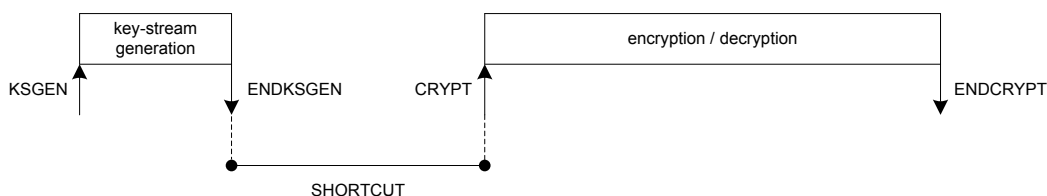

**Figure 61: Key-stream generation followed by encryption or decryption. The shortcut is optional.**

Key-stream generation, packet encryption, and packet decryption operations utilize the configuration specified in the data structure pointed to by the CNFPTR pointer. It is necessary to configure this pointer and its underlying data structure, and the MODE register before the KSGEN task is triggered. It is also necessary to configure the INPTR pointer and the OUTPTR pointer before the CRYPT task is triggered.

If a shortcut is used between ENDKSGEN event and CRYPT task, the INPTR pointer and the OUTPTR pointer must be configured before the KSGEN task is triggered.

The AES CCM supports different packet lengths, this is configured via the PACKETLENGTH field in the MODE register.

<sup>23</sup> *Bluetooth* AES CCM 128 bit block encryption, see *Bluetooth* Core specification Version 4.0.

## 29.1 Shared resources

The CCM shares registers and other resources with other peripherals that have the same ID as the CCM. The user must therefore disable all peripherals that have the same ID as the CCM before the CCM can be configured and used.

Disabling a peripheral that have the same ID as the CCM will not reset any of the registers that are shared with the CCM. It is therefore important to configure all relevant CCM registers explicitly to secure that it operates correctly.


See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.

## 29.2 Encryption

During packet encryption, the AES CCM will read the unencrypted packet located in RAM at the address specified in the INPTR pointer, encrypt the packet and append a four byte long Message Integrity Check (MIC) field to the packet.

The AES CCM will also modify the length field of the packet to adjust for the appended MIC field, that is, add four bytes to the length, and store the resulting packet back into RAM at the address specified in the OUTPTR pointer, see [Figure 62: Encryption](#) on page 272.

Empty packets (length field is set to 0) will not be encrypted but instead moved unmodified through the AES CCM.

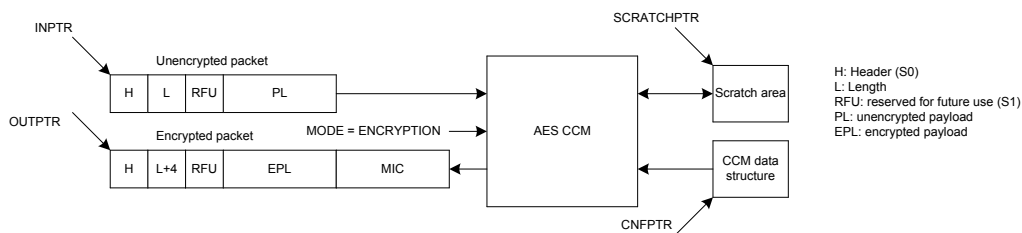

**Figure 62: Encryption**

## 29.3 Decryption


During packet decryption, the AES CCM will read the encrypted packet located in RAM at the address specified in the INPTR pointer, decrypt the packet, authenticate the packet's MIC field and generate the appropriate MIC status.

The AES CCM will also modify the length field of the packet to adjust for the MIC field, that is, subtract four bytes from the length, and then store the decrypted packet into RAM at the address pointed to by the OUTPTR pointer, see [Figure 63: Decryption](#) on page 273.

The CCM is only able to decrypt packets that are at least 5 bytes long, that is, 1 byte or more encrypted payload (EPL) and 4 bytes of MIC. The CCM will therefore generate a MIC error for packets where the length field is set to 1, 2, 3 or 4.

Empty packets (length field is set to 0) will not be decrypted but instead moved unmodified through the AES CCM, these packets will always pass the MIC check.



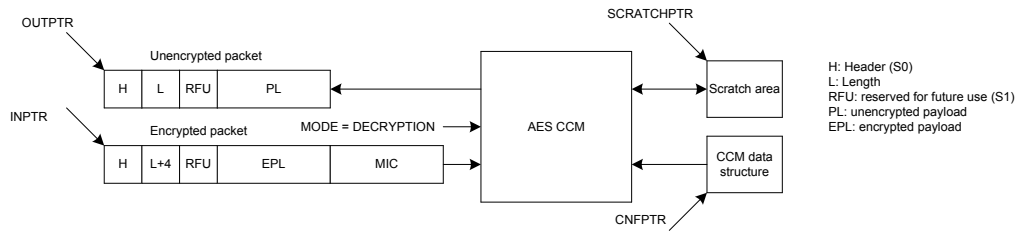

**Figure 63: Decryption**

## 29.4 AES CCM and RADIO concurrent operation

The AES CCM is designed to run in parallel with the RADIO to enable on-the-fly encryption and decryption of RADIO packets without CPU involvement. To facilitate this, the RADIO has to be configured with specific settings.


**Table 59: Radio configuration settings**

Radio parameter	Value	Description
PCNF0.SOLEN	1	Length of HEADER field in: <a href="#">Table 61: Data structure for unencrypted packet</a> on page 275 and <a href="#">Table 62: Data structure for encrypted packet</a> on page 275.
PCNF0.LFLEN	5 or 8	Length of LENGTH field in: <a href="#">Table 61: Data structure for unencrypted packet</a> on page 275 and <a href="#">Table 62: Data structure for encrypted packet</a> on page 275.
PCNF0.S1LEN	3 or 0	Length of the RFU field in: <a href="#">Table 61: Data structure for unencrypted packet</a> on page 275 and <a href="#">Table 62: Data structure for encrypted packet</a> on page 275. The combined length of LENGTH and RFU must always be 8 bit.
PCNF0.S1	Include	Always include the S1 field (RFU field) in RAM to secure that the same data structure can be used for PCNF0.S1LEN = 3 and PCNF0.S1LEN = 0: <a href="#">Table 61: Data structure for unencrypted packet</a> on page 275 and <a href="#">Table 62: Data structure for encrypted packet</a> on page 275.
MODE	Ble_1Mbit	Data rate. Must match CCM->MODE.DATARATE
PCNF1.BALEN	3	Length of address (32 bit)
CRCNF.LEN	3	Length of CRC (24 bit)

## 29.5 Encrypting packets on-the-fly in radio transmit mode


When the AES CCM is encrypting a packet on-the-fly at the same time as the RADIO is transmitting it, the RADIO must read the encrypted packet from the same memory location as the AES CCM is writing to.

The OUTPTR pointer in the AES CCM must therefore point to the same memory location as the PACKETPTR pointer in the RADIO, see [Figure 64: Configuration of on-the-fly encryption](#) on page 273.

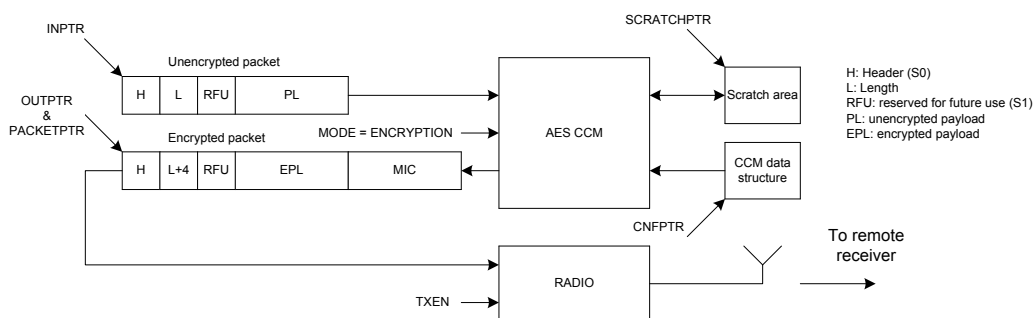

**Figure 64: Configuration of on-the-fly encryption**

In order to match the RADIO's timing, the KSGEN task must be triggered no later than when the START task in the RADIO is triggered, in addition the shortcut between the ENDKSGEN event and the CRYPT task must be enabled. This use-case is illustrated in [Figure 65: On-the-fly encryption using a PPI connection](#) on page 274 using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM.

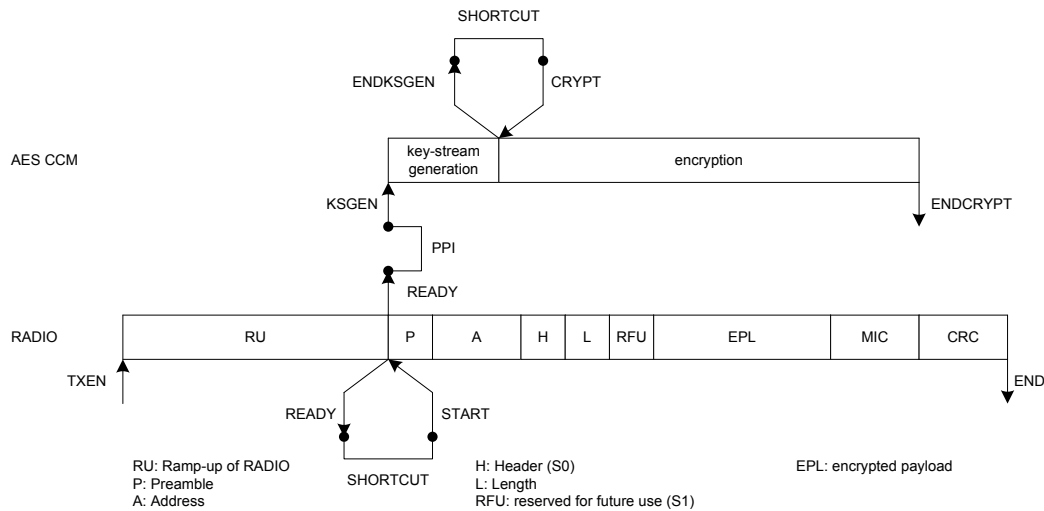


**Figure 65: On-the-fly encryption using a PPI connection**

## 29.6 Decrypting packets on-the-fly in radio receive mode

When the AES CCM is decrypting a packet on-the-fly at the same time as the RADIO is receiving it, the AES CCM must read the encrypted packet from the same memory location as the RADIO is writing to.

The INPTR pointer in the AES CCM must therefore point to the same memory location as the PACKETPTR pointer in the RADIO, see [Figure 66: Configuration of on-the-fly decryption](#) on page 274.

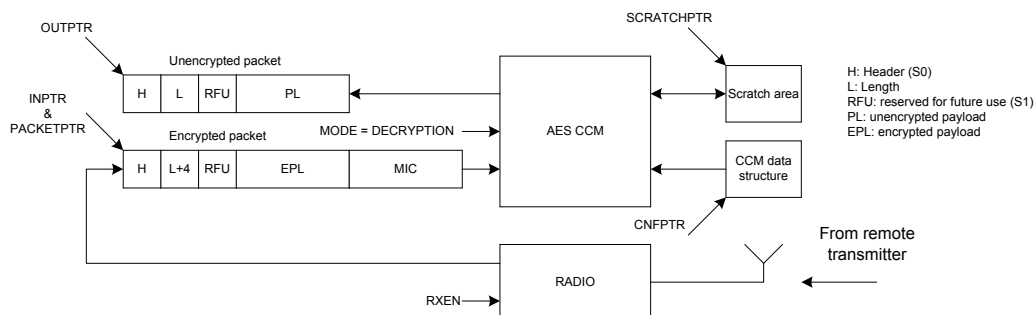


**Figure 66: Configuration of on-the-fly decryption**

In order to match the RADIO's timing, the KSGEN task must be triggered no later than when the START task in the RADIO is triggered. In addition, the CRYPT task must be triggered no earlier than when the ADDRESS event is generated by the RADIO.

If the CRYPT task is triggered exactly at the same time as the ADDRESS event is generated by the RADIO, the AES CCM will guarantee that the decryption is completed no later than when the END event in the RADIO is generated.

This use-case is illustrated in [Figure 67: On-the-fly decryption using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM](#) on page 275 using a PPI connection between the ADDRESS event in the RADIO and the CRYPT task in the AES CCM. The KSGEN task is triggered from the READY event in the RADIO through a PPI connection.

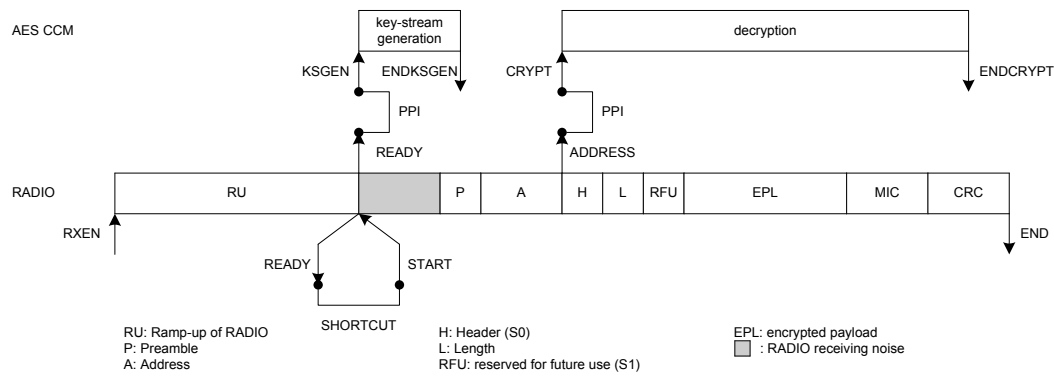

**Figure 67: On-the-fly decryption using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM**

## 29.7 CCM data structure

The CCM data structure is located in Data RAM at the memory location specified by the CNFPTR pointer register.

**Table 60: CCM data structure overview**

Property	Address offset	Description
KEY	0	16 byte AES key
PKTCTR	16	Octet0 (LSO) of packet counter
	17	Octet1 of packet counter
	18	Octet2 of packet counter
	19	Octet3 of packet counter
	20	Bit 6 – Bit 0: Octet4 (7 most significant bits of packet counter, with Bit 6 being the most significant bit) Bit7: Ignored
	21	Ignored
	22	Ignored
	23	Ignored
	24	Bit 0: Direction bit Bit 7 – Bit 1: Zero padded
IV	25	8 byte initialization vector (IV) Octet0 (LSO) of IV, Octet1 of IV, ..., Octet7 (MSO) of IV

The NONCE vector (as specified by the *Bluetooth* Core Specification) will be generated by hardware based on the information specified in the CCM data structure from [Table 60: CCM data structure overview](#) on page 275 .

**Table 61: Data structure for unencrypted packet**

Property	Address offset	Description
HEADER	0	Packet Header
LENGTH	1	Number of bytes in unencrypted payload
RFU	2	Reserved Future Use
PAYLOAD	3	Unencrypted payload

**Table 62: Data structure for encrypted packet**

Property	Address offset	Description
HEADER	0	Packet Header
LENGTH	1	Number of bytes in encrypted payload including length of MIC
		<b>Important:</b> LENGTH will be 0 for empty packets since the MIC is not added to empty packets
RFU	2	Reserved Future Use
PAYLOAD	3	Encrypted payload
MIC	3 + payload length	ENCRYPT: 4 bytes encrypted MIC

Property	Address offset	Description
<b>Important:</b> MIC is not added to empty packets		

## 29.8 EasyDMA and ERROR event

The CCM implements an EasyDMA mechanism for reading and writing to the RAM.

In some scenarios where the CPU and other DMA enabled peripherals are accessing the RAM at the same time, the CCM DMA could experience some bus conflicts which may also result in an error during encryption. If this happens, the ERROR event will be generated.

The EasyDMA will have finished accessing the RAM when the ENDKSGEN and ENDCRYPT events are generated.

If the CNFPTR, SCRATCHPTR, INPTR and the OUTPTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

## 29.9 Registers

**Table 63: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x400F000	CCM	CCM	AES CCM Mode Encryption	

**Table 64: Register Overview**

Register	Offset	Description
TASKS_KSGEN	0x000	Start generation of key-stream. This operation will stop by itself when completed.
TASKS_CRYPT	0x004	Start encryption/decryption. This operation will stop by itself when completed.
TASKS_STOP	0x008	Stop encryption/decryption
EVENTS_ENDKSGEN	0x100	Key-stream generation complete
EVENTS_ENDCRYPT	0x104	Encrypt/decrypt complete
EVENTS_ERROR	0x108	CCM error event
<a href="#">SHORTS</a>	0x200	Shortcut register
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">MICSTATUS</a>	0x400	MIC check result
<a href="#">ENABLE</a>	0x500	Enable
<a href="#">MODE</a>	0x504	Operation mode
<a href="#">CNFPTR</a>	0x508	Pointer to data structure holding AES key and NONCE vector
<a href="#">INPTR</a>	0x50C	Input pointer
<a href="#">OUTPTR</a>	0x510	Output pointer
<a href="#">SCRATCHPTR</a>	0x514	Pointer to data area used for temporary storage

### 29.9.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENDKSGEN_CRYPT			Shortcut between ENDKSGEN event and CRYPT task																														
					See <a href="#">EVENTS_ENDKSGEN</a> and <a href="#">TASKS_CRYPT</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

## 29.9.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																							C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	ENDKSGEN				Write '1' to Enable interrupt for ENDKSGEN event																																			
						See <a href="#">EVENTS_ENDKSGEN</a>																																			
			Set		1	Enable																																			
			Disabled		0	Read: Disabled																																			
			Enabled		1	Read: Enabled																																			
B	RW	ENDCRYPT				Write '1' to Enable interrupt for ENDCRYPT event																																			
						See <a href="#">EVENTS_ENDCRYPT</a>																																			
			Set		1	Enable																																			
			Disabled		0	Read: Disabled																																			
			Enabled		1	Read: Enabled																																			
C	RW	ERROR				Write '1' to Enable interrupt for ERROR event																																			
						See <a href="#">EVENTS_ERROR</a>																																			
			Set		1	Enable																																			
			Disabled		0	Read: Disabled																																			
			Enabled		1	Read: Enabled																																			

## 29.9.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																												
Id																																						C	B	A																							
Reset 0x00000000				0																																		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																																									
A	RW	ENDKSGEN				Write '1' to Disable interrupt for ENDKSGEN event																																																									
						See <a href="#">EVENTS_ENDKSGEN</a>																																																									
			Clear		1	Disable																																																									
			Disabled		0	Read: Disabled																																																									
			Enabled		1	Read: Enabled																																																									
B	RW	ENDCRYPT				Write '1' to Disable interrupt for ENDCRYPT event																																																									
						See <a href="#">EVENTS_ENDCRYPT</a>																																																									
			Clear		1	Disable																																																									
			Disabled		0	Read: Disabled																																																									
			Enabled		1	Read: Enabled																																																									
C	RW	ERROR				Write '1' to Disable interrupt for ERROR event																																																									
						See <a href="#">EVENTS_ERROR</a>																																																									
			Clear		1	Disable																																																									
			Disabled		0	Read: Disabled																																																									
			Enabled		1	Read: Enabled																																																									

## 29.9.4 MICSTATUS

Address offset: 0x400

MIC check result

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	R	MICSTATUS				The result of the MIC check performed during the previous decryption operation																																
		CheckFailed	0			MIC check failed																																
		CheckPassed	1			MIC check passed																																

## 29.9.5 ENABLE

Address offset: 0x500

Enable

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ENABLE				Enable or disable CCM																																
		Disabled	0			Disable																																
		Enabled	2			Enable																																

## 29.9.6 MODE

Address offset: 0x504

Operation mode

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id															C										B										A									
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1							
Id	RW	Field	Value	Id	Value	Description																																						
A	RW	MODE				The mode of operation to be used																																						
		Encryption	0			AES CCM packet encryption mode																																						
		Decryption	1			AES CCM packet decryption mode																																						
B	RW	DATARATE				Data rate that the CCM shall run in synch with																																						
		1Mbit	0			In synch with 1 Mbit data rate																																						
		2Mbit	1			In synch with 2 Mbit data rate																																						
C	RW	LENGTH				Packet length configuration																																						
		Default	0			Default length. Effective length of LENGTH field is 5-bit																																						
		Extended	1			Extended length. Effective length of LENGTH field is 8-bit																																						

## 29.9.7 CNFPTR

Address offset: 0x508

Pointer to data structure holding AES key and NONCE vector

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	CNFPTR							Pointer to the data structure holding the AES key and the CCM NONCE vector (see Table 1 CCM data structure overview)																										

## 29.9.8 INPTR

Address offset: 0x50C

Input pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	INPTR						Input pointer																												

### 29.9.9 OUTPTR

Address offset: 0x510

Output pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	OUTPTR				Output pointer																														

### 29.9.10 SCRATCHPTR

Address offset: 0x514

Pointer to data area used for temporary storage

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	SCRATCHPTR				Pointer to a scratch data area used for temporary storage																														

The scratch area is used for temporary storage of data during key-stream generation and encryption.

A space of 43 bytes, or (16 + MAXPACKETSIZE) bytes, whatever is largest, must be reserved in RAM.

## 30 AAR — Accelerated address resolver

Accelerated address resolver is a cryptographic support function for implementing the "Resolvable Private Address Resolution Procedure" described in the *Bluetooth Core specification v4.0*. "Resolvable private address generation" should be achieved using ECB and is not supported by AAR.

The procedure allows two devices that share a secret key to generate and resolve a hash based on their device address. The AAR block enables real-time address resolution on incoming packets when configured as described in this chapter. This allows real-time packet filtering (whitelisting) using a list of known shared keys (Identity Resolving Keys (IRK) in *Bluetooth*).

### 30.1 Shared resources

The AAR shares registers and other resources with the peripherals that have the same ID as the AAR. The user must therefore disable all peripherals that have the same ID as the AAR before the AAR can be configured and used.

Disabling a peripheral that have the same ID as the AAR will not reset any of the registers that are shared with the AAR. It is therefore important to configure all relevant AAR registers explicitly to secure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.


### 30.2 EasyDMA

The AAR implements EasyDMA for reading and writing to the RAM. The EasyDMA will have finished accessing the RAM when the END, RESOLVED, and NOTRESOLVED events are generated.

If the IRKPTR, ADDRPTR and the SCRATCHPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

### 30.3 Resolving a resolvable address

As per *Bluetooth* specification, a private resolvable address is composed of six bytes.

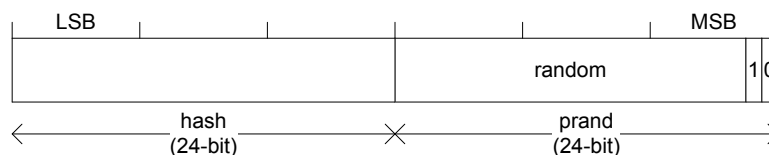

**Figure 68: Resolvable address**

To resolve an address the ADDRPTR register must point to the start of packet. The resolver is started by triggering the START task. A RESOLVED event is generated when the AAR manages to resolve the address using one of the Identity Resolving Keys (IRK) found in the IRK data structure. The AAR will use the IRK specified in the register IRK0 to IRK15 starting from IRK0. How many to be used is specified by the NIRK register. The AAR module will generate a NOTRESOLVED event if it is not able to resolve the address using the specified list of IRKs.

The AAR will go through the list of available IRKs in the IRK data structure and for each IRK try to resolve the address according to the Resolvable Private Address Resolution Procedure described in the *Bluetooth Specification*<sup>24</sup>. The time it takes to resolve an address may vary depending on where in the list the


<sup>24</sup> *Bluetooth Specification Version 4.0 [Vol 3] chapter 10.8.2.3.*



resolvable address is located. The resolution time will also be affected by RAM accesses performed by other peripherals and the CPU. See the [Electrical specifications](#) for more information about resolution time.

The AAR will only do a comparison of the received address to those programmed in the module. And not check what type of address it actually is.


The AAR will stop as soon as it has managed to resolve the address, or after trying to resolve the address using NIRK number of IRKs from the IRK data structure. The AAR will generate an END event after it has stopped.

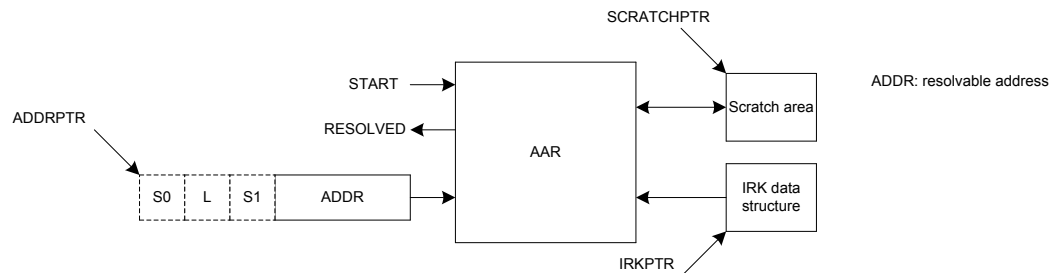

**Figure 69: Address resolution with packet preloaded into RAM**

## 30.4 Use case example for chaining RADIO packet reception with address resolution using AAR

The AAR may be started as soon as the 6 bytes required by the AAR have been received by the RADIO and stored in RAM. The ADDRPTR pointer must point to the start of packet.

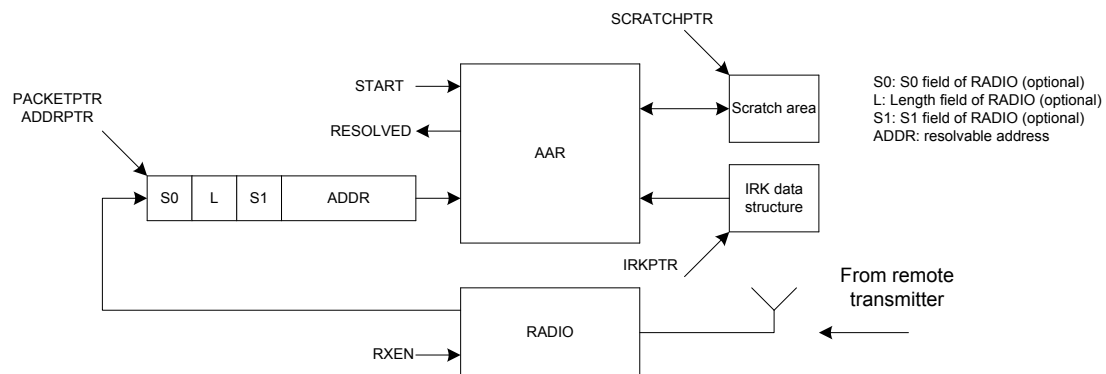

**Figure 70: Address resolution with packet loaded into RAM by the RADIO**

## 30.5 IRK data structure

The IRK data structure is located in RAM at the memory location specified by the CNFPTR pointer register.

**Table 65: IRK data structure overview**

Property	Address offset	Description
IRK0	0	IRK number 0 (16 - byte)
IRK1	16	IRK number 1 (16 - byte)
...	...	...
IRK15	240	IRK number 15 (16 - byte)

## 30.6 Registers

**Table 66: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000F000	AAR	AAR	Acelerated Address Resolver	

**Table 67: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start resolving addresses based on IRKs specified in the IRK data structure
TASKS_STOP	0x008	Stop resolving addresses
EVENTS_END	0x100	Address resolution procedure complete
EVENTS_RESOLVED	0x104	Address resolved
EVENTS_NOTRESOLVED	0x108	Address not resolved
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>STATUS</i>	0x400	Resolution status
<i>ENABLE</i>	0x500	Enable AAR
<i>NIRK</i>	0x504	Number of IRKs
<i>IRKPTR</i>	0x508	Pointer to IRK data structure
<i>ADDRPTR</i>	0x510	Pointer to the resolvable address
<i>SCRATCHPTR</i>	0x514	Pointer to data area used for temporary storage

### 30.6.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value	Id	Value	Description																												
A	RW	END				Write '1' to Enable interrupt for END event																												
						See <a href="#">EVENTS_END</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
B	RW	RESOLVED				Write '1' to Enable interrupt for RESOLVED event																												
						See <a href="#">EVENTS_RESOLVED</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
C	RW	NOTRESOLVED				Write '1' to Enable interrupt for NOTRESOLVED event																												
						See <a href="#">EVENTS_NOTRESOLVED</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												

### 30.6.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	RESOLVED				Write '1' to Disable interrupt for RESOLVED event																													
						See <a href="#">EVENTS_RESOLVED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	NOTRESOLVED				Write '1' to Disable interrupt for NOTRESOLVED event																													
						See <a href="#">EVENTS_NOTRESOLVED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 30.6.3 STATUS

Address offset: 0x400

Resolution status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value		Description																																
A	R	STATUS			[0..15]		The IRK that was used last time an address was resolved																																

### 30.6.4 ENABLE

Address offset: 0x500

Enable AAR

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A		A												
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																																				
A	RW	ENABLE						Enable or disable AAR																																				
			Disabled			0		Disable																																				
			Enabled			3		Enable																																				

### 30.6.5 NIRK

Address offset: 0x504

Number of IRKs

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000001				0 0																															

### 30.6.6 IRKPTR

Address offset: 0x508

## Pointer to IRK data structure

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	IRKPTR				Pointer to the IRK data structure																																	

### 30.6.7 ADDRPTR

Address offset: 0x510

Pointer to the resolvable address

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ADDRPTR				Pointer to the resolvable address (6-bytes)																														

### 30.6.8 SCRATCHPTR

Address offset: 0x514

Pointer to data area used for temporary storage

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>					<b>Description</b>																											
A	RW	SCRATCHPTR								Pointer to a scratch data area used for temporary storage during resolution.A space of minimum 3 bytes must be reserved.																											

## 30.7 Electrical specification

### 30.7.1 AAR Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{AAR,8}$	Time for address resolution of 8 IRKs		48		$\mu$ s

The SPI master can communicate with multiple slaves using individual chip select signals for each of the slave devices attached to a bus.

- Three SPIM instances
- SPI mode 0-3
- EasyDMA direct transfer to/from RAM for both SPI Slave and SPI Master
- Individual selection of IO pin for each SPI signal



### Table 68: SPI modes

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE 0 (Active High)		0 (Leading)
SPI_MODE 0 (Active High)		1 (Trailing)
SPI_MODE 1 (Active Low)		0 (Leading)
SPI_MODE 1 (Active Low)		1 (Trailing)

The SPI shares registers and other resources with other peripherals that have the same ID as the SPI. Therefore, the user must disable all peripherals that have the same ID as the SPI before the SPI can be configured and used.

Disabling a peripheral that has the same ID as the SPI will not reset any of the registers that are shared with the SPI. It is therefore important to configure all relevant SPI registers explicitly to secure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.

## 31.2 EasyDMA

The SPI master implements EasyDMA for reading and writing of data packets from and to the DATA RAM without CPU involvement.

The RXD.PTR and TXD.PTR point to the RXD buffer (receive buffer) and TXD buffer (transmit buffer) respectively, see [Figure 71: SPIM — SPI master with EasyDMA](#) on page 285. RXD.MAXCNT and TXD.MAXCNT specify the maximum number of bytes allocated to the buffers.

The SPI master will automatically stop transmitting after TXD.MAXCNT bytes have been transmitted and RXD.MAXCNT bytes have been received. If TXD.MAXCNT is larger than RXD.MAXCNT, the superfluous received bytes will be ignored. If RXD.MAXCNT is larger than TXD.MAXCNT, the remaining transmitted bytes will contain the value defined in the ORC register.

If the RXD.PTR and the TXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next transmission immediately after having received the STARTED event.

The ENDRX/ENDTX event indicate that EasyDMA has finished accessing respectively the RX/TX buffer in RAM. The END event gets generated when both RX and TX are finished accessing the buffers in RAM.

### 31.2.1 EasyDMA list

EasyDMA supports one list type.

The supported list type is:

- Array list

#### EasyDMA array list

The EasyDMA array list can be represented by the data structure `ArrayList_type`.

For illustration, see the code example below. This data structure includes only a buffer with size equal to `Channel.MAXCNT`. EasyDMA will use the `Channel.MAXCNT` register to determine when the buffer is full. Replace 'Channel' by the specific data channel you want to use, for instance 'NRF\_SPIM->RXD', 'NRF\_SPIM->TXD', 'NRF\_TWIM->RXD', etc.

The `Channel.MAXCNT` register cannot be specified larger than the actual size of the buffer. If `Channel.MAXCNT` is specified larger than the size of the buffer, the EasyDMA channel may overflow the buffer.

This array list does not provide a mechanism to explicitly specify where the next item in the list is located. Instead, it assumes that the list is organized as a linear array where items are located one after the other in RAM.

```
#define BUFFER_SIZE 4

typedef struct ArrayList
{
    uint8_t buffer[BUFFER_SIZE];
} ArrayList_type;

ArrayList_type MyArrayList[3];
```

```
//replace 'Channel' below by the specific data channel you want to use,
//      for instance 'NRF_SPIM->RXD', 'NRF_TWIM->RXD', etc.
Channel.MAXCNT = BUFFER_SIZE;
Channel.PTR = &MyArrayList;
```

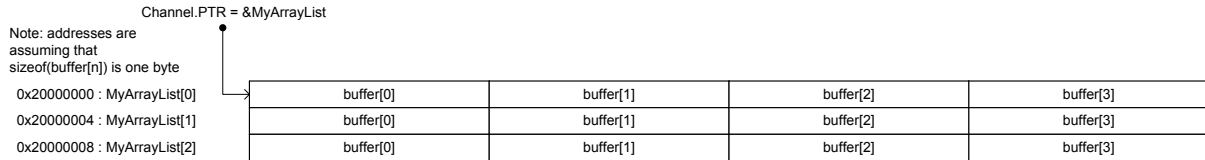


Figure 72: EasyDMA array list

### 31.3 SPI master transaction sequence

An SPI master transaction consists of a sequence started by the START task followed by a number of events, and finally the STOP task.

An SPI master transaction is started by triggering the START task. The ENDTX event will be generated when the transmitter has transmitted all bytes in the TXD buffer as specified in the TXD.MAXCNT register. The ENDRX event will be generated when the receiver has filled the RXD buffer, i.e. received the last possible byte as specified in the RXD.MAXCNT register.


Following a START task, the SPI master will generate an END event when both ENDRX and ENDTX have been generated.

The SPI master is stopped by triggering the STOP task. A STOPPED event is generated when the SPI master has stopped.

If the ENDRX event has not already been generated when the SPI master has come to a stop, the SPI master will generate the ENDRX event explicitly even though the RX buffer is not full.

If the ENDTX event has not already been generated when the SPI master has come to a stop, the SPI master will generate the ENDTX event explicitly even though all bytes in the TXD buffer, as specified in the TXD.MAXCNT register, have not been transmitted.

The SPI master is a synchronous interface, and for every byte that is sent, a different byte will be received at the same time; this is illustrated in [Figure 73: SPI master transaction](#) on page 288.

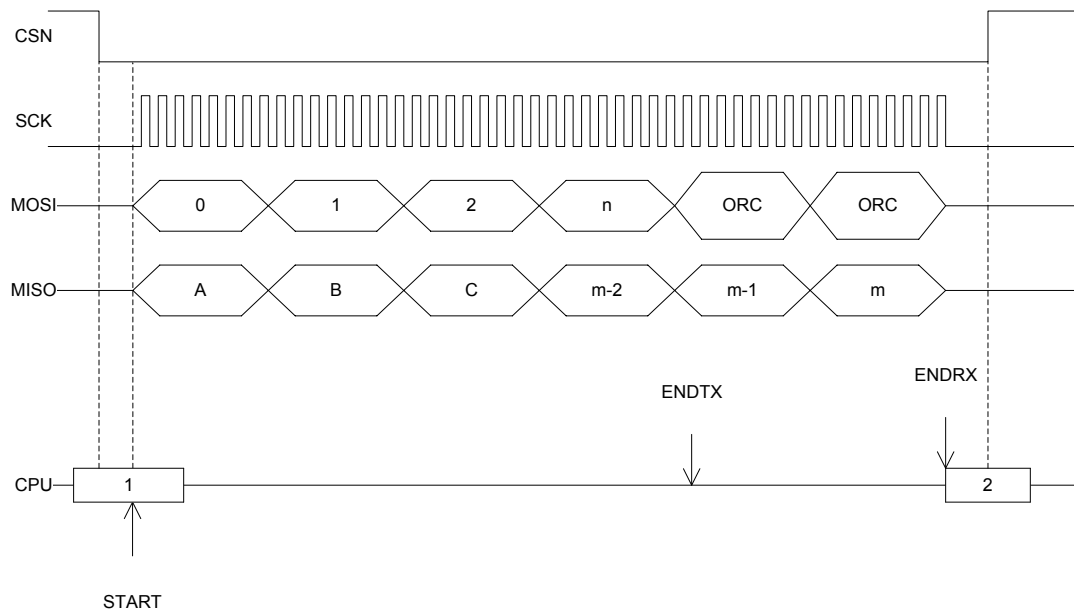

**Figure 73: SPI master transaction**

## 31.4 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 31.5 Master mode pin configuration

The SCK, MOSI, and MISO signals associated with the SPI master are mapped to physical pins according to the configuration specified in the PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers respectively.

The PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers and their configurations are only used as long as the SPI master is enabled, and retained only as long as the device is in ON mode. PSEL.SCK, PSEL.MOSI and PSEL.MISO must only be configured when the SPI master is disabled.

To secure correct behavior in the SPI, the pins used by the SPI must be configured in the GPIO peripheral as described in [Table 69: GPIO configuration](#) on page 288 prior to enabling the SPI. This configuration must be retained in the GPIO for the selected IOs as long as the SPI is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 69: GPIO configuration**

SPI master signal	SPI master pin	Direction	Output value	Comments
SCK	As specified in PSEL.SCK	Output	Same as CONFIG.CPOL	
MOSI	As specified in PSEL.MOSI	Output	0	
MISO	As specified in PSEL.MISO	Input	Not applicable	



## 31.6 Registers

**Table 70: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPIM	SPIM0	SPI master 0	
0x40004000	SPIM	SPIM1	SPI master 1	
0x40023000	SPIM	SPIM2	SPI master 2	

**Table 71: Register Overview**

Register	Offset	Description
TASKS_START	0x010	Start SPI transaction
TASKS_STOP	0x014	Stop SPI transaction
TASKS_SUSPEND	0x01C	Suspend SPI transaction
TASKS_RESUME	0x020	Resume SPI transaction
EVENTS_STOPPED	0x104	SPI transaction has stopped
EVENTS_ENDRX	0x110	End of RXD buffer reached
EVENTS_END	0x118	End of RXD buffer and TXD buffer reached
EVENTS_ENDTX	0x120	End of TXD buffer reached
EVENTS_STARTED	0x14C	Transaction started
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	Enable SPIM
PSEL_SCK	0x508	Pin select for SCK
PSEL_MOSI	0x50C	Pin select for MOSI signal
PSEL_MISO	0x510	Pin select for MISO signal
FREQUENCY	0x524	SPI frequency. Accuracy depends on the HFCLK source selected.
RXD_PTR	0x534	Data pointer
RXD_MAXCNT	0x538	Maximum number of bytes in receive buffer
RXD_AMOUNT	0x53C	Number of bytes transferred in the last transaction
RXD_LIST	0x540	EasyDMA list type
TXD_PTR	0x544	Data pointer
TXD_MAXCNT	0x548	Maximum number of bytes in transmit buffer
TXD_AMOUNT	0x54C	Number of bytes transferred in the last transaction
TXD_LIST	0x550	EasyDMA list type
CONFIG	0x554	Configuration register
ORC	0x5C0	Over-read character. Character clocked out in case and over-read of the TXD buffer.

### 31.6.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END_START				Shortcut between END event and START task																													
						See <a href="#">EVENTS_END</a> and <a href="#">TASKS_START</a>																													
			Disabled	0		Disable shortcut																													
			Enabled	1		Enable shortcut																													

### 31.6.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E																D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	ENDRX				Write '1' to Enable interrupt for ENDRX event																													
						See <a href="#">EVENTS_ENDRX</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	END				Write '1' to Enable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
D	RW	ENDTX				Write '1' to Enable interrupt for ENDTX event																													
						See <a href="#">EVENTS_ENDTX</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
E	RW	STARTED				Write '1' to Enable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 31.6.3 INTENCLR

Address offset: 0x308

## Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E																D				C	B			A							
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	ENDRX				Write '1' to Disable interrupt for ENDRX event																													
						See <a href="#">EVENTS_ENDRX</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
D	RW	ENDTX				Write '1' to Disable interrupt for ENDTX event																													
						See <a href="#">EVENTS_ENDTX</a>																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																				E										D					C			B			A		
Reset 0x00000000				0 0																																							
Id	RW	Field	Value Id	Value	Description																																						
			Clear	1	Disable																																						
			Disabled	0	Read: Disabled																																						
			Enabled	1	Read: Enabled																																						
E	RW	STARTED					Write '1' to Disable interrupt for STARTED event																																				
								See <a href="#">EVENTS_STARTED</a>																																			
			Clear	1	Disable																																						
			Disabled	0	Read: Disabled																																						
			Enabled	1	Read: Enabled																																						

### 31.6.4 ENABLE

Address offset: 0x500

Enable SPIM

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																																				A			A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0								
Id	RW	Field		Value Id	Value										Description																											
A	RW	ENABLE													Enable or disable SPIM																											
				Disabled	0										Disable SPIM																											
				Enabled	7										Enable SPIM																											

### 31.6.5 PSEL.SCK

Address offset: 0x508

Pin select for SCK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				C																																A			A
Reset 0xFFFFFFFF				1 1																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	PIN		[0..31]	Pin number																																		
C	RW	CONNECT			Connection																																		
			Disconnected	1	Disconnect																																		
			Connected	0	Connect																																		

### 31.6.6 PSEL.MOSI

Address offset: 0x50C

Pin select for MOSI signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				C																																A			A
Reset 0xFFFFFFFF				1 1																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	PIN		[0..31]	Pin number																																		
C	RW	CONNECT			Connection																																		
			Disconnected	1	Disconnect																																		
			Connected	0	Connect																																		

### 31.6.7 PSEL.MISO

Address offset: 0x510

Pin select for MISO signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PIN			[0..31]	Pin number																													
C	RW	CONNECT				Connection																													
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 31.6.8 FREQUENCY

Address offset: 0x524

SPI frequency. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FREQUENCY				SPI master data rate																													
			K125		0x02000000	125 kbps																													
			K250		0x04000000	250 kbps																													
			K500		0x08000000	500 kbps																													
			M1		0x10000000	1 Mbps																													
			M2		0x20000000	2 Mbps																													
			M4		0x40000000	4 Mbps																													
			M8		0x80000000	8 Mbps																													

### 31.6.9 RXD.PTR

Address offset: 0x534

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value				Description																											
A	RW	PTR							Data pointer																											

### 31.6.10 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in receive buffer																													

### 31.6.11 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 31.6.12 RXD.LIST

Address offset: 0x540

EasyDMA list type

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	LIST			List type																														
			Disabled	0	Disable EasyDMA list																														
			ArrayList	1	Use array list																														

### 31.6.13 TXD.PTR

Address offset: 0x544

Data pointer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Data pointer																											

### 31.6.14 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT			Maximum number of bytes in transmit buffer																														

### 31.6.15 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	AMOUNT			Number of bytes transferred in the last transaction																														

### 31.6.16 TXD.LIST

Address offset: 0x550

EasyDMA list type

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	LIST			List type																														
			Disabled	0	Disable EasyDMA list																														
			ArrayList	1	Use array list																														

### 31.6.17 CONFIG

Address offset: 0x554

Configuration register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id																																					C B A		
Reset 0x00000000					0 0																																		
Id	RW	Field	Value Id	Value	Description																																		
A	RW	ORDER			Bit order																																		
			MsbFirst	0	Most significant bit shifted out first																																		
			LsbFirst	1	Least significant bit shifted out first																																		
B	RW	CPHA			Serial clock (SCK) phase																																		
			Leading	0	Sample on leading edge of clock, shift serial data on trailing edge																																		
			Trailing	1	Sample on trailing edge of clock, shift serial data on leading edge																																		
C	RW	CPOL			Serial clock (SCK) polarity																																		
			ActiveHigh	0	Active high																																		
			ActiveLow	1	Active low																																		

### 31.6.18 ORC

Address offset: 0x5C0

Over-read character. Character clocked out in case and over-read of the TXD buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ORC			Over-read character. Character clocked out in case and over-read of the TXD buffer.																														

## 31.7 Electrical specification

### 31.7.1 SPIM master interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{SPIM}}$	Bit rates for SPIM <sup>25</sup>			8 <sup>26</sup>	Mbps
$I_{\text{SPIM},2\text{Mbps}}$	Run current for SPIM, 2 Mbps		50		$\mu\text{A}$
$I_{\text{SPIM},8\text{Mbps}}$	Run current for SPIM, 8 Mbps		50		$\mu\text{A}$
$I_{\text{SPIM},\text{IDLE}}$	Idle current for SPIM (STARTed, no CSN activity)		1		$\mu\text{A}$
$t_{\text{SPIM},\text{START}}$	Time from START task to transmission started	..	..	..	$\mu\text{s}$

### 31.7.2 Serial Peripheral Interface Master (SPIM) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{SPIM},\text{CSCK}}$	SCK period	..	..	..	ns
$t_{\text{SPIM},\text{RSCK},\text{LD}}$	SCK rise time, standard drive <sup>a</sup>			$t_{\text{RF},25\text{pF}}$	
$t_{\text{SPIM},\text{RSCK},\text{HD}}$	SCK rise time, high drive <sup>a</sup>			$t_{\text{HRF},25\text{pF}}$	
$t_{\text{SPIM},\text{FSCK},\text{LD}}$	SCK fall time, standard drive <sup>a</sup>			$t_{\text{RF},25\text{pF}}$	
$t_{\text{SPIM},\text{FSCK},\text{HD}}$	SCK fall time, high drive <sup>a</sup>			$t_{\text{HRF},25\text{pF}}$	
$t_{\text{SPIM},\text{WHCK}}$	SCK high time <sup>a</sup>	$(0.5 \cdot t_{\text{CSCK}})$ $- t_{\text{RSCK}}$			

<sup>25</sup> High bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>26</sup> The actual maximum data rate depends on the slave's CLK to MISO and MOSI setup and hold timings.

<sup>a</sup> At 25pF load, including GPIO pin capacitance, see GPIO spec.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{SPIM,WLSCK}}$	SCK low time <sup>a</sup>	$(0.5 \cdot t_{\text{CSCK}})$			
		$-t_{\text{FSCK}}$			
$t_{\text{SPIM,SUMI}}$	MISO to CLK edge setup time	19			ns
$t_{\text{SPIM,HMI}}$	CLK edge to MISO hold time	18			ns
$t_{\text{SPIM,VMO}}$	CLK edge to MOSI valid			59	ns
$t_{\text{SPIM,HMO}}$	MOSI hold time after CLK edge	20			ns


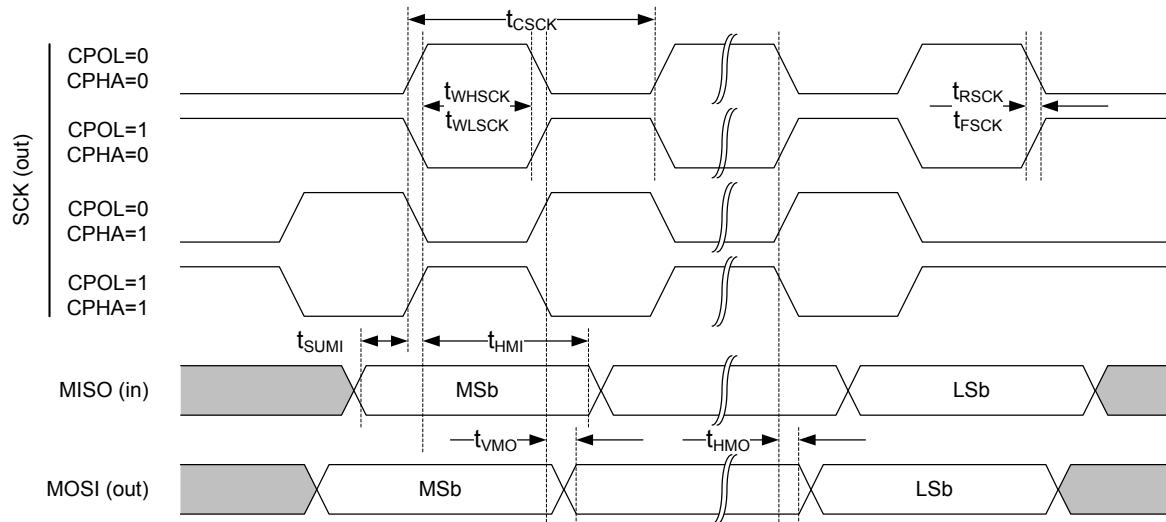


Figure 74: SPIM timing diagram

## 32 SPIS — Serial peripheral interface slave with EasyDMA

SPI slave (SPIS) is implemented with EasyDMA support for ultra low power serial communication from an external SPI master. EasyDMA in conjunction with hardware-based semaphore mechanisms removes all real-time requirements associated with controlling the SPI slave from a low priority CPU execution context.

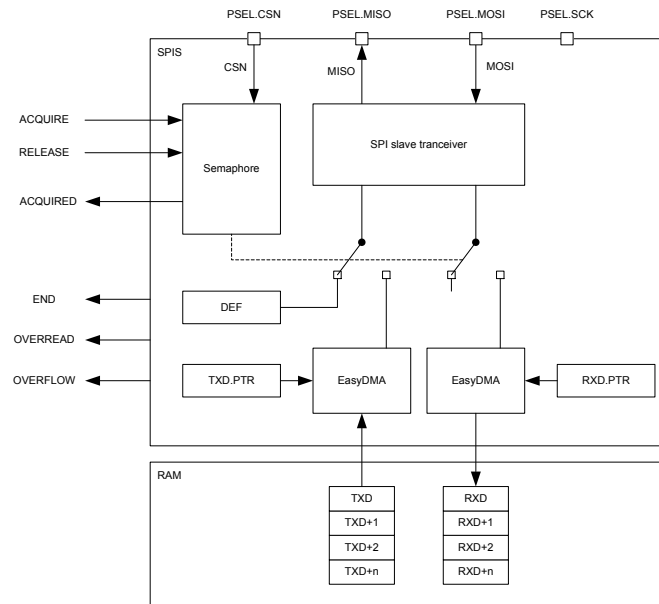

**Figure 75: SPI slave**

The SPIS supports SPI modes 0 through 3. The CONFIG register allows setting CPOL and CPHA appropriately.

**Table 72: SPI modes**

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE0	0 (Leading)	0 (Active High)
SPI_MODE1	0 (Leading)	1 (Active Low)
SPI_MODE2	1 (Trailing)	0 (Active High)
SPI_MODE3	1 (Trailing)	1 (Active Low)

### 32.1 Shared resources

The SPI slave shares registers and other resources with other peripherals that have the same ID as the SPI slave. Therefore, you must disable all peripherals that have the same ID as the SPI slave before the SPI slave can be configured and used.

Disabling a peripheral that has the same ID as the SPI slave will not reset any of the registers that are shared with the SPI slave. It is important to configure all relevant SPI slave registers explicitly to secure that it operates correctly.

The Instantiation table in [Instantiation](#) on page 25 shows which peripherals have the same ID as the SPI slave.

### 32.2 EasyDMA

The SPI slave implements EasyDMA for reading and writing to and from the RAM. The END event indicates that EasyDMA has finished accessing the buffer in RAM.



If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

### 32.3 SPI slave operation

SPI slave uses two memory pointers, RXD.PTR and TXD.PTR, that point to the RXD buffer (receive buffer) and TXD buffer (transmit buffer) respectively. Since these buffers are located in RAM, which can be accessed by both the SPI slave and the CPU, a hardware based semaphore mechanism is implemented to enable safe sharing.

See [Figure 76: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 298.

Before the CPU can safely update the RXD.PTR and TXD.PTR pointers it must first acquire the SPI semaphore. The CPU can acquire the semaphore by triggering the ACQUIRE task and then receiving the ACQUIRED event. When the CPU has updated the RXD.PTR and TXD.PTR pointers the CPU must release the semaphore before the SPI slave will be able to acquire it. The CPU releases the semaphore by triggering the RELEASE task. This is illustrated in [Figure 76: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 298. Triggering the RELEASE task when the semaphore is not granted to the CPU will have no effect.

The semaphore mechanism does not, at any time, prevent the CPU from performing read or write access to the RXD.PTR register, the TXD.PTR registers, or the RAM that these pointers are pointing to. The semaphore is only telling when these can be updated by the CPU so that safe sharing is achieved.

The semaphore is by default assigned to the CPU after the SPI slave is enabled. No ACQUIRED event will be generated for this initial semaphore handover. An ACQUIRED event will be generated immediately if the ACQUIRE task is triggered while the semaphore is assigned to the CPU.

The SPI slave will try to acquire the semaphore when CSN goes low. If the SPI slave does not manage to acquire the semaphore at this point, the transaction will be ignored. This means that all incoming data on MOSI will be discarded, and the DEF (default) character will be clocked out on the MISO line throughout the whole transaction. This will also be the case even if the semaphore is released by the CPU during the transaction. In case of a race condition where the CPU and the SPI slave try to acquire the semaphore at the same time, as illustrated in lifeline item 2 in [Figure 76: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 298, the semaphore will be granted to the CPU.

If the SPI slave acquires the semaphore, the transaction will be granted. The incoming data on MOSI will be stored in the RXD buffer and the data in the TXD buffer will be clocked out on MISO.

When a granted transaction is completed and CSN goes high, the SPI slave will automatically release the semaphore and generate the END event.

As long as the semaphore is available the SPI slave can be granted multiple transactions one after the other. If the CPU is not able to reconfigure the TXD.PTR and RXD.PTR between granted transactions, the same TX data will be clocked out and the RX buffers will be overwritten. To prevent this from happening, the END\_ACQUIRE shortcut can be used. With this shortcut enabled the semaphore will be handed over to the CPU automatically after the granted transaction has completed, giving the CPU the ability to update the TXPTR and RXPTR between every granted transaction.

If the CPU tries to acquire the semaphore while it is assigned to the SPI slave, an immediate handover will not be granted. However, the semaphore will be handed over to the CPU as soon as the SPI slave has released the semaphore after the granted transaction is completed. If the END\_ACQUIRE shortcut is enabled and the CPU has triggered the ACQUIRE task during a granted transaction, only one ACQUIRE request will be served following the END event.

The MAXRX register specifies the maximum number of bytes the SPI slave can receive in one granted transaction. If the SPI slave receives more than MAXRX number of bytes, an OVERFLOW will be indicated in the STATUS register and the incoming bytes will be discarded.

The MAXTX parameter specifies the maximum number of bytes the SPI slave can transmit in one granted transaction. If the SPI slave is forced to transmit more than MAXTX number of bytes, an OVERREAD will be indicated in the STATUS register and the ORC character will be clocked out.

The RXD.AMOUNT and TXD.AMOUNT registers are updated when a granted transaction is completed. The TXD.AMOUNT register indicates how many bytes were read from the TX buffer in the last transaction, that is, ORC (over-read) characters are not included in this number. Similarly, the RXD.AMOUNT register indicates how many bytes were written into the RX buffer in the last transaction.

The ENDRX event is generated when the RX buffer has been filled.

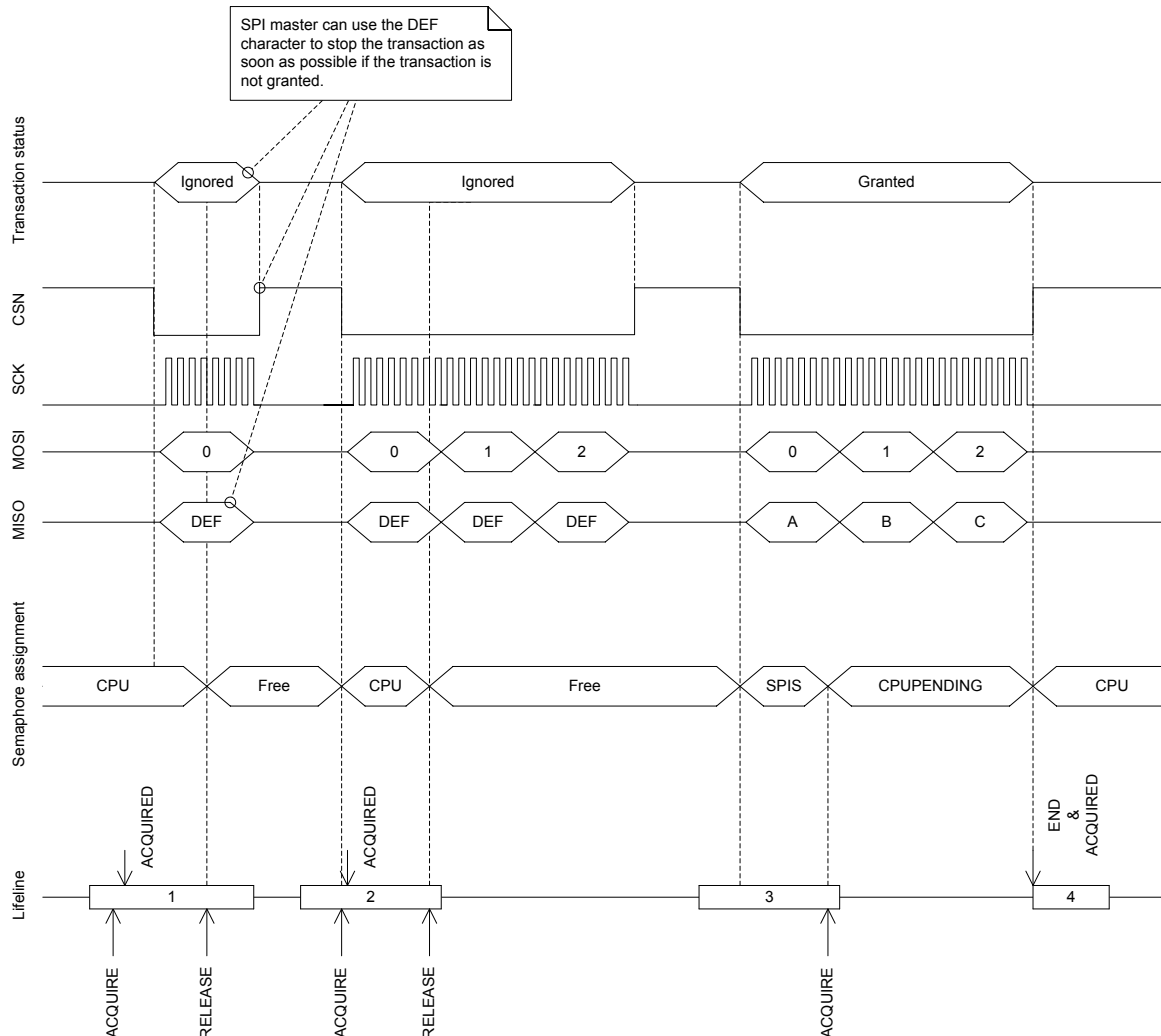


Figure 76: SPI transaction when shortcut between END and ACQUIRE is enabled

## 32.4 Pin configuration

The CSN, SCK, MOSI, and MISO signals associated with the SPI slave are mapped to physical pins according to the configuration specified in the PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers respectively. If the CONNECT field of any of these registers is set to Disconnected, the associated SPI slave signal will not be connected to any physical pins.

The PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers and their configurations are only used as long as the SPI slave is enabled, and retained only as long as the device is in System ON mode, see [POWER — Power supply](#) on page 81 chapter for more information about power modes. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO must only be configured when the SPI slave is disabled.

To secure correct behavior in the SPI slave, the pins used by the SPI slave must be configured in the GPIO peripheral as described in [Table 73: GPIO configuration before enabling peripheral](#) on page 299 before enabling the SPI slave. This is to secure that the pins used by the SPI slave are driven correctly if the SPI

slave itself is temporarily disabled, or if the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected I/Os as long as the SPI slave is to be recognized by an external SPI master.

The MISO line is set in high impedance as long as the SPI slave is not selected with CSN.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 73: GPIO configuration before enabling peripheral**

SPI signal	SPI pin	Direction	Output value	Comment
CSN	As specified in PSEL.CSN	Input	Not applicable	
SCK	As specified in PSEL.SCK	Input	Not applicable	
MOSI	As specified in PSEL.MOSI	Input	Not applicable	
MISO	As specified in PSEL.MISO	Input	Not applicable	Emulates that the SPI slave is not selected.

## 32.5 Registers

**Table 74: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPIS	SPIS0	SPI slave 0	
0x40004000	SPIS	SPIS1	SPI slave 1	
0x40023000	SPIS	SPIS2	SPI slave 2	

**Table 75: Register Overview**

Register	Offset	Description	
TASKS_ACQUIRE	0x024	Acquire SPI semaphore	
TASKS_RELEASE	0x028	Release SPI semaphore, enabling the SPI slave to acquire it	
EVENTS_END	0x104	Granted transaction completed	
EVENTS_ENDRX	0x110	End of RXD buffer reached	
EVENTS_ACQUIRED	0x128	Semaphore acquired	
<i>SHORTS</i>	0x200	Shortcut register	
<i>INTENSET</i>	0x304	Enable interrupt	
<i>INTENCLR</i>	0x308	Disable interrupt	
<i>SEMSTAT</i>	0x400	Semaphore status register	
<i>STATUS</i>	0x440	Status from last transaction	
<i>ENABLE</i>	0x500	Enable SPI slave	
<i>PSELSCK</i>	0x508	Pin select for SCK	Deprecated
<i>PSELMISO</i>	0x50C	Pin select for MISO	Deprecated
<i>PSELMOSI</i>	0x510	Pin select for MOSI	Deprecated
<i>PSELCSN</i>	0x514	Pin select for CSN	Deprecated
<i>PSEL.SCK</i>	0x508	Pin select for SCK	
<i>PSEL.MISO</i>	0x50C	Pin select for MISO signal	
<i>PSEL.MOSI</i>	0x510	Pin select for MOSI signal	
<i>PSEL.CSN</i>	0x514	Pin select for CSN signal	
<i>RXDPTR</i>	0x534	RXD data pointer	Deprecated
<i>MAXRX</i>	0x538	Maximum number of bytes in receive buffer	Deprecated
<i>AMOUNTRX</i>	0x53C	Number of bytes received in last granted transaction	Deprecated
<i>RXD.PTR</i>	0x534	RXD data pointer	
<i>RXD.MAXCNT</i>	0x538	Maximum number of bytes in receive buffer	
<i>RXD.AMOUNT</i>	0x53C	Number of bytes received in last granted transaction	
<i>TXDPTR</i>	0x544	TXD data pointer	Deprecated
<i>MAXTX</i>	0x548	Maximum number of bytes in transmit buffer	Deprecated
<i>AMOUNTTX</i>	0x54C	Number of bytes transmitted in last granted transaction	Deprecated
<i>TXD.PTR</i>	0x544	TXD data pointer	
<i>TXD.MAXCNT</i>	0x548	Maximum number of bytes in transmit buffer	
<i>TXD.AMOUNT</i>	0x54C	Number of bytes transmitted in last granted transaction	
<i>CONFIG</i>	0x554	Configuration register	

Register	Offset	Description
<i>DEF</i>	0x55C	Default character. Character clocked out in case of an ignored transaction.
<i>ORC</i>	0x5C0	Over-read character

### 32.5.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END_ACQUIRE				Shortcut between END event and ACQUIRE task																													
			Disabled	0		See <a href="#">EVENTS_END</a> and <a href="#">TASKS_ACQUIRE</a>																													
			Enabled	1																															

### 32.5.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	END			Write '1' to Enable interrupt for END event																														
			Set	1	See <a href="#">EVENTS_END</a> Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	ENDRX			Write '1' to Enable interrupt for ENDRX event																														
			Set	1	See <a href="#">EVENTS_ENDRX</a> Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	ACQUIRED			Write '1' to Enable interrupt for ACQUIRED event																														
			Set	1	See <a href="#">EVENTS_ACQUIRED</a> Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 32.5.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	ENDRX				Write '1' to Disable interrupt for ENDRX event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				C					B					A					
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_ENDRX</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	ACQUIRED				Write '1' to Disable interrupt for ACQUIRED event																													
						See <a href="#">EVENTS_ACQUIRED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 32.5.4 SEMSTAT

Address offset: 0x400

Semaphore status register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
Id	RW	Field	Value	Id	Value	Description																															
A	R	SEMSTAT																																			
		Free	0			Semaphore status																															
		CPU	1			Semaphore is free																															
		SPIS	2			Semaphore is assigned to CPU																															
		CPUPending	3			Semaphore is assigned to SPI slave																															
							Semaphore is assigned to SPI but a handover to the CPU is pending																														

### 32.5.5 STATUS

Address offset: 0x440

Status from last transaction

Individual bits are cleared by writing a '1' to the bits that shall be cleared

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OVERREAD				TX buffer over-read detected, and prevented																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
			Clear	1	Write: clear error on writing '1'																														
B	RW	OVERFLOW				RX buffer overflow detected, and prevented																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
			Clear	1	Write: clear error on writing '1'																														

### 32.5.6 ENABLE

Address offset: 0x500

Enable SPI slave

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable SPI slave																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
			Disabled	0		Disable SPI slave																													
			Enabled	2		Enable SPI slave																													

### 32.5.7 PSELSCK ( Deprecated )

Address offset: 0x508

Pin select for SCK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PSELSCK		[0..31]		Pin number configuration for SPI SCK signal																													
			Disconnected	0xFFFFFFFF		Disconnect																													

### 32.5.8 PSELMISO ( Deprecated )

Address offset: 0x50C

Pin select for MISO

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	RW	PSELMISO		[0..31]				Pin number configuration for SPI MISO signal																											
			Disconnected	0xFFFFFFFF				Disconnect																											

### 32.5.9 PSELMOSI ( Deprecated )

Address offset: 0x510

Pin select for MOSI

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELMOSI		[0..31]	Pin number configuration for SPI MOSI signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

### 32.5.10 PSELCSN ( Deprecated )

Address offset: 0x514

Pin select for CSN

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	RW	PSELCSN		[0..31]				Pin number configuration for SPI CSN signal																											
			Disconnected	0xFFFFFFFF				Disconnect																											

### 32.5.11 PSEL.SCK

Address offset: 0x508

Pin select for SCK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																					
Id				B																												A				A	A	A	A																	
Reset 0xFFFFFFFF				1																												1				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																																																		
A	RW	PIN		[0..31]		Pin number																																																		
B	RW	CONNECT				Connection																																																		
			Disconnected	1	Disconnect																																																			
			Connected	0	Connect																																																			

### 32.5.12 PSEL.MISO

Address offset: 0x50C

Pin select for MISO signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				B																												A				A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				
Id	RW	Field	Value Id	Value	Description																																		
A	RW	PIN		[0..31]	Pin number																																		
B	RW	CONNECT			Connection																																		
			Disconnected	1	Disconnect																																		
			Connected	0	Connect																																		

### 32.5.13 PSEL.MOSI

Address offset: 0x510

Pin select for MOSI signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id				B																										A				A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																
A	RW	PIN		[0..31]	Pin number																																
B	RW	CONNECT			Connection																																
			Disconnected	1	Disconnect																																
			Connected	0	Connect																																

### 32.5.14 PSEL.CSN

Address offset: 0x514

Pin select for CSN signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id				B																										A				A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																
A	RW	PIN		[0..31]	Pin number																																
B	RW	CONNECT			Connection																																
			Disconnected	1	Disconnect																																
			Connected	0	Connect																																

### 32.5.15 RXDPTR ( Deprecated )

Address offset: 0x534

RXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value			Description																											
A	RW	RXDPTR							RXD data pointer																											

### 32.5.16 MAXRX ( Deprecated )

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXRX				Maximum number of bytes in receive buffer																													

### 32.5.17 AMOUNTRX ( Deprecated )

Address offset: 0x53C

Number of bytes received in last granted transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNTRX				Number of bytes received in the last granted transaction																													

### 32.5.18 RXD.PTR

Address offset: 0x534

RXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value				Description																											
A	RW	PTR							RXD data pointer																											

### 32.5.19 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in receive buffer																													

### 32.5.20 RXD.AMOUNT

Address offset: 0x53C

Number of bytes received in last granted transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes received in the last granted transaction																													



### 32.5.21 TXDPTR ( Deprecated )

Address offset: 0x544

TXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TXDPTR						TXD data pointer																												

### 32.5.22 MAXTX ( Deprecated )

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value			Description																												
A	RW	MAXTX						Maximum number of bytes in transmit buffer																												

### 32.5.23 AMOUNTTX ( Deprecated )

Address offset: 0x54C

Number of bytes transmitted in last granted transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNTTX				Number of bytes transmitted in last granted transaction																													

### 32.5.24 TXD.PTR

Address offset: 0x544

TXD data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PTR				TXD data pointer																																

### 32.5.25 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	MAXCNT				Maximum number of bytes in transmit buffer																														

### 32.5.26 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transmitted in last granted transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	R	AMOUNT				Number of bytes transmitted in last granted transaction																																

## 32.5.27 CONFIG

Address offset: 0x554

Configuration register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ORDER				Bit order																																
			MsbFirst	0		Most significant bit shifted out first																																
			LsbFirst	1		Least significant bit shifted out first																																
B	RW	CPHA				Serial clock (SCK) phase																																
			Leading	0		Sample on leading edge of clock, shift serial data on trailing edge																																
			Trailing	1		Sample on trailing edge of clock, shift serial data on leading edge																																
C	RW	CPOL				Serial clock (SCK) polarity																																
			ActiveHigh	0		Active high																																
			ActiveLow	1		Active low																																

## 32.5.28 DEF

Address offset: 0x55C

Default character. Character clocked out in case of an ignored transaction.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	DEF				Default character. Character clocked out in case of an ignored transaction.																													

## 32.5.29 ORC

Address offset: 0x5C0

Over-read character

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A A																														

## 32.6 Electrical specification

### 32.6.1 SPIS slave interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{SPIS}$	Bit rates for SPIS <sup>27</sup>			8 <sup>28</sup>	Mbps
$I_{SPIS,2Mbps}$	Run current for SPIS, 2 Mbps		45		$\mu A$
$I_{SPIS,8Mbps}$	Run current for SPIS, 8 Mbps		45		$\mu A$
$I_{SPIS,IDLE}$	Idle current for SPIS (STARTed, no CSN activity)		1		$\mu A$
$t_{SPIS,LP,START}$	Time from RELEASE task to ready to receive/transmit (CSN active), Low power mode		$t_{SPIS,CL,STAR}$ +		$\mu s$
$t_{SPIS,CL,START}$	Time from RELEASE task to receive/transmit (CSN active), Constant latency mode		$t_{START\_HFIN}$ 0.125		$\mu s$

### 32.6.2 Serial Peripheral Interface Slave (SPIS) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$t_{SPIS,CCKIN,8Mbps}$	SCK input period at 8Mbps		125		ns
$t_{SPIS,CCKIN,4Mbps}$	SCK input period at 4Mbps		250		ns
$t_{SPIS,CCKIN,2Mbps}$	SCK input period at 2Mbps		500		ns
$t_{SPIS,RFCKIN}$	SCK input rise/fall time			30	ns
$t_{SPIS,WHCKIN}$	SCK input high time	30			ns
$t_{SPIS,WLCKIN}$	SCK input low time	30			ns
$t_{SPIS,SUCSN,LP}$	CSN to CLK setup time, Low power mode	$t_{SPIS,SUCSN,LP}$ +			ns
$t_{SPIS,SUCSN,CL}$	CSN to CLK setup time, Constant latency mode	1000			ns
$t_{SPIS,HCSN}$	CLK to CSN hold time	2000			ns
$t_{SPIS,ASO}$	CSN to MISO driven <sup>a</sup>			1000	ns
$t_{SPIS,DISSO}$	CSN to MISO disabled <sup>a</sup>			68	ns
$t_{SPIS,CWH}$	CSN inactive time	300			ns
$t_{SPIS,VSO}$	CLK edge to MISO valid			59	ns
$t_{SPIS,HSO}$	MISO hold time after CLK edge	20 <sup>29</sup>			ns
$t_{SPIS,SUSI}$	MOSI to CLK edge setup time	19			ns
$t_{SPIS,HSI}$	CLK edge to MOSI hold time	18			ns

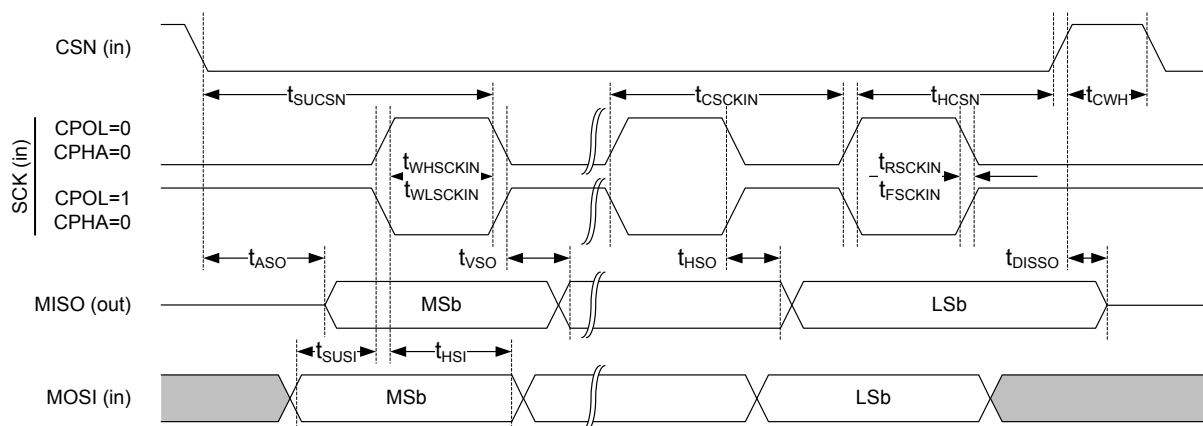


Figure 77: SPIS timing diagram

<sup>27</sup> Higher bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>28</sup> The actual maximum data rate depends on the master's CLK to MISO and MOSI setup and hold timings.

<sup>a</sup> At 25pF load, including GPIO capacitance, see GPIO spec.

<sup>29</sup> This is to ensure compatibility to SPI masters sampling MISO on the same edge as MOSI is output

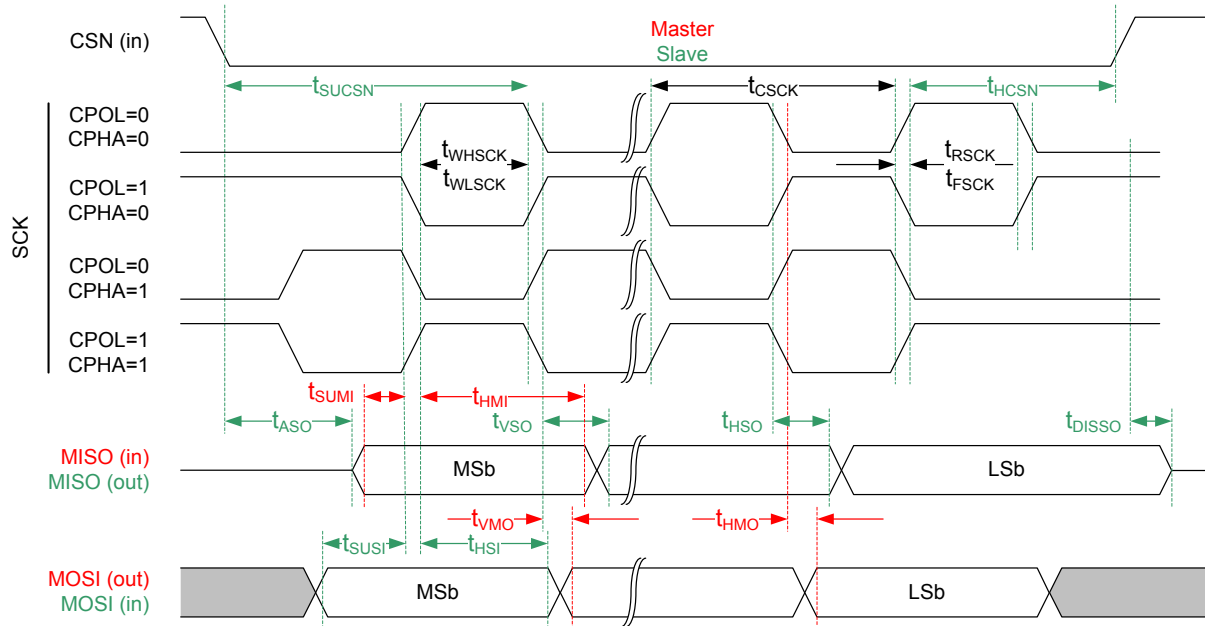


Figure 78: Common SPIM and SPIS timing diagram

## 33 TWIM — I<sup>2</sup>C compatible two-wire interface master with EasyDMA


TWI master with EasyDMA (TWIM) is a two-wire half-duplex master which can communicate with multiple slave devices connected to the same bus

Listed here are the main features for TWIM:

- I<sup>2</sup>C compatible
- 100 kbps, 250 kbps, or 400 kbps
- Support for clock stretching
- EasyDMA


The two-wire interface can communicate with a bi-directional wired-AND bus with two lines (SCL, SDA). The protocol makes it possible to interconnect up to 127 individually addressable devices. TWIM is not compatible with CBUS.

The GPIOs used for each two-wire interface line can be chosen from any GPIO on the device and are independently configurable. This enables great flexibility in device pinout and efficient use of board space and signal routing.

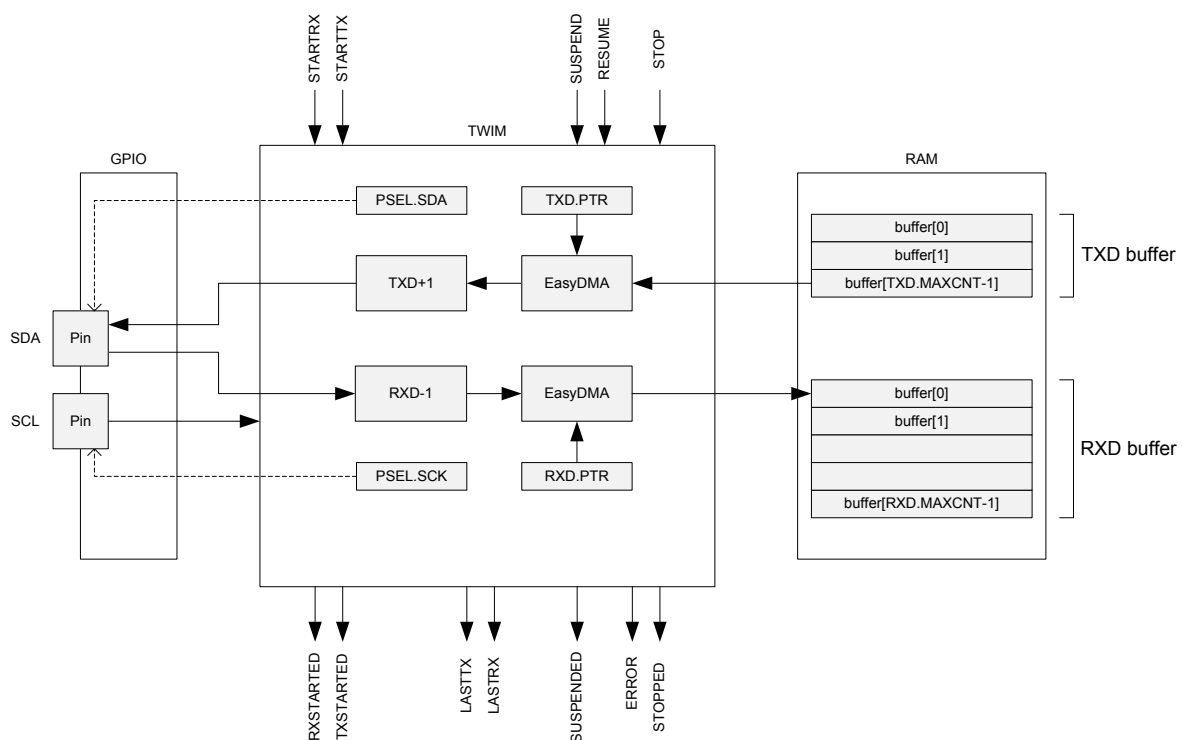

**Figure 79: TWI master with EasyDMA**

A typical TWI setup consists of one master and one or more slaves. For an example, see [Figure 80: A typical TWI setup comprising one master and three slaves](#) on page 310. This TWIM is only able to operate as a single master on the TWI bus. Multi-master bus configuration is not supported.

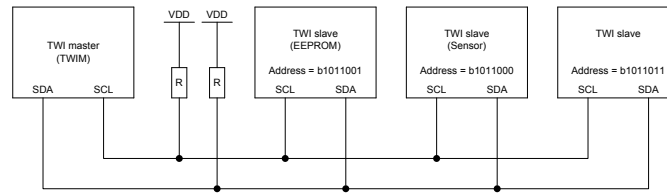

**Figure 80: A typical TWI setup comprising one master and three slaves**

This TWI master supports clock stretching performed by the slaves. The TWI master is started by triggering the STARTTX or STARTRX tasks, and stopped by triggering the STOP task. The TWI master will generate a STOPPED event when it has stopped following a STOP task.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

After the TWI master is started, the STARTTX task or the STARTRX task should not be triggered again before the TWI master has stopped, i.e. following a LASTRX, LASTTX or STOPPED event.

If a NACK is clocked in from the slave, the TWI master will generate an ERROR event.

### 33.1 Shared resources

The TWI master shares registers and other resources with other peripherals that have the same ID as the TWI master. Therefore, you must disable all peripherals that have the same ID as the TWI master before the TWI master can be configured and used.

Disabling a peripheral that has the same ID as the TWI master will not reset any of the registers that are shared with the TWI master. It is therefore important to configure all relevant registers explicitly to secure that the TWI master operates correctly.

The Instantiation table in [Instantiation](#) on page 25 shows which peripherals have the same ID as the TWI.

### 33.2 EasyDMA

The TWI master implements EasyDMA for reading and writing to and from the RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next RX/TX transmission immediately after having received the RXSTARTED/TXSTARTED event.

The STOPPED event indicates that EasyDMA has finished accessing the buffer in RAM.

#### 33.2.1 EasyDMA list

EasyDMA supports one list type.

The supported list type is:

- Array list

##### EasyDMA array list

The EasyDMA array list can be represented by the data structure `ArrayList_type`.

For illustration, see the code example below. This data structure includes only a buffer with size equal to `Channel.MAXCNT`. EasyDMA will use the `Channel.MAXCNT` register to determine when the buffer is full. Replace 'Channel' by the specific data channel you want to use, for instance 'NRF\_SPIM->RXD', 'NRF\_SPIM->TXD', 'NRF\_TWIM->RXD', etc.

The Channel.MAXCNT register cannot be specified larger than the actual size of the buffer. If Channel.MAXCNT is specified larger than the size of the buffer, the EasyDMA channel may overflow the buffer.


This array list does not provide a mechanism to explicitly specify where the next item in the list is located. Instead, it assumes that the list is organized as a linear array where items are located one after the other in RAM.

```
#define BUFFER_SIZE 4

typedef struct ArrayList
{
    uint8_t buffer[BUFFER_SIZE];
} ArrayList_type;

ArrayList_type MyArrayList[3];

//replace 'Channel' below by the specific data channel you want to use,
//      for instance 'NRF_SPIM->RXD', 'NRF_TWIM->RXD', etc.
Channel.MAXCNT = BUFFER_SIZE;
Channel.PTR = &MyArrayList;
```

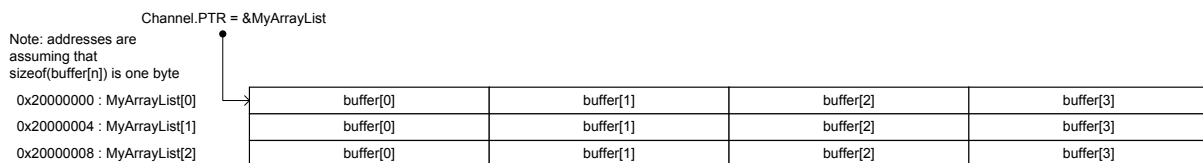

**Figure 81: EasyDMA array list**

### 33.3 Master write sequence


A TWI master write sequence is started by triggering the STARTTX task. After the STARTTX task has been triggered, the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1).

The address must match the address of the slave device that the master wants to write to. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) generated by the slave.

After receiving the ACK bit, the TWI master will clock out the data bytes found in the transmit buffer located in RAM at the address specified in the TXD.PTR register. Each byte clocked out from the master will be followed by an ACK/NACK bit clocked in from the slave.

A typical TWI master write sequence is illustrated in [Figure 82: TWI master writing data to a slave](#) on page 312. Occurrence 2 in the figure illustrates clock stretching performed by the TWI master following a SUSPEND task.

A SUSPENDED event indicates that the SUSPEND task has taken effect; this event can be used to synchronize the software.

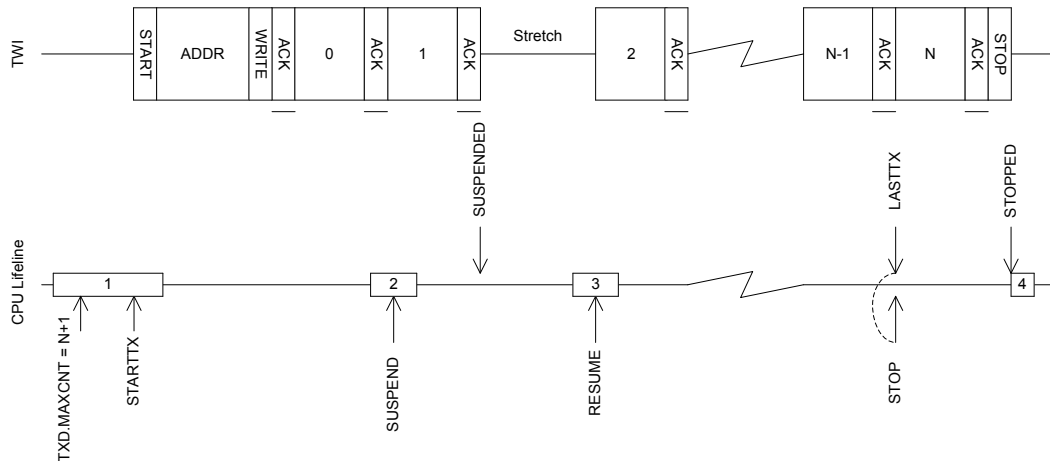

**Figure 82: TWI master writing data to a slave**

The TWI master will generate a LASTTX event when it starts to transmit the last byte, this is illustrated in [Figure 82: TWI master writing data to a slave](#) on page 312

The TWI master is stopped by triggering the STOP task, this task should be triggered during the transmission of the last byte to secure that the TWI will stop as fast as possible after sending the last byte. It is safe to use the shortcut between LASTTX and STOP to accomplish this.

Note that the TWI master does not stop by itself when the whole RAM buffer has been sent, or when an error occurs. The STOP task must be issued, through the use of a local or PPI shortcut, or in software as part of the error handler.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

### 33.4 Master read sequence

A TWI master read sequence is started by triggering the STARTRX task. After the STARTRX task has been triggered the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE = 0, READ = 1). The address must match the address of the slave device that the master wants to read from. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK = 1) generated by the slave.

After having sent the ACK bit the TWI slave will send data to the master using the clock generated by the master.

Data received will be stored in RAM at the address specified in the RXD.PTR register. The TWI master will generate an ACK after all but the last byte received from the slave. The TWI master will generate a NACK after the last byte received to indicate that the read sequence shall stop.

A typical TWI master read sequence is illustrated in [Figure 83: The TWI master reading data from a slave](#) on page 313. Occurrence 2 in the figure illustrates clock stretching performed by the TWI master following a SUSPEND task.

A SUSPENDED event indicates that the SUSPEND task has taken effect; this event can be used to synchronize the software.


The TWI master will generate a LASTRX event when it is ready to receive the last byte, this is illustrated in [Figure 83: The TWI master reading data from a slave](#) on page 313. If RXD.MAXCNT > 1 the LASTRX event is generated after sending the ACK of the previously received byte. If RXD.MAXCNT = 1 the LASTRX event is generated after receiving the ACK following the address and READ bit.

The TWI master is stopped by triggering the STOP task, this task must be triggered before the NACK bit is supposed to be transmitted. The STOP task can be triggered at any time during the reception of the last byte. It is safe to use the shortcut between LASTRX and STOP to accomplish this.



Note that the TWI master does not stop by itself when the RAM buffer is full, or when an error occurs. The STOP task must be issued, through the use of a local or PPI shortcut, or in software as part of the error handler.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

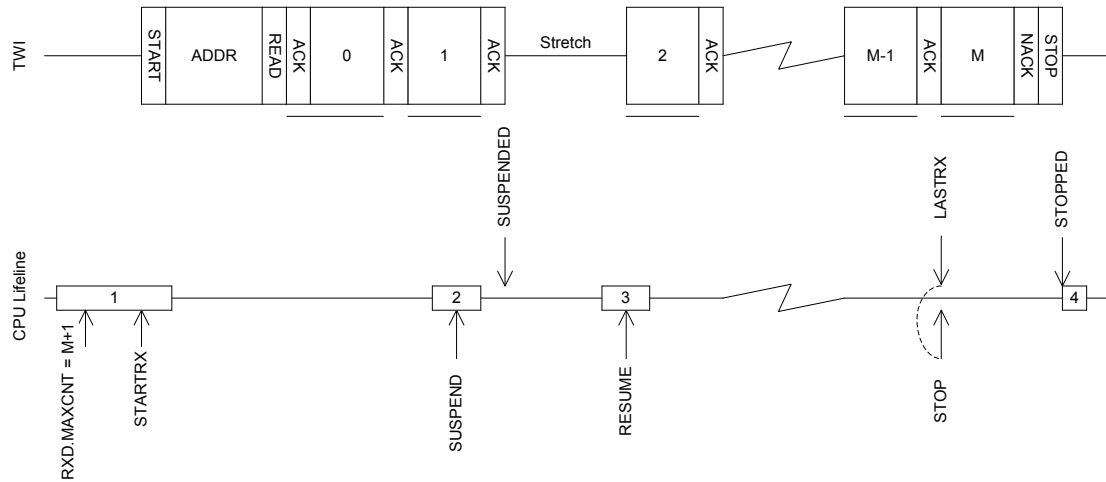


**Figure 83: The TWI master reading data from a slave**

### 33.5 Master repeated start sequence


A typical repeated start sequence is one in which the TWI master writes two bytes to the slave followed by reading four bytes from the slave. This example uses shortcuts to perform the simplest type of repeated start sequence, i.e. one write followed by one read. The same approach can be used to perform a repeated start sequence where the sequence is read followed by write.

The figure [Figure 84: A repeated start sequence, where the TWI master writes two bytes followed by reading 4 bytes from the slave](#) on page 313 illustrates this:

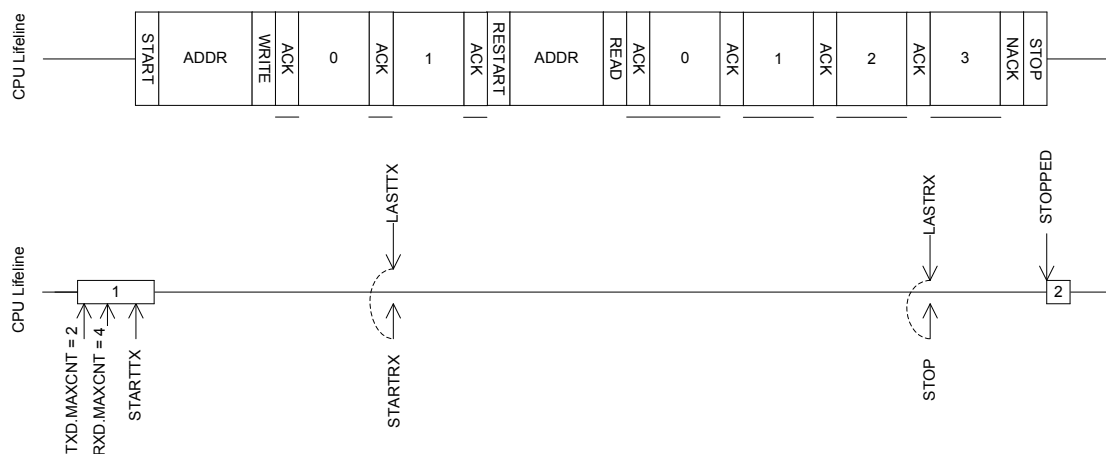

**Figure 84: A repeated start sequence, where the TWI master writes two bytes followed by reading 4 bytes from the slave**

If a more complex repeated start sequence is needed and the TWI firmware driver is serviced in a low priority interrupt it may be necessary to use the SUSPEND task and SUSPENDED event to guarantee that the correct tasks are generated at the correct time. This is illustrated in [Figure 85: A double repeated start sequence using the SUSPEND task to secure safe operation in low priority interrupts](#) on page 314.

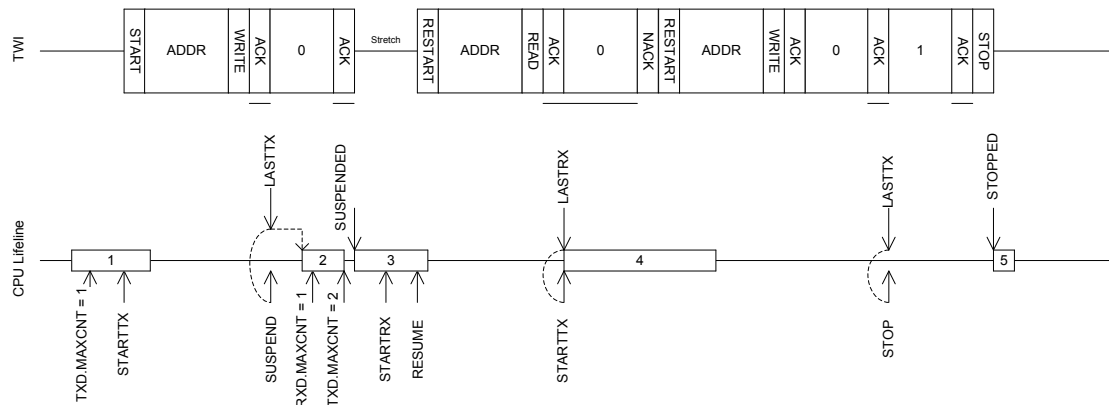

**Figure 85: A double repeated start sequence using the SUSPEND task to secure safe operation in low priority interrupts**

## 33.6 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 33.7 Master mode pin configuration

The SCL and SDA signals associated with the TWI master are mapped to physical pins according to the configuration specified in the PSEL.SCL and PSEL.SDA registers respectively.

The PSEL.SCL and PSEL.SDA registers and their configurations are only used as long as the TWI master is enabled, and retained only as long as the device is in ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.SCL, PSEL.SDA must only be configured when the TWI master is disabled.

To secure correct signal levels on the pins used by the TWI master when the system is in OFF mode, and when the TWI master is disabled, these pins must be configured in the GPIO peripheral as described in [Table 76: GPIO configuration before enabling peripheral](#) on page 314.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 76: GPIO configuration before enabling peripheral**

TWI master signal	TWI master pin	Direction	Output value	Drive strength
SCL	As specified in PSEL.SCL	Input	Not applicable	S0D1
SDA	As specified in PSEL.SDA	Input	Not applicable	S0D1

## 33.8 Registers

**Table 77: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWIM	TWIM0	Two-wire interface master 0	
0x40004000	TWIM	TWIM1	Two-wire interface master 1	

**Table 78: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start TWI receive sequence
TASKS_STARTTX	0x008	Start TWI transmit sequence
TASKS_STOP	0x014	Stop TWI transaction. Must be issued while the TWI master is not suspended.
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_ERROR	0x124	TWI error
EVENTS_SUSPENDED	0x148	Last byte has been sent out after the SUSPEND task has been issued, TWI traffic is now suspended.
EVENTS_RXSTARTED	0x14C	Receive sequence started
EVENTS_TXSTARTED	0x150	Transmit sequence started
EVENTS_LASTRX	0x15C	Byte boundary, starting to receive the last byte
EVENTS_LASTTX	0x160	Byte boundary, starting to transmit the last byte
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4C4	Error source
ENABLE	0x500	Enable TWIM
PSEL_SCL	0x508	Pin select for SCL signal
PSEL_SDA	0x50C	Pin select for SDA signal
FREQUENCY	0x524	TWI frequency
RXD_PTR	0x534	Data pointer
RXD_MAXCNT	0x538	Maximum number of bytes in receive buffer
RXD_AMOUNT	0x53C	Number of bytes transferred in the last transaction
RXD_LIST	0x540	EasyDMA list type
TXD_PTR	0x544	Data pointer
TXD_MAXCNT	0x548	Maximum number of bytes in transmit buffer
TXD_AMOUNT	0x54C	Number of bytes transferred in the last transaction
TXD_LIST	0x550	EasyDMA list type
ADDRESS	0x588	Address used in the TWI transfer

### 33.8.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																					F D C B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	LASTTX_STARTRX				Shortcut between LASTTX event and STARTRX task																														
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_STARTRX</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
B	RW	LASTTX_SUSPEND				Shortcut between LASTTX event and SUSPEND task																														
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_SUSPEND</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
C	RW	LASTTX_STOP				Shortcut between LASTTX event and STOP task																														
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_STOP</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
D	RW	LASTRX_STARTTX				Shortcut between LASTRX event and STARTTX task																														
						See <a href="#">EVENTS_LASTRX</a> and <a href="#">TASKS_STARTTX</a>																														
			Disabled	0	Disable shortcut																															

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id												F				D				C				B				A					
Reset 0x00000000		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																											
F	RW	LASTRX_STOP	Enabled	1	Enable shortcut																												
							Shortcut between LASTRX event and STOP task																										
							See <a href="#">EVENTS_LASTRX</a> and <a href="#">TASKS_STOP</a>																										
			Disabled	0	Disable shortcut																												
			Enabled	1	Enable shortcut																												

### 33.8.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													J	I					H	G	F					D								A
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																												
A	RW	STOPPED					Enable or disable interrupt for STOPPED event																											
							See <a href="#">EVENTS_STOPPED</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
D	RW	ERROR					Enable or disable interrupt for ERROR event																											
							See <a href="#">EVENTS_ERROR</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
F	RW	SUSPENDED					Enable or disable interrupt for SUSPENDED event																											
							See <a href="#">EVENTS_SUSPENDED</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
G	RW	RXSTARTED					Enable or disable interrupt for RXSTARTED event																											
							See <a href="#">EVENTS_RXSTARTED</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
H	RW	TXSTARTED					Enable or disable interrupt for TXSTARTED event																											
							See <a href="#">EVENTS_TXSTARTED</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
I	RW	LASTRX					Enable or disable interrupt for LASTRX event																											
							See <a href="#">EVENTS_LASTRX</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													
J	RW	LASTTX					Enable or disable interrupt for LASTTX event																											
							See <a href="#">EVENTS_LASTTX</a>																											
			Disabled	0	Disable																													
			Enabled	1	Enable																													

### 33.8.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				J I H G F																D A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	STOPPED			Write '1' to Enable interrupt for STOPPED event																														
					See <a href="#">EVENTS_STOPPED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	ERROR			Write '1' to Enable interrupt for ERROR event																														
					See <a href="#">EVENTS_ERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	SUSPENDED			Write '1' to Enable interrupt for SUSPENDED event																														
					See <a href="#">EVENTS_SUSPENDED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
G	RW	RXSTARTED			Write '1' to Enable interrupt for RXSTARTED event																														
					See <a href="#">EVENTS_RXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
H	RW	TXSTARTED			Write '1' to Enable interrupt for TXSTARTED event																														
					See <a href="#">EVENTS_TXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
I	RW	LASTRX			Write '1' to Enable interrupt for LASTRX event																														
					See <a href="#">EVENTS_LASTRX</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
J	RW	LASTTX			Write '1' to Enable interrupt for LASTTX event																														
					See <a href="#">EVENTS_LASTTX</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 33.8.4 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id															J	I	H			G	F											D											A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																																					
						See <a href="#">EVENTS_STOPPED</a>																																					
		Clear	1			Disable																																					
		Disabled	0			Read: Disabled																																					
		Enabled	1			Read: Enabled																																					
D	RW	ERROR				Write '1' to Disable interrupt for ERROR event																																					
						See <a href="#">EVENTS_ERROR</a>																																					

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id									J				I				H				G				F								D								A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
Id	RW	Field	Value Id	Value	Description																																							
F	RW	SUSPENDED	Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
			Write '1' to Disable interrupt for SUSPENDED event																																									
			See <a href="#">EVENTS_SUSPENDED</a>																																									
			Clear	1	Disable																																							
G	RW	RXSTARTED	Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
			Write '1' to Disable interrupt for RXSTARTED event																																									
			See <a href="#">EVENTS_RXSTARTED</a>																																									
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
H	RW	TXSTARTED	Enabled	1	Read: Enabled																																							
			Write '1' to Disable interrupt for TXSTARTED event																																									
			See <a href="#">EVENTS_TXSTARTED</a>																																									
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
I	RW	LASTRX	Write '1' to Disable interrupt for LASTRX event																																									
			See <a href="#">EVENTS_LASTRX</a>																																									
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
			J	RW	LASTTX	Write '1' to Disable interrupt for LASTTX event																																						
See <a href="#">EVENTS_LASTTX</a>																																												
Clear	1	Disable																																										
Disabled	0	Read: Disabled																																										
Enabled	1	Read: Enabled																																										

### 33.8.5 ERRORSRC

Address offset: 0x4C4

Error source

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	OVERRUN			Overflow error																														
					A new byte was received before previous byte got transferred into RXD buffer. (Previous data is lost)																														
			NotReceived	0	Error did not occur																														
			Received	1	Error occurred																														
B	RW	ANACK			NACK received after sending the address (write '1' to clear)																														
			NotReceived	0	Error did not occur																														
			Received	1	Error occurred																														
C	RW	DNACK			NACK received after sending a data byte (write '1' to clear)																														
			NotReceived	0	Error did not occur																														
			Received	1	Error occurred																														

### 33.8.6 ENABLE

Address offset: 0x500

## Enable TWIM

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable TWIM																													
			Disabled	0		Disable TWIM																													
			Enabled	6		Enable TWIM																													

## 33.8.7 PSEL.SCL

Address offset: 0x508

Pin select for SCL signal

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																								
Id					B																																A				A				A				A											
Reset 0xFFFFFFFF					1																																1				1				1				1				1				1			
Id	RW	Field	Value	Id	Value																																Description																							
A	RW	PIN			[0..31]																																Pin number																							
B	RW	CONNECT																																			Connection																							
			Disconnected	1																																	Disconnect																							
			Connected	0																																	Connect																							

## 33.8.8 PSEL.SDA

Address offset: 0x50C

Pin select for SDA signal

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																								
Id					B																																A				A				A				A											
Reset 0xFFFFFFFF					1																																1				1				1				1				1				1			
Id	RW	Field	Value	Id	Value																																Description																							
A	RW	PIN			[0..31]																																Pin number																							
B	RW	CONNECT																																			Connection																							
			Disconnected		1																																Disconnect																							
			Connected		0																																Connect																							

## 33.8.9 FREQUENCY

Address offset: 0x524

TWI frequency

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FREQUENCY				TWI master clock frequency																													
			K100		0x01980000	100 kbps																													
			K250		0x04000000	250 kbps																													
			K400		0x06400000	400 kbps																													

## 33.8.10 RXD.PTR

Address offset: 0x534

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Data pointer																											

### 33.8.11 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT		[1..255]	Maximum number of bytes in receive buffer																														

### 33.8.12 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																												A	A	A	A	A	A	A	A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value		Description																																	
A	R	AMOUNT				Number of bytes transferred in the last transaction. In case of NACK error, includes the NACK'ed byte.																																	

### 33.8.13 RXD.LIST

Address offset: 0x540

EasyDMA list type

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	LIST			List type																														
			Disabled	0	Disable EasyDMA list																														
			ArrayList	1	Use array list																														

### 33.8.14 TXD.PTR

Address offset: 0x544

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value			Description																												
A	RW	PTR					Data pointer																												

### 33.8.15 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[1..255]	Maximum number of bytes in transmit buffer																													

### 33.8.16 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction. In case of NACK error, includes the NACK'ed byte.																													

### 33.8.17 TXD.LIST

Address offset: 0x550

EasyDMA list type

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	LIST				List type																													
			Disabled	0		Disable EasyDMA list																													
			ArrayList	1		Use array list																													

### 33.8.18 ADDRESS

Address offset: 0x588

Address used in the TWI transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A A A A A A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	ADDRESS							Address used in the TWI transfer																											

## 33.9 Electrical specification

### 33.9.1 TWIM interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWIM</sub>	Bit rates for TWIM <sup>30</sup>	100		400	kbps
I <sub>TWIM,100kbps</sub>	Run current for TWIM, 100 kbps		50		μA
I <sub>TWIM,400kbps</sub>	Run current for TWIM, 400 kbps		50		μA
t <sub>TWIM,START,LP</sub>	Time from STARTRX/STARTTX task to transmission started, Low power mode		t <sub>TWIM,START</sub> +		μs
t <sub>TWIM,START,CL</sub>	Time from STARTRX/STARTTX task to transmission started, Constant latency mode		1.5		μs

<sup>30</sup> Higher bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

### 33.9.2 Two Wire Interface Master (TWIM) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{TWIM,SCL,100kbps}$	SCL clock frequency, 100 kbps		100		kHz
$f_{TWIM,SCL,250kbps}$	SCL clock frequency, 250 kbps		250		kHz
$f_{TWIM,SCL,400kbps}$	SCL clock frequency, 400 kbps		400		kHz
$t_{TWIM,SU\_DAT}$	Data setup time before positive edge on SCL – all modes	300			ns
$t_{TWIM,HD\_DAT}$	Data hold time after negative edge on SCL – all modes	500			ns
$t_{TWIM,HD\_STA,100kbps}$	TWIM master hold time for START and repeated START condition, 100 kbps	10000			ns
$t_{TWIM,HD\_STA,250kbps}$	TWIM master hold time for START and repeated START condition, 250 kbps	4000			ns
$t_{TWIM,HD\_STA,400kbps}$	TWIM master hold time for START and repeated START condition, 400 kbps	2500			ns
$t_{TWIM,SU\_STO,100kbps}$	TWIM master setup time from SCL high to STOP condition, 100 kbps	5000			ns
$t_{TWIM,SU\_STO,250kbps}$	TWIM master setup time from SCL high to STOP condition, 250 kbps	2000			ns
$t_{TWIM,SU\_STO,400kbps}$	TWIM master setup time from SCL high to STOP condition, 400 kbps	1250			ns
$t_{TWIM,BUF,100kbps}$	TWIM master bus free time between STOP and START conditions, 100 kbps	5800			ns
$t_{TWIM,BUF,250kbps}$	TWIM master bus free time between STOP and START conditions, 250 kbps	2700			ns
$t_{TWIM,BUF,400kbps}$	TWIM master bus free time between STOP and START conditions, 400 kbps	2100			ns

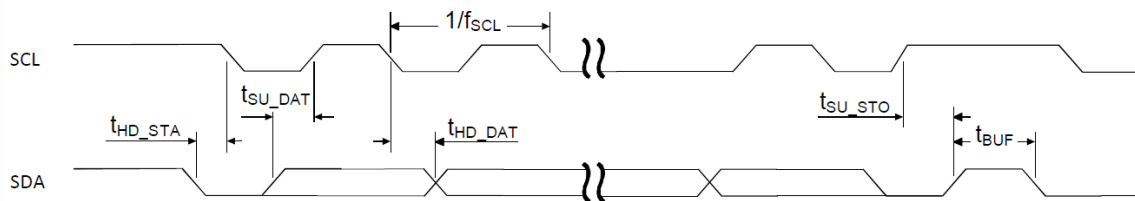


Figure 86: TWIM timing diagram, 1 byte transaction


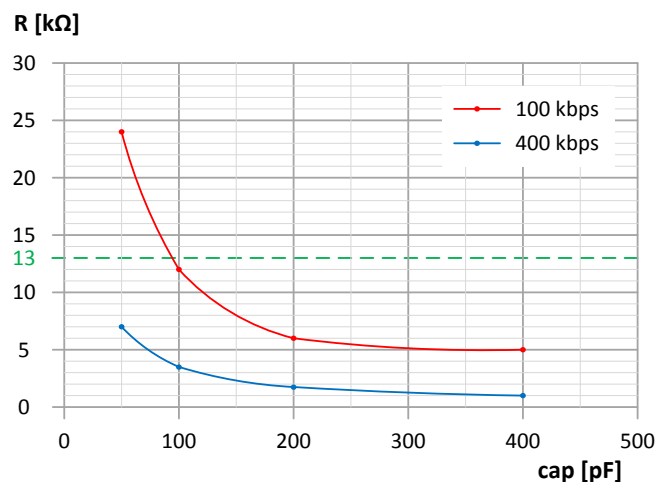


Figure 87: Recommended TWIM pullup value vs. line capacitance

- The I<sup>2</sup>C specification allows a line capacitance of 400 pF at most.
- The nRF52832 internal pullup has a fixed value of typ. 13 kOhm, see  $R_{PU}$  in the GPIO chapter.


## 34 TWIS — I<sup>2</sup>C compatible two-wire interface slave with EasyDMA

TWI slave with EasyDMA (TWIS) is compatible with I<sup>2</sup>C operating at 100 kHz and 400 kHz. The TWI transmitter and receiver implement EasyDMA.

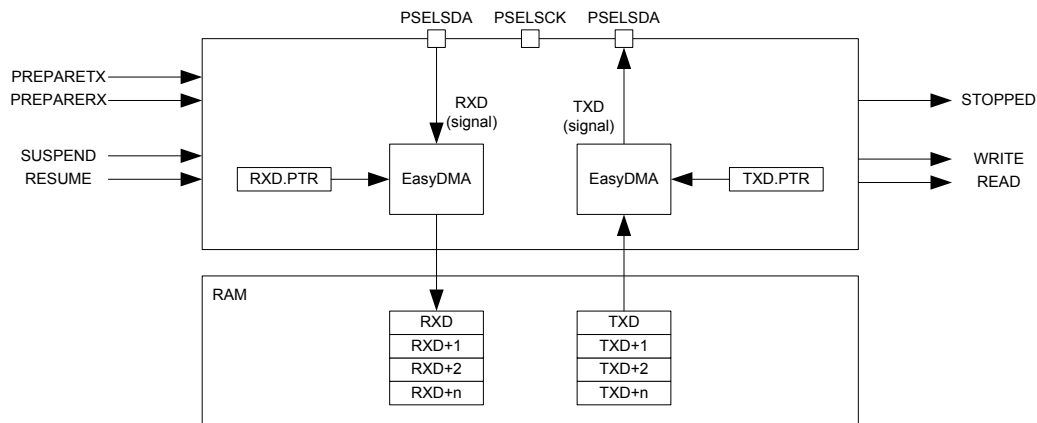


### Figure 88: TWI slave with EasyDMA

A typical TWI setup consists of one master and one or more slaves. For an example, see [Figure 89: A typical TWI setup comprising one master and three slaves](#) on page 323. TWIS is only able to operate with a single master on the TWI bus.

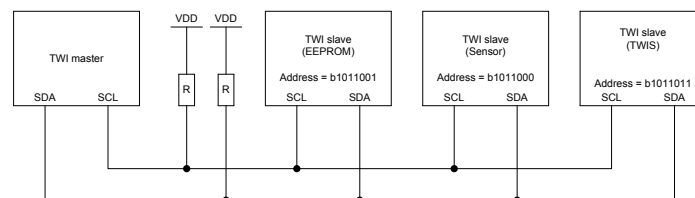

**Figure 89: A typical TWI setup comprising one master and three slaves**

The TWI slave state machine is illustrated in [Figure 90: TWI slave state machine](#) on page 324 and [Table 79: TWI slave state machine symbols](#) on page 324 is explaining the different symbols used in the state machine.

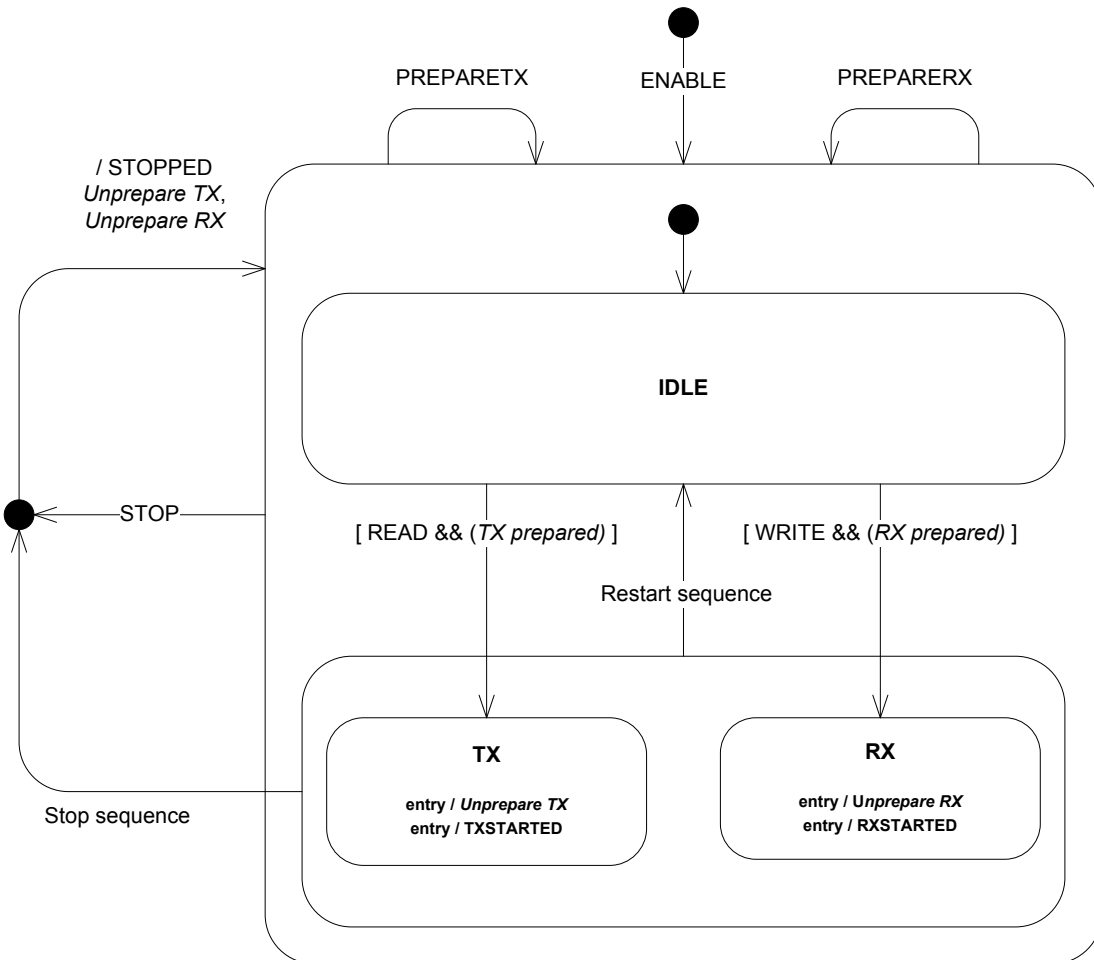

**Figure 90: TWI slave state machine**

**Table 79: TWI slave state machine symbols**

Symbol	Type	Description
ENABLE	Register	The TWI slave has been enabled via the <a href="#">ENABLE</a> register
PREPARETX	Task	The <a href="#">TASKS_PREPARETX</a> task has been triggered
STOP	Task	The <a href="#">TASKS_STOP</a> task has been triggered
PREPARERX	Task	The <a href="#">TASKS_PREPARERX</a> task has been triggered
STOPPED	Event	The <a href="#">EVENTS_STOPPED</a> event was generated
RXSTARTED	Event	The <a href="#">EVENTS_RXSTARTED</a> event was generated
TXSTARTED	Event	The <a href="#">EVENTS_TXSTARTED</a> event was generated
TX prepared	Internal	Internal flag indicating that a <a href="#">TASKS_PREPARETX</a> task has been triggered. This flag is not visible to the user.
RX prepared	Internal	Internal flag indicating that a <a href="#">TASKS_PREPARERX</a> task has been triggered. This flag is not visible to the user.
Unprepare TX	Internal	Clears the internal 'TX prepared' flag until next <a href="#">TASKS_PREPARETX</a> task.
Unprepare RX	Internal	Clears the internal 'RX prepared' flag until next <a href="#">TASKS_PREPARERX</a> task.
Stop sequence	TWI protocol	A TWI stop sequence was detected
Restart sequence	TWI protocol	A TWI restart sequence was detected

The TWI slave supports clock stretching performed by the master.

The TWI slave operates in a low power mode while waiting for a TWI master to initiate a transfer. As long as the TWI slave is not addressed, it will remain in this low power mode.

To secure correct behaviour of the TWI slave, PSEL.SCL, PSEL.SDA, CONFIG and the ADDRESS[n] registers, must be configured prior to enabling the TWI slave through the ENABLE register. Similarly, changing these settings must be performed while the TWI slave is disabled. Failing to do so may result in unpredictable behaviour.

## 34.1 Shared resources

The TWI slave shares registers and other resources with other peripherals that have the same ID as the TWI slave.

Therefore, you must disable all peripherals that have the same ID as the TWI slave before the TWI slave can be configured and used. Disabling a peripheral that has the same ID as the TWI slave will not reset any of the registers that are shared with the TWI slave. It is therefore important to configure all relevant registers explicitly to secure that the TWI slave operates correctly.

The Instantiation table in [Instantiation](#) on page 25 shows which peripherals have the same ID as the TWI slave.

## 34.2 EasyDMA

The TWI slave implements EasyDMA for reading and writing to and from the RAM.

The STOPPED event indicates that EasyDMA has finished accessing the buffer in RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

## 34.3 TWI slave responding to a read command

Before the TWI slave can respond to a read command the TWI slave must be configured correctly and enabled via the ENABLE register. When enabled the TWI slave will be in its IDLE state where it will consume I<sub>IDLE</sub>.

A read command is started when the TWI master generates a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE=0, READ=1). The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) response from the TWI slave.

The TWI slave is able to listen for up to two addresses at the same time. Which addresses to listen for is configured in the ADDRESS registers and the CONFIG register.

The TWI slave will only acknowledge (ACK) the read command if the address presented by the master matches one of the addresses the slave is configured to listen for. The TWI slave will generate a READ event when it acknowledges the read command.

The TWI slave is only able to detect a read command from the IDLE state.

The TWI slave will set an internal 'TX prepared' flag when the PREPARETX task is triggered.

When the read command is received the TWI slave will enter the TX state if the internal 'TX prepared' flag is set.

If the internal 'TX prepared' flag is not set when the read command is received, the TWI slave will stretch the master's clock until the PREPARETX task is triggered and the internal 'TX prepared' flag is set.

The TWI slave will generate the TXSTARTED event and clear the 'TX prepared' flag ('unprepare TX') when it enters the TX state. In this state the TWI slave will send the data bytes found in the transmit buffer to the master using the master's clock. The TWI slave will consume I<sub>TX</sub> in this mode.

The TWI slave will go back to the IDLE state if the TWI slave receives a restart command when it is in the TX state.

The TWI slave is stopped when it receives the stop condition from the TWI master. A STOPPED event will be generated when the transaction has stopped. The TWI slave will clear the 'TX prepared' flag ('unprepare TX') and go back to the IDLE state when it has stopped.

The transmit buffer is located in RAM at the address specified in the TXD.PTR register. The TWI slave will only be able to send TXD.MAXCNT bytes from the transmit buffer for each transaction. If the TWI master


forces the slave to send more than TXD.MAXCNT bytes, the slave will send the byte specified in the ORC register to the master instead. If this happens, an ERROR event will be generated.

The EasyDMA configuration registers, see TXD.PTR etc., are latched when the TXSTARTED event is generated.

The TWI slave can be forced to stop by triggering the STOP task. A STOPPED event will be generated when the TWI slave has stopped. The TWI slave will clear the 'TX prepared' flag and go back to the IDLE state when it has stopped, see also [Terminating an ongoing TWI transaction](#) on page 328.

Each byte sent from the slave will be followed by an ACK/NACK bit sent from the master. The TWI master will generate a NACK following the last byte that it wants to receive to tell the slave to release the bus so that the TWI master can generate the stop condition. The TXD.AMOUNT register can be queried after a transaction to see how many bytes were sent.

A typical TWI slave read command response is illustrated in [Figure 91: The TWI slave responding to a read command](#) on page 326. Occurrence 2 in the figure illustrates clock stretching performed by the TWI slave following a SUSPEND task.

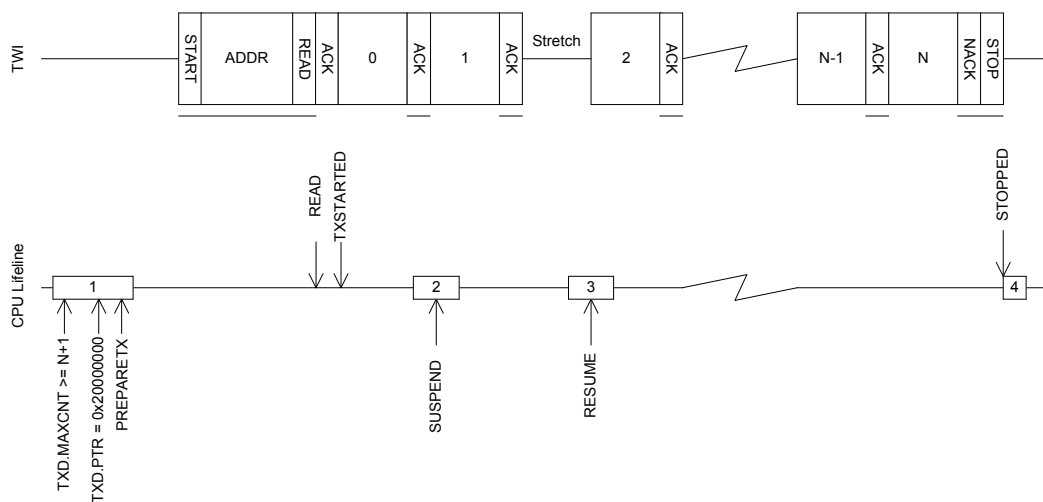

**Figure 91: The TWI slave responding to a read command**

## 34.4 TWI slave responding to a write command

Before the TWI slave can respond to a write command the TWI slave must be configured correctly and enabled via the ENABLE register. When enabled the TWI slave will be in its IDLE state where it will consume I<sub>IDLE</sub>.

A write command is started when the TWI master generates a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1). The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) response from the slave.

The TWI slave is able to listen for up to two addresses at the same time. Which addresses to listen for is configured in the ADDRESS registers and the CONFIG register.

The TWI slave will only acknowledge (ACK) the write command if the address presented by the master matches one of the addresses the slave is configured to listen for. The TWI slave will generate a WRITE event if it acknowledges the write command.

The TWI slave is only able to detect a write command from the IDLE state.

The TWI slave will set an internal 'RX prepared' flag when the PREPARERX task is triggered.

When the write command is received the TWI slave will enter the RX state if the internal 'RX prepared' flag is set.

If the internal 'RX prepared' flag is not set when the write command is received, the TWI slave will stretch the master's clock until the PREPARERX task is triggered and the internal 'RX prepared' flag is set.

The TWI slave will generate the RXSTARTED event and clear the internal 'RX prepared' flag ('unprepare RX') when it enters the RX state. In this state the TWI slave will be able to receive the bytes sent by the TWI master. The TWI slave will consume I<sub>RX</sub> in this mode.

The TWI slave will go back to the IDLE state if the TWI slave receives a restart command when it is in the RX state.

The TWI slave is stopped when it receives the stop condition from the TWI master. A STOPPED event will be generated when the transaction has stopped. The TWI slave will clear the internal 'RX prepared' flag ('unprepare RX') and go back to the IDLE state when it has stopped.


The receive buffer is located in RAM at the address specified in the TXD.PTR register. The TWI slave will only be able to receive as many bytes as specified in the RXD.MAXCNT register. If the TWI master tries to send more bytes to the slave than the slave is able to receive, these bytes will be discarded and the bytes will be NACKed by the slave. If this happens, an ERROR event will be generated.

The EasyDMA configuration registers, see RXD.PTR etc., are latched when the RXSTARTED event is generated.

The TWI slave can be forced to stop by triggering the STOP task. A STOPPED event will be generated when the TWI slave has stopped. The TWI slave will clear the internal 'RX prepared' flag and go back to the IDLE state when it has stopped, see also [Terminating an ongoing TWI transaction](#) on page 328.

The TWI slave will generate an ACK after every byte received from the master. The RXD.AMOUNT register can be queried after a transaction to see how many bytes were received.

A typical TWI slave write command response is illustrated in [Figure 92: The TWI slave responding to a write command](#) on page 327. Occurrence 2 in the figure illustrates clock stretching performed by the TWI slave following a SUSPEND task.

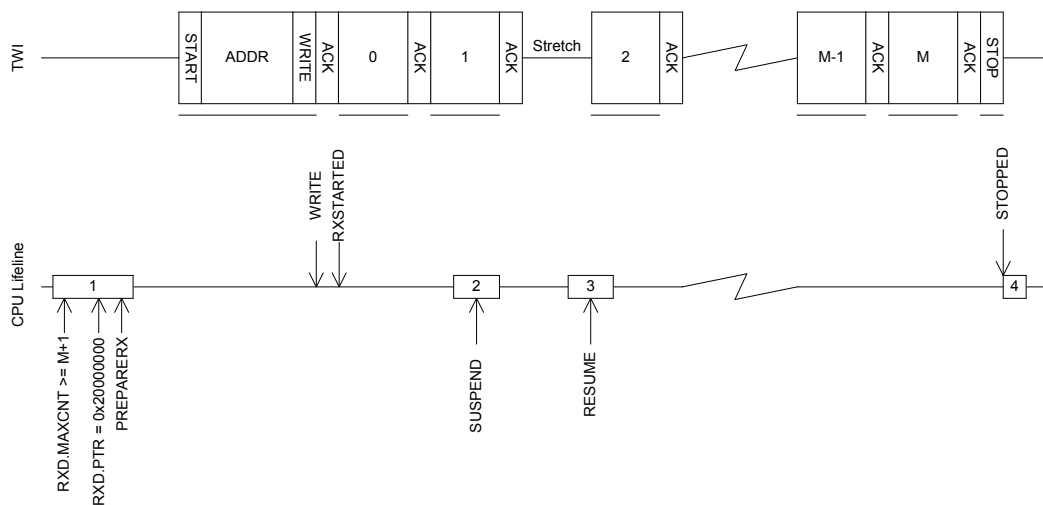


**Figure 92: The TWI slave responding to a write command**

## 34.5 Master repeated start sequence

An example of a repeated start sequence is one in which the TWI master writes two bytes to the slave followed by reading four bytes from the slave.

This is illustrated in [Figure 93: A repeated start sequence, where the TWI master writes two bytes followed by reading four bytes from the slave](#) on page 328.

It is here assumed that the receiver does not know in advance what the master wants to read, and that this information is provided in the first two bytes received in the write part of the repeated start sequence. To guarantee that the CPU is able to process the received data before the TWI slave starts to reply to the read command, the SUSPEND task is triggered via a shortcut from the READ event generated when the read command is received. When the CPU has processed the incoming data and prepared the correct data response, the CPU will resume the transaction by triggering the RESUME task.

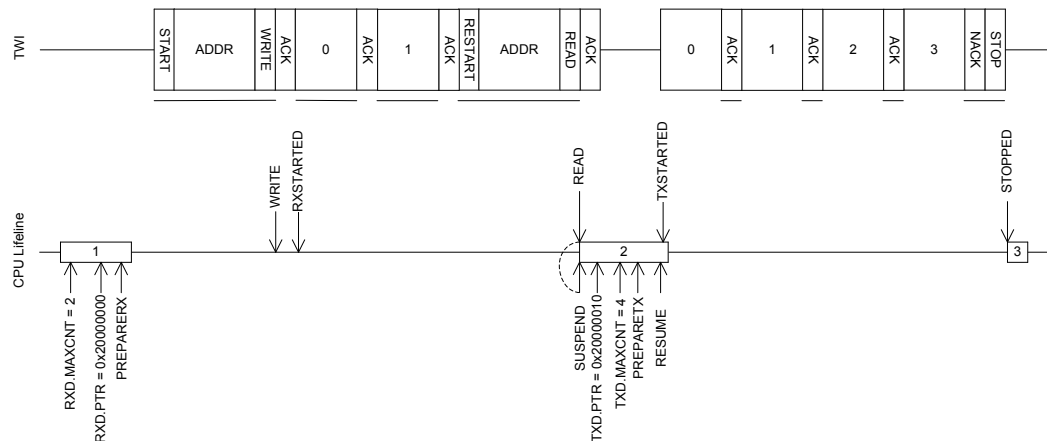

**Figure 93: A repeated start sequence, where the TWI master writes two bytes followed by reading four bytes from the slave**

### 34.6 Terminating an ongoing TWI transaction

In some situations, e.g. if the external TWI master is not responding correctly, it may be required to terminate an ongoing transaction.

This can be achieved by triggering the STOP task. In this situation a STOPPED event will be generated when the TWI has stopped independent of whether or not a STOP condition has been generated on the TWI bus. The TWI slave will release the bus when it has stopped and go back to its IDLE state.

### 34.7 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

### 34.8 Slave mode pin configuration

The SCL and SDA signals associated with the TWI slave are mapped to physical pins according to the configuration specified in the PSEL.SCL and PSEL.SDA registers respectively.

The PSEL.SCL and PSEL.SDA registers and their configurations are only used as long as the TWI slave is enabled, and retained only as long as the device is in ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.SCL and PSEL.SDA must only be configured when the TWI slave is disabled.

To secure correct signal levels on the pins used by the TWI slave when the system is in OFF mode, and when the TWI slave is disabled, these pins must be configured in the GPIO peripheral as described in [Table 80: GPIO configuration before enabling peripheral](#) on page 328.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

### Table 80: GPIO configuration before enabling peripheral

TWI slave signal	TWI slave pin	Direction	Output value	Drive strength
SCL	As specified in PSEL.SCL	Input	Not applicable	SOD1
SDA	As specified in PSEL.SDA	Input	Not applicable	SOD1



## 34.9 Registers

**Table 81: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWIS	TWIS0	Two-wire interface slave 0	
0x40004000	TWIS	TWIS1	Two-wire interface slave 1	

**Table 82: Register Overview**

Register	Offset	Description
TASKS_STOP	0x014	Stop TWI transaction
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
TASKS_PREPARERX	0x030	Prepare the TWI slave to respond to a write command
TASKS_PREPARETX	0x034	Prepare the TWI slave to respond to a read command
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_ERROR	0x124	TWI error
EVENTS_RXSTARTED	0x14C	Receive sequence started
EVENTS_TXSTARTED	0x150	Transmit sequence started
EVENTS_WRITE	0x164	Write command received
EVENTS_READ	0x168	Read command received
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4D0	Error source
MATCH	0x4D4	Status register indicating which address had a match
ENABLE	0x500	Enable TWIS
PSEL_SCL	0x508	Pin select for SCL signal
PSEL_SDA	0x50C	Pin select for SDA signal
RXD_PTR	0x534	RXD Data pointer
RXD_MAXCNT	0x538	Maximum number of bytes in RXD buffer
RXD_AMOUNT	0x53C	Number of bytes transferred in the last RXD transaction
TXD_PTR	0x544	TXD Data pointer
TXD_MAXCNT	0x548	Maximum number of bytes in TXD buffer
TXD_AMOUNT	0x54C	Number of bytes transferred in the last TXD transaction
ADDRESS[0]	0x588	TWI slave address 0
ADDRESS[1]	0x58C	TWI slave address 1
CONFIG	0x594	Configuration register for the address match mechanism
ORC	0x5C0	Over-read character. Character sent out in case of an over-read of the transmit buffer.

### 34.9.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																					B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	WRITE_SUSPEND				Shortcut between WRITE event and SUSPEND task																														
						See <a href="#">EVENTS_WRITE</a> and <a href="#">TASKS_SUSPEND</a>																														
			Disabled	0		Disable shortcut																														
			Enabled	1		Enable shortcut																														
B	RW	READ_SUSPEND				Shortcut between READ event and SUSPEND task																														
						See <a href="#">EVENTS_READ</a> and <a href="#">TASKS_SUSPEND</a>																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

### 34.9.2 INTEN

Address offset: 0x300

## Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				H G								F E								B								A										
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	STOPPED			Enable or disable interrupt for STOPPED event																																	
					See <a href="#">EVENTS_STOPPED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
B	RW	ERROR			Enable or disable interrupt for ERROR event																																	
					See <a href="#">EVENTS_ERROR</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
E	RW	RXSTARTED			Enable or disable interrupt for RXSTARTED event																																	
					See <a href="#">EVENTS_RXSTARTED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
F	RW	TXSTARTED			Enable or disable interrupt for TXSTARTED event																																	
					See <a href="#">EVENTS_TXSTARTED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
G	RW	WRITE			Enable or disable interrupt for WRITE event																																	
					See <a href="#">EVENTS_WRITE</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
H	RW	READ			Enable or disable interrupt for READ event																																	
					See <a href="#">EVENTS_READ</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	

### 34.9.3 INTENSET

Address offset: 0x304

### Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																																																													
Id																				H		G																		F		E																		B																		A			
Reset 0x00000000				0 0																																																																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				H G								F E								B								A							
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_ERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	RXSTARTED			Write '1' to Enable interrupt for RXSTARTED event																														
					See <a href="#">EVENTS_RXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	TXSTARTED			Write '1' to Enable interrupt for TXSTARTED event																														
					See <a href="#">EVENTS_TXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
G	RW	WRITE			Write '1' to Enable interrupt for WRITE event																														
					See <a href="#">EVENTS_WRITE</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
H	RW	READ			Write '1' to Enable interrupt for READ event																														
					See <a href="#">EVENTS_READ</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 34.9.4 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				H G																F E								B								A			
Reset 0x00000000				0 0																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	STOPPED			Write '1' to Disable interrupt for STOPPED event																																		
					See <a href="#">EVENTS_STOPPED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
B	RW	ERROR			Write '1' to Disable interrupt for ERROR event																																		
					See <a href="#">EVENTS_ERROR</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
E	RW	RXSTARTED			Write '1' to Disable interrupt for RXSTARTED event																																		
					See <a href="#">EVENTS_RXSTARTED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
F	RW	TXSTARTED			Write '1' to Disable interrupt for TXSTARTED event																																		
					See <a href="#">EVENTS_TXSTARTED</a>																																		
			Clear	1	Disable																																		

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
Id					H								G								F								E								B								A				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
Id	RW	Field	Value	Id	Value		Description																																										
G	RW	WRITE	Disabled	0	Read: Disabled																																												
			Enabled	1	Read: Enabled																																												
			Write '1' to Disable interrupt for WRITE event																																														
			See <a href="#">EVENTS_WRITE</a>																																														
			Clear	1	Disable																																												
H	RW	READ	Disabled	0	Read: Disabled																																												
			Enabled	1	Read: Enabled																																												
			Write '1' to Disable interrupt for READ event																																														
			See <a href="#">EVENTS_READ</a>																																														
			Clear	1	Disable																																												
			Disabled	0	Read: Disabled																																												
			Enabled	1	Read: Enabled																																												

### 34.9.5 ERRORSRC

Address offset: 0x4D0

Error source

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																																					C		B		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value	Id	Value		Description																																			
A	RW	OVERFLOW			RX buffer overflow detected, and prevented																																					
			NotDetected	0	Error did not occur																																					
			Detected	1	Error occurred																																					
B	RW	DNACK			NACK sent after receiving a data byte																																					
			NotReceived	0	Error did not occur																																					
			Received	1	Error occurred																																					
C	RW	OVERREAD			TX buffer over-read detected, and prevented																																					
			NotDetected	0	Error did not occur																																					
			Detected	1	Error occurred																																					

### 34.9.6 MATCH

Address offset: 0x4D4

Status register indicating which address had a match

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A																																	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Description</b>																																	
A	R	MATCH			[0..1] Which of the addresses in {ADDRESS} matched the incoming address																																	

### 34.9.7 ENABLE

Address offset: 0x500

Enable TWIS

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																														A				A	A	A							
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id				Value				Description																																
A	RW	ENABLE									Enable or disable TWIS																																
			Disabled				0				Disable TWIS																																

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id																																			A	A	A	A
Reset 0x00000000			0 0																																			
Id	RW	Field	Value Id	Value			Description																															
			Enabled	9			Enable TWIS																															

### 34.9.8 PSEL.SCL

Address offset: 0x508

Pin select for SCL signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																										
Id				B																																A				A	A	A	A																		
Reset 0xFFFFFFFF				1																																1				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																																																							
A	RW	PIN		[0..31]		Pin number																																																							
B	RW	CONNECT				Connection																																																							
			Disconnected	1		Disconnect																																																							
			Connected	0		Connect																																																							

### 34.9.9 PSEL.SDA

Address offset: 0x50C

Pin select for SDA signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																												A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 34.9.10 RXD.PTR

Address offset: 0x534

RXD Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						RXD Data pointer																											

### 34.9.11 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in RXD buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT			Maximum number of bytes in RXD buffer																														

### 34.9.12 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last RXD transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	AMOUNT					Number of bytes transferred in the last RXD transaction																									

### 34.9.13 TXD.PTR

Address offset: 0x544

TXD Data pointer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	PTR					TXD Data pointer																									

### 34.9.14 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in TXD buffer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	MAXCNT					Maximum number of bytes in TXD buffer																									

### 34.9.15 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last TXD transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	AMOUNT					Number of bytes transferred in the last TXD transaction																									

### 34.9.16 ADDRESS[0]

Address offset: 0x588

TWI slave address 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	ADDRESS					TWI slave address																									

### 34.9.17 ADDRESS[1]

Address offset: 0x58C

TWI slave address 1

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	ADDRESS					TWI slave address																									

### 34.9.18 CONFIG

Address offset: 0x594

Configuration register for the address match mechanism

Bit number		31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id																																				B	A
Reset 0x00000001		0 0																																			1
Id	RW	Field	Value Id	Value	Description																																
A	RW	ADDRESS0			Enable or disable address matching on ADDRESS[0]																																
			Disabled	0	Disabled																																
			Enabled	1	Enabled																																
B	RW	ADDRESS1			Enable or disable address matching on ADDRESS[1]																																
			Disabled	0	Disabled																																
			Enabled	1	Enabled																																

### 34.9.19 ORC

Address offset: 0x5C0

Over-read character. Character sent out in case of an over-read of the transmit buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																							
Id																																				A	A	A	A	A	A	A	A
Reset 0x00000000				0 0																																							
Id	RW	Field	Value Id	Value	Description																																						
A	RW	ORC			Over-read character. Character sent out in case of an over-read of the transmit buffer.																																						

## 34.10 Electrical specification

### 34.10.1 TWIS slave interface electrical specifications


Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWIS</sub>	Bit rates for TWIS <sup>31</sup>	100		400	kbps
I <sub>TWIS,100kbps</sub>	Run current for TWIS (Average current to receive and transfer a byte to RAM), 100 kbps		45		μA
I <sub>TWIS,400kbps</sub>	Run current for TWIS (Average current to receive and transfer a byte to RAM), 400 kbps		45		μA
I <sub>TWIS,IDLE</sub>	Idle current for TWIS		1		μA
t <sub>TWIS,START,LP</sub>	Time from PREPARERX/PREPARETX task to ready to receive/transmit, Low power mode		t <sub>TWIS,START</sub> , +	t <sub>START_HFIN</sub>	μs
t <sub>TWIS,START,CL</sub>	Time from PREPARERX/PREPARETX task to ready to receive/transmit, Constant latency mode		1.5		μs

### 34.10.2 TWIS slave timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWIS,SCL,400kbps</sub>	SCL clock frequency, 400 kbps			400	kHz
t <sub>TWIS,SU_DAT</sub>	Data setup time before positive edge on SCL – all modes	300			ns
t <sub>TWIS,HD_DAT</sub>	Data hold time after negative edge on SCL – all modes	500			ns
t <sub>TWIS,HD_STA,100kbps</sub>	TWI slave hold time from for START condition (SDA low to SCL low), 100 kbps	5200			ns
t <sub>TWIS,HD_STA,400kbps</sub>	TWI slave hold time from for START condition (SDA low to SCL low), 400 kbps	1300			ns

<sup>31</sup> Higher bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{TWIS,SU\_STO},100\text{kbps}}$	TWI slave setup time from SCL high to STOP condition, 100 kbps	5200			ns
$t_{\text{TWIS,SU\_STO},400\text{kbps}}$	TWI slave setup time from SCL high to STOP condition, 400 kbps	1300			ns
$t_{\text{TWIS,BUF},100\text{kbps}}$	TWI slave bus free time between STOP and START conditions, 100 kbps		4700		ns
$t_{\text{TWIS,BUF},400\text{kbps}}$	TWI slave bus free time between STOP and START conditions, 400 kbps		1300		ns

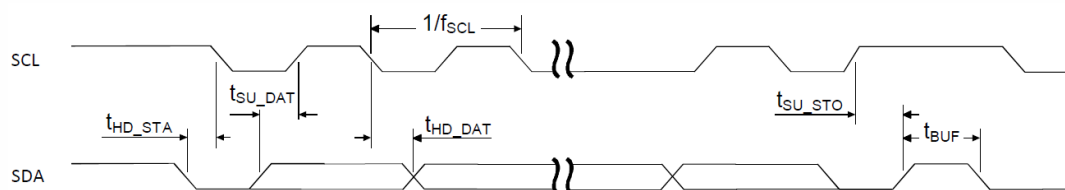

**Figure 94: TWIS timing diagram, 1 byte transaction**




## 35 UARTE — Universal asynchronous receiver/ transmitter with EasyDMA

The Universal asynchronous receiver/transmitter with EasyDMA (UARTE) offers fast, full-duplex, asynchronous serial communication with built-in flow control (CTS, RTS) support in hardware at a rate up to 1 Mbps, and EasyDMA data transfer from/to RAM.

Listed here are the main features for UARTE:

- Full-duplex operation
- Automatic hardware flow control
- Parity checking and generation for the 9<sup>th</sup> data bit
- EasyDMA
- Up to 1 Mbps baudrate
- Return to IDLE between transactions supported (when using HW flow control)
- One stop bit
- Least significant bit (LSB) first

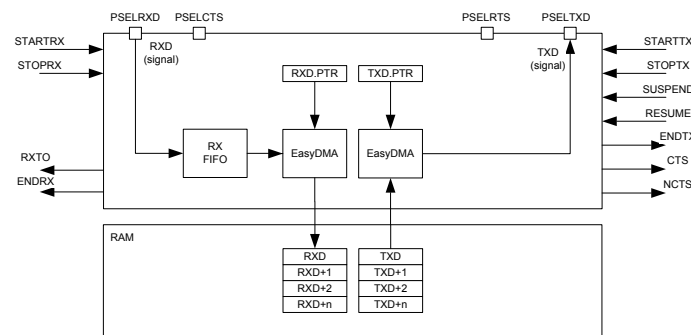

**Figure 95: UARTE configuration**

The GPIOs used for each UART interface can be chosen from any GPIO on the device and are independently configurable. This enables great flexibility in device pinout and efficient use of board space and signal routing.

### 35.1 Shared resources

The UARTE shares registers and other resources with other peripherals that have the same ID as the UARTE.

Therefore, you must disable all peripherals that have the same ID as the UARTE before the UARTE can be configured and used. Disabling a peripheral that has the same ID as the UARTE will not reset any of the registers that are shared with the UARTE. It is therefore important to configure all relevant UARTE registers explicitly to ensure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.

### 35.2 EasyDMA

The UARTE implements EasyDMA for reading and writing to and from the RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next RX/TX transmission immediately after having received the RXSTARTED/TXSTARTED event.

The ENDRX/ENDTX event indicates that EasyDMA has finished accessing respectively the RX/TX buffer in RAM.

### 35.3 Transmission

The first step of a DMA transmission is storing bytes in the transmit buffer and configuring EasyDMA. This is achieved by writing the initial address pointer to TXD.PTR, and the number of bytes in the RAM buffer to TXD.MAXCNT. The UARTE transmission is started by triggering the STARTTX task.

After each byte has been sent over the TXD line, a TXDRDY event will be generated.


When all bytes in the TXD buffer, as specified in the TXD.MAXCNT register, have been transmitted, the UARTE transmission will end automatically and an ENDTX event will be generated.

A UARTE transmission sequence is stopped by triggering the STOPTX task, a TXSTOPPED event will be generated when the UARTE transmitter has stopped.

If the ENDTX event has not already been generated when the UARTE transmitter has come to a stop, the UARTE will generate the ENDTX event explicitly even though all bytes in the TXD buffer, as specified in the TXD.MAXCNT register, have not been transmitted.

If flow control is enabled, a transmission will be automatically suspended when CTS is deactivated and resumed when CTS is activated again, as illustrated in [Figure 96: UARTE transmission](#) on page 338.

A byte that is in transmission when CTS is deactivated will be fully transmitted before the transmission is suspended.

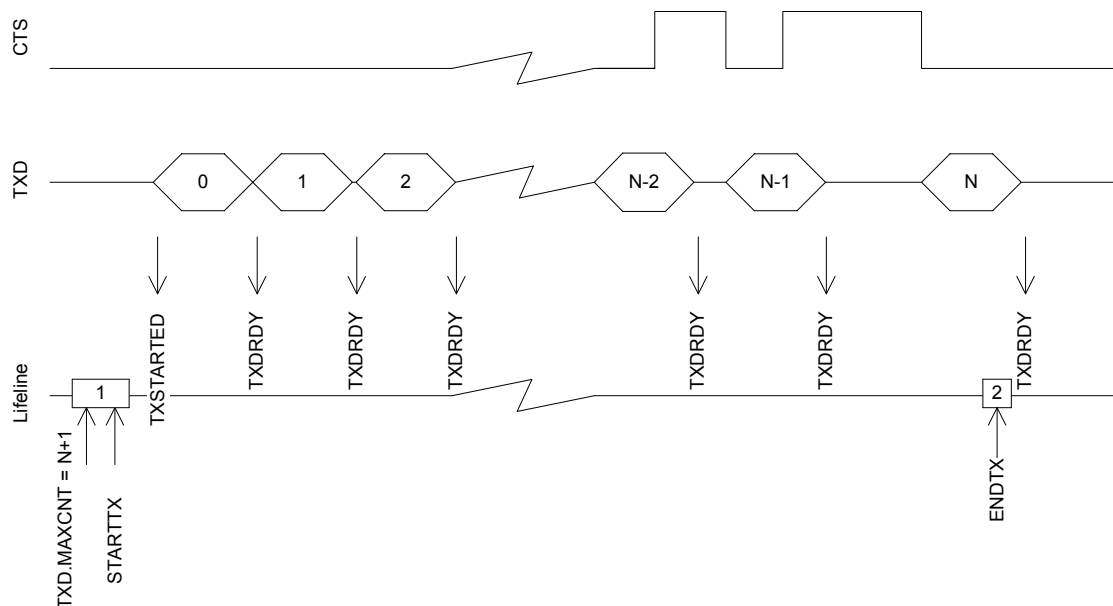

**Figure 96: UARTE transmission**

The UARTE transmitter will be in its lowest activity level, and consume the least amount of energy, when it is stopped, i.e. before it is started via STARTTX or after it has been stopped via STOPTX and the TXSTOPPED event has been generated. See [POWER — Power supply](#) on page 81 for more information about power modes.


### 35.4 Reception

The UARTE receiver is started by triggering the STARTRX task. The UARTE receiver is using EasyDMA to store incoming data in an RX buffer in RAM.

The RX buffer is located at the address specified in the RXD.PTR register. The RXD.PTR register is double-buffered and it can be updated and prepared for the next STARTRX task immediately after the RXSTARTED event is generated. The size of the RX buffer is specified in the RXD.MAXCNT register and the UARTE will generate an ENDRX event when it has filled up the RX buffer, see [Figure 97: UARTE reception](#) on page 339.

For each byte received over the RXD line, an RXDRDY event will be generated. This event is likely to occur before the corresponding data has been transferred to Data RAM.

The RXD.AMOUNT register can be queried following an ENDRX event to see how many new bytes have been transferred to the RX buffer in RAM since the previous ENDRX event.

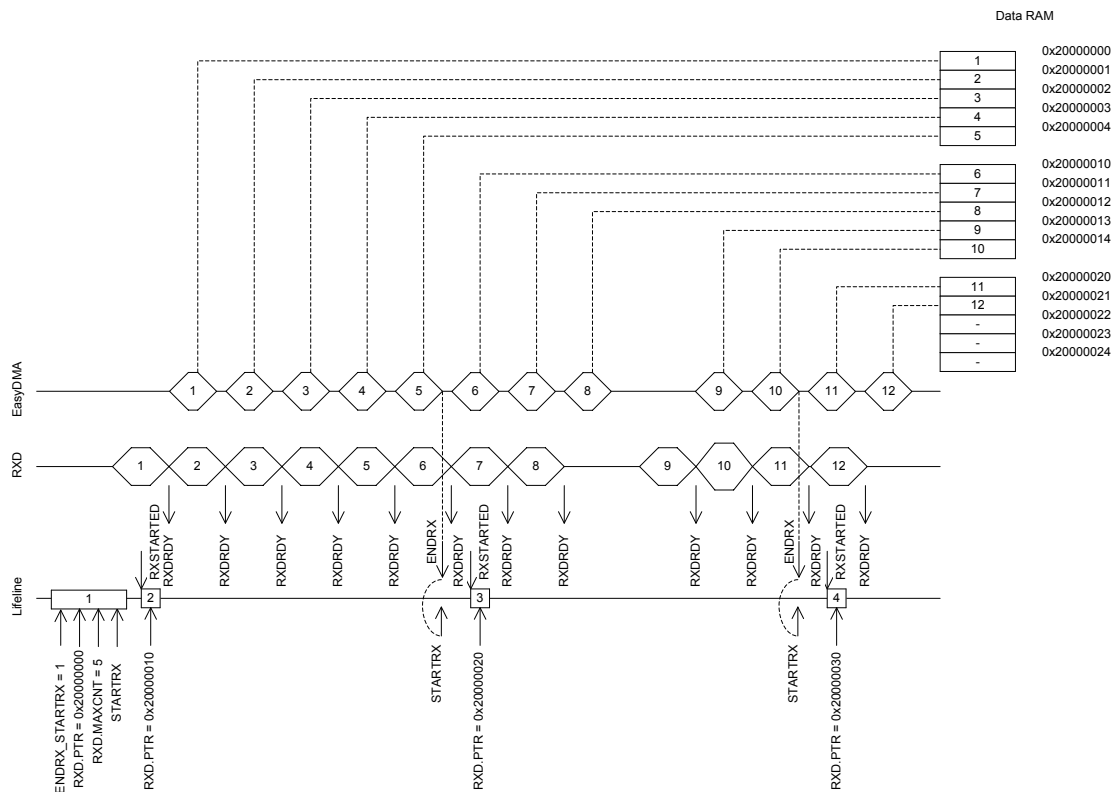

**Figure 97: UARTE reception**

The UARTE receiver is stopped by triggering the STOPRX task. An RXTO event is generated when the UARTE has stopped. The UARTE will make sure that an impending ENDRX event will be generated before the RXTO event is generated. This means that the UARTE will guarantee that no ENDRX event will be generated after RXTO, unless the UARTE is restarted or a FLUSHRX command is issued after the RXTO event is generated.


**Important:** If the ENDRX event has not already been generated when the UARTE receiver has come to a stop, which implies that all pending content in the RX FIFO has been moved to the RX buffer, the UARTE will generate the ENDRX event explicitly even though the RX buffer is not full. In this scenario the ENDRX event will be generated before the RXTO event is generated.

To be able to know how many bytes have actually been received into the RX buffer, the CPU can read the RXD.AMOUNT register following the ENDRX event or the RXTO event.

The UARTE is able to receive up to four bytes after the STOPRX task has been triggered as long as these are sent in succession immediately after the RTS signal is deactivated. This is possible because after the RTS is deactivated the UARTE is able to receive bytes for an extended period equal to the time it takes to send 4 bytes on the configured baud rate.

After the RXTO event is generated the internal RX FIFO may still contain data, and to move this data to RAM the FLUSHRX task must be triggered. To make sure that this data does not overwrite data in the RX buffer, the RX buffer should be emptied or the RXD.PTR should be updated before the FLUSHRX task is triggered.

To make sure that all data in the RX FIFO is moved to the RX buffer, the RXD.MAXCNT register must be set to  $RXD.MAXCNT > 4$ , see [Figure 98: UARTE reception with forced stop via STOPRX](#) on page 340. The UARTE will generate the ENDRX event after completing the FLUSHRX task even if the RX FIFO was empty or if the RX buffer does not get filled up. To be able to know how many bytes have actually been received into the RX buffer in this case, the CPU can read the RXD.AMOUNT register following the ENDRX event.

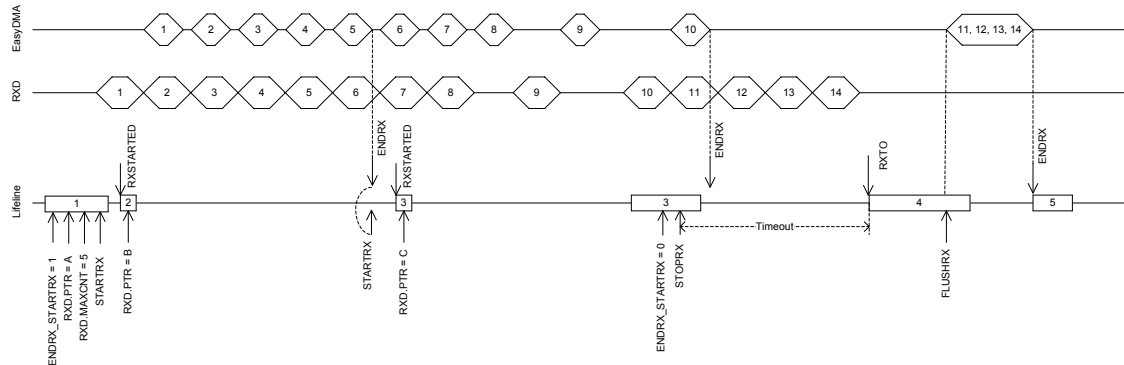

**Figure 98: UARTE reception with forced stop via STOPRX**

If HW flow control is enabled the RTS signal will be deactivated when the receiver is stopped via the STOPRX task or when the UARTE is only able to receive four more bytes in its internal RX FIFO.

With flow control disabled, the UARTE will function in the same way as when the flow control is enabled except that the RTS line will not be used. This means that no signal will be generated when the UARTE has reached the point where it is only able to receive four more bytes in its internal RX FIFO. Data received when the internal RX FIFO is filled up, will be lost.

The UARTE receiver will be in its lowest activity level, and consume the least amount of energy, when it is stopped, i.e. before it is started via STARTRX or after it has been stopped via STOPRX and the RXTTO event has been generated. See [POWER — Power supply](#) on page 81 for more information about power modes.

## 35.5 Error conditions

An ERROR event, in the form of a framing error, will be generated if a valid stop bit is not detected in a frame. Another ERROR event, in the form of a break condition, will be generated if the RXD line is held active low for longer than the length of a data frame. Effectively, a framing error is always generated before a break condition occurs.

An ERROR event will not stop reception. If the error was a parity error, the received byte will still be transferred into Data RAM, and so will following incoming bytes. If there was a framing error (wrong stop bit), that specific byte will NOT be stored into Data RAM, but following incoming bytes will.

## 35.6 Using the UARTE without flow control

If flow control is not enabled, the interface will behave as if the CTS and RTS lines are kept active all the time.

## 35.7 Parity configuration

When parity is enabled, the parity will be generated automatically from the even parity of TXD and RXD for transmission and reception respectively.

## 35.8 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOPTX and STOPRX tasks may not be always needed (the peripheral might already be stopped), but if STOPTX and/or STOPRX is sent, software shall wait until the TXSTOPPED and/or RXTO event is received in response, before disabling the peripheral through the ENABLE register.

## 35.9 Pin configuration

The different signals RXD, CTS (Clear To Send, active low), RTS (Request To Send, active low), and TXD associated with the UARTE are mapped to physical pins according to the configuration specified in the PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers respectively.

The PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers and their configurations are only used as long as the UARTE is enabled, and retained only for the duration the device is in ON mode. PSEL.RXD, PSEL.RTS, PSEL.RTS and PSEL.TXD must only be configured when the UARTE is disabled.

To secure correct signal levels on the pins by the UARTE when the system is in OFF mode, the pins must be configured in the GPIO peripheral as described in [Table 83: GPIO configuration before enabling peripheral](#) on page 341.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 83: GPIO configuration before enabling peripheral**

UARTE signal	UARTE pin	Direction	Output value
RXD	As specified in PSEL.RXD	Input	Not applicable
CTS	As specified in PSEL.CTS	Input	Not applicable
RTS	As specified in PSEL.RTS	Output	1
TXD	As specified in PSEL.TXD	Output	1

## 35.10 Registers

**Table 84: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40002000	UARTE	UARTE0	Universal Asynchronous Receiver/ Transmitter with EasyDMA	

**Table 85: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start UART receiver
TASKS_STOPRX	0x004	Stop UART receiver
TASKS_STARTTX	0x008	Start UART transmitter
TASKS_STOPTX	0x00C	Stop UART transmitter
TASKS_FLUSHRX	0x02C	Flush RX FIFO into RX buffer
EVENTS_CTS	0x100	CTS is activated (set low). Clear To Send.
EVENTS_NCTS	0x104	CTS is deactivated (set high). Not Clear To Send.
EVENTS_RXDRDY	0x108	Data received in RXD (but potentially not yet transferred to Data RAM)
EVENTS_ENDRX	0x110	Receive buffer is filled up
EVENTS_TXDRDY	0x11C	Data sent from TXD
EVENTS_ENDTX	0x120	Last TX byte transmitted
EVENTS_ERROR	0x124	Error detected
EVENTS_RXTO	0x144	Receiver timeout
EVENTS_RXSTARTED	0x14C	UART receiver has started
EVENTS_TXSTARTED	0x150	UART transmitter has started
EVENTS_TXSTOPPED	0x158	Transmitter stopped
<i>SHORTS</i>	0x200	Shortcut register
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt

Register	Offset	Description
<i>ERRORSRC</i>	0x480	Error source
<i>ENABLE</i>	0x500	Enable UART
<i>PSEL.RTS</i>	0x508	Pin select for RTS signal
<i>PSEL.TXD</i>	0x50C	Pin select for TXD signal
<i>PSEL.CTS</i>	0x510	Pin select for CTS signal
<i>PSEL.RXD</i>	0x514	Pin select for RXD signal
<i>BAUDRATE</i>	0x524	Baud rate. Accuracy depends on the HFCLK source selected.
<i>RXD.PTR</i>	0x534	Data pointer
<i>RXD.MAXCNT</i>	0x538	Maximum number of bytes in receive buffer
<i>RXD.AMOUNT</i>	0x53C	Number of bytes transferred in the last transaction
<i>TXD.PTR</i>	0x544	Data pointer
<i>TXD.MAXCNT</i>	0x548	Maximum number of bytes in transmit buffer
<i>TXD.AMOUNT</i>	0x54C	Number of bytes transferred in the last transaction
<i>CONFIG</i>	0x56C	Configuration of parity and hardware flow control

### 35.10.1 SHORTS

Address offset: 0x200

## Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
C	RW	ENDRX_STARTRX				Shortcut between ENDRX event and STARTRX task																													
			Disabled	0		See <a href="#">EVENTS_ENDRX</a> and <a href="#">TASKS_STARTRX</a>																													
			Enabled	1		Disable shortcut																													
			Enabled	1		Enable shortcut																													
D	RW	ENDRX_STOPRX				Shortcut between ENDRX event and STOPRX task																													
			Disabled	0		See <a href="#">EVENTS_ENDRX</a> and <a href="#">TASKS_STOPRX</a>																													
			Enabled	1		Disable shortcut																													
			Enabled	1		Enable shortcut																													

### 35.10.2 INTEN

Address offset: 0x300

### Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													L	J	I	H										G	F	E			D	C	B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	CTS			Enable or disable interrupt for CTS event																														
					See <a href="#">EVENTS_CTS</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	NCTS			Enable or disable interrupt for NCTS event																														
					See <a href="#">EVENTS_NCTS</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	RXDRDY			Enable or disable interrupt for RXDRDY event																														
					See <a href="#">EVENTS_RXDRDY</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
D	RW	ENDRX			Enable or disable interrupt for ENDRX event																														
					See <a href="#">EVENTS_ENDRX</a>																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																												
Id				L																J				I				H				G				F				E				D				C				B				A							
Reset 0x00000000				0																0				0				0				0				0				0				0				0				0				0				0			
Id	RW	Field	Value Id	Value	Description																																																										
E	RW	TXDRDY	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for TXDRDY event																																																												
			See <a href="#">EVENTS_TXDRDY</a>																																																												
			Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for ENDTX event																																																												
			See <a href="#">EVENTS_ENDTX</a>																																																												
F	RW	ENDTX	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for ENDTX event																																																												
			See <a href="#">EVENTS_ENDTX</a>																																																												
G	RW	ERROR	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for ERROR event																																																												
			See <a href="#">EVENTS_ERROR</a>																																																												
H	RW	RXTO	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for RXTO event																																																												
			See <a href="#">EVENTS_RXTO</a>																																																												
I	RW	RXSTARTED	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for RXSTARTED event																																																												
			See <a href="#">EVENTS_RXSTARTED</a>																																																												
J	RW	TXSTARTED	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for TXSTARTED event																																																												
			See <a href="#">EVENTS_TXSTARTED</a>																																																												
L	RW	TXSTOPPED	Disabled	0	Disable																																																										
			Enabled	1	Enable																																																										
			Enable or disable interrupt for TXSTOPPED event																																																												
			See <a href="#">EVENTS_TXSTOPPED</a>																																																												

### 35.10.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CTS				Write '1' to Enable interrupt for CTS event																													
					See <a href="#">EVENTS_CTS</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	NCTS				Write '1' to Enable interrupt for NCTS event																													
					See <a href="#">EVENTS_NCTS</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	RXDRDY				Write '1' to Enable interrupt for RXDRDY event																													





Page 345

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_TXSTOPPED</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 35.10.5 ERRORSRC

Address offset: 0x480

Error source

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																		D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field		Value	Id	Value		Description																													
A	RW	OVERRUN						Overrun error																													
								A start bit is received while the previous data still lies in RXD. (Previous data is lost.)																													
				NotPresent		0		Read: error not present																													
				Present		1		Read: error present																													
B	RW	PARITY						Parity error																													
								A character with bad parity is received, if HW parity check is enabled.																													
				NotPresent		0		Read: error not present																													
				Present		1		Read: error present																													
C	RW	FRAMING						Framing error occurred																													
								A valid stop bit is not detected on the serial data input after all bits in a character have been received.																													
				NotPresent		0		Read: error not present																													
				Present		1		Read: error present																													
D	RW	BREAK						Break condition																													
								The serial data input is '0' for longer than the length of a data frame. (The data frame length is 10 bits without parity bit, and 11 bits with parity bit.).																													
				NotPresent		0		Read: error not present																													
				Present		1		Read: error present																													

### 35.10.6 ENABLE

Address offset: 0x500

Enable UART

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable UARTE																														
			Disabled	0	Disable UARTE																														
			Enabled	8	Enable UARTE																														

### 35.10.7 PSEL.RTS

Address offset: 0x508

Pin select for RTS signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																												A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 35.10.8 PSEL.TXD

Address offset: 0x50C

Pin select for TXD signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				B																																A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1				
Id	RW	Field	Value Id	Value				Description																															
A	RW	PIN		[0..31]				Pin number																															
B	RW	CONNECT						Connection																															
			Disconnected	1				Disconnect																															
			Connected	0				Connect																															

### 35.10.9 PSEL.CTS

Address offset: 0x510

Pin select for CTS signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																												A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 35.10.10 PSEL.RXD

Address offset: 0x514

Pin select for RXD signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																												A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 35.10.11 BAUDRATE

Address offset: 0x524

Baud rate. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	BAUDRATE						Baud rate																											
			Baud1200	0x0004F000				1200 baud (actual rate: 1205)																											
			Baud2400	0x0009D000				2400 baud (actual rate: 2396)																											
			Baud4800	0x0013B000				4800 baud (actual rate: 4808)																											
			Baud9600	0x00275000				9600 baud (actual rate: 9598)																											
			Baud14400	0x003AF000				14400 baud (actual rate: 14401)																											
			Baud19200	0x004EA000				19200 baud (actual rate: 19208)																											
			Baud28800	0x0075C000				28800 baud (actual rate: 28777)																											
			Baud38400	0x009D0000				38400 baud (actual rate: 38369)																											
			Baud57600	0x00EB0000				57600 baud (actual rate: 57554)																											
			Baud76800	0x013A9000				76800 baud (actual rate: 76923)																											
			Baud115200	0x01D60000				115200 baud (actual rate: 115108)																											
			Baud230400	0x03B00000				230400 baud (actual rate: 231884)																											
			Baud250000	0x04000000				250000 baud																											
			Baud460800	0x07400000				460800 baud (actual rate: 457143)																											
			Baud921600	0x0F000000				921600 baud (actual rate: 941176)																											
			Baud1M	0x10000000				1Mega baud																											

### 35.10.12 RXD.PTR

Address offset: 0x534

Data pointer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value								Description																							
A	RW	PTR										Data pointer																							

### 35.10.13 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT			Maximum number of bytes in receive buffer																														

### 35.10.14 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	AMOUNT			Number of bytes transferred in the last transaction																														

### 35.10.15 TXD.PTR

Address offset: 0x544

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Data pointer																											

### 35.10.16 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT			Maximum number of bytes in transmit buffer																														

### 35.10.17 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	AMOUNT			Number of bytes transferred in the last transaction																														

### 35.10.18 CONFIG

Address offset: 0x56C

Configuration of parity and hardware flow control

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	B	B	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	HWFC			Hardware flow control																															
			Disabled	0	Disabled																															
			Enabled	1	Enabled																															
B	RW	PARITY			Parity																															
			Excluded	0x0	Exclude parity bit																															
			Included	0x7	Include parity bit																															

## 35.11 Electrical specification

### 35.11.1 UARTE electrical specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{UARTE}}$	Baud rate for UARTE <sup>32</sup> .			1000	kbps
$I_{\text{UARTE1M}}$	Run current at max baud rate.		55		μA
$I_{\text{UARTE115k}}$	Run current at 115200 bps.		55		μA
$I_{\text{UARTE1k2}}$	Run current at 1200 bps.		55		μA
$I_{\text{UARTE, IDLE}}$	Idle current for UARTE (STARTed, no XXX activity)		1		μA
$t_{\text{UARTE, CTS H}}$	CTS high time	1			μs

<sup>32</sup> Higher baud rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{UARTE,START,LP}}$	Time from STARTRX/STARTTX task to transmission started, low power mode		$t_{\text{UARTE,STAR}}$ +		$\mu\text{s}$
$t_{\text{UARTE,START,CL}}$	Time from STARTRX/STARTTX task to transmission started, constant latency mode		$t_{\text{START_HFIN}}$ 1		$\mu\text{s}$

- Decoding of digital waveform from off-chip quadrature encoder.
- Sample accumulation eliminating hard real-time requirements to be enforced on application.
- Optional input de-bounce filters.
- Optional LED output signal for optical encoders.

The QDEC decodes the output from the off-chip encoder by sampling the QDEC phase input pins (A and B) at a fixed rate as specified in the SAMPLEPER register.

If the SAMPLEPER value needs to be changed, the QDEC shall be stopped using the STOP task. SAMPLEPER can be then changed upon receiving the STOPPED event, and QDEC can be restarted using the START task. Failing to do so may result in unpredictable behaviour.

It is good practice to change other registers (LEDPOL, REPORTPER, DBFEN and LEDPRE) only when the QDEC is stopped.

When started, the decoder continuously samples the two input waveforms and decodes these by comparing the current sample pair (n) with the previous sample pair (n-1).

The decoding of the sample pairs is described in the table below.

**Table 86: Sampled value encoding**

Previous sample pair(n-1)		Current samples pair(n)		SAMPLE register	ACC operation	ACCDL operation	Description
A	B	A	B				
0	0	0	0	0	No change	No change	No movement
0	0	0	1	1	Increment	No change	Movement in positive direction
0	0	1	0	-1	Decrement	No change	Movement in negative direction
0	0	1	1	2	No change	Increment	Error: Double transition
0	1	0	0	-1	Decrement	No change	Movement in negative direction
0	1	0	1	0	No change	No change	No movement
0	1	1	0	2	No change	Increment	Error: Double transition
0	1	1	1	1	Increment	No change	Movement in positive direction
1	0	0	0	1	Increment	No change	Movement in positive direction
1	0	0	1	2	No change	Increment	Error: Double transition
1	0	1	0	0	No change	No change	No movement
1	0	1	1	-1	Decrement	No change	Movement in negative direction
1	1	0	0	2	No change	Increment	Error: Double transition
1	1	0	1	-1	Decrement	No change	Movement in negative direction
1	1	1	0	1	Increment	No change	Movement in positive direction
1	1	1	1	0	No change	No change	No movement

## 36.2 LED output

The LED output follows the sample period, and the LED is switched on a given period before sampling and switched off immediately after the inputs are sampled. The period the LED is switched on before sampling is given in the LEDPRE register.

The LED output pin polarity is specified in the LEDPOL register.

For using off-chip mechanical encoders not requiring a LED, the LED output can be disabled by writing value 'Disconnected' to the CONNECT field of the PSEL.LED register. In this case the QDEC will not acquire access to a LED output pin and the pin can be used for other purposes by the CPU.

## 36.3 Debounce filters

Each of the two-phase inputs have digital debounce filters.

When enabled through the DBFEN register, the filter inputs are sampled at a fixed 1 MHz frequency during the entire sample period (which is specified in the SAMPLEPER register), and the filters require all of the samples within this sample period to equal before the input signal is accepted and transferred to the output of the filter.

As a result, only input signal with a steady state longer than twice the period specified in SAMPLEPER are guaranteed to pass through the filter, and any signal with a steady state shorter than SAMPLEPER will always be suppressed by the filter. (This is assumed that the frequency during the debounce period never exceeds 500 kHz (as required by the Nyquist theorem when using a 1 MHz sample frequency).

The LED will always be ON when the debounce filters are enabled, as the inputs in this case will be sampled continuously.



Note that when the debounce filters are enabled, displacements reported by the QDEC peripheral are delayed by one SAMPLEPER period.

## 36.4 Accumulators

The quadrature decoder contains two accumulator registers, ACC and ACCDBL, that accumulate respectively valid motion sample values and the number of detected invalid samples (double transitions).

The ACC register will accumulate all valid values (1/-1) written to the SAMPLE register. This can be useful for preventing hard real-time requirements from being enforced on the application. When using the ACC register the application does not need to read every single sample from the SAMPLE register, but can instead fetch the ACC register whenever it fits the application. The ACC register will always hold the relative movement of the external mechanical device since the previous clearing of the ACC register. Sample values indicating a double transition (2) will not be accumulated in the ACC register.

An ACCOF event will be generated if the ACC receives a SAMPLE value that would cause the register to overflow or underflow. Any SAMPLE value that would cause an ACC overflow or underflow will be discarded, but any samples not causing the ACC to overflow or underflow will still be accepted.

The accumulator ACCDBL accumulates the number of detected double transitions since the previous clearing of the ACCDBL register.

The ACC and ACCDBL registers can be cleared by the READCLRACC and subsequently read using the ACCREAD and ACCDBLREAD registers.

The ACC register can be separately cleared by the RDCLRACC and subsequently read using the ACCREAD registers.

The ACCDBL register can be separately cleared by the RDCLRDBL and subsequently read using the ACCDBLREAD registers.

The REPORTPER register allows automating the capture of several samples before it can send out a REPORTRDY event in case a non-null displacement has been captured and accumulated, and a DBLRDY event in case one or more double-displacements have been captured and accumulated. The REPORTPER field in this register selects after how many samples the accumulators contents are evaluated to send (or not) REPORTRDY and DBLRDY events.

Using the RDCLRACC task (manually sent upon receiving the event, or using the DBLRDY\_RDCLRACC shortcut), ACCREAD can then be read.

In case at least one double transition has been captured and accumulated, a DBLRDY event is sent. Using the RDCLRDBL task (manually sent upon receiving the event, or using the DBLRDY\_RDCLRDBL shortcut), ACCDBLREAD can then be read.

## 36.5 Output/input pins

The QDEC uses a three-pin interface to the off-chip quadrature encoder.

These pins will be acquired when the QDEC is enabled in the ENABLE register. The pins acquired by the QDEC cannot be written by the CPU, but they can still be read by the CPU.

The pin numbers to be used for the QDEC are selected using the PSEL.n registers.

## 36.6 Pin configuration

The Phase A, Phase B, and LED signals are mapped to physical pins according to the configuration specified in the PSEL.A, PSEL.B, and PSEL.LED registers respectively.

If the CONNECT field value 'Disconnected' is specified in any of these registers, the associated signal will not be connected to any physical pin. The PSEL.A, PSEL.B, and PSEL.LED registers and their configurations are only used as long as the QDEC is enabled, and retained only as long as the device is in

ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register.

To secure correct behavior in the QDEC, the pins used by the QDEC must be configured in the GPIO peripheral as described in [Table 87: GPIO configuration before enabling peripheral](#) on page 354 before enabling the QDEC. This configuration must be retained in the GPIO for the selected IOs as long as the QDEC is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 87: GPIO configuration before enabling peripheral**

QDEC signal	QDEC pin	Direction	Output value	Comment
Phase A	As specified in PSEL.A	Input	Not applicable	
Phase B	As specified in PSEL.B	Input	Not applicable	
LED	As specified in PSEL.LED	Input	Not applicable	

## 36.7 Registers

**Table 88: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40012000	QDEC	QDEC	Quadrature decoder	

**Table 89: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Task starting the quadrature decoder
TASKS_STOP	0x004	Task stopping the quadrature decoder
TASKS_READCLRACC	0x008	Read and clear ACC and ACCDBL
TASKS_RDCLRACC	0x00C	Read and clear ACC
TASKS_RDCLRDBL	0x010	Read and clear ACCDBL
EVENTS_SAMPLERDY	0x100	Event being generated for every new sample value written to the SAMPLE register
EVENTS_REPORTRDY	0x104	Non-null report ready
EVENTS_ACCOF	0x108	ACC or ACCDBL register overflow
EVENTS_DBLRDY	0x10C	Double displacement(s) detected
EVENTS_STOPPED	0x110	QDEC has been stopped
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	Enable the quadrature decoder
LEDPOL	0x504	LED output pin polarity
SAMPLEPER	0x508	Sample period
SAMPLE	0x50C	Motion sample value
REPORTPER	0x510	Number of samples to be taken before REPORTRDY and DBLRDY events can be generated
ACC	0x514	Register accumulating the valid transitions
ACCREAD	0x518	Snapshot of the ACC register, updated by the READCLRACC or RDCLRACC task
PSEL.LED	0x51C	Pin select for LED signal
PSEL.A	0x520	Pin select for A signal
PSEL.B	0x524	Pin select for B signal
DBFEN	0x528	Enable input debounce filters
LEDPRE	0x540	Time period the LED is switched ON prior to sampling
ACCCDBL	0x544	Register accumulating the number of detected double transitions
ACCCDBLREAD	0x548	Snapshot of the ACCDBL, updated by the READCLRACC or RDCLRDBL task

### 36.7.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																																					G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																						
A	RW	REPORTRDY_READCLRACC			Shortcut between REPORTRDY event and READCLRACC task																																						
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_READCLRACC</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
B	RW	SAMPLERDY_STOP			Shortcut between SAMPLERDY event and STOP task																																						
						See <a href="#">EVENTS_SAMPLERDY</a> and <a href="#">TASKS_STOP</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
C	RW	REPORTRDY_RDCLRACC			Shortcut between REPORTRDY event and RDCLRACC task																																						
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_RDCLRACC</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
D	RW	REPORTRDY_STOP			Shortcut between REPORTRDY event and STOP task																																						
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_STOP</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
E	RW	DBLRDY_RDCLRDBL			Shortcut between DBLRDY event and RDCLRDBL task																																						
						See <a href="#">EVENTS_DBLRDY</a> and <a href="#">TASKS_RDCLRDBL</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
F	RW	DBLRDY_STOP			Shortcut between DBLRDY event and STOP task																																						
						See <a href="#">EVENTS_DBLRDY</a> and <a href="#">TASKS_STOP</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						
G	RW	SAMPLERDY_READCLRACC			Shortcut between SAMPLERDY event and READCLRACC task																																						
						See <a href="#">EVENTS_SAMPLERDY</a> and <a href="#">TASKS_READCLRACC</a>																																					
			Disabled	0	Disable shortcut																																						
			Enabled	1	Enable shortcut																																						

## 36.7.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	SAMPLERDY				Write '1' to Enable interrupt for SAMPLERDY event																													
						See <a href="#">EVENTS_SAMPLERDY</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	REPORTRDY				Write '1' to Enable interrupt for REPORTRDY event																													
						See <a href="#">EVENTS_REPORTRDY</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	ACCOF				Write '1' to Enable interrupt for ACCOF event																													
						See <a href="#">EVENTS_ACCOF</a>																													
			Set	1	Enable																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			D		RW	DBLRDY	Write '1' to Enable interrupt for DBLRDY event																												
			See <a href="#">EVENTS_DBLRDY</a>																																
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
E	RW	STOPPED	Write '1' to Enable interrupt for STOPPED event																																
			See <a href="#">EVENTS_STOPPED</a>																																
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 36.7.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																																						E	D	C	B	A
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0							
Id	RW	Field	Value		Id		Value		Description																																	
A	RW	SAMPLERDY							Write '1' to Disable interrupt for SAMPLERDY event																																	
									See <a href="#">EVENTS_SAMPLERDY</a>																																	
			Clear	1					Disable																																	
			Disabled	0					Read: Disabled																																	
			Enabled	1					Read: Enabled																																	
B	RW	REPORTRDY							Write '1' to Disable interrupt for REPORTRDY event																																	
									See <a href="#">EVENTS_REPORTRDY</a>																																	
			Clear	1					Disable																																	
			Disabled	0					Read: Disabled																																	
			Enabled	1					Read: Enabled																																	
C	RW	ACCOF							Write '1' to Disable interrupt for ACCOF event																																	
									See <a href="#">EVENTS_ACCOF</a>																																	
			Clear	1					Disable																																	
			Disabled	0					Read: Disabled																																	
			Enabled	1					Read: Enabled																																	
D	RW	DBLRDY							Write '1' to Disable interrupt for DBLRDY event																																	
									See <a href="#">EVENTS_DBLRDY</a>																																	
			Clear	1					Disable																																	
			Disabled	0					Read: Disabled																																	
			Enabled	1					Read: Enabled																																	
E	RW	STOPPED							Write '1' to Disable interrupt for STOPPED event																																	
									See <a href="#">EVENTS_STOPPED</a>																																	
			Clear	1					Disable																																	
			Disabled	0					Read: Disabled																																	
			Enabled	1					Read: Enabled																																	

### 36.7.4 ENABLE

Address offset: 0x500

Enable the quadrature decoder

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable the quadrature decoder																														
					When enabled the decoder pins will be active. When disabled the quadrature decoder pins are not active and can be used as GPIO .																														
		Disabled	0		Disable																														
		Enabled	1		Enable																														

### 36.7.5 LEDPOL

Address offset: 0x504

LED output pin polarity

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	LEDPOL				LED output pin polarity																																
		ActiveLow	0			Led active on output pin low																																
		ActiveHigh	1			Led active on output pin high																																

### 36.7.6 SAMPLEPER

Address offset: 0x508

Sample period

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value																																Description			
A	RW	SAMPLEPER																																			Sample period. The SAMPLE register will be updated for every new sample			
		128us	0																																		128 us			
		256us	1																																		256 us			
		512us	2																																		512 us			
		1024us	3																																		1024 us			
		2048us	4																																		2048 us			
		4096us	5																																		4096 us			
		8192us	6																																		8192 us			
		16384us	7																																		16384 us			
		32ms	8																																		32768 us			
		65ms	9																																		65536 us			
		131ms	10																																		131072 us			

### 36.7.7 SAMPLE

Address offset: 0x50C

Motion sample value

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	R	SAMPLE			[-1..2]				Last motion sample																											

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
					The value is a 2's complement value, and the sign gives the direction of the motion. The value '2' indicates a double transition.

### 36.7.8 REPORTPER

Address offset: 0x510

Number of samples to be taken before REPORTRDY and DBLRDY events can be generated

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	RW	REPORTPER			Specifies the number of samples to be accumulated in the ACC register before the REPORTRDY and DBLRDY events can be generated
					The report period in [us] is given as: $RPUS = SP * RP$ Where RPUS is the report period in [us/report], SP is the sample period in [us/sample] specified in SAMPLEPER, and RP is the report period in [samples/report] specified in REPORTPER .
			10Smpl	0	10 samples / report
			40Smpl	1	40 samples / report
			80Smpl	2	80 samples / report
			120Smpl	3	120 samples / report
			160Smpl	4	160 samples / report
			200Smpl	5	200 samples / report
			240Smpl	6	240 samples / report
			280Smpl	7	280 samples / report
			1Smpl	8	1 sample / report

### 36.7.9 ACC

Address offset: 0x514

Register accumulating the valid transitions

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	R	ACC		[-1024..1023]	Register accumulating all valid samples (not double transition) read from the SAMPLE register
					Double transitions ( SAMPLE = 2 ) will not be accumulated in this register. The value is a 32 bit 2's complement value. If a sample that would cause this register to overflow or underflow is received, the sample will be ignored and an overflow event ( ACCOF ) will be generated. The ACC register is cleared by triggering the READCLRACC or the RDCLRACC task.

### 36.7.10 ACCREAD

Address offset: 0x518

Snapshot of the ACC register, updated by the READCLRACC or RDCLRACC task

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	ACCREAD		[-1024..1023]	Snapshot of the ACC register.																														
The ACCREAD register is updated when the READCLRACC or RDCLRACC task is triggered																																			

### 36.7.11 PSEL.LED

Address offset: 0x51C

Pin select for LED signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				B																																A				A				A				A																			
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1				1							
Id	RW	Field	Value Id	Value																																Description																															
A	RW	PIN		[0..31]																																Pin number																															
B	RW	CONNECT																																		Connection																															
			Disconnected	1																																Disconnect																															
			Connected	0																																Connect																															

### 36.7.12 PSEL.A

Address offset: 0x520

Pin select for A signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				B																																A				A				A				A																			
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1											
Id	RW	Field	Value Id	Value																																Description																															
A	RW	PIN		[0..31]																																Pin number																															
B	RW	CONNECT																																		Connection																															
			Disconnected	1																																Disconnect																															
			Connected	0																																Connect																															

### 36.7.13 PSEL.B

Address offset: 0x524

Pin select for B signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				B																																A				A				A				A																			
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1											
Id	RW	Field	Value Id	Value																																Description																															
A	RW	PIN		[0..31]																																Pin number																															
B	RW	CONNECT																																		Connection																															
			Disconnected	1																																Disconnect																															
			Connected	0																																Connect																															

### 36.7.14 DBFEN

Address offset: 0x528

Enable input debounce filters

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	DBFEN				Enable input debounce filters																													
			Disabled		0	Debounce input filters disabled																													
			Enabled		1	Debounce input filters enabled																													

### 36.7.15 LEDPRE

Address offset: 0x540

Time period the LED is switched ON prior to sampling

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										A	A	A	A	A	A	A
Reset 0x00000010	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	LEDPRE			[1..511]	Period in us the LED is switched on prior to sampling																										

### 36.7.16 ACCDBL

Address offset: 0x544

Register accumulating the number of detected double transitions

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	ACCDBL			[0..15]	Register accumulating the number of detected double or illegal transitions. ( SAMPLE = 2 ).																													
						When this register has reached its maximum value the accumulation of double / illegal transitions will stop. An overflow event ( ACCOF ) will be generated if any double or illegal transitions are detected after the maximum value was reached. This field is cleared by triggering the READCLRACC or RDCLRDBL task.																													

### 36.7.17 ACCDBLREAD

Address offset: 0x548

Snapshot of the ACCDBL, updated by the READCLRACC or RDCLRDBL task

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>			<b>Value</b>			<b>Description</b>																											
A	R	ACCDBLREAD				[0..15]			Snapshot of the ACCDBL register. This field is updated when the READCLRACC or RDCLRDBL task is triggered.																											

## 36.8 Electrical specification

### 36.8.1 QDEC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>QDEC</sub>	Run current		5		μA
t <sub>SAMPLE</sub>	Time between sampling signals from quadrature decoder	128		131072	μs
t <sub>LED</sub>	Time from LED is turned on to signals are sampled	0		511	μs



## 37 SAADC — Successive approximation analog-to-digital converter

The ADC is a differential successive approximation register (SAR) analog-to-digital converter.

Listed here are the main features of SAADC:

- 8/10/12-bit resolution, 14-bit resolution with oversampling
- Up to eight input channels
  - One channel per single-ended input and two channels per differential input
  - Scan mode can be configured with both single-ended channels and differential channels.
- Full scale input range (0 to VDD)
- Sampling triggered via a task from software or a PPI channel for full flexibility on sample frequency source from low power 32.768kHz RTC or more accurate 1/16MHz Timers
- One-shot conversion mode to sample a single channel
- Scan mode to sample a series of channels in sequence. Sample delay between channels is  $t_{ack} + t_{conv}$  which may vary between channels according to user configuration of  $t_{ack}$ .
- Support for direct sample transfer to RAM using EasyDMA
- Interrupts on single sample and full buffer events
- Samples stored as 16-bit 2's complement values for differential and single-ended sampling
- Continuous sampling without the need of an external timer
- Internal resistor string
- Limit checking on the fly

### 37.1 Shared resources


The ADC can coexist with COMP and other peripherals using one of `AIN0`–`AIN7`, provided these are assigned to different pins.

It is not recommended to select the same analog input pin for both modules.

### 37.2 Overview

The ADC supports up to eight external analog input channels, depending on package variant. It can be operated in a one-shot mode with sampling under software control, or a continuous conversion mode with a programmable sampling rate.

The analog inputs can be configured as eight single-ended inputs, four differential inputs or a combination of these. Each channel can be configured to select `AIN0` to `AIN7` pins, or the `VDD` pin. Channels can be sampled individually in one-shot or continuous sampling modes, or, using scan mode, multiple channels can be sampled in sequence. Channels can also be oversampled to improve noise performance.

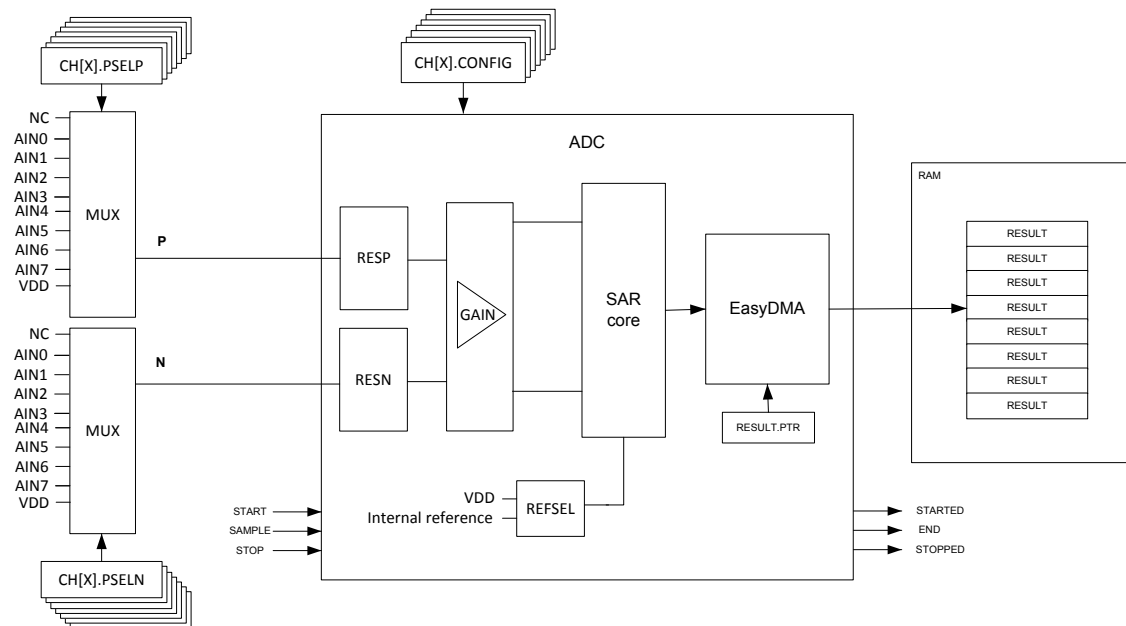

**Figure 100: Simplified ADC block diagram**

Internally, the ADC is always a differential analog-to-digital converter, but by default it is configured with single-ended input in the MODE field of the CH[n].CONFIG register. In single-ended mode, the negative input will be shorted to ground internally.

The assumption in single-ended mode is that the internal ground of the ADC is the same as the external ground that the measured voltage is referred to. The ADC is thus sensitive to ground bounce on the PCB in single-ended mode. If this is a concern we recommend using differential measurement.

### 37.3 Digital output

The output result of the ADC depends on the settings in the CH[n].CONFIG and RESOLUTION registers as follows:

$$\text{RESULT} = [V(P) - V(N)] * \text{GAIN}/\text{REFERENCE} * 2^{(\text{RESOLUTION} - m)}$$

where

**V(P)**

is the voltage at input P

**V(N)**

is the voltage at input N

**GAIN**

is the selected gain setting

**REFERENCE**

is the selected reference voltage

and  $m=0$  if CONFIG.MODE=SE, or  $m=1$  if CONFIG.MODE=Diff.

The result generated by the ADC will deviate from the expected due to DC errors like offset, gain, differential non-linearity (DNL), and integral non-linearity (INL). See [Electrical specification](#) for details on these parameters. The result can also vary due to AC errors like non-linearities in the GAIN block, settling errors due to high source impedance and sampling jitter. For battery measurement the DC errors are most noticeable.

The ADC has a wide selection of gains controlled in the GAIN field of the CH[n].CONFIG register. If CH[n].CONFIG.REFSEL=0, the input range of the ADC core is nominally  $\pm 0.6$  V differential and the input must be scaled accordingly.

The ADC has a temperature dependent offset. If the ADC is to operate over a large temperature range, we recommend running CALIBRATEOFFSET at regular intervals, a CALIBRATEDONE event will be fired when the calibration is complete

## 37.4 Analog inputs and channels

Up to eight analog input channels, CH[n](n=0..7), can be configured.

See [Shared resources](#) on page 361 for shared input with comparators.

Any one of the available channels can be enabled for the ADC to operate in one-shot mode. If more than one CH[n] is configured, the ADC enters scan mode.

An analog input is selected as a positive converter input if CH[n].PSEL is set, setting CH[n].PSEL also enables the particular channel.

An analog input is selected as a negative converter input if CH[n].PSELN is set. The CH[n].PSELN register will have no effect unless differential mode is enabled, see MODE field in CH[n].CONFIG register.

If more than one of the CH[n].PSEL registers is set, the device enters scan mode. Input selections in scan mode are controlled by the CH[n].PSEL and CH[n].PSELN registers, where CH[n].PSELN is only used if the particular scan channel is specified as differential, see MODE field in CH[n].CONFIG register.

**Important:** Channels selected for COMP cannot be used at the same time for ADC sampling, though channels not selected for use by these blocks can be used by the ADC.

**Table 90: Legal connectivity CH[n] vs. analog input**

Channel input	Source	Connectivity
CH[n].PSEL	AIN0...AIN7	Yes(any)
CH[n].PSEL	VDD	Yes
CH[n].PSELN	AIN0...AIN7	Yes(any)
CH[n].PSELN	VDD	Yes

## 37.5 Operation modes

The ADC input configuration supports one-shot mode, continuous mode and scan mode.

Scan mode and oversampling cannot be combined.

### 37.5.1 One-shot mode

One-shot operation is configured by enabling only one of the available channels defined by CH[n].PSEL, CH[n].PSELN, and CH[n].CONFIG registers.

Upon a SAMPLE task, the ADC starts to sample the input voltage. The CH[n].CONFIG.TACQ controls the acquisition time.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA. For more information, see [EasyDMA](#) on page 365.

### 37.5.2 Continuous mode

Continuous sampling can be achieved by using the internal timer in the ADC, or triggering the SAMPLE task from one of the general purpose timers through the PPI.

Care shall be taken to ensure that the sample rate fulfils the following criteria, depending on how many channels are active:

$$f_{\text{SAMPLE}} < 1 / [\tau_{\text{ACQ}} + \tau_{\text{conv}}]$$

The SAMPLERATE register can be used as a local timer instead of triggering individual SAMPLE tasks. When SAMPLERATE.MODE is set to Timers, it is sufficient to trigger SAMPLE task only once in order to start the SAADC and triggering the STOP task will stop sampling. The SAMPLERATE.CC field controls the sample rate.

The SAMPLERATE timer mode cannot be combined with SCAN mode, and only one channel can be enabled in this mode.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA.

### 37.5.3 Oversampling

An accumulator in the ADC can be used to average noise on the analog input. In general, oversampling improves the signal-to-noise ratio (SNR). Oversampling, however, does not improve the integral non-linearity (INL), or differential non-linearity (DNL).

Oversampling and scan should not be combined, since oversampling and scan will average over input channels.

The accumulator is controlled in the OVERSAMPLE register. The SAMPLE task must be set  $2^{\text{OVERSAMPLE}}$  number of times before the result is written to RAM. This can be achieved by:

- Configuring a fixed sampling rate using the local timer or a general purpose timer and PPI to trigger a SAMPLE task
- Triggering SAMPLE  $2^{\text{OVERSAMPLE}}$  times from software
- Enabling BURST mode

CH[n].CONFIG.BURST can be enabled to avoid setting SAMPLE task  $2^{\text{OVERSAMPLE}}$  times. With BURST = 1 the ADC will sample the input  $2^{\text{OVERSAMPLE}}$  times as fast as it can (actual timing:  $< (t_{\text{ACQ}} + t_{\text{CONV}}) \times 2^{\text{OVERSAMPLE}}$ ). Thus, for the user it will just appear like the conversion took a bit longer time, but other than that, it is similar to one-shot mode. Scan mode can be combined with BURST=1, if burst is enabled on all channels.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event signals that enough conversions have taken place for an oversampled result to get transferred into RAM. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA.

### 37.5.4 Scan mode

A channel is considered enabled if CH[n].PSELP is set. If more than one channel, CH[n], is enabled, the ADC enters scan mode.

In scan mode, one SAMPLE task will trigger one conversion per enabled channel. The time it takes to sample all channels is:

```
Total time < Sum(CH[x].tACQ+tCONV), x=0..enabled channels
```

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event signals has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual values have been transferred into RAM by EasyDMA.

*Figure 101: Example of RAM placement (even RESULT.MAXCNT), channels 1, 2 and 5 enabled* on page 365 provides an example of results placement in Data RAM, with an even RESULT.MAXCNT. In this example, channels 1, 2 and 5 are enabled, all others are disabled.

	31	16	15	0
RESULT.PTR	CH[2] 1 <sup>st</sup> result		CH[1] 1 <sup>st</sup> result	
RESULT.PTR + 4	CH[1] 2 <sup>nd</sup> result		CH[5] 1 <sup>st</sup> result	
RESULT.PTR + 8	CH[5] 2 <sup>nd</sup> result		CH[2] 2 <sup>nd</sup> result	
	(…)			
RESULT.PTR + 2*(RESULT.MAXCNT – 2)	CH[5] last result		CH[2] last result	

**Figure 101: Example of RAM placement (even RESULT.MAXCNT), channels 1, 2 and 5 enabled**

*Figure 102: Example of RAM placement (odd RESULT.MAXCNT), channels 1, 2 and 5 enabled* on page 365 provides an example of results placement in Data RAM, with an odd RESULT.MAXCNT. In this example, channels 1, 2 and 5 are enabled, all others are disabled. The last 32-bit word is populated only with one 16-bit result.

	31	16	15	0
RESULT.PTR	CH[2] 1 <sup>st</sup> result		CH[1] 1 <sup>st</sup> result	
RESULT.PTR + 4	CH[1] 2 <sup>nd</sup> result		CH[5] 1 <sup>st</sup> result	
RESULT.PTR + 8	CH[5] 2 <sup>nd</sup> result		CH[2] 2 <sup>nd</sup> result	
	( ... )			
RESULT.PTR + 2*(RESULT.MAXCNT – 1)			CH[5] last result	


**Figure 102: Example of RAM placement (odd RESULT.MAXCNT), channels 1, 2 and 5 enabled**

## 37.6 EasyDMA

After configuring RESULT.PTR and RESULT.MAXCNT, the ADC resources are started by triggering the START task. The ADC is using EasyDMA to store results in a Result buffer in RAM.

The Result buffer is located at the address specified in the RESULT.PTR register. The RESULT.PTR register is double-buffered and it can be updated and prepared for the next START task immediately after the STARTED event is generated. The size of the Result buffer is specified in the RESULT.MAXCNT register and the ADC will generate an END event when it has filled up the Result buffer, see [Figure 103: ADC](#) on page 366. Results are stored in little-endian byte order in Data RAM. Every sample will be sign extended to 16 bit before stored in the Result buffer.

The ADC is stopped by triggering the STOP task. The STOP task will terminate an ongoing sampling. The ADC will generate a STOPPED event when it has stopped. If the ADC is already stopped when the STOP task is triggered, the STOPPED event will still be generated.

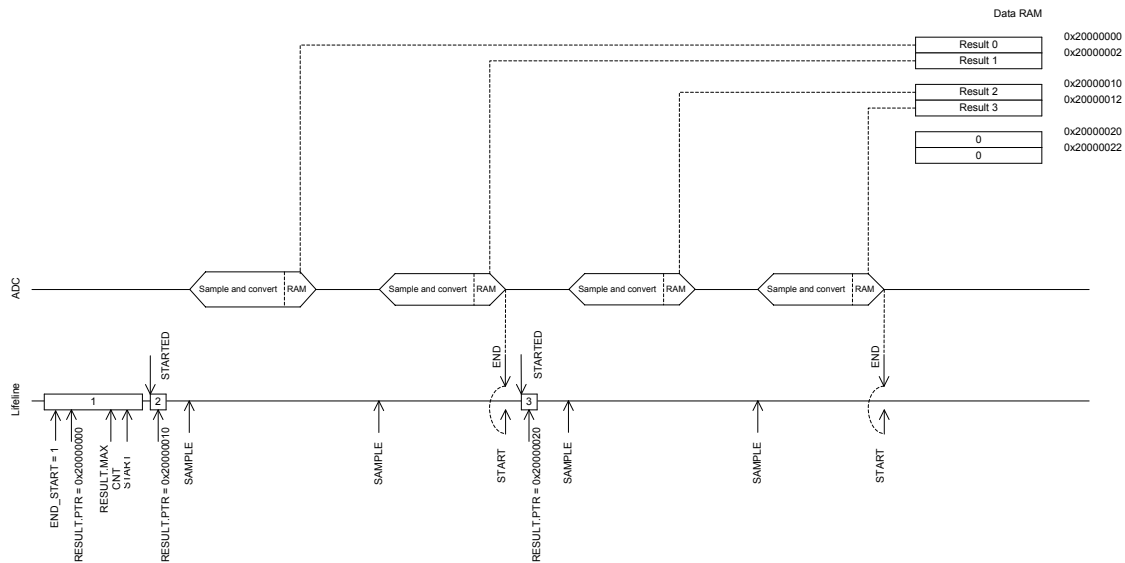

**Figure 103: ADC**

If the RESULT.PTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

The EasyDMA will have finished accessing the RAM when the END or STOPPED event has been generated.


The RESULT.AMOUNT register can be read following an END event or a STOPPED event to see how many results have been transferred to the Result buffer in RAM since the START task was triggered.

In Scan mode, the size of the Result buffer must be large enough to have room for a minimum one result from each of the enabled channels. To secure this, RESULT.MAXCNT must be specified to RESULT.MAXCNT >= "number of channels enabled". See [Scan mode](#) on page 364 for more information about Scan mode.

## 37.7 Resistor ladder

The ADC has an internal resistor string for positive and negative input.

See [Figure 104: Resistor ladder for positive input \(negative input is equivalent, using RESN instead of RESP\)](#) on page 367. The resistors are controlled in the CH[n].CONFIG.RESP and CH[n].CONFIG.RESN registers.

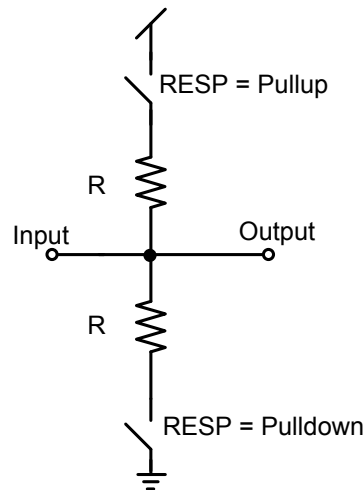

**Figure 104: Resistor ladder for positive input (negative input is equivalent, using RESN instead of RESP)**

## 37.8 Reference

The ADC can use two different references, controlled in the REFSEL field of the CH[n].CONFIG register.

These are:

- Internal reference
- VDD as reference

The internal reference results in an input range of  $\pm 0.6$  V on the ADC core. VDD as reference results in an input range of  $\pm VDD/4$  on the ADC core. The gain block can be used to change the effective input range of the ADC.

$$\text{Input range} = (\pm 0.6 \text{ V or } \pm VDD/4) / \text{Gain}$$

For example, choosing VDD as reference, single ended input (grounded negative input), and a gain of 1/4 the input range will be:

$$\text{Input range} = (VDD/4) / (1/4) = VDD$$

With internal reference, single ended input (grounded negative input), and a gain of 1/6 the input range will be:

$$\text{Input range} = (0.6 \text{ V}) / (1/6) = 3.6 \text{ V}$$

The AIN0-AIN7 inputs cannot exceed VDD, or be lower than VSS.

## 37.9 Acquisition time

To sample the input voltage, the ADC connects a capacitor to the input.

For illustration, see [Figure 105: Simplified ADC sample network](#) on page 368. The acquisition time indicates how long the capacitor is connected, see TACQ field in CH[n].CONFIG register. The required acquisition time depends on the source ( $R_{\text{source}}$ ) resistance. For high source resistance the acquisition time should be increased, see [Table 91: Acquisition time](#) on page 368.

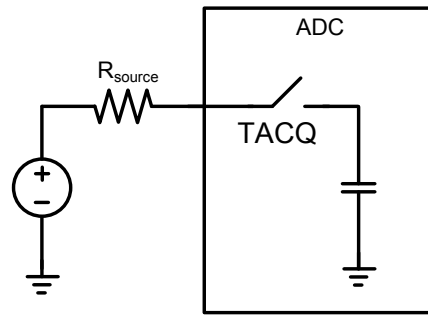


Figure 105: Simplified ADC sample network

Table 91: Acquisition time

TACQ [ $\mu$ s]	Maximum source resistance [kOhm]
3	10
5	40
10	100
15	200
20	400
40	800

## 37.10 Limits event monitoring

A channel can be event monitored by configuring limit register CH[n].LIMIT.

If the conversion result is higher than the defined high limit, or lower than the defined low limit, the appropriate event will get fired.

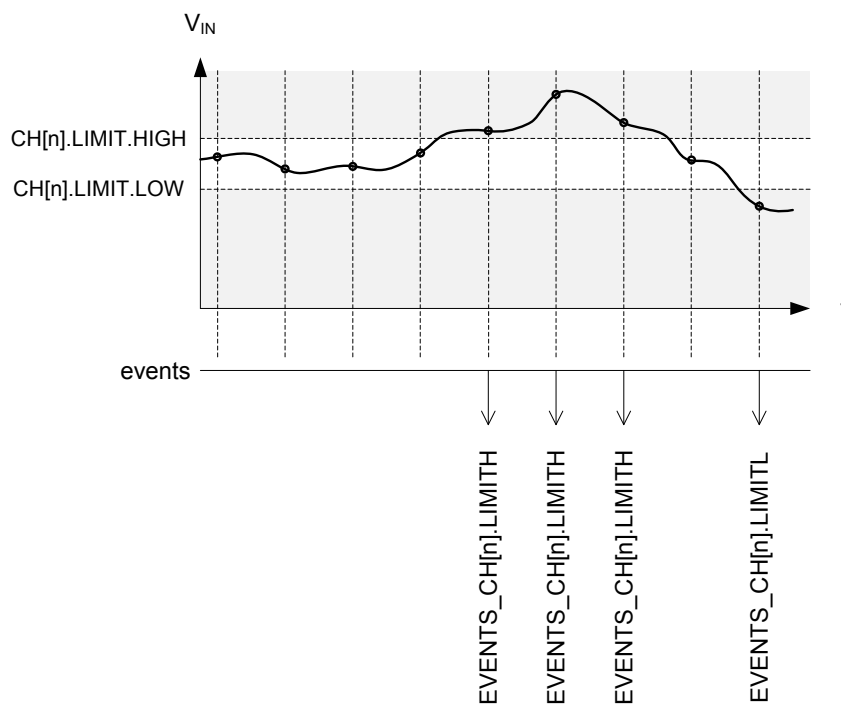


Figure 106: Example of limits monitoring on channel 'n'

Note that when setting the limits, CH[n].LIMIT.HIGH shall always be higher than or equal to CH[n].LIMIT.LOW. In other words, an event can be fired only when the input signal has been sampled



outside of the defined limits. It is not possible to fire an event when the input signal is inside a defined range by swapping high and low limits.

The comparison to limits always takes place, there is no need to enable it. If comparison is not required on a channel, the software shall simply ignore the related events. In that situation, the value of the limits registers is irrelevant, so it does not matter if CH[n].LIMIT.LOW is lower than CH[n].LIMIT.HIGH or not.

## 37.11 Registers

**Table 92: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40007000	SAADC	SAADC	Analog to digital converter	

**Table 93: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start the ADC and prepare the result buffer in RAM
TASKS_SAMPLE	0x004	Take one ADC sample, if scan is enabled all channels are sampled
TASKS_STOP	0x008	Stop the ADC and terminate any on-going conversion
TASKS_CALIBRATEOFFSE	0x00C	Starts offset auto-calibration
EVENTS_STARTED	0x100	The ADC has started
EVENTS_END	0x104	The ADC has filled up the Result buffer
EVENTS_DONE	0x108	A conversion task has been completed. Depending on the mode, multiple conversions might be needed for a result to be transferred to RAM.
EVENTS_RESULTDONE	0x10C	A result is ready to get transferred to RAM.
EVENTS_CALIBRATEDON	0x110	Calibration is complete
EVENTS_STOPPED	0x114	The ADC has stopped
EVENTS_CH[0].LIMITH	0x118	Last results is equal or above CH[0].LIMIT.HIGH
EVENTS_CH[0].LIMITL	0x11C	Last results is equal or below CH[0].LIMIT.LOW
EVENTS_CH[1].LIMITH	0x120	Last results is equal or above CH[1].LIMIT.HIGH
EVENTS_CH[1].LIMITL	0x124	Last results is equal or below CH[1].LIMIT.LOW
EVENTS_CH[2].LIMITH	0x128	Last results is equal or above CH[2].LIMIT.HIGH
EVENTS_CH[2].LIMITL	0x12C	Last results is equal or below CH[2].LIMIT.LOW
EVENTS_CH[3].LIMITH	0x130	Last results is equal or above CH[3].LIMIT.HIGH
EVENTS_CH[3].LIMITL	0x134	Last results is equal or below CH[3].LIMIT.LOW
EVENTS_CH[4].LIMITH	0x138	Last results is equal or above CH[4].LIMIT.HIGH
EVENTS_CH[4].LIMITL	0x13C	Last results is equal or below CH[4].LIMIT.LOW
EVENTS_CH[5].LIMITH	0x140	Last results is equal or above CH[5].LIMIT.HIGH
EVENTS_CH[5].LIMITL	0x144	Last results is equal or below CH[5].LIMIT.LOW
EVENTS_CH[6].LIMITH	0x148	Last results is equal or above CH[6].LIMIT.HIGH
EVENTS_CH[6].LIMITL	0x14C	Last results is equal or below CH[6].LIMIT.LOW
EVENTS_CH[7].LIMITH	0x150	Last results is equal or above CH[7].LIMIT.HIGH
EVENTS_CH[7].LIMITL	0x154	Last results is equal or below CH[7].LIMIT.LOW
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
STATUS	0x400	Status
ENABLE	0x500	Enable or disable ADC
CH[0].PSEL	0x510	Input positive pin selection for CH[0]
CH[0].PSELN	0x514	Input negative pin selection for CH[0]
CH[0].CONFIG	0x518	Input configuration for CH[0]
CH[0].LIMIT	0x51C	High/low limits for event monitoring a channel
CH[1].PSEL	0x520	Input positive pin selection for CH[1]
CH[1].PSELN	0x524	Input negative pin selection for CH[1]
CH[1].CONFIG	0x528	Input configuration for CH[1]
CH[1].LIMIT	0x52C	High/low limits for event monitoring a channel
CH[2].PSEL	0x530	Input positive pin selection for CH[2]

Register	Offset	Description
CH[2].PSELN	0x534	Input negative pin selection for CH[2]
CH[2].CONFIG	0x538	Input configuration for CH[2]
CH[2].LIMIT	0x53C	High/low limits for event monitoring a channel
CH[3].PSELN	0x540	Input positive pin selection for CH[3]
CH[3].PSELN	0x544	Input negative pin selection for CH[3]
CH[3].CONFIG	0x548	Input configuration for CH[3]
CH[3].LIMIT	0x54C	High/low limits for event monitoring a channel
CH[4].PSELN	0x550	Input positive pin selection for CH[4]
CH[4].PSELN	0x554	Input negative pin selection for CH[4]
CH[4].CONFIG	0x558	Input configuration for CH[4]
CH[4].LIMIT	0x55C	High/low limits for event monitoring a channel
CH[5].PSELN	0x560	Input positive pin selection for CH[5]
CH[5].PSELN	0x564	Input negative pin selection for CH[5]
CH[5].CONFIG	0x568	Input configuration for CH[5]
CH[5].LIMIT	0x56C	High/low limits for event monitoring a channel
CH[6].PSELN	0x570	Input positive pin selection for CH[6]
CH[6].PSELN	0x574	Input negative pin selection for CH[6]
CH[6].CONFIG	0x578	Input configuration for CH[6]
CH[6].LIMIT	0x57C	High/low limits for event monitoring a channel
CH[7].PSELN	0x580	Input positive pin selection for CH[7]
CH[7].PSELN	0x584	Input negative pin selection for CH[7]
CH[7].CONFIG	0x588	Input configuration for CH[7]
CH[7].LIMIT	0x58C	High/low limits for event monitoring a channel
RESOLUTION	0x5F0	Resolution configuration
OVERSAMPLE	0x5F4	Oversampling configuration. OVERSAMPLE should not be combined with SCAN. The RESOLUTION is applied before averaging, thus for high OVERSAMPLE a higher RESOLUTION should be used.
SAMPLERATE	0x5F8	Controls normal or continuous sample rate
RESULT.PTR	0x62C	Data pointer
RESULT.MAXCNT	0x630	Maximum number of buffer words to transfer
RESULT.AMOUNT	0x634	Number of buffer words transferred since last START

### 37.11.1 INTEN

Address offset: 0x300

### Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Enable or disable interrupt for STARTED event																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
B	RW	END				Enable or disable interrupt for END event																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
C	RW	DONE				Enable or disable interrupt for DONE event																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
D	RW	RESULTDONE				Enable or disable interrupt for RESULTDONE event																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				V U T S R Q P O N M L K J I H G F E D C B A																																		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value	Id	Value	Description																																
E	RW	CALIBRATEDONE				Enable or disable interrupt for CALIBRATEDONE event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
F	RW	STOPPED				Enable or disable interrupt for STOPPED event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
G	RW	CH0LIMITH				Enable or disable interrupt for CH[0].LIMITH event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
H	RW	CH0LIMITL				Enable or disable interrupt for CH[0].LIMITL event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
I	RW	CH1LIMITH				Enable or disable interrupt for CH[1].LIMITH event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
J	RW	CH1LIMITL				Enable or disable interrupt for CH[1].LIMITL event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
K	RW	CH2LIMITH				Enable or disable interrupt for CH[2].LIMITH event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
L	RW	CH2LIMITL				Enable or disable interrupt for CH[2].LIMITL event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
M	RW	CH3LIMITH				Enable or disable interrupt for CH[3].LIMITH event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
N	RW	CH3LIMITL				Enable or disable interrupt for CH[3].LIMITL event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
O	RW	CH4LIMITH				Enable or disable interrupt for CH[4].LIMITH event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
P	RW	CH4LIMITL				Enable or disable interrupt for CH[4].LIMITL event																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
Q	RW	CH5LIMITH				Enable or disable interrupt for CH[5].LIMITH event																																

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id															V					U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																			
			Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[5].LIMITL event																																		
						See <a href="#">EVENTS_CH[5].LIMITL</a>																																		
R	RW	CH5LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[6].LIMITH event																																		
						See <a href="#">EVENTS_CH[6].LIMITH</a>																																		
S	RW	CH6LIMITH	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[6].LIMITL event																																		
						See <a href="#">EVENTS_CH[6].LIMITL</a>																																		
T	RW	CH6LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[7].LIMITH event																																		
						See <a href="#">EVENTS_CH[7].LIMITH</a>																																		
U	RW	CH7LIMITH	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[7].LIMITL event																																		
						See <a href="#">EVENTS_CH[7].LIMITL</a>																																		
V	RW	CH7LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[7].LIMITL event																																		
						See <a href="#">EVENTS_CH[7].LIMITL</a>																																		

### 37.11.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					V U T S R Q P O N M L K J I H G F E D C B A																																	
Reset 0x00000000					0 0																																	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	STARTED			Write '1' to Enable interrupt for STARTED event																																	
					See <a href="#">EVENTS_STARTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
		Enabled	1	Read: Enabled																																		
B	RW	END			Write '1' to Enable interrupt for END event																																	
					See <a href="#">EVENTS_END</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
		Enabled	1	Read: Enabled																																		
C	RW	DONE			Write '1' to Enable interrupt for DONE event																																	
					See <a href="#">EVENTS_DONE</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
		Enabled	1	Read: Enabled																																		
D	RW	RESULTDONE			Write '1' to Enable interrupt for RESULTDONE event																																	
					See <a href="#">EVENTS_RESULTDONE</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
		Enabled	1	Read: Enabled																																		

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																			V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																		
E	RW	CALIBRATEDONE				Write '1' to Enable interrupt for CALIBRATEDONE event																																		
						See <a href="#">EVENTS_CALIBRATEDONE</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
F	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																																		
						See <a href="#">EVENTS_STOPPED</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
G	RW	CH0LIMITH				Write '1' to Enable interrupt for CH[0].LIMITH event																																		
						See <a href="#">EVENTS_CH[0].LIMITH</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
H	RW	CH0LIMITL				Write '1' to Enable interrupt for CH[0].LIMITL event																																		
						See <a href="#">EVENTS_CH[0].LIMITL</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
I	RW	CH1LIMITH				Write '1' to Enable interrupt for CH[1].LIMITH event																																		
						See <a href="#">EVENTS_CH[1].LIMITH</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
J	RW	CH1LIMITL				Write '1' to Enable interrupt for CH[1].LIMITL event																																		
						See <a href="#">EVENTS_CH[1].LIMITL</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
K	RW	CH2LIMITH				Write '1' to Enable interrupt for CH[2].LIMITH event																																		
						See <a href="#">EVENTS_CH[2].LIMITH</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
L	RW	CH2LIMITL				Write '1' to Enable interrupt for CH[2].LIMITL event																																		
						See <a href="#">EVENTS_CH[2].LIMITL</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
M	RW	CH3LIMITH				Write '1' to Enable interrupt for CH[3].LIMITH event																																		
						See <a href="#">EVENTS_CH[3].LIMITH</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
N	RW	CH3LIMITL				Write '1' to Enable interrupt for CH[3].LIMITL event																																		
						See <a href="#">EVENTS_CH[3].LIMITL</a>																																		
		Set	1			Enable																																		
		Disabled	0			Read: Disabled																																		
		Enabled	1			Read: Enabled																																		
O	RW	CH4LIMITH				Write '1' to Enable interrupt for CH[4].LIMITH event																																		

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_CH[4].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
P	RW	CH4LIMITL			Write '1' to Enable interrupt for CH[4].LIMITL event																														
					See <a href="#">EVENTS_CH[4].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
Q	RW	CH5LIMITH			Write '1' to Enable interrupt for CH[5].LIMITH event																														
					See <a href="#">EVENTS_CH[5].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
R	RW	CH5LIMITL			Write '1' to Enable interrupt for CH[5].LIMITL event																														
					See <a href="#">EVENTS_CH[5].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
S	RW	CH6LIMITH			Write '1' to Enable interrupt for CH[6].LIMITH event																														
					See <a href="#">EVENTS_CH[6].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
T	RW	CH6LIMITL			Write '1' to Enable interrupt for CH[6].LIMITL event																														
					See <a href="#">EVENTS_CH[6].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
U	RW	CH7LIMITH			Write '1' to Enable interrupt for CH[7].LIMITH event																														
					See <a href="#">EVENTS_CH[7].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
V	RW	CH7LIMITL			Write '1' to Enable interrupt for CH[7].LIMITL event																														
					See <a href="#">EVENTS_CH[7].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 37.11.3 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																				V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A				
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																							
A	RW	STARTED				Write '1' to Disable interrupt for STARTED event																																							
						See <a href="#">EVENTS_STARTED</a>																																							
		Clear	1			Disable																																							

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				V U T S R Q P O N M L K J I H G F E D C B A																																		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value Id	Value	Description																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for END event																																			
			See <a href="#">EVENTS_END</a>																																			
			Clear	1	Disable																																	
B	RW	END	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for END event																																			
			See <a href="#">EVENTS_END</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for DONE event																																			
			See <a href="#">EVENTS_DONE</a>																																			
			Clear	1	Disable																																	
C	RW	DONE	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for DONE event																																			
			See <a href="#">EVENTS_DONE</a>																																			
			Clear	1	Disable																																	
D	RW	RESULTDONE	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for RESULTDONE event																																			
			See <a href="#">EVENTS_RESULTDONE</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CALIBRATEDONE event																																			
			See <a href="#">EVENTS_CALIBRATEDONE</a>																																			
			Clear	1	Disable																																	
E	RW	CALIBRATEDONE	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CALIBRATEDONE event																																			
			See <a href="#">EVENTS_CALIBRATEDONE</a>																																			
			Clear	1	Disable																																	
F	RW	STOPPED	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for STOPPED event																																			
			See <a href="#">EVENTS_STOPPED</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[0].LIMIT event																																			
			See <a href="#">EVENTS_CH[0].LIMIT</a>																																			
			Clear	1	Disable																																	
G	RW	CH0LIMIT	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[0].LIMIT event																																			
			See <a href="#">EVENTS_CH[0].LIMIT</a>																																			
			Clear	1	Disable																																	
H	RW	CH0LIMITL	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[0].LIMITL event																																			
			See <a href="#">EVENTS_CH[0].LIMITL</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[1].LIMIT event																																			
			See <a href="#">EVENTS_CH[1].LIMIT</a>																																			
			Clear	1	Disable																																	
I	RW	CH1LIMIT	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[1].LIMIT event																																			
			See <a href="#">EVENTS_CH[1].LIMIT</a>																																			
			Clear	1	Disable																																	
J	RW	CH1LIMITL	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[1].LIMITL event																																			
			See <a href="#">EVENTS_CH[1].LIMITL</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[2].LIMIT event																																			
			See <a href="#">EVENTS_CH[2].LIMIT</a>																																			
			Clear	1	Disable																																	
K	RW	CH2LIMIT	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for CH[2].LIMIT event																																			
			See <a href="#">EVENTS_CH[2].LIMIT</a>																																			
			Clear	1	Disable																																	

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value Id	Value	Description																													
L	RW	CH2LIMITL	Enabled	1	Read: Enabled																													
					Write '1' to Disable interrupt for CH[2].LIMITL event																													
					See <a href="#">EVENTS_CH[2].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
M	RW	CH3LIMITH			Write '1' to Disable interrupt for CH[3].LIMITH event																													
					See <a href="#">EVENTS_CH[3].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
N	RW	CH3LIMITL			Write '1' to Disable interrupt for CH[3].LIMITL event																													
					See <a href="#">EVENTS_CH[3].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
O	RW	CH4LIMITH			Write '1' to Disable interrupt for CH[4].LIMITH event																													
					See <a href="#">EVENTS_CH[4].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
P	RW	CH4LIMITL			Write '1' to Disable interrupt for CH[4].LIMITL event																													
					See <a href="#">EVENTS_CH[4].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
Q	RW	CH5LIMITH			Write '1' to Disable interrupt for CH[5].LIMITH event																													
					See <a href="#">EVENTS_CH[5].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
R	RW	CH5LIMITL			Write '1' to Disable interrupt for CH[5].LIMITL event																													
					See <a href="#">EVENTS_CH[5].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
S	RW	CH6LIMITH			Write '1' to Disable interrupt for CH[6].LIMITH event																													
					See <a href="#">EVENTS_CH[6].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
T	RW	CH6LIMITL			Write '1' to Disable interrupt for CH[6].LIMITL event																													
					See <a href="#">EVENTS_CH[6].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
U	RW	CH7LIMITH			Write '1' to Disable interrupt for CH[7].LIMITH event																													
					See <a href="#">EVENTS_CH[7].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																					V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value	Description																																				
V	RW	CH7LIMITL				Write '1' to Disable interrupt for CH[7].LIMITL event																																				
						See <a href="#">EVENTS_CH[7].LIMITL</a>																																				
		Clear	1			Disable																																				
		Disabled	0			Read: Disabled																																				
		Enabled	1			Read: Enabled																																				

### 37.11.4 STATUS

Address offset: 0x400

Status

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	STATUS				Status																													
			Ready		0	ADC is ready. No on-going conversion.																													
			Busy		1	ADC is busy. Conversion in progress.																													

### 37.11.5 ENABLE

Address offset: 0x500

Enable or disable ADC

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value																																	Description
A	RW	ENABLE																																				Enable or disable ADC
		Disabled	0																																			Disable ADC
		Enabled	1																																			Enable ADC
					When enabled, the ADC will acquire access to the analog input pins specified in the CH[n].PSEL and CH[n].PSELN registers.																																	

### 37.11.6 CH[0].PSEL

Address offset: 0x510

Input positive pin selection for CH[0]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 37.11.7 CH[0].PSELN

Address offset: 0x514

Input negative pin selection for CH[0]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value		Description																																		
A	RW	PSELN				Analog negative input, enables differential channel																																		
			NC	0		Not connected																																		
			AnalogInput0	1		AIN0																																		
			AnalogInput1	2		AIN1																																		
			AnalogInput2	3		AIN2																																		
			AnalogInput3	4		AIN3																																		
			AnalogInput4	5		AIN4																																		
			AnalogInput5	6		AIN5																																		
			AnalogInput6	7		AIN6																																		
			AnalogInput7	8		AIN7																																		
			VDD	9		VDD																																		

### 37.11.8 CH[0].CONFIG

Address offset: 0x518

Input configuration for CH[0]

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			G F E E E D C C C B B A A																														
Reset 0x00020000			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																														
Id	RW	Field	Value Id	Value	Description																												
A	RW	RESP			Positive channel resistor control																												
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
B	RW	RESN			Negative channel resistor control																												
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
C	RW	GAIN			Gain control																												
			Gain1_6	0	1/6																												
			Gain1_5	1	1/5																												
			Gain1_4	2	1/4																												
			Gain1_3	3	1/3																												
			Gain1_2	4	1/2																												
			Gain1	5	1																												
			Gain2	6	2																												
D	RW	REFSEL			Reference control																												
			Internal	0	Internal reference (0.6 V)																												
			VDD1_4	1	VDD/4 as reference																												
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																												
			3us	0	3 us																												
			5us	1	5 us																												
			10us	2	10 us																												
			15us	3	15 us																												
			20us	4	20 us																												

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																												
Id													G				F				E				E				E				D				C				C				C				B				B				A				A			
Reset 0x00020000					0								0				0				0				0				0				0				0				0				0				0				0				0				0			
Id	RW	Field	Value	Id	Value					Description																																																						
			40us		5					40 us																																																						
F	RW	MODE								Enable differential mode																																																						
					SE		0					Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																																				
					Diff		1					Differential																																																				
G	RW	BURST								Enable burst mode																																																						
					Disabled		0					Burst mode is disabled (normal operation)																																																				
					Enabled		1					Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																																				

### 37.11.9 CH[0].LIMIT

Address offset: 0x51C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	LOW			[-32768 to +32767]				Low level limit																										
B	RW	HIGH			[-32768 to +32767]				High level limit																										

### 37.11.10 CH[1].PSELP

Address offset: 0x520

Input positive pin selection for CH[1]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	PSELP				Analog positive input channel																															
			NC		0	Not connected																															
			AnalogInput0		1	AIN0																															
			AnalogInput1		2	AIN1																															
			AnalogInput2		3	AIN2																															
			AnalogInput3		4	AIN3																															
			AnalogInput4		5	AIN4																															
			AnalogInput5		6	AIN5																															
			AnalogInput6		7	AIN6																															
			AnalogInput7		8	AIN7																															
			VDD		9	VDD																															

### 37.11.11 CH[1].PSELN

Address offset: 0x524

Input negative pin selection for CH[1]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PSELN				Analog negative input, enables differential channel																														
			NC		0	Not connected																														
			AnalogInput0		1	AIN0																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value	Description																																			
			AnalogInput1	2	AIN1																																			
			AnalogInput2	3	AIN2																																			
			AnalogInput3	4	AIN3																																			
			AnalogInput4	5	AIN4																																			
			AnalogInput5	6	AIN5																																			
			AnalogInput6	7	AIN6																																			
			AnalogInput7	8	AIN7																																			
			VDD	9	VDD																																			

### 37.11.12 CH[1].CONFIG

Address offset: 0x528

Input configuration for CH[1]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															G	F			E	E	E				D	C	C	C				B	B				A	A
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	RESP			Positive channel resistor control																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
B	RW	RESN			Negative channel resistor control																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
C	RW	GAIN			Gain control																																	
			Gain1_6	0	1/6																																	
			Gain1_5	1	1/5																																	
			Gain1_4	2	1/4																																	
			Gain1_3	3	1/3																																	
			Gain1_2	4	1/2																																	
			Gain1	5	1																																	
			Gain2	6	2																																	
			Gain4	7	4																																	
D	RW	REFSEL			Reference control																																	
			Internal	0	Internal reference (0.6 V)																																	
			VDD1_4	1	VDD/4 as reference																																	
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																	
			3us	0	3 us																																	
			5us	1	5 us																																	
			10us	2	10 us																																	
			15us	3	15 us																																	
			20us	4	20 us																																	
			40us	5	40 us																																	
			F	RW	MODE			Enable differential mode																														
SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																				
Diff	1	Differential																																				
G	RW	BURST			Enable burst mode																																	
			Disabled	0	Burst mode is disabled (normal operation)																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id												G						F		E		E	E					D		C		C	C					B		B			A		A
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0								
Id	RW	Field	Value	Id	Value				Description																																				
			Enabled	1					Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																				

### 37.11.13 CH[1].LIMIT

Address offset: 0x52C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	LOW			[-32768 to +32767]												Low level limit																		
B	RW	HIGH			[-32768 to +32767]												High level limit																		

### 37.11.14 CH[2].PSELP

Address offset: 0x530

Input positive pin selection for CH[2]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																												A				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PSELP					Analog positive input channel																													
			NC	0			Not connected																													
			AnalogInput0	1			AIN0																													
			AnalogInput1	2			AIN1																													
			AnalogInput2	3			AIN2																													
			AnalogInput3	4			AIN3																													
			AnalogInput4	5			AIN4																													
			AnalogInput5	6			AIN5																													
			AnalogInput6	7			AIN6																													
			AnalogInput7	8			AIN7																													
			VDD	9			VDD																													

### 37.11.15 CH[2].PSELN

Address offset: 0x534

Input negative pin selection for CH[2]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A A																															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																		A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value		Description																																
			VDD	9	VDD																																		

### 37.11.16 CH[2].CONFIG

Address offset: 0x538

Input configuration for CH[2]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id					G								F			E			E			D			C			C			C			B			B			A			A		
Reset 0x00020000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0								
Id	RW	Field	Value	Id	Value	Description																																							
A	RW	RESP				Positive channel resistor control																																							
			Bypass	0	Bypass resistor ladder																																								
			Pulldown	1	Pull-down to GND																																								
			Pullup	2	Pull-up to VDD																																								
			VDD1_2	3	Set input at VDD/2																																								
B	RW	RESN				Negative channel resistor control																																							
			Bypass	0	Bypass resistor ladder																																								
			Pulldown	1	Pull-down to GND																																								
			Pullup	2	Pull-up to VDD																																								
			VDD1_2	3	Set input at VDD/2																																								
C	RW	GAIN				Gain control																																							
			Gain1_6	0	1/6																																								
			Gain1_5	1	1/5																																								
			Gain1_4	2	1/4																																								
			Gain1_3	3	1/3																																								
			Gain1_2	4	1/2																																								
			Gain1	5	1																																								
			Gain2	6	2																																								
D	RW	REFSEL				Reference control																																							
			Internal	0	Internal reference (0.6 V)																																								
			VDD1_4	1	VDD/4 as reference																																								
E	RW	TACQ				Acquisition time, the time the ADC uses to sample the input voltage																																							
			3us	0	3 us																																								
			5us	1	5 us																																								
			10us	2	10 us																																								
			15us	3	15 us																																								
			20us	4	20 us																																								
			40us	5	40 us																																								
F	RW	MODE				Enable differential mode																																							
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																								
			Diff	1	Differential																																								
G	RW	BURST				Enable burst mode																																							
			Disabled	0	Burst mode is disabled (normal operation)																																								
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																								

### 37.11.17 CH[2].LIMIT

Address offset: 0x53C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	LOW			[-32768 to +32767]												Low level limit																		
B	RW	HIGH			[-32768 to +32767]												High level limit																		

### 37.11.18 CH[3].PSELP

Address offset: 0x540

Input positive pin selection for CH[3]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PSELP				Analog positive input channel																													
			NC	0		Not connected																													
			AnalogInput0	1		AIN0																													
			AnalogInput1	2		AIN1																													
			AnalogInput2	3		AIN2																													
			AnalogInput3	4		AIN3																													
			AnalogInput4	5		AIN4																													
			AnalogInput5	6		AIN5																													
			AnalogInput6	7		AIN6																													
			AnalogInput7	8		AIN7																													
			VDD	9		VDD																													

### 37.11.19 CH[3].PSELN

Address offset: 0x544

Input negative pin selection for CH[3]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PSELN				Analog negative input, enables differential channel																																
			NC	0		Not connected																																
			AnalogInput0	1		AIN0																																
			AnalogInput1	2		AIN1																																
			AnalogInput2	3		AIN2																																
			AnalogInput3	4		AIN3																																
			AnalogInput4	5		AIN4																																
			AnalogInput5	6		AIN5																																
			AnalogInput6	7		AIN6																																
			AnalogInput7	8		AIN7																																
			VDD	9		VDD																																

### 37.11.20 CH[3].CONFIG

Address offset: 0x548

Input configuration for CH[3]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				G F E E E D C C C B B A A																															
Reset 0x00020000				0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																															
Id	RW	Field	Value	Id	Value				Description																										
A	RW	RESP							Positive channel resistor control																										

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					G								F				E				D				C				B				A					
Reset 0x00020000					0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
B	RW	RESN			Negative channel resistor control																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
C	RW	GAIN			Gain control																																	
			Gain1_6	0	1/6																																	
			Gain1_5	1	1/5																																	
			Gain1_4	2	1/4																																	
			Gain1_3	3	1/3																																	
			Gain1_2	4	1/2																																	
			Gain1	5	1																																	
			Gain2	6	2																																	
			Gain4	7	4																																	
D	RW	REFSEL			Reference control																																	
			Internal	0	Internal reference (0.6 V)																																	
			VDD1_4	1	VDD/4 as reference																																	
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																	
			3us	0	3 us																																	
			5us	1	5 us																																	
			10us	2	10 us																																	
			15us	3	15 us																																	
			20us	4	20 us																																	
			40us	5	40 us																																	
F	RW	MODE			Enable differential mode																																	
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																	
			Diff	1	Differential																																	
G	RW	BURST			Enable burst mode																																	
			Disabled	0	Burst mode is disabled (normal operation)																																	
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																	

### 37.11.21 CH[3].LIMIT

Address offset: 0x54C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	LOW		[-32768 to +32767]				Low level limit																											
B	RW	HIGH		[-32768 to +32767]				High level limit																											

### 37.11.22 CH[4].PSELP

Address offset: 0x550

Input positive pin selection for CH[4]



Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A										A	A	A	A	
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id			Value			Description																																			
A	RW	PSEL							Analog positive input channel																																			
			NC			0			Not connected																																			
			AnalogInput0			1			AIN0																																			
			AnalogInput1			2			AIN1																																			
			AnalogInput2			3			AIN2																																			
			AnalogInput3			4			AIN3																																			
			AnalogInput4			5			AIN4																																			
			AnalogInput5			6			AIN5																																			
			AnalogInput6			7			AIN6																																			
			AnalogInput7			8			AIN7																																			
			VDD			9			VDD																																			

### 37.11.23 CH[4].PSELN

Address offset: 0x554

Input negative pin selection for CH[4]

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			A A																														

### 37.11.24 CH[4].CONFIG

Address offset: 0x558

Input configuration for CH[4]

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			G F E E E D C C C B B A A																														
Reset 0x00020000			0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																														
Id	RW	Field	Value	Id	Value	Description																											
A	RW	RESP				Positive channel resistor control																											
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
B	RW	RESN				Negative channel resistor control																											
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
C	RW	GAIN				Gain control																											
			Gain1_6	0	1/6																												
			Gain1_5	1	1/5																												

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																
Id				G								F				E				E				D				C				C				B				B				A				A			
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0														
Id	RW	Field	Value Id	Value	Description																																														
			Gain1_4	2	1/4																																														
			Gain1_3	3	1/3																																														
			Gain1_2	4	1/2																																														
			Gain1	5	1																																														
			Gain2	6	2																																														
			Gain4	7	4																																														
D	RW	REFSEL	Reference control																																																
			Internal	0	Internal reference (0.6 V)																																														
			VDD1_4	1	VDD/4 as reference																																														
E	RW	TACQ	Acquisition time, the time the ADC uses to sample the input voltage																																																
			3us	0	3 us																																														
			5us	1	5 us																																														
			10us	2	10 us																																														
			15us	3	15 us																																														
			20us	4	20 us																																														
			40us	5	40 us																																														
F	RW	MODE	Enable differential mode																																																
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																														
			Diff	1	Differential																																														
G	RW	BURST	Enable burst mode																																																
			Disabled	0	Burst mode is disabled (normal operation)																																														
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																														

### 37.11.25 CH[4].LIMIT

Address offset: 0x55C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	LOW		[-32768 to +32767]														Low level limit																	
B	RW	HIGH		[-32768 to +32767]														High level limit																	

### 37.11.26 CH[5].PSELP

Address offset: 0x560

Input positive pin selection for CH[5]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																
A	RW	PSELP	Analog positive input channel																																		
			NC	0	Not connected																																
			AnalogInput0	1	AIN0																																
			AnalogInput1	2	AIN1																																
			AnalogInput2	3	AIN2																																
			AnalogInput3	4	AIN3																																
			AnalogInput4	5	AIN4																																
			AnalogInput5	6	AIN5																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																A	A	A	A	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
			AnalogInput6	7	AIN6																																	
			AnalogInput7	8	AIN7																																	
			VDD	9	VDD																																	

### 37.11.27 CH[5].PSELN

Address offset: 0x564

Input negative pin selection for CH[5]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																																							A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0								
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	PSELN				Analog negative input, enables differential channel																																					
			NC	0		Not connected																																					
			AnalogInput0	1		AIN0																																					
			AnalogInput1	2		AIN1																																					
			AnalogInput2	3		AIN2																																					
			AnalogInput3	4		AIN3																																					
			AnalogInput4	5		AIN4																																					
			AnalogInput5	6		AIN5																																					
			AnalogInput6	7		AIN6																																					
			AnalogInput7	8		AIN7																																					
			VDD	9		VDD																																					

### 37.11.28 CH[5].CONFIG

Address offset: 0x568

Input configuration for CH[5]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													G			F		E	E	E				D		C	C	C			B	B			A	A
Reset 0x00020000					0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	RESP				Positive channel resistor control																														
			Bypass	0	Bypass resistor ladder																															
			Pulldown	1	Pull-down to GND																															
			Pullup	2	Pull-up to VDD																															
			VDD1_2	3	Set input at VDD/2																															
B	RW	RESN				Negative channel resistor control																														
			Bypass	0	Bypass resistor ladder																															
			Pulldown	1	Pull-down to GND																															
			Pullup	2	Pull-up to VDD																															
			VDD1_2	3	Set input at VDD/2																															
C	RW	GAIN				Gain control																														
			Gain1_6	0	1/6																															
			Gain1_5	1	1/5																															
			Gain1_4	2	1/4																															
			Gain1_3	3	1/3																															
			Gain1_2	4	1/2																															
			Gain1	5	1																															
			Gain2	6	2																															
			Gain4	7	4																															
D	RW	REFSEL				Reference control																														
			Internal	0	Internal reference (0.6 V)																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																
Id				G								F				E				E				D				C				C				B				B				A				A			
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0														
Id	RW	Field	Value	Id	Value	Description																																													
			VDD1_4	1	VDD/4 as reference																																														
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																														
			3us	0	3 us																																														
			5us	1	5 us																																														
			10us	2	10 us																																														
			15us	3	15 us																																														
			20us	4	20 us																																														
			40us	5	40 us																																														
F	RW	MODE			Enable differential mode																																														
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																														
			Diff	1	Differential																																														
G	RW	BURST			Enable burst mode																																														
			Disabled	0	Burst mode is disabled (normal operation)																																														
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																														

### 37.11.29 CH[5].LIMIT

Address offset: 0x56C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	LOW			[-32768 to +32767]				Low level limit																										
B	RW	HIGH			[-32768 to +32767]				High level limit																										

### 37.11.30 CH[6].PSELP

Address offset: 0x570

Input positive pin selection for CH[6]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PSELP				Analog positive input channel																														
			NC	0		Not connected																														
			AnalogInput0	1		AIN0																														
			AnalogInput1	2		AIN1																														
			AnalogInput2	3		AIN2																														
			AnalogInput3	4		AIN3																														
			AnalogInput4	5		AIN4																														
			AnalogInput5	6		AIN5																														
			AnalogInput6	7		AIN6																														
			AnalogInput7	8		AIN7																														
			VDD	9		VDD																														

### 37.11.31 CH[6].PSELN

Address offset: 0x574

Input negative pin selection for CH[6]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value	Description																																			
A	RW	PSELN			Analog negative input, enables differential channel																																			
			NC	0	Not connected																																			
			AnalogInput0	1	AIN0																																			
			AnalogInput1	2	AIN1																																			
			AnalogInput2	3	AIN2																																			
			AnalogInput3	4	AIN3																																			
			AnalogInput4	5	AIN4																																			
			AnalogInput5	6	AIN5																																			
			AnalogInput6	7	AIN6																																			
			AnalogInput7	8	AIN7																																			
		VDD	9	VDD																																				

### 37.11.32 CH[6].CONFIG

Address offset: 0x578

Input configuration for CH[6]

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id													G	F			E	E	E				D	C	C	C				B	B				A	A
Reset 0x00020000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	RESP			Positive channel resistor control																															
			Bypass	0	Bypass resistor ladder																															
			Pulldown	1	Pull-down to GND																															
			Pullup	2	Pull-up to VDD																															
			VDD1_2	3	Set input at VDD/2																															
B	RW	RESN			Negative channel resistor control																															
			Bypass	0	Bypass resistor ladder																															
			Pulldown	1	Pull-down to GND																															
			Pullup	2	Pull-up to VDD																															
			VDD1_2	3	Set input at VDD/2																															
C	RW	GAIN			Gain control																															
			Gain1_6	0	1/6																															
			Gain1_5	1	1/5																															
			Gain1_4	2	1/4																															
			Gain1_3	3	1/3																															
			Gain1_2	4	1/2																															
			Gain1	5	1																															
			Gain2	6	2																															
D	RW	REFSEL			Reference control																															
			Internal	0	Internal reference (0.6 V)																															
			VDD1_4	1	VDD/4 as reference																															
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																															
			3us	0	3 us																															
			5us	1	5 us																															
			10us	2	10 us																															
			15us	3	15 us																															
			20us	4	20 us																															
			40us	5	40 us																															
F	RW	MODE			Enable differential mode																															
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																															
			Diff	1	Differential																															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Id													G								F				E				E				E								D				C				C				C								B				B								A				A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
Reset 0x00020000					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0				

### 37.11.33 CH[6].LIMIT

Address offset: 0x57C

High/low limits for event monitoring a channel

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000					0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value														Description																	
A	RW	LOW			[-32768 to +32767]														Low level limit																	
B	RW	HIGH			[-32768 to +32767]														High level limit																	

### 37.11.34 CH[7].PSELP

Address offset: 0x580

Input positive pin selection for CH[7]

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																						A	A	A	A	A	
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id			Value			Description																																		
A	RW	PSELP							Analog positive input channel																																		
			NC			0			Not connected																																		
			AnalogInput0			1			AIN0																																		
			AnalogInput1			2			AIN1																																		
			AnalogInput2			3			AIN2																																		
			AnalogInput3			4			AIN3																																		
			AnalogInput4			5			AIN4																																		
			AnalogInput5			6			AIN5																																		
			AnalogInput6			7			AIN6																																		
			AnalogInput7			8			AIN7																																		
			VDD			9			VDD																																		

### 37.11.35 CH[7].PSELN

Address offset: 0x584

Input negative pin selection for CH[7]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PSELN				Analog negative input, enables differential channel																														
			NC	0		Not connected																														
			AnalogInput0	1		AIN0																														
			AnalogInput1	2		AIN1																														
			AnalogInput2	3		AIN2																														
			AnalogInput3	4		AIN3																														
			AnalogInput4	5		AIN4																														
			AnalogInput5	6		AIN5																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														

### 37.11.36 CH[7].CONFIG

Address offset: 0x588

Input configuration for CH[7]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id				G										F			E			E			D			C			C			C			B			B			A			A		
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0									
Id	RW	Field	Value Id	Value	Description																																									
A	RW	RESP			Positive channel resistor control																																									
			Bypass	0	Bypass resistor ladder																																									
			Pulldown	1	Pull-down to GND																																									
			Pullup	2	Pull-up to VDD																																									
			VDD1_2	3	Set input at VDD/2																																									
B	RW	RESN			Negative channel resistor control																																									
			Bypass	0	Bypass resistor ladder																																									
			Pulldown	1	Pull-down to GND																																									
			Pullup	2	Pull-up to VDD																																									
			VDD1_2	3	Set input at VDD/2																																									
C	RW	GAIN			Gain control																																									
			Gain1_6	0	1/6																																									
			Gain1_5	1	1/5																																									
			Gain1_4	2	1/4																																									
			Gain1_3	3	1/3																																									
			Gain1_2	4	1/2																																									
			Gain1	5	1																																									
			Gain2	6	2																																									
D	RW	REFSEL			Reference control																																									
			Internal	0	Internal reference (0.6 V)																																									
			VDD1_4	1	VDD/4 as reference																																									
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																									
			3us	0	3 us																																									
			5us	1	5 us																																									
			10us	2	10 us																																									
			15us	3	15 us																																									
			20us	4	20 us																																									
			40us	5	40 us																																									
F	RW	MODE			Enable differential mode																																									
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																									
			Diff	1	Differential																																									
G	RW	BURST			Enable burst mode																																									
			Disabled	0	Burst mode is disabled (normal operation)																																									
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																									

### 37.11.37 CH[7].LIMIT

Address offset: 0x58C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	LOW		[-32768 to +32767]														Low level limit																	
B	RW	HIGH		[-32768 to +32767]														High level limit																	

### 37.11.38 RESOLUTION

Address offset: 0x5F0

Resolution configuration

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A	A	A		
Reset 0x00000001									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field		Value Id		Value		Description																																	
A	RW	VAL						Set the resolution																																	
				8bit		0		8 bit																																	
				10bit		1		10 bit																																	
				12bit		2		12 bit																																	
				14bit		3		14 bit																																	

### 37.11.39 OVERSAMPLE

Address offset: 0x5F4

Oversampling configuration. OVERSAMPLE should not be combined with SCAN. The RESOLUTION is applied before averaging, thus for high OVERSAMPLE a higher RESOLUTION should be used.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	OVERSAMPLE			Oversample control																															
			Bypass	0	Bypass oversampling																															
			Over2x	1	Oversample 2x																															
			Over4x	2	Oversample 4x																															
			Over8x	3	Oversample 8x																															
			Over16x	4	Oversample 16x																															
			Over32x	5	Oversample 32x																															
			Over64x	6	Oversample 64x																															
			Over128x	7	Oversample 128x																															
			Over256x	8	Oversample 256x																															

### 37.11.40 SAMPLERATE

Address offset: 0x5F8

Controls normal or continuous sample rate

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																								B	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	CC		[80..2047]	Capture and compare value. Sample rate is 16 MHz/CC																														
B	RW	MODE			Select mode for sample rate control																														
			Task	0	Rate is controlled from SAMPLE task																														
			Timers	1	Rate is controlled from local timer (use CC to control the rate)																														



### 37.11.41 RESULT.PTR

Address offset: 0x62C

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	PTR								Data pointer																										

### 37.11.42 RESULT.MAXCNT

Address offset: 0x630

Maximum number of buffer words to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of buffer words to transfer																													

### 37.11.43 RESULT.AMOUNT

Address offset: 0x634

Number of buffer words transferred since last START

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	R	AMOUNT							Number of buffer words transferred since last START. This register can be read after an END or STOPPED event.																											

## 37.12 Electrical specification


### 37.12.1 SAADC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
DNL	Differential non-linearity, 10-bit resolution	-0.95	<1		LSB
INL	Integral non-linearity, 10-bit resolution		1		LSB
V <sub>OS</sub>	Differential offset error (calibrated), 10-bit resolution <sup>a</sup>		+2		LSB
C <sub>EG</sub>	Gain error temperature coefficient		0.02		%/°C
f <sub>SAMPLE</sub>	Maximum sampling rate			200	kHz
t <sub>ACQ,10k</sub>	Acquisition time (configurable), source Resistance ≤ 10kOhm		3		μs
t <sub>ACQ,40k</sub>	Acquisition time (configurable), source Resistance ≤ 40kOhm		5		μs
t <sub>ACQ,100k</sub>	Acquisition time (configurable), source Resistance ≤ 100kOhm		10		μs
t <sub>ACQ,200k</sub>	Acquisition time (configurable), source Resistance ≤ 200kOhm		15		μs
t <sub>ACQ,400k</sub>	Acquisition time (configurable), source Resistance ≤ 400kOhm		20		μs
t <sub>ACQ,800k</sub>	Acquisition time (configurable), source Resistance ≤ 800kOhm		40		μs
t <sub>CONV</sub>	Conversion time		<2		μs
I <sub>ADC,CONV</sub>	ADC current during ACQuisition and CONVersion		700		μA
I <sub>ADC,IDLE</sub>	Idle current, when not sampling, excluding clock sources and regulator base currents <sup>33</sup>		<5		μA

<sup>a</sup> Digital output code at zero volt differential input.

<sup>33</sup> When t<sub>ACQ</sub> is 10us or longer, and if DC/DC is active, it will be allowed to work in refresh mode if no other resource is requiring a high quality power supply from 1V3. If t<sub>ACQ</sub> is smaller than 10us and DC/DC is active,


Symbol	Description	Min.	Typ.	Max.	Units
$E_{G1/6}$	Error <sup>b</sup> for Gain = 1/6	-3		3	%
$E_{G1/4}$	Error <sup>b</sup> for Gain = 1/4	-3		3	%
$E_{G1/2}$	Error <sup>b</sup> for Gain = 1/2	-3		4	%
$E_{G1}$	Error <sup>b</sup> for Gain = 1	-3		4	%
$C_{SAMPLE}$	Sample and hold capacitance at maximum gain <sup>34</sup>		2.5		pF
$R_{INPUT}$	Input resistance		>1		MΩ
$E_{NOB}$	Effective number of bits, differential mode, 12-bit resolution, 1/1 gain, 3 μs acquisition time, crystal HFCLK, 200 kps		9		Bit
$S_{NDR}$	Peak signal to noise and distortion ratio, differential mode, 12-bit resolution, 1/1 gain, 3 μs acquisition time, crystal HFCLK, 200 kps		56		dB
$S_{FDR}$	Spurious free dynamic range, differential mode, 12-bit resolution, 1/1 gain, 3 μs acquisition time, crystal HFCLK, 200 kps		70		dBc
$R_{LADDER}$	Ladder resistance		160		kΩ

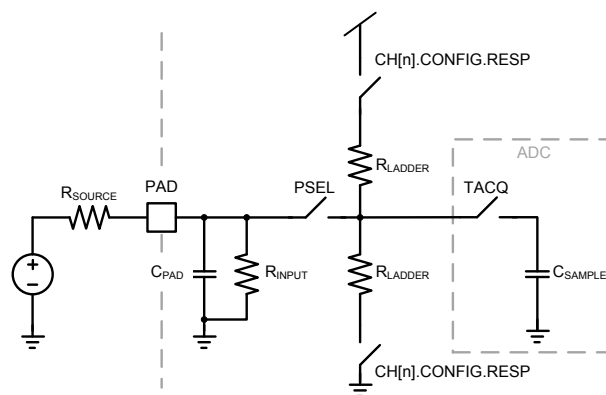

**Figure 107: Model of SAADC input (one channel)**

Note: SAADC average current calculation for a given application is based on the sample period, conversion and acquisition time ( $t_{CONV}$  and  $t_{ACQ}$ ) and conversion and idle current ( $I_{ADC,CONV}$  and  $I_{ADC,IDLE}$ ). For example, sampling at 4kHz gives a sample period of 250μs. The average current consumption would then be:

$$I_{AVERAGE} = \left( \frac{t_{CONV} + t_{ACQ}}{250} \right) (I_{ADC,CONV}) + \left( \frac{250 - (t_{CONV} + t_{ACQ})}{250} \right) (I_{ADC,IDLE})$$

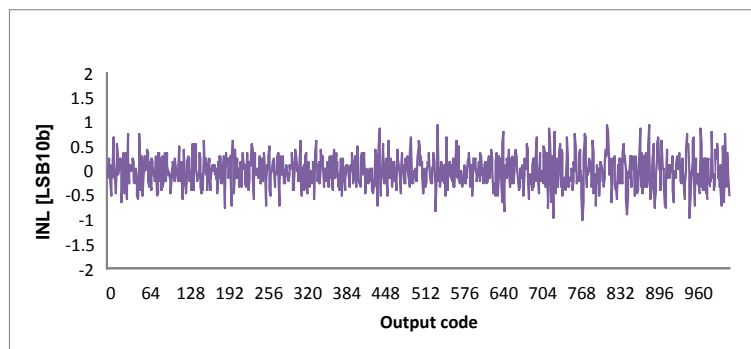

**Figure 108: ADC INL vs Output Code**

refresh mode will not be allowed, and it will remain in normal mode from the START task to the STOPPED event. So depending on  $t_{ACQ}$  and other resources' needs, the appropriate base current needs to be taken into account.

<sup>b</sup> Does not include temperature drift

<sup>34</sup> Maximum gain corresponds to highest capacitance.

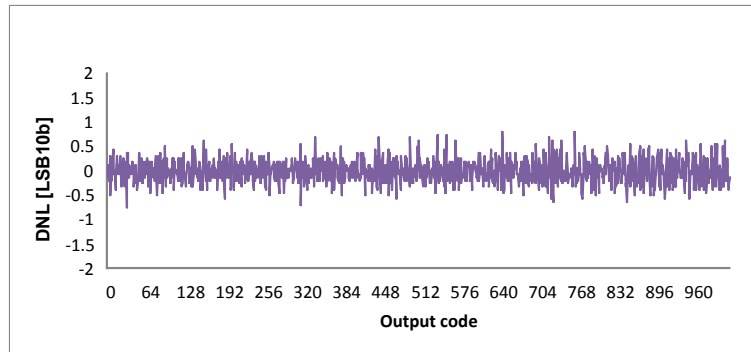


Figure 109: ADC DNL vs Output Code

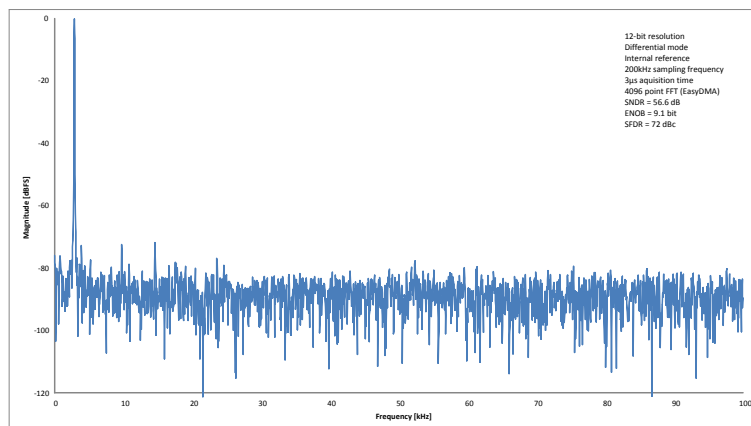


Figure 110: FFT of a 2.8 kHz sine at 200 ksps ()

## 37.13 Performance factors

Clock jitter, affecting sample timing accuracy, and circuit noise can affect ADC performance.


Jitter can be between START tasks or from START task to acquisition. START timer accuracy and startup times of regulators and references will contribute to variability. Sources of circuit noise may include CPU activity and the DC/DC regulator. Best ADC performance is achieved using START timing based on the TIMER module, HFXO clock source, and Constant Latency mode.

## 38 COMP — Comparator

The comparator (COMP) compares an input voltage (VIN+) against a second input voltage (VIN-). VIN+ can be derived from an analog input pin (AIN0-AIN7). VIN- can be derived from multiple sources depending on the operation mode of the comparator.

Main features of the comparator are:

- Input range from 0 V to VDD
- Single-ended mode
  - Fully flexible hysteresis using a 64-level reference ladder
- Differential mode
  - Configurable 50 mV hysteresis
- Reference inputs (VREF):
  - VDD
  - External reference from AIN0 to AIN7 (between 0 V and VDD)
  - Internal references 1.2 V, 1.8 V and 2.4 V
- Three speed/power consumption modes: low-power, normal and high-speed
- Single-pin capacitive sensor support
- Event generation on output changes
  - UP event on VIN- > VIN+
  - DOWN event on VIN- < VIN+
  - CROSS event on VIN+ and VIN- crossing
  - READY event on core and internal reference (if used) ready

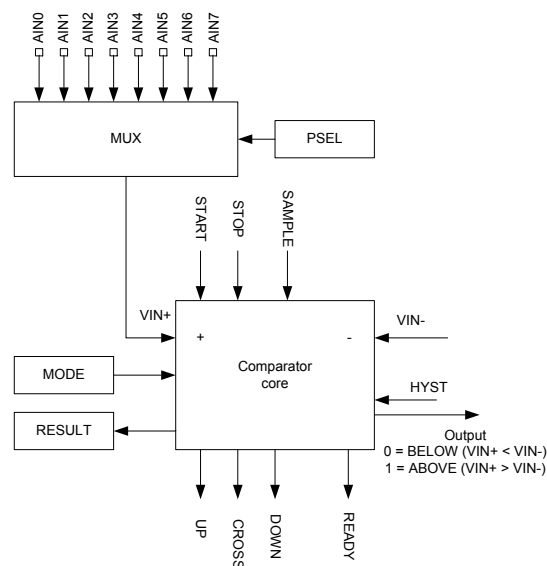

**Figure 111: Comparator overview**

Once enabled (using the [ENABLE](#) register), the comparator is started by triggering the START task and stopped by triggering the STOP task. After a start-up time of  $t_{COMP,START}$ , the comparator will generate a READY event to indicate that it is ready for use and that its output is correct. When the COMP module is started, events will be generated every time VIN+ crosses VIN-.

## 38 Operation modes

The comparator can be configured to operate in two main operation modes, differential mode and single-ended mode. See the [MODE](#) register for more information. In both operation modes, the comparator can operate in different speed and power consumption modes (low-power, normal and high-speed). High-speed mode will consume more power compared to low-power mode, and low-power mode will result in slower response time compared to high-speed mode.

Use the [PSEL](#) register to select any of the AIN0-AIN7 pins as VIN+ input, regardless of the operation mode selected for the comparator. The source of VIN- depends on which operation mode is used:

- Differential mode: Derived directly from AIN0 to AIN7
- Single-ended mode: Derived from VREF. VREF can be derived from VDD, AIN0-AIN7 or internal 1.2 V, 1.8 V and 2.4 V references.

The selected analog pins will be acquired by the comparator once it is enabled.

An optional hysteresis on VIN+ and VIN- can be enabled when the module is used in differential mode through the [HYST](#) register. In single-ended mode, VUP and VDOWN thresholds can be set to implement a hysteresis using the reference ladder (see [Figure 114: Comparator in single-ended mode](#) on page 399). This hysteresis is in the order of magnitude of 50 mV, and shall prevent noise on the signal to create unwanted events. See [Figure 115: Hysteresis example where VIN+ starts below VUP](#) on page 399 for illustration of the effect of an active hysteresis on a noisy input signal.

An upward crossing will generate an UP event and a downward crossing will generate a DOWN event. The CROSS event will be generated every time there is a crossing, independent of direction.


The immediate value of the comparator can be sampled to [RESULT](#) register by triggering the SAMPLE task.

### 38.1 Differential mode

In differential mode, the reference input VIN- is derived directly from one of the AINx pins.

Before enabling the comparator via the [ENABLE](#) register, the following registers must be configured for the differential mode:


- [PSEL](#)
- [MODE](#)
- [EXTREFSEL](#)

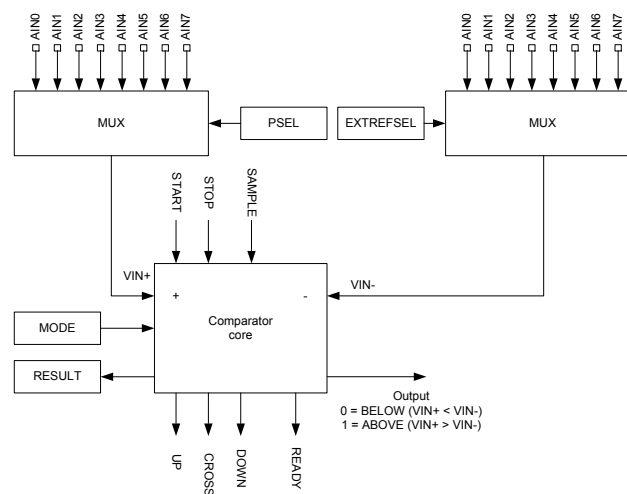

**Figure 112: Comparator in differential mode**

**Restriction:** Depending on the device, not all the analog inputs may be available for each MUX. See definitions for [PSEL](#) and [EXTREFSEL](#) for more information about which analog pins are available on a particular device.

When [HYST](#) register is turned on while in this mode, the output of the comparator (and associated events) will change from ABOVE to BELOW whenever  $V_{IN+}$  becomes lower than  $V_{IN-} - (V_{DIFFHYST} / 2)$ . It will also change from BELOW to ABOVE whenever  $V_{IN+}$  becomes higher than  $V_{IN-} + (V_{DIFFHYST} / 2)$ . This behavior is illustrated in [Figure 113: Hysteresis enabled in differential mode](#) on page 398.

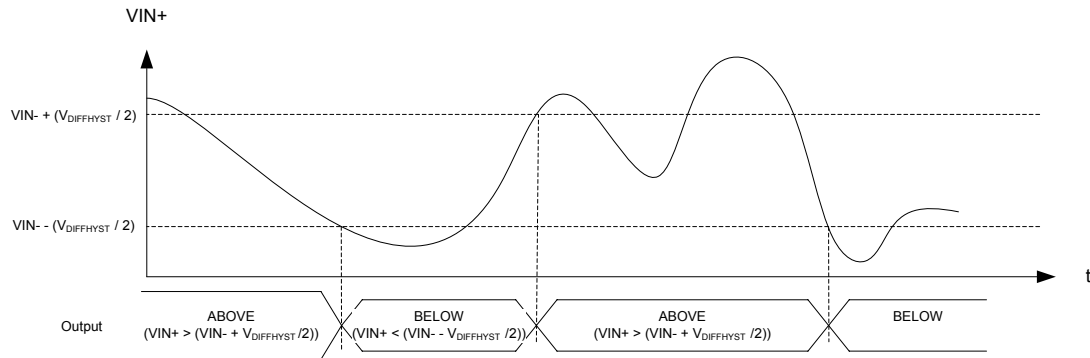

**Figure 113: Hysteresis enabled in differential mode**


## 38.2 Single-ended mode

In single-ended mode,  $V_{IN-}$  is derived from the reference ladder.

Before enabling the comparator via the [ENABLE](#) register, the following registers must be configured for the single-ended mode:

- [PSEL](#)
- [MODE](#)
- [REFSEL](#)
- [EXTREFSEL](#)
- [TH](#)

The reference ladder uses the reference voltage ( $V_{REF}$ ) to derive two new voltage references,  $V_{UP}$  and  $V_{DOWN}$ .  $V_{UP}$  and  $V_{DOWN}$  are configured using  $TH_{UP}$  and  $TH_{DOWN}$  respectively in the [TH](#) register.  $V_{REF}$  can be derived from any of the available reference sources, configured using the [EXTREFSEL](#) and [REFSEL](#) registers as illustrated in [Figure 114: Comparator in single-ended mode](#) on page 399. When  $A_{REF}$  is selected in the [REFSEL](#) register, the [EXTREFSEL](#) register is used to select one of the  $A_{IN0}$ - $A_{IN7}$  analog input pins as reference input. The selected analog pins will be acquired by the comparator once it is enabled.

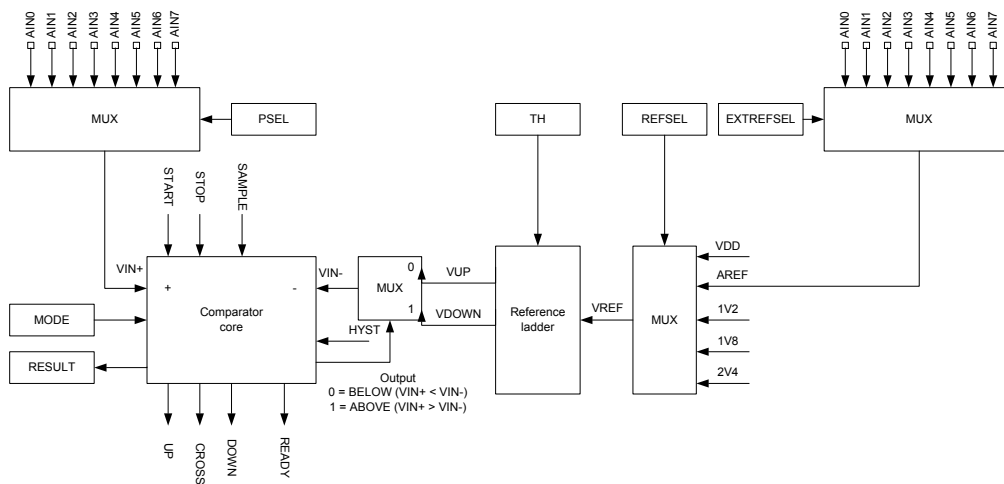


**Figure 114: Comparator in single-ended mode**

**Restriction:** Depending on the device, not all the analog inputs may be available for each MUX. See definitions for [PSEL](#) and [EXTREFSEL](#) for more information about which analog pins are available on a particular device.

When the comparator core detects that  $VIN+ > VIN-$ , i.e. ABOVE as per the [RESULT](#) register,  $VIN-$  will switch to  $VDOWN$ . When  $VIN+$  falls below  $VIN-$  again,  $VIN-$  will be switched back to  $VUP$ . By specifying  $VUP$  larger than  $VDOWN$ , a hysteresis can be generated as illustrated in [Figure 115: Hysteresis example where  \$VIN+\$  starts below  \$VUP\$](#)  on page 399 and [Figure 116: Hysteresis example where  \$VIN+\$  starts above  \$VUP\$](#)  on page 400.

Writing to [HYST](#) has no effect in single-ended mode, and the content of this register is ignored.

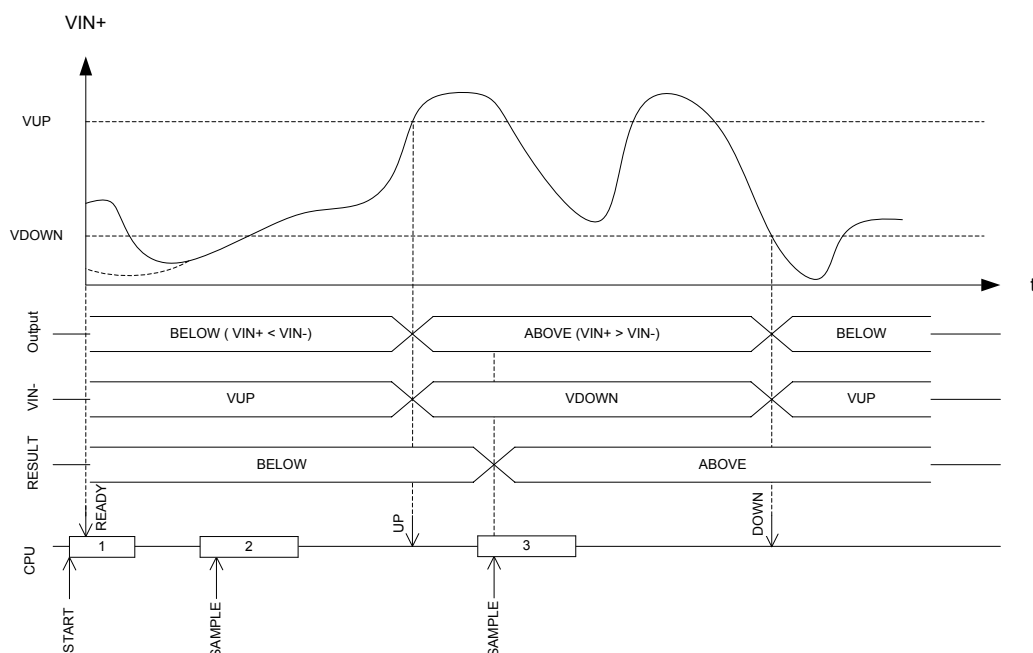

**Figure 115: Hysteresis example where  $VIN+$  starts below  $VUP$**

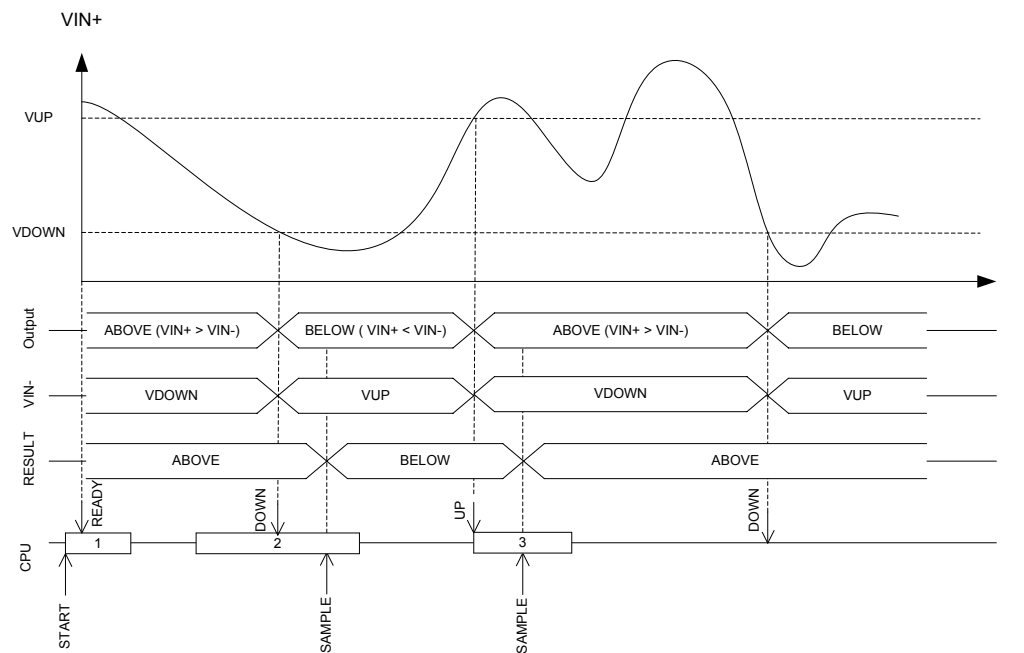


Figure 116: Hysteresis example where VIN+ starts above VUP

## 38.3 Registers

Table 94: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40013000	COMP	COMP	General purpose comparator	

Table 95: Register Overview

Register	Offset	Description
TASKS_START	0x000	Start comparator
TASKS_STOP	0x004	Stop comparator
TASKS_SAMPLE	0x008	Sample comparator value
EVENTS_READY	0x100	COMP is ready and output is valid
EVENTS_DOWN	0x104	Downward crossing
EVENTS_UP	0x108	Upward crossing
EVENTS_CROSS	0x10C	Downward or upward crossing
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
RESULT	0x400	Compare result
ENABLE	0x500	COMP enable
PSEL	0x504	Pin select
REFSEL	0x508	Reference source select for single-ended mode
EXTREFSEL	0x50C	External reference select
TH	0x530	Threshold configuration for hysteresis unit
MODE	0x534	Mode configuration
HYST	0x538	Comparator hysteresis enable
ISOURCE	0x53C	Current source select on analog input

### 38.3.1 SHORTS

Address offset: 0x200



## Shortcut register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																			E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	READY_SAMPLE				Shortcut between READY event and SAMPLE task																																	
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_SAMPLE</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
B	RW	READY_STOP				Shortcut between READY event and STOP task																																	
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
C	RW	DOWN_STOP				Shortcut between DOWN event and STOP task																																	
						See <a href="#">EVENTS_DOWN</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
D	RW	UP_STOP				Shortcut between UP event and STOP task																																	
						See <a href="#">EVENTS_UP</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
E	RW	CROSS_STOP				Shortcut between CROSS event and STOP task																																	
						See <a href="#">EVENTS_CROSS</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	

## 38.3.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	READY				Enable or disable interrupt for READY event																																	
						See <a href="#">EVENTS_READY</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
B	RW	DOWN				Enable or disable interrupt for DOWN event																																	
						See <a href="#">EVENTS_DOWN</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
C	RW	UP				Enable or disable interrupt for UP event																																	
						See <a href="#">EVENTS_UP</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
D	RW	CROSS				Enable or disable interrupt for CROSS event																																	
						See <a href="#">EVENTS_CROSS</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	

## 38.3.3 INTENSET

Address offset: 0x304

## Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																		D	C	B	A
Reset 0x00000000				0										0										0										0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	READY				Write '1' to Enable interrupt for READY event																															
						See <a href="#">EVENTS_READY</a>																															
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
B	RW	DOWN				Write '1' to Enable interrupt for DOWN event																															
						See <a href="#">EVENTS_DOWN</a>																															
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
C	RW	UP				Write '1' to Enable interrupt for UP event																															
						See <a href="#">EVENTS_UP</a>																															
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
D	RW	CROSS				Write '1' to Enable interrupt for CROSS event																															
						See <a href="#">EVENTS_CROSS</a>																															
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																

## 38.3.4 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				D	C	B	A
Reset 0x00000000				0 0																																			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	READY				Write '1' to Disable interrupt for READY event																																	
						See <a href="#">EVENTS_READY</a>																																	
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
		Enabled	1	Read: Enabled																																			
B	RW	DOWN				Write '1' to Disable interrupt for DOWN event																																	
						See <a href="#">EVENTS_DOWN</a>																																	
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
		Enabled	1	Read: Enabled																																			
C	RW	UP				Write '1' to Disable interrupt for UP event																																	
						See <a href="#">EVENTS_UP</a>																																	
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
		Enabled	1	Read: Enabled																																			
D	RW	CROSS				Write '1' to Disable interrupt for CROSS event																																	
						See <a href="#">EVENTS_CROSS</a>																																	
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
		Enabled	1	Read: Enabled																																			



### 38.3.9 EXTREFSEL

Address offset: 0x50C

External reference select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	EXTREFSEL			External analog reference select																														
			AnalogReference0	0	Use AIN0 as external analog reference																														
			AnalogReference1	1	Use AIN1 as external analog reference																														
			AnalogReference2	2	Use AIN2 as external analog reference																														
			AnalogReference3	3	Use AIN3 as external analog reference																														
			AnalogReference4	4	Use AIN4 as external analog reference																														
			AnalogReference5	5	Use AIN5 as external analog reference																														
			AnalogReference6	6	Use AIN6 as external analog reference																														
			AnalogReference7	7	Use AIN7 as external analog reference																														

### 38.3.10 TH

Address offset: 0x530

Threshold configuration for hysteresis unit

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				B B B B B A A A A A A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	THDOWN		[63:0]	VDOWN = (THDOWN+1)/64*VREF																														
B	RW	THUP		[63:0]	VUP = (THUP+1)/64*VREF																														

### 38.3.11 MODE

Address offset: 0x534

Mode configuration

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																					
Id																																B						A		A	
Reset 0x00000000				0 0																																					
Id	RW	Field	Value Id	Value	Description																																				
A	RW	SP			Speed and power modes																																				
			Low	0	Low-power mode																																				
			Normal	1	Normal mode																																				
			High	2	High-speed mode																																				
B	RW	MAIN			Main operation modes																																				
			SE	0	Single-ended mode																																				
			Diff	1	Differential mode																																				

### 38.3.12 HYST

Address offset: 0x538

Comparator hysteresis enable

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	HYST			Comparator hysteresis																														
			NoHyst	0	Comparator hysteresis disabled																														
			Hyst50mV	1	Comparator hysteresis enabled																														

### 38.3.13 ISOURCE

Address offset: 0x53C

Current source select on analog input

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																			A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	ISOURCE			Comparator hysteresis																															
			Off	0	Current source disabled																															
			Ien2mA5	1	Current source enabled (+/- 2.5 uA)																															
			Ien5mA	2	Current source enabled (+/- 5 uA)																															
			Ien10mA	3	Current source enabled (+/- 10 uA)																															

## 38.4 Electrical specification

### 38.4.1 COMP Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{COMP,LP}$	Core run current in low power mode		2		$\mu A$
$I_{COMP,N}$	Core run current in normal mode		5		$\mu A$
$I_{COMP,HS}$	Core run current in high-speed mode		10		$\mu A$
$t_{PROPDLY,LP}$	Propagation delay, low-power mode <sup>a</sup>		0.6		$\mu S$
$t_{PROPDLY,N}$	Propagation delay, normal mode <sup>a</sup>		0.2		$\mu S$
$t_{PROPDLY,HS}$	Propagation delay, high-speed mode <sup>a</sup>		0.1		$\mu S$
$V_{DIFFHYST}$	Optional hysteresis applied to differential input		30		mV
$V_{VDD-VREF}$	Required difference between VDD and a selected VREF, $V_{DD} > V_{REF}$	0.3			V
$I_{INT\_REF}$	Current used by the internal bandgap reference when selected as source for VREF		13		$\mu A$
$t_{INT\_REF,START}$	Startup time for the internal bandgap reference		50	80	$\mu S$
$E_{INT\_REF}$	Internal bandgap reference error	-3		3	%
$R_{LADDER}$	Reference ladder resistance, $I_{LADDER} = V_{REF} / R_{LADDER}$		550		k $\Omega$
$V_{INPUTOFFSET}$	Input offset	-10		10	mV
$D_{NLLADDER}$	Differential non-linearity of reference ladder		<0.1		LSB
$t_{COMP,START}$	Startup time for the comparator core		3		$\mu S$

Total comparator run current must be calculated from the  $I_{COMP}$ ,  $I_{INT\_REF}$ , and  $I_{LADDER}$  values for a given reference voltage.

<sup>a</sup> Propagation delay is with 10 mV overdrive.

## 39 LPCOMP — Low power comparator


LPCOMP compares an input voltage against a reference voltage.

Listed here are the main features of LPCOMP:

- 0 - VDD input range
- Ultra low power
- Eight input options (AIN0 to AIN7)
- Reference voltage options:
  - Two external analog reference inputs, or
  - 15-level internal reference ladder (VDD/16)
- Optional hysteresis enable on input
- Wakeup source from OFF mode

In System ON, the LPCOMP can generate separate events on rising and falling edges of a signal, or sample the current state of the pin as being above or below the selected reference. The block can be configured to use any of the analog inputs on the device. Additionally, the low power comparator can be used as an analog wakeup source from System OFF or System ON. The comparator threshold can be programmed to a range of fractions of the supply voltage.

**Restriction:** LPCOMP cannot be used (STARTed) at the same time as COMP. Only one comparator can be used at a time.

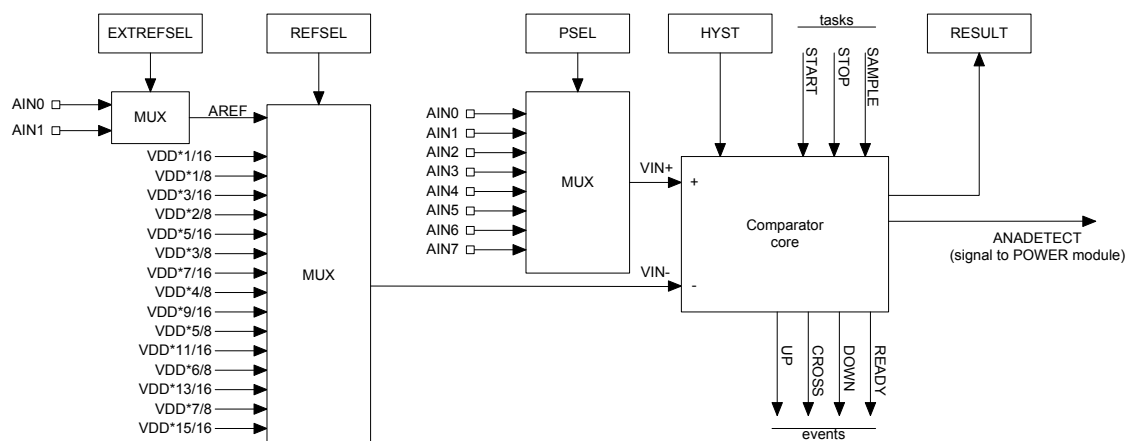

**Figure 117: Low power comparator**

The wakeup comparator (LPCOMP) compares an input voltage (VIN+), which comes from an analog input pin selected via the PSEL register against a reference voltage (VIN-) selected via the [REFSEL](#) on page 411 and [EXTREFSEL](#) registers.


The [PSEL](#), [REFSEL](#), and [EXTREFSEL](#) registers must be configured before the LPCOMP is enabled through the [ENABLE](#) register.

The [HYST](#) register allows enabling an optional hysteresis in the comparator core. This hysteresis is in the order of magnitude of 50 mV, and shall prevent noise on the signal to create unwanted events. See [Figure 118: Effect of hysteresis on a noisy input signal](#) on page 407 for illustration of the effect of an active hysteresis on a noisy input signal. It is disabled by default, and shall be configured before enabling LPCOMP as well.

The LPCOMP is started by triggering the START task. After a start-up time of  $t_{LPCOMP,STARTUP}$  the LPCOMP will generate a READY event to indicate that the comparator is ready to use and the output of the LPCOMP is correct. The LPCOMP will generate events every time VIN+ crosses VIN-. More specifically, every time VIN+ rises above VIN- (upward crossing) an UP event is generated along with a CROSS event. Every time VIN+ falls below VIN- (downward crossing), a DOWN event is generated along with a CROSS event. When

hysteresis is enabled, the upward crossing level becomes  $(V_{IN-} + V_{HYST}/2)$ , and the downward crossing level becomes  $(V_{IN-} - V_{HYST}/2)$ .

The LPCOMP is stopped by triggering the STOP task.

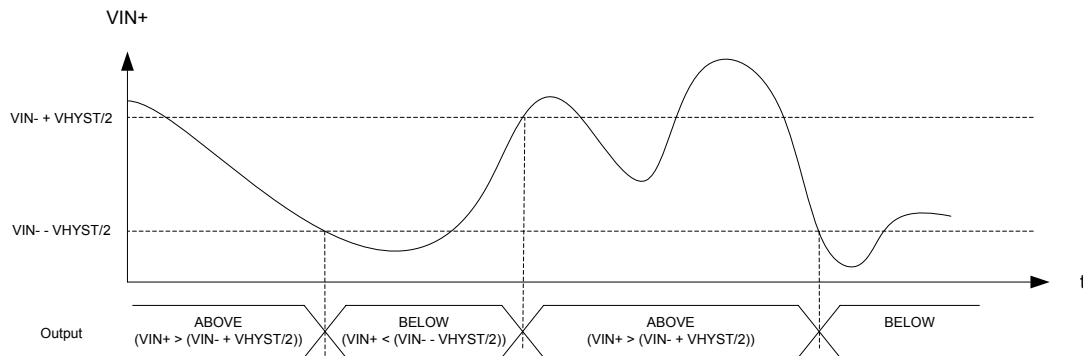

**Figure 118: Effect of hysteresis on a noisy input signal**

LPCOMP will be operational in both System ON and System OFF mode when it is enabled through the ENABLE register. See [POWER — Power supply](#) on page 81 for more information about power modes. Note that it is not allowed to go to System OFF when a READY event is pending to be generated.

All LPCOMP registers, including [ENABLE](#), are classified as retained registers when the LPCOMP is enabled. However, when the device wakes up from System OFF, all LPCOMP registers will be reset.

The LPCOMP can wake up the system from System OFF by asserting the ANADETECT signal. The ANADETECT signal can be derived from any of the event sources that generate the UP, DOWN and CROSS events. In case of wakeup from System OFF, no events will be generated, only the ANADETECT signal. See the ANADETECT register ([ANADETECT](#) on page 411) for more information on how to configure the ANADETECT signal.

The immediate value of the LPCOMP can be sampled to [RESULT](#) on page 410 by triggering the SAMPLE task.

See [RESETREAS](#) on page 88 for more information on how to detect a wakeup from LPCOMP.

## 39.1 Shared resources

The LPCOMP shares resources with other peripherals.

The LPCOMP shares analog resources with SAADC and COMP. While it is possible to use SAADC at the same time as COMP or LPCOMP, COMP and LPCOMP are mutually exclusive: enabling one will automatically disable the other. In addition, when using SAADC and COMP or LPCOMP simultaneously, it is not possible to select the same analog input pin for both modules.

The LPCOMP peripheral shall not be disabled (by writing to the ENABLE register) before the peripheral has been stopped. Failing to do so may result in unpredictable behaviour.

## 39.2 Pin configuration

You can use the LPCOMP.PSEL register to select one of the analog input pins, AIN0 through AIN7, as the analog input pin for the LPCOMP.

See [GPIO — General purpose input/output](#) on page 114 for more information about the pins. Similarly, you can use [EXTREFSEL](#) on page 411 to select one of the analog reference input pins, AIN0 and AIN1, as input for AREF in case AREF is selected in [EXTREFSEL](#) on page 411. The selected analog pins will be acquired by the LPCOMP when it is enabled through [ENABLE](#) on page 410.

## 39.3 Registers

**Table 96: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40013000	LPCOMP	LPCOMP	Low power comparator	

**Table 97: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start comparator
TASKS_STOP	0x004	Stop comparator
TASKS_SAMPLE	0x008	Sample comparator value
EVENTS_READY	0x100	LPCOMP is ready and output is valid
EVENTS_DOWN	0x104	Downward crossing
EVENTS_UP	0x108	Upward crossing
EVENTS_CROSS	0x10C	Downward or upward crossing
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
RESULT	0x400	Compare result
ENABLE	0x500	Enable LPCOMP
PSEL	0x504	Input pin select
REFSEL	0x508	Reference select
EXTREFSEL	0x50C	External reference select
ANADETECT	0x520	Analog detect configuration
HYST	0x538	Comparator hysteresis enable

### 39.3.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																			E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	READY_SAMPLE			Shortcut between READY event and SAMPLE task																																		
					See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_SAMPLE</a>																																		
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
B	RW	READY_STOP			Shortcut between READY event and STOP task																																		
					See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_STOP</a>																																		
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
C	RW	DOWN_STOP			Shortcut between DOWN event and STOP task																																		
					See <a href="#">EVENTS_DOWN</a> and <a href="#">TASKS_STOP</a>																																		
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
D	RW	UP_STOP			Shortcut between UP event and STOP task																																		
					See <a href="#">EVENTS_UP</a> and <a href="#">TASKS_STOP</a>																																		
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
E	RW	CROSS_STOP			Shortcut between CROSS event and STOP task																																		
					See <a href="#">EVENTS_CROSS</a> and <a href="#">TASKS_STOP</a>																																		
			Disabled	0	Disable shortcut																																		



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
Id																													E					D					C					B					A				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0															
Id	RW	Field	Value	Id	Value																								Description																								
			Enabled	1																									Enable shortcut																								

### 39.3.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Write '1' to Enable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
B	RW	DOWN				Write '1' to Enable interrupt for DOWN event																													
						See <a href="#">EVENTS_DOWN</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	UP				Write '1' to Enable interrupt for UP event																													
						See <a href="#">EVENTS_UP</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
D	RW	CROSS				Write '1' to Enable interrupt for CROSS event																													
						See <a href="#">EVENTS_CROSS</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

### 39.3.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Write '1' to Disable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	DOWN				Write '1' to Disable interrupt for DOWN event																													
						See <a href="#">EVENTS_DOWN</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	UP				Write '1' to Disable interrupt for UP event																													
						See <a href="#">EVENTS_UP</a>																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	CROSS			Write '1' to Disable interrupt for CROSS event																														
					See <a href="#">EVENTS_CROSS</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 39.3.4 RESULT

Address offset: 0x400

Compare result

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	R	RESULT				Result of last compare. Decision point SAMPLE task.																																
			Bellow	0		Input voltage is below the reference threshold (VIN+ < VIN-). <span>Deprecated</span>																																
			Below	0		Input voltage is below the reference threshold (VIN+ < VIN-).																																
			Above	1		Input voltage is above the reference threshold (VIN+ > VIN-).																																

### 39.3.5 ENABLE

Address offset: 0x500

Enable LPCOMP

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable LPCOMP																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													

### 39.3.6 PSEL

Address offset: 0x504

Input pin select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PSEL				Analog pin select																													
			AnalogInput0	0		AIN0 selected as analog input																													
			AnalogInput1	1		AIN1 selected as analog input																													
			AnalogInput2	2		AIN2 selected as analog input																													
			AnalogInput3	3		AIN3 selected as analog input																													
			AnalogInput4	4		AIN4 selected as analog input																													
			AnalogInput5	5		AIN5 selected as analog input																													
			AnalogInput6	6		AIN6 selected as analog input																													
			AnalogInput7	7		AIN7 selected as analog input																													

### 39.3.7 REFSEL

Address offset: 0x508

Reference select

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A A A																															
Reset 0x00000004					0 0																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	REFSEL			Reference select																															
			Ref1_8Vdd	0	VDD * 1/8 selected as reference																															
			Ref2_8Vdd	1	VDD * 2/8 selected as reference																															
			Ref3_8Vdd	2	VDD * 3/8 selected as reference																															
			Ref4_8Vdd	3	VDD * 4/8 selected as reference																															
			Ref5_8Vdd	4	VDD * 5/8 selected as reference																															
			Ref6_8Vdd	5	VDD * 6/8 selected as reference																															
			Ref7_8Vdd	6	VDD * 7/8 selected as reference																															
			ARef	7	External analog reference selected																															
			Ref1_16Vdd	8	VDD * 1/16 selected as reference																															
			Ref3_16Vdd	9	VDD * 3/16 selected as reference																															
			Ref5_16Vdd	10	VDD * 5/16 selected as reference																															
			Ref7_16Vdd	11	VDD * 7/16 selected as reference																															
			Ref9_16Vdd	12	VDD * 9/16 selected as reference																															
			Ref11_16Vdd	13	VDD * 11/16 selected as reference																															
			Ref13_16Vdd	14	VDD * 13/16 selected as reference																															
			Ref15_16Vdd	15	VDD * 15/16 selected as reference																															

### 39.3.8 EXTREFSEL

Address offset: 0x50C

External reference select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	EXTREFSEL			External analog reference select																														
			AnalogReference0	0	Use AIN0 as external analog reference																														
			AnalogReference1	1	Use AIN1 as external analog reference																														

### 39.3.9 ANADETECT

Address offset: 0x520

Analog detect configuration

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				A A	
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value	Description																																
A	RW	ANADETECT			Analog detect configuration																																
			Cross	0	Generate ANADETECT on crossing, both upward crossing and downward crossing																																
			Up	1	Generate ANADETECT on upward crossing only																																
			Down	2	Generate ANADETECT on downward crossing only																																

### 39.3.10 HYST

Address offset: 0x538

Comparator hysteresis enable

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	HYST			Comparator hysteresis enable																															
			NoHyst	0	Comparator hysteresis disabled																															
			Hyst50mV	1	Comparator hysteresis disabled (typ. 50 mV)																															

## 39.4 Electrical specification

### 39.4.1 LPCOMP Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{LPC}$	Run current for low power comparator		0.5		$\mu A$
$t_{LPCANADET}$	Time from VIN crossing ( $\geq 50mV$ above threshold) to ANADETECT signal generated.		5		$\mu s$
$E_{REFLADDER}$	Error in reference ladder threshold voltage	-30		30	mV
$V_{HYST}$	Optional hysteresis		30		mV

## 40 WDT — Watchdog timer

A countdown watchdog timer using the low-frequency clock source (LFCLK) offers configurable and robust protection against application lock-up.

The watchdog timer is started by triggering the START task.

The watchdog can be paused during long CPU sleep periods for low power applications and when the debugger has halted the CPU. The watchdog is implemented as a down-counter that generates a TIMEOUT event when it wraps over after counting down to 0. When the watchdog timer is started through the START task, the watchdog counter is loaded with the value specified in the CRV register. This counter is also reloaded with the value specified in the CRV register when a reload request is granted.

The watchdog's timeout period is given by:

$$\text{timeout [s]} = ( \text{CRV} + 1 ) / 32768$$

When started, the watchdog will automatically force the 32.768 kHz RC oscillator on as long as no other 32.768 kHz clock source is running and generating the 32.768 kHz system clock, see chapter [CLOCK — Clock control](#) on page 104.

### 40.1 Reload criteria

The watchdog has eight separate reload request registers, which shall be used to request the watchdog to reload its counter with the value specified in the CRV register. To reload the watchdog counter, the special value 0x6E524635 needs to be written to all enabled reload registers.

One or more RR registers can be individually enabled through the RREN register.

### 40.2 Temporarily pausing the watchdog

By default, the watchdog will be active counting down the down-counter while the CPU is sleeping and when it is halted by the debugger. It is however possible to configure the watchdog to automatically pause while the CPU is sleeping as well as when it is halted by the debugger.

### 40.3 Watchdog reset

A TIMEOUT event will automatically lead to a watchdog reset.

See [Reset](#) on page 85 for more information about reset sources. If the watchdog is configured to generate an interrupt on the TIMEOUT event, the watchdog reset will be postponed with two 32.768 kHz clock cycles after the TIMEOUT event has been generated. Once the TIMEOUT event has been generated, the impending watchdog reset will always be effectuated.

The watchdog must be configured before it is started. After it is started, the watchdog's configuration registers, which comprise registers CRV, RREN, and CONFIG, will be blocked for further configuration.

The watchdog can be reset from several reset sources, see [Reset behavior](#) on page 86.

When the device starts running again, after a reset, or waking up from OFF mode, the watchdog configuration registers will be available for configuration again.

## 40.4 Registers

**Table 98: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40010000	WDT	WDT	Watchdog timer	

**Table 99: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start the watchdog
EVENTS_TIMEOUT	0x100	Watchdog timeout
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">RUNSTATUS</a>	0x400	Run status
<a href="#">REQSTATUS</a>	0x404	Request status
<a href="#">CRV</a>	0x504	Counter reload value
<a href="#">RREN</a>	0x508	Enable register for reload request registers
<a href="#">CONFIG</a>	0x50C	Configuration register
<a href="#">RR[0]</a>	0x600	Reload request 0
<a href="#">RR[1]</a>	0x604	Reload request 1
<a href="#">RR[2]</a>	0x608	Reload request 2
<a href="#">RR[3]</a>	0x60C	Reload request 3
<a href="#">RR[4]</a>	0x610	Reload request 4
<a href="#">RR[5]</a>	0x614	Reload request 5
<a href="#">RR[6]</a>	0x618	Reload request 6
<a href="#">RR[7]</a>	0x61C	Reload request 7

### 40.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A																																
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																														
A	RW	TIMEOUT					Write '1' to Enable interrupt for TIMEOUT event																														
							See <a href="#">EVENTS_TIMEOUT</a>																														
		Set	1				Enable																														
		Disabled	0				Read: Disabled																														
		Enabled	1				Read: Enabled																														

### 40.4.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A																																
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	TIMEOUT				Write '1' to Disable interrupt for TIMEOUT event																															
						See <a href="#">EVENTS_TIMEOUT</a>																															
		Clear	1			Disable																															
		Disabled	0			Read: Disabled																															
		Enabled	1			Read: Enabled																															

### 40.4.3 RUNSTATUS

Address offset: 0x400

Run status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A																															
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	RUNSTATUS			Indicates whether or not the watchdog is running																														
			NotRunning	0	Watchdog not running																														
			Running	1	Watchdog is running																														

### 40.4.4 REQSTATUS

Address offset: 0x404

Request status

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					H G F E D C B A																																
Reset 0x00000001					0 1																																
Id	RW	Field	Value Id	Value	Description																																
A	R	RR0			Request status for RR[0] register																																
			DisabledOrRequested	0	RR[0] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[0] register is enabled, and are not yet requesting reload																																
B	R	RR1			Request status for RR[1] register																																
			DisabledOrRequested	0	RR[1] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[1] register is enabled, and are not yet requesting reload																																
C	R	RR2			Request status for RR[2] register																																
			DisabledOrRequested	0	RR[2] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[2] register is enabled, and are not yet requesting reload																																
D	R	RR3			Request status for RR[3] register																																
			DisabledOrRequested	0	RR[3] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[3] register is enabled, and are not yet requesting reload																																
E	R	RR4			Request status for RR[4] register																																
			DisabledOrRequested	0	RR[4] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[4] register is enabled, and are not yet requesting reload																																
F	R	RR5			Request status for RR[5] register																																
			DisabledOrRequested	0	RR[5] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[5] register is enabled, and are not yet requesting reload																																
G	R	RR6			Request status for RR[6] register																																
			DisabledOrRequested	0	RR[6] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[6] register is enabled, and are not yet requesting reload																																
H	R	RR7			Request status for RR[7] register																																
			DisabledOrRequested	0	RR[7] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[7] register is enabled, and are not yet requesting reload																																

### 40.4.5 CRV

Address offset: 0x504

Counter reload value

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CRV		[0x0000000F..0xFFFFFFFF]	Counter reload value in number of cycles of the 32.768 kHz clock																																	

#### 40.4.6 RREN

Address offset: 0x508

### Enable register for reload request registers

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value		Description																												
A	RW	RR0					Enable or disable RR[0] register																												
			Disabled	0	Disable RR[0] register																														
			Enabled	1	Enable RR[0] register																														
B	RW	RR1					Enable or disable RR[1] register																												
			Disabled	0	Disable RR[1] register																														
			Enabled	1	Enable RR[1] register																														
C	RW	RR2					Enable or disable RR[2] register																												
			Disabled	0	Disable RR[2] register																														
			Enabled	1	Enable RR[2] register																														
D	RW	RR3					Enable or disable RR[3] register																												
			Disabled	0	Disable RR[3] register																														
			Enabled	1	Enable RR[3] register																														
E	RW	RR4					Enable or disable RR[4] register																												
			Disabled	0	Disable RR[4] register																														
			Enabled	1	Enable RR[4] register																														
F	RW	RR5					Enable or disable RR[5] register																												
			Disabled	0	Disable RR[5] register																														
			Enabled	1	Enable RR[5] register																														
G	RW	RR6					Enable or disable RR[6] register																												
			Disabled	0	Disable RR[6] register																														
			Enabled	1	Enable RR[6] register																														
H	RW	RR7					Enable or disable RR[7] register																												
			Disabled	0	Disable RR[7] register																														
			Enabled	1	Enable RR[7] register																														

#### 40.4.7 CONFIG

Address offset: 0x50C

## Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000001				0 0																															

#### 40.4.8 RR[0]

Address offset: 0x600

Reload request 0



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																
A	W	RR																	Reload request register																
			Reload	0x6E524635															Value to request a reload of the watchdog timer																

### 40.4.9 RR[1]

Address offset: 0x604

Reload request 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																
A	W	RR																	Reload request register																
			Reload	0x6E524635															Value to request a reload of the watchdog timer																

### 40.4.10 RR[2]

Address offset: 0x608

Reload request 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	W	RR			Reload request register																														
			Reload	0x6E524635	Value to request a reload of the watchdog timer																														

### 40.4.11 RR[3]

Address offset: 0x60C

Reload request 3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																																
A	W	RR				Reload request register																																
			Reload	0x6E524635		Value to request a reload of the watchdog timer																																

### 40.4.12 RR[4]

Address offset: 0x610

Reload request 4

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																
A	W	RR																	Reload request register																
			Reload	0x6E524635															Value to request a reload of the watchdog timer																

### 40.4.13 RR[5]

Address offset: 0x614

Reload request 5

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

#### 40.4.14 RR[6]

Address offset: 0x618

Reload request 6

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

#### 40.4.15 RR[7]

Address offset: 0x61C

Reload request 7

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

## 40.5 Electrical specification

### 40.5.1 Watchdog Timer Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{WDT}$	Run current for watchdog timer		0.3	2	$\mu A$
$t_{WDT}$	Time out interval	458 $\mu s$		36 h	

## 41 SWI — Software interrupts

A set of interrupts have been reserved for use as software interrupts.

### 41.1 Registers

**Table 100: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40014000	SWI	SWI0	Software interrupt 0	
0x40015000	SWI	SWI1	Software interrupt 1	
0x40016000	SWI	SWI2	Software interrupt 2	
0x40017000	SWI	SWI3	Software interrupt 3	
0x40018000	SWI	SWI4	Software interrupt 4	
0x40019000	SWI	SWI5	Software interrupt 5	

## 42 NFCT — Near field communication tag

The NFCT peripheral (referred to as the 'NFC peripheral' from now on) supports communication signal interface type A and 106 kbps bit rate from the NFC Forum.


With appropriate software, the NFC peripheral can be used to emulate the listening device NFC-A as specified by the NFC Forum.

Listed here are the main features for the NFC peripheral:

- NFC-A listen mode operation
  - 13.56 MHz input frequency
  - Bit rate 106 kbps
- Wake-on-field low power field detection (SENSE) mode
- Frame assemble and disassemble for the NFC-A frames specified by the NFC Forum
- Programmable frame timing controller
- Integrated automatic collision resolution, CRC and parity functions

### 42.1 Overview

The NFC peripheral is an implementation of an NFC Forum compliant listening device NFC-A.

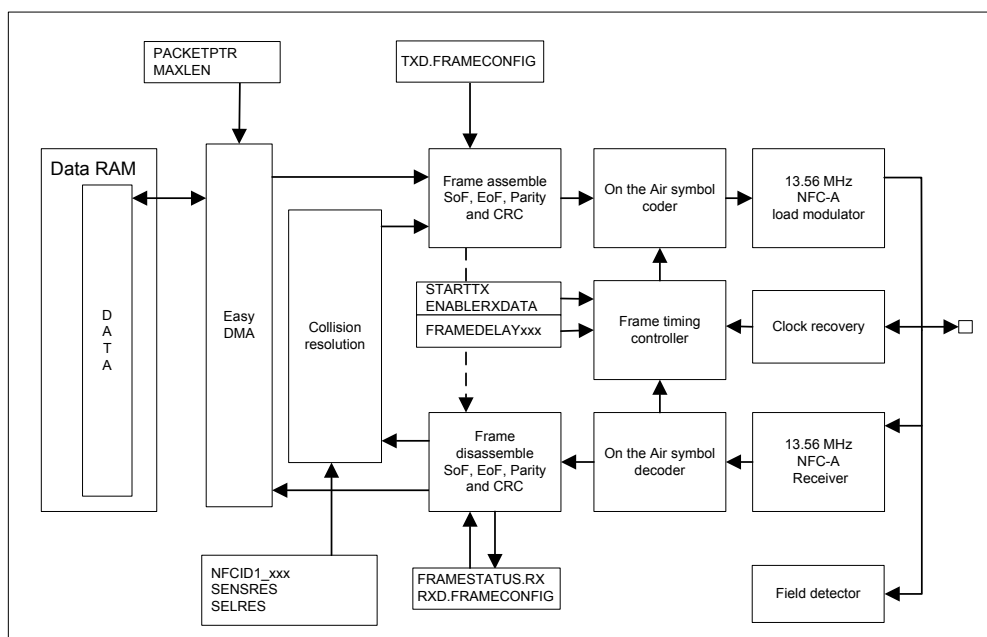

**Figure 119: NFC block diagram**

The NFC peripheral contains a 13.56 MHz AM receiver and a 13.56 MHz load modulator compatible with the NFC-A technology defined in the NFC Forum with 106 kbps data rate.

The received frames will be automatically disassembled and the data part of the frame transferred to RAM. When transmitting, the frame data will be transferred directly from RAM and transmitted with configurable frame type and delay timing. The system will be notified by an event whenever a complete frame is received or sent.

It also supports the collision detection and resolution ("anticollision") as defined by the NFC Forum.

Wake-on-field is supported in SENSE mode while the device is either in System OFF or System ON mode. When the antenna enters an NFC field, an event will be triggered notifying the system to activate the NFC functionality for incoming frames. In System ON, if the energy detected at the antenna increases beyond a threshold value, the module will generate a FIELDDETECTED event. The module will generate a FIELDLOST event when the quality or strength of the field no longer support NFC communication. Please refer to [NFCT Electrical Specification](#) on page 439 for the Low Power Field Detect threshold values.

In system OFF, the NFC Low Power Field Detect function can wake the system up through a reset. The NFC bit in register [RESETREAS](#) on page 88 will be set as cause of the wake-up.

If the system is put into system OFF mode while a field is already present, the NFC Low Power Field Detect function will wake the system up right away and generate a reset.

Note that as a consequence of reset, NFC is disabled, so the reset handler will have to activate NFC again and set it up properly.

The HFXO must be running before the NFC peripheral goes into ACTIVATED state. Note that the NFC peripheral calibration is automatically done on ACTIVATE task. The HFXO can be turned off when the NFC peripheral goes into SENSE mode. The shortcut FIELDDETECTED\_ACTIVATE can be used when the HFXO is already running while in SENSE mode.

Outgoing data will be collected from RAM with the EasyDMA function and assembled according to the TXD.FRAMECONFIG register. Incoming data will be disassembled according to the RXD.FRAMECONFIG register and the data section in the frame will be written to RAM via the EasyDMA function.

The NFC peripheral includes a frame timing controller that can be used to accurately control the inter-frame delay between the incoming frame and a corresponding outgoing frame. It also includes optional CRC functionality.

The NFC peripheral has a set of different states. The module can change state by triggering a task, or when specific operations are finalized. Events and tasks allow software to keep track of and change the current state.

See [Figure 119: NFC block diagram](#) on page 420 and [Figure 120: NFC state diagram](#) on page 422 for more information.

#### Notes:

- FIELDLOST event will not be reflected in the state machine (for instance by going back to the DISABLE state), it is up to software to decide on the actions to take when a field lost occurs.
- FIELDLOST event is not generated in SENSE mode.
- FIELDDETECTED event is generated only on the transition from FIELDLOST event to energy detected by the NFC peripheral. So, sending SENSE task while field is still present does not generate FIELDDETECTED event.
- If the FIELDDETECTED event is cleared before sending the ACTIVATE task, then the FIELDDETECTED event shows up again after sending the ACTIVATE task. The shortcut FIELDDETECTED\_ACTIVATE can be used to avoid this condition.

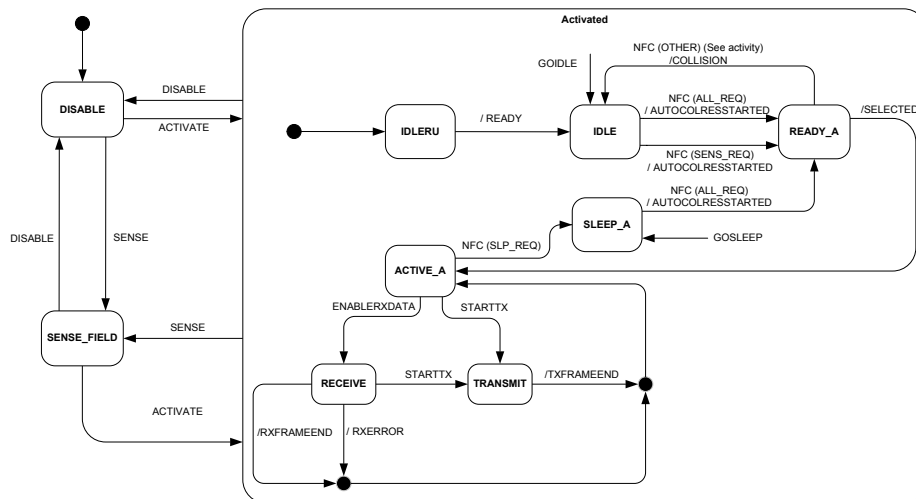


Figure 120: NFC state diagram

## 42.2 Pin configuration

NFC uses two pins to connect the antenna.

These pins are shared with GPIOs, and the PROTECT field in the NFCPINS register in [UICR](#) defines the usage of these pins and their protection level against excessive voltages. The content of the NFCPINS register is reloaded at every reset.

When NFCPINS.PROTECT=NFC, a protection circuit will be enabled on the dedicated pins, preventing the chip from being damaged in the presence of a strong NFC field. The GPIO function will be disabled on those pins as well.

When NFCPINS.PROTECT=Disabled, the device will not be protected against strong NFC field damages caught by a connected NFC antenna, and the NFCT peripheral will not operate as expected, as it will never leave the DISABLE state.

The pins dedicated to the NFC antenna function will have some limitation when the pins are configured for normal GPIO operation. The pin capacitance will be higher on those (refer to  $C_{PAD\_NFC}$  in the [GPIO Electrical Specification](#) on page 157 below), and some increased leakage current between the two pins is to be expected if they are used in GPIO mode, and are driven to different logical values. To save power the two pins should always be set to the same logical value whenever entering one of the device power saving modes. Please refer to  $I_{NFC\_LEAK}$  in [GPIO Electrical Specification](#) on page 157 for details.

## 42.3 EasyDMA

The NFC peripheral implements EasyDMA for reading and writing of data packets from and to the Data RAM without CPU involvement.

The NFC EasyDMA utilizes one pointer called PACKETPTR for receiving and transmitting packets.

The EasyDMA can either read or write between the NFC peripheral and the RAM, but not at the same time. The event RXFRAMESTART indicates that the EasyDMA has started writing to the RAM for a receive frame and the event RXFRAMEEND indicates that the EasyDMA has completed writing to the RAM. Similarly, the event TXFRAMESTART indicates that the EasyDMA has started reading from the RAM for a transmit frame and the event TXFRAMEEND indicates that the EasyDMA has completed reading from the RAM. If a transmit and a receive operation is issued at the same time, the transmit operation would be prioritized.

Starting a transmit operation while the EasyDMA has already started writing a receive frame to the RAM will result in unpredictable behavior. Starting an EasyDMA operation whilst there is an ongoing EasyDMA operation may result in unpredictable behavior. It is recommended to wait for the TXFRAMEEND or

RXFRAMEND event for the respective ongoing transmit or receive before starting a new receive or transmit operation.

The MAXLEN register determines the maximum number of bytes that can be read from or written to the RAM. This feature can be used to secure that the NFC peripheral does not overwrite, or read beyond, the RAM assigned to a packet. Note that if the RXD.AMOUNT or TXD.AMOUNT register indicates longer data packets than set in MAXLEN, the frames sent to or received from the physical layer will be incomplete. In RX, the OVERRUN bit in the FRAMESTATUS.RX register will be set and an RXERROR event will be triggered in that situation.

Note that RXD.AMOUNT and TXD.AMOUNT define a frame length in bytes and bits excluding SoF, EoF and parity, but including CRC for RXD.AMOUNT only, make sure to take potential additional bits into account when setting MAXLEN.

Only sending task ENABLERXDATA ensures that a new value in PACKETPTR pointing to the RX buffer in Data RAM is taken into account.

If PACKETPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See Chapter [Memory](#) on page 24 for more information about the different memory regions.

The NFC peripherals normally do alternative receive and transmit frames. So, to prepare for the next frame, the PACKETPTR, MAXLEN, TXD.FRAMECONFIG and TXD.AMOUNT can be updated while the receive is in progress, and, similarly, the PACKETPTR, MAXLEN and RXD.FRAMECONFIG can be updated while the transmit is in progress. They can be updated and prepared for the next NFC frame immediately after the STARTED event of the current frame has been received. Updating the TXD.FRAMECONFIG and TXD.AMOUNT during the current transmit frame or updating RXD.FRAMECONFIG during current receive frame may cause unpredictable behaviour.

In accordance with *NFC Forum, NFC Digital Protocol Technical Specification*, the least a significant bit from the least significant byte is sent on air first. The bytes are stored in increasing order, starting at the lowest address in the EasyDMA buffer in RAM.

## 42.4 Collision resolution

The NFC peripheral implements an automatic collision resolution function as defined by the NFC Forum.

The SENSRES and SELRES registers need to be programmed upfront in order for the collision resolution to behave correctly. Depending on the NFCIDSIZE field in SENSRES, the following registers also need to be programmed upfront:

- NFCID1\_LAST if NFCID1SIZE=NFCID1Single (ID = 4 bytes);
- NFCID1\_2ND\_LAST and NFCID1\_LAST if NFCID1SIZE=NFCID1Double (ID = 7 bytes);
- NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST if NFCID1SIZE=NFCID1Triple (ID = 10 bytes);

[Table 101: NFCID1 byte allocation \(top sent first on air\)](#) on page 423 explains the position of the ID bytes in NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST, depending on the ID size, and as compared to the definition used in the *NFC Forum, NFC Digital Protocol Technical Specification*.

**Table 101: NFCID1 byte allocation (top sent first on air)**

	ID = 4 bytes	ID = 7 bytes	ID = 10 bytes
NFCID1_Q			nfcid1 <sub>0</sub>
NFCID1_R			nfcid1 <sub>1</sub>
NFCID1_S			nfcid1 <sub>2</sub>
NFCID1_T		nfcid1 <sub>0</sub>	nfcid1 <sub>3</sub>
NFCID1_U		nfcid1 <sub>1</sub>	nfcid1 <sub>4</sub>
NFCID1_V		nfcid1 <sub>2</sub>	nfcid1 <sub>5</sub>
NFCID1_W	nfcid1 <sub>0</sub>	nfcid1 <sub>3</sub>	nfcid1 <sub>6</sub>
NFCID1_X	nfcid1 <sub>1</sub>	nfcid1 <sub>4</sub>	nfcid1 <sub>7</sub>
NFCID1_Y	nfcid1 <sub>2</sub>	nfcid1 <sub>5</sub>	nfcid1 <sub>8</sub>
NFCID1_Z	nfcid1 <sub>3</sub>	nfcid1 <sub>6</sub>	nfcid1 <sub>9</sub>

Automatic collision resolution is enabled by default.

The hardware implementation can handle the states from IDLE to ACTIVE\_A automatically as defined in the *NFC Forum, NFC Activity Technical Specification*, and the other states are to be handled by software. The software keeps track of the state through events. The collision resolution will trigger an AUTOCOLRESSTARTED event when it has started. Reaching the ACTIVE\_A state is indicated by the SELECTED event.

If collision resolution fails, a COLLISION event is triggered. Note that errors occurring during automatic collision resolution may also cause ERROR and/or RXERROR events to be generated. Also, other events may get generated. It is recommended that the software ignores any event except COLLISION, SELECTED and FIELDLOST during automatic collision resolution. Software shall also make sure that any unwanted SHORT or PPI shortcut are disabled during automatic collision resolution.

A pre-defined set of registers, NFC.TAGHEADER0..3, containing a valid NFCID1 value, is available in [FICR](#), and can be used by software to populate the NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST registers. Refer to the release notes of the NFC stack for more details on the format.

The automatic collision resolution will be restarted, if the packets are received with CRC or parity errors while in ACTIVE\_A state.

The SLP\_REQ is automatically handled by the NFC peripheral. However, this results in an ERROR event (with FRAMEDELAYTIMEOUT cause in ERRORSTATUS) since the SLP\_REQ has no response. This error must be ignored until the SELECTED event is triggered and this error should be cleared by the software when the SELECTED event is triggered.

## 42.5 Frame timing controller

The NFC peripheral includes a frame timing controller that continuously keeps track of the number of the 13.56 MHz RF-carrier clock periods since the end of the EoF of the last received frame.


The NFC peripheral can be programmed to send a responding frame within a time window or at an exact count of RF carrier periods. In case of FRAMEDELAYMODE = Window a STARTTX task triggered before the frame timing controller counter is equal to FRAMEDELAYMIN will force the transmission to halt until the counter is equal to FRAMEDELAYMIN. If the counter is within FRAMEDELAYMIN and FRAMEDELAYMAX when the STARTTX task is triggered, the peripheral will start the transmission straight away. In case of FRAMEDELAYMODE = ExactVal, a STARTTX task, triggered before the frame delay counter is equal to FRAMEDELAYMAX, will halt the actual transmission start until the counter is equal to FRAMEDELAYMAX.

In case of FRAMEDELAYMODE = WindowGrid, the behaviour is similar to the FRAMEDELAYMODE = Window, but the actual transmission between FRAMEDELAYMIN and FRAMEDELAYMAX starts on a bit grid as defined for NFC-A Listen frames (slot duration of 128 RF carrier periods).

The FRAMEDELAYMIN and FRAMEDELAYMAX values shall only be updated before the STARTTX task is triggered. Failing to do so may cause unpredictable behaviour. An ERROR event (with FRAMEDELAYTIMEOUT cause in ERRORSTATUS) will be asserted if the frame timing controller counter reaches FRAMEDELAYMAX without any STARTTX task triggered. This may happen even when the response is not required as per *NFC Forum, NFC Digital Protocol Technical Specification*. Any commands handled by the automatic collision resolution that don't involve a response being generated may also result in an ERROR event (with FRAMEDELAYTIMEOUT cause in ERRORSTATUS).

The frame timing controller operation is illustrated in [Figure 121: Frame timing controller \(FRAMEDELAYMODE=Window\)](#) on page 425. The frame timing controller automatically adjusts the frame timing counter based on the last received data bit according to NFC-A technology in the *NFC Forum, NFC Digital Protocol Technical Specification*.



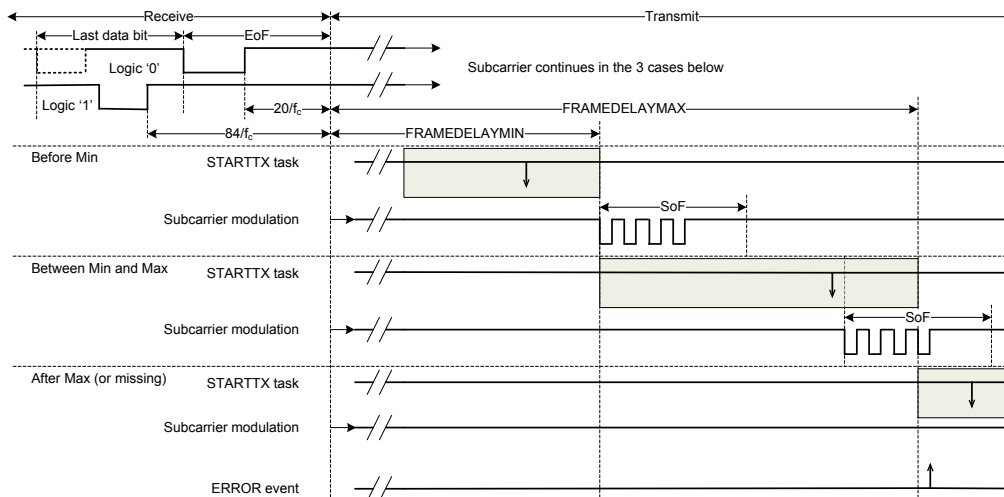

**Figure 121: Frame timing controller (FRAMEDELAYMODE=Window)**

## 42.6 Frame assembler

The NFC peripheral implements a frame assembler in hardware.

When the NFC peripheral is in the ACTIVE\_A state, the software can decide to enter RX or TX mode. For RX, see [Frame disassembler](#) on page 426. For TX, the software must indicate the address of the source buffer in Data RAM and its size through programming the PACKETPTR and MAXCNT registers respectively, then issuing a TXSTART task.

MAXCNT must be set so that it matches the size of the frame to be sent.

The STARTED event indicates that the PACKETPTR and MAXCNT registers have been captured by the frame assembler's EasyDMA.

When asserting the STARTTX task, the frame assembler module will start reading TXD.AMOUNT.TXDATABYTES bytes (plus one additional byte if TXD.AMOUNT.TXDATABITS > 0) from the RAM position set by the PACKETPTR.


The NFC peripheral transmits the data as read from RAM, adding framing and the CRC calculated on the fly. The NFC peripheral will take  $(8 \times \text{TXD.AMOUNT.TXDATABYTES} + \text{TXD.AMOUNT.TXDATABITS})$  bits and assemble a frame according to settings in TXD.FRAMECONFIG. Both short frames, standard frames and bit oriented SDD frames as specified in the *NFC Forum, NFC Digital Protocol Technical Specification* can be assembled by correct setting of the TXD.FRAMECONFIG register.

The bytes will be transmitted on air in the same order as they are read from RAM with a rising bit order within each byte (least significant bit first). That is, b0 will be transmitted on air before b1, and so on. The bits read from RAM will be coded into symbols as defined in the *NFC Forum, NFC Digital Protocol Technical Specification*.

**Important:** Some NFC Forum documents, such as *NFC Forum, NFC Digital Protocol Technical Specification*, define bit numbering in a byte from b1 (LSB) to b8 (MSB), while most other technical documents from the NFC Forum, and also the Nordic Semiconductor documentation, traditionally numbers them from b0 to b7. The present document uses the b0 to b7 numbering scheme. Be aware of this when comparing with the *NFC Forum, NFC Digital Protocol Technical Specification* to others.

The frame assembler can be configured in TXD.FRAMECONFIG to add Start of Frame (SoF) symbol, calculate and add parity bits, and calculate and add CRC to the data read from RAM when assembling the frame. The total frame will then be longer than what is defined by TXD.AMOUNT.TXDATABYTES and TXDATABITS. DISCARDMODE will select if the first bits in the first byte read from RAM or the last bits in the last byte read from RAM will be discarded if TXD.AMOUNT.TXDATABITS are not equal to zero. Note that if TXD.FRAMECONFIG.PARITY = Parity and TXD.FRAMECONFIG.DISCARDMODE=DiscardStart, a parity bit will be included after the non-complete first byte. No parity will be added after a non-complete last byte.

The Frame Assemble operation is illustrated in [Figure 122: Frame assemble](#) on page 426 for different settings in TXD.FRAMECONFIG. All shaded bits fields are added by the frame assembler. Some of these bits are optional and appearances are configured in TXD.FRAMECONFIG. Please note that the frames illustrated do not necessarily comply with the NFC specification. The figure is only to illustrate the behavior of the NFC peripheral.

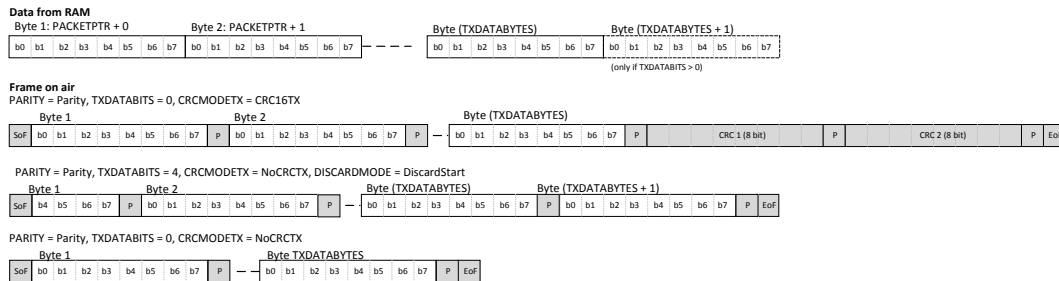

**Figure 122: Frame assemble**

The accurate timing for transmitting the frame on air is set using the frame timing controller settings.

## 42.7 Frame disassembler

The NFC peripheral implements a frame disassembler in hardware.


When the NFC peripheral is in the ACTIVE\_A state, the software can decide to enter RX or TX mode. For TX, see [Frame assembler](#) on page 425. For RX, the software must indicate the address of the destination buffer in Data RAM and its size through programming the PACKETPTR and MAXCNT registers respectively, then issuing a ENABLERXDATA task.

The STARTED event indicates that the PACKETPTR and MAXCNT registers have been captured by the frame disassembler's EasyDMA.

When an incoming frame starts, the RXFRAMESTART event will get issued and data will be written to the buffer in Data RAM. The frame disassembler will verify and remove on the fly any parity bits and SoF and End of Frame (EoF) symbols based on RXD.FRAMECONFIG register configuration. It will, however, verify and transfer the CRC bytes into RAM, if the CRC is was enabled through RXD.FRAMECONFIG.

When an EoF symbol is detected, the NFC peripheral will assert the RXFRAMEEND event and write the RXD.AMOUNT register to indicate numbers of received bytes and bits in the data packet. The module does not interpret the content of the data received from the remote NFC device, except for SoF, EoF, parity and CRC checking, as described above. The Frame disassemble operation is illustrated in [Figure 123: Frame disassemble illustration](#) on page 426.

Per NFC specification, the time between end of frame to the next start of frame can be as short as 86 µs, so care must be taken that PACKETPTR and MAXCNT are ready and ENABLERXDATA is issued on time after the end of previous frame. The use of a PPI shortcut from TXFRAMEEND to ENABLERXDATA is recommended.

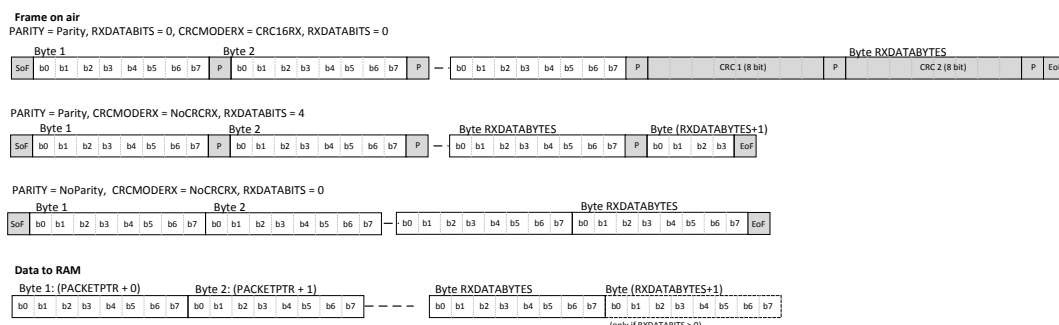

**Figure 123: Frame disassemble illustration**

## 42.8 Antenna interface


In ACTIVATED state, an amplitude regulator will adjust the voltage swing on the antenna pins to a value that is within the  $V_{\text{swing}}$  limit.

Refer to [NFCT Electrical Specification](#) on page 439.

## 42.9 NFCT antenna recommendations

The NFCT antenna coil must be connected differential between **NFC1** and **NFC2** pins of the device.

Two external capacitors should be used to tune the resonance of the antenna circuit to 13.56 MHz.

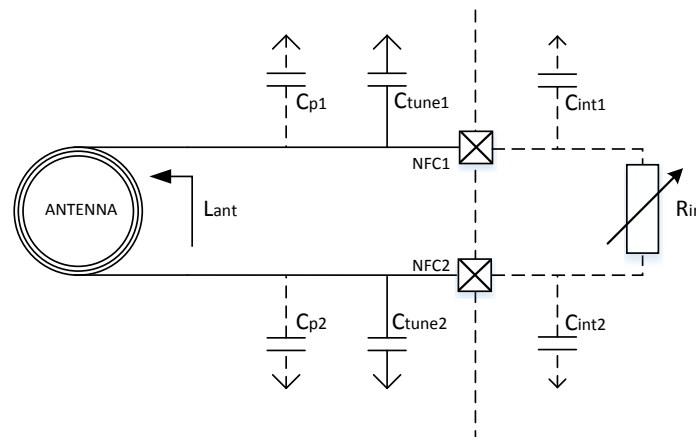

**Figure 124: NFCT antenna recommendations**

The required tuning capacitor value is given by the below equations:

$$C'_{\text{tune}} = \frac{1}{(2\pi \cdot 13.56 \text{ MHz})^2 \cdot L_{\text{ant}}} \quad \text{where } C'_{\text{tune}} = \frac{1}{2} \cdot (C_p + C_{\text{int}} + C_{\text{tune}})$$

$$\text{and } C_{\text{tune1}} = C_{\text{tune2}} = C_{\text{tune}} \quad C_{p1} = C_{p2} = C_p \quad C_{\text{int1}} = C_{\text{int2}} = C_{\text{int}}$$

$$C_{\text{tune}} = \frac{2}{(2\pi \cdot 13.56 \text{ MHz})^2 \cdot L_{\text{ant}}} - C_p - C_{\text{int}}$$

An antenna inductance of  $L_{\text{ant}} = 2 \mu\text{H}$  will give tuning capacitors in the range of 130 pF on each pin. For good performance, match the total capacitance on **NFC1** and **NFC2**.

## 42.10 Battery protection

If the antenna is exposed to a strong NFC field, current may flow in the opposite direction on the supply due to parasitic diodes and ESD structures.

If the battery used does not tolerate return current, a series diode must be placed between the battery and the device in order to protect the battery.

## 42.11 References

NFC Forum, NFC Analog Specification version 1.0, [www.nfc-forum.org](http://www.nfc-forum.org)

NFC Forum, NFC Digital Protocol Technical Specification version 1.1, [www.nfc-forum.org](http://www.nfc-forum.org)

NFC Forum, NFC Activity Technical Specification version 1.1, [www.nfc-forum.org](http://www.nfc-forum.org)

## 42.12 Registers

**Table 102: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40005000	NFCT	NFCT	Near Field Communication Tag	

**Table 103: Register Overview**

Register	Offset	Description
TASKS_ACTIVATE	0x000	Activate NFC peripheral for incoming and outgoing frames, change state to activated
TASKS_DISABLE	0x004	Disable NFC peripheral
TASKS_SENSE	0x008	Enable NFC sense field mode, change state to sense mode
TASKS_STARTTX	0x00C	Start transmission of a outgoing frame, change state to transmit
TASKS_ENABLERXDATA	0x01C	Initializes the EasyDMA for receive.
TASKS_GOIDLE	0x024	Force state machine to IDLE state
TASKS_GOSLEEP	0x028	Force state machine to SLEEP_A state
EVENTS_READY	0x100	The NFC peripheral is ready to receive and send frames
EVENTS_FIELDDETECTED	0x104	Remote NFC field detected
EVENTS_FIELDLOST	0x108	Remote NFC field lost
EVENTS_TXFRAMESTART	0x10C	Marks the start of the first symbol of a transmitted frame
EVENTS_TXFRAMEEND	0x110	Marks the end of the last transmitted on-air symbol of a frame
EVENTS_RXFRAMESTART	0x114	Marks the end of the first symbol of a received frame
EVENTS_RXFRAMEEND	0x118	Received data have been checked (CRC, parity) and transferred to RAM, and EasyDMA has ended accessing the RX buffer
EVENTS_ERROR	0x11C	NFC error reported. The ERRORSTATUS register contains details on the source of the error.
EVENTS_RXERROR	0x128	NFC RX frame error reported. The FRAMESTATUS.RX register contains details on the source of the error.
EVENTS_ENDRX	0x12C	RX buffer (as defined by PACKETPTR and MAXLEN) in Data RAM full.
EVENTS_ENDTX	0x130	Transmission of data in RAM has ended, and EasyDMA has ended accessing the TX buffer
EVENTS_AUTOCOLRESST	0x138	Auto collision resolution process has started
EVENTS_COLLISION	0x148	NFC Auto collision resolution error reported.
EVENTS_SELECTED	0x14C	NFC Auto collision resolution successfully completed
EVENTS_STARTED	0x150	EasyDMA is ready to receive or send frames.
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSTATUS	0x404	NFC Error Status register
FRAMESTATUS.RX	0x40C	Result of last incoming frames
CURRENTLOADCTRL	0x430	Current value driven to the NFC Load Control
FIELDPRESENT	0x43C	Indicates the presence or not of a valid field
FRAMEDELAYMIN	0x504	Minimum frame delay
FRAMEDELAYMAX	0x508	Maximum frame delay
FRAMEDELAYMODE	0x50C	Configuration register for the Frame Delay Timer
PACKETPTR	0x510	Packet pointer for TXD and RXD data storage in Data RAM
MAXLEN	0x514	Size of allocated for TXD and RXD data storage buffer in Data RAM
TXD.FRAMECONFIG	0x518	Configuration of outgoing frames
TXD.AMOUNT	0x51C	Size of outgoing frame
RXD.FRAMECONFIG	0x520	Configuration of incoming frames

Register	Offset	Description
<a href="#">RXD.AMOUNT</a>	0x524	Size of last incoming frame
<a href="#">NFCID1_LAST</a>	0x590	Last NFCID1 part (4, 7 or 10 bytes ID)
<a href="#">NFCID1_2ND_LAST</a>	0x594	Second last NFCID1 part (7 or 10 bytes ID)
<a href="#">NFCID1_3RD_LAST</a>	0x598	Third last NFCID1 part (10 bytes ID)
<a href="#">SENSRES</a>	0x5A0	NFC-A SENS_RES auto-response settings
<a href="#">SELRES</a>	0x5A4	NFC-A SEL_RES auto-response settings

## 42.12.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	FIELDDETECTED_ACTIVATE				Shortcut between FIELDDETECTED event and ACTIVATE task																														
						See <a href="#">EVENTS_FIELDDETECTED</a> and <a href="#">TASKS_ACTIVATE</a>																														
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														
B	RW	FIELDLOST_SENSE				Shortcut between FIELDLOST event and SENSE task																														
						See <a href="#">EVENTS_FIELDLOST</a> and <a href="#">TASKS_SENSE</a>																														
			Disabled		0	Disable shortcut																														
			Enabled		1	Enable shortcut																														

## 42.12.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				T S R N M L K H G F E D C B A																																		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	READY				Enable or disable interrupt for READY event																																
						See <a href="#">EVENTS_READY</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
B	RW	FIELDDETECTED				Enable or disable interrupt for FIELDDETECTED event																																
						See <a href="#">EVENTS_FIELDDETECTED</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
C	RW	FIELDLOST				Enable or disable interrupt for FIELDLOST event																																
						See <a href="#">EVENTS_FIELDLOST</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
D	RW	TXFRAMESTART				Enable or disable interrupt for TXFRAMESTART event																																
						See <a href="#">EVENTS_TXFRAMESTART</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
E	RW	TXFRAMEEND				Enable or disable interrupt for TXFRAMEEND event																																
						See <a href="#">EVENTS_TXFRAMEEND</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
F	RW	RXFRAMESTART				Enable or disable interrupt for RXFRAMESTART event																																

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			T S R N M L K H G F E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value Id	Value	Description																													
			Disabled	0	See <a href="#">EVENTS_RXFRAMESTART</a> Disable																													
			Enabled	1	Enable																													
G	RW	RXFRAMEEND	Enable or disable interrupt for RXFRAMEEND event																															
			Disabled	0	See <a href="#">EVENTS_RXFRAMEEND</a> Disable																													
			Enabled	1	Enable																													
H	RW	ERROR	Enable or disable interrupt for ERROR event																															
			Disabled	0	See <a href="#">EVENTS_ERROR</a> Disable																													
			Enabled	1	Enable																													
K	RW	RXERROR	Enable or disable interrupt for RXERROR event																															
			Disabled	0	See <a href="#">EVENTS_RXERROR</a> Disable																													
			Enabled	1	Enable																													
L	RW	ENDRX	Enable or disable interrupt for ENDRX event																															
			Disabled	0	See <a href="#">EVENTS_ENDRX</a> Disable																													
			Enabled	1	Enable																													
M	RW	ENDTX	Enable or disable interrupt for ENDTX event																															
			Disabled	0	See <a href="#">EVENTS_ENDTX</a> Disable																													
			Enabled	1	Enable																													
N	RW	AUTOCOLRESSTARTED	Enable or disable interrupt for AUTOCOLRESSTARTED event																															
			Disabled	0	See <a href="#">EVENTS_AUTOCOLRESSTARTED</a> Disable																													
			Enabled	1	Enable																													
R	RW	COLLISION	Enable or disable interrupt for COLLISION event																															
			Disabled	0	See <a href="#">EVENTS_COLLISION</a> Disable																													
			Enabled	1	Enable																													
S	RW	SELECTED	Enable or disable interrupt for SELECTED event																															
			Disabled	0	See <a href="#">EVENTS_SELECTED</a> Disable																													
			Enabled	1	Enable																													
T	RW	STARTED	Enable or disable interrupt for STARTED event																															
			Disabled	0	See <a href="#">EVENTS_STARTED</a> Disable																													
			Enabled	1	Enable																													

### 42.12.3 INTENSET

Address offset: 0x304

## Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																				
Id																				T S R							N		M		L K						H G F E D C B A			
Reset 0x00000000				0 0																																				
Id	RW	Field	Value	Id	Value												Description																							
A	RW	READY															Write '1' to Enable interrupt for READY event																							
																												See <a href="#">EVENTS_READY</a>												

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				T S R N M L K H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	B	RW	FIELDDETECTED		Write '1' to Enable interrupt for FIELDDETECTED event																														
					See <a href="#">EVENTS_FIELDDETECTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	C	RW	FIELDLOST		Write '1' to Enable interrupt for FIELDLOST event																														
					See <a href="#">EVENTS_FIELDLOST</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	D	RW	TXFRAMESTART		Write '1' to Enable interrupt for TXFRAMESTART event																														
					See <a href="#">EVENTS_TXFRAMESTART</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	E	RW	TXFRAMEEND		Write '1' to Enable interrupt for TXFRAMEEND event																														
					See <a href="#">EVENTS_TXFRAMEEND</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	F	RW	RXFRAMESTART		Write '1' to Enable interrupt for RXFRAMESTART event																														
					See <a href="#">EVENTS_RXFRAMESTART</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	G	RW	RXFRAMEEND		Write '1' to Enable interrupt for RXFRAMEEND event																														
					See <a href="#">EVENTS_RXFRAMEEND</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	H	RW	ERROR		Write '1' to Enable interrupt for ERROR event																														
					See <a href="#">EVENTS_ERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	K	RW	RXERROR		Write '1' to Enable interrupt for RXERROR event																														
					See <a href="#">EVENTS_RXERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	L	RW	ENDRX		Write '1' to Enable interrupt for ENDRX event																														
					See <a href="#">EVENTS_ENDRX</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	M	RW	ENDTX		Write '1' to Enable interrupt for ENDTX event																														
					See <a href="#">EVENTS_ENDTX</a>																														
			Set	1	Enable																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id														T	S	R											N	M	L	K					H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																					
N	RW	AUTOCOLRESSTARTED	Disabled	0	Read: Disabled																																					
			Enabled	1	Read: Enabled																																					
			Write '1' to Enable interrupt for AUTOCOLRESSTARTED event																																							
			See <a href="#">EVENTS_AUTOCOLRESSTARTED</a>																																							
			Set	1	Enable																																					
R	RW	COLLISION	Disabled	0	Read: Disabled																																					
			Enabled	1	Read: Enabled																																					
			Write '1' to Enable interrupt for COLLISION event																																							
			See <a href="#">EVENTS_COLLISION</a>																																							
			Set	1	Enable																																					
S	RW	SELECTED	Disabled	0	Read: Disabled																																					
			Enabled	1	Read: Enabled																																					
			Write '1' to Enable interrupt for SELECTED event																																							
			See <a href="#">EVENTS_SELECTED</a>																																							
			Set	1	Enable																																					
T	RW	STARTED	Disabled	0	Read: Disabled																																					
			Enabled	1	Read: Enabled																																					
			Write '1' to Enable interrupt for STARTED event																																							
			See <a href="#">EVENTS_STARTED</a>																																							
			Set	1	Enable																																					

## 42.12.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																																		
Id																				T	S	R											N	M	L	K											H	G	F	E	D	C	B	A
Reset 0x00000000				0 0																																																		



Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			T S R N M L K H G F E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value	Id	Value	Description																												
E	RW	TXFRAMEEND				Write '1' to Disable interrupt for TXFRAMEEND event																												
						See <a href="#">EVENTS_TXFRAMEEND</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
F	RW	RXFRAMESTART				Write '1' to Disable interrupt for RXFRAMESTART event																												
						See <a href="#">EVENTS_RXFRAMESTART</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
G	RW	RXFRAMEEND				Write '1' to Disable interrupt for RXFRAMEEND event																												
						See <a href="#">EVENTS_RXFRAMEEND</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
H	RW	ERROR				Write '1' to Disable interrupt for ERROR event																												
						See <a href="#">EVENTS_ERROR</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
K	RW	RXERROR				Write '1' to Disable interrupt for RXERROR event																												
						See <a href="#">EVENTS_RXERROR</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
L	RW	ENDRX				Write '1' to Disable interrupt for ENDRX event																												
						See <a href="#">EVENTS_ENDRX</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
M	RW	ENDTX				Write '1' to Disable interrupt for ENDTX event																												
						See <a href="#">EVENTS_ENDTX</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
N	RW	AUTOCOLRESSTARTED				Write '1' to Disable interrupt for AUTOCOLRESSTARTED event																												
						See <a href="#">EVENTS_AUTOCOLRESSTARTED</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
R	RW	COLLISION				Write '1' to Disable interrupt for COLLISION event																												
						See <a href="#">EVENTS_COLLISION</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
S	RW	SELECTED				Write '1' to Disable interrupt for SELECTED event																												
						See <a href="#">EVENTS_SELECTED</a>																												
		Clear	1			Disable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
T	RW	STARTED				Write '1' to Disable interrupt for STARTED event																												

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0															
Id															T			S	R											N	M	L	K											H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0													
Id	RW	Field	Value	Id	Value	Description																																													
						See <a href="#">EVENTS_STARTED</a>																																													
			Clear	1		Disable																																													
			Disabled	0		Read: Disabled																																													
			Enabled	1		Read: Enabled																																													

## 42.12.5 ERRORSTATUS

Address offset: 0x404

NFC Error Status register

Write a bit to '1' to clear it. Writing '0' has no effect.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																			D	C	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	FRAMEDELAYTIMEOUT				No STARTTX task triggered before expiration of the time set in FRAMEDELAYMAX																															
C	RW	NFCFIELDTOOSTRONG				Field level is too high at max load resistance																															
D	RW	NFCFIELDTOOWEAK				Field level is too low at min load resistance																															

## 42.12.6 FRAMESTATUS.RX

Address offset: 0x40C

Result of last incoming frames

Write a bit to '1' to clear it. Writing '0' has no effect.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																			C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	CRCERROR				No valid End of Frame detected																															
			CRCCorrect	0		Valid CRC detected																															
			CRCError	1		CRC received does not match local check																															
B	RW	PARITYSTATUS				Parity status of received frame																															
			ParityOK	0		Frame received with parity OK																															
			ParityError	1		Frame received with parity error																															
C	RW	OVERRUN				Overrun detected																															
			NoOverrun	0		No overrun detected																															
			Overrun	1		Overrun error																															

## 42.12.7 CURRENTLOADCTRL

Address offset: 0x430

Current value driven to the NFC Load Control

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

## 42.12.8 FIELDPRESENT

Address offset: 0x43C

Indicates the presence or not of a valid field

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	FIELDPRESENT				Indicates the presence or not of a valid field. Available only in the activated state.																													
		NoField	0			No valid field detected																													
		FieldPresent	1			Valid field detected																													
B	R	LOCKDETECT				Indicates if the low level has locked to the field																													
		NotLocked	0			Not locked to field																													
		Locked	1			Locked to field																													

### 42.12.9 FRAMEDELAYMIN

Address offset: 0x504

### Minimum frame delay

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000480				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value																Description																
A	RW	FRAMEDELAYMIN																			Minimum frame delay in number of 13.56 MHz clocks																

#### 42.12.10 FRAMEDELAYMAX

Address offset: 0x508

Maximum frame delay

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00001000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value																Description																
A	RW	FRAMEDELAYMAX																			Maximum frame delay in number of 13.56 MHz clocks																

### 42.12.11 FRAMEDELAYMODE

Address offset: 0x50C

### Configuration register for the Frame Delay Timer

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			A A																														
Reset 0x00000001			0 1																														
Id	RW	Field	Value Id	Value	Description																												
A	RW	FRAMEDELAYMODE			Configuration register for the Frame Delay Timer																												
		FreeRun	0		Transmission is independent of frame timer and will start when the STARTTX task is triggered. No timeout.																												
		Window	1		Frame is transmitted between FRAMEDELAYMIN and FRAMEDELAYMAX																												
		ExactVal	2		Frame is transmitted exactly at FRAMEDELAYMAX																												
		WindowGrid	3		Frame is transmitted on a bit grid between FRAMEDELAYMIN and FRAMEDELAYMAX																												

### 42.12.12 PACKETPTR

Address offset: 0x510

### Packet pointer for TXD and RXD data storage in Data RAM

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Packet pointer for TXD and RXD data storage in Data RAM. This address is a byte aligned RAM address.																											

### 42.12.13 MAXLEN

Address offset: 0x514

Size of allocated for TXD and RXD data storage buffer in Data RAM

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																											A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	MAXLEN		[0..257]	Size of allocated for TXD and RXD data storage buffer in Data RAM																																	

### 42.12.14 TXD.FRAMECONFIG

Address offset: 0x518

Configuration of outgoing frames

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																D	C	B	A
Reset 0x00000017				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PARITY			Adding parity or not in the frame																														
			NoParity	0	Parity is not added in TX frames																														
			Parity	1	Parity is added TX frames																														
B	RW	DISCARDMODE			Discarding unused bits in start or at end of a Frame																														
			DiscardEnd	0	Unused bits is discarded at end of frame																														
			DiscardStart	1	Unused bits is discarded at start of frame																														
C	RW	SOF			Adding SoF or not in TX frames																														
			NoSoF	0	Start of Frame symbol not added																														
			SoF	1	Start of Frame symbol added																														
D	RW	CRCMODETX			CRC mode for outgoing frames																														
			NoCRCTX	0	CRC is not added to the frame																														
			CRC16TX	1	16 bit CRC added to the frame based on all the data read from RAM that is used in the frame																														

### 42.12.15 TXD.AMOUNT

Address offset: 0x51C

Size of outgoing frame

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									B	B	B	B	B	B	B	B	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TXDATABITS		[0..7]	Number of bits in the last or first byte read from RAM that shall be included in the frame (excluding parity bit).																														
					The DISCARDMODE field in FRAMECONFIG.TX selects if unused bits is discarded at the start or at the end of a frame. A value of 0 data bytes and 0 data bits is invalid.																														
B	RW	TXDATABYTES		[0..257]	Number of complete bytes that shall be included in the frame, excluding CRC, parity and framing																														

## 42.12.16 RXD.FRAMECONFIG

Address offset: 0x520

Configuration of incoming frames

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000015				0 1 0 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PARITY			Parity expected or not in RX frame																														
			NoParity	0	Parity is not expected in RX frames																														
			Parity	1	Parity is expected in RX frames																														
B	RW	SOF			SoF expected or not in RX frames																														
			NoSoF	0	Start of Frame symbol is not expected in RX frames																														
			SoF	1	Start of Frame symbol is expected in RX frames																														
C	RW	CRCMODERX			CRC mode for incoming frames																														
			NoCRCRX	0	CRC is not expected in RX frames																														
			CRC16RX	1	Last 16 bits in RX frame is CRC, CRC is checked and CRCSTATUS updated																														

## 42.12.17 RXD.AMOUNT

Address offset: 0x524

Size of last incoming frame

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B B B B B B B B A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	RXDATABITS			Number of bits in the last byte in the frame, if less than 8 (including CRC, but excluding parity and SoF/EoF framing).  Frames with 0 data bytes and less than 7 data bits are invalid and are not received properly.																														
B	R	RXDATABYTES			Number of complete bytes received in the frame (including CRC, but excluding parity and SoF/EoF framing)																														

## 42.12.18 NFCID1\_LAST

Address offset: 0x590

Last NFCID1 part (4, 7 or 10 bytes ID)

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					D D D D D D D C C C C C C C C B B B B B B B A A A A A A A																															
Reset 0x00006363					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 0 0 0 1 1 0 1 1 0 0 0 1 1																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	NFCID1_Z			NFCID1 byte Z (very last byte sent)																															
B	RW	NFCID1_Y			NFCID1 byte Y																															
C	RW	NFCID1_X			NFCID1 byte X																															
D	RW	NFCID1_W			NFCID1 byte W																															

## 42.12.19 NFCID1\_2ND\_LAST

Address offset: 0x594

Second last NFCID1 part (7 or 10 bytes ID)

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	NFCID1_V				NFCID1 byte V																														
B	RW	NFCID1_U				NFCID1 byte U																														
C	RW	NFCID1_T				NFCID1 byte T																														

## 42.12.20 NFCID1\_3RD\_LAST

Address offset: 0x598

Third last NFCID1 part (10 bytes ID)

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id													C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	NFCID1_S				NFCID1 byte S																															
B	RW	NFCID1_R				NFCID1 byte R																															
C	RW	NFCID1_Q				NFCID1 byte Q																															

## 42.12.21 SENSRES

Address offset: 0x5A0

NFC-A SENS\_RES auto-response settings

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					E E E E D D D D C C B A A A A A																																	
Reset 0x00000001					0 1																																	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	BITFRAMESDD			Bit frame SDD as defined by the b5:b1 of byte 1 in SENS_RES response in the NFC Forum, NFC Digital Protocol Technical Specification																																	
			SDD00000	0	SDD pattern 00000																																	
			SDD00001	1	SDD pattern 00001																																	
			SDD00010	2	SDD pattern 00010																																	
			SDD00100	4	SDD pattern 00100																																	
			SDD01000	8	SDD pattern 01000																																	
			SDD10000	16	SDD pattern 10000																																	
B	RW	RFU5			Reserved for future use. Shall be 0.																																	
C	RW	NFCIDSIZE			NFCID1 size. This value is used by the Auto collision resolution engine.																																	
			NFCID1Single	0	NFCID1 size: single (4 bytes)																																	
			NFCID1Double	1	NFCID1 size: double (7 bytes)																																	
			NFCID1Triple	2	NFCID1 size: triple (10 bytes)																																	
D	RW	PLATFCONFIG			Tag platform configuration as defined by the b4:b1 of byte 2 in SENS_RES response in the NFC Forum, NFC Digital Protocol Technical Specification																																	
E	RW	RFU74			Reserved for future use. Shall be 0.																																	

## 42.12.22 SELRES

Address offset: 0x5A4

NFC-A SEL\_RES auto-response settings

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													E	D	D	C	C	B	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	RFU10				Reserved for future use. Shall be 0.																														
B	RW	CASCADE				Cascade bit (controlled by hardware, write has no effect)																														
			Complete	0	NFCID1 complete																															
			NotComplete	1	NFCID1 not complete																															
C	RW	RFU43				Reserved for future use. Shall be 0.																														
D	RW	PROTOCOL				Protocol as defined by the b7:b6 of SEL_RES response in the NFC Forum, NFC Digital Protocol Technical Specification																														
E	RW	RFU7				Reserved for future use. Shall be 0.																														

## 42.13 Electrical specification

### 42.13.1 NFCT Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_c$	Frequency of operation		13.56		MHz
$C_{MI}$	Carrier modulation index	95			%
DR	Data Rate		106		kbps
$f_s$	Modulation sub-carrier frequency		$f_c/16$		MHz
$V_{swing}$	Peak differential Input voltage swing on NFC1 and NFC2			VDD	Vp
$V_{sense}$	Peak differential Field detect threshold level on NFC1-NFC2 <sup>35</sup>		1.0		Vp
$I_{sense}$	Current in SENSE STATE		100		nA
$I_{activated}$	Current in ACTIVATED STATE		480		μA
$R_{in\_min}$	Minimum input resistance when regulating voltage swing			40	Ω
$R_{in\_max}$	Maximum input resistance when regulating voltage swing	1.0			kΩ
$R_{in\_loadmod}$	Input resistance when load modulating	8		22	Ω
$I_{max}$	Maximum input current on NFC pins			80	mA

### 42.13.2 NFCT Timing Parameters

Symbol	Description	Min.	Typ.	Max.	Units
$t_{activate}$	Time from task_ACTIVATE in SENSE or DISABLE state to ACTIVATE_A or IDLE state <sup>36</sup>			500	us
$t_{sense}$	Time from remote field is present in SENSE mode to FIELDDETECTED event is asserted			20	us

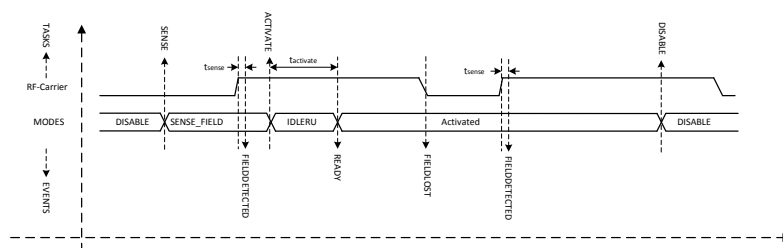


Figure 125: NFCT timing parameters (Shortcuts for FIELDDETECTED and FIELDLOST are disabled)

<sup>35</sup> Input is high impedance in sense mode

<sup>36</sup> Does not account for voltage supply and oscillator startup times


## 43 PDM — Pulse density modulation interface

The pulse density modulation (PDM) module enables input of pulse density modulated signals from external audio frontends, for example, digital microphones. The PDM module generates the PDM clock and supports single-channel or dual-channel (Left and Right) data input. Data is transferred directly to RAM buffers using EasyDMA.

Listed here are the main features for PDM:

- Up to two PDM microphones configured as a Left/Right pair using the same data input
- 16 kHz output sample rate, 16-bit samples
- EasyDMA support for sample buffering
- HW decimation filters

The PDM module illustrated in [Figure 126: PDM module](#) on page 440 is interfacing up to two digital microphones with the PDM interface. It implements EasyDMA, which relieves real-time requirements associated with controlling the PDM slave from a low priority CPU execution context. It also includes all the necessary digital filter elements to produce PCM samples. The PDM module allows continuous audio streaming.

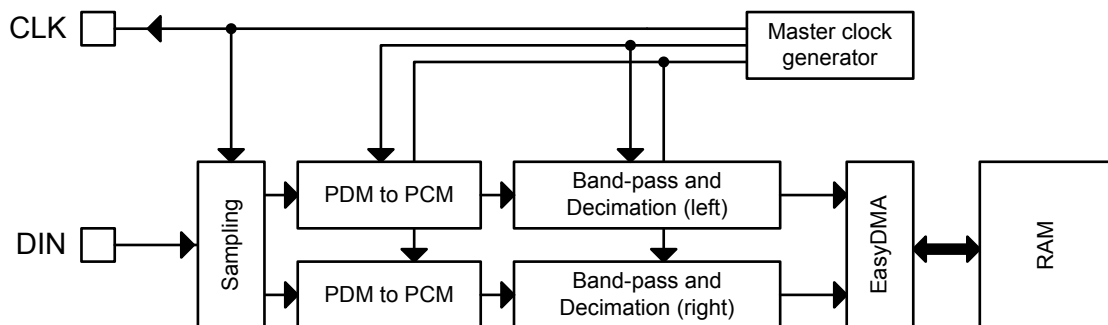

**Figure 126: PDM module**

### 43.1 Master clock generator

The `FREQ` field in the master clock's `PDMCLKCTRL` register allows adjusting the PDM clock's frequency.

The master clock generator does not add any jitter to the `HFCLK` source chosen. It is recommended (but not mandatory) to use the `Xtal` as `HFCLK` source.

### 43.2 Module operation

By default, bits from the left PDM microphone are sampled on `PDM_CLK` falling edge, bits for the right are sampled on the rising edge of `PDM_CLK`, resulting in two bitstreams. Each bitstream is fed into a digital filter which converts the PDM stream into 16-bit PCM samples, and filters and down-samples them to reach the appropriate sample rate.

The `EDGE` field in the `MODE` register allows swapping Left and Right, so that Left will be sampled on rising edge, and Right on falling.

The PDM module uses EasyDMA to store the samples coming out from the filters into one buffer in RAM.

Depending on the mode chosen in the `OPERATION` field in the `MODE` register, memory either contains alternating left and right 16-bit samples (Stereo), or only left 16-bit samples (Mono).

To ensure continuous PDM sampling, it is up to the application to update the EasyDMA destination address pointer as the previous buffer is filled.



The continuous transfer can be started or stopped by sending the START and STOP tasks. STOP becomes effective after the current frame has finished transferring, which will generate the STOPPED event. The STOPPED event indicates that all activity in the module are finished, and that the data is available in RAM (EasyDMA has finished transferring as well). Attempting to restart before receiving the STOPPED event may result in unpredictable behaviour.

### 43.3 Decimation filter

In order to convert the incoming data stream into PCM audio samples, a decimation filter is included in the PDM interface module.

The input of the filter is the two-channel PDM serial stream (with left channel on clock high, right channel on clock low), its output is  $2 \times 16$ -bit PCM samples at a sample rate 64 times lower than the PDM clock rate.

The filter stage of each channel is followed by a digital volume control, to attenuate or amplify the output samples in a range of -20 dB to +20 dB around the default (reset) setting, defined by  $G_{\text{PDM,default}}$ . The gain is controlled by the GAINL and GAINR registers.

As an example, if the goal is to achieve 2500 RMS output samples (16 bit) with a 1 kHz 90 dBA signal into a -26 dBFS sensitivity PDM microphone, the user will have to sum the PDM module's default gain ( $G_{\text{PDM,default}}$ ) and the gain introduced by the microphone and acoustic path of his implementation (an attenuation would translate into a negative gain), and adjust GAINL and GAINR by this amount. Assuming that only the PDM module influences the gain, GAINL and GAINR must be set to  $-G_{\text{PDM,default}}$  dB to achieve the requirement.

With  $G_{\text{PDM,default}}=3.2$  dB, and as GAINL and GAINR are expressed in 0.5 dB steps, the closest value to program would be 3.0 dB, which can be calculated as:

$$\text{GAINL} = \text{GAINR} = (\text{DefaultGain} - (2 * 3))$$

Remember to check that the resulting values programmed into GAINL and GAINR fall within MinGain and MaxGain.

### 43.4 EasyDMA

Samples will be written directly to RAM, and EasyDMA must be configured accordingly.

The address pointer for the EasyDMA channel is set in SAMPLE.PTR register. If the destination address set in SAMPLE.PTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

DMA supports Stereo (Left+Right 16-bit samples) and Mono (Left only) data transfer, depending on setting in the OPERATION field in the MODE register. The samples are stored little endian.

**Table 104: DMA sample storage**

MODE.OPERATION	Bits per sample	Result stored per RAM word	Physical RAM allocated (32 bit words)	Result boundary indexes in RAM	Note
Stereo	32 (2x16)	L+R	$\text{ceil}(\text{SAMPLE.MAXCNT}/2)$	R0=[31:16]; L0=[15:0]	Default
Mono	16	2xL	$\text{ceil}(\text{SAMPLE.MAXCNT}/2)$	L1=[31:16]; L0=[15:0]	

The destination buffer in RAM consists of one block, the size of which is set in SAMPLE.MAXCNT register. Format is number of 16-bit samples. The physical RAM allocated is always:

$$(\text{RAM allocation, in bytes}) = \text{SAMPLE.MAXCNT} * 2;$$

(but the mapping of the samples depends on MODE.OPERATION.

If OPERATION=Stereo, RAM will contain a succession of Left and Right samples.

If OPERATION=Mono, RAM will contain a succession of mono samples.

For a given value of `SAMPLE.MAXCNT`, the buffer in RAM can contain half the stereo sampling time as compared to the mono sampling time.


The PDM acquisition can be started by the `START` task, after the `SAMPLE.PTR` and `SAMPLE.MAXCNT` registers have been written. When starting the module, it will take some time for the filters to start outputting valid data. Transients from the PDM microphone itself may also occur. The first few samples (typically around 50) might hence contain invalid values or transients. It is therefore advised to discard the first few samples after a PDM start.

As soon as the `STARTED` event is received, the firmware can write the next `SAMPLE.PTR` value (this register is double-buffered), to ensure continuous operation.


When the buffer in RAM is filled with samples, an `END` event is triggered. The firmware can start processing the data in the buffer. Meanwhile, the PDM module starts acquiring data into the new buffer pointed to by `SAMPLE.PTR`, and sends a new `STARTED` event, so that the firmware can update `SAMPLE.PTR` to the next buffer address.

## 43.5 Hardware example

Connect the microphone clock to `CLK`, and data to `DIN`.

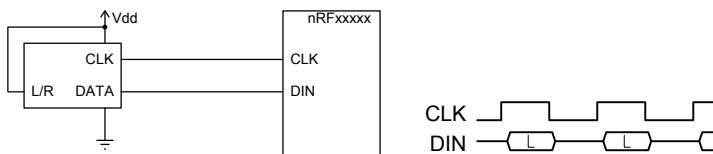


**Figure 127: Example of a single PDM microphone, wired as left**

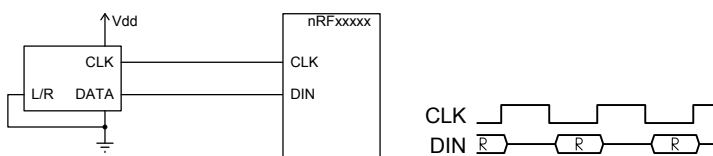

**Figure 128: Example of a single PDM microphone, wired as right**

Note that in a single-microphone (mono) configuration, depending on the microphone's implementation, either the left or the right channel (sampled at falling or rising `CLK` edge respectively) will contain reliable data. If two microphones are used, one of them has to be set as left, the other as right (`L/R` pin tied high or to `GND` on the respective microphone). It is strongly recommended to use two microphones of exactly the same brand and type so that their timings in left and right operation match.

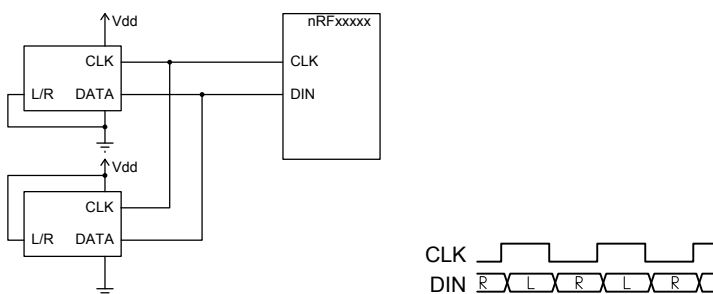

**Figure 129: Example of two PDM microphones**

## 43.6 Pin configuration

The `CLK` and `DIN` signals associated to the PDM module are mapped to physical pins according to the configuration specified in the `PSEL.CLK` and `PSEL.DIN` registers respectively. If the `CONNECT` field in any `PSEL` register is set to `Disconnected`, the associated PDM module signal will not be connected to the required physical pins, and will not operate properly.

The PSEL.CLK and PSEL.DIN registers and their configurations are only used as long as the PDM module is enabled, and retained only as long as the device is in System ON mode. See [POWER — Power supply](#) on page 81 for more information about power modes. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register.

To ensure correct behaviour in the PDM module, the pins used by the PDM module must be configured in the GPIO peripheral as described in [Table 105: GPIO configuration before enabling peripheral](#) on page 443 before enabling the PDM module. This is to ensure that the pins used by the PDM module are driven correctly if the PDM module itself is temporarily disabled or the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected I/Os as long as the PDM module is supposed to be connected to an external PDM circuit.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behaviour.

**Table 105: GPIO configuration before enabling peripheral**

PDM signal	PDM pin	Direction	Output value	Comment
CLK	As specified in PSEL.CLK	Output	0	
DIN	As specified in PSEL.DIN	Input	Not applicable	

## 43.7 Registers

**Table 106: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001D000	PDM	PDM	Pulse Density Modulation (Digital Microphone Interface)	

**Table 107: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Starts continuous PDM transfer
TASKS_STOP	0x004	Stops PDM transfer
EVENTS_STARTED	0x100	PDM transfer has started
EVENTS_STOPPED	0x104	PDM transfer has finished
EVENTS_END	0x108	The PDM has written the last sample specified by SAMPLE.MAXCNT (or the last sample after a STOP task has been received) to Data RAM
<a href="#">INTEN</a>	0x300	Enable or disable interrupt
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">ENABLE</a>	0x500	PDM module enable register
<a href="#">PDMCLKCTRL</a>	0x504	PDM clock generator control
<a href="#">MODE</a>	0x508	Defines the routing of the connected PDM microphones' signals
<a href="#">GAINL</a>	0x518	Left output gain adjustment
<a href="#">GAINR</a>	0x51C	Right output gain adjustment
<a href="#">PSEL.CLK</a>	0x540	Pin number configuration for PDM CLK signal
<a href="#">PSEL.DIN</a>	0x544	Pin number configuration for PDM DIN signal
<a href="#">SAMPLE.PTR</a>	0x560	RAM address pointer to write samples to with EasyDMA
<a href="#">SAMPLE.MAXCNT</a>	0x564	Number of samples to allocate memory for in EasyDMA mode

### 43.7.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	STARTED				Enable or disable interrupt for STARTED event																																
						See <a href="#">EVENTS_STARTED</a>																																
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
B	RW	STOPPED				Enable or disable interrupt for STOPPED event																																
						See <a href="#">EVENTS_STOPPED</a>																																
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
C	RW	END				Enable or disable interrupt for END event																																
						See <a href="#">EVENTS_END</a>																																
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	

### 43.7.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Write '1' to Enable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	END				Write '1' to Enable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 43.7.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Write '1' to Disable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

### 43.7.4 ENABLE

Address offset: 0x500

PDM module enable register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable PDM module																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														

### 43.7.5 PDMCLKCTRL

Address offset: 0x504

PDM clock generator control

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x08400000				0	0	0	0	1	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FREQ				PDM_CLK frequency																													
			1000K		0x08000000	PDM_CLK = 32 MHz / 32 = 1.000 MHz																													
			Default		0x08400000	PDM_CLK = 32 MHz / 31 = 1.032 MHz																													
			1067K		0x08800000	PDM_CLK = 32 MHz / 30 = 1.067 MHz																													

### 43.7.6 MODE

Address offset: 0x508

Defines the routing of the connected PDM microphones' signals

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	OPERATION			Mono or stereo operation																														
			Stereo	0	Sample and store one pair (Left + Right) of 16bit samples per RAM word R=[31:16]; L=[15:0]																														
			Mono	1	Sample and store two successive Left samples (16 bit each) per RAM word L1=[31:16]; L0=[15:0]																														
B	RW	EDGE			Defines on which PDM_CLK edge Left (or mono) is sampled																														
			LeftFalling	0	Left (or mono) is sampled on falling edge of PDM_CLK																														
			LeftRising	1	Left (or mono) is sampled on rising edge of PDM_CLK																														

### 43.7.7 GAINL

Address offset: 0x518

Left output gain adjustment

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000028				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	GAINL			Left output gain adjustment, in 0.5 dB steps, around the default module gain (see electrical parameters)																														
					0x00 -20 dB gain adjust																														
					0x01 -19.5 dB gain adjust																														
					(...)																														
					0x27 -0.5 dB gain adjust																														
					0x28 0 dB gain adjust																														
					0x29 +0.5 dB gain adjust																														
					(...)																														
					0x4F +19.5 dB gain adjust																														
					0x50 +20 dB gain adjust																														
			MinGain	0x00	-20dB gain adjustment (minimum)																														
			DefaultGain	0x28	0dB gain adjustment ('2500 RMS' requirement)																														
			MaxGain	0x50	+20dB gain adjustment (maximum)																														

### 43.7.8 GAINR

Address offset: 0x51C

Right output gain adjustment

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000028				0 1 0 1 0 0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	GAINR			Right output gain adjustment, in 0.5 dB steps, around the default module gain (see electrical parameters)																														
			MinGain	0x00	-20dB gain adjustment (minimum)																														
			DefaultGain	0x28	0dB gain adjustment ('2500 RMS' requirement)																														
			MaxGain	0x50	+20dB gain adjustment (maximum)																														

### 43.7.9 PSEL.CLK

Address offset: 0x540

Pin number configuration for PDM CLK signal

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 43.7.10 PSEL.DIN

Address offset: 0x544

## Pin number configuration for PDM DIN signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	PIN		[0..31]				Pin number																											
B	RW	CONNECT						Connection																											
			Disconnected	1				Disconnect																											
			Connected	0				Connect																											

### 43.7.11 SAMPLE.PTR

Address offset: 0x560

RAM address pointer to write samples to with EasyDMA

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	SAMPLEPTR						Address to write PDM samples to over DMA																											

### 43.7.12 SAMPLE.MAXCNT

Address offset: 0x564

Number of samples to allocate memory for in EasyDMA mode

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Id	RW	Field	Value Id	Value		Description																																								
A	RW	BUFFSIZE		[0..32767]		Length of DMA RAM allocation in number of samples																																								

## 43.8 Electrical specification

### 43.8.1 PDM Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{PDM, stereo}$	PDM module active current, stereo operation <sup>37</sup>		1.4		mA
$f_{PDM, CLK}$	PDM clock speed		1.032		MHz
$t_{PDM, JITTER}$	Jitter in PDM clock output			20	ns
$T_{dPDM, CLK}$	PDM clock duty cycle	40	50	60	%
$t_{PDM, DATA}$	Decimation filter delay			5	ms
$t_{PDM, cv}$	Allowed clock edge to data valid			125	ns
$t_{PDM, ci}$	Allowed (other) clock edge to data invalid	0			ns
$t_{PDM, s}$	Data setup time at $f_{PDM, CLK}=1.024$ MHz	65			ns
$t_{PDM, h}$	Data hold time at $f_{PDM, CLK}=1.024$ MHz	0			ns
$G_{PDM, default}$	Default (reset) absolute gain of the PDM module		3.2		dB

<sup>37</sup> Average current including PDM and DMA transfers, excluding clock and power supply base currents

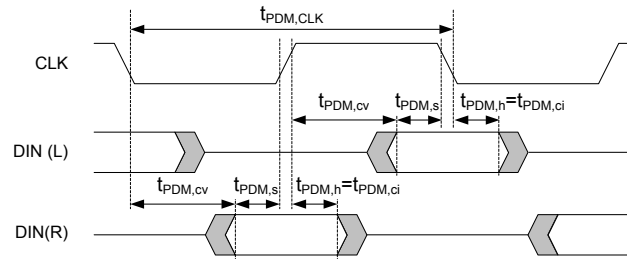


Figure 130: PDM timing diagram



## 44 I<sup>2</sup>S — Inter-IC sound interface

The I<sup>2</sup>S (Inter-IC Sound) module, supports the original two-channel I<sup>2</sup>S format, and left or right-aligned formats. It implements EasyDMA for sample transfer directly to and from RAM without CPU intervention.

The I<sup>2</sup>S peripheral has the following main features:

- Master and Slave mode
- Simultaneous bi-directional (TX and RX) audio streaming
- Original I<sup>2</sup>S and left- or right-aligned format
- 8, 16 and 24-bit sample width
- Low-jitter Master Clock generator
- Various sample rates

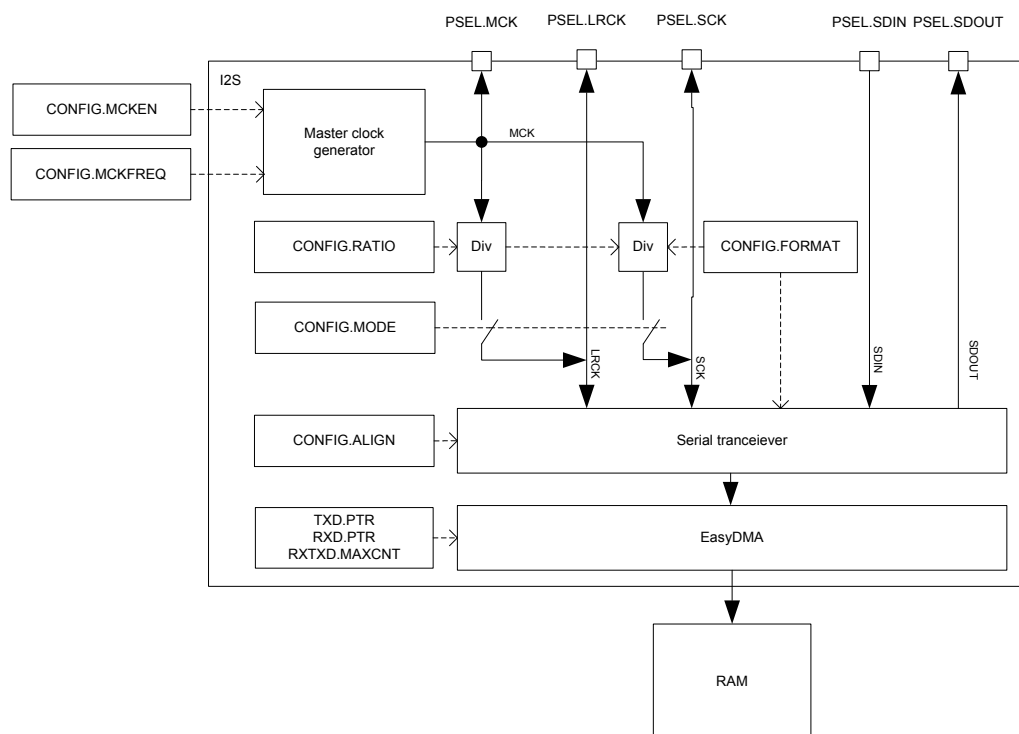


Figure 131: I<sup>2</sup>S master

### 44.1 Mode

The I<sup>2</sup>S protocol specification defines two modes of operation, Master and Slave.

The I<sup>2</sup>S mode decides which of the two sides (Master or Slave) shall provide the clock signals LRCK and SCK, and these signals are always supplied by the Master to the Slave.


### 44.2 Transmitting and receiving

The I<sup>2</sup>S module supports both transmission (TX) and reception (RX) of serial data. In both cases the serial data is shifted synchronously to the clock signals SCK and LRCK.

TX data is written to the SDOUT pin on the falling edge of SCK, and RX data is read from the SDIN pin on the rising edge of SCK. The most significant bit (MSB) is always transmitted first.

TX and RX are available in both Master and Slave modes and can be enabled/disabled independently in the [CONFIG.TXEN](#) on page 459 and [CONFIG.RXEN](#) on page 459.

Transmission and/or reception is started by triggering the START task. When started and transmission is enabled (in [CONFIG.TXEN](#) on page 459), the TXPTRUPD event will be generated for every [RXTXD.MAXCNT](#) on page 462 number of transmitted data words (containing one or more samples). Similarly, when started and reception is enabled (in [CONFIG.RXEN](#) on page 459), the RXPTRUPD event will be generated for every [RXTXD.MAXCNT](#) on page 462 received data words.

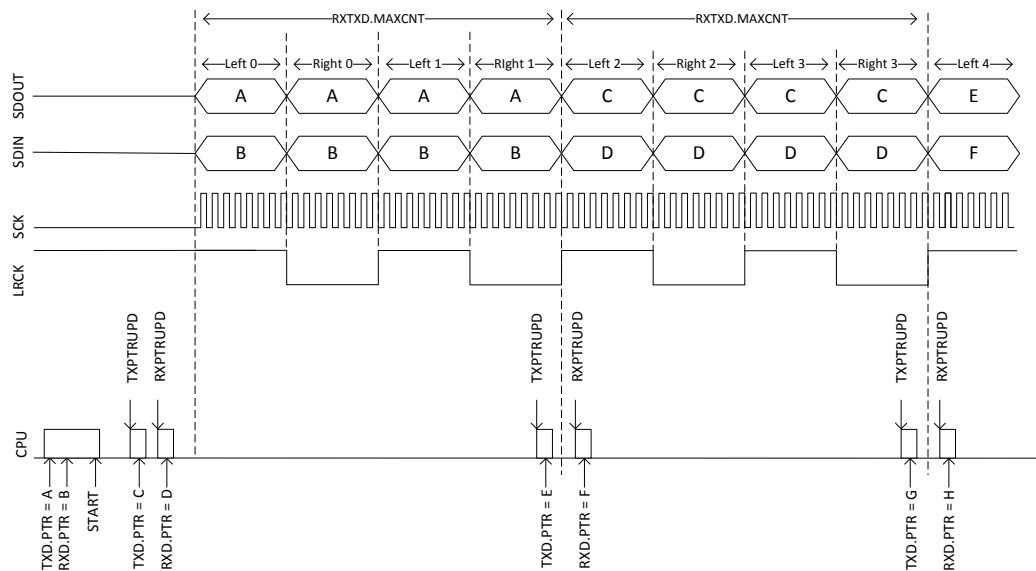

**Figure 132: Transmitting and receiving. CONFIG.FORMAT = Aligned, CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo, RXTXD.MAXCNT = 1.**

### 44.3 Left right clock (LRCK)

The Left Right Clock (LRCK), often referred to as "word clock", "sample clock" or "word select" in I<sup>2</sup>S context, is the clock defining the frames in the serial bit streams sent and received on SDOUT and SDIN, respectively.

In I<sup>2</sup>S mode, each frame contains one left and right sample pair, with the left sample being transferred during the low half period of LRCK followed by the right sample being transferred during the high period of LRCK.

In Aligned mode, each frame contains one left and right sample pair, with the left sample being transferred during the high half period of LRCK followed by the right sample being transferred during the low period of LRCK.

Consequently, the LRCK frequency is equivalent to the audio sample rate.

When operating in Master mode, the LRCK is generated from the MCK, and the frequency of LRCK is then given as:

$$\text{LRCK} = \text{MCK} / \text{CONFIG.RATIO}$$

LRCK always toggles around the falling edge of the serial clock SCK.

### 44.4 Serial clock (SCK)

The serial clock (SCK), often referred to as the serial bit clock, pulses once for each data bit being transferred on the serial data lines SDIN and SDOUT.

When operating in Master mode the SCK is generated from the MCK, and the frequency of SCK is then given as:

$$SCK = 2 * LRCK * CONFIG.SWIDTH$$

The falling edge of the SCK falls on the toggling edge of LRCK.

When operating in Slave mode SCK is provided by the external I<sup>2</sup>S master.

## 44.5 Master clock (MCK)

The master clock (MCK) is the clock from which LRCK and SCK are derived when operating in Master mode.

The MCK is generated by an internal MCK generator. This generator always needs to be enabled when in Master mode, but the generator can also be enabled when in Slave mode. Enabling the generator when in slave mode can be useful in the case where the external Master is not able to generate its own master clock.

The MCK generator is enabled/disabled in the register [CONFIG.MCKEN](#) on page 460, and the generator is started or stopped by the START or STOP tasks.

In Master mode the LRCK and the SCK frequencies are closely related, as both are derived from MCK and set indirectly through [CONFIG.RATIO](#) on page 460 and [CONFIG.SWIDTH](#) on page 461.

When configuring these registers, the user is responsible for fulfilling the following requirements:

1. SCK frequency can never exceed the MCK frequency, which can be formulated as:

$$CONFIG.RATIO \geq 2 * CONFIG.SWIDTH$$

2. The MCK/LRCK ratio shall be a multiple of  $2 * CONFIG.SWIDTH$ , which can be formulated as:

$$Integer = (CONFIG.RATIO / (2 * CONFIG.SWIDTH))$$

The MCK signal can be routed to an output pin (specified in PSEL.MCK) to supply external I<sup>2</sup>S devices that require the MCK to be supplied from the outside.

When operating in Slave mode, the I<sup>2</sup>S module does not use the MCK and the MCK generator does not need to be enabled.

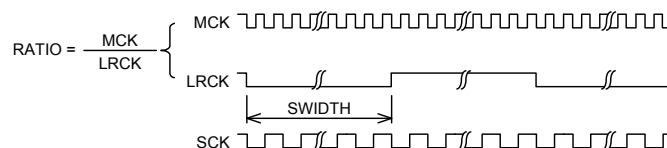


Figure 133: Relation between RATIO, MCK and LRCK.

Table 108: Configuration examples

Desired LRCK [Hz]	CONFIG.SWIDTH	CONFIG.RATIO	CONFIG.MCKFREQ	MCK [Hz]	LRCK [Hz]	LRCK error [%]
16000	16Bit	32X	32MDIV63	507936.5	15873.0	-0.8
16000	16Bit	64X	32MDIV31	1032258.1	16129.0	0.8
16000	16Bit	256X	32MDIV8	4000000.0	15625.0	-2.3
32000	16Bit	32X	32MDIV31	1032258.1	32258.1	0.8
32000	16Bit	64X	32MDIV16	2000000.0	31250.0	-2.3
32000	16Bit	256X	32MDIV4	8000000.0	31250.0	-2.3
44100	16Bit	32X	32MDIV23	1391304.3	43478.3	-1.4
44100	16Bit	64X	32MDIV11	2909090.9	45454.5	3.1
44100	16Bit	256X	32MDIV3	10666666.7	41666.7	-5.5

## 44.6 Width, alignment and format

The CONFIG.SWIDTH register primarily defines the sample width of the data written to memory. In master mode, it then also sets the amount of bits per frame. In Slave mode it controls padding/trimming if required. Left, right, transmitted, and received samples always have the same width. The CONFIG.FORMAT register specifies the position of the data frames with respect to the LRCK edges in both Master and Slave modes.

When using I<sup>2</sup>S format, the first bit in a half-frame (containing one left or right sample) gets sampled on the second rising edge of the SCK after a LRCK edge. When using Aligned mode, the first bit in a half-frame gets sampled on the first rising edge of SCK following a LRCK edge.

For data being received on SDIN the sample value can be either right or left-aligned inside a half-frame, as specified in [CONFIG.ALIGN](#) on page 461. [CONFIG.ALIGN](#) on page 461 affects only the decoding of the incoming samples (SDIN), while the outgoing samples (SDOUT) are always left-aligned (or justified).

When using left-alignment, each half-frame starts with the MSB of the sample value (both for data being sent on SDOUT and received on SDIN).

When using right-alignment, each half-frame of data being received on SDIN ends with the LSB of the sample value, while each half-frame of data being sent on SDOUT starts with the MSB of the sample value (same as for left-alignment).

In Master mode, the size of a half-frame (in number of SCK periods) equals the sample width (in number of bits), and in this case the alignment setting does not care as each half-frame in any case will start with the MSB and end with the LSB of the sample value.

In slave mode, however, the sample width does not need to equal the frame size. This means you might have extra or fewer SCK pulses per half-frame than what the sample width specified in [CONFIG.SWIDTH](#) requires.

In the case where we use **left-alignment** and the number of SCK pulses per half-frame is **higher** than the sample width, the following will apply:

- For data received on SDIN, all bits after the LSB of the sample value will be discarded.
- For data sent on SDOUT, all bits after the LSB of the sample value will be 0.

In the case where we use **left-alignment** and the number of SCK pulses per frame is **lower** than the sample width, the following will apply:


- Data sent and received on SDOUT and SDIN will be truncated with the LSBs being removed first.

In the case where we use **right-alignment** and the number of SCK pulses per frame is **higher** than the sample width, the following will apply:


- For data received on SDIN, all bits before the MSB of the sample value will be discarded.
- For data sent on SDOUT, all bits after the LSB of the sample value will be 0 (same behavior as for left-alignment).

In the case where we use **right-alignment** and the number of SCK pulses per frame is **lower** than the sample width, the following will apply:

- Data received on SDIN will be sign-extended to "sample width" number of bits before being written to memory.
- Data sent on SDOUT will be truncated with the LSBs being removed first (same behavior as for left-alignment).

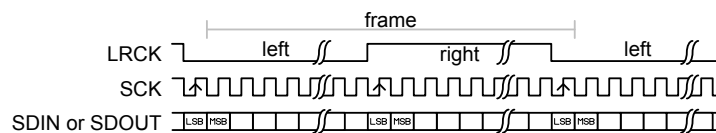

**Figure 134: I<sup>2</sup>S format. CONFIG.SWIDTH equalling half-frame size.**

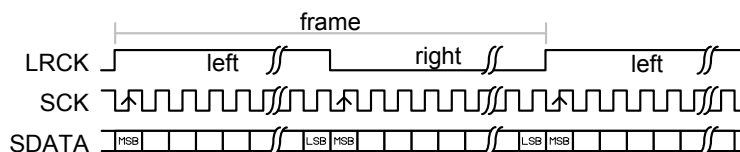

**Figure 135: Aligned format. CONFIG.SWIDTH equalling half-frame size.**

## 44.7 EasyDMA

The I<sup>2</sup>S module implements EasyDMA for accessing internal Data RAM without CPU intervention.

The source and destination pointers for the TX and RX data are configured in [TXD.PTR](#) on page 462 and [RXD.PTR](#) on page 462. The memory pointed to by these pointers will only be read or written when TX or RX are enabled in [CONFIG.TXEN](#) on page 459 and [CONFIG.RXEN](#) on page 459.

The addresses written to the pointer registers [TXD.PTR](#) on page 462 and [RXD.PTR](#) on page 462 are double-buffered in hardware, and these double buffers are updated for every [RXTXD.MAXCNT](#) on page 462 words (containing one or more samples) read/written from/to memory. The events TXPTRUPD and RXPTRUPD are generated whenever the TXD.PTR and RXD.PTR are transferred to these double buffers.

If [TXD.PTR](#) on page 462 is not pointing to the Data RAM region when transmission is enabled, or [RXD.PTR](#) on page 462 is not pointing to the Data RAM region when reception is enabled, an EasyDMA transfer may result in a HardFault and/or memory corruption. See [Memory](#) on page 24 for more information about the different memory regions.

Due to the nature of I<sup>2</sup>S, where the number of transmitted samples always equals the number of received samples (at least when both TX and RX are enabled), one common register [RXTXD.MAXCNT](#) on page 462 is used for specifying the sizes of these two memory buffers. The size of the buffers is specified in a number of 32-bit words. Such a 32-bit memory word can either contain four 8-bit samples, two 16-bit samples or one right-aligned 24-bit sample sign extended to 32 bit.


In stereo mode (CONFIG.CHANNELS=Stereo), the samples are stored as "left and right sample pairs" in memory. Figure [Figure 136: Memory mapping for 8 bit stereo. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo.](#) on page 453, [Figure 138: Memory mapping for 16 bit stereo. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Stereo.](#) on page 454 and [Figure 140: Memory mapping for 24 bit stereo. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Stereo.](#) on page 454 show how the samples are mapped to memory in this mode. The mapping is valid for both RX and TX.

In mono mode (CONFIG.CHANNELS=Left or Right), RX sample from only one channel in the frame is stored in memory, the other channel sample is ignored. Illustrations [Figure 137: Memory mapping for 8 bit mono. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Left.](#) on page 454, [Figure 139: Memory mapping for 16 bit mono, left channel only. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Left.](#) on page 454 and [Figure 141: Memory mapping for 24 bit mono, left channel only. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Left.](#) on page 455 show how RX samples are mapped to memory in this mode.


For TX, the same outgoing sample read from memory is transmitted on both left and right in a frame, resulting in a mono output stream.

	31	24 23	16 15	8 7	0
x.PTR	Right sample 1	Left sample 1	Right sample 0	Left sample 0	
x.PTR + 4	Right sample 3	Left sample 3	Right sample 2	Left sample 2	
x.PTR + (n*2) - 4	Left sample n-1	Right sample n-1	Right sample n-2	Left sample n-2	


**Figure 136: Memory mapping for 8 bit stereo. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo.**

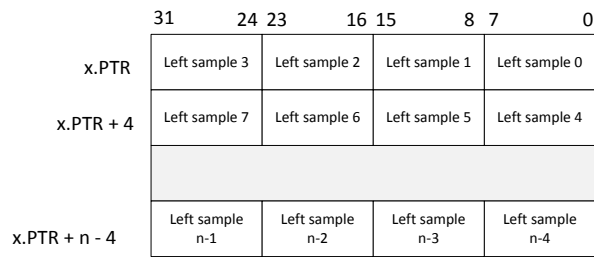


**Figure 137: Memory mapping for 8 bit mono. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Left.**

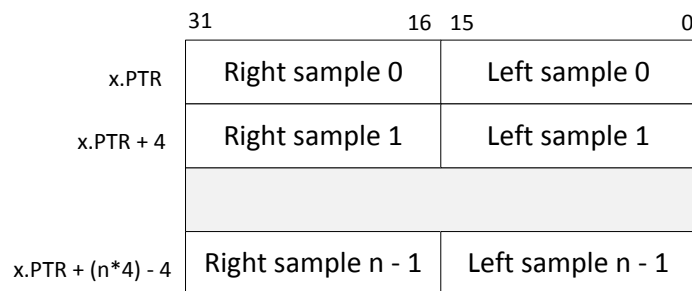


**Figure 138: Memory mapping for 16 bit stereo. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Stereo.**

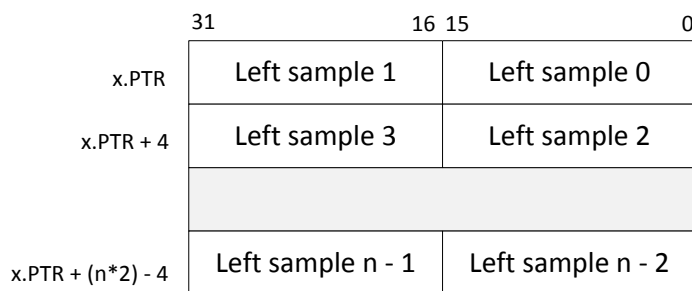

**Figure 139: Memory mapping for 16 bit mono, left channel only. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Left.**

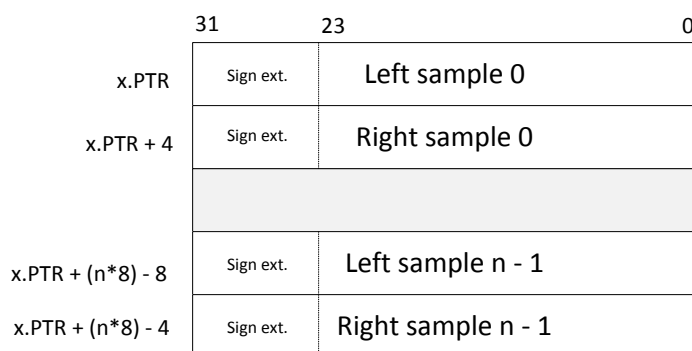

**Figure 140: Memory mapping for 24 bit stereo. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Stereo.**

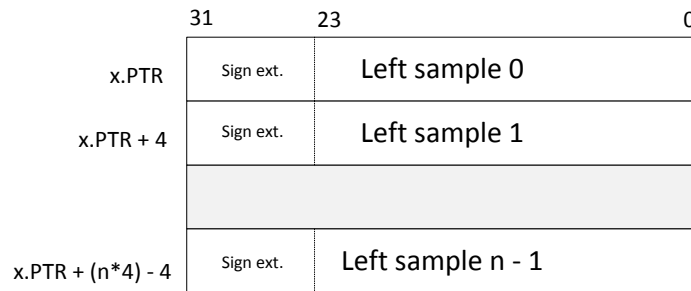

**Figure 141: Memory mapping for 24 bit mono, left channel only. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Left.**

## 44.8 Module operation

Described here is a typical operating procedure for the I<sup>2</sup>S module.

### 1. Configure the I<sup>2</sup>S module using the CONFIG registers

```
// Enable reception
NRF_I2S->CONFIG.RXEN = (I2S_CONFIG_RXEN_RXEN_Enabled <<
                        I2S_CONFIG_RXEN_RXEN_Pos);

// Enable transmission
NRF_I2S->CONFIG.TXEN = (I2S_CONFIG_TXEN_TXEN_Enabled <<
                        I2S_CONFIG_TXEN_TXEN_Pos);

// Enable MCK generator
NRF_I2S->CONFIG.MCKEN = (I2S_CONFIG_MCKEN_MCKEN_Enabled <<
                        I2S_CONFIG_MCKEN_MCKEN_Pos);

// MCKFREQ = 4 MHz
NRF_I2S->CONFIG.MCKFREQ = I2S_CONFIG_MCKFREQ_MCKFREQ_32MDIV8 <<
                        I2S_CONFIG_MCKFREQ_MCKFREQ_Pos;

// Ratio = 256
NRF_I2S->CONFIG.RATIO = I2S_CONFIG_RATIO_RATIO_256X <<
                        I2S_CONFIG_RATIO_RATIO_Pos;

// MCKFREQ = 4 MHz and Ratio = 256 gives sample rate = 15.625 ks/s
// Sample width = 16 bit
NRF_I2S->CONFIG.SWIDTH = I2S_CONFIG_SWIDTH_SWIDTH_16Bit <<
                        I2S_CONFIG_SWIDTH_SWIDTH_Pos;

// Alignment = Left
NRF_I2S->CONFIG.ALIGN = I2S_CONFIG_ALIGN_ALIGN_Left <<
                        I2S_CONFIG_ALIGN_ALIGN_Pos;

// Format = I2S
NRF_I2S->CONFIG.FORMAT = I2S_CONFIG_FORMAT_FORMAT_I2S <<
                        I2S_CONFIG_FORMAT_FORMAT_Pos;

// Use stereo
NRF_I2S->CONFIG.CHANNELS = I2S_CONFIG_CHANNELS_CHANNELS_Stereo <<
                        I2S_CONFIG_CHANNELS_CHANNELS_Pos;
```

### 2. Map IO pins using the PINSEL registers

```
// MCK routed to pin 0
NRF_I2S->PSEL.MCK = (0 << I2S_PSEL_MCK_PIN_Pos) |
                    (I2S_PSEL_MCK_CONNECT_Connected <<
                     I2S_PSEL_MCK_CONNECT_Pos);

// SCK routed to pin 1
NRF_I2S->PSEL.SCK = (1 << I2S_PSEL_SCK_PIN_Pos) |
                    (I2S_PSEL_SCK_CONNECT_Connected <<
                     I2S_PSEL_SCK_CONNECT_Pos);

// LRCK routed to pin 2
NRF_I2S->PSEL.LRCK = (2 << I2S_PSEL_LRCK_PIN_Pos) |
                    (I2S_PSEL_LRCK_CONNECT_Connected <<
```

```

    I2S_PSEL_LRCK_CONNECT_Pos);
// SDOUT routed to pin 3
NRF_I2S->PSEL.SDOUT = (3 << I2S_PSEL_SDOUT_PIN_Pos) |
                      (I2S_PSEL_SDOUT_CONNECT_Connected <<

    I2S_PSEL_SDOUT_CONNECT_Pos);
// SDIN routed on pin 4
NRF_I2S->PSEL.SDIN = (4 << I2S_PSEL_SDIN_PIN_Pos) |
                    (I2S_PSEL_SDIN_CONNECT_Connected <<

    I2S_PSEL_SDIN_CONNECT_Pos);

```

### 3. Configure TX and RX data pointers using the TXD, RXD and RXTXD registers

```

NRF_I2S->TXD.PTR = my_tx_buf;
NRF_I2S->RXD.PTR = my_rx_buf;
NRF_I2S->TXD.MAXCNT = MY_BUF_SIZE;

```

### 4. Enable the I<sup>2</sup>S module using the ENABLE register

```

NRF_I2S->ENABLE = 1;

```

### 5. Start audio streaming using the START task

```

NRF_I2S->TASKS_START = 1;

```

### 6. Handle received and transmitted data when receiving the TXPTRUPD and RXPTRUPD events

```

if(NRF_I2S->EVENTS_TXPTRUPD != 0)
{
    NRF_I2S->TXD.PTR = my_next_tx_buf;
    NRF_I2S->EVENTS_TXPTRUPD = 0;
}

if(NRF_I2S->EVENTS_RXPTRUPD != 0)
{
    NRF_I2S->RXD.PTR = my_next_rx_buf;
    NRF_I2S->EVENTS_RXPTRUPD = 0;
}

```

## 44.9 Pin configuration

The MCK, SCK, LRCK, SDIN and SDOUT signals associated with the I<sup>2</sup>S module are mapped to physical pins according to the pin numbers specified in the PSEL.x registers.

These pins are acquired whenever the I<sup>2</sup>S module is enabled through the register [ENABLE](#) on page 459.

When a pin is acquired by the I<sup>2</sup>S module, the direction of the pin (input or output) will be configured automatically, and any pin direction setting done in the GPIO module will be overridden. The directions for the various I<sup>2</sup>S pins are shown below in [Table 109: GPIO configuration before enabling peripheral \(master mode\)](#) on page 456 and [Table 110: GPIO configuration before enabling peripheral \(slave mode\)](#) on page 457.

To secure correct signal levels on the pins when the system is in OFF mode, and when the I<sup>2</sup>S module is disabled, these pins must be configured in the GPIO peripheral directly.

**Table 109: GPIO configuration before enabling peripheral (master mode)**

I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
MCK	As specified in PSEL.MCK	Output	0	
LRCK	As specified in PSEL.LRCK	Output	0	



I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
SCK	As specified in PSEL.SCK	Output	0	
SDIN	As specified in PSEL.SDIN	Input	Not applicable	
SDOUT	As specified in PSEL.SDOUT	Output	0	

**Table 110: GPIO configuration before enabling peripheral (slave mode)**

I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
MCK	As specified in PSEL.MCK	Output	0	
LRCK	As specified in PSEL.LRCK	Input	Not applicable	
SCK	As specified in PSEL.SCK	Input	Not applicable	
SDIN	As specified in PSEL.SDIN	Input	Not applicable	
SDOUT	As specified in PSEL.SDOUT	Output	0	

## 44.10 Registers

**Table 111: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40025000	I2S	I2S	Inter-IC Sound Interface	

**Table 112: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Starts continuous I2S transfer. Also starts MCK generator when this is enabled.
TASKS_STOP	0x004	Stops I2S transfer. Also stops MCK generator. Triggering this task will cause the {event:STOPPED} event to be generated.
EVENTS_RXPTRUPD	0x104	The RXD.PTR register has been copied to internal double-buffers. When the I2S module is started and RX is enabled, this event will be generated for every RXTXD.MAXCNT words that are received on the SDIN pin.
EVENTS_STOPPED	0x108	I2S transfer stopped.
EVENTS_TXPTRUPD	0x114	The TDX.PTR register has been copied to internal double-buffers. When the I2S module is started and TX is enabled, this event will be generated for every RXTXD.MAXCNT words that are sent on the SDOUT pin.
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>ENABLE</i>	0x500	Enable I2S module.
<i>CONFIG.MODE</i>	0x504	I2S mode.
<i>CONFIG.RXEN</i>	0x508	Reception (RX) enable.
<i>CONFIG.TXEN</i>	0x50C	Transmission (TX) enable.
<i>CONFIG.MCKEN</i>	0x510	Master clock generator enable.
<i>CONFIG.MCKFREQ</i>	0x514	Master clock generator frequency.
<i>CONFIG.RATIO</i>	0x518	MCK / LRCK ratio.
<i>CONFIG.SWIDTH</i>	0x51C	Sample width.
<i>CONFIG.ALIGN</i>	0x520	Alignment of sample within a frame.
<i>CONFIG.FORMAT</i>	0x524	Frame format.
<i>CONFIG.CHANNELS</i>	0x528	Enable channels.
<i>RXD.PTR</i>	0x538	Receive buffer RAM start address.
<i>TXD.PTR</i>	0x540	Transmit buffer RAM start address.
<i>RXTXD.MAXCNT</i>	0x550	Size of RXD and TXD buffers.
<i>PSEL.MCK</i>	0x560	Pin select for MCK signal.
<i>PSEL.SCK</i>	0x564	Pin select for SCK signal.
<i>PSEL.LRCK</i>	0x568	Pin select for LRCK signal.
<i>PSEL.SDIN</i>	0x56C	Pin select for SDIN signal.
<i>PSEL.SDOUT</i>	0x570	Pin select for SDOUT signal.

### 44.10.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
B	RW	RXPTRUPD				Enable or disable interrupt for RXPTRUPD event																													
						See <a href="#">EVENTS_RXPTRUPD</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
C	RW	STOPPED				Enable or disable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
F	RW	TXPTRUPD				Enable or disable interrupt for TXPTRUPD event																													
						See <a href="#">EVENTS_TXPTRUPD</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													

## 44.10.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																						
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																															
B	RW	RXPTRUPD					Write '1' to Enable interrupt for RXPTRUPD event																															
							See <a href="#">EVENTS_RXPTRUPD</a>																															
			Set		1		Enable																															
			Disabled		0		Read: Disabled																															
			Enabled		1		Read: Enabled																															
C	RW	STOPPED					Write '1' to Enable interrupt for STOPPED event																															
							See <a href="#">EVENTS_STOPPED</a>																															
			Set		1		Enable																															
			Disabled		0		Read: Disabled																															
			Enabled		1		Read: Enabled																															
F	RW	TXPTRUPD					Write '1' to Enable interrupt for TXPTRUPD event																															
							See <a href="#">EVENTS_TXPTRUPD</a>																															
			Set		1		Enable																															
			Disabled		0		Read: Disabled																															
			Enabled		1		Read: Enabled																															

## 44.10.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
B	RW	RXPTRUPD				Write '1' to Disable interrupt for RXPTRUPD event																													
						See <a href="#">EVENTS_RXPTRUPD</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
F	RW	TXPTRUPD				Write '1' to Disable interrupt for TXPTRUPD event																													
						See <a href="#">EVENTS_TXPTRUPD</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

## 44.10.4 ENABLE

Address offset: 0x500

Enable I2S module.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																			A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value																															Description
A	RW	ENABLE																																		Enable I2S module.
			Disabled	0																																Disable
			Enabled	1																																Enable

## 44.10.5 CONFIG.MODE

Address offset: 0x504

I2S mode.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MODE																																	
			Master	0	I2S mode.																														
					Master mode. SCK and LRCK generated from internal master																														
					clkck (MCK) and output on pins defined by PSEL.xxx.																														
			Slave	1	Slave mode. SCK and LRCK generated by external master and																														
					received on pins defined by PSEL.xxx																														

## 44.10.6 CONFIG.RXEN

Address offset: 0x508

Reception (RX) enable.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	RXEN																																	
			Disabled	0	Reception (RX) enable.																														
					Reception disabled and now data will be written to the RXD.PTR address.																														
			Enabled	1	Reception enabled.																														

## 44.10.7 CONFIG.TXEN

Address offset: 0x50C

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																													
A	RW	TXEN																																		
			Disabled	0			Transmission (TX) enable.																													
			Enabled	1			Transmission disabled and now data will be read from the RXD.TXD address.																													
							Transmission enabled.																													

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A																															
Reset 0x00000001	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value		Id	Value		Description																								
A	RW	MCKEN	Enabled			1		Master clock generator running and MCK output on PSEL.MCK.																								
			Disabled			0		Master clock generator disabled and PSEL.MCK not connected(available as GPIO).																								

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x20000000				0 0 0 1 0																															
Id	RW	Field	Value Id	Value																Description															
A	RW	MCKFREQ																		Master clock generator frequency.															
			32MDIV2	0x80000000																32 MHz / 2 = 16.0 MHz															
			32MDIV3	0x50000000																32 MHz / 3 = 10.6666667 MHz															
			32MDIV4	0x40000000																32 MHz / 4 = 8.0 MHz															
			32MDIV5	0x30000000																32 MHz / 5 = 6.4 MHz															
			32MDIV6	0x28000000																32 MHz / 6 = 5.3333333 MHz															
			32MDIV8	0x20000000																32 MHz / 8 = 4.0 MHz															
			32MDIV10	0x18000000																32 MHz / 10 = 3.2 MHz															
			32MDIV11	0x16000000																32 MHz / 11 = 2.9090909 MHz															
			32MDIV15	0x11000000																32 MHz / 15 = 2.1333333 MHz															
			32MDIV16	0x10000000																32 MHz / 16 = 2.0 MHz															
			32MDIV21	0x0C000000																32 MHz / 21 = 1.5238095															
			32MDIV23	0x0B000000																32 MHz / 23 = 1.3913043 MHz															
			32MDIV30	0x08800000																32 MHz / 30 = 1.0666667 MHz															
			32MDIV31	0x08400000																32 MHz / 31 = 1.0322581 MHz															
			32MDIV32	0x08000000																32 MHz / 32 = 1.0 MHz															
			32MDIV42	0x06000000																32 MHz / 42 = 0.7619048 MHz															
			32MDIV63	0x04100000																32 MHz / 63 = 0.5079365 MHz															
			32MDIV125	0x020C0000																32 MHz / 125 = 0.256 MHz															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																					A	A	A	A
Reset 0x00000006					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0				
Id	RW	Field	Value	Id	Value	Description																																		
A	RW	RATIO				MCK / LRCK ratio.																																		
			32X		0	LRCK = MCK / 32																																		
			48X		1	LRCK = MCK / 48																																		
			64X		2	LRCK = MCK / 64																																		
			96X		3	LRCK = MCK / 96																																		
			128X		4	LRCK = MCK / 128																																		
			192X		5	LRCK = MCK / 192																																		
			256X		6	LRCK = MCK / 256																																		
			384X		7	LRCK = MCK / 384																																		
			512X		8	LRCK = MCK / 512																																		

### 44.10.11 CONFIG.SWIDTH

Address offset: 0x51C

Sample width.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																						A	A				
Reset 0x00000001										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	SWIDTH				Sample width.																																					
			8Bit		0	8 bit.																																					
			16Bit		1	16 bit.																																					
			24Bit		2	24 bit.																																					

### 44.10.12 CONFIG.ALIGN

Address offset: 0x520

Alignment of sample within a frame.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ALIGN				Alignment of sample within a frame.																														
			Left		0	Left-aligned.																														
			Right		1	Right-aligned.																														

### 44.10.13 CONFIG.FORMAT

Address offset: 0x524

Frame format.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FORMAT				Frame format.																													
			I2S		0	Original I2S format.																													
			Aligned		1	Alternate (left- or right-aligned) format.																													

### 44.10.14 CONFIG.CHANNELS

Address offset: 0x528

Enable channels.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CHANNELS				Enable channels.																													
			Stereo	0		Stereo.																													
			Left	1		Left only.																													
			Right	2		Right only.																													

### 44.10.15 RXD.PTR

Address offset: 0x538

Receive buffer RAM start address.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PTR					Receive buffer Data RAM start address. When receiving, words containing samples will be written to this address. This address is a word aligned Data RAM address.																													

### 44.10.16 TXD.PTR

Address offset: 0x540

Transmit buffer RAM start address.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PTR				Transmit buffer Data RAM start address. When transmitting, words containing samples will be fetched from this address. This address is a word aligned Data RAM address.																													

### 44.10.17 RXTXD.MAXCNT

Address offset: 0x550

Size of RXD and TXD buffers.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 44.10.18 PSEL.MCK

Address offset: 0x560

Pin select for MCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id				C																																A				A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1								
Id	RW	Field	Value	Id	Value			Description																																			
A	RW	PIN			[0..31]			Pin number																																			
C	RW	CONNECT						Connection																																			
			Disconnected		1			Disconnect																																			
			Connected		0			Connect																																			

### 44.10.19 PSEL.SCK

Address offset: 0x564

Pin select for SCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																												
Id				C																																A				A				A				A															
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1				1			
Id	RW	Field	Value Id	Value				Description																																																							
A	RW	PIN		[0..31]				Pin number																																																							
C	RW	CONNECT						Connection																																																							
			Disconnected	1				Disconnect																																																							
			Connected	0				Connect																																																							

### 44.10.20 PSEL.LRCK

Address offset: 0x568

Pin select for LRCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id				C																																A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1					
Id	RW	Field	Value Id	Value	Description																																			
A	RW	PIN		[0..31]	Pin number																																			
C	RW	CONNECT			Connection																																			
			Disconnected	1	Disconnect																																			
			Connected	0	Connect																																			

### 44.10.21 PSEL.SDIN

Address offset: 0x56C

Pin select for SDIN signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																								
Id				C																																A				A				A				A											
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1			
Id	RW	Field	Value Id	Value				Description																																																			
A	RW	PIN		[0..31]				Pin number																																																			
C	RW	CONNECT						Connection																																																			
			Disconnected	1				Disconnect																																																			
			Connected	0				Connect																																																			

### 44.10.22 PSEL.SDOUT

Address offset: 0x570

Pin select for SDOUT signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				C																																A				A				A				A																			
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1				1				1			
Id	RW	Field	Value Id	Value				Description																																																											
A	RW	PIN		[0..31]				Pin number																																																											
C	RW	CONNECT						Connection																																																											
			Disconnected	1				Disconnect																																																											
			Connected	0				Connect																																																											

## 44.11 Electrical specification

### 44.11.1 I2S timing specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{S\_SDIN}$	SDIN setup time before SCK rising	20			ns
$t_{H\_SDIN}$	SDIN hold time after SCK rising	15			ns
$t_{S\_SDOUT}$	SDOUT setup time after SCK falling	40			ns
$t_{H\_SDOUT}$	SDOUT hold time before SCK falling	6			ns
$t_{SCK\_LRCK}$	SCLK falling to LRCK edge	-5	0	5	ns
$f_{MCK}$	MCK frequency			4000	kHz
$f_{LRCK}$	LRCK frequency			48	kHz
$f_{SCK}$	SCK frequency			2000	kHz
$DC_{CK}$	Clock duty cycle (MCK, LRCK, SCK)	45		55	%

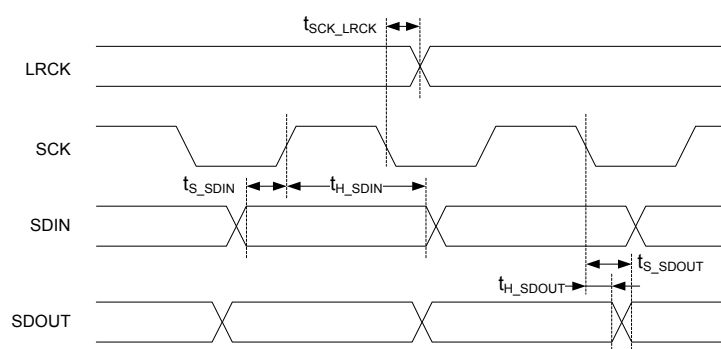


Figure 142: I2S timing diagram



## 45 MWU — Memory watch unit

The Memory watch unit (MWU) can be used to generate events when a memory region is accessed by the CPU. The MWU can be configured to trigger events for access to Data RAM and Peripheral memory segments. The MWU allows an application developer to generate memory access events during development for debugging or during production execution for failure detection and recovery.

Listed here are the main features for MWU:

- Six memory regions, four user-configurable and two fixed regions in peripheral address space
- Flexible configuration of regions with START and END addresses
- Generate events on CPU read and/or write to a defined region of Data RAM or peripheral memory address space
- Programmable maskable or non-maskable (NMI) interrupt on events
- Peripheral interfaces can be watched for read and write access using subregions of the two fixed memory regions

**Table 113: Memory regions**

Memory region	START address	END address
REGION[0..3]	Configurable	Configurable
PREGION[0]	0x40000000	0x4001FFFF
PREGION[1]	0x40020000	0x4003FFFF

Each MWU region is defined by a start address and an end address, configured by the START and END registers respectively. These addresses are byte aligned and inclusive. The END register value has to be greater or equal to the START register value. Each region is associated with a pair of events that indicate that either a write access or a read access from the CPU has been detected inside the region.

For regions containing subregions (see below), a set of status registers PERREGION[0..1].SUBSTATWA and PERREGION[0..1].SUBSTATRA indicate which subregion(s) caused the EVENT\_PREGION[0..1].WA and EVENT\_PREGION[0..1].RA respectively.

The MWU is only able to detect memory accesses in the Data RAM and Peripheral memory segments from the CPU, see [Memory](#) on page 24 for more information about the different memory segments. EasyDMA accesses are not monitored by the MWU. The MWU requires two HCLK cycles to detect and generate the event.

The peripheral regions, PREGION[0..1], are divided into 32 equally sized subregions, SR[0..31]. All subregions are excluded in the main region by default, and any can be included by specifying them in the SUBS register. When a subregion is excluded from the main region, the memory watch mechanism will not trigger any events when that subregion is accessed.

Subregions in PREGION[0..1] cannot be individually configured for read or write access watch. Watch configuration is only possible for a region as a whole. The PRGNiRA and PRGNiWA (i=0..1) fields in the REGIONEN register control watching read and write access.

REGION[0..3] can be individually enabled for read and/or write access watching through their respective RGNiRA and RGNiWA (i=0..3) fields in the REGIONEN register.

REGIONENSET and REGIONENCLR allow respectively enabling and disabling one or multiple REGIONs or PREGIONs watching in a single write access.

### 45.1 Registers

**Table 114: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40020000	MWU	MWU	Memory Watch Unit	

**Table 115: Register Overview**

Register	Offset	Description
EVENTS_REGION[0].WA	0x100	Write access to region 0 detected
EVENTS_REGION[0].RA	0x104	Read access to region 0 detected
EVENTS_REGION[1].WA	0x108	Write access to region 1 detected
EVENTS_REGION[1].RA	0x10C	Read access to region 1 detected
EVENTS_REGION[2].WA	0x110	Write access to region 2 detected
EVENTS_REGION[2].RA	0x114	Read access to region 2 detected
EVENTS_REGION[3].WA	0x118	Write access to region 3 detected
EVENTS_REGION[3].RA	0x11C	Read access to region 3 detected
EVENTS_PREGION[0].WA	0x160	Write access to peripheral region 0 detected
EVENTS_PREGION[0].RA	0x164	Read access to peripheral region 0 detected
EVENTS_PREGION[1].WA	0x168	Write access to peripheral region 1 detected
EVENTS_PREGION[1].RA	0x16C	Read access to peripheral region 1 detected
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
NMIEN	0x320	Enable or disable non-maskable interrupt
NMIENSET	0x324	Enable non-maskable interrupt
NMIENCLR	0x328	Disable non-maskable interrupt
PERREGION[0].SUBSTAT	0x400	Source of event/interrupt in region 0, write access detected while corresponding subregion was enabled for watching
PERREGION[0].SUBSTAT	0x404	Source of event/interrupt in region 0, read access detected while corresponding subregion was enabled for watching
PERREGION[1].SUBSTAT	0x408	Source of event/interrupt in region 1, write access detected while corresponding subregion was enabled for watching
PERREGION[1].SUBSTAT	0x40C	Source of event/interrupt in region 1, read access detected while corresponding subregion was enabled for watching
REGIONEN	0x510	Enable/disable regions watch
REGIONENSET	0x514	Enable regions watch
REGIONENCLR	0x518	Disable regions watch
REGION[0].START	0x600	Start address for region 0
REGION[0].END	0x604	End address of region 0
REGION[1].START	0x610	Start address for region 1
REGION[1].END	0x614	End address of region 1
REGION[2].START	0x620	Start address for region 2
REGION[2].END	0x624	End address of region 2
REGION[3].START	0x630	Start address for region 3
REGION[3].END	0x634	End address of region 3
PREGION[0].START	0x6C0	Reserved for future use
PREGION[0].END	0x6C4	Reserved for future use
PREGION[0].SUBS	0x6C8	Subregions of region 0
PREGION[1].START	0x6D0	Reserved for future use
PREGION[1].END	0x6D4	Reserved for future use
PREGION[1].SUBS	0x6D8	Subregions of region 1

### 45.1.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																															
Id				L K J I																H G F E D C B A																															
Reset 0x00000000				0 0																																															
Id	RW	Field	Value Id	Value																Description																															
A	RW	REGION0WA																		Enable or disable interrupt for REGION[0].WA event																															
																				See <a href="#">EVENTS_REGION[0].WA</a>																															
				Disabled																0																Disable															

### 45.1.2 INTENSET

### Enable interrupt

Page 468

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				L K J I																H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
						See <a href="#">EVENTS_PREGION[1].WA</a>																																
			Set		1	Enable																																
			Disabled		0	Read: Disabled																																
			Enabled		1	Read: Enabled																																
L	RW	PREGION1RA				Write '1' to Enable interrupt for PREGION[1].RA event																																
						See <a href="#">EVENTS_PREGION[1].RA</a>																																
			Set		1	Enable																																
			Disabled		0	Read: Disabled																																
			Enabled		1	Read: Enabled																																

### 45.1.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					L K J I																H G F E D C B A																	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	REGION0WA			Write '1' to Disable interrupt for REGION[0].WA event																																	
					See <a href="#">EVENTS_REGION[0].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
B	RW	REGION0RA			Write '1' to Disable interrupt for REGION[0].RA event																																	
					See <a href="#">EVENTS_REGION[0].RA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
C	RW	REGION1WA			Write '1' to Disable interrupt for REGION[1].WA event																																	
					See <a href="#">EVENTS_REGION[1].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
D	RW	REGION1RA			Write '1' to Disable interrupt for REGION[1].RA event																																	
					See <a href="#">EVENTS_REGION[1].RA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
E	RW	REGION2WA			Write '1' to Disable interrupt for REGION[2].WA event																																	
					See <a href="#">EVENTS_REGION[2].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
F	RW	REGION2RA			Write '1' to Disable interrupt for REGION[2].RA event																																	
					See <a href="#">EVENTS_REGION[2].RA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
G	RW	REGION3WA			Write '1' to Disable interrupt for REGION[3].WA event																																	
					See <a href="#">EVENTS_REGION[3].WA</a>																																	
			Clear	1	Disable																																	

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					L K J I																H G F E D C B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			Write '1' to Disable interrupt for REGION[3].RA event																																	
			See <a href="#">EVENTS_REGION[3].RA</a>																																	
H	RW	REGION3RA	Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			Write '1' to Disable interrupt for PREGION[0].WA event																																	
I	RW	PREGION0WA	Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			See <a href="#">EVENTS_PREGION[0].WA</a>																																	
J	RW	PREGION0RA	Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			Write '1' to Disable interrupt for PREGION[0].RA event																																	
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			See <a href="#">EVENTS_PREGION[0].RA</a>																																	
K	RW	PREGION1WA	Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			Write '1' to Disable interrupt for PREGION[1].WA event																																	
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			See <a href="#">EVENTS_PREGION[1].WA</a>																																	
L	RW	PREGION1RA	Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			Write '1' to Disable interrupt for PREGION[1].RA event																																	
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
			See <a href="#">EVENTS_PREGION[1].RA</a>																																	

## 45.1.4 NMIEN

Address offset: 0x320

Enable or disable non-maskable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I														H G F E D C B A																	
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	REGION0WA			Enable or disable non-maskable interrupt for REGION[0].WA event																														
					See <a href="#">EVENTS_REGION[0].WA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	REGION0RA			Enable or disable non-maskable interrupt for REGION[0].RA event																														
					See <a href="#">EVENTS_REGION[0].RA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	REGION1WA			Enable or disable non-maskable interrupt for REGION[1].WA event																														
					See <a href="#">EVENTS_REGION[1].WA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														

### 45.1.5 NMIENSET

### Enable non-maskable interrupt

Page 472



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
J	RW	PREGION0RA			Write '1' to Enable non-maskable interrupt for PREGION[0].RA event																														
					See <a href="#">EVENTS_PREGION[0].RA</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
K	RW	PREGION1WA			Write '1' to Enable non-maskable interrupt for PREGION[1].WA event																														
					See <a href="#">EVENTS_PREGION[1].WA</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
L	RW	PREGION1RA			Write '1' to Enable non-maskable interrupt for PREGION[1].RA event																														
					See <a href="#">EVENTS_PREGION[1].RA</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

## 45.1.6 NMIENCLR

Address offset: 0x328

Disable non-maskable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				L K J I																H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	REGION0WA			Write '1' to Disable non-maskable interrupt for REGION[0].WA event																																	
					See <a href="#">EVENTS_REGION[0].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
B	RW	REGION0RA			Write '1' to Disable non-maskable interrupt for REGION[0].RA event																																	
					See <a href="#">EVENTS_REGION[0].RA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
C	RW	REGION1WA			Write '1' to Disable non-maskable interrupt for REGION[1].WA event																																	
					See <a href="#">EVENTS_REGION[1].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
D	RW	REGION1RA			Write '1' to Disable non-maskable interrupt for REGION[1].RA event																																	
					See <a href="#">EVENTS_REGION[1].RA</a>																																	

Page 474

## 45.1.7 PERREGION[0].SUBSTATWA

Address offset: 0x400

Source of event/interrupt in region 0, write access detected while corresponding subregion was enabled for watching

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																	
A	RW	SR0			Subregion 0 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
B	RW	SR1			Subregion 1 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
C	RW	SR2			Subregion 2 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
D	RW	SR3			Subregion 3 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
E	RW	SR4			Subregion 4 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
F	RW	SR5			Subregion 5 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
G	RW	SR6			Subregion 6 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
H	RW	SR7			Subregion 7 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
I	RW	SR8			Subregion 8 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
J	RW	SR9			Subregion 9 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
K	RW	SR10			Subregion 10 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
L	RW	SR11			Subregion 11 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
M	RW	SR12			Subregion 12 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
N	RW	SR13			Subregion 13 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
O	RW	SR14			Subregion 14 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
P	RW	SR15			Subregion 15 in region 0 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
Q	RW	SR16			Subregion 16 in region 0 (write '1' to clear)																																	



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	SR0				Subregion 0 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
B	RW	SR1				Subregion 1 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
C	RW	SR2				Subregion 2 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
D	RW	SR3				Subregion 3 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
E	RW	SR4				Subregion 4 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
F	RW	SR5				Subregion 5 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
G	RW	SR6				Subregion 6 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
H	RW	SR7				Subregion 7 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
I	RW	SR8				Subregion 8 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
J	RW	SR9				Subregion 9 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
K	RW	SR10				Subregion 10 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
L	RW	SR11				Subregion 11 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
M	RW	SR12				Subregion 12 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
N	RW	SR13				Subregion 13 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
O	RW	SR14				Subregion 14 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
P	RW	SR15				Subregion 15 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
Q	RW	SR16				Subregion 16 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
R	RW	SR17				Subregion 17 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
S	RW	SR18				Subregion 18 in region 0 (write '1' to clear)																																

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			T RW SR19			Subregion 19 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			U RW SR20			Subregion 20 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			V RW SR21			Subregion 21 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			W RW SR22			Subregion 22 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			X RW SR23			Subregion 23 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			Y RW SR24			Subregion 24 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			Z RW SR25			Subregion 25 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			a RW SR26			Subregion 26 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			b RW SR27			Subregion 27 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			c RW SR28			Subregion 28 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			d RW SR29			Subregion 29 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			e RW SR30			Subregion 30 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			f RW SR31			Subregion 31 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														

## 45.1.9 PERREGION[1].SUBSTATWA

Address offset: 0x408

Source of event/interrupt in region 1, write access detected while corresponding subregion was enabled for watching

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SR0			Subregion 0 in region 1 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
B	RW	SR1				Subregion 1 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
C	RW	SR2				Subregion 2 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
D	RW	SR3				Subregion 3 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
E	RW	SR4				Subregion 4 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
F	RW	SR5				Subregion 5 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
G	RW	SR6				Subregion 6 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
H	RW	SR7				Subregion 7 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
I	RW	SR8				Subregion 8 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
J	RW	SR9				Subregion 9 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
K	RW	SR10				Subregion 10 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
L	RW	SR11				Subregion 11 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
M	RW	SR12				Subregion 12 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
N	RW	SR13				Subregion 13 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
O	RW	SR14				Subregion 14 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
P	RW	SR15				Subregion 15 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
Q	RW	SR16				Subregion 16 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
R	RW	SR17				Subregion 17 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
S	RW	SR18				Subregion 18 in region 1 (write '1' to clear)																																
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
T	RW	SR19				Subregion 19 in region 1 (write '1' to clear)																																

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 20 in region 1 (write '1' to clear)																																			
U	RW	SR20	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 20 in region 1 (write '1' to clear)																																			
V	RW	SR21	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 21 in region 1 (write '1' to clear)																																			
W	RW	SR22	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 22 in region 1 (write '1' to clear)																																			
X	RW	SR23	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 23 in region 1 (write '1' to clear)																																			
Y	RW	SR24	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 24 in region 1 (write '1' to clear)																																			
Z	RW	SR25	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 25 in region 1 (write '1' to clear)																																			
a	RW	SR26	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 26 in region 1 (write '1' to clear)																																			
b	RW	SR27	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 27 in region 1 (write '1' to clear)																																			
c	RW	SR28	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 28 in region 1 (write '1' to clear)																																			
d	RW	SR29	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 29 in region 1 (write '1' to clear)																																			
e	RW	SR30	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 30 in region 1 (write '1' to clear)																																			
f	RW	SR31	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 31 in region 1 (write '1' to clear)																																			

## 45.1.10 PERREGION[1].SUBSTATRA

Address offset: 0x40C

Source of event/interrupt in region 1, read access detected while corresponding subregion was enabled for watching

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	SR0			Subregion 0 in region 1 (write '1' to clear)																																	
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
B	RW	SR1			Subregion 1 in region 1 (write '1' to clear)																																	
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value Id	Value	Description																															
C	RW	SR2			Subregion 2 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
D	RW	SR3			Subregion 3 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
E	RW	SR4			Subregion 4 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
F	RW	SR5			Subregion 5 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
G	RW	SR6			Subregion 6 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
H	RW	SR7			Subregion 7 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
I	RW	SR8			Subregion 8 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
J	RW	SR9			Subregion 9 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
K	RW	SR10			Subregion 10 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
L	RW	SR11			Subregion 11 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
M	RW	SR12			Subregion 12 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
N	RW	SR13			Subregion 13 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
O	RW	SR14			Subregion 14 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
P	RW	SR15			Subregion 15 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
Q	RW	SR16			Subregion 16 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
R	RW	SR17			Subregion 17 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
S	RW	SR18			Subregion 18 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
T	RW	SR19			Subregion 19 in region 1 (write '1' to clear)																															
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
U	RW	SR20			Subregion 20 in region 1 (write '1' to clear)																															

#### 45.1.11 REGIONEN

### Enable/disable regions watch

Page 482

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Id					L																K																J																I																H																G																F																E																D																C																B																A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
Reset 0x00000000					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0				

## 45.1.12 REGIONENSET

Address offset: 0x514

Enable regions watch

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					L K J I														H G F E D C B A																			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	RGN0WA			Enable write access watch in region[0]																																	
			Set	1	Enable write access watch in this region																																	
			Disabled	0	Write access watch in this region is disabled																																	
			Enabled	1	Write access watch in this region is enabled																																	
B	RW	RGN0RA			Enable read access watch in region[0]																																	
			Set	1	Enable read access watch in this region																																	
			Disabled	0	Read access watch in this region is disabled																																	
			Enabled	1	Read access watch in this region is enabled																																	
C	RW	RGN1WA			Enable write access watch in region[1]																																	
			Set	1	Enable write access watch in this region																																	
			Disabled	0	Write access watch in this region is disabled																																	
			Enabled	1	Write access watch in this region is enabled																																	
D	RW	RGN1RA			Enable read access watch in region[1]																																	
			Set	1	Enable read access watch in this region																																	
			Disabled	0	Read access watch in this region is disabled																																	
			Enabled	1	Read access watch in this region is enabled																																	
E	RW	RGN2WA			Enable write access watch in region[2]																																	
			Set	1	Enable write access watch in this region																																	
			Disabled	0	Write access watch in this region is disabled																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
F	RW	RGN2RA	Enabled	1	Write access watch in this region is enabled																														
			Set	1	Enable read access watch in region[2]																														
			Disabled	0	Enable read access watch in this region																														
			Enabled	1	Read access watch in this region is disabled																														
G	RW	RGN3WA	Enabled	1	Read access watch in this region is enabled																														
			Set	1	Enable write access watch in region[3]																														
			Disabled	0	Enable write access watch in this region																														
			Enabled	1	Write access watch in this region is disabled																														
H	RW	RGN3RA	Enabled	1	Write access watch in this region is enabled																														
			Set	1	Enable read access watch in region[3]																														
			Disabled	0	Enable read access watch in this region																														
			Enabled	1	Read access watch in this region is disabled																														
I	RW	PRGN0WA	Enabled	1	Read access watch in this region is enabled																														
			Set	1	Enable write access watch in PREGION[0]																														
			Disabled	0	Enable write access watch in this PREGION																														
			Enabled	1	Write access watch in this PREGION is disabled																														
J	RW	PRGN0RA	Enabled	1	Write access watch in this PREGION is enabled																														
			Set	1	Enable read access watch in PREGION[0]																														
			Disabled	0	Enable read access watch in this PREGION																														
			Enabled	1	Read access watch in this PREGION is disabled																														
K	RW	PRGN1WA	Enabled	1	Read access watch in this PREGION is enabled																														
			Set	1	Enable write access watch in PREGION[1]																														
			Disabled	0	Enable write access watch in this PREGION																														
			Enabled	1	Write access watch in this PREGION is disabled																														
L	RW	PRGN1RA	Enabled	1	Write access watch in this PREGION is enabled																														
			Set	1	Enable read access watch in PREGION[1]																														
			Disabled	0	Enable read access watch in this PREGION																														
			Enabled	1	Read access watch in this PREGION is disabled																														

### 45.1.13 REGIONENCLR

Address offset: 0x518

Disable regions watch

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id					L														K	J	I															H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field	Value Id	Value	Description																																						
A	RW	RGN0WA			Disable write access watch in region[0]																																						
			Clear	1	Disable write access watch in this region																																						
			Disabled	0	Write access watch in this region is disabled																																						
			Enabled	1	Write access watch in this region is enabled																																						
B	RW	RGN0RA			Disable read access watch in region[0]																																						
			Clear	1	Disable read access watch in this region																																						
			Disabled	0	Read access watch in this region is disabled																																						
			Enabled	1	Read access watch in this region is enabled																																						
C	RW	RGN1WA			Disable write access watch in region[1]																																						
			Clear	1	Disable write access watch in this region																																						
			Disabled	0	Write access watch in this region is disabled																																						
			Enabled	1	Write access watch in this region is enabled																																						
D	RW	RGN1RA			Disable read access watch in region[1]																																						
			Clear	1	Disable read access watch in this region																																						
			Disabled	0	Read access watch in this region is disabled																																						
			Enabled	1	Read access watch in this region is enabled																																						

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																	L	K	J	I													H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																			
E	RW	RGN2WA			Disable write access watch in region[2]																																			
			Clear	1	Disable write access watch in this region																																			
			Disabled	0	Write access watch in this region is disabled																																			
			Enabled	1	Write access watch in this region is enabled																																			
F	RW	RGN2RA			Disable read access watch in region[2]																																			
			Clear	1	Disable read access watch in this region																																			
			Disabled	0	Read access watch in this region is disabled																																			
			Enabled	1	Read access watch in this region is enabled																																			
G	RW	RGN3WA			Disable write access watch in region[3]																																			
			Clear	1	Disable write access watch in this region																																			
			Disabled	0	Write access watch in this region is disabled																																			
			Enabled	1	Write access watch in this region is enabled																																			
H	RW	RGN3RA			Disable read access watch in region[3]																																			
			Clear	1	Disable read access watch in this region																																			
			Disabled	0	Read access watch in this region is disabled																																			
			Enabled	1	Read access watch in this region is enabled																																			
I	RW	PRGN0WA			Disable write access watch in PREGION[0]																																			
			Clear	1	Disable write access watch in this PREGION																																			
			Disabled	0	Write access watch in this PREGION is disabled																																			
			Enabled	1	Write access watch in this PREGION is enabled																																			
J	RW	PRGN0RA			Disable read access watch in PREGION[0]																																			
			Clear	1	Disable read access watch in this PREGION																																			
			Disabled	0	Read access watch in this PREGION is disabled																																			
			Enabled	1	Read access watch in this PREGION is enabled																																			
K	RW	PRGN1WA			Disable write access watch in PREGION[1]																																			
			Clear	1	Disable write access watch in this PREGION																																			
			Disabled	0	Write access watch in this PREGION is disabled																																			
			Enabled	1	Write access watch in this PREGION is enabled																																			
L	RW	PRGN1RA			Disable read access watch in PREGION[1]																																			
			Clear	1	Disable read access watch in this PREGION																																			
			Disabled	0	Read access watch in this PREGION is disabled																																			
			Enabled	1	Read access watch in this PREGION is enabled																																			

#### 45.1.14 REGION[0].START

Address offset: 0x600

Start address for region 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	START													Start address for region																					

#### 45.1.15 REGION[0].END

Address offset: 0x604

End address of region 0

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id										A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id										Value										Description																					
A	RW	END																					End address of region.																					

### 45.1.16 REGION[1].START

Address offset: 0x610

Start address for region 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	START								Start address for region																										

### 45.1.17 REGION[1].END

Address offset: 0x614

End address of region 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	END							End address of region.																										

### 45.1.18 REGION[2].START

Address offset: 0x620

Start address for region 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	START							Start address for region																										

### 45.1.19 REGION[2].END

Address offset: 0x624

End address of region 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	END							End address of region.																										

### 45.1.20 REGION[3].START

Address offset: 0x630

Start address for region 3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	START				Start address for region																																

### 45.1.21 REGION[3].END

Address offset: 0x634

End address of region 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	END						End address of region.																												

## 45.1.22 PREGION[0].START

Address offset: 0x6C0

Reserved for future use

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	R	START						Reserved for future use																												

## 45.1.23 PREGION[0].END

Address offset: 0x6C4

Reserved for future use

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	R	END								Reserved for future use																										

## 45.1.24 PREGION[0].SUBS

Address offset: 0x6C8

Subregions of region 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value	Description																														
A	RW	SR0				Include or exclude subregion 0 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
B	RW	SR1				Include or exclude subregion 1 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
C	RW	SR2				Include or exclude subregion 2 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
D	RW	SR3				Include or exclude subregion 3 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
E	RW	SR4				Include or exclude subregion 4 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
F	RW	SR5				Include or exclude subregion 5 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														
G	RW	SR6				Include or exclude subregion 6 in region																														
				Exclude	0	Exclude																														
				Include	1	Include																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
H	RW	SR7				Include or exclude subregion 7 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
I	RW	SR8				Include or exclude subregion 8 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
J	RW	SR9				Include or exclude subregion 9 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
K	RW	SR10				Include or exclude subregion 10 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
L	RW	SR11				Include or exclude subregion 11 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
M	RW	SR12				Include or exclude subregion 12 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
N	RW	SR13				Include or exclude subregion 13 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
O	RW	SR14				Include or exclude subregion 14 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
P	RW	SR15				Include or exclude subregion 15 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
Q	RW	SR16				Include or exclude subregion 16 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
R	RW	SR17				Include or exclude subregion 17 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
S	RW	SR18				Include or exclude subregion 18 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
T	RW	SR19				Include or exclude subregion 19 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
U	RW	SR20				Include or exclude subregion 20 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
V	RW	SR21				Include or exclude subregion 21 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
W	RW	SR22				Include or exclude subregion 22 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
X	RW	SR23				Include or exclude subregion 23 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
Y	RW	SR24				Include or exclude subregion 24 in region																																
			Exclude	0	Exclude																																	
			Include	1	Include																																	
Z	RW	SR25				Include or exclude subregion 25 in region																																



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value			Description																											
				Exclude	0			Exclude																											
				Include	1			Include																											
a	RW	SR26				Include or exclude subregion 26 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											
b	RW	SR27				Include or exclude subregion 27 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											
c	RW	SR28				Include or exclude subregion 28 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											
d	RW	SR29				Include or exclude subregion 29 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											
e	RW	SR30				Include or exclude subregion 30 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											
f	RW	SR31				Include or exclude subregion 31 in region																													
						Exclude	0			Exclude																									
				Include	1			Include																											

#### 45.1.25 PREGION[1].START

Address offset: 0x6D0

Reserved for future use

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

#### 45.1.26 PREGION[1].END

Address offset: 0x6D4

Reserved for future use

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

#### 45.1.27 PREGION[1].SUBS

Address offset: 0x6D8

### Subregions of region 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
A	RW	SR0				Include or exclude subregion 0 in region																													
			Exclude	0		Exclude																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
B	RW	SR1	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 1 in region																																	
			Include	1	Exclude																																	
C	RW	SR2	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 2 in region																																	
			Include	1	Exclude																																	
D	RW	SR3	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 3 in region																																	
			Include	1	Exclude																																	
E	RW	SR4	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 4 in region																																	
			Include	1	Exclude																																	
F	RW	SR5	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 5 in region																																	
			Include	1	Exclude																																	
G	RW	SR6	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 6 in region																																	
			Include	1	Exclude																																	
H	RW	SR7	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 7 in region																																	
			Include	1	Exclude																																	
I	RW	SR8	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 8 in region																																	
			Include	1	Exclude																																	
J	RW	SR9	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 9 in region																																	
			Include	1	Exclude																																	
K	RW	SR10	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 10 in region																																	
			Include	1	Exclude																																	
L	RW	SR11	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 11 in region																																	
			Include	1	Exclude																																	
M	RW	SR12	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 12 in region																																	
			Include	1	Exclude																																	
N	RW	SR13	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 13 in region																																	
			Include	1	Exclude																																	
O	RW	SR14	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 14 in region																																	
			Include	1	Exclude																																	
P	RW	SR15	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 15 in region																																	
			Include	1	Exclude																																	
Q	RW	SR16	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 16 in region																																	
			Include	1	Exclude																																	
R	RW	SR17	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 17 in region																																	
			Include	1	Exclude																																	
S	RW	SR18	Include	1	Include																																	
			Exclude	0	Include or exclude subregion 18 in region																																	
			Include	1	Exclude																																	

Page 491

## 46 EGU — Event generator unit

The Event generator unit (EGU) provides support for inter-layer signaling. This means support for atomic triggering of both CPU execution and hardware tasks from both firmware (by CPU) and hardware (by PPI). This feature can, for instance, be used for triggering CPU execution at a lower priority execution from a higher priority execution, or to handle a peripheral's ISR execution at a lower priority for some of its events. However, triggering any priority from any priority is possible.

Listed here are the main EGU features:

- Enables SW triggering of interrupts
- 6 EGU instances – separate interrupt vectors
- Up to 16 separate event flags per interrupt for multiplexing

The EGU implements a set of tasks which can individually be triggered to generate the corresponding event, i.e., the corresponding event for TASKS\_TRIGGER[n] is EVENTS\_TRIGGERED[n].

**Table 116: EGU configuration**

EGU instance	Number of event flags
0-5	16

### 46.1 Registers

**Table 117: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40014000	EGU	EGU0	Event Generator Unit 0	
0x40015000	EGU	EGU1	Event Generator Unit 1	
0x40016000	EGU	EGU2	Event Generator Unit 2	
0x40017000	EGU	EGU3	Event Generator Unit 3	
0x40018000	EGU	EGU4	Event Generator Unit 4	
0x40019000	EGU	EGU5	Event Generator Unit 5	

**Table 118: Register Overview**

Register	Offset	Description
TASKS_TRIGGER[0]	0x000	Trigger 0 for triggering the corresponding TRIGGERED[0] event
TASKS_TRIGGER[1]	0x004	Trigger 1 for triggering the corresponding TRIGGERED[1] event
TASKS_TRIGGER[2]	0x008	Trigger 2 for triggering the corresponding TRIGGERED[2] event
TASKS_TRIGGER[3]	0x00C	Trigger 3 for triggering the corresponding TRIGGERED[3] event
TASKS_TRIGGER[4]	0x010	Trigger 4 for triggering the corresponding TRIGGERED[4] event
TASKS_TRIGGER[5]	0x014	Trigger 5 for triggering the corresponding TRIGGERED[5] event
TASKS_TRIGGER[6]	0x018	Trigger 6 for triggering the corresponding TRIGGERED[6] event
TASKS_TRIGGER[7]	0x01C	Trigger 7 for triggering the corresponding TRIGGERED[7] event
TASKS_TRIGGER[8]	0x020	Trigger 8 for triggering the corresponding TRIGGERED[8] event
TASKS_TRIGGER[9]	0x024	Trigger 9 for triggering the corresponding TRIGGERED[9] event
TASKS_TRIGGER[10]	0x028	Trigger 10 for triggering the corresponding TRIGGERED[10] event
TASKS_TRIGGER[11]	0x02C	Trigger 11 for triggering the corresponding TRIGGERED[11] event
TASKS_TRIGGER[12]	0x030	Trigger 12 for triggering the corresponding TRIGGERED[12] event
TASKS_TRIGGER[13]	0x034	Trigger 13 for triggering the corresponding TRIGGERED[13] event
TASKS_TRIGGER[14]	0x038	Trigger 14 for triggering the corresponding TRIGGERED[14] event
TASKS_TRIGGER[15]	0x03C	Trigger 15 for triggering the corresponding TRIGGERED[15] event
EVENTS_TRIGGERED[0]	0x100	Event number 0 generated by triggering the corresponding TRIGGER[0] task
EVENTS_TRIGGERED[1]	0x104	Event number 1 generated by triggering the corresponding TRIGGER[1] task
EVENTS_TRIGGERED[2]	0x108	Event number 2 generated by triggering the corresponding TRIGGER[2] task
EVENTS_TRIGGERED[3]	0x10C	Event number 3 generated by triggering the corresponding TRIGGER[3] task
EVENTS_TRIGGERED[4]	0x110	Event number 4 generated by triggering the corresponding TRIGGER[4] task

Register	Offset	Description
EVENTS_TRIGGERED[5]	0x114	Event number 5 generated by triggering the corresponding TRIGGER[5] task
EVENTS_TRIGGERED[6]	0x118	Event number 6 generated by triggering the corresponding TRIGGER[6] task
EVENTS_TRIGGERED[7]	0x11C	Event number 7 generated by triggering the corresponding TRIGGER[7] task
EVENTS_TRIGGERED[8]	0x120	Event number 8 generated by triggering the corresponding TRIGGER[8] task
EVENTS_TRIGGERED[9]	0x124	Event number 9 generated by triggering the corresponding TRIGGER[9] task
EVENTS_TRIGGERED[10]	0x128	Event number 10 generated by triggering the corresponding TRIGGER[10] task
EVENTS_TRIGGERED[11]	0x12C	Event number 11 generated by triggering the corresponding TRIGGER[11] task
EVENTS_TRIGGERED[12]	0x130	Event number 12 generated by triggering the corresponding TRIGGER[12] task
EVENTS_TRIGGERED[13]	0x134	Event number 13 generated by triggering the corresponding TRIGGER[13] task
EVENTS_TRIGGERED[14]	0x138	Event number 14 generated by triggering the corresponding TRIGGER[14] task
EVENTS_TRIGGERED[15]	0x13C	Event number 15 generated by triggering the corresponding TRIGGER[15] task
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt

### 46.1.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	TRIGGERED0				Enable or disable interrupt for TRIGGERED[0] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
B	RW	TRIGGERED1				Enable or disable interrupt for TRIGGERED[1] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
C	RW	TRIGGERED2				Enable or disable interrupt for TRIGGERED[2] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
D	RW	TRIGGERED3				Enable or disable interrupt for TRIGGERED[3] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
E	RW	TRIGGERED4				Enable or disable interrupt for TRIGGERED[4] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
F	RW	TRIGGERED5				Enable or disable interrupt for TRIGGERED[5] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
G	RW	TRIGGERED6				Enable or disable interrupt for TRIGGERED[6] event																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													
H	RW	TRIGGERED7				Enable or disable interrupt for TRIGGERED[7] event																													
			Disabled	0		Disable																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				P O N M L K J I H G F E D C B A															
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
I	RW	TRIGGERED8	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[8] event																												
							See <a href="#">EVENTS_TRIGGERED[8]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[9] event																												
							See <a href="#">EVENTS_TRIGGERED[9]</a>																												
			Disabled	0	Disable																														
J	RW	TRIGGERED9	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[9] event																												
							See <a href="#">EVENTS_TRIGGERED[9]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[10] event																												
							See <a href="#">EVENTS_TRIGGERED[10]</a>																												
			Disabled	0	Disable																														
K	RW	TRIGGERED10	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[10] event																												
							See <a href="#">EVENTS_TRIGGERED[10]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[11] event																												
							See <a href="#">EVENTS_TRIGGERED[11]</a>																												
			Disabled	0	Disable																														
L	RW	TRIGGERED11	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[11] event																												
							See <a href="#">EVENTS_TRIGGERED[11]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[12] event																												
							See <a href="#">EVENTS_TRIGGERED[12]</a>																												
			Disabled	0	Disable																														
M	RW	TRIGGERED12	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[12] event																												
							See <a href="#">EVENTS_TRIGGERED[12]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[13] event																												
							See <a href="#">EVENTS_TRIGGERED[13]</a>																												
			Disabled	0	Disable																														
N	RW	TRIGGERED13	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[13] event																												
							See <a href="#">EVENTS_TRIGGERED[13]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[14] event																												
							See <a href="#">EVENTS_TRIGGERED[14]</a>																												
			Disabled	0	Disable																														
O	RW	TRIGGERED14	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[14] event																												
							See <a href="#">EVENTS_TRIGGERED[14]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[15] event																												
							See <a href="#">EVENTS_TRIGGERED[15]</a>																												
			Disabled	0	Disable																														
P	RW	TRIGGERED15	Enabled	1	Enable																														
							Enable or disable interrupt for TRIGGERED[15] event																												
							See <a href="#">EVENTS_TRIGGERED[15]</a>																												
			Disabled	0	Disable																														
			Enabled	1	Enable																														

## 46.1.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																				P O N M L K J I H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	TRIGGERED0				Write '1' to Enable interrupt for TRIGGERED[0] event																																
						See <a href="#">EVENTS_TRIGGERED[0]</a>																																
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
B	RW	TRIGGERED1				Write '1' to Enable interrupt for TRIGGERED[1] event																																
						See <a href="#">EVENTS_TRIGGERED[1]</a>																																
			Set	1	Enable																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			C RW TRIGGERED2				Write '1' to Enable interrupt for TRIGGERED[2] event																												
							See <a href="#">EVENTS_TRIGGERED[2]</a>																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			D RW TRIGGERED3				Write '1' to Enable interrupt for TRIGGERED[3] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			E RW TRIGGERED4				Write '1' to Enable interrupt for TRIGGERED[4] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			F RW TRIGGERED5				Write '1' to Enable interrupt for TRIGGERED[5] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			G RW TRIGGERED6				Write '1' to Enable interrupt for TRIGGERED[6] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			H RW TRIGGERED7				Write '1' to Enable interrupt for TRIGGERED[7] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			I RW TRIGGERED8				Write '1' to Enable interrupt for TRIGGERED[8] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			J RW TRIGGERED9				Write '1' to Enable interrupt for TRIGGERED[9] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			K RW TRIGGERED10				Write '1' to Enable interrupt for TRIGGERED[10] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
			L RW TRIGGERED11				Write '1' to Enable interrupt for TRIGGERED[11] event																												
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																				P O N M L K J I H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
M	RW	TRIGGERED12	Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for TRIGGERED[12] event																																			
			See <a href="#">EVENTS_TRIGGERED[12]</a>																																			
			Set	1	Enable																																	
N	RW	TRIGGERED13	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for TRIGGERED[13] event																																			
			See <a href="#">EVENTS_TRIGGERED[13]</a>																																			
O	RW	TRIGGERED14	Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for TRIGGERED[14] event																																			
P	RW	TRIGGERED15	See <a href="#">EVENTS_TRIGGERED[14]</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

### 46.1.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					P O N M L K J I H G F E D C B A															
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TRIGGERED0				Write '1' to Disable interrupt for TRIGGERED[0] event																														
						See <a href="#">EVENTS_TRIGGERED[0]</a>																														
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
B	RW	TRIGGERED1				Write '1' to Disable interrupt for TRIGGERED[1] event																														
						See <a href="#">EVENTS_TRIGGERED[1]</a>																														
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
C	RW	TRIGGERED2				Write '1' to Disable interrupt for TRIGGERED[2] event																														
						See <a href="#">EVENTS_TRIGGERED[2]</a>																														
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
D	RW	TRIGGERED3				Write '1' to Disable interrupt for TRIGGERED[3] event																														
						See <a href="#">EVENTS_TRIGGERED[3]</a>																														
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
E	RW	TRIGGERED4				Write '1' to Disable interrupt for TRIGGERED[4] event																														



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_TRIGGERED[4]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	TRIGGERED5			Write '1' to Disable interrupt for TRIGGERED[5] event																														
					See <a href="#">EVENTS_TRIGGERED[5]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
G	RW	TRIGGERED6			Write '1' to Disable interrupt for TRIGGERED[6] event																														
					See <a href="#">EVENTS_TRIGGERED[6]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
H	RW	TRIGGERED7			Write '1' to Disable interrupt for TRIGGERED[7] event																														
					See <a href="#">EVENTS_TRIGGERED[7]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
I	RW	TRIGGERED8			Write '1' to Disable interrupt for TRIGGERED[8] event																														
					See <a href="#">EVENTS_TRIGGERED[8]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
J	RW	TRIGGERED9			Write '1' to Disable interrupt for TRIGGERED[9] event																														
					See <a href="#">EVENTS_TRIGGERED[9]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
K	RW	TRIGGERED10			Write '1' to Disable interrupt for TRIGGERED[10] event																														
					See <a href="#">EVENTS_TRIGGERED[10]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
L	RW	TRIGGERED11			Write '1' to Disable interrupt for TRIGGERED[11] event																														
					See <a href="#">EVENTS_TRIGGERED[11]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
M	RW	TRIGGERED12			Write '1' to Disable interrupt for TRIGGERED[12] event																														
					See <a href="#">EVENTS_TRIGGERED[12]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
N	RW	TRIGGERED13			Write '1' to Disable interrupt for TRIGGERED[13] event																														
					See <a href="#">EVENTS_TRIGGERED[13]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
O	RW	TRIGGERED14			Write '1' to Disable interrupt for TRIGGERED[14] event																														
					See <a href="#">EVENTS_TRIGGERED[14]</a>																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
P	RW	TRIGGERED15			Write '1' to Disable interrupt for TRIGGERED[15] event																														
					See <a href="#">EVENTS_TRIGGERED[15]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

## 46.2 Electrical specification

### 46.2.1 EGU Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{EGU,EVT}}$	Latency between setting an EGU event flag and the system setting an interrupt		1		cycles


## 47 PWM — Pulse width modulation

The PWM module enables the generation of pulse width modulated signals on GPIO. The module implements an up or up-and-down counter with four PWM channels that drive assigned GPIOs.

Three PWM modules can provide up to 12 PWM channels with individual frequency control in groups of up to four channels. Furthermore, a built-in decoder and EasyDMA capabilities make it possible to manipulate the PWM duty cycles without CPU intervention. Arbitrary duty-cycle sequences are read from Data RAM and can be chained to implement ping-pong buffering or repeated into complex loops.

Listed here are the main features of one PWM module:

- Fixed PWM base frequency with programmable clock divider
- Up to four PWM channels with individual polarity and duty-cycle values
- Edge or center-aligned pulses across PWM channels
- Multiple duty-cycle arrays (sequences) defined in Data RAM
- Autonomous and glitch-free update of duty cycle values directly from memory through EasyDMA
- Change of polarity, duty-cycle, and base frequency possibly on every PWM period
- Data RAM sequences can be repeated or connected into loops

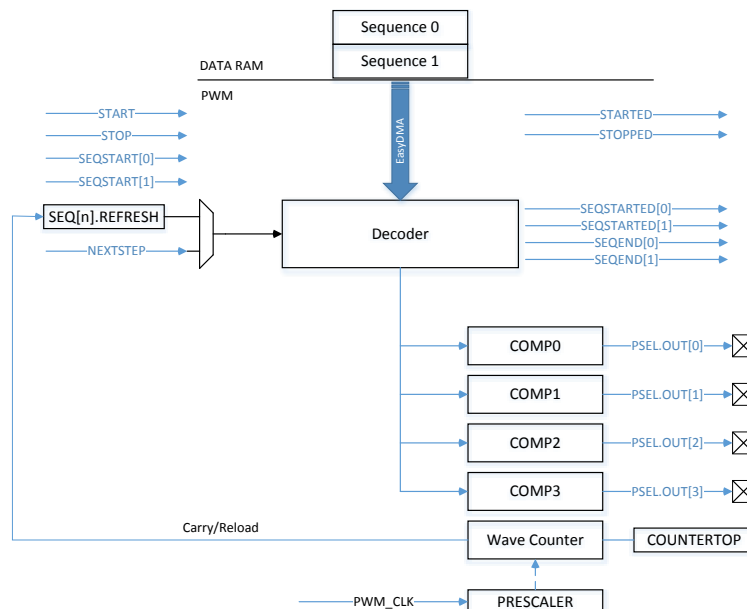

**Figure 143: PWM Module**

### 47.1 Wave counter

The wave counter is responsible for generating the pulses at a duty-cycle that depends on the compare values, and at a frequency that depends on COUNTERTOP.


There is one common 15-bit counter with four compare channels. Thus, all four channels will share the same period (PWM frequency), but can have individual duty-cycle and polarity. The polarity is set by the value read from RAM (see [Figure 146: Decoder memory access modes](#) on page 502), while the MODE register controls if the counter counts up, or up and down. The timer top value is controlled by the COUNTERTOP register. This register value in conjunction with the selected PRESCALER of the PWM\_CLK will result in a given PWM period. A COUNTERTOP value smaller than the compare setting will result in a state where no PWM edges are generated. Respectively, OUT[n] is held high, given that the polarity is set to FallingEdge. All the compare registers are internal and can only be configured through the decoder presented later.

COUNTERTOP can be safely written at any time. It will get sampled following a START task. If DECODER.LOAD is anything else than WaveForm, it will also get sampled following a STARTSEQ[n] task,

and when loading a new value from RAM during a sequence playback. If `DECODER.LOAD=WaveForm`, the register value is ignored, and taken from RAM instead (see [Decoder with EasyDMA](#) on page 502 below).

**Figure 144: PWM up counter example - FallingEdge polarity** on page 500 shows the counter operating in up (MODE=PWM\_MODE\_Up) mode with three PWM channels with the same frequency but different duty cycle. The counter is automatically reset to zero when COUNTERTOP is reached and `OUT[n]` will invert. `OUT[n]` is held low if the compare value is 0 and held high respectively if set to COUNTERTOP given that the polarity is set to FallingEdge. Running in up counter mode will result in pulse widths that are edge-aligned. See the code example below:

```
uint16_t pwm_seq[4] = {PWM_CH0_DUTY, PWM_CH1_DUTY, PWM_CH2_DUTY,
  PWM_CH3_DUTY};
NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->PSEL.OUT[1] = (second_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER = (PWM_PRESCALER_PRESCALER_DIV_1 <<
  PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER = (PWM_DECODER_LOAD_Individual << PWM_DECODER_LOAD_Pos) |
  (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR = ((uint32_t)(pwm_seq) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT = ((sizeof(pwm_seq) / sizeof(uint16_t)) <<
  PWM_SEQ_CNT_CNT_Pos);
NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
```

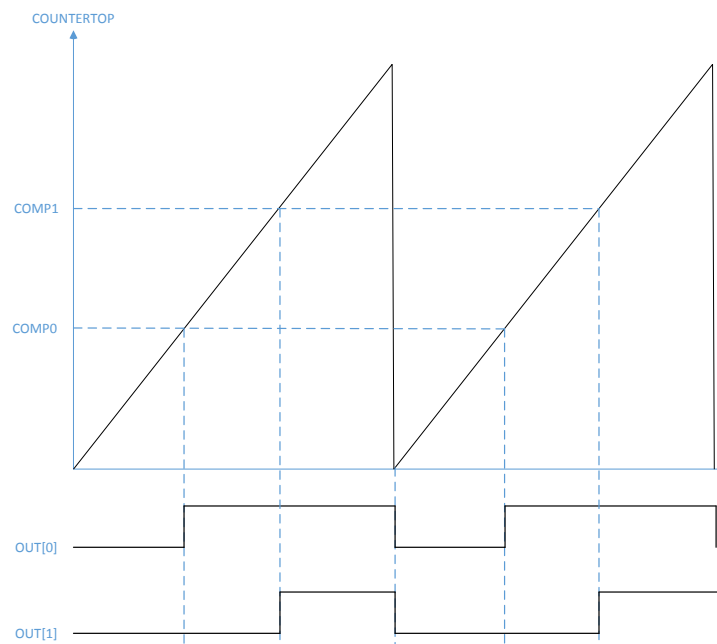

**Figure 144: PWM up counter example - FallingEdge polarity**


In up counting mode, the following formula can be used to compute PWM period and step size:

PWM period:  $T_{PWM(Up)} = T_{PWM\_CLK} * COUNTERTOP$

Step width/Resolution:  $T_{steps} = T_{PWM\_CLK}$

*Figure 145: PWM up-and-down counter example* on page 501 shows the counter operating in up and down mode with (MODE=PWM\_MODE\_UpAndDown) two PWM channels with the same frequency but different duty cycle and output polarity. The counter starts decrementing to zero when COUNTERTOP is reached and will invert the OUT[n] when compare value is hit for the second time. This results in a set of pulses that are center-aligned.

```
uint16_t pwm_seq[4] = {PWM_CH0_DUTY, PWM_CH1_DUTY, PWM_CH2_DUTY,
  PWM_CH3_DUTY};
NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->PSEL.OUT[1] = (second_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE = (PWM_MODE_UPDOWN_UpAndDown << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER = (PWM_PRESCALER_PRESCALER_DIV_1 <<
  PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER = (PWM_DECODER_LOAD_Individual << PWM_DECODER_LOAD_Pos) |
  (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR = ((uint32_t)(pwm_seq) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT = ((sizeof(pwm_seq) / sizeof(uint16_t)) <<
  PWM_SEQ_CNT_CNT_Pos);
NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
```

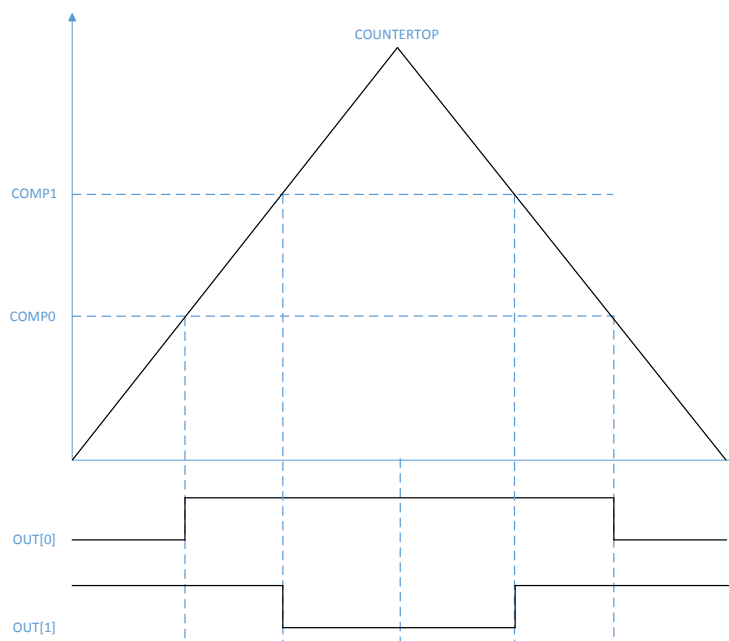

**Figure 145: PWM up-and-down counter example**

In up-and-down counting modes, the following formula can be used to compute PWM period and step size:

$$T_{\text{PWM(Up And Down)}} = T_{\text{PWM\_CLK}} * 2 * \text{COUNTERTOP}$$

$$\text{Step width/Resolution: } T_{\text{steps}} = T_{\text{PWM\_CLK}} * 2$$

## 47.2 Decoder with EasyDMA

The decoder uses EasyDMA to take PWM parameters stored in Data RAM by ways of EasyDMA and updates the internal compare registers of the wave counter based on the mode of operation.

The mentioned PWM parameters are organized into a sequence containing at least one half word (16 bit). Its most significant bit[15] denotes the polarity of the OUT[n] while bit[14:0] is the 15-bit compare value. See below for further details of these RAM defined registers.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Id																				B												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

The DECODER register controls how the RAM content is interpreted and loaded to the internal compare registers. The LOAD field can be used to control if the RAM values are loaded to all compare channels - or alternatively to update a group or all channels with individual values. [Figure 146: Decoder memory access modes](#) on page 502 illustrates how the parameters stored in RAM are organized and routed to the various compare channels in the different modes.

A special mode of operation is available when DECODER.LOAD is set to WaveForm. In this mode, up to three PWM channels can be enabled - OUT[0] to OUT[2]. In RAM, four values are loaded at a time: the first, second and third location are used to load the values, and the fourth RAM location is used to load the COUNTERTOP register. This way one can have up to three PWM channels with a frequency base that changes on a per PWM period basis. This mode of operation is useful for arbitrary wave form generation in applications such as LED lighting.

The register SEQ[n].REFRESH=N (one per sequence n=0 or 1) will instruct a new RAM stored pulse width value on every (N+1)<sup>th</sup> PWM period. Setting the register to zero will result in a new duty cycle update every PWM period as long as the minimum PWM period is observed.

Note that registers SEQ[n].REFRESH and SEQ[n].ENDDELAY are ignored when DECODER.MODE=NextStep . The next value is loaded upon receiving every NEXTSTEP task.

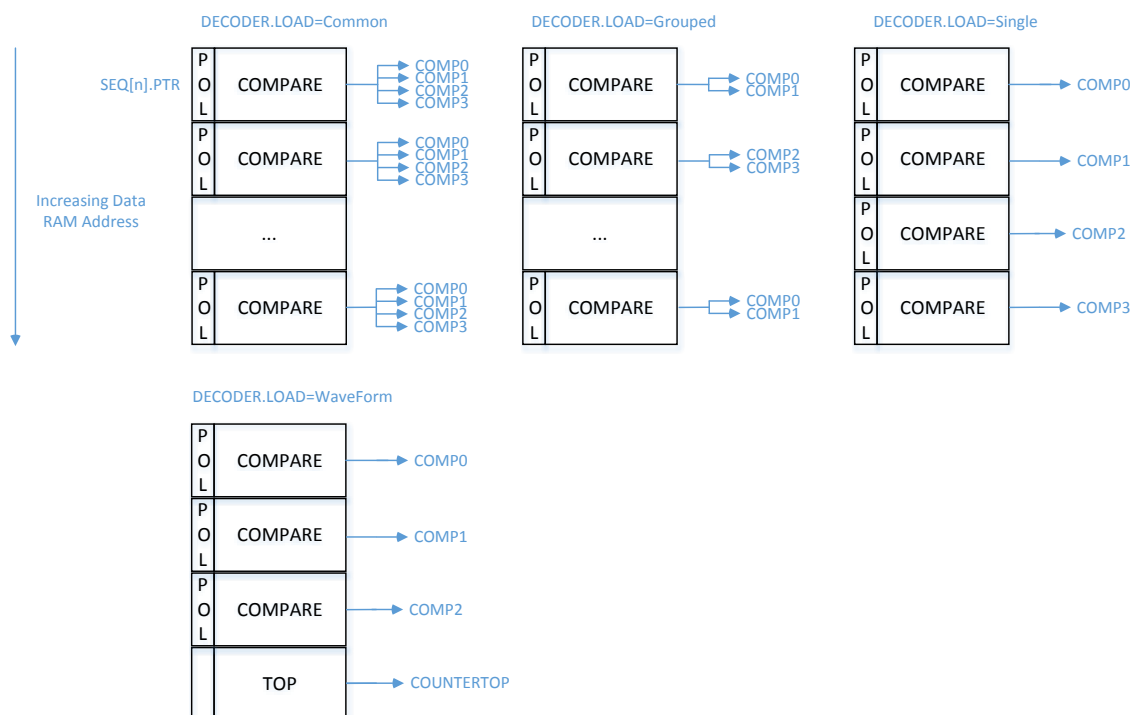


Figure 146: Decoder memory access modes

SEQ[n].PTR is the pointer used to fetch COMPARE values from RAM. If the SEQ[n].PTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 24 for more information about the different memory regions.

After the SEQ[n].PTR is set to the desired RAM location, the SEQ[n].CNT register must be set to the number of 16-bit half words in the sequence. It is important to observe that the Grouped and Single modes require one half word per group or one half word per channel respectively, and thus increases RAM size occupation. If PWM generation was not running yet at that point, sending the SEQSTART[n] task will load the first value from RAM, then start the PWM generation. A SEQSTARTED[n] event is generated as soon as the EasyDMA has read the first PWM parameter from RAM and the wave counter has started executing it. When LOOP.CNT=0, sequence n=0 or 1 is played back once. After the last value in the sequence has been loaded and started executing, a SEQEND[n] event is generated. The PWM generation will then continue with the last loaded value. See [Figure 147: Simple sequence example](#) on page 504 for an example of such simple playback.

To completely stop the PWM generation and force the associated pins to a defined state, a STOP task can be fired at any time. A STOPPED event is generated when the PWM generation has stopped at the end of currently running PWM period, and the pins go into their idle state as defined in GPIO->OUT. PWM generation can then only be restarted through a SEQSTART[n] task. SEQSTART[n] will resume PWM generation after having loaded the first value from the RAM buffer defined in the SEQ[n].PTR register.

The table below provides indication of when specific registers get sampled by the hardware. Care should be taken when updating these registers to avoid values to be applied earlier than expected.

**Table 119: When to safely update PWM registers**

Register	Taken into account by hardware	Recommended (safe) update
SEQ[n].PTR	When sending the SEQSTART[n] task	After having received the SEQSTARTED[n] event
SEQ[n].CNT	When sending the SEQSTART[n] task	After having received the SEQSTARTED[n] event
SEQ[0].ENDDELAY	When sending the SEQSTART[0] task	Before starting sequence [0] through a SEQSTART[0] task
	Every time a new value from sequence [0] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	When no more value from sequence [0] gets loaded from RAM (indicated by the SEQEND[0] event)
		At any time during sequence [1] (which starts when the SEQSTARTED[1] event is fired)
SEQ[1].ENDDELAY	When sending the SEQSTART[1] task	Before starting sequence [1] through a SEQSTART[1] task
	Every time a new value from sequence [1] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	When no more value from sequence [1] gets loaded from RAM (indicated by the SEQEND[1] event)
		At any time during sequence [0] (which starts when the SEQSTARTED[0] event is fired)
SEQ[0].REFRESH	When sending the SEQSTART[0] task	Before starting sequence [0] through a SEQSTART[0] task
	Every time a new value from sequence [0] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	At any time during sequence [1] (which starts when the SEQSTARTED[1] event is fired)
SEQ[1].REFRESH	When sending the SEQSTART[1] task	Before starting sequence [1] through a SEQSTART[1] task
	Every time a new value from sequence [1] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	At any time during sequence [0] (which starts when the SEQSTARTED[0] event is fired)
COUNTERTOP	In DECODER.LOAD=WaveForm: this register is ignored.	Before starting PWM generation through a SEQSTART[n] task
	In all other LOAD modes: at the end of current PWM period (indicated by the PWMPERIODEND event)	After a STOP task has been issued, and the STOPPED event has been received.
MODE	Immediately	Before starting PWM generation through a SEQSTART[n] task
		After a STOP task has been issued, and the STOPPED event has been received.
DECODER	Immediately	Before starting PWM generation through a SEQSTART[n] task
		After a STOP task has been issued, and the STOPPED event has been received.
PRESCALER	Immediately	Before starting PWM generation through a SEQSTART[n] task
		After a STOP task has been issued, and the STOPPED event has been received.
LOOP	Immediately	Before starting PWM generation through a SEQSTART[n] task
		After a STOP task has been issued, and the STOPPED event has been received.
PSEL.OUT[n]	Immediately	Before enabling the PWM instance through the ENABLE register


**Important:** SEQ[n].REFRESH and SEQ[n].ENDDELAY are ignored at the end of a complex sequence, indicated by a LOOPSDONE event. The reason for this is that the last value loaded from RAM is maintained until further action from software (restarting a new sequence, or stopping PWM generation).

*Figure 147: Simple sequence example* on page 504 depicts the source code used for configuration and timing details in a sequence where only sequence 0 is used and only run once with a new PWM duty cycle for each period.

```

NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
                          (PWM_PSEL_OUT_CONNECT_Connected <<
                           PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE        = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE          = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER     = (PWM_PRESCALER_PRESCALER_DIV_1 <<
                           PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP    = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP          = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER       = (PWM_DECODER_LOAD_Common << PWM_DECODER_LOAD_Pos) |
                          (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR     = ((uint32_t)(seq0_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT     = ((sizeof(seq0_ram) / sizeof(uint16_t)) <<
                           PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
  
```

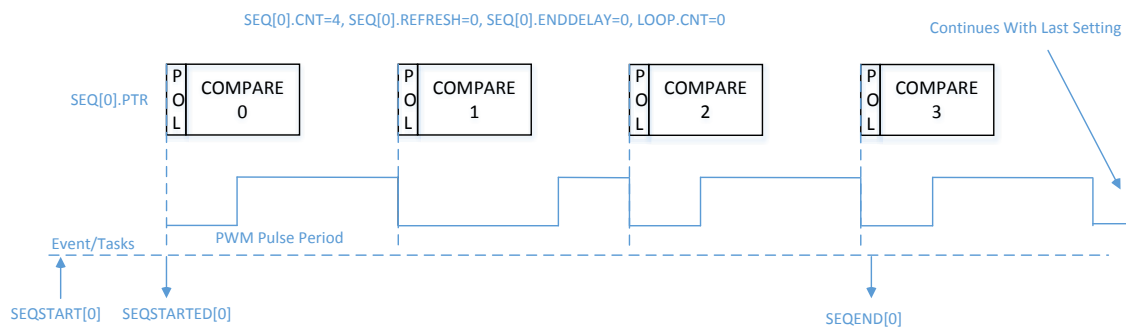

**Figure 147: Simple sequence example**

A more complex example is shown in *Figure 148: Example using two sequences* on page 505, where  $LOOP.CNT > 0$ . In this case, an automated playback takes place, consisting of SEQ[0], delay 0, SEQ[1], delay 1, then again SEQ[0], etc. The user can choose to start a complex playback with SEQ[0] or SEQ[1] through sending the SEQSTART[0] or SEQSTART[1] task.

The complex playback always ends with delay 1.

The two sequences 0 and 1 are defined with address of values tables in Data RAM (pointed by SEQ[n].PTR) and respective buffer size (SEQ[n].CNT). The rate at which a new value is loaded is defined individually for each sequence by SEQ[n].REFRESH. The chaining of sequence 1 following sequence 0 is implicit, the LOOP.CNT register allows the chaining of sequence 1 to sequence 0 for a determined number of times. In other words, it allows to repeat a complex sequence a number of times in a fully automated way.

In the example below, sequence 0 is defined with SEQ[0].REFRESH set to one - that means that a new PWM duty cycle is pushed every second PWM period. This complex sequence is started with the SEQSTART[0] task, so SEQ[0] is played first. Since SEQ[0].ENDDELAY=1 there will be one PWM period delay between last period on sequence 0 and the first period on sequence 1. Since SEQ[1].ENDDELAY=0 there is no delay 1, so SEQ[0] would be started immediately after the end of SEQ[1]. However, as LOOP.CNT is one, the playback stops after having played only once SEQ[1], and both SEQEND[1] and LOOPDONE are generated (their order is not guaranteed in this case).




```

NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
                          (PWM_PSEL_OUT_CONNECT_Connected <<
                           PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE        = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE          = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER     = (PWM_PRESCALER_PRESCALER_DIV_1 <<
                           PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP    = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP          = (1 << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER       = (PWM_DECODER_LOAD_Common << PWM_DECODER_LOAD_Pos) |
                          (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR     = ((uint32_t)(seq0_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT     = ((sizeof(seq0_ram) / sizeof(uint16_t)) <<
                           PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[0].REFRESH = 1;
NRF_PWM0->SEQ[0].ENDDELAY = 1;
NRF_PWM0->SEQ[1].PTR     = ((uint32_t)(seq1_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[1].CNT     = ((sizeof(seq1_ram) / sizeof(uint16_t)) <<
                           PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[1].REFRESH = 0;
NRF_PWM0->SEQ[1].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
  
```

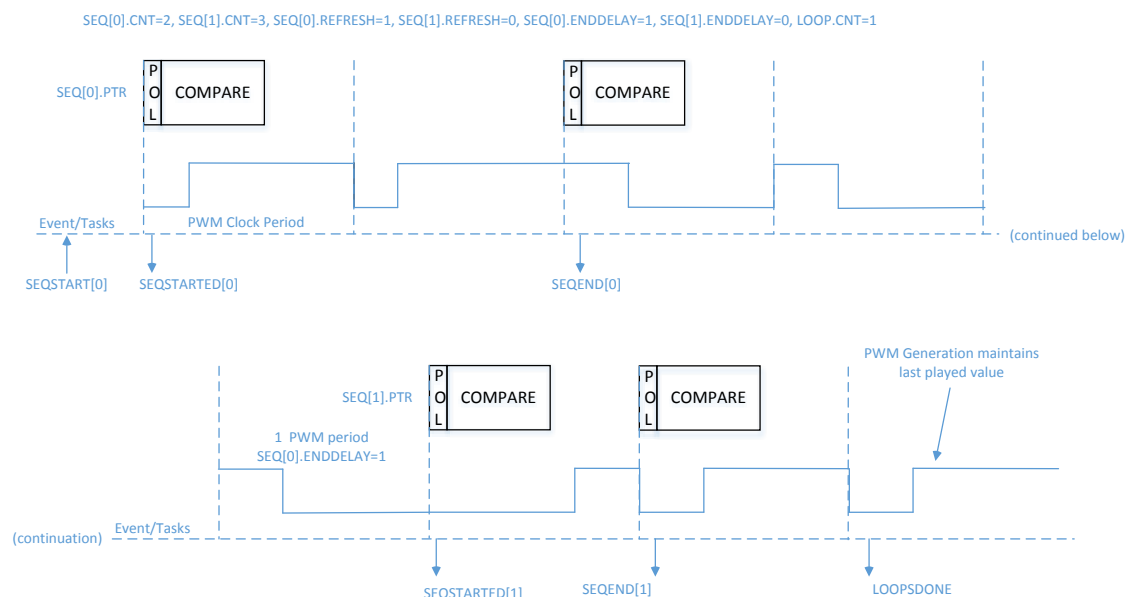

**Figure 148: Example using two sequences**

The decoder can also be configured to asynchronously load a new PWM duty cycle. If the DECODER.MODE register is set to NextStep - then the NEXTSTEP task will cause an update of the internal compare registers on the next PWM period.

The figures below provide an overview of each part of an arbitrary sequence, in various modes (LOOP.CNT=0 and LOOP.CNT>0). In particular are represented:

- Initial and final duty cycle on the PWM output(s)
- Chaining of SEQ[0] and SEQ[1] if LOOP.CNT>0
- Influence of registers on the sequence
- Events fired during a sequence
- DMA activity (loading of next value and applying it to the output(s))

Note that the single-shot example applies also to SEQ[1], only SEQ[0] is represented for simplicity.

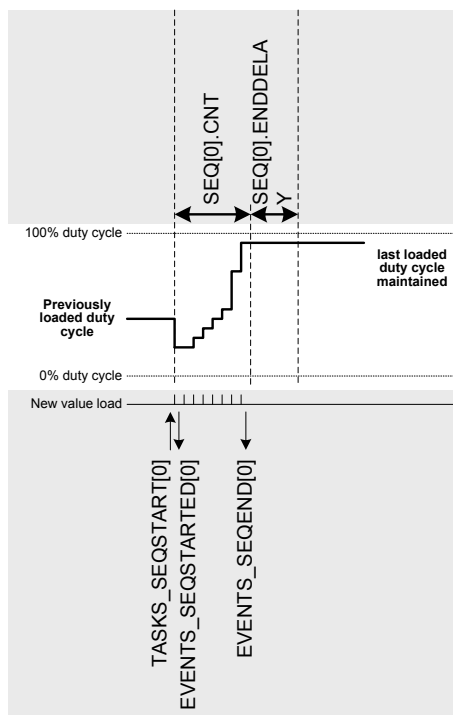


Figure 149: Single shot (LOOP.CNT=0)


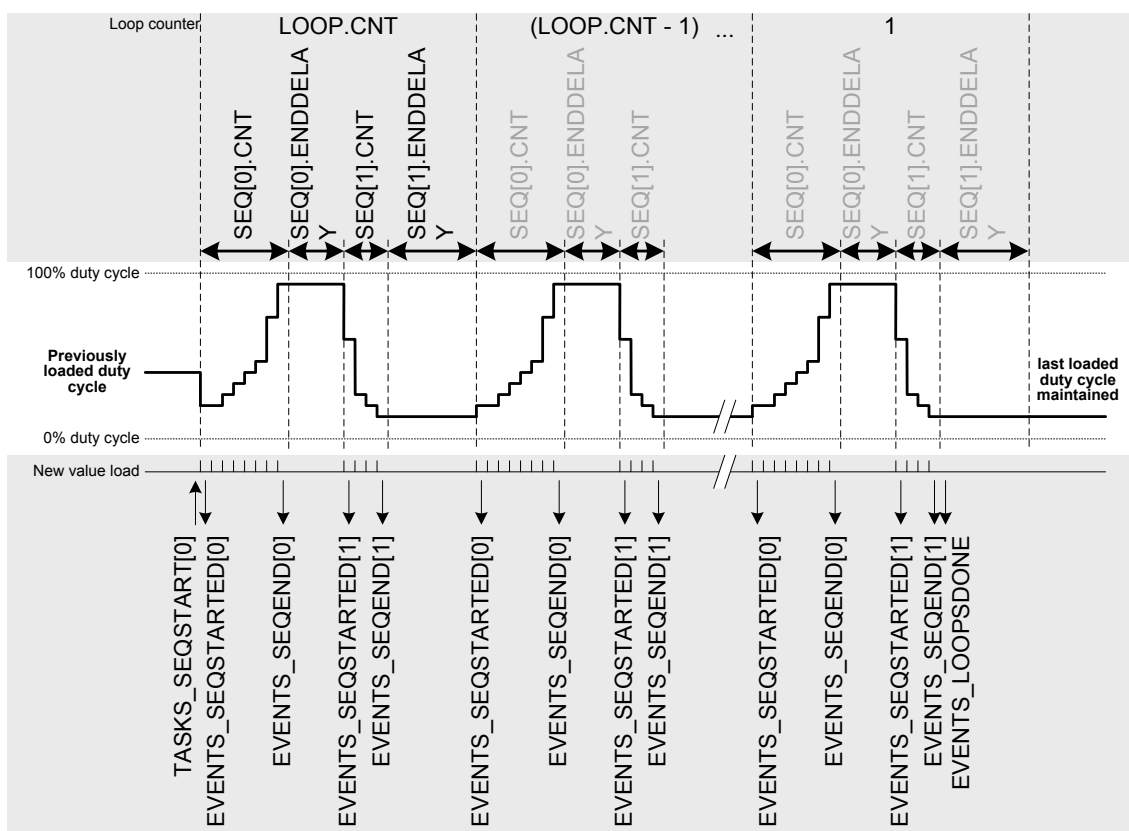


Figure 150: Complex sequence (LOOP.CNT>0) starting with SEQ[0]

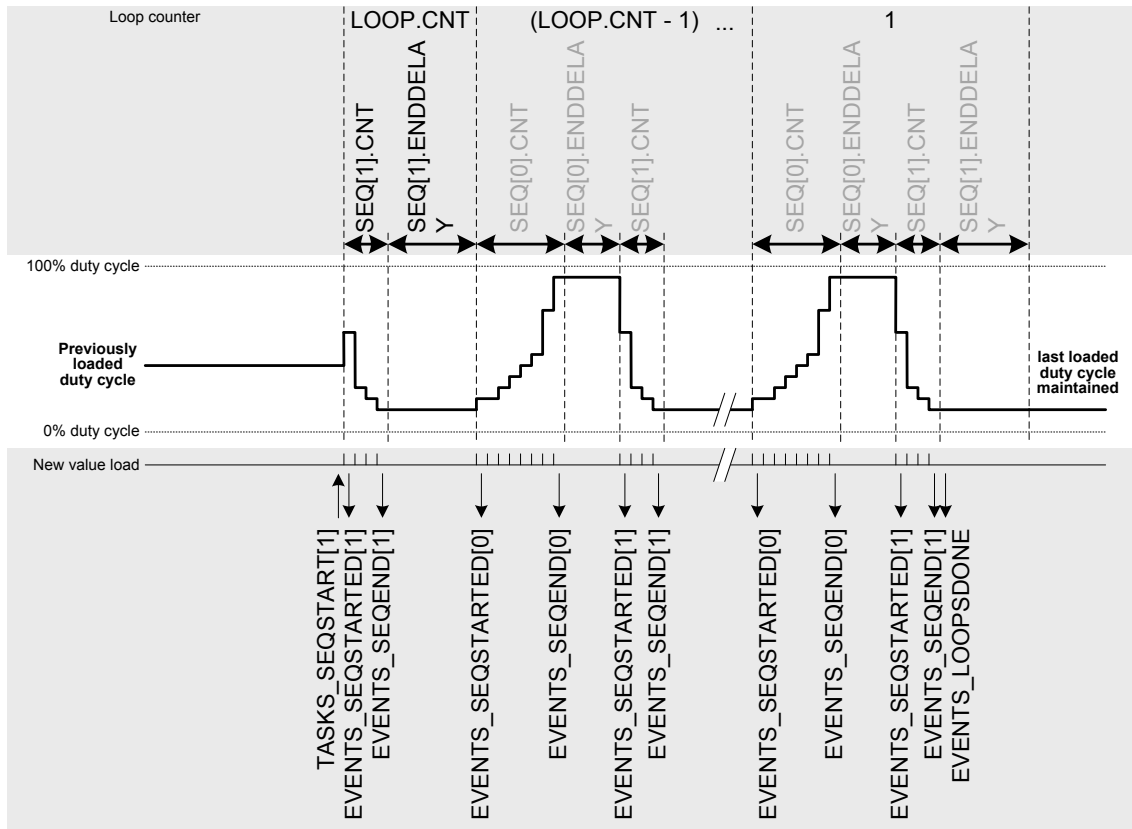

**Figure 151: Complex sequence (LOOP.CNT>0) starting with SEQ[1]**

Note that if a sequence is in use in a simple or complex sequence, it must have a length of  $\text{SEQ}[n].\text{CNT} > 0$ .

## 47.3 Limitations

The previous compare value will be repeated if the PWM period is selected to be shorter than the time it takes for the EasyDMA to fetch from RAM and update the internal compare registers.

This is to ensure a glitch-free operation even if very short PWM periods are chosen.

## 47.4 Pin configuration

The  $\text{OUT}[n]$  ( $n=0..3$ ) signals associated to each channel of the PWM module are mapped to physical pins according to the configuration specified in the respective  $\text{PSEL.OUT}[n]$  registers. If a  $\text{PSEL.OUT}[n].\text{CONNECT}$  is set to Disconnected, the associated PWM module signal will not be connected to any physical pins.

The  $\text{PSEL.OUT}[n]$  registers and their configurations are only used as long as the PWM module is enabled and PWM generation is active (wave counter started), and retained only as long as the device is in System ON mode, see [POWER](#) chapter for more information about power modes.

To ensure correct behaviour in the PWM module, the pins used by the PWM module must be configured in the GPIO peripheral as described in [Table 120: Recommended GPIO configuration before starting PWM generation](#) on page 508 before enabling the PWM module. The pins' idle state is defined by the OUT registers in the GPIO module. This is to ensure that the pins used by the PWM module are driven correctly, if PWM generation is stopped through a STOP task, the PWM module itself is temporarily disabled, or the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected IOs as long as the PWM module is supposed to be connected to an external PWM circuit.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behaviour.

**Table 120: Recommended GPIO configuration before starting PWM generation**

PWM signal	PWM pin	Direction	Output value	Comment
OUT[n]	As specified in PSEL.OUT[n] (n=0..3)	Output	0	Idle state defined in GPIO->OUT

## 47.5 Registers

**Table 121: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001C000	PWM	PWM0	Pulse Width Modulation Unit 0	
0x40021000	PWM	PWM1	Pulse Width Modulation Unit 1	
0x40022000	PWM	PWM2	Pulse Width Modulation Unit 2	

**Table 122: Register Overview**

Register	Offset	Description
TASKS_STOP	0x004	Stops PWM pulse generation on all channels at the end of current PWM period, and stops sequence playback
TASKS_SEQSTART[0]	0x008	Loads the first PWM value on all enabled channels from sequence 0, and starts playing that sequence at the rate defined in SEQ[0]REFRESH and/or DECODER.MODE. Causes PWM generation to start it was not running.
TASKS_SEQSTART[1]	0x00C	Loads the first PWM value on all enabled channels from sequence 1, and starts playing that sequence at the rate defined in SEQ[1]REFRESH and/or DECODER.MODE. Causes PWM generation to start it was not running.
TASKS_NEXTSTEP	0x010	Steps by one value in the current sequence on all enabled channels if DECODER.MODE=NextStep. Does not cause PWM generation to start it was not running.
EVENTS_STOPPED	0x104	Response to STOP task, emitted when PWM pulses are no longer generated
EVENTS_SEQSTARTED[0]	0x108	First PWM period started on sequence 0
EVENTS_SEQSTARTED[1]	0x10C	First PWM period started on sequence 1
EVENTS_SEQEND[0]	0x110	Emitted at end of every sequence 0, when last value from RAM has been applied to wave counter
EVENTS_SEQEND[1]	0x114	Emitted at end of every sequence 1, when last value from RAM has been applied to wave counter
EVENTS_PWMPERIODEN	0x118	Emitted at the end of each PWM period
EVENTS_LOOPSDONE	0x11C	Concatenated sequences have been played the amount of times defined in LOOP.CNT
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	PWM module enable register
MODE	0x504	Selects operating mode of the wave counter
COUNTERTOP	0x508	Value up to which the pulse generator counter counts
PRESCALER	0x50C	Configuration for PWM_CLK
DECODER	0x510	Configuration of the decoder
LOOP	0x514	Amount of playback of a loop
SEQ[0].PTR	0x520	Beginning address in Data RAM of this sequence
SEQ[0].CNT	0x524	Amount of values (duty cycles) in this sequence
SEQ[0].REFRESH	0x528	Amount of additional PWM periods between samples loaded into compare register
SEQ[0].ENDDelay	0x52C	Time added after the sequence
SEQ[1].PTR	0x540	Beginning address in Data RAM of this sequence
SEQ[1].CNT	0x544	Amount of values (duty cycles) in this sequence
SEQ[1].REFRESH	0x548	Amount of additional PWM periods between samples loaded into compare register
SEQ[1].ENDDelay	0x54C	Time added after the sequence
PSEL.OUT[0]	0x560	Output pin select for PWM channel 0
PSEL.OUT[1]	0x564	Output pin select for PWM channel 1
PSEL.OUT[2]	0x568	Output pin select for PWM channel 2
PSEL.OUT[3]	0x56C	Output pin select for PWM channel 3

### 47.5.1 SHORTS

Address offset: 0x200

## Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id					E D C B A																														
Reset 0x00000000					0 0																														
Id	RW	Field	Value	Id	Value	Description																													
A	RW	SEQEND0_STOP				Shortcut between SEQEND[0] event and STOP task																													
						See <a href="#">EVENTS_SEQEND[0]</a> and <a href="#">TASKS_STOP</a>																													
			Disabled		0	Disable shortcut																													
			Enabled		1	Enable shortcut																													
B	RW	SEQEND1_STOP				Shortcut between SEQEND[1] event and STOP task																													
						See <a href="#">EVENTS_SEQEND[1]</a> and <a href="#">TASKS_STOP</a>																													
			Disabled		0	Disable shortcut																													
			Enabled		1	Enable shortcut																													
C	RW	LOOPSDONE_SEQSTART0				Shortcut between LOOPSDONE event and SEQSTART[0] task																													
						See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_SEQSTART[0]</a>																													
			Disabled		0	Disable shortcut																													
			Enabled		1	Enable shortcut																													
D	RW	LOOPSDONE_SEQSTART1				Shortcut between LOOPSDONE event and SEQSTART[1] task																													
						See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_SEQSTART[1]</a>																													
			Disabled		0	Disable shortcut																													
			Enabled		1	Enable shortcut																													
E	RW	LOOPSDONE_STOP				Shortcut between LOOPSDONE event and STOP task																													
						See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_STOP</a>																													
			Disabled		0	Disable shortcut																													
			Enabled		1	Enable shortcut																													

## 47.5.2 INTEN

Address offset: 0x300

### Enable or disable interrupt

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			H G F E D C B																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value Id	Value	Description																													
B	RW	STOPPED			Enable or disable interrupt for STOPPED event																													
			Disabled	0	Disable																													
			Enabled	1	Enable																													
C	RW	SEQSTARTED0			Enable or disable interrupt for SEQSTARTED[0] event																													
			Disabled	0	Disable																													
			Enabled	1	Enable																													
D	RW	SEQSTARTED1			Enable or disable interrupt for SEQSTARTED[1] event																													
			Disabled	0	Disable																													
			Enabled	1	Enable																													
E	RW	SEQEND0			Enable or disable interrupt for SEQEND[0] event																													
			Disabled	0	Disable																													
			Enabled	1	Enable																													
F	RW	SEQEND1			Enable or disable interrupt for SEQEND[1] event																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																													H					G	F	E	D	C	B
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
						See <a href="#">EVENTS_SEQEND[1]</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
G	RW	PWMPERIODEND				Enable or disable interrupt for PWMPERIODEND event																																	
						See <a href="#">EVENTS_PWMPERIODEND</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
H	RW	LOOPSDONE				Enable or disable interrupt for LOOPSDONE event																																	
						See <a href="#">EVENTS_LOOPSDONE</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	

### 47.5.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													H	G	F	E	D	C	B
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																													
B	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	SEQSTARTED0				Write '1' to Enable interrupt for SEQSTARTED[0] event																													
						See <a href="#">EVENTS_SEQSTARTED[0]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
D	RW	SEQSTARTED1				Write '1' to Enable interrupt for SEQSTARTED[1] event																													
						See <a href="#">EVENTS_SEQSTARTED[1]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
E	RW	SEQEND0				Write '1' to Enable interrupt for SEQEND[0] event																													
						See <a href="#">EVENTS_SEQEND[0]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
F	RW	SEQEND1				Write '1' to Enable interrupt for SEQEND[1] event																													
						See <a href="#">EVENTS_SEQEND[1]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
G	RW	PWMPERIODEND				Write '1' to Enable interrupt for PWMPERIODEND event																													
						See <a href="#">EVENTS_PWMPERIODEND</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
H	RW	LOOPSDONE				Write '1' to Enable interrupt for LOOPSDONE event																													

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																								H	G	F	E	D	C	B
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																								
						See <a href="#">EVENTS_LOOPSDONE</a>																																								
			Set	1		Enable																																								
			Disabled	0		Read: Disabled																																								
			Enabled	1		Read: Enabled																																								

## 47.5.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					H G F E D C B																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
B	RW	STOPPED			Write '1' to Disable interrupt for STOPPED event																															
					See <a href="#">EVENTS_STOPPED</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
C	RW	SEQSTARTED0			Write '1' to Disable interrupt for SEQSTARTED[0] event																															
					See <a href="#">EVENTS_SEQSTARTED[0]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
D	RW	SEQSTARTED1			Write '1' to Disable interrupt for SEQSTARTED[1] event																															
					See <a href="#">EVENTS_SEQSTARTED[1]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
E	RW	SEQEND0			Write '1' to Disable interrupt for SEQEND[0] event																															
					See <a href="#">EVENTS_SEQEND[0]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
F	RW	SEQEND1			Write '1' to Disable interrupt for SEQEND[1] event																															
					See <a href="#">EVENTS_SEQEND[1]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
G	RW	PWMPERIODEND			Write '1' to Disable interrupt for PWMPERIODEND event																															
					See <a href="#">EVENTS_PWMPERIODEND</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
H	RW	LOOPSDONE			Write '1' to Disable interrupt for LOOPSDONE event																															
					See <a href="#">EVENTS_LOOPSDONE</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															

## 47.5.5 ENABLE

Address offset: 0x500

## PWM module enable register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																				A
Reset					0x00000000																															
Id	RW	Field	Value	Id	Value		Description																													
A	RW	ENABLE					Enable or disable PWM module																													
			Disabled		0		Disabled																													
			Enabled		1		Enable																													

## 47.5.6 MODE

Address offset: 0x504

Selects operating mode of the wave counter

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																													
A	RW	UPDOWN						Selects up or up and down as wave counter mode																													
			Up			0		Up counter - edge aligned PWM duty-cycle																													
			UpAndDown			1		Up and down counter - center aligned PWM duty cycle																													

### 47.5.7 COUNTERTOP

Address offset: 0x508

Value up to which the pulse generator counter counts

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x000003FF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																														
A	RW	COUNTERTOP		[3..32767]	Value up to which the pulse generator counter counts. This register is ignored when DECODER.MODE=WaveForm and only values from RAM will be used.																														

### 47.5.8 PRESCALER

Address offset: 0x50C

### Configuration for PWM\_CLK

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PRESCALER			Pre-scaler of PWM_CLK																														
			DIV_1	0	Divide by 1 (16MHz)																														
			DIV_2	1	Divide by 2 ( 8MHz)																														
			DIV_4	2	Divide by 4 ( 4MHz)																														
			DIV_8	3	Divide by 8 ( 2MHz)																														
			DIV_16	4	Divide by 16 ( 1MHz)																														
			DIV_32	5	Divide by 32 ( 500kHz)																														
			DIV_64	6	Divide by 64 ( 250kHz)																														
			DIV_128	7	Divide by 128 ( 125kHz)																														

### 47.5.9 DECODER

Address offset: 0x510

### Configuration of the decoder



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																													B								A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																		
A	RW	LOAD				How a sequence is read from RAM and spread to the compare register																																		
		Common	0			1st half word (16-bit) used in all PWM channels 0..3																																		
		Grouped	1			1st half word (16-bit) used in channel 0..1; 2nd word in channel 2..3																																		
		Individual	2			1st half word (16-bit) in ch.0; 2nd in ch.1; ...; 4th in ch.3																																		
		WaveForm	3			1st half word (16-bit) in ch.0; 2nd in ch.1; ...; 4th in COUNTERTOP																																		
B	RW	MODE				Selects source for advancing the active sequence																																		
		RefreshCount	0			SEQ[n].REFRESH is used to determine loading internal compare registers																																		
		NextStep	1			NEXTSTEP task causes a new value to be loaded to internal compare registers																																		

### 47.5.10 LOOP

Address offset: 0x514

Amount of playback of a loop

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value										Description																					
A	RW	CNT													Amount of playback of pattern cycles																					
		Disabled	0												Looping disabled (stop at the end of the sequence)																					

### 47.5.11 SEQ[0].PTR

Address offset: 0x520

Beginning address in Data RAM of this sequence

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>														<b>Description</b>																
A	RW	PTR																	Beginning address in Data RAM of this sequence																

### 47.5.12 SEQ[0].CNT

Address offset: 0x524

Amount of values (duty cycles) in this sequence

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																				A A A A A A A A A A A A A A A A																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	CNT							Amount of values (duty cycles) in this sequence																											
		Disabled	0						Sequence is disabled, and shall not be started as it is empty																											

### 47.5.13 SEQ[0].REFRESH

Address offset: 0x528

Amount of additional PWM periods between samples loaded into compare register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value	Description																															
A	RW	CNT				Amount of additional PWM periods between samples loaded into compare register (load every REFRESH.CNT+1 PWM periods)																															
			Continuous		0	Update every PWM period																															

### 47.5.14 SEQ[0].ENDDELAY

Address offset: 0x52C

Time added after the sequence

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id									A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	CNT				Time added after the sequence in PWM periods																										

### 47.5.15 SEQ[1].PTR

Address offset: 0x540

Beginning address in Data RAM of this sequence

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	PTR				Beginning address in Data RAM of this sequence																										

### 47.5.16 SEQ[1].CNT

Address offset: 0x544

Amount of values (duty cycles) in this sequence

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
A	RW	CNT				Amount of values (duty cycles) in this sequence																																
			Disabled		0	Sequence is disabled, and shall not be started as it is empty																																

### 47.5.17 SEQ[1].REFRESH

Address offset: 0x548

Amount of additional PWM periods between samples loaded into compare register

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id									A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000001	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value	Description																										
A	RW	CNT				Amount of additional PWM periods between samples loaded into compare register (load every REFRESH.CNT+1 PWM periods)																										
			Continuous		0	Update every PWM period																										

### 47.5.18 SEQ[1].ENDDELAY

Address offset: 0x54C

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>												<b>Description</b>																			
A	RW	CNT															Time added after the sequence in PWM periods																			

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																													
A	RW	PIN		[0..31]		Pin number																													
C	RW	CONNECT				Connection																													
			Disconnected	1		Disconnect																													
			Connected	0		Connect																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	PIN		[0..31]				Pin number																											
C	RW	CONNECT						Connection																											
			Disconnected	1				Disconnect																											
			Connected	0				Connect																											

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				C																																		
Reset 0xFFFFFFF				1 1																																		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
A	RW	PIN		[0..31]	Pin number																																	
C	RW	CONNECT			Connection																																	
			Disconnected	1	Disconnect																																	
			Connected	0	Connect																																	

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id			C																												A	A	A	A	A
Reset 0xFFFFFFFF			1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PIN			[0..31]	Pin number																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																				
Id					C																																A				A				A				A																							
Reset 0xFFFFFFFF					1																																1				1				1				1				1				1				1				1				1			
Id	RW	Field	Value Id		Value		Description																																																																	
C	RW	CONNECT					Connection																																																																	
			Disconnected		1		Disconnect																																																																	
			Connected		0		Connect																																																																	


## 47.6 Electrical specification

### 47.6.1 PWM Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>PWM,16MHz</sub>	PWM run current, Prescaler set to DIV_1 (16 MHz), excluding DMA and GPIO		200		μA
I <sub>PWM,8MHz</sub>	PWM run current, Prescaler set to DIV_2 (8 MHz), excluding DMA and GPIO		150		μA
I <sub>PWM,125kHz</sub>	PWM run current, Prescaler set to DIV_128 (125 kHz), excluding DMA and GPIO		150		μA

## 48 SPI — Serial peripheral interface master

The SPI master provides a simple CPU interface which includes a TXD register for sending data and an RXD register for receiving data. This section is added for legacy support for now.

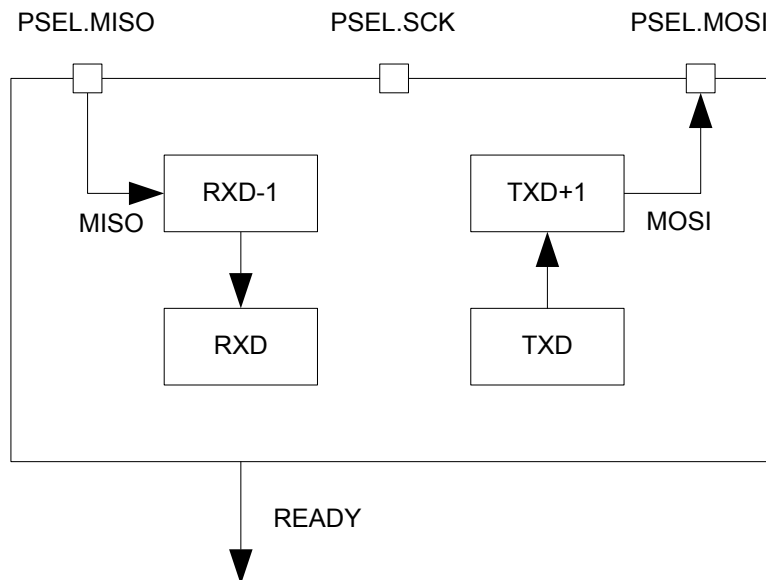

**Figure 152: SPI master**

RXD-1 and TXD+1 illustrate the double buffered version of RXD and TXD respectively.

### 48.1 Functional description

The TXD and RXD registers are double-buffered to enable some degree of uninterrupted data flow in and out of the SPI master.

The SPI master does not implement support for chip select directly. Therefore, the CPU must use available GPIOs to select the correct slave and control this independently of the SPI master. The SPI master supports SPI modes 0 through 3.

**Table 123: SPI modes**

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE 0 (Leading)	0 (Active High)	0 (Active High)
SPI_MODE 0 (Leading)	1 (Active Low)	1 (Active Low)
SPI_MODE 1 (Trailing)	0 (Active High)	0 (Active High)
SPI_MODE 1 (Trailing)	1 (Active Low)	1 (Active Low)

#### 48.1.1 SPI master mode pin configuration

The different signals SCK, MOSI, and MISO associated with the SPI master are mapped to physical pins.

This mapping is according to the configuration specified in the PSELSCK, PSELMOSI, and PSELMISO registers respectively. If a value of 0xFFFFFFFF is specified in any of these registers, the associated SPI master signal is not connected to any physical pin. The PSELSCK, PSELMOSI, and PSELMISO registers and their configurations are only used as long as the SPI master is enabled, and retained only as long as the device is in ON mode. PSELSCK, PSELMOSI, and PSELMISO must only be configured when the SPI master is disabled.

To secure correct behavior in the SPI, the pins used by the SPI must be configured in the GPIO peripheral as described in [Table 124: GPIO configuration](#) on page 518 prior to enabling the SPI. The SCK must

always be connected to a pin, and that pin's input buffer must always be connected for the SPI to work. This configuration must be retained in the GPIO for the selected IOs as long as the SPI is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time, failing to do so may result in unpredictable behavior.

**Table 124: GPIO configuration**

SPI master signal	SPI master pin	Direction	Output value
SCK	As specified in PSELCK	Output	Same as CONFIG.CPOL
MOSI	As specified in PSELMOSI	Output	0
MISO	As specified in PSELMISO	Input	Not applicable

### 48.1.2 Shared resources

The SPI shares registers and other resources with other peripherals that have the same ID as the SPI. Therefore, the user must disable all peripherals that have the same ID as the SPI before the SPI can be configured and used.

Disabling a peripheral that has the same ID as the SPI will not reset any of the registers that are shared with the SPI. It is therefore important to configure all relevant SPI registers explicitly to secure that it operates correctly.


See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.

### 48.1.3 SPI master transaction sequence

An SPI master transaction is started by writing the first byte, which is to be transmitted by the SPI master, to the TXD register.

Since the transmitter is double buffered, the second byte can be written to the TXD register immediately after the first one. The SPI master will then send these bytes in the order they are written to the TXD register.


The SPI master is a synchronous interface, and for every byte that is sent, a different byte will be received at the same time; this is illustrated in [Figure 153: SPI master transaction](#) on page 519. Bytes that are received will be moved to the RXD register where the CPU can extract them by reading the register. The RXD register is double buffered in the same way as the TXD register, and a second byte can therefore be received at the same time as the first byte is being extracted from RXD by the CPU. The SPI master will generate a READY event every time a new byte is moved to the RXD register. The double buffered byte will be moved from RXD-1 to RXD as soon as the first byte is extracted from RXD. The SPI master will stop when there are no more bytes to send in TXD and TXD+1.

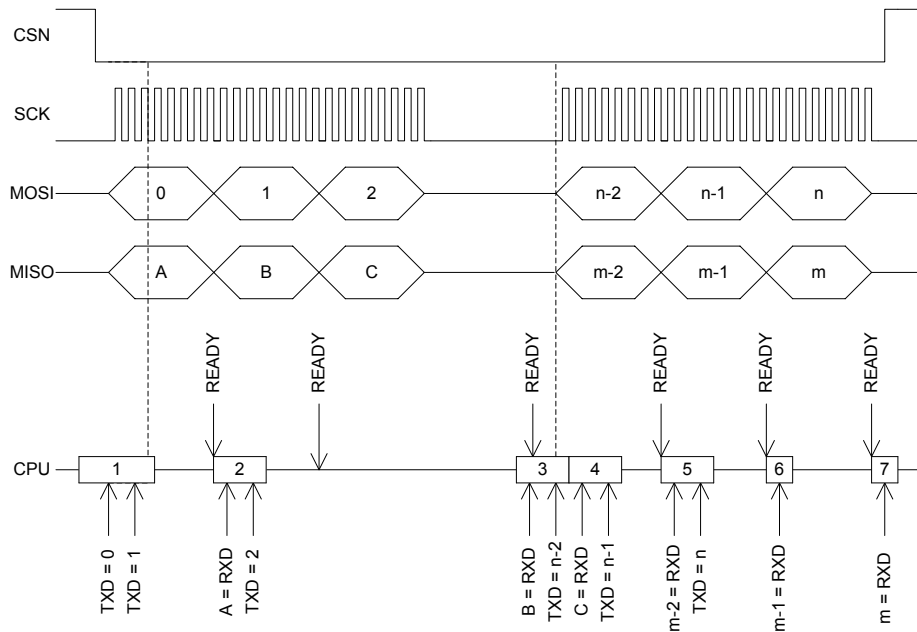

**Figure 153: SPI master transaction**

The READY event of the third byte transaction is delayed until B is extracted from RXD in occurrence number 3 on the horizontal lifeline. The reason for this is that the third event is generated first when C is moved from RXD-1 to RXD after B is read.

The SPI master will move the incoming byte to the RXD register after a short delay following the SCK clock period of the last bit in the byte. This also means that the READY event will be delayed accordingly, see [Figure 154: SPI master transaction](#) on page 519. Therefore, it is important that you always clear the READY event, even if the RXD register and the data that is being received is not used.

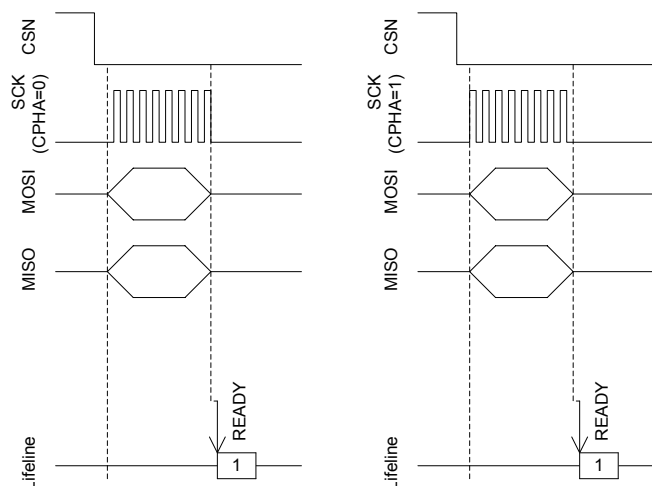

**Figure 154: SPI master transaction**

## 48.2 Registers

**Table 125: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPI	SPI0	SPI master 0	Deprecated
0x40004000	SPI	SPI1	SPI master 1	Deprecated
0x40023000	SPI	SPI2	SPI master 2	Deprecated

**Table 126: Register Overview**

Register	Offset	Description
EVENTS_READY	0x108	TXD byte sent and RXD byte received
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">ENABLE</a>	0x500	Enable SPI
<a href="#">PSELCK</a>	0x508	Pin select for SCK
<a href="#">PSELMOSI</a>	0x50C	Pin select for MOSI
<a href="#">PSELMISO</a>	0x510	Pin select for MISO
<a href="#">PSEL.SCK</a>	0x508	Pin select for SCK
<a href="#">PSEL.MOSI</a>	0x50C	Pin select for MOSI
<a href="#">PSEL.MISO</a>	0x510	Pin select for MISO
<a href="#">RXD</a>	0x518	RXD register
<a href="#">TXD</a>	0x51C	TXD register
<a href="#">FREQUENCY</a>	0x524	SPI frequency
<a href="#">CONFIG</a>	0x554	Configuration register

### 48.2.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	READY				Write '1' to Enable interrupt for READY event																									
						See <a href="#">EVENTS_READY</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									

### 48.2.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	READY				Write '1' to Disable interrupt for READY event																									
						See <a href="#">EVENTS_READY</a>																									
		Clear	1			Disable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									



### 48.2.3 ENABLE

Address offset: 0x500

Enable SPI

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable SPI																														
			Disabled	0	Disable SPI																														
			Enabled	1	Enable SPI																														

### 48.2.4 PSELSCK ( Deprecated )

Address offset: 0x508

Pin select for SCK

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELSCK		[0..31]	Pin number configuration for SPI SCK signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

### 48.2.5 PSELMOSI ( Deprecated )

Address offset: 0x50C

Pin select for MOSI

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELMOSI		[0..31]	Pin number configuration for SPI MOSI signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

### 48.2.6 PSELMISO ( Deprecated )

Address offset: 0x510

Pin select for MISO

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELMISO		[0..31]	Pin number configuration for SPI MISO signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

### 48.2.7 PSEL.SCK

Address offset: 0x508

Pin select for SCK

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELSCK		[0..31]	Pin number configuration for SPI SCK signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

## 48.2.8 PSEL.MOSI

Address offset: 0x50C

Pin select for MOSI

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																													
A	RW	PSELMOSI		[0..31]		Pin number configuration for SPI MOSI signal																													
			Disconnected	0xFFFFFFFF		Disconnect																													

## 48.2.9 PSEL.MISO

Address offset: 0x510

Pin select for MISO

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PSELMISO		[0..31]		Pin number configuration for SPI MISO signal																													
			Disconnected	0xFFFFFFFF		Disconnect																													

## 48.2.10 RXD

Address offset: 0x518

RXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	RXD			RX data received. Double buffered																														

## 48.2.11 TXD

Address offset: 0x51C

TXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TXD			TX data to send. Double buffered																														

## 48.2.12 FREQUENCY

Address offset: 0x524

SPI frequency

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																																
A	RW	FREQUENCY				SPI master data rate																																
			K125	0x02000000		125 kbps																																
			K250	0x04000000		250 kbps																																
			K500	0x08000000		500 kbps																																
			M1	0x10000000		1 Mbps																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
			M2	0x20000000		2 Mbps																													
			M4	0x40000000		4 Mbps																													
			M8	0x80000000		8 Mbps																													

### 48.2.13 CONFIG

Address offset: 0x554

Configuration register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ORDER				Bit order																																
			MsbFirst	0		Most significant bit shifted out first																																
			LsbFirst	1		Least significant bit shifted out first																																
B	RW	CPHA				Serial clock (SCK) phase																																
			Leading	0		Sample on leading edge of clock, shift serial data on trailing edge																																
			Trailing	1		Sample on trailing edge of clock, shift serial data on leading edge																																
C	RW	CPOL				Serial clock (SCK) polarity																																
			ActiveHigh	0		Active high																																
			ActiveLow	1		Active low																																

## 48.3 Electrical specification

### 48.3.1 SPI master interface

Symbol	Description	Min.	Typ.	Max.	Units
$f_{SPI}$	Bit rates for SPI <sup>38</sup>			8 <sup>39</sup>	Mbps
$I_{SPI,2Mbps}$	Run current for SPI, 2 Mbps			50	$\mu A$
$I_{SPI,8Mbps}$	Run current for SPI, 8 Mbps			50	$\mu A$
$I_{SPI,IDLE}$	Idle current for SPI (STARTed, no CSN activity)		<1		$\mu A$
$t_{SPI,START,LP}$	Time from writing TXD register to transmission started, low power mode		$t_{SPI,START,CI}$ +		$\mu s$
$t_{SPI,START,CL}$	Time from writing TXD register to transmission started, constant latency mode		1		$\mu s$

### 48.3.2 Serial Peripheral Interface (SPI) Master timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$t_{SPI,CSCK,8Mbps}$	SCK period at 8Mbps		125		ns
$t_{SPI,CSCK,4Mbps}$	SCK period at 4Mbps		250		ns
$t_{SPI,CSCK,2Mbps}$	SCK period at 2Mbps		500		ns
$t_{SPI,RSCK,LD}$	SCK rise time, low drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPI,RSCK,HD}$	SCK rise time, high drive <sup>a</sup>			$t_{HRF,25pF}$	
$t_{SPI,FSCK,LD}$	SCK fall time, low drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPI,FSCK,HD}$	SCK fall time, high drive <sup>a</sup>			$t_{HRF,25pF}$	

<sup>38</sup> Higher bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>39</sup> The actual maximum data rate depends on the slave's CLK to MISO and MOSI setup and hold timings.

<sup>a</sup> At 25pF load, including GPIO capacitance, see GPIO spec.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{SPI,WHSCK}$	SCK high time <sup>a</sup>	$(0.5 \cdot t_{CSCK})$			
$t_{SPI,WLSCK}$	SCK low time <sup>a</sup>	$(0.5 \cdot t_{CSCK})$			
$t_{SPI,SUMI}$	MISO to CLK edge setup time	19			ns
$t_{SPI,HMI}$	CLK edge to MISO hold time	18			ns
$t_{SPI,VMO}$	CLK edge to MOSI valid			59	ns
$t_{SPI,HMO}$	MOSI hold time after CLK edge	20			ns


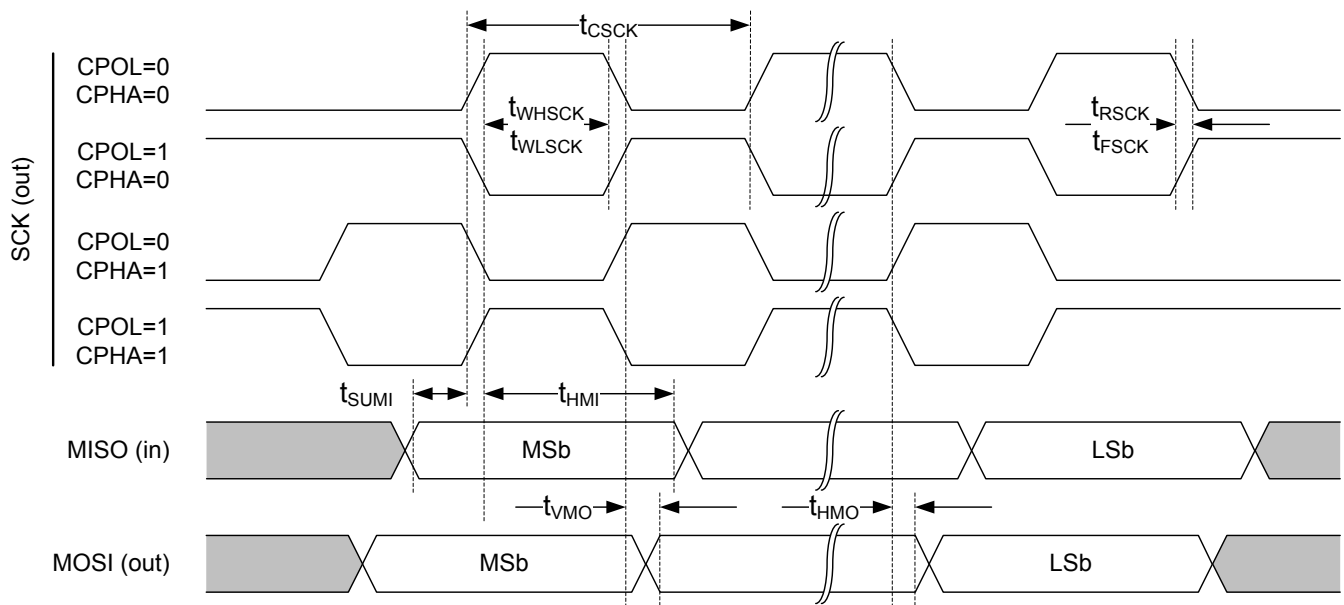


Figure 155: SPI master timing diagram

## 49 TWI — I<sup>2</sup>C compatible two-wire interface

The TWI master is compatible with I<sup>2</sup>C operating at 100 kHz and 400 kHz.

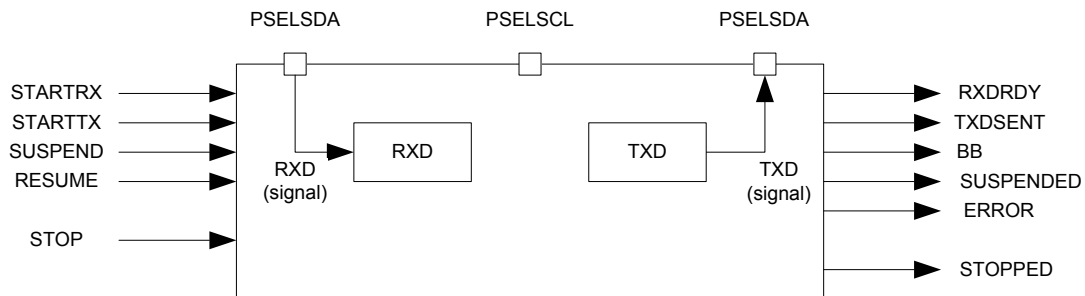


**Figure 156: TWI master's main features**

### 49.1 Functional description

This TWI master is not compatible with CBUS. The TWI transmitter and receiver are single buffered.

See, [Figure 156: TWI master's main features](#) on page 525.

A TWI setup comprising one master and three slaves is illustrated in [Figure 157: A typical TWI setup comprising one master and three slaves](#) on page 525. This TWI master is only able to operate as the only master on the TWI bus.

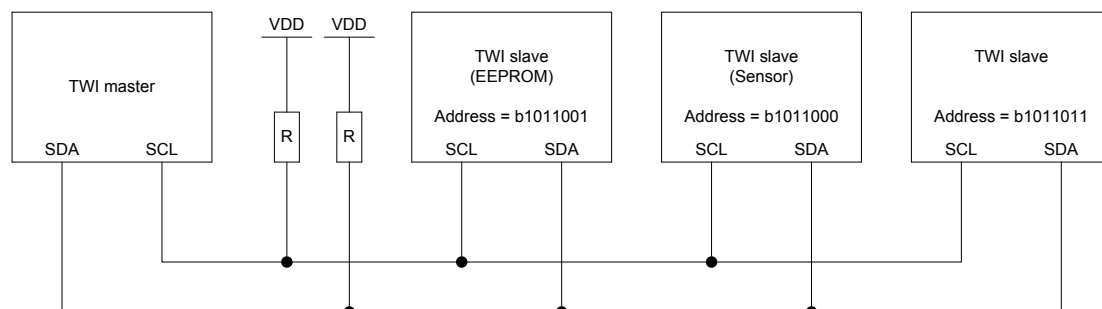

**Figure 157: A typical TWI setup comprising one master and three slaves**

This TWI master supports clock stretching performed by the slaves. The TWI master is started by triggering the STARTTX or STARTRX tasks, and stopped by triggering the STOP task.

If a NACK is clocked in from the slave, the TWI master will generate an ERROR event.

### 49.2 Master mode pin configuration

The different signals SCL and SDA associated with the TWI master are mapped to physical pins according to the configuration specified in the PSELSCL and PSELSDA registers respectively.

If a value of 0xFFFFFFFF is specified in any of these registers, the associated TWI master signal is not connected to any physical pin. The PSELSCL and PSELSDA registers and their configurations are only used

as long as the TWI master is enabled, and retained only as long as the device is in ON mode. PSEL\_SCL and PSEL\_SDA must only be configured when the TWI is disabled.

To secure correct signal levels on the pins used by the TWI master when the system is in OFF mode, and when the TWI master is disabled, these pins must be configured in the GPIO peripheral as described in [Table 127: GPIO configuration](#) on page 526.

Only one peripheral can be assigned to drive a particular GPIO pin at a time, failing to do so may result in unpredictable behavior.

**Table 127: GPIO configuration**

TWI master signal	TWI master pin	Direction	Drive strength	Output value
SCL	As specified in PSEL_SCL	Input	S0D1	Not applicable
SDA	As specified in PSEL_SDA	Input	S0D1	Not applicable

## 49.3 Shared resources

The TWI shares registers and other resources with other peripherals that have the same ID as the TWI.

Therefore, you must disable all peripherals that have the same ID as the TWI before the TWI can be configured and used. Disabling a peripheral that has the same ID as the TWI will not reset any of the registers that are shared with the TWI. It is therefore important to configure all relevant TWI registers explicitly to secure that it operates correctly.

The Instantiation table in [Instantiation](#) on page 25 shows which peripherals have the same ID as the TWI.

## 49.4 Master write sequence

A TWI master write sequence is started by triggering the STARTTX task. After the STARTTX task has been triggered, the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1).


The address must match the address of the slave device that the master wants to write to. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) generated by the slave.

After receiving the ACK bit, the TWI master will clock out the data bytes that are written to the TXD register. Each byte clocked out from the master will be followed by an ACK/NACK bit clocked in from the slave. A TXDSENT event will be generated each time the TWI master has clocked out a TXD byte, and the associated ACK/NACK bit has been clocked in from the slave.

The TWI master transmitter is single buffered, and a second byte can only be written to the TXD register after the previous byte has been clocked out and the ACK/NACK bit clocked in, that is, after the TXDSENT event has been generated.

If the CPU is prevented from writing to TXD when the TWI master is ready to clock out a byte, the TWI master will stretch the clock until the CPU has written a byte to the TXD register.

A typical TWI master write sequence is illustrated in [Figure 158: The TWI master writing data to a slave](#) on page 527. Occurrence 3 in the figure illustrates delayed processing of the TXDSENT event associated with TXD byte 1. In this scenario the TWI master will stretch the clock to prevent writing erroneous data to the slave.

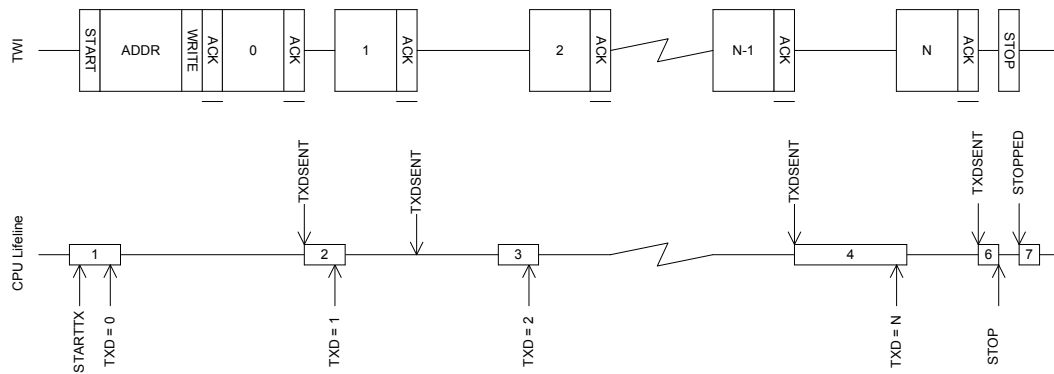

**Figure 158: The TWI master writing data to a slave**

The TWI master write sequence is stopped when the STOP task is triggered whereupon the TWI master will generate a stop condition on the TWI bus.

## 49.5 Master read sequence

A TWI master read sequence is started by triggering the STARTRX task. After the STARTRX task has been triggered the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE = 0, READ = 1).

The address must match the address of the slave device that the master wants to read from. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK = 1) generated by the slave.

After having sent the ACK bit the TWI slave will send data to the master using the clock generated by the master.

The TWI master will generate a RXDRDY event every time a new byte is received in the RXD register.

After receiving a byte, the TWI master will delay sending the ACK/NACK bit by stretching the clock until the CPU has extracted the received byte, that is, by reading the RXD register.

The TWI master read sequence is stopped by triggering the STOP task. This task must be triggered before the last byte is extracted from RXD to ensure that the TWI master sends a NACK back to the slave before generating the stop condition.

A typical TWI master read sequence is illustrated in [Figure 159: The TWI master reading data from a slave](#) on page 528. Occurrence 3 in this figure illustrates delayed processing of the RXDRDY event associated with RXD byte B. In this scenario the TWI master will stretch the clock to prevent the slave from overwriting the contents of the RXD register.

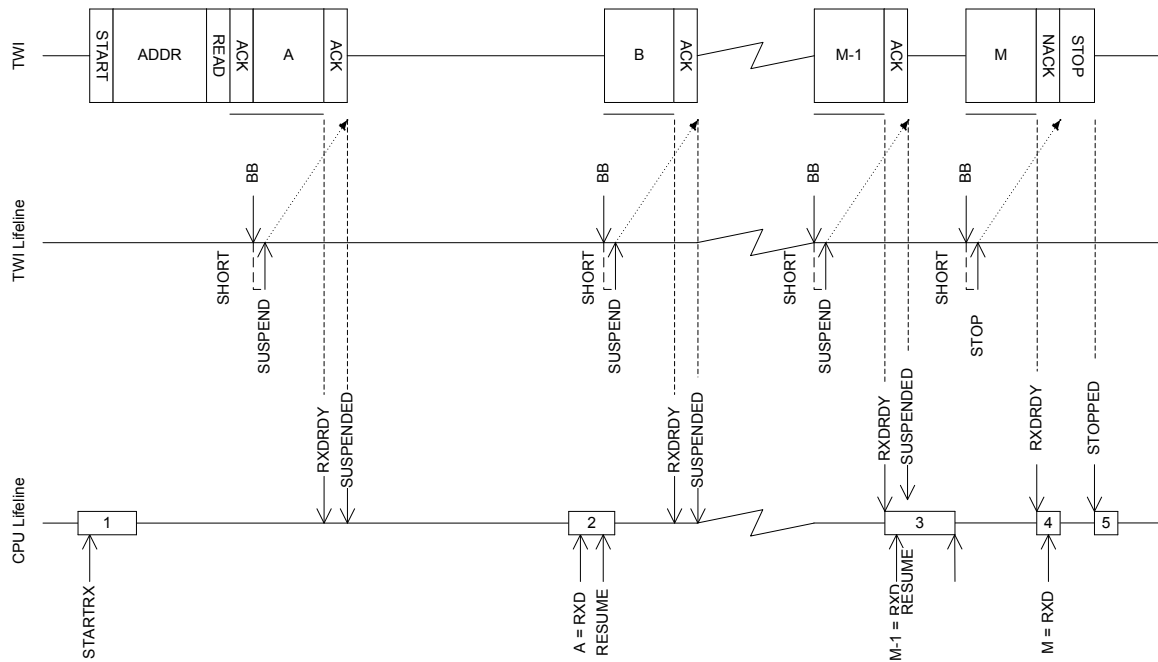


Figure 159: The TWI master reading data from a slave

## 49.6 Master repeated start sequence

A typical repeated start sequence is one in which the TWI master writes one byte to the slave followed by reading M bytes from the slave. Any combination and number of transmit and receive sequences can be combined in this fashion. Only one shortcut to STOP can be enabled at any given time.

The figure below illustrates a repeated start sequence where the TWI master writes one byte, followed by reading M bytes from the slave without performing a stop in-between.

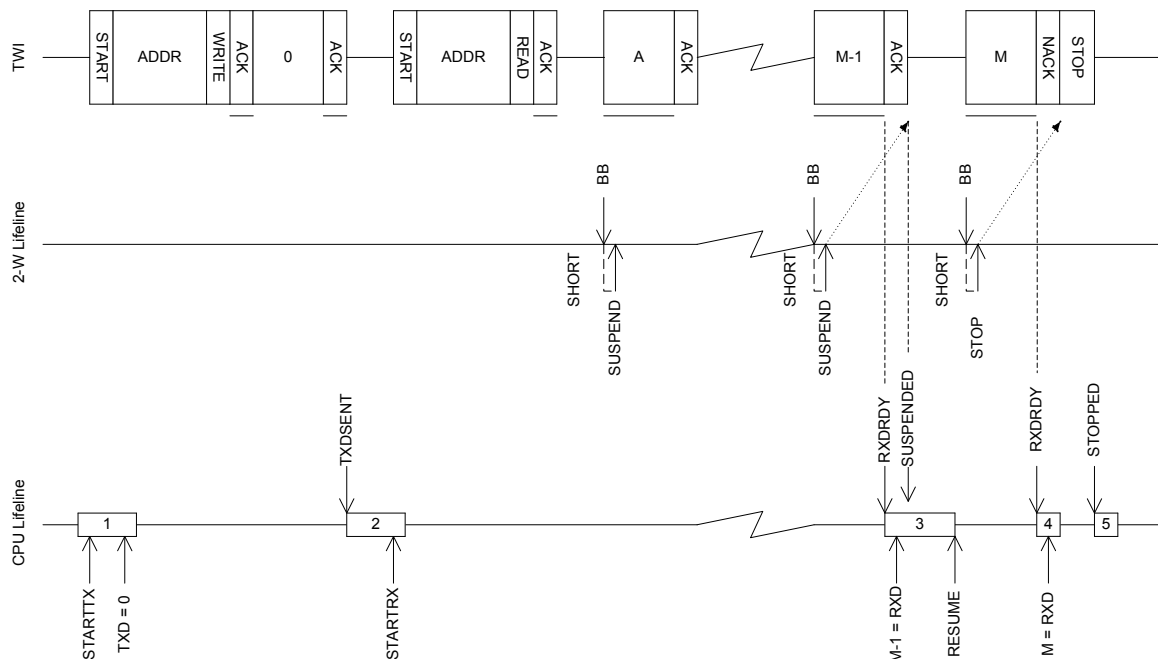


Figure 160: A repeated start sequence, where the TWI master writes one byte, followed by reading M bytes from the slave without performing a stop in-between



To generate a repeated start after a read sequence, a second start task must be triggered instead of the STOP task, that is, STARTRX or STARTTX. This start task must be triggered before the last byte is extracted from RXD to ensure that the TWI master sends a NACK back to the slave before generating the repeated start condition.

## 49.7 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 49.8 Registers

**Table 128: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWI	TWI0	Two-wire interface master 0	Deprecated
0x40004000	TWI	TWI1	Two-wire interface master 1	Deprecated

**Table 129: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start TWI receive sequence
TASKS_STARTTX	0x008	Start TWI transmit sequence
TASKS_STOP	0x014	Stop TWI transaction
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_RXDREADY	0x108	TWI RXD byte received
EVENTS_TXDSENT	0x11C	TWI TXD byte sent
EVENTS_ERROR	0x124	TWI error
EVENTS_BB	0x138	TWI byte boundary, generated before each byte that is sent or received
EVENTS_SUSPENDED	0x148	TWI entered the suspended state
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4C4	Error source
ENABLE	0x500	Enable TWI
PSELSCL	0x508	Pin select for SCL
PSELSDA	0x50C	Pin select for SDA
RXD	0x518	RXD register
TXD	0x51C	TXD register
FREQUENCY	0x524	TWI frequency
ADDRESS	0x588	Address used in the TWI transfer

### 49.8.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	BB SUSPEND				Shortcut between BB event and SUSPEND task																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																						B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
B	RW	BB_STOP				See <a href="#">EVENTS_BB</a> and <a href="#">TASKS_SUSPEND</a>																																	
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
			Shortcut between BB event and STOP task																																				
						See <a href="#">EVENTS_BB</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		

## 49.8.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id														F		E		D		C				B		A								
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	STOPPED			Write '1' to Enable interrupt for STOPPED event																													
					See <a href="#">EVENTS_STOPPED</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
B	RW	RXDREADY			Write '1' to Enable interrupt for RXDREADY event																													
					See <a href="#">EVENTS_RXDREADY</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
C	RW	TXDSENT			Write '1' to Enable interrupt for TXDSENT event																													
					See <a href="#">EVENTS_TXDSENT</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
D	RW	ERROR			Write '1' to Enable interrupt for ERROR event																													
					See <a href="#">EVENTS_ERROR</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
E	RW	BB			Write '1' to Enable interrupt for BB event																													
					See <a href="#">EVENTS_BB</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
F	RW	SUSPENDED			Write '1' to Enable interrupt for SUSPENDED event																													
					See <a href="#">EVENTS_SUSPENDED</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													

## 49.8.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id														F		E		D		C				B		A									
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														
B	RW	RXDREADY				Write '1' to Disable interrupt for RXDREADY event																													
						See <a href="#">EVENTS_RXDREADY</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														
C	RW	TXDSENT				Write '1' to Disable interrupt for TXDSENT event																													
						See <a href="#">EVENTS_TXDSENT</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														
D	RW	ERROR				Write '1' to Disable interrupt for ERROR event																													
						See <a href="#">EVENTS_ERROR</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														
E	RW	BB				Write '1' to Disable interrupt for BB event																													
						See <a href="#">EVENTS_BB</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														
F	RW	SUSPENDED				Write '1' to Disable interrupt for SUSPENDED event																													
						See <a href="#">EVENTS_SUSPENDED</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
		Enabled	1		Read: Enabled																														

## 49.8.4 ERRORSRC

Address offset: 0x4C4

Error source

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OVERRUN				Overrun error																													
						A new byte was received before previous byte got read by software from the RXD register. (Previous data is lost)																													
			NotPresent	0	Read: no overrun occurred																														
			Present	1	Read: overrun occurred																														
			Clear	1	Write: clear error on writing '1'																														
B	RW	ANACK				NACK received after sending the address (write '1' to clear)																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
			Clear	1	Write: clear error on writing '1'																														
C	RW	DNACK				NACK received after sending a data byte (write '1' to clear)																													
			NotPresent	0	Read: error not present																														

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																														C	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
			Present		1	Read: error present																										
			Clear		1	Write: clear error on writing '1'																										

## 49.8.5 ENABLE

Address offset: 0x500

Enable TWI

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	ENABLE				Enable or disable TWI																																	
			Disabled		0	Disable TWI																																	
			Enabled		5	Enable TWI																																	

## 49.8.6 PSELSCL

Address offset: 0x508

Pin select for SCL

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	PSELSCL			[0..31]				Pin number configuration for TWI SCL signal																										
			Disconnected		0xFFFFFFFF				Disconnect																										

## 49.8.7 PSELSDA

Address offset: 0x50C

Pin select for SDA

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PSELSDA			[0..31]	Pin number configuration for TWI SDA signal																																
			Disconnected		0xFFFFFFFF	Disconnect																																

## 49.8.8 RXD

Address offset: 0x518

RXD register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	RXD				RXD register																													

## 49.8.9 TXD

Address offset: 0x51C

TXD register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	RW	TXD						TXD register																											

## 49.8.10 FREQUENCY

Address offset: 0x524

TWI frequency

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FREQUENCY				TWI master clock frequency																													
			K100		0x01980000	100 kbps																													
			K250		0x04000000	250 kbps																													
			K400		0x06680000	400 kbps (actual rate 410.256 kbps)																													

## 49.8.11 ADDRESS

Address offset: 0x588

Address used in the TWI transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																													A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ADDRESS				Address used in the TWI transfer																																

## 49.9 Electrical specification

### 49.9.1 TWI interface electrical specifications


Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWI</sub>	Bit rates for TWI <sup>40</sup>	100		400	kbps
I <sub>TWI,100kbps</sub>	Run current for TWI, 100 kbps		50		μA
I <sub>TWI,400kbps</sub>	Run current for TWI, 400 kbps		50		μA
t <sub>TWI,START,LP</sub>	Time from STARTRX/STARTTX task to transmission started, Low power mode		t <sub>TWI,START,C</sub> +		μs
t <sub>TWI,START,CL</sub>	Time from STARTRX/STARTTX task to transmission started, Constant latency mode		1.5		μs

### 49.9.2 Two Wire Interface (TWI) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWI,SCL,100kbps</sub>	SCL clock frequency, 100 kbps		100		kHz
f <sub>TWI,SCL,250kbps</sub>	SCL clock frequency, 250 kbps		250		kHz
f <sub>TWI,SCL,400kbps</sub>	SCL clock frequency, 400 kbps		400		kHz
t <sub>TWI,SU_DAT</sub>	Data setup time before positive edge on SCL – all modes	300			ns
t <sub>TWI,HD_DAT</sub>	Data hold time after negative edge on SCL – all modes	500			ns
t <sub>TWI,HD_STA,100kbps</sub>	TWI master hold time for START and repeated START condition, 100 kbps	10000			ns

<sup>40</sup> Higher bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{TWI,HD\_STA,250kbps}$	TWI master hold time for START and repeated START condition, 250kbps	4000			ns
$t_{TWI,HD\_STA,400kbps}$	TWI master hold time for START and repeated START condition, 400 kbps	2500			ns
$t_{TWI,SU\_STO,100kbps}$	TWI master setup time from SCL high to STOP condition, 100 kbps	5000			ns
$t_{TWI,SU\_STO,250kbps}$	TWI master setup time from SCL high to STOP condition, 250 kbps	2000			ns
$t_{TWI,SU\_STO,400kbps}$	TWI master setup time from SCL high to STOP condition, 400 kbps	1250			ns
$t_{TWI,BUF,100kbps}$	TWI master bus free time between STOP and START conditions, 100 kbps	5800			ns
$t_{TWI,BUF,250kbps}$	TWI master bus free time between STOP and START conditions, 250 kbps	2700			ns
$t_{TWI,BUF,400kbps}$	TWI master bus free time between STOP and START conditions, 400 kbps	2100			ns

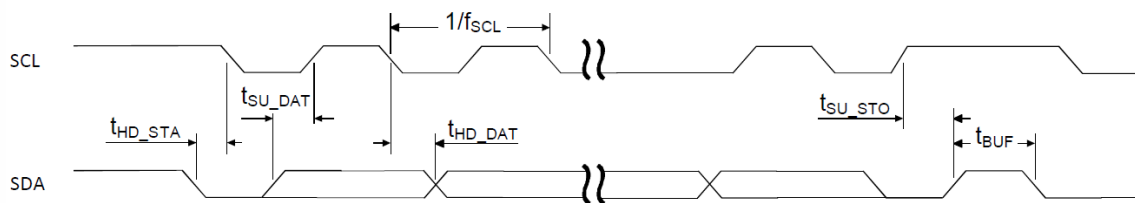

**Figure 161: TWI timing diagram, 1 byte transaction**

## 50 UART — Universal asynchronous receiver/ transmitter

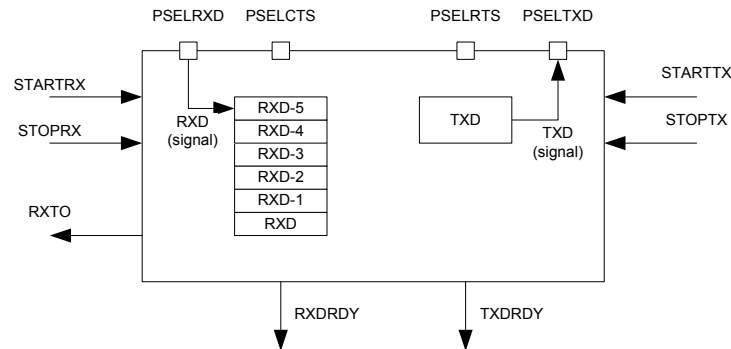


Figure 162: UART configuration

### 50.1 Functional description

Listed here are the main features of UART.

The UART implements support for the following features:

- Full-duplex operation
- Automatic flow control
- Parity checking and generation for the 9<sup>th</sup> data bit

As illustrated in [Figure 162: UART configuration](#) on page 535, the UART uses the TXD and RXD registers directly to transmit and receive data. The UART uses one stop bit.

### 50.2 Pin configuration

The different signals RXD, CTS (Clear To Send, active low), RTS (Request To Send, active low), and TXD associated with the UART are mapped to physical pins according to the configuration specified in the PSELRXD, PSELCTS, PSELRTS, and PSELTXD registers respectively.

If a value of 0xFFFFFFFF is specified in any of these registers, the associated UART signal will not be connected to any physical pin. The PSELRXD, PSELCTS, PSELRTS, and PSELTXD registers and their configurations are only used as long as the UART is enabled, and retained only for the duration the device is in ON mode. PSELRXD, PSELCTS, PSELRTS and PSELTXD must only be configured when the UART is disabled.

To secure correct signal levels on the pins by the UART when the system is in OFF mode, the pins must be configured in the GPIO peripheral as described in [Pin configuration](#) on page 535.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

Table 130: GPIO configuration

UART pin	Direction	Output value
RXD	Input	Not applicable
CTS	Input	Not applicable
RTS	Output	1
TXD	Output	1

## 50.3 Shared resources

The UART shares registers and other resources with other peripherals that have the same ID as the UART.

Therefore, you must disable all peripherals that have the same ID as the UART before the UART can be configured and used. Disabling a peripheral that has the same ID as the UART will not reset any of the registers that are shared with the UART. It is therefore important to configure all relevant UART registers explicitly to ensure that it operates correctly.


See the Instantiation table in [Instantiation](#) on page 25 for details on peripherals and their IDs.

## 50.4 Transmission

A UART transmission sequence is started by triggering the STARTTX task.

Bytes are transmitted by writing to the TXD register. When a byte has been successfully transmitted the UART will generate a TXDRDY event after which a new byte can be written to the TXD register. A UART transmission sequence is stopped immediately by triggering the STOPTX task.

If flow control is enabled a transmission will be automatically suspended when CTS is deactivated and resumed when CTS is activated again, as illustrated in [Figure 163: UART transmission](#) on page 536. A byte that is in transmission when CTS is deactivated will be fully transmitted before the transmission is suspended. For more information, see [Suspending the UART](#) on page 537.

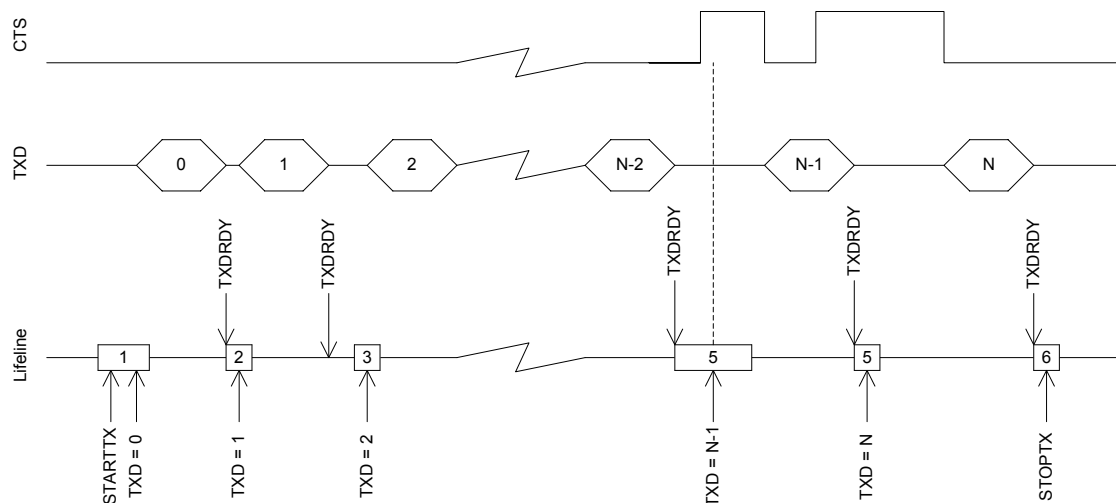

**Figure 163: UART transmission**

## 50.5 Reception

A UART reception sequence is started by triggering the STARTRX task.

The UART receiver chain implements a FIFO capable of storing six incoming RXD bytes before data is overwritten. Bytes are extracted from this FIFO by reading the RXD register. When a byte is extracted from the FIFO a new byte pending in the FIFO will be moved to the RXD register. The UART will generate an RXDRDY event every time a new byte is moved to the RXD register.

When flow control is enabled, the UART will deactivate the RTS signal when there is only space for four more bytes in the receiver FIFO. The counterpart transmitter is therefore able to send up to four bytes after the RTS signal is deactivated before data is being overwritten. To prevent overwriting data in the FIFO, the counterpart UART transmitter must therefore make sure to stop transmitting data within four bytes after the RTS line is deactivated.




The RTS signal will first be activated again when the FIFO has been emptied, that is, when all bytes in the FIFO have been read by the CPU, see [Figure 164: UART reception](#) on page 537.

The RTS signal will also be deactivated when the receiver is stopped through the STOPRX task as illustrated in [Figure 164: UART reception](#) on page 537. The UART is able to receive four to five additional bytes if they are sent in succession immediately after the RTS signal has been deactivated. This is possible because the UART is, even after the STOPRX task is triggered, able to receive bytes for an extended period of time dependent on the configured baud rate. The UART will generate a receiver timeout event (RXTO) when this period has elapsed.

To prevent loss of incoming data the RXD register must only be read one time following every RXDRDY event.

To secure that the CPU can detect all incoming RXDRDY events through the RXDRDY event register, the RXDRDY event register must be cleared before the RXD register is read. The reason for this is that the UART is allowed to write a new byte to the RXD register, and therefore can also generate a new event, immediately after the RXD register is read (emptied) by the CPU.

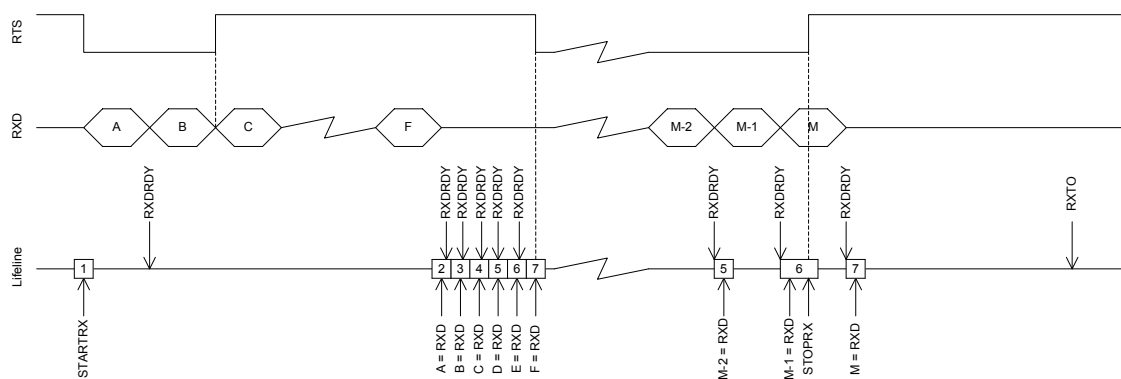

**Figure 164: UART reception**

As indicated in occurrence 2 in the figure, the RXDRDY event associated with byte B is generated first after byte A has been extracted from RXD.

## 50.6 Suspending the UART

The UART can be suspended by triggering the SUSPEND task.

SUSPEND will affect both the UART receiver and the UART transmitter, i.e. the transmitter will stop transmitting and the receiver will stop receiving. UART transmission and reception can be resumed, after being suspended, by triggering STARTTX and STARTRX respectively.

Following a SUSPEND task, an ongoing TXD byte transmission will be completed before the UART is suspended.

When the SUSPEND task is triggered, the UART receiver will behave in the same way as it does when the STOPRX task is triggered.

## 50.7 Error conditions

An ERROR event, in the form of a framing error, will be generated if a valid stop bit is not detected in a frame. Another ERROR event, in the form of a break condition, will be generated if the RXD line is held active low for longer than the length of a data frame. Effectively, a framing error is always generated before a break condition occurs.

## 50.8 Using the UART without flow control

If flow control is not enabled, the interface will behave as if the CTS and RTS lines are kept active all the time.

## 50.9 Parity configuration

When parity is enabled, the parity will be generated automatically from the even parity of TXD and RXD for transmission and reception respectively.

## 50.10 Registers

**Table 131: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40002000	UART	UART0	Universal Asynchronous Receiver/ Transmitter	Deprecated

**Table 132: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start UART receiver
TASKS_STOPRX	0x004	Stop UART receiver
TASKS_STARTTX	0x008	Start UART transmitter
TASKS_STOPTX	0x00C	Stop UART transmitter
TASKS_SUSPEND	0x01C	Suspend UART
EVENTS_CTS	0x100	CTS is activated (set low). Clear To Send.
EVENTS_NCTS	0x104	CTS is deactivated (set high). Not Clear To Send.
EVENTS_RXDRDY	0x108	Data received in RXD
EVENTS_TXDRDY	0x11C	Data sent from TXD
EVENTS_ERROR	0x124	Error detected
EVENTS_RXT0	0x144	Receiver timeout
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x480	Error source
ENABLE	0x500	Enable UART
PSELRTS	0x508	Pin select for RTS
PSELTXD	0x50C	Pin select for TXD
PSELCTS	0x510	Pin select for CTS
PSELRXD	0x514	Pin select for RXD
RXD	0x518	RXD register
TXD	0x51C	TXD register
BAUDRATE	0x524	Baud rate
CONFIG	0x56C	Configuration of parity and hardware flow control

### 50.10.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																					B	A
Reset 0x00000000					0 0																																0	
Id	RW	Field	Value Id		Value				Description																													
A	RW	CTS_STARTRX							Shortcut between CTS event and STARTRX task																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
B	RW	NCTS_STOPRX				See <a href="#">EVENTS_CTS</a> and <a href="#">TASKS_STARTRX</a>																													
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
					Shortcut between NCTS event and STOPRX task																														
						See <a href="#">EVENTS_NCTS</a> and <a href="#">TASKS_STOPRX</a>																													
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

## 50.10.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F																E				D				C				B		A	
Reset 0x00000000				0 0																															

## 50.10.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F																E		D		C B A											
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	CTS			Write '1' to Disable interrupt for CTS event																														
					See <a href="#">EVENTS_CTS</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	NCTS			Write '1' to Disable interrupt for NCTS event																														
					See <a href="#">EVENTS_NCTS</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	RXDRDY			Write '1' to Disable interrupt for RXDRDY event																														
					See <a href="#">EVENTS_RXDRDY</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	TXDRDY			Write '1' to Disable interrupt for TXDRDY event																														
					See <a href="#">EVENTS_TXDRDY</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	ERROR			Write '1' to Disable interrupt for ERROR event																														
					See <a href="#">EVENTS_ERROR</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	RXTO			Write '1' to Disable interrupt for RXTO event																														
					See <a href="#">EVENTS_RXTO</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

## 50.10.4 ERRORSRC

Address offset: 0x480

Error source

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OVERRUN				Overrun error																													
						A start bit is received while the previous data still lies in RXD. (Previous data is lost.)																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
B	RW	PARITY				Parity error																													
						A character with bad parity is received, if HW parity check is enabled.																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
C	RW	FRAMING				Framing error occurred																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																	
						A valid stop bit is not detected on the serial data input after all bits in a character have been received.  Read: error not present  Read: error present																																	
			NotPresent	0																																			
			Present	1																																			
D	RW	BREAK				Break condition																																	
						The serial data input is '0' for longer than the length of a data frame. (The data frame length is 10 bits without parity bit, and 11 bits with parity bit.).  Read: error not present  Read: error present																																	
			NotPresent	0																																			
			Present	1																																			

## 50.10.5 ENABLE

Address offset: 0x500

Enable UART

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ENABLE				Enable or disable UART																																
			Disabled	0		Disable UART																																
			Enabled	4		Enable UART																																

## 50.10.6 PSELRTS

Address offset: 0x508

Pin select for RTS

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PSELRTS			[0..31]	Pin number configuration for UART RTS signal																													
			Disconnected		0xFFFFFFFF	Disconnect																													

## 50.10.7 PSELTxD

Address offset: 0x50C

Pin select for TXD

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PSELTxD			[0..31]	Pin number configuration for UART TXD signal																													
			Disconnected		0xFFFFFFFF	Disconnect																													

## 50.10.8 PSELCTS

Address offset: 0x510

Pin select for CTS

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELCTS		[0..31]	Pin number configuration for UART CTS signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

## 50.10.9 PSELRXD

Address offset: 0x514

Pin select for RXD

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELRXD		[0..31]	Pin number configuration for UART RXD signal																														
			Disconnected	0xFFFFFFFF	Disconnect																														

## 50.10.10 RXD

Address offset: 0x518

RXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
A	R	RXD				RX data received in previous transfers, double buffered																													

## 50.10.11 TXD

Address offset: 0x51C

TXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	W	TXD			TX data to be transferred																																	

## 50.10.12 BAUDRATE

Address offset: 0x524

Baud rate

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	BAUDRATE						Baud rate																											
			Baud1200	0x0004F000				1200 baud (actual rate: 1205)																											
			Baud2400	0x0009D000				2400 baud (actual rate: 2396)																											
			Baud4800	0x0013B000				4800 baud (actual rate: 4808)																											
			Baud9600	0x00275000				9600 baud (actual rate: 9598)																											
			Baud14400	0x003B0000				14400 baud (actual rate: 14414)																											
			Baud19200	0x004EA000				19200 baud (actual rate: 19208)																											
			Baud28800	0x0075F000				28800 baud (actual rate: 28829)																											
			Baud38400	0x009D5000				38400 baud (actual rate: 38462)																											
			Baud57600	0x00EBF000				57600 baud (actual rate: 57762)																											

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
			Baud76800	0x013A9000	76800 baud (actual rate: 76923)
			Baud115200	0x01D7E000	115200 baud (actual rate: 115942)
			Baud230400	0x03AFB000	230400 baud (actual rate: 231884)
			Baud250000	0x04000000	250000 baud
			Baud460800	0x075F7000	460800 baud (actual rate: 470588)
			Baud921600	0x0EBED000	921600 baud (actual rate: 941176)
			Baud1M	0x10000000	1Mega baud

### 50.10.13 CONFIG

Address offset: 0x56C

Configuration of parity and hardware flow control

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														B	B	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	RW	HWFC			Hardware flow control
			Disabled	0	Disabled
			Enabled	1	Enabled
B	RW	PARITY			Parity
			Excluded	0x0	Exclude parity bit
			Included	0x7	Include parity bit

## 50.11 Electrical specification

### 50.11.1 UART electrical specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{UART}}$	Baud rate for UART <sup>41</sup> .			1000	kbps
$I_{\text{UART1M}}$	Run current at max baud rate.		55		$\mu\text{A}$
$I_{\text{UART115k}}$	Run current at 115200 bps.		55		$\mu\text{A}$
$I_{\text{UART1k2}}$	Run current at 1200 bps.		55		$\mu\text{A}$
$I_{\text{UART,IDLE}}$	Idle current for UART		1		$\mu\text{A}$
$t_{\text{UART,CTSH}}$	CTS high time	1			$\mu\text{s}$
$t_{\text{UART,START,LP}}$	Time from STARTRX/STARTTX task to transmission started, low power mode		$t_{\text{UART,START}}$ +	$t_{\text{START,HFIN}}$	$\mu\text{s}$
$t_{\text{UART,START,CL}}$	Time from STARTRX/STARTTX task to transmission started, constant latency mode		1		$\mu\text{s}$

<sup>41</sup> Higher baud rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

## 51 Mechanical specifications

The mechanical specifications for the packages show the dimensions in millimeters.

### 51.1 QFN48 6 x 6 mm package

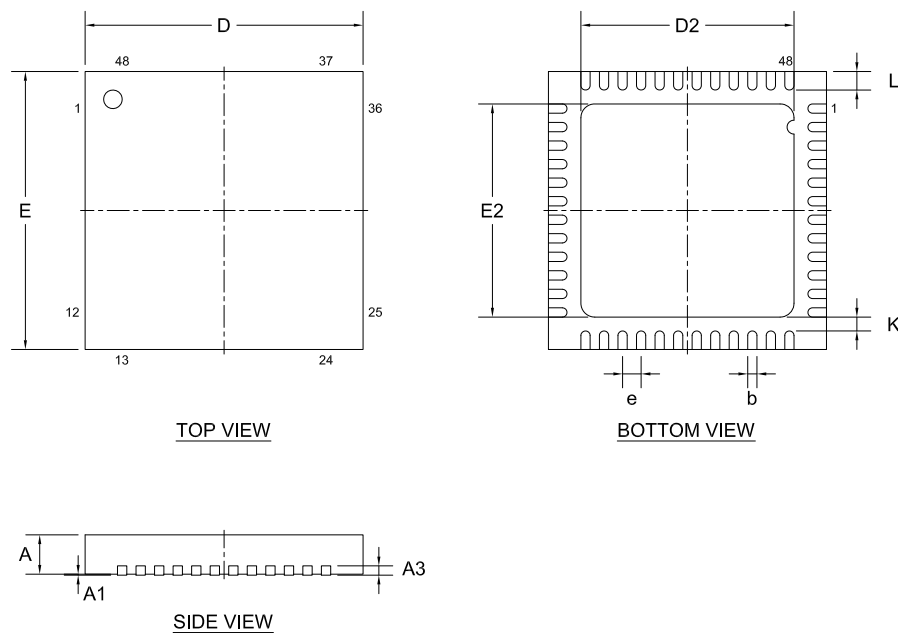



Figure 165: QFN48 6 x 6 mm package

Table 133: QFN48 dimensions in millimeters


Package	A	A1	A3	b	D, E	D2, E2	e	K	L	
QFN48 (6x6)	0.80	0.00		0.15		4.50		0.20	0.35	Min.
	0.85	0.02	0.2	0.20	6.0	4.60	0.4		0.40	Nom.
	0.90	0.05		0.25		4.70			0.45	Max.




## 51.2 WLCSP package



TOP VIEW



BOTTOM VIEW



SIDE VIEW

Figure 166: WLCSP package

Table 134: WLCSP packet dimensions in millimeters

Package	A	A1	A3	b	D	E	D2	E2	e	K	L	
WLCSP (3.0 × 3.2)	0.351	0.13		0.19								Min.
	0.375	0.15	0.225	0.20	2.956	3.226	2.4	2.8	0.4	1.4	1.2	Nom.
	0.399	0.17		0.25								Max.

## 52 Ordering information

This chapter contains information on IC marking, ordering codes, and container sizes.

### 52.1 IC marking

The nRF52832 IC package is marked as shown in the following figure. Only the first two characters of the function variant code are used in the <VV> entry.

N	5	2	8	3	2
<P	P>	<V	V>	<H>	<P>
<Y	Y>	<W	W>	<L	L>

Figure 167: Package marking

### 52.2 Box labels

Here are the box labels used for the nRF52832.

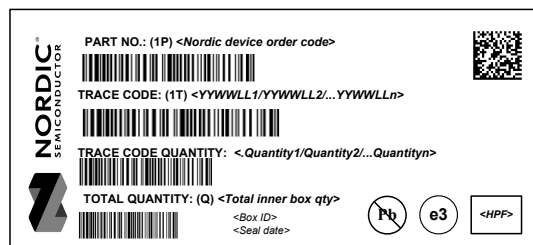


Figure 168: Inner box label














	
<b>FROM:</b> 	<b>TO:</b> 
<b>PART NO: (1P) &lt;Nordic device order code&gt;</b>  <div style="float: right;">&lt;H&gt;&lt;P&gt;&lt;F&gt;</div>	
<b>CUSTOMER PO NO: (K) &lt;Customer Purchase Order No.&gt;</b>  <div style="float: right;">  </div>	
<b>SALES ORDER NO: (14K) &lt;Nordic Sales Order+Sales order line no.+ Delivery line no.&gt;</b> 	
<b>SHIPMENT ID.: 2K &lt;Nordic's shipment ID.&gt;</b> 	
<b>QUANTITY: (Q) &lt;Total quantity&gt;</b> 	
<b>COUNTRY OF ORIGIN: 4L</b> <b>&lt;2- character code of COO&gt;</b> 	<b>CARTON NO:</b> <b>x/n</b>
<b>DELIVERY NO.: (9K) &lt;Shipper's shipment no.&gt;</b> 	<b>GROSS WEIGHT:</b>  KGS 

Figure 169: Outer box label

## 52.3 Order code

Here are the nRF52832 order codes and definitions.

n	R	F	5	2	8	3	2	-	<P	P>	<V	V>	-	<C	C>
---	---	---	---	---	---	---	---	---	----	----	----	----	---	----	----

Figure 170: Order code

Table 135: Abbreviations

Abbreviation	Definition and implemented codes
N52/nRF52	nRF52 Series product
832	Part code
<PP>	Package variant code
<VV>	Function variant code
<H><P><F>	Build code
	H - Hardware version code
	P - Production configuration code (production site, etc.)
	F - Firmware version code (only visible on shipping container label)
<YY><WW><LL>	Tracking code
	YY - Year code
	WW - Assembly week number
	LL - Wafer lot code
<CC>	Container code

## 52.4 Code ranges and values

Defined here are the nRF52832 code ranges and values.

**Table 136: Package variant codes**

<PP>	Package	Size (mm)	Pin/Ball count	Pitch (mm)
QF	QFN	6 x 6	48	0.4
CI	WLCSP	3.0 x 3.2	50	0.4

**Table 137: Function variant codes**

<VV>	Flash (kB)	RAM (kB)	Access port protection
AA	512	64	Controlled by hardware
AB	256	32	Controlled by hardware
AA-G	512	64	Controlled by hardware and software
AB-G	256	32	Controlled by hardware and software

**Table 138: Hardware version codes**

<H>	Description
[A . . Z]	Hardware version/revision identifier (incremental)

**Table 139: Production configuration codes**

<P>	Description
[0 . . 9]	Production device identifier (incremental)
[A . . Z]	Engineering device identifier (incremental)

**Table 140: Production version codes**

<F>	Description
[A . . N, P . . Z]	Version of preprogrammed firmware
[0]	Delivered without preprogrammed firmware

**Table 141: Year codes**

<YY>	Description
[15 . . 99]	Production year: 2015 to 2099

**Table 142: Week codes**

<WW>	Description
[1 . . 52]	Week of production

**Table 143: Lot codes**

<LL>	Description
[AA . . ZZ]	Wafer production lot identifier

**Table 144: Container codes**

<CC>	Description
R7	7" Reel
R	13" Reel
T	Tray

## 52.5 Product options

Defined here are the nRF52832 product options.

**Table 145: nRF52832 order codes**

Order code	Minimum ordering quantity (MOQ)	Comment
nRF52832-QFAA-R7	1000	Not recommended for new designs
nRF52832-QFAA-R	3000	Not recommended for new designs
nRF52832-QFAA-T	490	Not recommended for new designs
nRF52832-QFAA-G-R7	1000	
nRF52832-QFAA-G-R	3000	
nRF52832-QFAA-G-T	490	
nRF52832-CIAA-R7	1500	Not recommended for new designs
nRF52832-CIAA-R	7000	Not recommended for new designs
nRF52832-CIAA-G-R7	1500	
nRF52832-CIAA-G-R	7000	
nRF52832-QFAB-R	3000	Not recommended for new designs
nRF52832-QFAB-R7	1000	Not recommended for new designs
nRF52832-QFAB-T	490	Not recommended for new designs

Order code	Minimum ordering quantity (MOQ)	Comment
nRF52832-QFAB-G-R	3000	
nRF52832-QFAB-G-R7	1000	
nRF52832-QFAB-G-T	490	

**Table 146: Development tools order code**


Order code	Description
nRF52-DK	nRF52 Development Kit

## 53 Reference circuitry

To ensure good RF performance when designing PCBs, it is highly recommended to use the PCB layouts and component values provided by Nordic Semiconductor.

Documentation for the different package reference circuits, including Altium Designer files, PCB layout files, and PCB production files can be downloaded from [Reference layout nRF52 Series](#).

### 53.1 Schematic QFAA and QFAB QFN48 with internal LDO setup

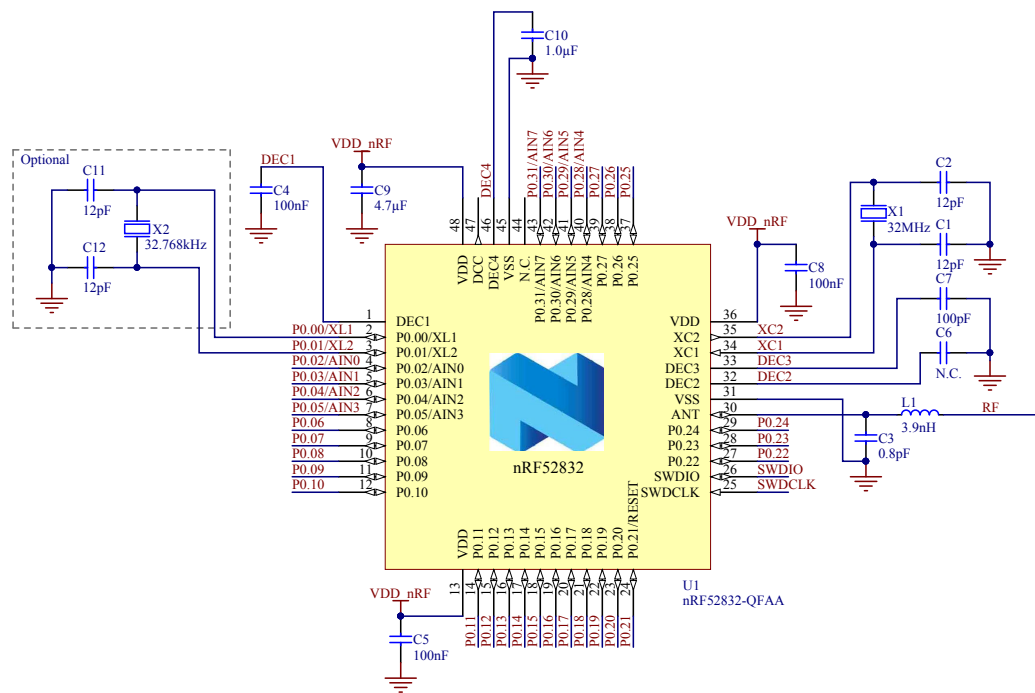

**Figure 171: QFAA and QFAB QFN48 with internal LDO setup**

For PCB reference layouts, see [Reference layout nRF52 Series](#).

**Table 147: Bill of material for QFAA and QFAB QFN48 with internal LDO setup**

Designator	Value	Description	Footprint
C1, C2, C11, C12	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4, C5, C8	100 nF	Capacitor, X7R, ±10%	0402
C6	N.C.	Not mounted	0402
C7	100 pF	Capacitor, NP0, ±5%	0402
C9	4.7 µF	Capacitor, X5R, ±10%	0603
C10	1.0 µF	Capacitor, X7R, ±10%	0603
L1	3.9 nH	High frequency chip inductor ±5%	0402
U1	nRF52832-QFAA and nRF52832-QFAB	Multi-protocol Bluetooth low energy, ANT, and 2.4 GHz proprietary system on chip	QFN-48
X1	32 MHz	XTAL SMD 2016, 32 MHz, Cl=8 pF, total tol. ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 3215, 32.768 kHz, Cl=9 pF, total tol. ±50 ppm	XTAL_3215

## 53.2 Schematic QFAA and QFAB QFN48 with DC/DC regulator setup

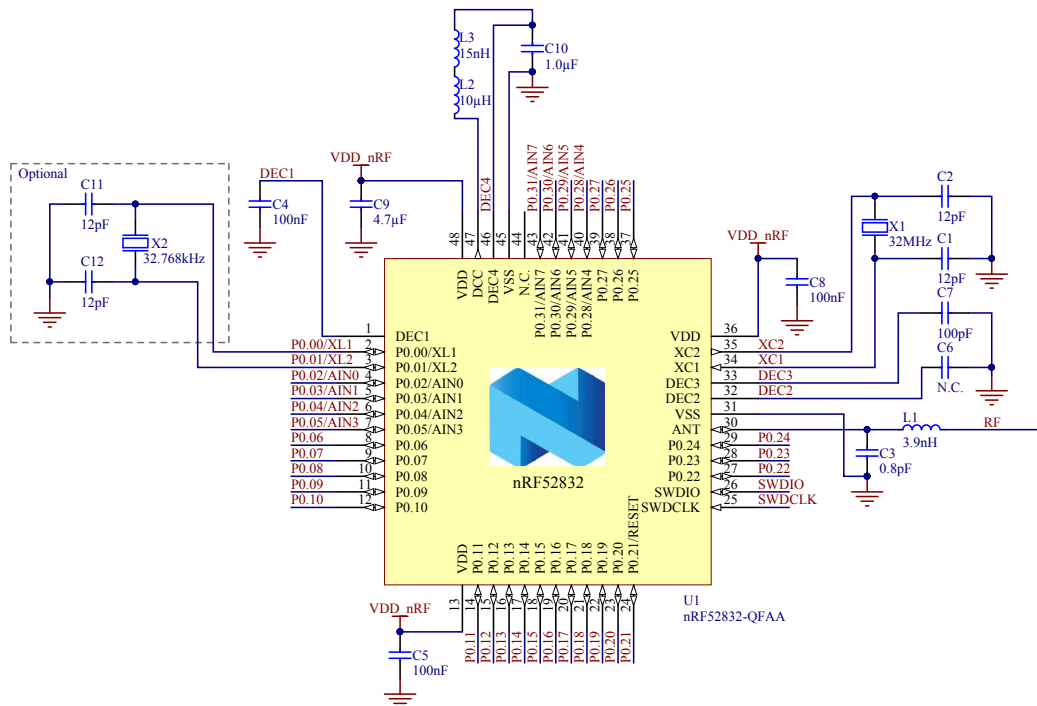


Figure 172: QFAA and QFAB QFN48 with DC/DC regulator setup

For PCB reference layouts, see [Reference layout nRF52 Series](#).

Table 148: Bill of material for QFAA and QFAB QFN48 with DC/DC regulator setup

Designator	Value	Description	Footprint
C1, C2, C11, C12	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4, C5, C8	100 nF	Capacitor, X7R, ±10%	0402
C6	N.C.	Not mounted	0402
C7	100 pF	Capacitor, NP0, ±5%	0402
C9	4.7 µF	Capacitor, X5R, ±10%	0603
C10	1.0 µF	Capacitor, X7R, ±10%	0603
L1	3.9 nH	High frequency chip inductor ±5%	0402
L2	10 µH	Chip inductor, IDC, min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
U1	nRF52832-QFAA and nRF52832-QFAB	Multi-protocol Bluetooth low energy, ANT, and 2.4 GHz proprietary system on chip	QFN-48
X1	32 MHz	XTAL SMD 2016, 32 MHz, CI=8 pF, total tol. ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 3215, 32.768 kHz, CI=9 pF, total tol. ±50 ppm	XTAL_3215

## 53.3 Schematic QFAA and QFAB QFN48 with DC/DC regulator and NFC setup

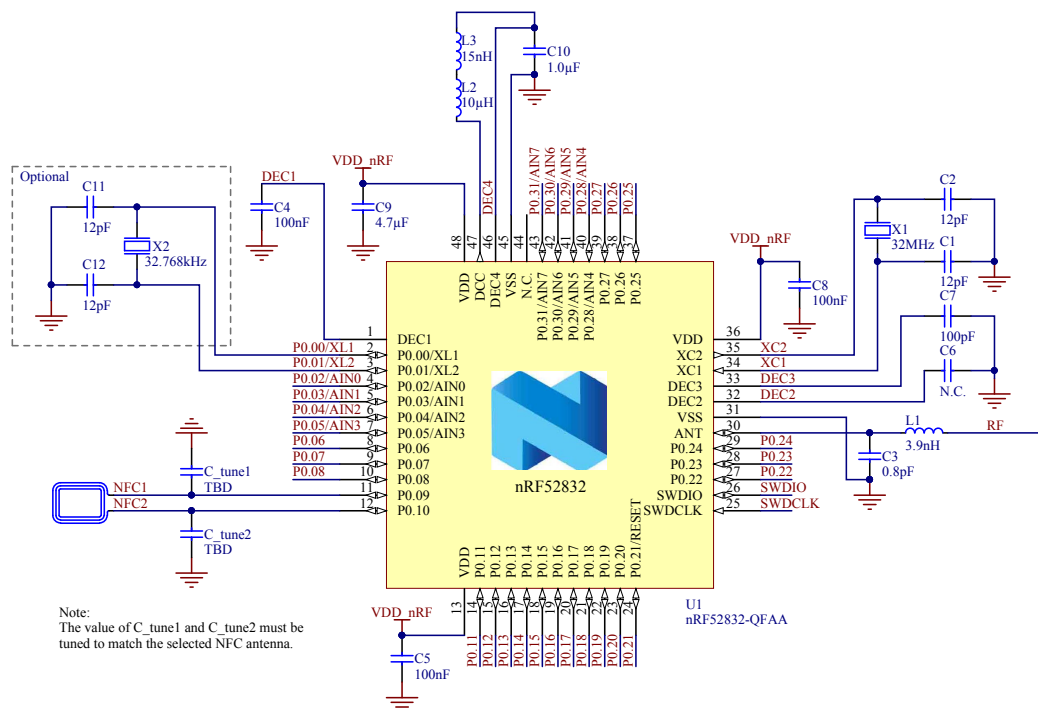


Figure 173: QFAA and QFAB QFN48 with DC/DC regulator and NFC setup


For PCB reference layouts, see [Reference layout nRF52 Series](#).

Table 149: Bill of material for QFAA and QFAB QFN48 with DC/DC converter and NFC setup

Designator	Value	Description	Footprint
C1, C2, C11, C12	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4, C5, C8	100 nF	Capacitor, X7R, ±10%	0402
C6	N.C.	Not mounted	0402
C7	100 pF	Capacitor, NP0, ±5%	0402
C9	4.7 µF	Capacitor, X5R, ±10%	0603
C10	1.0 µF	Capacitor, X7R, ±10%	0603
C <sub>tune1</sub> , C <sub>tune2</sub>	TBD pF	Capacitor, NP0, ±5%	0402
L1	3.9 nH	High frequency chip inductor ±5%	0402
L2	10 µH	Chip inductor, IDC, min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
U1	nRF52832-QFAA and nRF52832-QFAB	Multi-protocol <i>Bluetooth</i> low energy, ANT, and 2.4 GHz proprietary system on chip	QFN-48
X1	32 MHz	XTAL SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 3215, 32.768 kHz, Cl=9 pF, ±50 ppm	XTAL_3215



## 53.4 Schematic CIAA WLCSP with internal LDO setup

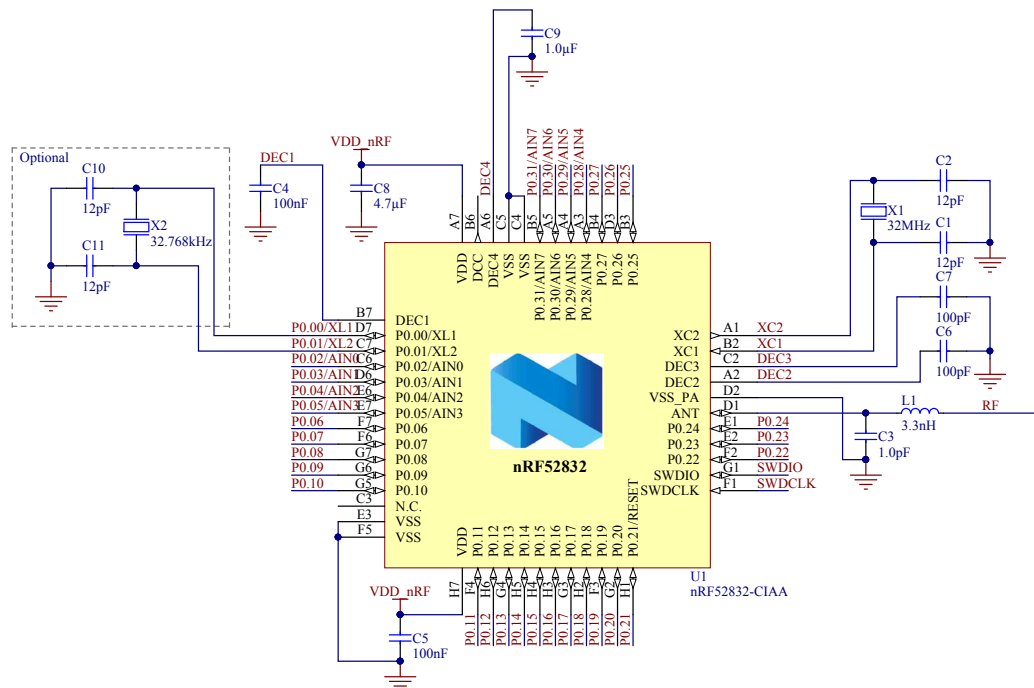


**Figure 174: CIAA WLCSP with internal LDO setup**

For PCB reference layouts, see [Reference layout nRF52 Series](#).

**Table 150: Bill of material for CIAA WLCSP with internal LDO setup**

Designator	Value	Description	Footprint
C1, C2, C10, C11	12 pF	Capacitor, NP0, ±2%	0201
C3	1.0 pF	Capacitor, NP0, ±5%	0201
C4, C5	100 nF	Capacitor, X7R, ±10%	0201
C6, C7	100 pF	Capacitor, NP0, ±5%	0201
C8	4.7 µF	Capacitor, X5R, ±10%	0603
C9	1.0 µF	Capacitor, X5R, ±5%	0402
L1	3.3 nH	High frequency chip inductor ±5%	0201
U1	nRF52832-CIAA	Multi-protocol <i>Bluetooth</i> low energy, ANT, and 2.4 GHz proprietary system on chip	WLCSP_C50
X1	32 MHz	XTAL SMD 2016, 32 MHz, CI=8 pF, total tol. ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 2012, 32.768 kHz, CI=9 pF, ±50 ppm	XTAL_2012

## 53.5 Schematic CIAA WLCSP with DC/DC regulator setup

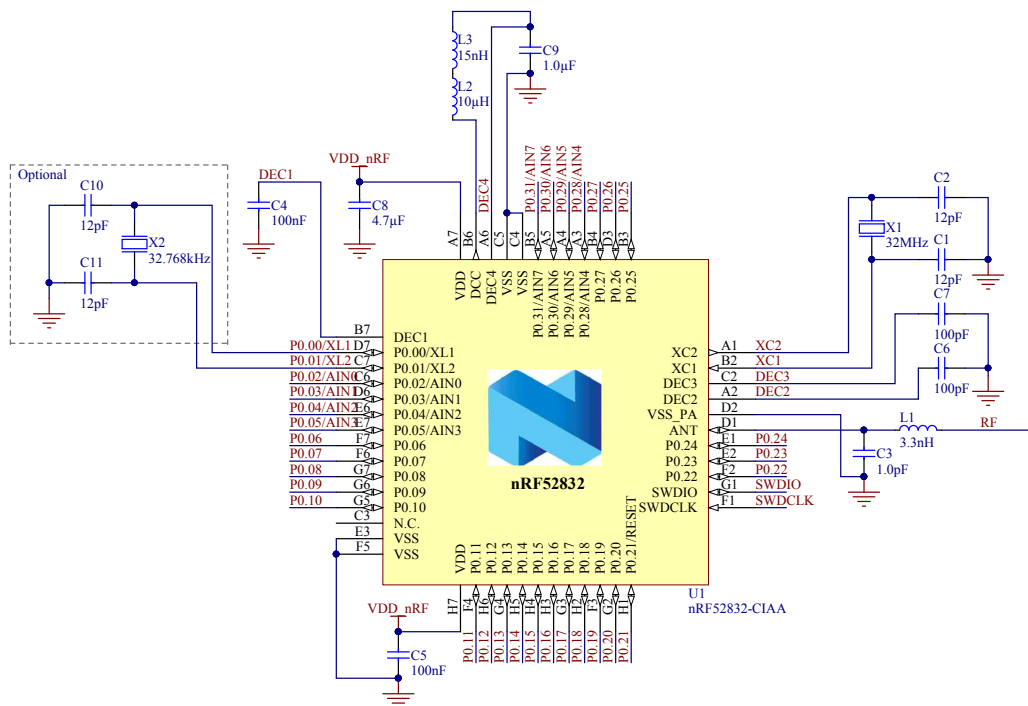

**Figure 175: CIAA WLCSP with DC/DC regulator setup**

For PCB reference layouts, see [Reference layout nRF52 Series](#).

**Table 151: Bill of material for CIAA WLCSP with DC/DC regulator setup**

Designator	Value	Description	Footprint
C1, C2, C10, C11	12 pF	Capacitor, NP0, ±2%	0201
C3	1.0 pF	Capacitor, NP0, ±5%	0201
C4, C5	100 nF	Capacitor, X7R, ±10%	0201
C6, C7	100 pF	Capacitor, NP0, ±5%	0201
C8	4.7 µF	Capacitor, X5R, ±10%	0603
C9	1.0 µF	Capacitor, X5R, ±5%	0402
L1	3.3 nH	High frequency chip inductor ±5%	0201
L2	10 µH	Chip inductor, IDC, min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
U1	nRF52832-CIAA	Multi-protocol <i>Bluetooth</i> low energy, ANT, and 2.4 GHz proprietary system on chip	WLCSP_C50
X1	32 MHz	XTAL SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 1012, 32.768 kHz, Cl=9 pF, ±50 ppm	XTAL_2012

## 53.6 Schematic CIAA WLCSP with DC/DC regulator and NFC setup

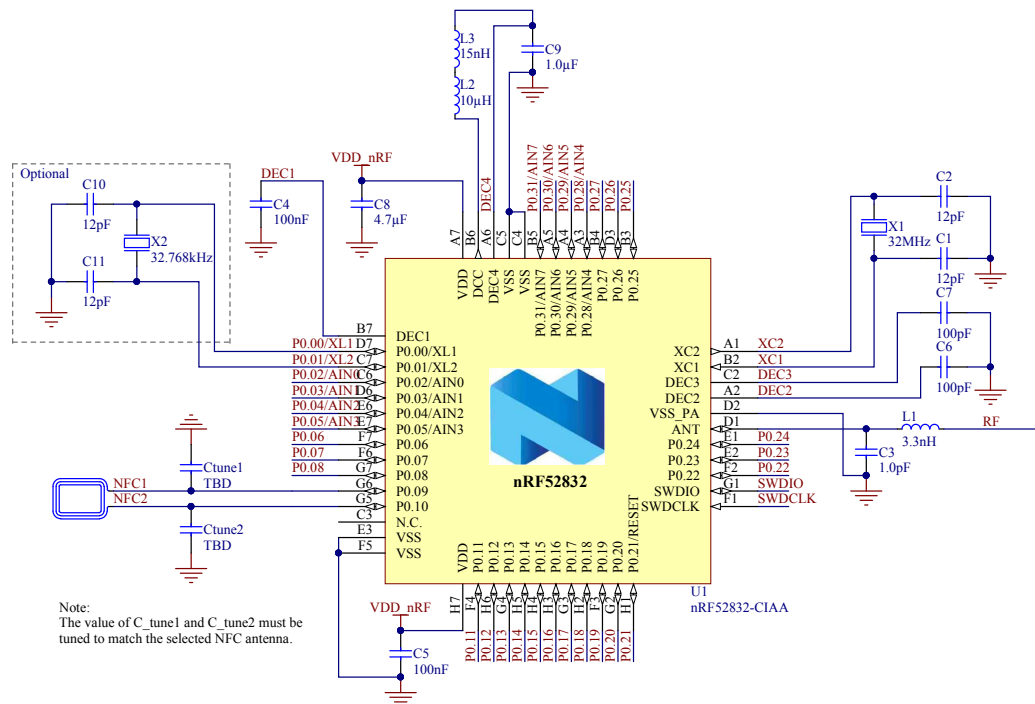


Figure 176: CIAA WLCSP with DC/DC regulator and NFC setup

For PCB reference layouts, see [Reference layout nRF52 Series](#).

Table 152: Bill of material for CIAA WLCSP with DC/DC converter and NFC setup

Designator	Value	Description	Footprint
C1, C2, C10, C11	12 pF	Capacitor, NP0, ±2%	0201
C3	1.0 pF	Capacitor, NP0, ±5%	0201
C4, C5	100 nF	Capacitor, X7R, ±10%	0201
C6, C7	100 pF	Capacitor, NP0, ±5%	0201
C8	4.7 µF	Capacitor, X5R, ±10%	0603
C9	1.0 µF	Capacitor, X5R, ±5%	0402
C <sub>tune1</sub> , C <sub>tune2</sub>	TBD pF	Capacitor, NP0, ±5%	0201
L1	3.3 nH	High frequency chip inductor ±5%	0201
L2	10 µH	Chip inductor, IDC, min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
U1	nRF52832-CIAA	Multi-protocol Bluetooth low energy, ANT, and 2.4 GHz proprietary system on chip	WLCSP_C50
X1	32 MHz	XTAL SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	XTAL SMD 2012, 32.768 kHz, Cl=9 pF, ±50 ppm	XTAL_2012

## 53.7 PCB guidelines

A well-designed PCB is necessary to achieve good RF performance. A poor layout can lead to loss in performance or functionality.

A qualified RF layout for the IC and its surrounding components, including matching networks, can be downloaded from [Reference layout nRF52 Series](#).

To ensure optimal performance, it is essential that you follow the schematics and layout references closely. Especially in the case of the antenna matching circuitry (components between device pin ANT and the antenna), any changes to the layout can change the behavior, resulting in degradation of RF performance or a need to change component values. All the reference circuits are designed for use with a 50 ohm single end antenna.

A PCB with a minimum of two layers, including a ground plane, is recommended for optimal performance. On PCBs with more than two layers, put a keep-out area on the inner layers directly below the antenna

matching circuitry (components between device pin ANT and the antenna) to reduce the stray capacitances that influence RF performance.

A matching network is needed between the RF pin ANT and the antenna, to match the antenna impedance (normally 50 ohm) to the optimum RF load impedance for the chip. For optimum performance, the impedance for the matching network should be set as described in the recommended package reference circuitry in [Reference circuitry](#) on page 550 above.

The DC supply voltage should be decoupled as close as possible to the VDD pins with high performance RF capacitors. See the schematics for recommended decoupling capacitor values. The supply voltage for the chip should be filtered and routed separately from the supply voltages of any digital circuitry.

Long power supply lines on the PCB should be avoided. All device grounds, VDD connections, and VDD bypass capacitors must be connected as close as possible to the IC. For a PCB with a topside RF ground plane, the VSS pins should be connected directly to the ground plane. For a PCB with a bottom ground plane, the best technique is to have via holes as close as possible to the VSS pads. A minimum of one via hole should be used for each VSS pin.

Fast switching digital signals should not be routed close to the crystal or the power supply lines. Capacitive loading of fast switching digital output lines should be minimized in order to avoid radio interference.

## 53.8 PCB layout example

The PCB layout shown below is a reference layout for the QFN package with internal LDO setup.

**Important:** Pay attention to how the capacitor C3 is grounded. It is not directly connected to the ground plane, but grounded via VSS pin 31. This is done to create additional filtering of harmonic components.

For all available reference layouts, see [Reference layout nRF52 Series](#).

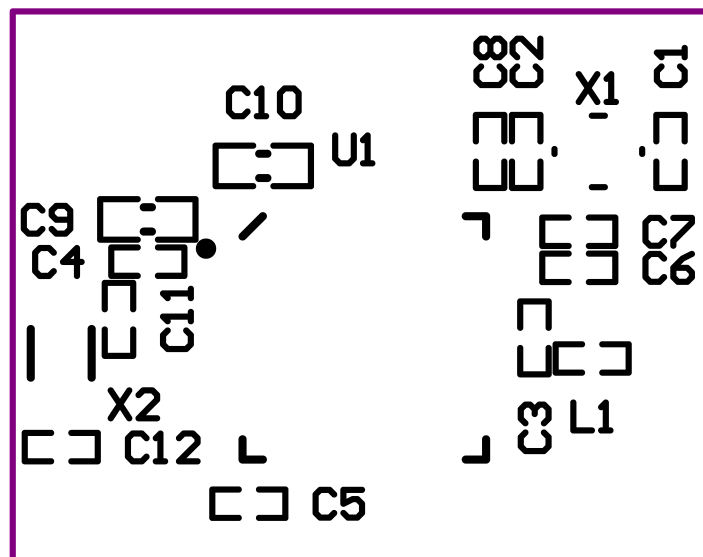


Figure 177: Top silk layer

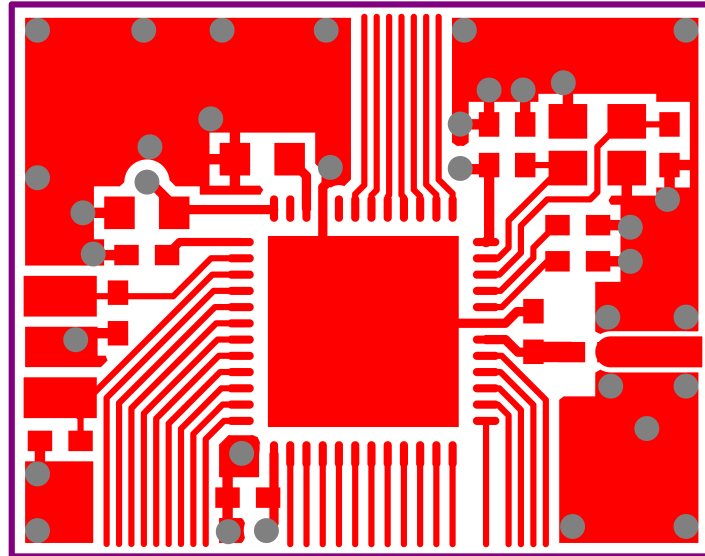


Figure 178: Top layer

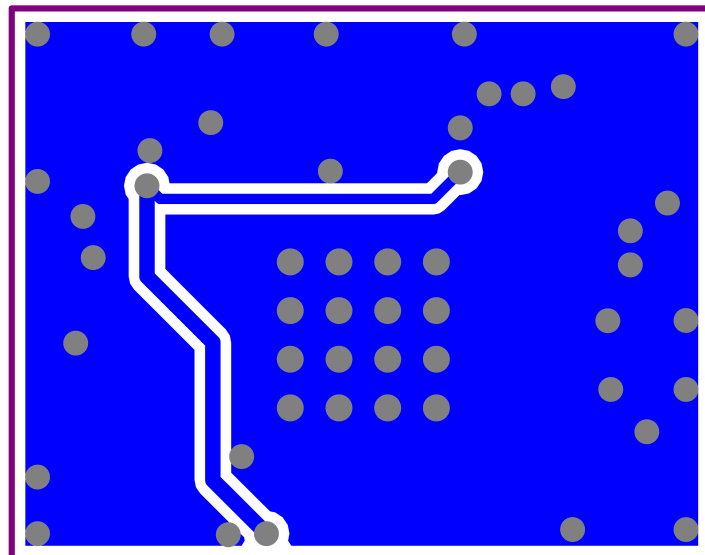


Figure 179: Bottom layer

**Important:** No components in bottom layer.

## 54 Legal notices

By using this documentation you agree to our terms and conditions of use. Nordic Semiconductor may change these terms and conditions at any time without notice.

### 54 Liability disclaimer

Nordic Semiconductor ASA reserves the right to make changes without further notice to the product to improve reliability, function, or design. Nordic Semiconductor ASA does not assume any liability arising out of the application or use of any product or circuits described herein.

Nordic Semiconductor ASA does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. If there are any discrepancies, ambiguities or conflicts in Nordic Semiconductor's documentation, the Product Specification prevails.

Nordic Semiconductor ASA reserves the right to make corrections, enhancements, and other changes to this document without notice.

Customer represents that, with respect to its applications, it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, and lessen the likelihood of failures that might cause harm, and to take appropriate remedial actions.

Nordic Semiconductor ASA assumes no liability for applications assistance or the design of customers' products. Customers are solely responsible for the design, validation, and testing of its applications as well as for compliance with all legal, regulatory, and safety-related requirements concerning its applications.

Nordic Semiconductor ASA's products are not designed for use in life-critical medical equipment, support appliances, devices, or systems where malfunction of Nordic Semiconductor ASA's products can reasonably be expected to result in personal injury. Customer may not use any Nordic Semiconductor ASA's products in life-critical medical equipment unless adequate design and operating safeguards by customer's authorized officers have been made. Customer agrees that prior to using or distributing any life-critical medical equipment that include Nordic Semiconductor ASA's products, customer will thoroughly test such systems and the functionality of such products as used in such systems.

Customer will fully indemnify Nordic Semiconductor ASA and its representatives against any damages, costs, losses, and/or liabilities arising out of customer's non-compliance with this section.

### 54 RoHS and REACH statement

Refer to [www.nordicsemi.com](http://www.nordicsemi.com) for complete hazardous substance reports, material composition reports, and latest version of Nordic's RoHS and REACH statements.

### 54 Trademarks

All trademarks, service marks, trade names, product names, and logos appearing in this documentation are the property of their respective owners.

### 54 Copyright notice

© 2021 Nordic Semiconductor ASA. All rights are reserved. Reproduction in whole or in part is prohibited without the prior written permission of the copyright holder.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nordic Semiconductor:

[NRF52832-QFAA-G-R](#) [NRF52832-QFAA-G-R7](#) [nRF52832-CIAA-G-R](#) [nRF52832-CIAA-G-R7](#) [nRF52832-QFAB-G-R](#)  
[nRF52832-QFAB-G-R7](#) [nRF52832-CIAR7](#)