



# nRF52840 Objective Product Specification v0.5

## Key features

- Bluetooth 5 ready multiprotocol radio
- Bluetooth 5 data rate support: 2 Mbps, 1Mbps, 500 kbs, 125 kbs
- 32-bit ARM® Cortex®-M4F @ 64 MHz
- High speed 2 Mbps data rate
- 104 dB link budget for Bluetooth low energy
- Full-speed 12 Mbps USB controller
- NFC-A tag on-chip
- Software stacks available as downloads
- Application development independent of protocol stacks
- Programmable output power from +8 dBm to -20 dBm
- -96 dBm Sensitivity for Bluetooth low energy
- On-air compatible with nRF52, nRF51, nRF24L, and nRF24AP Series
- ARM® TrustZone® Cryptocell 310 cryptographic accelerator
- RSSI
- Wide supply voltage range +5.5 v to 1.7 v
- Full selection of interfaces SPI/UART/PWM
- Programmable peripheral interconnect (PPI)
- High speed SPI interface 32 MHz
- Quad SPI interface 32 MHz
- EasyDMA for all digital interfaces
- RAM mapped FIFO using EasyDMA
- 12 bit /200K SPS ADC
- 128 bit AES/ECB/CCM/AAR co-processor
- Single-ended antenna output (on-chip balun)
- On-chip DC-DC buck converter
- Quadrature demodulator
- Individual power management for all peripherals
- Regulated supply for external components up to 25 mA

## Applications

- Advanced wearables
  - Connected watches
  - Advanced personal fitness devices
  - Wearables with wireless payment
  - Connected health
  - Virtual/Augmented Reality applications
- Internet of Things (IoT)
  - Smart home sensors and controllers
  - Industrial IoT sensors and controllers
- Interactive entertainment devices
  - Advanced Remote controls
  - Gaming controllers

# Contents

<b>1 Revision history.....</b>	<b>9</b>
<b>2 About this document.....</b>	<b>10</b>
2.1 Peripheral naming and abbreviations.....	10
2.2 Register tables.....	10
2.3 Registers.....	11
<b>3 Block diagram.....</b>	<b>12</b>
<b>4 Pin assignments.....</b>	<b>13</b>
4.1 QIAA pin assignments.....	13
<b>5 Absolute maximum ratings.....</b>	<b>16</b>
<b>6 Recommended operating conditions.....</b>	<b>17</b>
<b>7 CPU.....</b>	<b>18</b>
7.1 Floating point interrupt.....	18
7.2 Electrical specification.....	18
7.3 CPU and support module configuration.....	19
<b>8 Memory.....</b>	<b>20</b>
8.1 RAM - Random access memory.....	20
8.2 Flash - Non-volatile memory.....	20
8.3 Memory map.....	21
8.4 Instantiation.....	23
<b>9 AHB multilayer.....</b>	<b>25</b>
<b>10 EasyDMA.....</b>	<b>26</b>
10.1 EasyDMA array list.....	27
<b>11 NVMC — Non-volatile memory controller.....</b>	<b>28</b>
11.1 Writing to flash.....	28
11.2 Erasing a page in flash.....	28
11.3 Writing to user information configuration registers (UICR).....	28
11.4 Erasing user information configuration registers (UICR).....	28
11.5 Erase all.....	29
11.6 Cache.....	29
11.7 Registers.....	29
11.8 Electrical specification.....	32
<b>12 FICR — Factory information configuration registers.....</b>	<b>33</b>
12.1 Registers.....	33
<b>13 UICR — User information configuration registers.....</b>	<b>44</b>
13.1 Registers.....	44
<b>14 Peripheral interface.....</b>	<b>58</b>
14.1 Peripheral ID.....	58
14.2 Peripherals with shared ID.....	58
14.3 Peripheral registers.....	59
14.4 Bit set and clear.....	59
14.5 Tasks.....	59
14.6 Events.....	60
14.7 Shortcuts.....	60
14.8 Interrupts.....	60
<b>15 Debug and trace.....</b>	<b>62</b>
15.1 DAP - Debug Access Port.....	62
15.2 CTRL-AP - Control Access Port.....	63
15.3 Debug interface mode.....	65
15.4 Real-time debug.....	65

15.5 Trace.....	65
<b>16 POWER — Power supply.....</b>	<b>67</b>
16.1 Main supply.....	67
16.2 USB supply.....	72
16.3 System OFF mode.....	73
16.4 System ON mode.....	74
16.5 RAM power control.....	74
16.6 Reset.....	74
16.7 Retained registers.....	75
16.8 Reset behavior.....	75
16.9 Registers.....	76
16.10 Electrical specification.....	139
<b>17 CLOCK — Clock control.....</b>	<b>142</b>
17.1 HFCLK clock controller.....	142
17.2 LFCLK clock controller.....	144
17.3 Registers.....	146
17.4 Electrical specification.....	150
<b>18 Power and clock management.....</b>	<b>153</b>
18.1 Current consumption scenarios.....	153
<b>19 GPIO — General purpose input/output.....</b>	<b>155</b>
19.1 Pin configuration.....	155
19.2 GPIO located near the RADIO.....	157
19.3 Registers.....	157
19.4 Electrical specification.....	198
<b>20 GPIOTE — GPIO tasks and events.....</b>	<b>201</b>
20.1 Pin events and tasks.....	201
20.2 Port event.....	202
20.3 Tasks and events pin configuration.....	202
20.4 Registers.....	202
20.5 Electrical specification.....	211
<b>21 PPI — Programmable peripheral interconnect.....</b>	<b>212</b>
21.1 Pre-programmed channels.....	213
21.2 Registers.....	213
<b>22 RADIO — 2.4 GHz Radio.....</b>	<b>249</b>
22.1 Packet configuration.....	249
22.2 Address configuration.....	250
22.3 Data whitening.....	251
22.4 CRC.....	251
22.5 Radio states.....	252
22.6 Transmit sequence.....	252
22.7 Receive sequence.....	254
22.8 Received Signal Strength Indicator (RSSI).....	255
22.9 Interframe spacing.....	255
22.10 Device address match.....	256
22.11 Bit counter.....	256
22.12 IEEE 802.15.4 Operation.....	257
22.13 EasyDMA.....	264
22.14 Registers.....	265
22.15 Electrical specification.....	286
<b>23 TIMER — Timer/counter.....</b>	<b>290</b>
23.1 Capture.....	291
23.2 Compare.....	291
23.3 Task delays.....	291
23.4 Task priority.....	291
23.5 Registers.....	291
23.6 Electrical specification.....	297
<b>24 RTC — Real-time counter.....</b>	<b>298</b>

24.1 Clock source.....	298
24.2 Resolution versus overflow and the PRESCALER.....	298
24.3 COUNTER register.....	299
24.4 Overflow features.....	299
24.5 TICK event.....	299
24.6 Event control feature.....	300
24.7 Compare feature.....	300
24.8 TASK and EVENT jitter/delay.....	302
24.9 Reading the COUNTER register.....	304
24.10 Registers.....	304
24.11 Electrical specification.....	310
<b>25 RNG — Random number generator.....</b>	<b>311</b>
25.1 Bias correction.....	311
25.2 Speed.....	311
25.3 Registers.....	311
25.4 Electrical specification.....	313
<b>26 TEMP — Temperature sensor.....</b>	<b>314</b>
26.1 Registers.....	314
26.2 Electrical specification.....	319
<b>27 ECB — AES electronic codebook mode encryption.....</b>	<b>320</b>
27.1 Shared resources.....	320
27.2 EasyDMA.....	320
27.3 ECB data structure.....	320
27.4 Registers.....	321
27.5 Electrical specification.....	322
<b>28 CCM — AES CCM mode encryption.....</b>	<b>323</b>
28.1 Shared resources.....	323
28.2 Key-stream generation.....	323
28.3 Encryption.....	324
28.4 Decryption.....	324
28.5 AES CCM and RADIO concurrent operation.....	325
28.6 Encrypting packets on-the-fly in radio transmit mode.....	325
28.7 Decrypting packets on-the-fly in radio receive mode.....	326
28.8 CCM data structure.....	327
28.9 EasyDMA and ERROR event.....	328
28.10 Registers.....	328
28.11 Electrical specification.....	332
<b>29 AAR — Accelerated address resolver.....</b>	<b>333</b>
29.1 Shared resources.....	333
29.2 EasyDMA.....	333
29.3 Resolving a resolvable address.....	333
29.4 Use case example for chaining RADIO packet reception with address resolution using AAR.....	334
29.5 IRK data structure.....	334
29.6 Registers.....	335
29.7 Electrical specification.....	337
<b>30 SPIM — Serial peripheral interface master with EasyDMA.....</b>	<b>338</b>
30.1 SPI master transaction sequence.....	338
30.2 Pin configuration.....	339
30.3 Shared resources.....	340
30.4 EasyDMA.....	340
30.5 Low power.....	341
30.6 Registers.....	341
30.7 Electrical specification.....	349
<b>31 SPIS — Serial peripheral interface slave with EasyDMA.....</b>	<b>351</b>
31.1 Shared resources.....	351
31.2 EasyDMA.....	351

31.3 SPI slave operation.....	352
31.4 Pin configuration.....	353
31.5 Registers.....	354
31.6 Electrical specification.....	362
<b>32 TWIM — I<sup>2</sup>C compatible two-wire interface master with EasyDMA.....</b>	<b>364</b>
32.1 Shared resources.....	365
32.2 EasyDMA.....	365
32.3 Master write sequence.....	365
32.4 Master read sequence.....	366
32.5 Master repeated start sequence.....	367
32.6 Low power.....	368
32.7 Master mode pin configuration.....	368
32.8 Registers.....	368
32.9 Electrical specification.....	375
32.10 Pullup resistor.....	376
<b>33 TWIS — I<sup>2</sup>C compatible two-wire interface slave with EasyDMA.....</b>	<b>377</b>
33.1 Shared resources.....	379
33.2 EasyDMA.....	379
33.3 TWI slave responding to a read command.....	379
33.4 TWI slave responding to a write command.....	380
33.5 Master repeated start sequence.....	381
33.6 Terminating an ongoing TWI transaction.....	382
33.7 Low power.....	382
33.8 Slave mode pin configuration.....	382
33.9 Registers.....	383
33.10 Electrical specification.....	389
<b>34 UARTE — Universal asynchronous receiver/transmitter with EasyDMA....</b>	<b>391</b>
34.1 Shared resources.....	391
34.2 EasyDMA.....	391
34.3 Transmission.....	392
34.4 Reception.....	392
34.5 Error conditions.....	394
34.6 Using the UARTE without flow control.....	394
34.7 Parity and stop bit configuration.....	394
34.8 Low power.....	395
34.9 Pin configuration.....	395
34.10 Registers.....	395
34.11 Electrical specification.....	404
<b>35 QDEC — Quadrature decoder.....</b>	<b>405</b>
35.1 Sampling and decoding.....	405
35.2 LED output.....	406
35.3 Debounce filters.....	406
35.4 Accumulators.....	407
35.5 Output/input pins.....	407
35.6 Pin configuration.....	407
35.7 Registers.....	408
35.8 Electrical specification.....	414
<b>36 SAADC — Successive approximation analog-to-digital converter.....</b>	<b>415</b>
36.1 Shared resources.....	415
36.2 Overview.....	415
36.3 Digital output.....	416
36.4 Analog inputs and channels.....	417
36.5 Operation modes.....	417
36.6 EasyDMA.....	419
36.7 Resistor ladder.....	420
36.8 Reference.....	421
36.9 Acquisition time.....	421
36.10 Limits event monitoring.....	422

36.11 Registers.....	423
36.12 Electrical specification.....	447
36.13 Performance factors.....	449
<b>37 COMP — Comparator.....</b>	<b>450</b>
37.1 Shared resources.....	451
37.2 Differential mode.....	451
37.3 Single-ended mode.....	452
37.4 Pin configuration.....	454
37.5 Registers.....	454
37.6 Electrical specification.....	459
<b>38 LPCOMP — Low power comparator.....</b>	<b>461</b>
38.1 Shared resources.....	462
38.2 Pin configuration.....	462
38.3 Registers.....	463
38.4 Electrical specification.....	467
<b>39 WDT — Watchdog timer.....</b>	<b>468</b>
39.1 Reload criteria.....	468
39.2 Temporarily pausing the watchdog.....	468
39.3 Watchdog reset.....	468
39.4 Registers.....	469
39.5 Electrical specification.....	473
<b>40 SWI — Software interrupts.....</b>	<b>474</b>
40.1 Registers.....	474
<b>41 NFCT — Near field communication tag.....</b>	<b>475</b>
41.1 Overview.....	475
41.2 Operating states.....	477
41.3 Pin configuration.....	478
41.4 EasyDMA.....	478
41.5 Frame assembler.....	479
41.6 Frame disassembler.....	480
41.7 Frame timing controller.....	481
41.8 Collision resolution.....	482
41.9 Antenna interface.....	483
41.10 NFCT antenna recommendations.....	483
41.11 Battery protection.....	484
41.12 References.....	484
41.13 Registers.....	484
41.14 Electrical specification.....	496
<b>42 PDM — Pulse density modulation interface.....</b>	<b>497</b>
42.1 Master clock generator.....	497
42.2 Module operation.....	497
42.3 Decimation filter.....	498
42.4 EasyDMA.....	498
42.5 Hardware example.....	499
42.6 Pin configuration.....	499
42.7 Registers.....	500
42.8 Electrical specification.....	505
<b>43 I<sup>2</sup>S — Inter-IC sound interface.....</b>	<b>506</b>
43.1 Mode.....	506
43.2 Transmitting and receiving.....	506
43.3 Left right clock (LRCK).....	507
43.4 Serial clock (SCK).....	507
43.5 Master clock (MCK).....	508
43.6 Width, alignment and format.....	508
43.7 EasyDMA.....	510
43.8 Module operation.....	512
43.9 Pin configuration.....	513

43.10 Registers.....	514
43.11 Electrical specification.....	521
<b>44 MWU — Memory watch unit.....</b>	<b>522</b>
44.1 Registers.....	522
<b>45 EGU — Event generator unit.....</b>	<b>549</b>
45.1 Registers.....	549
45.2 Electrical specification.....	555
<b>46 PWM — Pulse width modulation.....</b>	<b>556</b>
46.1 Wave counter.....	556
46.2 Decoder with EasyDMA.....	559
46.3 Limitations.....	564
46.4 Pin configuration.....	564
46.5 Registers.....	565
46.6 Electrical specification.....	573
<b>47 SPI — Serial peripheral interface master.....</b>	<b>574</b>
47.1 Functional description.....	574
47.2 Registers.....	577
47.3 Electrical specification.....	580
<b>48 TWI — I<sup>2</sup>C compatible two-wire interface.....</b>	<b>581</b>
48.1 Functional description.....	581
48.2 Master mode pin configuration.....	581
48.3 Shared resources.....	582
48.4 Master write sequence.....	582
48.5 Master read sequence.....	583
48.6 Master repeated start sequence.....	584
48.7 Low power.....	585
48.8 Registers.....	585
48.9 Electrical specification.....	589
<b>49 UART — Universal asynchronous receiver/transmitter.....</b>	<b>591</b>
49.1 Functional description.....	591
49.2 Pin configuration.....	591
49.3 Shared resources.....	592
49.4 Transmission.....	592
49.5 Reception.....	592
49.6 Suspending the UART.....	593
49.7 Error conditions.....	593
49.8 Using the UART without flow control.....	594
49.9 Parity configuration.....	594
49.10 Registers.....	594
49.11 Electrical specification.....	599
<b>50 ACL — Access control lists.....</b>	<b>600</b>
50.1 Registers.....	601
<b>51 USB — Universal serial bus device.....</b>	<b>609</b>
51.1 USB device states.....	609
51.2 USB terminology.....	610
51.3 USB pins.....	611
51.4 USB start-up sequence.....	611
51.5 USB pull-up.....	612
51.6 USB reset.....	612
51.7 USB suspend and resume.....	613
51.8 EasyDMA.....	614
51.9 Control transfers.....	615
51.10 Bulk and interrupt transactions.....	618
51.11 Isochronous transactions.....	620
51.12 USB register access limitations.....	622
51.13 Registers.....	623
51.14 Electrical specification.....	659

<b>52 QSPI — Quad serial peripheral interface.....</b>	<b>661</b>
52.1 Configuring peripheral.....	661
52.2 Write operation.....	662
52.3 Read operation.....	662
52.4 Erase operation.....	662
52.5 Execute in place.....	662
52.6 Sending custom instructions.....	663
52.7 Deep power-down mode.....	664
52.8 Instruction set.....	664
52.9 Interface description.....	664
52.10 Registers.....	669
52.11 Electrical specification.....	677
<b>53 CRYPTOCELL — ARM TrustZone CryptoCell 310.....</b>	<b>679</b>
53.1 Standards.....	680
53.2 Control interface.....	680
<b>54 Mechanical specifications.....</b>	<b>682</b>
54.1 AQFN73 7 x 7 mm package.....	682
<b>55 Ordering information.....</b>	<b>683</b>
55.1 Package marking.....	683
55.2 Box labels.....	683
55.3 Order code.....	684
55.4 Code ranges and values.....	684
55.5 Product options.....	685
<b>56 Reference circuitry.....</b>	<b>686</b>
56.1 Circuit configuration no. 1.....	686
56.2 Circuit configuration no. 2.....	687
56.3 Circuit configuration no. 3.....	688
56.4 Circuit configuration no. 4.....	689
56.5 Circuit configuration no. 5.....	690
56.6 Circuit configuration no. 6.....	691
56.7 PCB guidelines.....	692
56.8 PCB layout example.....	693
<b>57 Liability disclaimer.....</b>	<b>696</b>
57.1 RoHS and REACH statement.....	696
57.2 Life support applications.....	696



## 1 Revision history

Date	Version	Description
December 2016	0.5	First release

## 2 About this document

This product specification is organized into chapters based on the modules and peripherals that are available in this IC.

The peripheral descriptions are broken into separate sections that include the following information:

- A detailed functional description of the peripheral.
- Register configuration for the peripheral.
- Electrical specification tables providing the specified limits of the chip when tested under the conditions defined in the [Recommended operating conditions](#) on page 17.

### 2.1 Peripheral naming and abbreviations

Every peripheral has a unique capitalized name or an abbreviation of its name, e.g. TIMER, used for identification and reference. This name is used in chapter headings and references, and it will appear in the ARM® Cortex® Microcontroller Software Interface Standard (CMSIS) hardware abstraction layer to identify the peripheral.

The peripheral instance name, which is different from the peripheral name, is constructed using the peripheral name followed by a numbered postfix starting with 0, for example TIMER0. A postfix is normally only used if a peripheral can be instantiated more than once. The peripheral instance name is also used in the CMSIS to identify the peripheral instance.

### 2.2 Register tables

Individual registers are described using register tables. These tables are built up of two sections. The first three colored rows describe the position and size of the different fields in the register. The following rows describe the fields in more details.

#### 2.2.1 Fields and values

The **Id (Field Id)** row specifies the bits that belong to the different fields in the register.

A blank space means that the field is reserved and read as undefined, and it must be written as 0 to secure forward compatibility. If a register is divided into more than one field, a unique field name is specified for each field in the **Field** column.

If a field has enumerated values, then every value will be identified with a unique value id in the **Value Id** column. Single-bit bit fields may, however, omit the **Value Id** when values can be substituted with a Boolean type enumerator range, for example, True/False, Disable/Enable, On/Off, and so on.

Values are usually provided as decimal or hexadecimal. Hex values have a '0x' prefix, decimal values have no prefix.

The **Value** column can be populated in the following ways:

- Individual enumerated values, for example, 1, 3, 9.
- Range of values, e.g. [0..4], indicating all values between and including 0 and 4.
- Implicit values. If no values are indicated in the **Value** column, all bit combinations are supported, or alternatively the field's translation and limitations are described in the text instead.

If two or more fields are closely related, the columns **Value Id**, **Value**, and **Description** may be omitted for all but the first field. Subsequent fields will indicate inheritance with '..'.

A feature marked **Deprecated** should not be used for new designs.

## 2.3 Registers

Table 1: Register Overview

Register	Offset	Description
<i>DUMMY</i>	0x514	Example of a register controlling a dummy feature

### 2.3.1 DUMMY

Address offset: 0x514

Example of a register controlling a dummy feature

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id							D	D	D	D					C	C	C									B									A	A						
Reset 0x00050002			0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0							
Id	RW	Field	Value Id				Value				Description																															
A	RW	FIELD_A									Example of a field with several enumerated values																															
			Disabled				0				The example feature is disabled																															
			NormalMode				1				The example feature is enabled in normal mode																															
			ExtendedMode				2				The example feature is enabled along with extra functionality																															
B	RW	FIELD_B									Example of a deprecated field																												Deprecated			
			Disabled				0				The override feature is disabled																															
			Enabled				1				The override feature is enabled																															
C	RW	FIELD_C									Example of a field with a valid range of values																															
			ValidRange				[2..7]				Example of allowed values for this field																															
D	RW	FIELD_D									Example of a field with no restriction on the values																															

## 3 Block diagram

This block diagram illustrates the overall system. Arrows with white heads indicate signals that share physical pins with other signals.

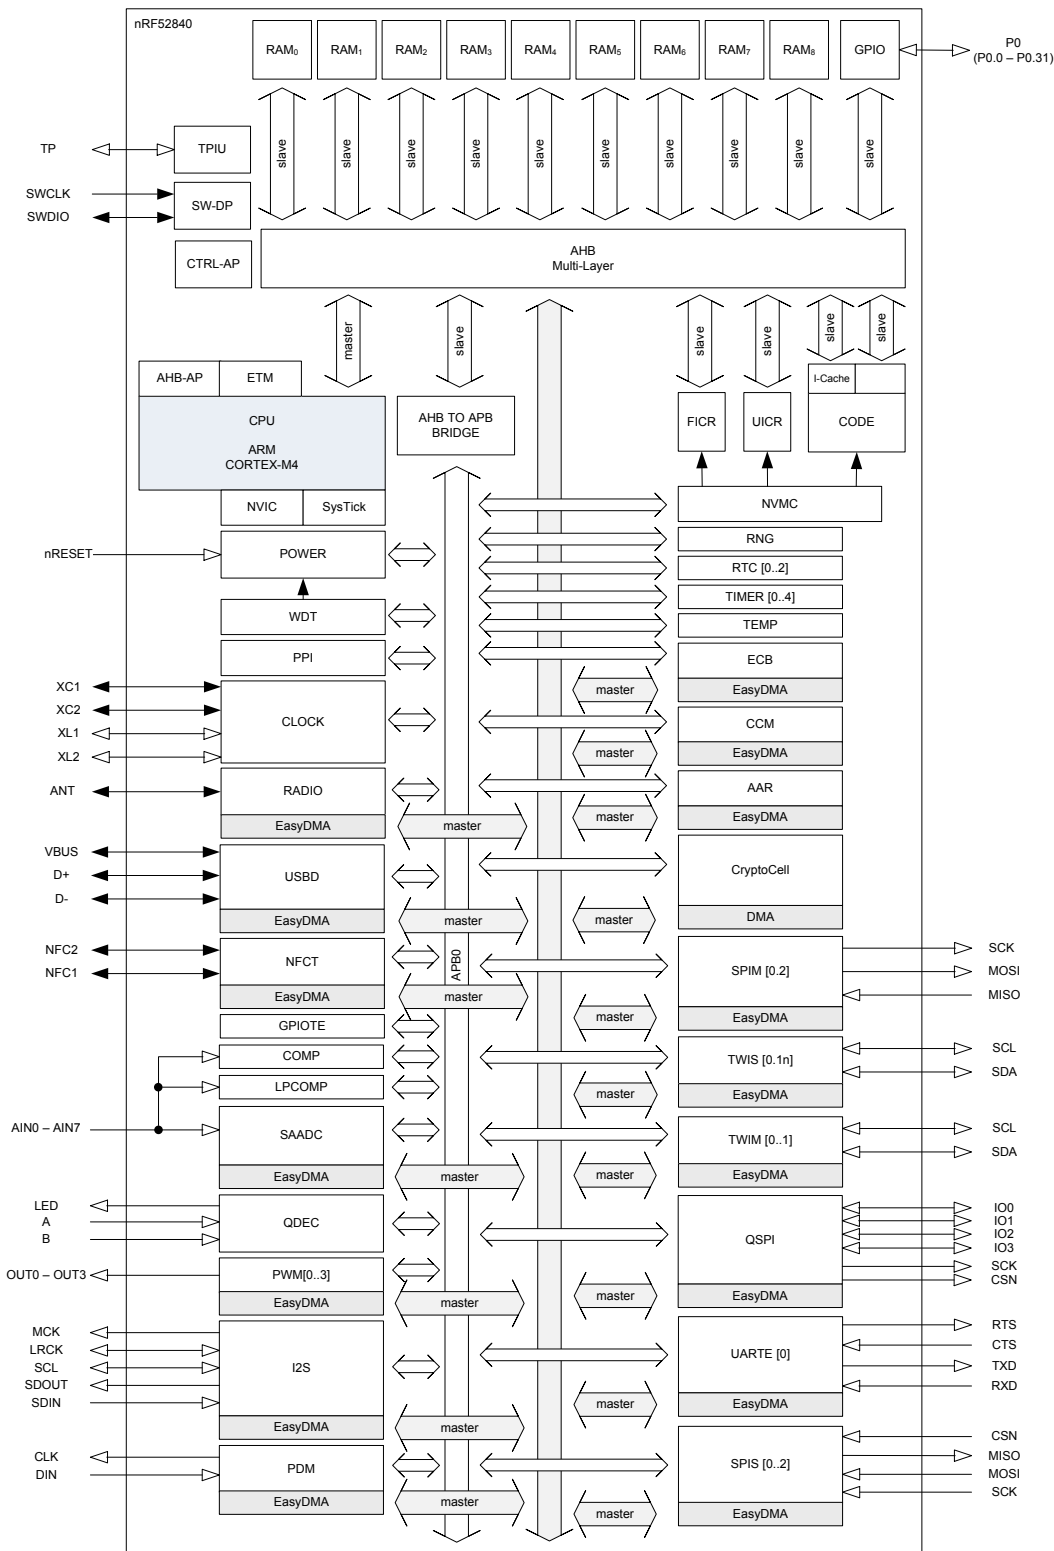


Figure 1: Block diagram

## 4 Pin assignments

This section describes the pin assignment and the pin functions.

This device provides flexibility when it comes to routing and configuration of the GPIO pins. However, some pins have recommendations for how the pin should be configured or what it should be used for. See [Table 2: QIAA pin assignments](#) on page 13 for more information about this.

### 4.1 QIAA pin assignments

This section describes the pin assignment and the pin functions.

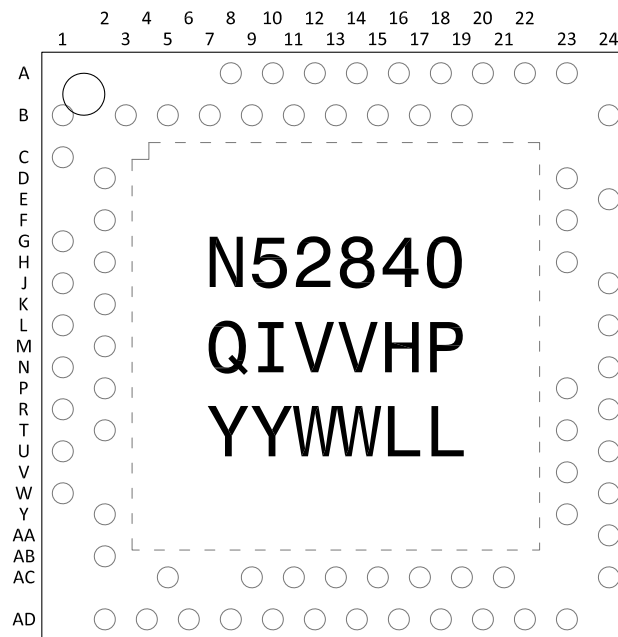


Figure 2: QIAA pin assignments, top view

Table 2: QIAA pin assignments

Pin	Name	Function	Description	Recommended usage
A8	P0.31	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN7	Analog input	Analog input	
A10	P0.29	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN5	Analog input	Analog input	
A12	P0.02	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN0	Analog input	Analog input	
A14	P1.15	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
A16	P1.13	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
A18	DEC2	Power	1.3 V regulator supply decoupling (Radio supply)	
A20	P1.10	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
A22	VDD	Power	Power supply	
A23	XC2	Analog input	Connection for 32 MHz crystal.	
B1	VDD	Power	Power supply	
B3	DCC	Power	DC/DC converter output	

Pin	Name	Function	Description	Recommended usage
B5	DEC4	Power	1.3 V regulator supply decoupling	
B7	VSS	Power	Ground	
B9	P0.30	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN6	Analog input	Analog input	
B11	P0.28	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN4	Analog input	Analog input	
B13	P0.03	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	AIN1	Analog input	Analog input	
B15	P1.14	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
B17	P1.12	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
B19	P1.11	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
B24	XC1	Analog input	Connection for 32 MHz crystal	
C1	DEC1	Power	1.1 V regulator supply decoupling	
D2	P0.00	Digital I/O	General purpose I/O	
	XL1	Analog input	Connection for 32.768 kHz crystal	
D23	DEC3	Power	Power supply, decoupling	
E24	DEC2	Power	1.3 V regulator supply decoupling (Radio supply)	
F2	P0.01	Digital I/O	General purpose I/O	
	XL2	Analog input	Connection for 32.768 kHz crystal	
F23	VSS_PA	Power	Ground (Radio supply)	
G1	P0.26	Digital I/O	General purpose I/O	
H2	P0.27	Digital I/O	General purpose I/O	
H23	ANT	RF	Single-ended radio antenna connection	
J1	P0.04	Digital I/O	General purpose I/O	
	AIN2	Analog input	Analog input	
J24	P0.10	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	NFC2	NFC input	NFC antenna connection	
K2	P0.05	Digital I/O	General purpose I/O	
	AIN3	Analog input	Analog input	
L1	P0.06	Digital I/O	General purpose I/O	
L24	P0.09	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
	NFC1	NFC input	NFC antenna connection	
M2	P0.07	Digital I/O	General purpose I/O	
N1	P0.08	Digital I/O	General purpose I/O	
N24	DEC5	Power	1.3 V regulator supply decoupling (flash supply)	
P2	P1.08	Digital I/O	General purpose I/O	
P23	P1.07	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
R1	P1.09	Digital I/O	General purpose I/O	
R24	P1.06	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
T2	P0.11	Digital I/O	General purpose I/O	
T23	P1.05	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
U1	P0.12	Digital I/O	General purpose I/O	
U24	P1.04	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
V23	P1.03	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
W1	VDD	Power	Power supply	

Pin	Name	Function	Description	Recommended usage
W24	P1.02	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
Y2	VDDH	Power	High voltage power supply	
Y23	P1.01	Digital I/O	General purpose I/O	Standard drive, low frequency I/O only.
AA24	SWDCLK	Debug	Serial wire debug clock input for debug and programming.	
AB2	DCCH	Power	DC/DC converter output	
AC5	DECUSB	Power	Decoupling for USB 3.3 V	
AC9	P0.14	Digital I/O	General purpose I/O	
AC11	P0.16	Digital I/O	General purpose I/O	
AC13	P0.18	Digital I/O	General purpose I/O	QSPI/CSN
	nRESET		Configurable as system RESET	
AC15	P0.19	Digital I/O	General purpose I/O	QSPI/SCK
AC17	P0.21	Digital I/O	General purpose I/O	QSPI
AC19	P0.23	Digital I/O	General purpose I/O	QSPI
AC21	P0.25	Digital I/O	General purpose I/O	
AC24	SWDIO	Debug	Debug serial data	
AD2	VBUS	Power	5 V input for USB 3.3 V regulator	
AD4	D-	Digital I/O	USB D-	USB
AD6	D+	Digital I/O	USB D+	USB
AD8	P0.13	Digital I/O	General purpose I/O	
AD10	P0.15	Digital I/O	General purpose I/O	
AD12	P0.17	Digital I/O	General purpose I/O	
AD14	VDD	Power	Power supply	
AD16	P0.20	Digital I/O	General purpose I/O	
AD18	P0.22	Digital I/O	General purpose I/O	QSPI
AD20	P0.24	Digital I/O	General purpose I/O	
AD22	P1.00	Digital I/O	General purpose I/O	QSPI
AD23	VDD	Power	Flash supply pad	
<b>Bottom of chip</b>				
Die pad	VSS	Power	Ground pad. Exposed die pad must be connected to ground (VSS) for proper device operation.	


**Important:** For more information on Standard drive, see [GPIO — General purpose input/output](#) on page 155. Low frequency I/O is signals with a frequency up to 10 kHz.

## 5 Absolute maximum ratings

Maximum ratings are the extreme limits to which the chip can be exposed for a limited amount of time without permanently damaging it. Exposure to absolute maximum ratings for prolonged periods of time may affect the reliability of the device.

**Table 3: Absolute maximum ratings**

Note	Min.	Max.	Unit
<b>Supply voltages</b>			
VDD	-0.3	+3.9	V
VDDH	-0.3	+5.8	V
VBUS	-0.3	+5.8	V
VSS		0	V
<b>I/O pin voltage</b>			
$V_{I/O}$ , VDD $\leq$ 3.6 V	-0.3	VDD + 0.3 V	V
$V_{I/O}$ , VDD > 3.6 V	-0.3	3.9 V	V
<b>NFC antenna pin current</b>			
$I_{NFC1/2}$		80	mA
<b>Radio</b>			
RF input level		10	dBm
<b>Environmental (AQFN package)</b>			
Storage temperature	-40	+125	°C
MSL	Moisture Sensitivity Level	2	
ESD HBM	Human Body Model	4	kV
ESD CDM <sub>QF</sub>	Charged Device Model	750	V
	(AQFN73, 7×7 mm package)		
<b>Flash memory</b>			
Endurance	10 000		Write/erase cycles
Retention	10 years at 40°C		

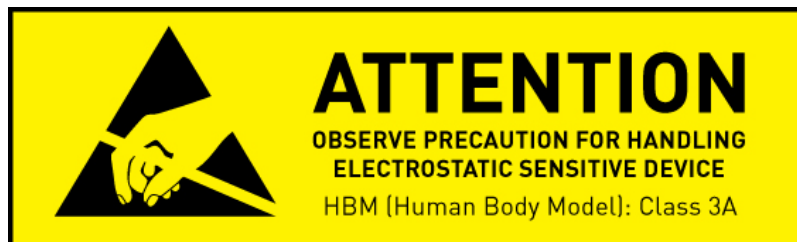



## 6 Recommended operating conditions

The operating conditions are the physical parameters that the chip can operate within.

**Table 4: Recommended operating conditions**

Symbol	Parameter	Notes	Min.	Nom.	Max.	Units
VDD	VDD supply voltage, independent of DCDC enable		1.7	3.0	3.6	V
VDDH	VDDH supply voltage, independent of DCDC enable		2.5	3.7	5.5	V
VBUS	VBUS USB supply voltage		4.35	5	5.5	V
t <sub>R_VDD</sub>	Supply rise time (0 V to 1.7 V)				60	ms
t <sub>R_VDDH</sub>	Supply rise time (0 V to 3.7 V)				100	ms
TA	Operating temperature		-40	25	85	°C

**Important:** The on-chip power-on reset circuitry may not function properly for rise times longer than the specified maximum.

## 7 CPU

The ARM® Cortex®-M4 processor with floating-point unit (FPU) has a 32-bit instruction set (Thumb®-2 technology) that implements a superset of 16 and 32-bit instructions to maximize code density and performance.

This processor implements several features that enable energy-efficient arithmetic and high-performance signal processing, including:

- Digital signal processing (DSP) instructions
- Single-cycle multiply and accumulate (MAC) instructions
- Hardware divide
- 8- and 16-bit single instruction multiple data (SIMD) instructions
- Single-precision floating-point unit (FPU)

The ARM Cortex Microcontroller Software Interface Standard (CMSIS) hardware abstraction layer for the ARM Cortex processor series is implemented and available for the M4 CPU.

Real-time execution is highly deterministic in thread mode, to and from sleep modes, and when handling events at configurable priority levels via the nested vectored interrupt controller (NVIC).

Executing code from flash will have a wait state penalty on the nRF52 series. An instruction cache can be enabled to minimize flash wait states when fetching instructions. For more information on cache, see [Cache](#) on page 29. The section [Electrical specification](#) on page 18 shows CPU performance parameters including wait states in different modes, CPU current and efficiency, and processing power and efficiency based on the CoreMark® benchmark.

### 7.1 Floating point interrupt

The floating point unit (FPU) may generate exceptions when used due to e.g. overflow or underflow, which in turn will trigger the FPU interrupt.

See [Instantiation](#) on page 23 for more information about the exceptions triggering the FPU interrupt.

To clear the IRQ (interrupt request) line when an exception has occurred, the relevant exception bit within the floating-point status and control register (FPSCR) needs to be cleared. For more information about the FPSCR or other FPU registers, see *Cortex-M4 Devices Generic User Guide*.

### 7.2 Electrical specification

#### 7.2.1 CPU performance

The CPU clock speed is 64 MHz. Current and efficiency data is taken when in System ON and the CPU is executing the CoreMark™ benchmark. It includes power regulator and clock base currents. All other blocks are IDLE.

Symbol	Description	Min.	Typ.	Max.	Units
W <sub>FLASH</sub>	CPU wait states, running CoreMark from flash, cache disabled			2	
W <sub>FLASHCACHE</sub>	CPU wait states, running CoreMark from flash, cache enabled			3	
W <sub>RAM</sub>	CPU wait states, running CoreMark from RAM			0	
I <sub>DDFLASHCACHE</sub>	CPU current, running CoreMark from flash, cache enabled, LDO		6.5		mA
I <sub>DDFLASHDCDC</sub>	CPU current, running CoreMark from flash, cache enabled, DCDC 3V		3.6		mA
I <sub>DDFLASH</sub>	CPU current, running CoreMark from flash, cache disabled, LDO				mA
I <sub>DDFLASHDCDC</sub>	CPU current, running CoreMark from flash, cache disabled, DCDC 3V				mA
I <sub>DDRAM</sub>	CPU current, running CoreMark from RAM, LDO				mA

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>DDRAMDCDC</sub>	CPU current, running CoreMark from RAM, DCDC 3V				mA
I <sub>DDFLASH/MHz</sub>	CPU efficiency, running CoreMark from flash, cache enabled, LDO		102		μA/ MHz
I <sub>DDFLASHDCDC/MHz</sub>	CPU efficiency, running CoreMark from flash, cache enabled, DCDC 3V		56		μA/ MHz
CM <sub>FLASH</sub>	CoreMark, running CoreMark from flash, cache enabled		212		CoreA
CM <sub>FLASH/MHz</sub>	CoreMark per MHz, running CoreMark from flash, cache enabled		3.3		CoreA MHz
CM <sub>FLASH/mA</sub>	CoreMark per mA, running CoreMark from flash, cache enabled, DCDC 3V		59		CoreA mA

## 7.3 CPU and support module configuration

The ARM® Cortex®-M4 processor has a number of CPU options and support modules implemented on the device.


Option / Module	Description	Implemented
Core options		
NVIC	Nested vector interrupt controller	37 vectors
PRIORITIES	Priority bits	3
WIC	Wakeup interrupt controller	NO
Endianness	Memory system endianness	Little endian
Bit-banding	Bit banded memory	NO
DWT	Data watchpoint and trace	YES
SysTick	System tick timer	YES
Modules		
MPU	Memory protection unit	YES
FPU	Floating-point unit	YES
DAP	Debug access port	YES
ETM	Embedded trace macrocell	YES
ITM	Instrumentation trace macrocell	YES
TPIU	Trace port interface unit	YES
ETB	Embedded trace buffer	NO
FPB	Flash patch and breakpoint unit	YES
HTM	AMBA™ AHB trace macrocell	NO

## 8 Memory

The nRF52840 contains 1 MB of flash and 256 kB of RAM that can be used for code and data storage.

The CPU and the peripherals having EasyDMA can access memory via the AHB multilayer interconnect.

The CPU is also able to access peripherals via the AHB multilayer interconnect, as illustrated in [Figure 3: Memory layout](#) on page 20.

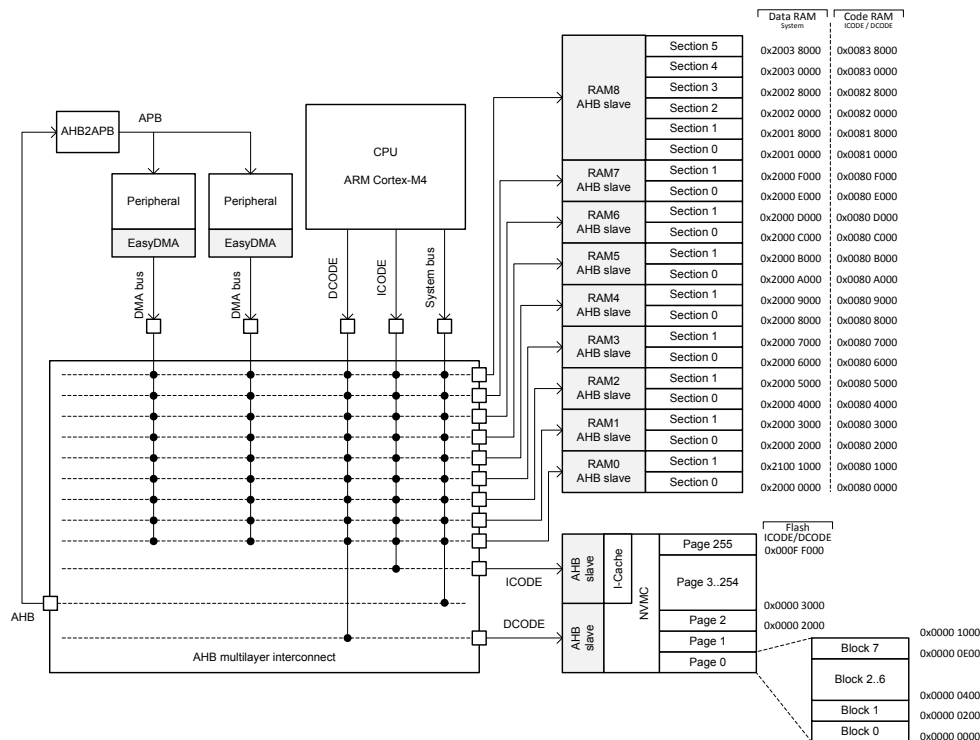

**Figure 3: Memory layout**

See [AHB multilayer](#) on page 25 and [EasyDMA](#) on page 26 for more information about the AHB multilayer interconnect and the EasyDMA.

The same physical RAM is mapped to both the Data RAM region and the Code RAM region. It is up to the application to partition the RAM within these regions so that one does not corrupt the other.

### 8.1 RAM - Random access memory

The RAM interface is divided into 9 RAM AHB slaves.

RAM AHB slave 0-7 is connected to 2x4 kB RAM sections each and RAM AHB slave 8 is connected to 6x32 kB sections, as shown in [Figure 3: Memory layout](#) on page 20.

Each of the RAM sections have separate power control for System ON and System OFF mode operation, which is configured via RAM register (see the [POWER — Power supply](#) on page 67).

### 8.2 Flash - Non-volatile memory


The flash can be read an unlimited number of times by the CPU, but it has restrictions on the number of times it can be written and erased and also on how it can be written.

Writing to flash is managed by the non-volatile memory controller (NVMC), see [NVMC — Non-volatile memory controller](#) on page 28.

The flash is divided into 256x4 kB pages that can be accessed by the CPU via both the ICODE and DCODE buses as shown in [Figure 3: Memory layout](#) on page 20. Each page is divided into 8 blocks.

## 8.3 Memory map

The complete memory map is shown in [Figure 4: Memory map](#) on page 22. As described in [Memory](#) on page 20, Code RAM and the Data RAM are the same physical RAM.

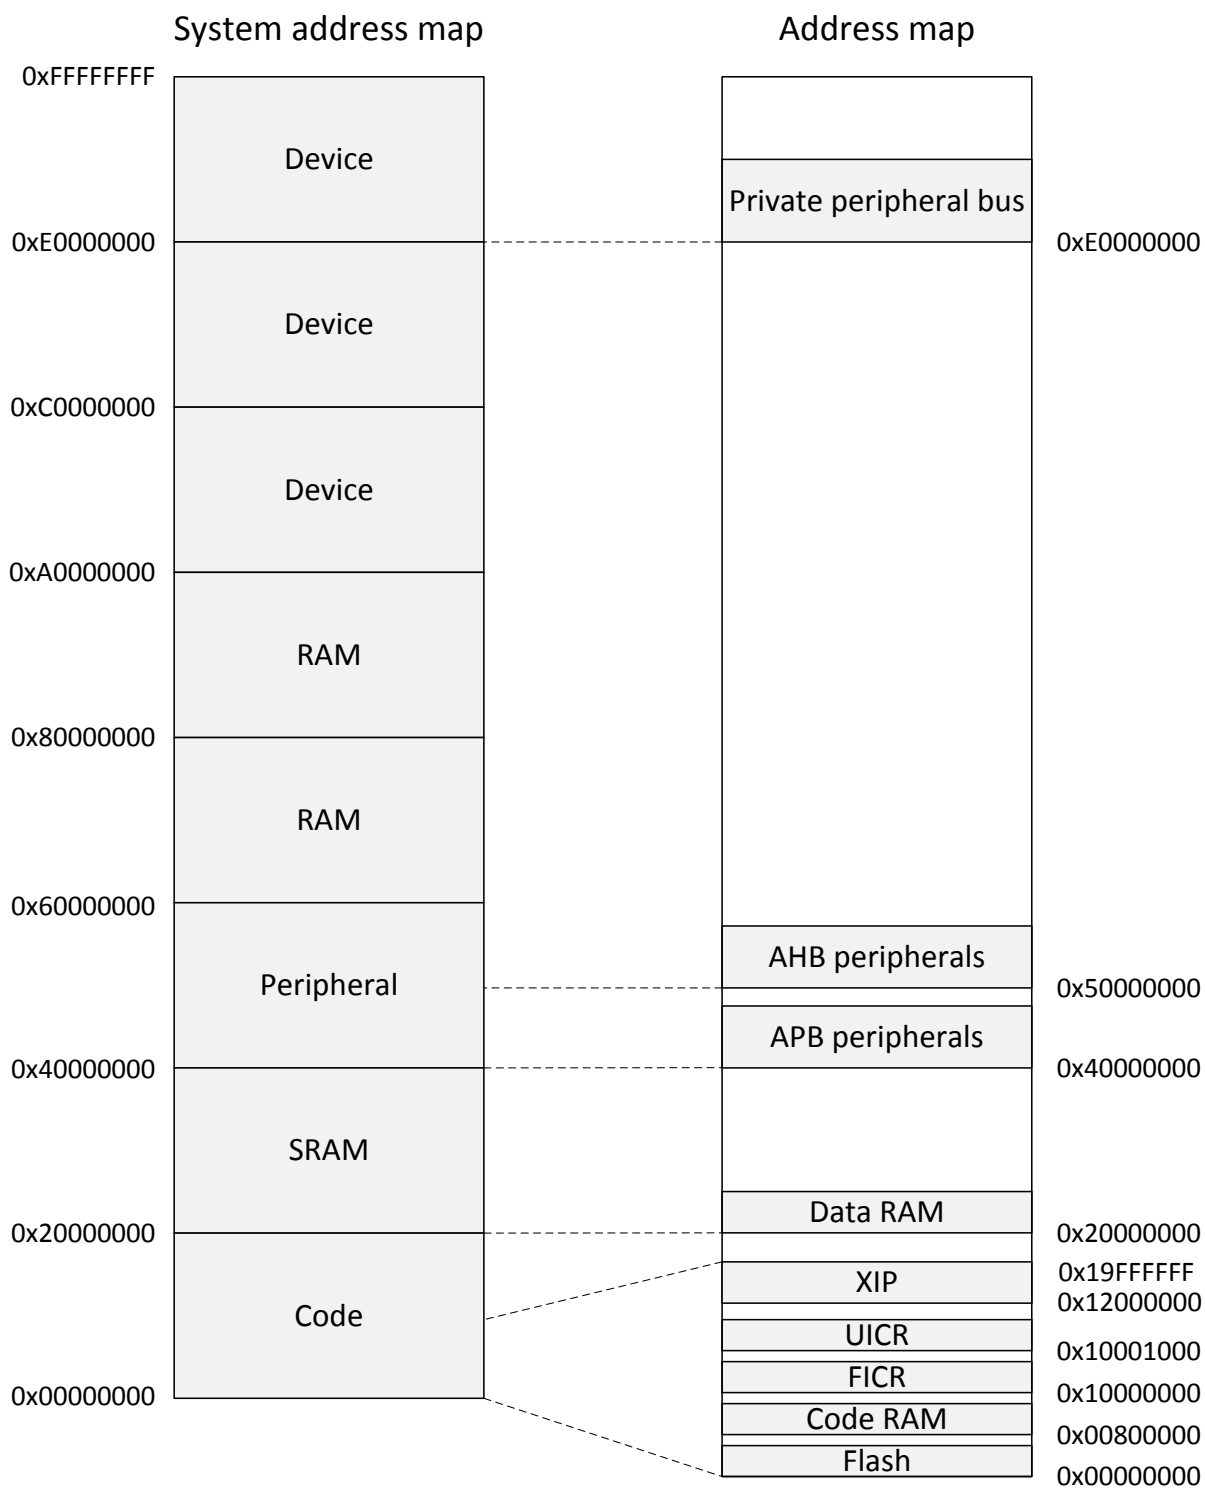

**Figure 4: Memory map**

## 8.4 Instantiation

**Table 5: Instantiation table**

ID	Base Address	Peripheral	Instance	Description
0	0x40000000	CLOCK	CLOCK	Clock control
0	0x40000000	POWER	POWER	Power control
1	0x40001000	RADIO	RADIO	2.4 GHz radio
2	0x40002000	UART	UART0	Universal asynchronous receiver/transmitter
2	0x40002000	UARTE	UARTE0	Universal asynchronous receiver/transmitter with EasyDMA, unit 0
3	0x40003000	TWIM	TWIM0	Two-wire interface master 0
3	0x40003000	TWIS	TWIS0	Two-wire interface slave 0
3	0x40003000	SPIS	SPIS0	SPI slave 0
3	0x40003000	SPI	SPI0	SPI master 0
3	0x40003000	SPIM	SPIM0	SPI master 0
3	0x40003000	TWI	TWI0	Two-wire interface master 0
4	0x40004000	TWI	TWI1	Two-wire interface master 1
4	0x40004000	SPIM	SPIM1	SPI master 1
4	0x40004000	SPI	SPI1	SPI master 1
4	0x40004000	TWIM	TWIM1	Two-wire interface master 1
4	0x40004000	TWIS	TWIS1	Two-wire interface slave 1
4	0x40004000	SPIS	SPIS1	SPI slave 1
5	0x40005000	NFCT	NFCT	Near field communication tag
6	0x40006000	GPOTE	GPOTE	GPIO tasks and events
7	0x40007000	SAADC	SAADC	Analog to digital converter
8	0x40008000	TIMER	TIMER0	Timer 0
9	0x40009000	TIMER	TIMER1	Timer 1
10	0x4000A000	TIMER	TIMER2	Timer 2
11	0x4000B000	RTC	RTC0	Real-time counter 0
12	0x4000C000	TEMP	TEMP	Temperature sensor
13	0x4000D000	RNG	RNG	Random number generator
14	0x4000E000	ECB	ECB	AES electronic code book (ECB) mode block encryption
15	0x4000F000	CCM	CCM	AES counter with CBC-MAC (CCM) mode block encryption
15	0x4000F000	AAR	AAR	Accelerated address resolver
16	0x40010000	WDT	WDT	Watchdog timer
17	0x40011000	RTC	RTC1	Real-time counter 1
18	0x40012000	QDEC	QDEC	Quadrature decoder
19	0x40013000	COMP	COMP	General purpose comparator
19	0x40013000	LPCOMP	LPCOMP	Low power comparator
20	0x40014000	SWI	SWI0	Software interrupt 0
20	0x40014000	EGU	EGU0	Event generator unit 0
21	0x40015000	EGU	EGU1	Event generator unit 1
21	0x40015000	SWI	SWI1	Software interrupt 1
22	0x40016000	SWI	SWI2	Software interrupt 2
22	0x40016000	EGU	EGU2	Event generator unit 2
23	0x40017000	EGU	EGU3	Event generator unit 3
23	0x40017000	SWI	SWI3	Software interrupt 3
24	0x40018000	EGU	EGU4	Event generator unit 4
24	0x40018000	SWI	SWI4	Software interrupt 4
25	0x40019000	EGU	EGU5	Event generator unit 5
25	0x40019000	SWI	SWI5	Software interrupt 5
26	0x4001A000	TIMER	TIMER3	Timer 3
27	0x4001B000	TIMER	TIMER4	Timer 4
28	0x4001C000	PWM	PWM0	Pulse width modulation unit 0
29	0x4001D000	PDM	PDM	Pulse Density modulation (digital microphone) interface
30	0x4001E000	ACL	ACL	Access control lists
30	0x4001E000	NVMC	NVMC	Non-volatile memory controller

ID	Base Address	Peripheral	Instance	Description
31	0x4001F000	PPI	PPI	Programmable peripheral interconnect
32	0x40020000	MWU	MWU	Memory watch unit
33	0x40021000	PWM	PWM1	Pulse width modulation unit 1
34	0x40022000	PWM	PWM2	Pulse width modulation unit 2
35	0x40023000	SPIS	SPIS2	SPI slave 2
35	0x40023000	SPIM	SPIM2	SPI master 2
35	0x40023000	SPI	SPI2	SPI master 2
36	0x40024000	RTC	RTC2	Real-time counter 2
37	0x40025000	I2S	I2S	Inter-IC sound interface
38	0x40026000	FPU	FPU	FPU interrupt
39	0x40027000	USBD	USBD	Universal serial bus device
40	0x40028000	UARTE	UARTE1	Universal asynchronous receiver/transmitter with EasyDMA, unit 1
41	0x40029000	QSPI	QSPI	External memory interface
43	0x4002B000	SPIM	SPIM3	SPI master 3
45	0x4002D000	PWM	PWM3	Pulse width modulation unit 3
0	0x50000000	GPIO	GPIO	General purpose input and output
0	0x50000000	GPIO	P0	General purpose input and output, port 0
0	0x50000300	GPIO	P1	General purpose input and output, port 1
42	0x5002A000	CRYPTOCELL	CRYPTOCELL	CryptoCell subsystem control interface
N/A	0x10000000	FICR	FICR	Factory information configuration
N/A	0x10001000	UICR	UICR	User information configuration



## 9 AHB multilayer

AHB multilayer enables parallel access paths between multiple masters and slaves in a system. Access is resolved using priorities.

Each bus master is connected to the slave devices using an interconnection matrix. The bus masters are assigned priorities. Priorities are used to resolve access when two (or more) bus masters request access to the same slave device. The following applies:

- If two (or more) bus masters request access to the same slave device, the master with the highest priority is granted the access first.
- Bus masters with lower priority are stalled until the higher priority master has completed its transaction.
- If the higher priority master pauses at any point during its transaction, the lower priority master in queue is temporarily granted access to the slave device until the higher priority master resumes its activity.
- Bus masters that have the same priority are mutually exclusive, thus cannot be used concurrently.

Below is a list of bus masters in the system and their priorities.

**Table 6: AHB bus masters (listed in priority order, highest to lowest)**

Bus master name	Description
CPU	
CTRL-AP	
USB	
CRYPTOCELL	
SPIM1/SPIS1/TWIM1/TWIS1	Same priority and mutually exclusive
RADIO	
CCM/ECB/AAR	Same priority and mutually exclusive
SAADC	
UARTE0	
SPIM0/SPIS0/TWIM0/TWIS0	Same priority and mutually exclusive
SPIM2/SPIS2	Same priority and mutually exclusive
NFCT	
I2S	
PDM	
PWM0	
PWM1	
PWM2	
QSPI	
PWM3	
UARTE1	


Defined bus masters are the CPU and the peripherals with implemented EasyDMA, and the available slaves are RAM AHB slaves. How the bus masters and slaves are connected using the interconnection matrix is illustrated in [Memory](#) on page 20.

## 10 EasyDMA

EasyDMA is an easy-to-use direct memory access module that some peripherals implement to gain direct access to Data RAM.

The EasyDMA is an AHB bus master similar to the CPU and it is connected to the AHB multilayer interconnect for direct access to the Data RAM. The EasyDMA is not able to access the flash.

A peripheral can implement multiple EasyDMA instances, for example to provide a dedicated channel for reading data from RAM into the peripheral at the same time as a second channel is dedicated for writing data to the RAM from the peripheral. This concept is illustrated in [Figure 5: EasyDMA example](#) on page 26

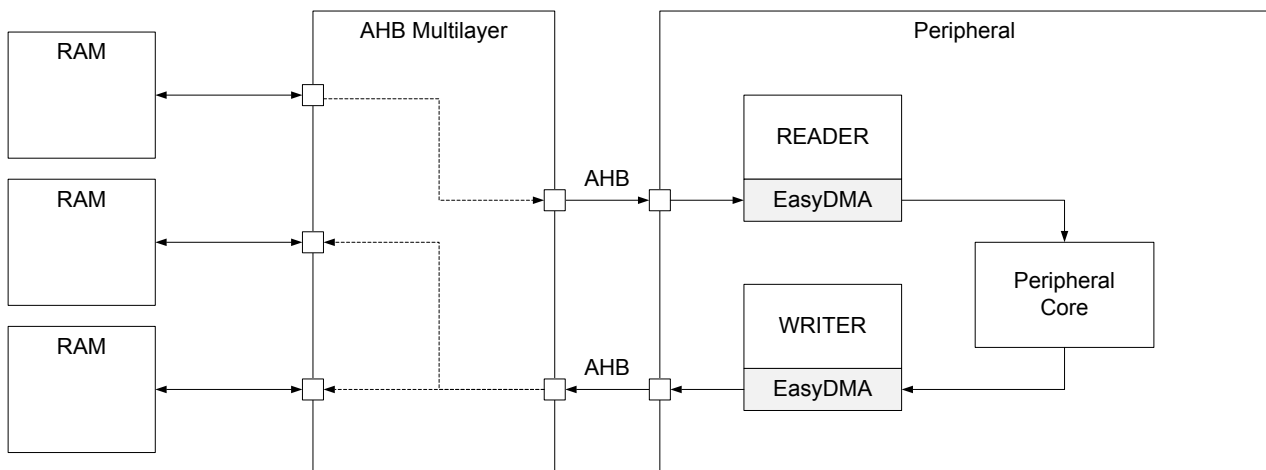

**Figure 5: EasyDMA example**

An EasyDMA channel is usually exposed to the user in the form illustrated below, but some variations may occur:

```

READERBUFFER_SIZE 5
WRITERBUFFER_SIZE 6

uint8_t readerBuffer[READERBUFFER_SIZE] __at__ 0x20000000;
uint8_t writerBuffer[WRITERBUFFER_SIZE] __at__ 0x20000005;

// Configuring the READER channel
MYPERIPHERAL->READER.MAXCNT = READERBUFFER_SIZE;
MYPERIPHERAL->READER.PTR = &readerBuffer;

// Configure the WRITER channel
MYPERIPHERAL->WRITER.MAXCNT = WRITERBUFFER_SIZE;
MYPERIPHERAL->WRITER.PTR = &writerBuffer;
  
```

This example shows a peripheral called MYPERIPHERAL that implements two EasyDMA channels, one for reading, called READER, and one for writing, called WRITER. When the peripheral is started, it is here assumed that the peripheral will read 5 bytes from the readerBuffer located in RAM at address 0x20000000, process the data and then write no more than 6 bytes back to the writerBuffer located in RAM at address 0x20000005. The memory layout of these buffers is illustrated in [Figure 6: EasyDMA memory layout](#) on page 27.

0x20000000	readerBuffer[0]	readerBuffer[1]	readerBuffer[2]	readerBuffer[3]
0x20000004	readerBuffer[4]	writerBuffer[0]	writerBuffer[1]	writerBuffer[2]
0x20000008	writerBuffer[3]	writerBuffer[4]	writerBuffer[5]	

**Figure 6: EasyDMA memory layout**

The EasyDMA channel's MAXCNT register cannot be specified larger than the actual size of the buffer. If, for example, the WRITER.MAXCNT register is specified larger than the size of the writerBuffer, the WRITER EasyDMA channel may overflow the writerBuffer.

After the peripheral has completed the EasyDMA transfer, the CPU can read the EasyDMA channel's AMOUNT register to see how many bytes that were transferred, e.g. it is possible for the CPU to read the MYPERIPHERAL->WRITER.AMOUNT register to see how many bytes the WRITER wrote to RAM.

## 10.1 EasyDMA array list

The EasyDMA is able to operate in a mode called array list.

The EasyDMA array list can be represented by the data structure ArrayList\_type illustrated in the code example below.

This data structure includes only a buffer with size equal to READER.MAXCNT. EasyDMA will use the READER.MAXCNT register to determine when the buffer is full.


This array list does not provide a mechanism to explicitly specify where the next item in the list is located. Instead, it assumes that the list is organized as a linear array where items are located one after the other in RAM.

```
#define BUFFER_SIZE 4

typedef struct ArrayList
{
    uint8_t buffer[BUFFER_SIZE];
} ArrayList_type;

ArrayList_type ReaderList[3];

READER.MAXCNT = BUFFER_SIZE;
READER.PTR = &ReaderList;
```

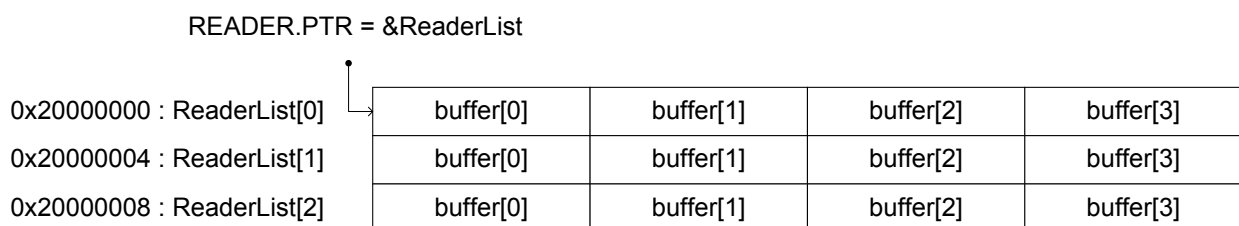

**Figure 7: EasyDMA array list**

## 11 NVMC — Non-volatile memory controller

The non-volatile memory controller (NVMC) is used for writing and erasing the internal flash memory and the UICR.

Before a write can be performed, the NVMC must be enabled for writing in CONFIG.WEN. Similarly, before an erase can be performed, the NVMC must be enabled for erasing in CONFIG.EEN, see [CONFIG](#) on page 30. The user must make sure that writing and erasing are not enabled at the same time. Failing to do so may result in unpredictable behavior.

### 11.1 Writing to flash

When writing is enabled, the flash is written by writing a full 32-bit word to a word-aligned address in the flash.

The NVMC is only able to write '0' to bits in the flash that are erased, that is, set to '1'. It cannot write back a bit to '1'.

As illustrated in [Memory](#) on page 20, the flash is divided into multiple pages that are further divided into multiple blocks. The same block in the flash can only be written  $n_{WRITE}$  number of times before an erase must be performed using [ERASEPAGE](#) or [ERASEALL](#). See the memory size and organization in [Memory](#) on page 20 for block size.

Only full 32-bit words can be written to flash using the NVMC interface. To write less than 32 bits to flash, write the data as a word, and set all the bits that should remain unchanged in the word to '1'. Note that the restriction about the number of writes (see above) still applies in this case.

The time it takes to write a word to the flash is specified by  $t_{WRITE}$ . The CPU is halted if the CPU executes code from the flash while the NVMC is writing to the flash.

Only word-aligned writes are allowed. Byte or half-word-aligned writes will result in a hard fault.

### 11.2 Erasing a page in flash

When erase is enabled, the flash can be erased page by page using the [ERASEPAGE](#) register.

After erasing a flash page, all bits in the page are set to '1'. The time it takes to erase a page is specified by  $t_{ERASEPAGE}$ . The CPU is halted if the CPU executes code from the flash while the NVMC performs the erase operation.

### 11.3 Writing to user information configuration registers (UICR)

User information configuration registers (UICR) are written in the same way as flash. After UICR has been written, the new UICR configuration will only take effect after a reset.

UICR can only be written  $n_{WRITE}$  number of times before an erase must be performed using [ERASEUICR](#) or [ERASEALL](#).

The time it takes to write a word to the UICR is specified by  $t_{WRITE}$ . The CPU is halted if the CPU executes code from the flash while the NVMC is writing to the UICR.

### 11.4 Erasing user information configuration registers (UICR)

When erase is enabled, UICR can be erased using the [ERASEUICR](#) register.

After erasing UICR all bits in UICR are set to '1'. The time it takes to erase UICR is specified by  $t_{ERASEPAGE}$ . The CPU is halted if the CPU executes code from the flash while the NVMC performs the erase operation.

## 11.5 Erase all

When erase is enabled, the whole flash and UICR can be erased in one operation by using the ERASEALL register. ERASEALL will not erase the factory information configuration registers (FICR).

The time it takes to perform an ERASEALL command is specified by  $t_{ERASEALL}$ . The CPU is halted if the CPU executes code from the flash while the NVMC performs the erase operation.

## 11.6 Cache

An instruction cache (I-Cache) can be enabled for the ICODE bus in the NVMC.

See the Memory map in [Memory map](#) on page 21 for the location of flash.

A cache hit is an instruction fetch from the cache, and it has a 0 wait-state delay. The number of wait-states for a cache miss, where the instruction is not available in the cache and needs to be fetched from flash, depends on the processor frequency and is shown in [CPU](#) on page 18.

Enabling the cache can increase CPU performance and reduce power consumption by reducing the number of wait cycles and the number of flash accesses. This will depend on the cache hit rate. Cache will use some current when enabled. If the reduction in average current due to reduced flash accesses is larger than the cache power requirement, the average current to execute the program code will reduce.

When disabled, the cache does not use current and does not retain its content.

It is possible to enable cache profiling to analyze the performance of the cache for your program using the [ICACHECNF](#) register. When profiling is enabled, the [IHIT](#) and [IMISS](#) registers are incremented for every instruction cache hit or miss respectively. The hit and miss profiling registers do not wrap around after reaching the maximum value. If the maximum value is reached, consider profiling for a shorter duration to get correct numbers.

## 11.7 Registers

**Table 7: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001E000	NVMC	NVMC	Non-volatile memory controller	

**Table 8: Register Overview**

Register	Offset	Description
<a href="#">READY</a>	0x400	Ready flag
<a href="#">CONFIG</a>	0x504	Configuration register
<a href="#">ERASEPAGE</a>	0x508	Register for erasing a page in code area
<a href="#">ERASEPCR1</a>	0x508	Register for erasing a page in code area. Equivalent to ERASEPAGE. <span>Deprecated</span>
<a href="#">ERASEALL</a>	0x50C	Register for erasing all non-volatile user memory
<a href="#">ERASEPCRO</a>	0x510	Register for erasing a page in code area. Equivalent to ERASEPAGE. <span>Deprecated</span>
<a href="#">ERASEUICR</a>	0x514	Register for erasing user information configuration registers
<a href="#">ICACHECNF</a>	0x540	I-code cache configuration register.
<a href="#">IHIT</a>	0x548	I-code cache hit counter.
<a href="#">IMISS</a>	0x54C	I-code cache miss counter.

### 11.7.1 READY

Address offset: 0x400

Ready flag

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																														
A	R	READY					NVMC is ready or busy																														
			Busy		0		NVMC is busy (on-going write or erase operation)																														
			Ready		1		NVMC is ready																														

## 11.7.2 CONFIG

Address offset: 0x504

## Configuration register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			A	A		
Reset 0x00000000				0																																		
Id	RW	Field	Value Id	Value		Description																																
A	RW	WEN				Program memory access mode. It is strongly recommended to only activate erase and write modes when they are actively used. Enabling write or erase will invalidate the cache and keep it invalidated.																																
			Ren	0		Read only access																																
			Wen	1		Write enabled																																
			Een	2		Erase enabled																																

### 11.7.3 ERASEPAGE

Address offset: 0x508

## Register for erasing a page in code area

[illegible]

#### 11.7.4 ERASEPCR1 ( Deprecated )

Address offset: 0x508

Register for erasing a page in code area. Equivalent to ERASEPAGE.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value														Description																
A	RW	ERASEPCR1																	Register for erasing a page in code area. Equivalent to ERASEPAGE.																

### 11.7.5 ERASEALL

Address offset: 0x50C

## Register for erasing all non-volatile user memory

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ERASEALL				Erase all non-volatile memory including UICR registers. Note that the erase must be enabled using CONFIG.WEN before the non-volatile memory can be erased.																													
			NoOperation	0		No operation																													
			Erase	1		Start chip erase																													

### 11.7.6 ERASEPCR0 ( Deprecated )

Address offset: 0x510

Register for erasing a page in code area. Equivalent to ERASEPAGE.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	ERASEPCR0					Register for starting erase of a page in code area. Equivalent to ERASEPAGE.																													

### 11.7.7 ERASEUICR

Address offset: 0x514

Register for erasing user information configuration registers

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ERASEUICR				Register starting erase of all user information configuration registers. Note that the erase must be enabled using CONFIG.WEN before the UICR can be erased.																													
			NoOperation	0		No operation																													
			Erase	1		Start erase of UICR																													

### 11.7.8 ICACHECNF

Address offset: 0x540

I-code cache configuration register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																												B				A			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	CACHEEN			Cache enable																														
			Disabled	0	Disable cache. Invalidates all cache entries.																														
			Enabled	1	Enable cache																														
B	RW	CACHEPROFEN			Cache profiling enable																														
			Disabled	0	Disable cache profiling																														
			Enabled	1	Enable cache profiling																														

### 11.7.9 IHIT

Address offset: 0x548

I-code cache hit counter.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																													
A	RW	HITS						Number of cache hits																													

### 11.7.10 IMISS

Address offset: 0x54C

I-code cache miss counter.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	MISSES						Number of cache misses																												

## 11.8 Electrical specification

### 11.8.1 Flash programming

Symbol	Description	Min.	Typ.	Max.	Units
$\Omega_{WRITE,BLOCK}$	Amount of writes allowed in a block between erase			403	
$\Omega_{WRITE}$	Number of times an address can be written between erase <sup>1</sup>			2	
$t_{WRITE}$	Time to write one 32-bit word			41 <sup>2</sup>	$\mu$ s
$t_{ERASEPAGE}$	Time to erase one page			85 <sup>3</sup>	ms
$t_{ERASEALL}$	Time to erase all flash			169 <sup>4</sup>	ms
$I_{write}$	Flash write current			5	mA
$I_{erasepage}$	Flash erase page current			5	mA
$I_{eraseall}$	Flash erase all current			5	mA

### 11.8.2 Cache size

Symbol	Description	Min.	Typ.	Max.	Units
Size <sub>ICODE</sub>	I-Code cache size		2048		Bytes

<sup>1</sup> The page must be erased when either of  $\Omega_{WRITE,BLOCK}$  or  $\Omega_{WRITE}$  is not satisfied

<sup>2</sup> HF<sub>FXO</sub> is used here, this may vary upto +/-5% when HF<sub>INT</sub> is used

<sup>3</sup> HF<sub>FXO</sub> is used here, this may vary upto +/-5% when HF<sub>INT</sub> is used

<sup>4</sup> HF<sub>FXO</sub> is used here, this may vary upto +/-5% when HF<sub>INT</sub> is used



# 12 FICR — Factory information configuration registers

Factory information configuration registers (FICR) are pre-programmed in factory and cannot be erased by the user. These registers contain chip-specific information and configuration.

## 12.1 Registers

**Table 9: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x10000000	FICR	FICR	Factory information configuration	

**Table 10: Register Overview**

Register	Offset	Description
<a href="#">CODEPAGESIZE</a>	0x010	Code memory page size
<a href="#">CODESIZE</a>	0x014	Code memory size
<a href="#">DEVICEID[0]</a>	0x060	Device identifier
<a href="#">DEVICEID[1]</a>	0x064	Device identifier
<a href="#">ER[0]</a>	0x080	Encryption root, word 0
<a href="#">ER[1]</a>	0x084	Encryption root, word 1
<a href="#">ER[2]</a>	0x088	Encryption root, word 2
<a href="#">ER[3]</a>	0x08C	Encryption root, word 3
<a href="#">IR[0]</a>	0x090	Identity Root, word 0
<a href="#">IR[1]</a>	0x094	Identity Root, word 1
<a href="#">IR[2]</a>	0x098	Identity Root, word 2
<a href="#">IR[3]</a>	0x09C	Identity Root, word 3
<a href="#">DEVICEADDRTYPE</a>	0x0A0	Device address type
<a href="#">DEVICEADDR[0]</a>	0x0A4	Device address 0
<a href="#">DEVICEADDR[1]</a>	0x0A8	Device address 1
<a href="#">INFO.PART</a>	0x100	Part code
<a href="#">INFO.VARIANT</a>	0x104	Part variant (hardware version and production configuration)
<a href="#">INFO.PACKAGE</a>	0x108	Package option
<a href="#">INFO.RAM</a>	0x10C	RAM variant
<a href="#">INFO.FLASH</a>	0x110	Flash variant
	0x114	Reserved
	0x118	Reserved
	0x11C	Reserved
<a href="#">TEMP.A0</a>	0x404	Slope definition A0
<a href="#">TEMP.A1</a>	0x408	Slope definition A1
<a href="#">TEMP.A2</a>	0x40C	Slope definition A2
<a href="#">TEMP.A3</a>	0x410	Slope definition A3
<a href="#">TEMP.A4</a>	0x414	Slope definition A4
<a href="#">TEMP.A5</a>	0x418	Slope definition A5
<a href="#">TEMP.B0</a>	0x41C	Y-intercept B0
<a href="#">TEMP.B1</a>	0x420	Y-intercept B1
<a href="#">TEMP.B2</a>	0x424	Y-intercept B2
<a href="#">TEMP.B3</a>	0x428	Y-intercept B3
<a href="#">TEMP.B4</a>	0x42C	Y-intercept B4
<a href="#">TEMP.B5</a>	0x430	Y-intercept B5
<a href="#">TEMP.T0</a>	0x434	Segment end T0
<a href="#">TEMP.T1</a>	0x438	Segment end T1
<a href="#">TEMP.T2</a>	0x43C	Segment end T2
<a href="#">TEMP.T3</a>	0x440	Segment end T3
<a href="#">TEMP.T4</a>	0x444	Segment end T4

Register	Offset	Description
<a href="#">NFC.TAGHEADER0</a>	0x450	Default header for NFC tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER1</a>	0x454	Default header for NFC tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER2</a>	0x458	Default header for NFC tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.
<a href="#">NFC.TAGHEADER3</a>	0x45C	Default header for NFC tag. Software can read these values to populate NFCID1_3RD_LAST, NFCID1_2ND_LAST and NFCID1_LAST.

### 12.1.1 CODEPAGESIZE

Address offset: 0x010

Code memory page size

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	R	CODEPAGESIZE							Code memory page size																										

### 12.1.2 CODESIZE

Address offset: 0x014

Code memory size

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value					Description																										
A	R	CODESIZE								Code memory size in number of pages																										
										Total code space is: CODEPAGESIZE * CODESIZE																										

### 12.1.3 DEVICEID[0]

Address offset: 0x060

Device identifier

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value			Description																												
A	R	DEVICEID						64 bit unique device identifier																												
					DEVICEID[0] contains the least significant bits of the device identifier. DEVICEID[1] contains the most significant bits of the device identifier.																															

### 12.1.4 DEVICEID[1]

Address offset: 0x064

Device identifier

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	R	DEVICEID							64 bit unique device identifier																										

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value	Id	Value	Description																																	
						DEVICEID[0] contains the least significant bits of the device identifier. DEVICEID[1] contains the most significant bits of the device identifier.																																	

### 12.1.5 ER[0]

Address offset: 0x080

Encryption root, word 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value										Description																					
A	R	ER													Encryption root, word 0																					

### 12.1.6 ER[1]

Address offset: 0x084

Encryption root, word 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value										Description																					
A	R	ER													Encryption root, word 1																					

### 12.1.7 ER[2]

Address offset: 0x088

Encryption root, word 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value			Id	Value			Description																										
A	R	ER								Encryption root, word 2																										

### 12.1.8 ER[3]

Address offset: 0x08C

Encryption root, word 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	ER						Encryption root, word 3																												

### 12.1.9 IR[0]

Address offset: 0x090

Identity Root, word 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word 0																												

### 12.1.10 IR[1]

Address offset: 0x094

Identity Root, word 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word 1																												

### 12.1.11 IR[2]

Address offset: 0x098

Identity Root, word 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word 2																												

### 12.1.12 IR[3]

Address offset: 0x09C

Identity Root, word 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	R	IR						Identity Root, word 3																												

### 12.1.13 DEVICEADDRTYPE

Address offset: 0x0A0

Device address type

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																					A				
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1					
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>																								<b>Description</b>												
A	R	DEVICEADDRTYPE																											Device address type												
			Public		0																								Public address												
			Random		1																								Random address												

### 12.1.14 DEVICEADDR[0]

Address offset: 0x0A4

Device address 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Id	RW	Field	Value Id	Value	Description
A	R	DEVICEADDR			48 bit device address
					DEVICEADDR[0] contains the least significant bits of the device address. DEVICEADDR[1] contains the most significant bits of the device address. Only bits [15:0] of DEVICEADDR[1] are used.

## 12.1.15 DEVICEADDR[1]

Address offset: 0x0A8

Device address 1

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Id	RW	Field	Value Id	Value	Description
A	R	DEVICEADDR			48 bit device address
					DEVICEADDR[0] contains the least significant bits of the device address. DEVICEADDR[1] contains the most significant bits of the device address. Only bits [15:0] of DEVICEADDR[1] are used.

## 12.1.16 INFO.PART

Address offset: 0x100

Part code

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00052840	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	0	1	0	0	0	0	1	0	0	0	0	0	0

Id	RW	Field	Value Id	Value	Description
A	R	PART			Part code
			N52840	0x52840	nRF52840
			Unspecified	0xFFFFFFFF	Unspecified

## 12.1.17 INFO.VARIANT

Address offset: 0x104

Part variant (hardware version and production configuration)

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0xFFFFFFFF	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

Id	RW	Field	Value Id	Value	Description
A	R	VARIANT			Part variant (hardware version and production configuration).
					Encoded as ASCII.
			AAAA	0x41414141	AAAA
			AAAB	0x41414142	AAAB
			AABA	0x41414241	AABA
			AABB	0x41414242	AABB
			AAB0	0x41414230	AAB0
			ABBA	0x41424241	ABBA
			Unspecified	0xFFFFFFFF	Unspecified

## 12.1.18 INFO.PACKAGE

Address offset: 0x108

Package option

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	R	PACKAGE						Package option																											
			QI	0x2004				Qlxx - 73-pin aQFN																											
			Unspecified	0xFFFFFFFF				Unspecified																											

### 12.1.19 INFO.RAM

Address offset: 0x10C

RAM variant

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value		Description																																
A	R	RAM				RAM variant																																
			K16	0x10		16 kByte RAM																																
			K32	0x20		32 kByte RAM																																
			K64	0x40		64 kByte RAM																																
			K128	0x80		128 kByte RAM																																
			K256	0x100		256 kByte RAM																																
			Unspecified	0xFFFFFFFF		Unspecified																																

### 12.1.20 INFO.FLASH

Address offset: 0x110

Flash variant

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	R	FLASH						Flash variant																											
			K128	0x80				128 kByte FLASH																											
			K256	0x100				256 kByte FLASH																											
			K512	0x200				512 kByte FLASH																											
			K1024	0x400				1 MByte FLASH																											
			K2048	0x800				2 MByte FLASH																											
			Unspecified	0xFFFFFFFF				Unspecified																											

### 12.1.21 TEMP.A0

Address offset: 0x404

### Slope definition A0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF320				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	0	0	1	0	0	0	0	0							
Id	RW	Field	Value	Id	Value																Description																						
A	R	A																			A (slope definition) register.																						

### 12.1.22 TEMP.A1

Address offset: 0x408

### Slope definition A1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																								A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFF343				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	0	1	0	0	0	0	1	1			
Id	RW	Field	Value	Id	Value	Description																																
A	R	A				A (slope definition) register.																																

A (slope definition) register.

## 12.1.23 TEMP.A2

Address offset: 0x40C

Slope definition A2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																									A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFF35D				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	0	1	0	1	1	1	0	1			
Id	RW	Field	Value	Id	Value	Description																																
A	R	A				A (slope definition) register.																																

A (slope definition) register.

## 12.1.24 TEMP.A3

Address offset: 0x410

Slope definition A3

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

A (slope definition) register.

## 12.1.25 TEMP.A4

Address offset: 0x414

Slope definition A4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF452					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	0	0	1	0	1	0	0	1	0
Id	RW	Field		Value	Id	Value					Description																									
A	R	A									A (slope definition) register.																									

A (slope definition) register.

## 12.1.26 TEMP.A5

Address offset: 0x418

Slope definition A5

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																									A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0xFFFFF37B					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	0	1	1	1	1	0	1	1
Id	RW	Field		Value	Id	Value		Description																													
A	R	A						A (slope definition) register.																													

A (slope definition) register.

## 12.1.27 TEMP.B0

Address offset: 0x41C

Y-intercept B0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF3FCC					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	1	1	1	1	1	1	1	0	0	1	1	0	0					
Id	RW	Field	Value Id		Value		Description																																		
A	R	B					B (y-intercept)																																		

## 12.1.28 TEMP.B1

Address offset: 0x420

Y-intercept B1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF3F98					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	1	1	1	1	1	0	0	1	1	0	0	0	0				
Id	RW	Field	Value Id		Value		Description																																		
A	R	B					B (y-intercept)																																		

## 12.1.29 TEMP.B2

Address offset: 0x424

Y-intercept B2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF3F98					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	1	1	1	1	1	0	0	1	1	0	0	0	0			
Id	RW	Field	Value Id		Value		Description																																	
A	R	B					B (y-intercept)																																	

## 12.1.30 TEMP.B3

Address offset: 0x428

Y-intercept B3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF0012					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0			
Id	RW	Field	Value Id		Value		Description																																	
A	R	B					B (y-intercept)																																	

## 12.1.31 TEMP.B4

Address offset: 0x42C

Y-intercept B4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF004D					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1	0	1			
Id	RW	Field	Value Id		Value		Description																																	
A	R	B					B (y-intercept)																																	

## 12.1.32 TEMP.B5

Address offset: 0x430

Y-intercept B5



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFF3E10				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	1	1	1	1	1	0	0	0	0	1	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	B				B (y-intercept)																													

### 12.1.33 TEMP.T0

Address offset: 0x434

Segment end T0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A	A	A	A	A	A	A	A			
Reset 0xFFFFFE2				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	1	0		
Id	RW	Field	Value	Id	Value	Description																																
A	R	T				T (segment end) register																																

### 12.1.34 TEMP.T1

Address offset: 0x438

Segment end T1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A	A
Reset 0xFFFFF00					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	R	T						T (segment end) register																												

### 12.1.35 TEMP.T2

Address offset: 0x43C

Segment end T2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A	A
Reset 0xFFFFF14					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	1	0	1	0	0
Id	RW	Field		Value	Id	Value		Description																												
A	R	T				T (segment end) register																														

### 12.1.36 TEMP.T3

Address offset: 0x440

Segment end T3

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A A A A A A A																														
Reset 0xFFFFF19				1 1																														
Id	RW	Field	Value	Id	Value	Description																												
A	R	T				T (segment end) register																												

### 12.1.37 TEMP.T4

Address offset: 0x444

Segment end T4

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFF50				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	0	0	0	0											
Id	RW	Field	Value	Id	Value	Description																																									
A	R	T			T (segment end) register																																										

### 12.1.38 NFC.TAGHEADER0

Address offset: 0x450

Default header for NFC tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A
Reset 0xFFFFF5F				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	1	0	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	R	MFGID			Default Manufacturer ID: Nordic Semiconductor ASA has ICM 0x5F																														
B	R	UD1			Unique identifier byte 1																														
C	R	UD2			Unique identifier byte 2																														
D	R	UD3			Unique identifier byte 3																														

### 12.1.39 NFC.TAGHEADER1

Address offset: 0x454

Default header for NFC tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value												Description																			
A	R	UD4														Unique identifier byte 4																			
B	R	UD5														Unique identifier byte 5																			
C	R	UD6														Unique identifier byte 6																			
D	R	UD7														Unique identifier byte 7																			

### 12.1.40 NFC.TAGHEADER2

Address offset: 0x458

Default header for NFC tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value												Description																			
A	R	UD8														Unique identifier byte 8																			
B	R	UD9														Unique identifier byte 9																			
C	R	UD10														Unique identifier byte 10																			
D	R	UD11														Unique identifier byte 11																			

### 12.1.41 NFC.TAGHEADER3

Address offset: 0x45C

Default header for NFC tag. Software can read these values to populate NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST.

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																													
Id	D D D D D D D D C C C C C C C B B B B B B B A A A A A A A A																													
Reset 0xFFFFFFFF	1 1																													
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																									
A	R	UD12			Unique identifier byte 12																									
B	R	UD13			Unique identifier byte 13																									
C	R	UD14			Unique identifier byte 14																									
D	R	UD15			Unique identifier byte 15																									

## 13 UICR — User information configuration registers

The user information configuration registers (UICRs) are non-volatile memory (NVM) registers for configuring user-specific settings.

For information on writing UICR registers, see the [NVMC — Non-volatile memory controller](#) on page 28 and [Memory](#) on page 20 chapters.

### 13.1 Registers

**Table 11: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x10001000	UICR	UICR	User information configuration	

**Table 12: Register Overview**

Register	Offset	Description
	0x000	Reserved
	0x004	Reserved
	0x008	Reserved
	0x010	Reserved
<a href="#">NRFFW[0]</a>	0x014	Reserved for Nordic firmware design
<a href="#">NRFFW[1]</a>	0x018	Reserved for Nordic firmware design
<a href="#">NRFFW[2]</a>	0x01C	Reserved for Nordic firmware design
<a href="#">NRFFW[3]</a>	0x020	Reserved for Nordic firmware design
<a href="#">NRFFW[4]</a>	0x024	Reserved for Nordic firmware design
<a href="#">NRFFW[5]</a>	0x028	Reserved for Nordic firmware design
<a href="#">NRFFW[6]</a>	0x02C	Reserved for Nordic firmware design
<a href="#">NRFFW[7]</a>	0x030	Reserved for Nordic firmware design
<a href="#">NRFFW[8]</a>	0x034	Reserved for Nordic firmware design
<a href="#">NRFFW[9]</a>	0x038	Reserved for Nordic firmware design
<a href="#">NRFFW[10]</a>	0x03C	Reserved for Nordic firmware design
<a href="#">NRFFW[11]</a>	0x040	Reserved for Nordic firmware design
<a href="#">NRFFW[12]</a>	0x044	Reserved for Nordic firmware design
<a href="#">NRFFW[13]</a>	0x048	Reserved for Nordic firmware design
<a href="#">NRFFW[14]</a>	0x04C	Reserved for Nordic firmware design
<a href="#">NRFHW[0]</a>	0x050	Reserved for Nordic hardware design
<a href="#">NRFHW[1]</a>	0x054	Reserved for Nordic hardware design
<a href="#">NRFHW[2]</a>	0x058	Reserved for Nordic hardware design
<a href="#">NRFHW[3]</a>	0x05C	Reserved for Nordic hardware design
<a href="#">NRFHW[4]</a>	0x060	Reserved for Nordic hardware design
<a href="#">NRFHW[5]</a>	0x064	Reserved for Nordic hardware design
<a href="#">NRFHW[6]</a>	0x068	Reserved for Nordic hardware design
<a href="#">NRFHW[7]</a>	0x06C	Reserved for Nordic hardware design
<a href="#">NRFHW[8]</a>	0x070	Reserved for Nordic hardware design
<a href="#">NRFHW[9]</a>	0x074	Reserved for Nordic hardware design
<a href="#">NRFHW[10]</a>	0x078	Reserved for Nordic hardware design
<a href="#">NRFHW[11]</a>	0x07C	Reserved for Nordic hardware design
<a href="#">CUSTOMER[0]</a>	0x080	Reserved for customer
<a href="#">CUSTOMER[1]</a>	0x084	Reserved for customer
<a href="#">CUSTOMER[2]</a>	0x088	Reserved for customer
<a href="#">CUSTOMER[3]</a>	0x08C	Reserved for customer
<a href="#">CUSTOMER[4]</a>	0x090	Reserved for customer
<a href="#">CUSTOMER[5]</a>	0x094	Reserved for customer
<a href="#">CUSTOMER[6]</a>	0x098	Reserved for customer

Register	Offset	Description
<i>CUSTOMER[7]</i>	0x09C	Reserved for customer
<i>CUSTOMER[8]</i>	0x0A0	Reserved for customer
<i>CUSTOMER[9]</i>	0x0A4	Reserved for customer
<i>CUSTOMER[10]</i>	0x0A8	Reserved for customer
<i>CUSTOMER[11]</i>	0x0AC	Reserved for customer
<i>CUSTOMER[12]</i>	0x0B0	Reserved for customer
<i>CUSTOMER[13]</i>	0x0B4	Reserved for customer
<i>CUSTOMER[14]</i>	0x0B8	Reserved for customer
<i>CUSTOMER[15]</i>	0x0BC	Reserved for customer
<i>CUSTOMER[16]</i>	0x0C0	Reserved for customer
<i>CUSTOMER[17]</i>	0x0C4	Reserved for customer
<i>CUSTOMER[18]</i>	0x0C8	Reserved for customer
<i>CUSTOMER[19]</i>	0x0CC	Reserved for customer
<i>CUSTOMER[20]</i>	0x0D0	Reserved for customer
<i>CUSTOMER[21]</i>	0x0D4	Reserved for customer
<i>CUSTOMER[22]</i>	0x0D8	Reserved for customer
<i>CUSTOMER[23]</i>	0x0DC	Reserved for customer
<i>CUSTOMER[24]</i>	0x0E0	Reserved for customer
<i>CUSTOMER[25]</i>	0x0E4	Reserved for customer
<i>CUSTOMER[26]</i>	0x0E8	Reserved for customer
<i>CUSTOMER[27]</i>	0x0EC	Reserved for customer
<i>CUSTOMER[28]</i>	0x0F0	Reserved for customer
<i>CUSTOMER[29]</i>	0x0F4	Reserved for customer
<i>CUSTOMER[30]</i>	0x0F8	Reserved for customer
<i>CUSTOMER[31]</i>	0x0FC	Reserved for customer
<i>PSELRESET[0]</i>	0x200	Mapping of the nRESET function
<i>PSELRESET[1]</i>	0x204	Mapping of the nRESET function
<i>APPROTECT</i>	0x208	Access port protection
<i>NFCPINS</i>	0x20C	Setting of pins dedicated to NFC functionality: NFC antenna or GPIO
<i>EXTSUPPLY</i>	0x300	Enable external circuitry to be supplied from VDD pin. Applicable in high voltage mode only.
<i>REGOUT0</i>	0x304	GPIO reference voltage / external output supply voltage in high voltage mode

### 13.1.1 NRFFW[0]

Address offset: 0x014

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value				Description																										
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 13.1.2 NRFFW[1]

Address offset: 0x018

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	RW	NRFFW													Reserved for Nordic firmware design																					

### 13.1.3 NRFFW[2]

Address offset: 0x01C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 13.1.4 NRFFW[3]

Address offset: 0x020

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFFW								Reserved for Nordic firmware design																										

### 13.1.5 NRFFW[4]

Address offset: 0x024

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	NRFFW														Reserved for Nordic firmware design																				

### 13.1.6 NRFFW[5]

Address offset: 0x028

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	NRFFW														Reserved for Nordic firmware design																				

### 13.1.7 NRFFW[6]

Address offset: 0x02C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 13.1.8 NRFFW[7]

Address offset: 0x030

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFFW								Reserved for Nordic firmware design																										

### 13.1.9 NRFFW[8]

Address offset: 0x034

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

### 13.1.10 NRFFW[9]

Address offset: 0x038

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

### 13.1.11 NRFFW[10]

Address offset: 0x03C

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

### 13.1.12 NRFFW[11]

Address offset: 0x040

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

### 13.1.13 NRFFW[12]

Address offset: 0x044

Reserved for Nordic firmware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFFW							Reserved for Nordic firmware design																										

### 13.1.14 NRFFW[13]

Address offset: 0x048

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFFW						Reserved for Nordic firmware design																												

### 13.1.15 NRFFW[14]

Address offset: 0x04C

Reserved for Nordic firmware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFFW								Reserved for Nordic firmware design																										

### 13.1.16 NRFHW[0]

Address offset: 0x050

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																													
A	RW	NRFHW					Reserved for Nordic hardware design																													

### 13.1.17 NRFHW[1]

Address offset: 0x054

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value		Id	Value		Description																												
A	RW	NRFHW						Reserved for Nordic hardware design																												

### 13.1.18 NRFHW[2]

Address offset: 0x058

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFHW				Reserved for Nordic hardware design																														

### 13.1.19 NRFHW[3]

Address offset: 0x05C

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	RW	NRFHW													Reserved for Nordic hardware design																					



### 13.1.20 NRFHW[4]

Address offset: 0x060

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value				Description																										
A	RW	NRFHW							Reserved for Nordic hardware design																										

### 13.1.21 NRFHW[5]

Address offset: 0x064

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value										Description																				
A	RW	NRFHW													Reserved for Nordic hardware design																				

### 13.1.22 NRFHW[6]

Address offset: 0x068

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id				Value				Description																								
A	RW	NRFHW										Reserved for Nordic hardware design																								

### 13.1.23 NRFHW[7]

Address offset: 0x06C

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value										Description																				
A	RW	NRFHW													Reserved for Nordic hardware design																				

### 13.1.24 NRFHW[8]

Address offset: 0x070

Reserved for Nordic hardware design

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id				Value				Description																							
A	RW	NRFHW										Reserved for Nordic hardware design																							

### 13.1.25 NRFHW[9]

Address offset: 0x074

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	NRFHW				Reserved for Nordic hardware design																																	

### 13.1.26 NRFHW[10]

Address offset: 0x078

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value				Description																										
A	RW	NRFHW								Reserved for Nordic hardware design																										

### 13.1.27 NRFHW[11]

Address offset: 0x07C

Reserved for Nordic hardware design

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																													
A	RW	NRFHW					Reserved for Nordic hardware design																													

### 13.1.28 CUSTOMER[0]

Address offset: 0x080

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 13.1.29 CUSTOMER[1]

Address offset: 0x084

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	RW	CUSTOMER									Reserved for customer																									

### 13.1.30 CUSTOMER[2]

Address offset: 0x088

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value Id</b>	<b>Value</b>													<b>Description</b>																	
A	RW	CUSTOMER																Reserved for customer																	

### 13.1.31 CUSTOMER[3]

Address offset: 0x08C

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value				Description																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.32 CUSTOMER[4]

Address offset: 0x090

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.33 CUSTOMER[5]

Address offset: 0x094

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>													<b>Description</b>																	
A	RW	CUSTOMER																Reserved for customer																	

### 13.1.34 CUSTOMER[6]

Address offset: 0x098

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	CUSTOMER							Reserved for customer																										

### 13.1.35 CUSTOMER[7]

Address offset: 0x09C

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.36 CUSTOMER[8]

Address offset: 0x0A0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.37 CUSTOMER[9]

Address offset: 0x0A4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.38 CUSTOMER[10]

Address offset: 0x0A8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	RW	CUSTOMER									Reserved for customer																									

### 13.1.39 CUSTOMER[11]

Address offset: 0x0AC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value					Description																										
A	RW	CUSTOMER								Reserved for customer																										

### 13.1.40 CUSTOMER[12]

Address offset: 0x0B0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value					Description																									
A	RW	CUSTOMER									Reserved for customer																									

### 13.1.41 CUSTOMER[13]

Address offset: 0x0B4

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CUSTOMER				Reserved for customer																													

### 13.1.42 CUSTOMER[14]

Address offset: 0x0B8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value			Description																												
A	RW	CUSTOMER						Reserved for customer																												

### 13.1.43 CUSTOMER[15]

Address offset: 0x0BC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value				Description																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.44 CUSTOMER[16]

Address offset: 0x0C0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.45 CUSTOMER[17]

Address offset: 0x0C4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.46 CUSTOMER[18]

Address offset: 0x0C8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.47 CUSTOMER[19]

Address offset: 0x0CC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.48 CUSTOMER[20]

Address offset: 0x0D0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.49 CUSTOMER[21]

Address offset: 0x0D4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.50 CUSTOMER[22]

Address offset: 0x0D8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	RW	CUSTOMER													Reserved for customer																					

### 13.1.51 CUSTOMER[23]

Address offset: 0x0DC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value	Id	Value										Description																				
A	RW	CUSTOMER														Reserved for customer																				

### 13.1.52 CUSTOMER[24]

Address offset: 0x0E0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field		Value Id	Value										Description																					
A	RW	CUSTOMER													Reserved for customer																					

### 13.1.53 CUSTOMER[25]

Address offset: 0x0E4

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	CUSTOMER							Reserved for customer																										

### 13.1.54 CUSTOMER[26]

Address offset: 0x0E8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value				Description																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.55 CUSTOMER[27]

Address offset: 0x0EC

Reserved for customer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CUSTOMER				Reserved for customer																													

### 13.1.56 CUSTOMER[28]

Address offset: 0x0F0

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.57 CUSTOMER[29]

Address offset: 0x0F4

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	CUSTOMER							Reserved for customer																											

### 13.1.58 CUSTOMER[30]

Address offset: 0x0F8

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.59 CUSTOMER[31]

Address offset: 0x0FC

Reserved for customer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CUSTOMER				Reserved for customer																														

### 13.1.60 PSELRESET[0]

Address offset: 0x200

Mapping of the nRESET function

All PSELRESET registers have to contain the same value for a pin mapping to be valid. If they do not, there will be no nRESET function exposed on a GPIO, and the device will always start independently of the levels present on any of the GPIOs.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																								
Id					C																																					B					A					A					A																			
Reset 0xFFFFFFFF					1																																1					1					1					1					1					1					1					1				
Id	RW	Field	Value	Id	Value																																Description																																							
A	RW	PIN			18																																Pin number of PORT onto which nRESET is exposed																																							
B	RW	PORT			0																																Port number onto which nRESET is exposed																																							
C	RW	CONNECT																																			Connection																																							
			Disconnected		1																																Disconnect																																							
			Connected		0																																Connect																																							

### 13.1.61 PSELRESET[1]

Address offset: 0x204

Mapping of the nRESET function

All PSELRESET registers have to contain the same value for a pin mapping to be valid. If they do not, there will be no nRESET function exposed on a GPIO, and the device will always start independently of the levels present on any of the GPIOs.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id					C																																B				A				A				A																			
Reset 0xFFFFFFFF					1																																1				1				1				1				1															
Id	RW	Field	Value	Id	Value																																Description																															
A	RW	PIN			18																																Pin number of PORT onto which nRESET is exposed																															
B	RW	PORT			0																																Port number onto which nRESET is exposed																															
C	RW	CONNECT																																			Connection																															
			Disconnected		1																																Disconnect																															
			Connected		0																																Connect																															

### 13.1.62 APPROTECT

Address offset: 0x208

Access port protection



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	PALL				Enable or disable Access Port protection.																															
						See <i>Debug and trace</i> on page 62 for more information.																															
			Disabled		0xFF	Disable																															
			Enabled		0x00	Enable																															

### 13.1.63 NFCPINS

Address offset: 0x20C

Setting of pins dedicated to NFC functionality: NFC antenna or GPIO

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PROTECT				Setting of pins dedicated to NFC functionality																													
			Disabled		0	Operation as GPIO pins. Same protection as normal GPIO pins																													
			NFC		1	Operation as NFC antenna pins. Configures the protection for NFC operation																													

### 13.1.64 EXTSUPPLY

Address offset: 0x300

Enable external circuitry to be supplied from VDD pin. Applicable in high voltage mode only.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	EXTSUPPLY				Enable external circuitry to be supplied from VDD pin (output of REG0 stage)																													
			Disabled		0	No current can be drawn from the VDD pin																													
			Enabled		1	It is allowed to supply external circuitry from the VDD pin																													

### 13.1.65 REGOUT0


Address offset: 0x304

GPIO reference voltage / external output supply voltage in high voltage mode

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			A	A	A	
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	VOUT			Output voltage from of REG0 regulator stage. The maximum output voltage from this stage is given as VDDH - VEXDIF.																																	
			1V8	0	1.8 V																																	
			2V1	1	2.1 V																																	
			2V4	2	2.4 V																																	
			2V7	3	2.7 V																																	
			3V0	4	3.0 V																																	
			3V3	5	3.3 V																																	
			DEFAULT	7	Default voltage: 1.8 V																																	

## 14 Peripheral interface

Peripherals are controlled by the CPU by writing to configuration registers and task registers. Peripheral events are indicated to the CPU by event registers and interrupts if they are configured for a given event.

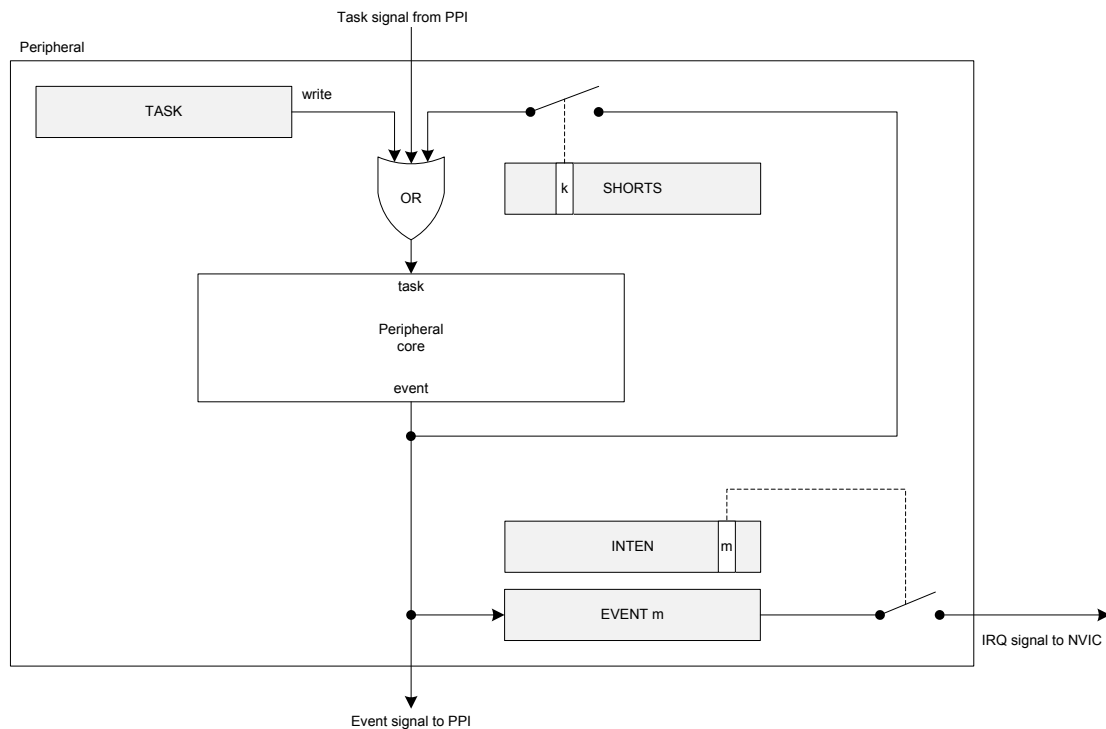

**Figure 8: Tasks, events, shortcuts, and interrupts**

### 14.1 Peripheral ID

Every peripheral is assigned a fixed block of 0x1000 bytes of address space, which is equal to 1024 x 32 bit registers.

See [Instantiation](#) on page 23 for more information about which peripherals are available and where they are located in the address map.

There is a direct relationship between the peripheral ID and base address. For example, a peripheral with base address 0x40000000 is assigned ID=0, a peripheral with base address 0x40001000 is assigned ID=1, and a peripheral with base address 0x4001F000 is assigned ID=31.

Peripherals may share the same ID, which may impose one or more of the following limitations:

- Some peripherals share some registers or other common resources.
- Operation is mutually exclusive. Only one of the peripherals can be used at a time.
- Switching from one peripheral to another must follow a specific pattern (disable the first, then enable the second peripheral).

### 14.2 Peripherals with shared ID

In general (with the exception of ID 0), peripherals sharing an ID and base address may not be used simultaneously. The user can only enable one peripheral at the time on this specific ID.

When switching between two peripherals that share an ID, the user should do the following to prevent unwanted behavior:

- Disable the previously used peripheral.
- Remove any programmable peripheral interconnect (PPI) connections set up for the peripheral that is being disabled.
- Clear all bits in the INTEN register, i.e. `INTENCLR = 0xFFFFFFFF`.
- Explicitly configure the peripheral that you enable and do not rely on configuration values that may be inherited from the peripheral that was disabled.
- Enable the now configured peripheral.

For each of the rows in the following table, the instance ID listed is shared by the peripherals in the same row.

**Table 13: Peripherals sharing an ID**

Instance						
ID 2 (0x40002000)	UARTE	UART				
-						
ID 3 (0x40003000)	SPIM	SPIS	SPI	TWIM	TWIS	TWI
ID 4 (0x40004000)	SPIM	SPIS	SPI	TWIM	TWIS	TWI
ID 35 (0x40023000)	SPIM	SPIS	SPI			
-						
ID 15 (0x4000F000)	AAR	CCM				
-						
ID 19 (0x40013000)	COMP	LPCOMP				
-						
ID 20 (0x40014000)	SWI	EGU				
ID 21 (0x40015000)	SWI	EGU				
ID 22 (0x40016000)	SWI	EGU				
ID 23 (0x40017000)	SWI	EGU				
ID 24 (0x40018000)	SWI	EGU				
ID 25 (0x40019000)	SWI	EGU				

## 14.3 Peripheral registers

Most peripherals feature an ENABLE register. Unless otherwise specified in the relevant chapter, the peripheral registers (in particular the PSEL registers) must be configured before enabling the peripheral.

Note that the peripheral must be enabled before tasks and events can be used.

## 14.4 Bit set and clear

Registers with multiple single-bit bit fields may implement the "set-and-clear" pattern. This pattern enables firmware to set and clear individual bits in a register without having to perform a read-modify-write operation on the main register.

This pattern is implemented using three consecutive addresses in the register map where the main register is followed by a dedicated SET and CLR register in that order.

The SET register is used to set individual bits in the main register while the CLR register is used to clear individual bits in the main register. Writing 1 to a bit in the SET or CLR register will set or clear the same bit in the main register respectively. Writing 0 to a bit in the SET or CLR register has no effect. Reading the SET or CLR registers returns the value of the main register.

**Restriction:** The main register may not be visible and hence not directly accessible in all cases.

## 14.5 Tasks

Tasks are used to trigger actions in a peripheral, for example to start a particular behavior. A peripheral can implement multiple tasks with each task having a separate register in that peripheral's task register group.

A task is triggered when firmware writes 1 to the task register or when the peripheral itself or another peripheral toggles the corresponding task signal. See [Figure 8: Tasks, events, shortcuts, and interrupts](#) on page 58.

## 14.6 Events

Events are used to notify peripherals and the CPU about events that have happened, for example a state change in a peripheral. A peripheral may generate multiple events with each event having a separate register in that peripheral's event register group.

An event is generated when the peripheral itself toggles the corresponding event signal, and the event register is updated to reflect that the event has been generated. See [Figure 8: Tasks, events, shortcuts, and interrupts](#) on page 58. An event register is only cleared when firmware writes 0 to it.

Events can be generated by the peripheral even when the event register is set to 1.

## 14.7 Shortcuts

A shortcut is a direct connection between an event and a task within the same peripheral. If a shortcut is enabled, its associated task is automatically triggered when its associated event is generated.

Using a shortcut is the equivalent to making the same connection outside the peripheral and through the PPI. However, the propagation delay through the shortcut is usually shorter than the propagation delay through the PPI.

Shortcuts are predefined, which means their connections cannot be configured by firmware. Each shortcut can be individually enabled or disabled through the shortcut register, one bit per shortcut, giving a maximum of 32 shortcuts for each peripheral.

## 14.8 Interrupts

All peripherals support interrupts. Interrupts are generated by events.

A peripheral only occupies one interrupt, and the interrupt number follows the peripheral ID. For example, the peripheral with ID=4 is connected to interrupt number 4 in the Nested Vectored Interrupt Controller (NVIC).

Using the INTEN, INTENSET and INTENCLR registers, every event generated by a peripheral can be configured to generate that peripheral's interrupt. Multiple events can be enabled to generate interrupts simultaneously. To resolve the correct interrupt source, the event registers in the event group of peripheral registers will indicate the source.

Some peripherals implement only INTENSET and INTENCLR, and the INTEN register is not available on those peripherals. Refer to the individual chapters for details. In all cases, however, reading back the INTENSET or INTENCLR register returns the same information as in INTEN.

Each event implemented in the peripheral is associated with a specific bit position in the INTEN, INTENSET and INTENCLR registers.

The relationship between tasks, events, shortcuts, and interrupts is shown in [Figure 8: Tasks, events, shortcuts, and interrupts](#) on page 58.

### 14.8.1 Interrupt clearing

When clearing an interrupt by writing "0" to an event register, or disabling an interrupt using the INTENCLR register, it can take up to four CPU clock cycles to take effect. This means that an interrupt may reoccur immediately even if a new event has not come, if the program exits an interrupt handler after the interrupt is cleared or disabled, but before four clock cycles have passed.


**Important:** To avoid an interrupt reoccurring before a new event has come, the program should perform a read from one of the peripheral registers, for example, the event register that has been cleared, or the INTENCLR register that has been used to disable the interrupt.

This will cause a one to three-cycle delay and ensure the interrupt is cleared before exiting the interrupt handler. Care should be taken to ensure the compiler does not remove the read operation as an optimization. If the program can guarantee a four-cycle delay after event clear or interrupt disable another way, then a read of a register is not required.



## 15 Debug and trace

The debug and trace system offers a flexible and powerful mechanism for non-intrusive debugging.

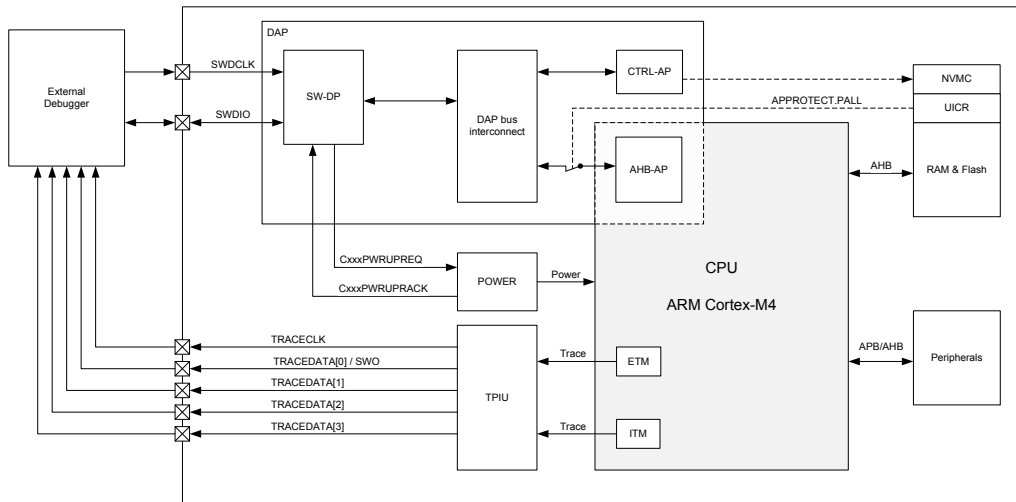

**Figure 9: Debug and trace overview**

The main features of the debug and trace system are:

- Two-pin Serial Wire Debug (SWD) interface
- Flash Patch and Breakpoint Unit (FPB) supports:
  - Two literal comparators
  - Six instruction comparators
- Data Watchpoint and Trace Unit (DWT)
  - Four comparators
- Instrumentation Trace Macrocell (ITM)
- Embedded Trace Macrocell (ETM)
- Trace Port Interface Unit (TPIU)
  - 4-bit parallel trace of ITM and ETM trace data
  - Serial Wire Output (SWO) trace of ITM data

### 15.1 DAP - Debug Access Port

An external debugger can access the device via the DAP.

The DAP implements a standard ARM® CoreSight™ Serial Wire Debug Port (SW-DP).

The SW-DP implements the Serial Wire Debug protocol (SWD) that is a two-pin serial interface, see SWDCLK and SWDIO in [Figure 9: Debug and trace overview](#) on page 62.

In addition to the default access port in the CPU (AHB-AP), the DAP includes a custom Control Access Port (CTRL-AP). The CTRL-AP is described in more detail in [CTRL-AP - Control Access Port](#) on page 63.

#### Important:

- The SWDIO line has an internal pull-up resistor.
- The SWDCLK line has an internal pull-down resistor.

## 15.2 CTRL-AP - Control Access Port

The Control Access Port (CTRL-AP) is a custom access port that enables control of the device even if the other access ports in the DAP are being disabled by the access port protection.

Access port protection blocks the debugger from read and write access to all CPU registers and memory-mapped addresses. See the UICR register [APPROTECT](#) on page 56 for more information about enabling access port protection.

This access port enables the following features:

- Soft reset, see [Reset](#) on page 74 for more information
- Pin reset disable mechanism
- Disable access port protection

Access port protection can only be disabled by issuing an ERASEALL command via CTRL-AP. This command will erase the Flash, UICR, and RAM.

### 15.2.1 Registers

**Table 14: Register Overview**

Register	Offset	Description
<a href="#">RESET</a>	0x000	Soft reset triggered through CTRL-AP
<a href="#">ERASEALL</a>	0x004	Erase all
<a href="#">ERASEALLSTATUS</a>	0x008	Status register for the ERASEALL operation
<a href="#">APPROTECTSTATUS</a>	0x00C	Status register for access port protection
<a href="#">DISABLEPINRESET</a>	0x010	Disable pin reset
<a href="#">PINRESET</a>	0x014	Reset equivalent to "Pin reset".
<a href="#">IDR</a>	0x0FC	CTRL-AP Identification Register, IDR

#### RESET

Address offset: 0x000

Soft reset triggered through CTRL-AP

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	RESET				Soft reset triggered through CTRL-AP. See Reset Behaviour in POWER chapter for more details.																													
			NoReset	0		Reset is not active																													
			Reset	1		Reset is active. Device is held in reset																													

#### ERASEALL

Address offset: 0x004

Erase all

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																															
A	W	ERASEALL				Erase all FLASH and RAM																															
			NoOperation	0		No operation																															
			Erase	1		Erase all FLASH and RAM																															

#### ERASEALLSTATUS

Address offset: 0x008

### Status register for the ERASEALL operation

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																												
A	R	ERASEALLSTATUS																																	
		Ready	0				ERASEALL is ready																												
		Busy	1				ERASEALL is busy (on-going)																												

**APPROTECTSTATUS**

Address offset: 0x00C

## Status register for access port protection

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																																				A
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value		Description																													
A	R	APPROTECTSTATUS					Status register for access port protection																													
			Enabled	0			Access port protection enabled																													
			Disabled	1			Access port protection not enabled																													

## DISABLEPINRESET

Address offset: 0x010

## Disable pin reset

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A																																
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	DISABLEPINRESET				Enable or disable pin reset																															
						Will not disable RESET via CTRL-AP.																															
		Enabled	0			Pin reset is enabled if also enabled via UICR->PSELRESET																															
		Disabled	1			Pin reset is disabled, overriding UICR->PSELRESET																															

## PINRESET

Address offset: 0x014

Reset equivalent to "Pin reset".

[illegible]

## IDR

Address offset: 0x0FC

### CTRL-AP Identification Register, IDR

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				E	E	E	E	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B							A	A	A	A	A	A	A
Reset 0x02880000				0	0	0	0	0	0	1	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value										Description																					
A	R	APID												AP Identification																					
B	R	CLASS												Access Port (AP) class																					



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				E	E	E	E	D	D	D	D	C	C	C	C	C	C	B	B	B	B								A	A	A	A	A	A	A
Reset 0x02880000				0	0	0	0	0	0	1	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
			NotDefined	0x0				No defined class																											
			MEMAP	0x8				Memory Access Port																											
C	R	JEP106ID						JEDEC JEP106 identity code																											
D	R	JEP106CONT						JEDEC JEP106 continuation code																											
E	R	REVISION						Revision																											

## 15.3 Debug interface mode

Before the external debugger can access the CPU's access port (AHB-AP) or the Control Access Port (CTRL-AP), the debugger must first request the device to power up via CxxxPWRUPREQ in the SWJ-DP.

As long as the debugger is requesting power via CxxxPWRUPREQ, the device will be in debug interface mode. If the debugger is not requesting power via CxxxPWRUPREQ, the device will be in normal mode.

Some peripherals will behave differently in debug interface mode compared to normal mode. These differences are described in more detail in the chapters of the peripherals that are affected.

When a debug session is over, the external debugger must make sure to put the device back into normal mode since the overall power consumption will be higher in debug interface mode compared to normal mode.

For details on how to use the debug capabilities please read the debug documentation of your IDE.

If the device is in System OFF when power is requested via CxxxPWRUPREQ, the system will wake up and the DIF flag in [RESETREAS](#) on page 78 will be set.

## 15.4 Real-time debug

The nRF52840 supports real-time debugging.

Real-time debugging will allow interrupts to execute to completion in real time when breakpoints are set in Thread mode or lower priority interrupts. This enables the developer to set a breakpoint and single-step through their code without a failure of the real-time event-driven threads running at higher priority. For example, this enables the device to continue to service the high-priority interrupts of an external controller or sensor without failure or loss of state synchronization while the developer steps through code in a low-priority thread.

## 15.5 Trace

The device supports ETM and ITM trace.

Trace data from the ETM and the ITM is sent to an external debugger via a 4-bit wide parallel trace port (TPIU), see TRACEDATA[0] through TRACEDATA[3] and TRACECLK in [Figure 9: Debug and trace overview](#) on page 62.

In addition to parallel trace, the TPIU supports serial trace via the Serial Wire Output (SWO) trace protocol.

Parallel and serial trace cannot be used at the same time.

ETM trace is only supported in parallel trace mode while ITM trace is supported in both parallel and serial trace modes.

For details on how to use the trace capabilities, please read the debug documentation of your IDE.

TPIU's trace pins are multiplexed with GPIOs, and SWO and TRACEDATA[0] use the same GPIO, see [Pin assignments](#) on page 13 for more information.

Trace speed is configured in the [TRACECONFIG](#) on page 149 register.

The speed of the trace pins depends on the DRIVE setting of the GPIOs that the trace pins are multiplexed with, see [PIN\\_CNF\[14\]](#) on page 186, [PIN\\_CNF\[15\]](#) on page 187, [PIN\\_CNF\[16\]](#) on page 188, [PIN\\_CNF\[18\]](#) on page 189 and [PIN\\_CNF\[20\]](#) on page 190. Only S0S1 and H0H1 drives are suitable for debugging. S0S1 is the default DRIVE at reset. If parallel or serial trace port signals are not fast enough in the debugging conditions, all GPIOs in use for tracing should be set to high drive (H0H1). The user shall make sure that these GPIOs' DRIVE is not overwritten by software during the debugging session.

### 15.5.1 Electrical specification

#### Trace port

Symbol	Description	Min.	Typ.	Max.	Units
T <sub>cyc</sub>	Clock period, as defined by ARM (See ARM Infocenter, Embedded Trace Macrocell Architecture Specification, Trace Port Physical Interface, Timing specifications)	62.5		500	ns

## 16 POWER — Power supply

The power supply consists of a number of LDO and DC/DC regulators that are utilized to maximize the system's power efficiency.

This device has the following power supply features:

- On-chip LDO and DC/DC regulators
- Global System ON/OFF modes
- Individual RAM section power control for all system modes
- Analog or digital pin wakeup from System OFF
- Supervisor HW to manage power-on reset, brownout, and power fail
- Auto-controlled refresh modes for LDO and DC/DC regulators to maximize efficiency
- External circuitry supply
- Separate USB supply

### 16.1 Main supply

The main supply voltage is connected to **VDD/VDDH** pins. The system will enter one of two supply voltage modes, normal or high voltage mode, depending on how the supply voltage is connected to these pins.

Normal voltage mode is entered when the supply voltage is connected to both the **VDD** and **VDDH** pins (so that **VDD** equals **VDDH**).

High voltage mode is entered when the supply voltage is only connected to the **VDDH** pin and the **VDD** pin is not connected to any voltage supply.

For the supply voltage range of the two supply voltage modes, see [Operating conditions](#) on page 139.

#### 16.1.1 Main voltage regulators

The system contains two main supply regulator stages, REG0 and REG1.

Each of the regulator stages have the following regulator type options:

- Low-dropout regulator (LDO)
- Buck regulator (DC/DC)

In normal voltage mode, only the REG1 regulator stage is used and the REG0 stage is automatically disabled. In high voltage mode, both regulator stages (REG0 and REG1) are used. The output voltage of REG0 can be configured in register [REGOUT0](#) on page 57 listed in [UICR — User information configuration registers](#) on page 44. This output voltage is connected to **VDD** and is the input voltage to REG1.

By default, the LDO regulators are enabled and the DC/DC regulators are disabled. Registers [DCDCEN0](#) on page 82 and [DCDCEN](#) on page 81 are used to independently enable the DC/DC regulators for the two stages (REG0 and REG1 respectively).

When a DC/DC converter is enabled, the LDO for the corresponding regulator stage will be disabled. External LC filters must be connected for each of the DC/DC regulators being used. The advantage of using a DC/DC regulator is that the overall power consumption is normally reduced as the efficiency of such a regulator is higher than that of a LDO. The efficiency benefit of using a DC/DC regulator becomes particularly prominent at high dropout voltage (between the input voltage and the output voltage). The efficiency of internal regulators vary with the supply voltage and the current drawn from the regulators.

#### 16.1.2 GPIO levels

The GPIO high reference voltage always equals the level on the **VDD** pin.

In normal voltage mode, the GPIO high level equals the voltage supplied to the **VDD** pin, and in high voltage mode it equals the level specified in the register [REGOUT0](#) on page 57 listed in [UICR — User information configuration registers](#) on page 44.

### 16.1.3 External circuitry supply

In high voltage mode, the output from REG0 can be used for supplying external circuitry from the **VDD** pin.

The external voltage supply output is enabled and output voltage set in *UICR — User information configuration registers* on page 44 using the *EXTSUPPLY* on page 57 and *REGOUT0* on page 57 registers respectively.

The supported output voltage range depends on the supply voltage provided on the **VDDH** pin. Minimum difference between voltage supplied on the **VDDH** pin and the voltage output on the **VDD** pin is defined by **V<sub>EXDIF</sub>** parameter in *Operating conditions* on page 139.


Supplying external circuitry is allowed in both System OFF and System ON mode.

**Important:** When in System OFF mode, 1 mA is the maximum current draw allowed by external circuitry (as defined by the  $I_{EX,OFF}$  parameter in *Operating conditions* on page 139).


### 16.1.4 Regulator configuration examples

The voltage regulators can be configured in several ways, depending on the selected supply voltage mode (normal/high) and the regulator type option (LDO or DC/DC).


Four configuration examples are illustrated in images below.

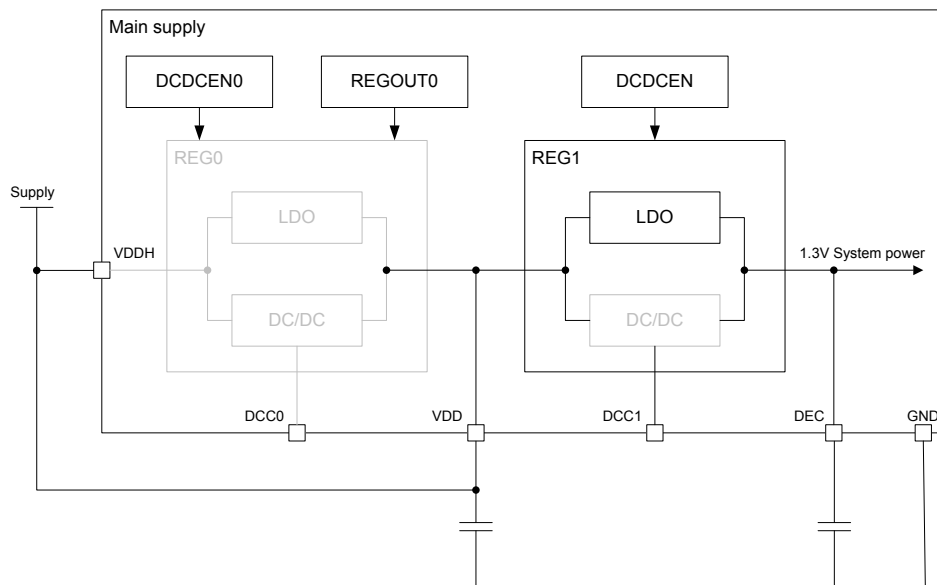


**Figure 10: Normal voltage mode, LDO only**

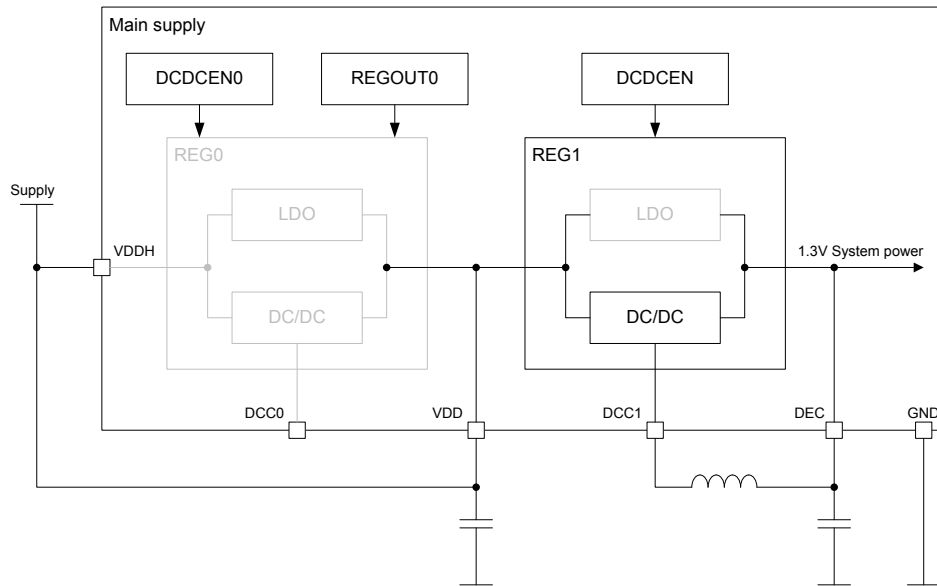

**Figure 11: Normal voltage mode, DC/DC REG1 enabled**

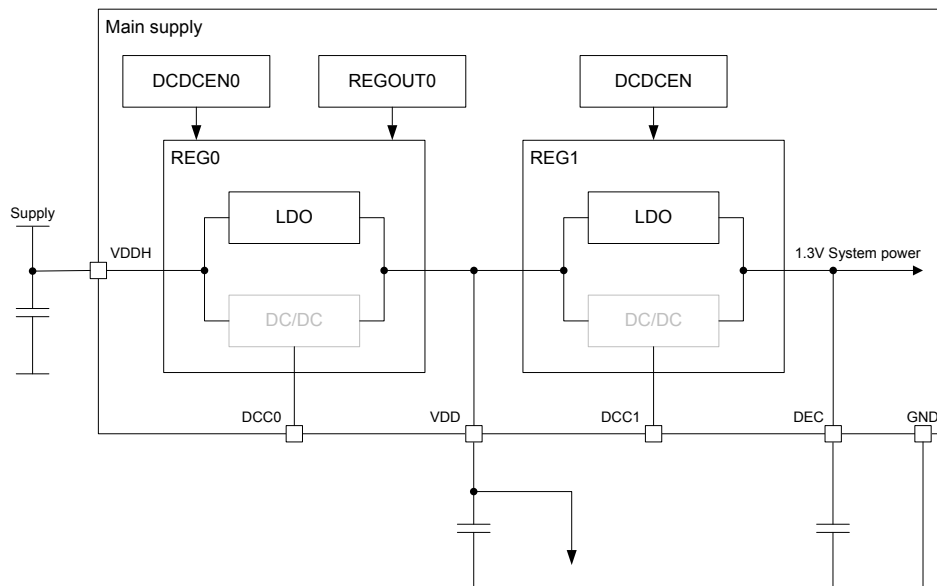

**Figure 12: High voltage mode, LDO only**

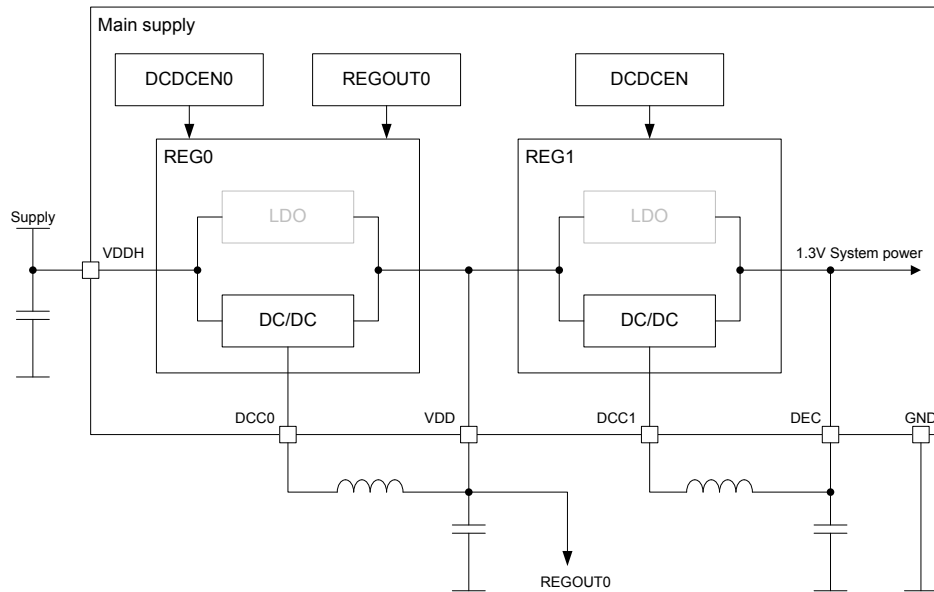

**Figure 13: High voltage mode, DC/DC for REG0 and REG1 enabled**

### 16.1.5 Power supply supervisor

The power supply supervisor enables monitoring of the connected power supply.

The power supply supervisor provides:

- Power-on reset, signalling to the circuit when a supply is connected.
- An optional power-fail comparator (POF), to signal the application when the supply voltages drop below a configured threshold.
- A fixed brownout reset detector, to hold the system in reset when the voltage is too low for safe operation.

The power supply supervisor is illustrated in [Figure 14: Power supply supervisor](#) on page 71. To enable and configure the power-fail comparator, see the register [POFCON](#) on page 80.

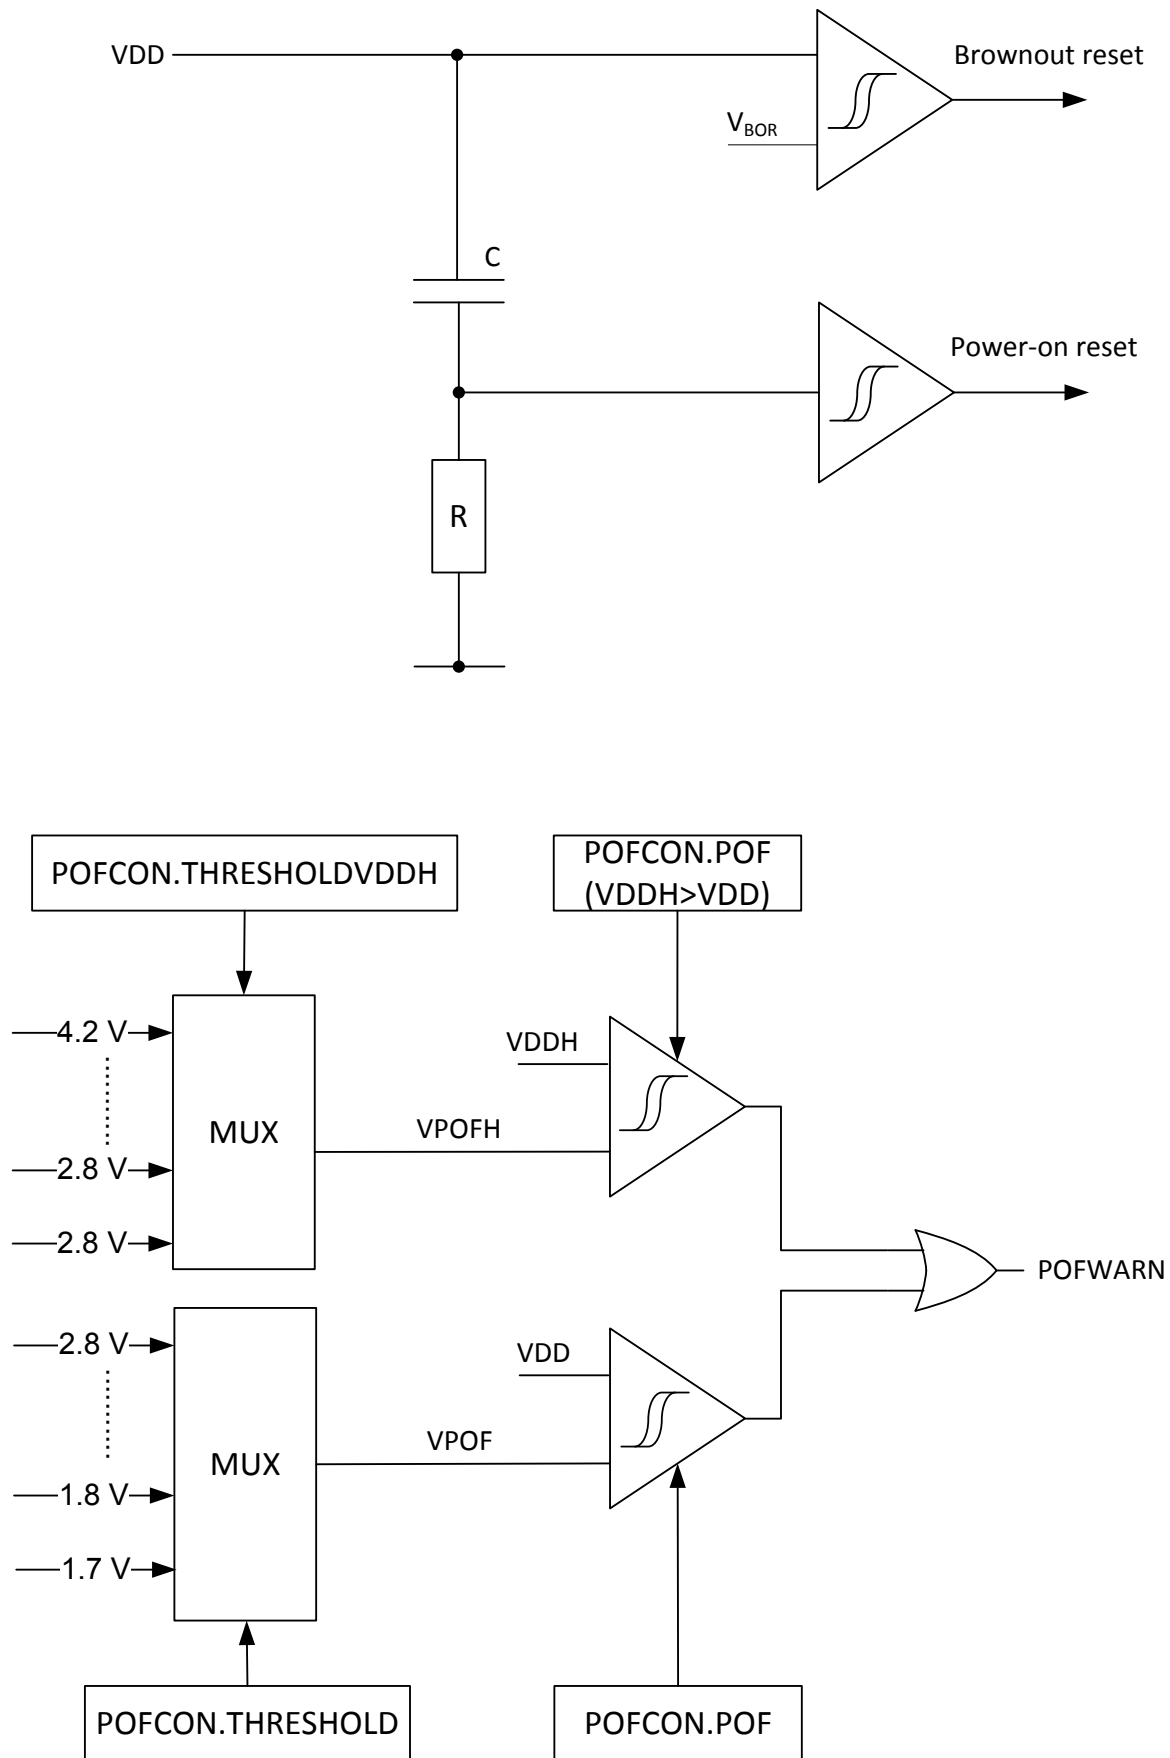


Figure 14: Power supply supervisor

### 16.1.6 Power-fail comparator


Using the power-fail comparator (POF) is optional. When enabled, it can provide the CPU with an early warning of an impending power supply failure.

To enable and configure the power-fail comparator, see the register [POFCON](#) on page 80.

The threshold ( $V_{POF}$ ) must be configured to a suitable level. When the supply voltage falls below the defined threshold, the power-fail comparator will generate an event (POFWARN) which can be used by an application to prepare for power failure. This event will also be generated if the supply voltage is already below the threshold at the time the power-fail comparator is enabled, or if the threshold is re-configured to a level above the supply voltage.

If the power-fail warning is enabled and the supply voltage is below the threshold, the power-fail comparator will prevent the [NVMC](#) from performing write operations to the NVM.

The comparator features a hysteresis of  $V_{HYST}$ , as illustrated in [Figure 15: Power-fail comparator \(BOR = brownout reset\)](#) on page 72.

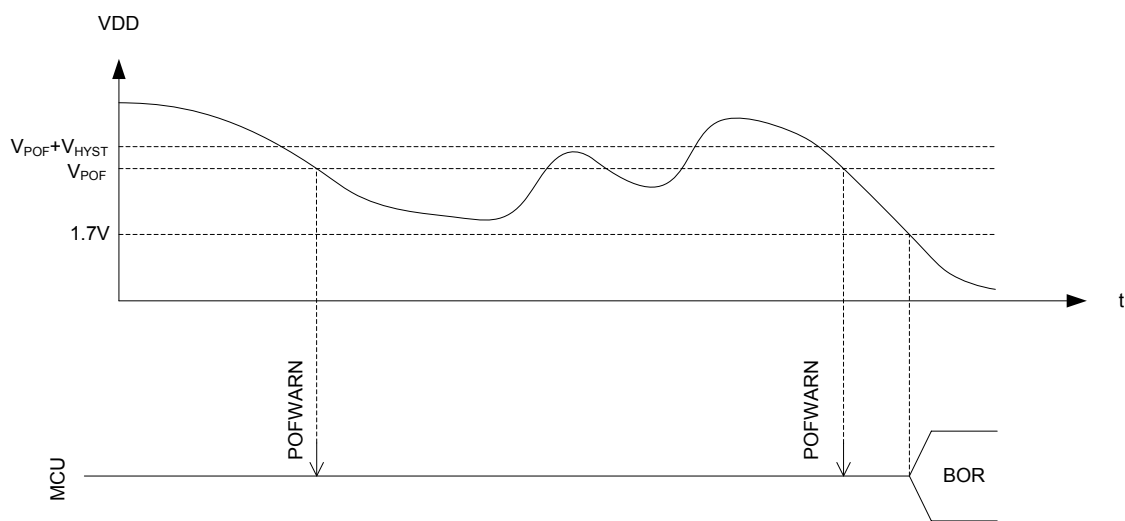

**Figure 15: Power-fail comparator (BOR = brownout reset)**

To save power, the power-fail comparator is not active in System OFF or in System ON when HFCLK is not running.

## 16.2 USB supply

When using the USB peripheral, a 5 V USB supply needs to be provided on the VBUS pin.

The USB peripheral has a dedicated internal voltage regulator for converting the  $V_{BUS}$  supply to 3.3 V used by the USB signalling interface (D+ and D- lines, and pull-up on D+). The rest of the USB peripheral (USBD) is supplied through the main supply like any other on-chip feature. As a consequence, both  $V_{BUS}$  and either  $V_{DDH}$  or  $V_{DD}$  supplies are required for USB peripheral operation.

When  $V_{BUS}$  rises into its valid range, the software is notified through a USBDETECTED event. A USBREMOVED event is sent when  $V_{BUS}$  goes below its valid range. Use these events to implement the USBD start-up sequence described in the [USBD](#) chapter.


When  $V_{BUS}$  rises into its valid range while the device is in System OFF, the device resets and transitions to System ON mode. The [RESETREAS](#) register will have the VBUS bit set to indicate the source of the wake-up.

See [VBUS detection specifications](#) on page 141 for the levels at which the events are sent ( $V_{BUS,DETECT}$  and  $V_{BUS,REMOVE}$ ) or at which the system is woken up from System OFF ( $V_{BUS,DETECT}$ ).



When the USB peripheral is enabled through the [ENABLE](#) register and  $V_{BUS}$  is detected, the regulator is turned on. A USBPWRRDY event is sent when the regulator's worst case settling time has elapsed, indicating to the software that it can enable the USB pull-up to signal a USB connection to the host.

The software can read the state of the  $V_{BUS}$  detection and regulator output readiness at any time through the [USBREGSTATUS](#) register.

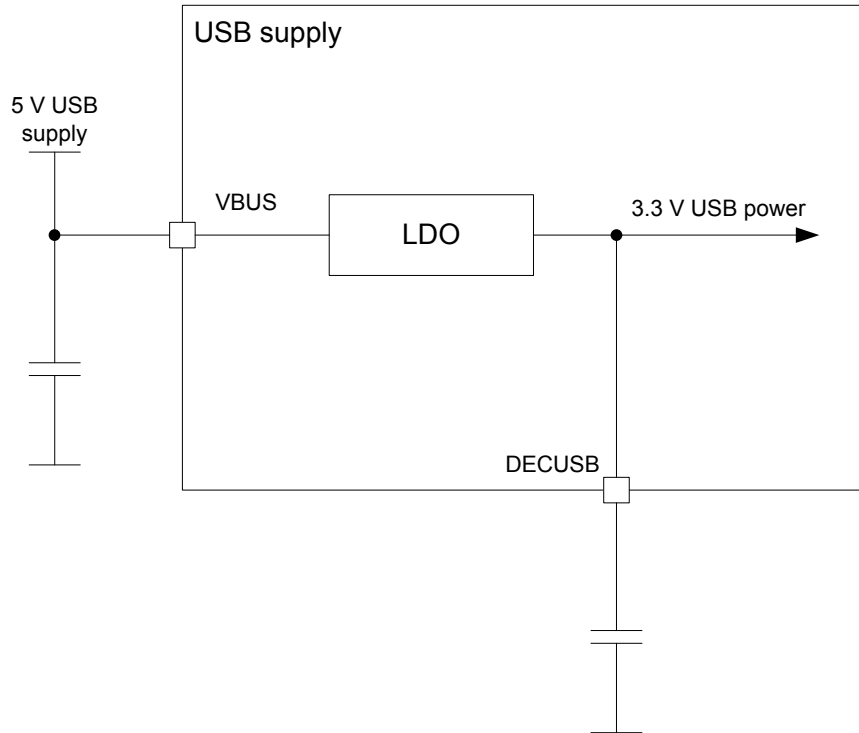

**Figure 16: USB voltage regulator**

To ensure stability, the input and output of the USB regulator need to be decoupled with a suitable decoupling capacitor. See [Reference circuitry](#) on page 686 for the recommended values.

## 16.3 System OFF mode

System OFF is the deepest power saving mode the system can enter. In this mode, the system's core functionality is powered down and all ongoing tasks are terminated.

The device can be put into System OFF mode using the POWER register interface. When in System OFF mode, the device can be woken up through one of the following signals:

1. The DETECT signal, optionally generated by the GPIO peripheral.
2. The ANADETECT signal, optionally generated by the LPCOMP module.
3. The SENSE signal, optionally generated by the NFC module to wake-on-field.
4. Detecting a [valid USB voltage](#) on the  $V_{BUS}$  pin ( $V_{BUS,DETECT}$ ).
5. A reset.

The system is reset when it wakes up from the System OFF mode.

One or more RAM sections can be retained in System OFF mode, depending on the settings in the RAM[n].POWER registers. RAM[n].POWER are retained registers. Note that these registers are usually overwritten by the start-up code provided with the nRF application examples.

Before entering the System OFF mode, the user must make sure that all on-going EasyDMA transactions have been completed. See peripheral specific chapters for more information about how to acquire the status of EasyDMA transactions.

### 16.3.1 Emulated System OFF mode

If the device is in debug interface mode, System OFF will be emulated to secure that all required resources needed for debugging are available during System OFF.

See [Debug and trace](#) on page 62 for more information. Required resources needed for debugging include the following key components: [Debug and trace](#) on page 62, [CLOCK — Clock control](#) on page 142, [POWER — Power supply](#) on page 67, [NVMC — Non-volatile memory controller](#) on page 28, CPU, flash, and RAM. Since the CPU is kept on in an emulated System OFF mode, it is recommended to add an infinite loop directly after entering System OFF, to prevent the CPU from executing code that normally should not be executed.

## 16.4 System ON mode

System ON is the default state after power-on reset. In System ON, all functional blocks such as the CPU or peripherals, can be in IDLE or RUN mode, depending on the configuration set by the software and the state of the application executing.

Register [RESETREAS](#) on page 78 provides information about the source causing the wakeup or reset.

The system can switch the appropriate internal power sources on and off, depending on how much power is needed at any given time. The power requirement of a peripheral is directly related to its activity level, and the activity level of a peripheral is usually raised and lowered when specific tasks are triggered or events are generated.

### 16.4.1 Sub power modes

In System ON mode, when both the CPU and all the peripherals are in IDLE mode, the system can reside in one of the two sub power modes.

The sub power modes are:

- Constant latency
- Low power

In constant latency mode, the CPU wakeup latency and the PPI task response are constant and kept at a minimum. This is secured by forcing a set of basic resources to be turned on while in sleep. Having a constant and predictable latency is at cost of having increased power consumption. The constant latency mode is selected by triggering the CONSTLAT task.

In low power mode, the automatic power management system described in [System ON mode](#) on page 74 ensures that the most efficient supply option is chosen to save most power. Having the lowest power possible is at cost of having a varying CPU wakeup latency and PPI task response. The low power mode is selected by triggering the LOWPWR task.

When the system enters System ON mode, it is by default in low power sub power mode.

## 16.5 RAM power control

RAM power control is used for RAM retention in System OFF mode and for powering down unused sections in System ON mode.

Each RAM section can power up and down independently in both System ON and System OFF mode. See chapter [Memory](#) on page 20 for more information on RAM sections.

RAM sections can be retained in System OFF mode, depending on the settings in the RAM[n].POWER registers. RAM[n].POWER are retained registers.

## 16.6 Reset

Several sources may trigger a reset.

After a reset has occurred, register [RESETREAS](#) can be read to determine which source has triggered the reset.

### 16.6.1 Power-on reset

The power-on reset generator initializes the system at power-on.

The system is held in a reset state until the power supply has reached the minimum operating voltage and the internal voltage regulators have started.

### 16.6.2 Pin reset

A pin reset is generated when the physical reset pin on the device is asserted.

Pin reset is configured via the [PSELRESET\[0\]](#) and [PSELRESET\[1\]](#) registers.

A reset can be issued through the CTRL-AP Access Port, see [Debug and trace](#) on page 62 for more information.

### 16.6.3 Wakeup from System OFF mode reset

The device is reset when it wakes up from System OFF mode.

The debug access port (DAP) is not reset following a wake up from System OFF mode if the device is in debug interface mode. See chapter [Debug and trace](#) on page 62 for more information.

### 16.6.4 Soft reset

A soft reset is generated when the SYSRESETREQ bit of the Application Interrupt and Reset Control Register (AIRCRR register) in the ARM® core is set.

See [ARM documentation](#) for more details.

A soft reset can also be generated via the register [RESET](#) on page 63 in the CTRL-AP.

### 16.6.5 Watchdog reset

A watchdog reset is generated when the watchdog times out.

See chapter [WDT — Watchdog timer](#) on page 468 for more information.

### 16.6.6 Brownout reset

The brownout reset generator puts the system in reset state if the supply voltage drops below the brownout reset (BOR) threshold.

See section [Power fail comparator](#) on page 140 for more information.

## 16.7 Retained registers

A retained register is a register that will retain its value in System OFF mode and through a reset, depending on reset source. See individual peripheral chapters for information of which registers are retained for the various peripherals.

## 16.8 Reset behavior

Reset behavior of the different reset sources is summarized in a table.

---

<sup>a</sup> All debug components excluding SWJ-DP. See [Debug and trace](#) on page 62 chapter for more information about the different debug components.

Reset source	Reset target CPU	Peripherals	GPIO	Debug <sup>5</sup>	SWJ-DP	RAM	WDT	Retained registers	RESETREAS
CPU lockup <sup>5</sup>	x	x	x						
Soft reset	x	x	x						
Wakeup from System OFF mode reset	x	x		x <sup>6</sup>		x <sup>7</sup>			
Watchdog reset <sup>8</sup>	x	x	x	x		x	x	x	
Pin reset	x	x	x	x		x	x	x	
Brownout reset	x	x	x	x	x	x	x	x	x
Power-on reset	x	x	x	x	x	x	x	x	x

**Important:** The RAM is never reset, but depending on a reset source the content of RAM may be corrupted.

## 16.9 Registers

**Table 15: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40000000	POWER	POWER	Power control	

**Table 16: Register Overview**

Register	Offset	Description	
TASKS_CONSTLAT	0x078	Enable constant latency mode	
TASKS_LOWPWR	0x07C	Enable low power mode (variable latency)	
EVENTS_POFWARN	0x108	Power failure warning	
EVENTS_SLEEPEXIT	0x114	CPU entered WFI/WFE sleep	
EVENTS_SLEEPEXIT	0x118	CPU exited WFI/WFE sleep	
EVENTS_USBDDETECTED	0x11C	Voltage supply detected on VBUS	
EVENTS_USBREMOVED	0x120	Voltage supply removed from VBUS	
EVENTS_USBPWRDY	0x124	USB 3.3 V supply ready	
INTENSET	0x304	Enable interrupt	
INTENCLR	0x308	Disable interrupt	
RESETREAS	0x400	Reset reason	
RAMSTATUS	0x428	RAM status register	Deprecated
USBREGSTATUS	0x438	USB supply status	
SYSTEMOFF	0x500	System OFF register	
POFCON	0x510	Power failure comparator configuration	
GPREGRET	0x51C	General purpose retention register	
GPREGRET2	0x520	General purpose retention register	
DCDCEN	0x578	Enable DC/DC converter for REG1 stage.	
DCDCEN0	0x580	Enable DC/DC converter for REG0 stage.	
MAINREGSTATUS	0x640	Main supply status	
RAM[0].POWER	0x900	RAM0 power control register	
RAM[0].POWERSET	0x904	RAM0 power control set register	
RAM[0].POWERCLR	0x908	RAM0 power control clear register	
RAM[1].POWER	0x910	RAM1 power control register	
RAM[1].POWERSET	0x914	RAM1 power control set register	
RAM[1].POWERCLR	0x918	RAM1 power control clear register	
RAM[2].POWER	0x920	RAM2 power control register	
RAM[2].POWERSET	0x924	RAM2 power control set register	
RAM[2].POWERCLR	0x928	RAM2 power control clear register	

<sup>5</sup> Reset from CPU lockup is disabled if the device is in debug interface mode. CPU lockup is not possible in System OFF.

<sup>6</sup> The Debug components will not be reset if the device is in debug interface mode.

<sup>7</sup> RAM is not reset on wakeup from OFF mode, but depending on settings in the RAM registers parts, or the whole RAM, may not be retained after the device has entered System OFF mode.

<sup>8</sup> Watchdog reset is not available in System OFF.

Register	Offset	Description
<a href="#">RAM[3].POWER</a>	0x930	RAM3 power control register
<a href="#">RAM[3].POWERSET</a>	0x934	RAM3 power control set register
<a href="#">RAM[3].POWERCLR</a>	0x938	RAM3 power control clear register
<a href="#">RAM[4].POWER</a>	0x940	RAM4 power control register
<a href="#">RAM[4].POWERSET</a>	0x944	RAM4 power control set register
<a href="#">RAM[4].POWERCLR</a>	0x948	RAM4 power control clear register
<a href="#">RAM[5].POWER</a>	0x950	RAM5 power control register
<a href="#">RAM[5].POWERSET</a>	0x954	RAM5 power control set register
<a href="#">RAM[5].POWERCLR</a>	0x958	RAM5 power control clear register
<a href="#">RAM[6].POWER</a>	0x960	RAM6 power control register
<a href="#">RAM[6].POWERSET</a>	0x964	RAM6 power control set register
<a href="#">RAM[6].POWERCLR</a>	0x968	RAM6 power control clear register
<a href="#">RAM[7].POWER</a>	0x970	RAM7 power control register
<a href="#">RAM[7].POWERSET</a>	0x974	RAM7 power control set register
<a href="#">RAM[7].POWERCLR</a>	0x978	RAM7 power control clear register
<a href="#">RAM[8].POWER</a>	0x980	RAM8 power control register
<a href="#">RAM[8].POWERSET</a>	0x984	RAM8 power control set register
<a href="#">RAM[8].POWERCLR</a>	0x988	RAM8 power control clear register

## 16.9.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																F E D C B A			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	POFWARN			Write '1' to Enable interrupt for POFWARN event																														
					See <a href="#">EVENTS_POFWARN</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
B	RW	SLEEPENTER			Write '1' to Enable interrupt for SLEEPENTER event																														
					See <a href="#">EVENTS_SLEEPENTER</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
C	RW	SLEEPEXIT			Write '1' to Enable interrupt for SLEEPEXIT event																														
					See <a href="#">EVENTS_SLEEPEXIT</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
D	RW	USBDETECTED			Write '1' to Enable interrupt for USBDETECTED event																														
					See <a href="#">EVENTS_USBDETECTED</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
E	RW	USBREMOVED			Write '1' to Enable interrupt for USBREMOVED event																														
					See <a href="#">EVENTS_USBREMOVED</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														
F	RW	USBPWRDY			Write '1' to Enable interrupt for USBPWRDY event																														
					See <a href="#">EVENTS_USBPWRDY</a>																														
		Set		1	Enable																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																												F	E	D	C	B				A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value		Description																															
			Disabled		0		Read: Disabled																															
			Enabled		1		Read: Enabled																															

## 16.9.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	F E D C B A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	POFWARN				Write '1' to Disable interrupt for POFWARN event																									
						See <a href="#">EVENTS_POFWARN</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									
B	RW	SLEEPENTER				Write '1' to Disable interrupt for SLEEPENTER event																									
						See <a href="#">EVENTS_SLEEPENTER</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									
C	RW	SLEEPEXIT				Write '1' to Disable interrupt for SLEEPEXIT event																									
						See <a href="#">EVENTS_SLEEPEXIT</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									
D	RW	USBDETECTED				Write '1' to Disable interrupt for USBDETECTED event																									
						See <a href="#">EVENTS_USBDETECTED</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									
E	RW	USBREMOVED				Write '1' to Disable interrupt for USBREMOVED event																									
						See <a href="#">EVENTS_USBREMOVED</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									
F	RW	USBPWRDY				Write '1' to Disable interrupt for USBPWRDY event																									
						See <a href="#">EVENTS_USBPWRDY</a>																									
			Clear		1	Disable																									
			Disabled		0	Read: Disabled																									
			Enabled		1	Read: Enabled																									

## 16.9.3 RESETREAS

Address offset: 0x400

Reset reason

Unless cleared, the RESETREAS register will be cumulative. A field is cleared by writing '1' to it. If none of the reset sources are flagged, this indicates that the chip was reset from the on-chip reset generator, which will indicate a power-on-reset or a brownout reset.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				I H G F E																D C B A															
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	RESETPIN				Reset from pin-reset detected																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
B	RW	DOG				Reset from watchdog detected																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
C	RW	SREQ				Reset from soft reset detected																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
D	RW	LOCKUP				Reset from CPU lock-up detected																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
E	RW	OFF				Reset due to wake up from System OFF mode when wakeup is triggered from DETECT signal from GPIO																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
F	RW	LPCOMP				Reset due to wake up from System OFF mode when wakeup is triggered from ANADETECT signal from LPCOMP																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
G	RW	DIF				Reset due to wake up from System OFF mode when wakeup is triggered from entering into debug interface mode																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
H	RW	NFC				Reset due to wake up from System OFF mode by NFC field detect																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														
I	RW	VBUS				Reset due to wake up from System OFF mode by Vbus rising into valid range																													
			NotDetected	0	Not detected																														
			Detected	1	Detected																														

## 16.9.4 RAMSTATUS ( Deprecated )

Address offset: 0x428

RAM status register

Since this register is deprecated the following substitutions have been made: RAM block 0 is equivalent to a block comprising RAM0.S0 and RAM1.S0, RAM block 1 is equivalent to a block comprising RAM2.S0 and RAM3.S0, RAM block 2 is equivalent to a block comprising RAM4.S0 and RAM5.S0 and RAM block 3 is equivalent to a block comprising RAM6.S0 and RAM7.S0. A RAM block field will indicate ON as long as any of the RAM sections associated with a block are on.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	R	RAMBLOCK0				RAM block 0 is on or off/powering up																														
			Off	0	Off																															
			On	1	On																															
B	R	RAMBLOCK1				RAM block 1 is on or off/powering up																														
			Off	0	Off																															
			On	1	On																															
C	R	RAMBLOCK2				RAM block 2 is on or off/powering up																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value		Description																															
			Off		0		Off																															
			On		1		On																															
D	R	RAMBLOCK3					RAM block 3 is on or off/powering up																															
			Off		0		Off																															
			On		1		On																															

## 16.9.5 USBREGSTATUS

Address offset: 0x438

USB supply status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																															
A	R	VBUSDETECT				VBUS input detection status (USBDETECTED and USBREMOVED events are derived from this information)																															
			NoVbus		0	VBUS voltage below valid threshold																															
			VbusPresent		1	VBUS voltage above valid threshold																															
B	R	OUTPUTRDY				USB supply output settling time elapsed																															
			NotReady		0	USBREG output settling time not elapsed																															
			Ready		1	USBREG output settling time elapsed (same information as USBPWRRDY event)																															

## 16.9.6 SYSTEMOFF

Address offset: 0x500

System OFF register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	W	SYSTEMOFF				Enable System OFF mode																													
			Enter		1	Enable System OFF mode																													

## 16.9.7 POFCON

Address offset: 0x510

Power failure comparator configuration

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																												D	D	D	D					B	B	B	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value	Id	Value	Description																																		
A	RW	POF				Enable or disable power failure comparator																																		
			Disabled		0	Disable																																		
			Enabled		1	Enable																																		
B	RW	THRESHOLD				Power failure comparator threshold setting																																		
			V17		4	Set threshold to 1.7 V																																		
			V18		5	Set threshold to 1.8 V																																		
			V19		6	Set threshold to 1.9 V																																		
			V20		7	Set threshold to 2.0 V																																		
			V21		8	Set threshold to 2.1 V																																		
			V22		9	Set threshold to 2.2 V																																		



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																	D				D	D	D					B				B	B	B	A	
Reset 0x00000000					0					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
			V23		10		Set threshold to 2.3 V																													
			V24		11		Set threshold to 2.4 V																													
			V25		12		Set threshold to 2.5 V																													
			V26		13		Set threshold to 2.6 V																													
			V27		14		Set threshold to 2.7 V																													
			V28		15		Set threshold to 2.8 V																													
D	RW	THRESHOLDVDDH				Power failure comparator threshold setting for voltage supply on VDDH																														
			V27		0		Set threshold to 2.7 V																													
			V28		1		Set threshold to 2.8 V																													
			V29		2		Set threshold to 2.9 V																													
			V30		3		Set threshold to 3.0 V																													
			V31		4		Set threshold to 3.1 V																													
			V32		5		Set threshold to 3.2 V																													
			V33		6		Set threshold to 3.3 V																													
			V34		7		Set threshold to 3.4 V																													
			V35		8		Set threshold to 3.5 V																													
			V36		9		Set threshold to 3.6 V																													
			V37		10		Set threshold to 3.7 V																													
			V38		11		Set threshold to 3.8 V																													
			V39		12		Set threshold to 3.9 V																													
			V40		13		Set threshold to 4.0 V																													
			V41		14		Set threshold to 4.1 V																													
			V42		15		Set threshold to 4.2 V																													

## 16.9.8 GPREGRET

Address offset: 0x51C

General purpose retention register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																													A					A					A					A				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																																							
A	RW	GPREGRET								General purpose retention register																																						
									This register is a retained register																																							

## 16.9.9 GPREGRET2

Address offset: 0x520

General purpose retention register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id																													A		A		A		A		A		A		A		A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0									
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>				<b>Description</b>																																					
A	RW	GPREGRET								General purpose retention register																																				
									This register is a retained register																																					

## 16.9.10 DCDCEN

Address offset: 0x578

Enable DC/DC converter for REG1 stage.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																															
A	RW	DCDCEN				Enable DC/DC converter for REG1 stage.																															
			Disabled		0	Disable																															
			Enabled		1	Enable																															

### 16.9.11 DCDCEN0

Address offset: 0x580

Enable DC/DC converter for REG0 stage.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	DCDCEN				Enable DC/DC converter for REG0 stage.																										
			Disabled		0	Disable																										
			Enabled		1	Enable																										

### 16.9.12 MAINREGSTATUS

Address offset: 0x640

Main supply status

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	MAINREGSTATUS				Main supply status																										
			NORMAL		0	Normal voltage mode. Voltage supplied on VDD.																										
			HIGH		1	High voltage mode. Voltage supplied on VDDH.																										

### 16.9.13 RAM[0].POWER

Address offset: 0x900

RAM0 power control register

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																										
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																										
			Off		0	Off																										
			On		1	On																										
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.																										
			Off		0	Off																										
			On		1	On																										
C	RW	S2POWER				Keep RAM section S2 ON or OFF in System ON mode.																										

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Id	RW	Field	Value Id	Value	Description
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
F	RW	S5POWER			Keep RAM section S5 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
G	RW	S6POWER			Keep RAM section S6 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
H	RW	S7POWER			Keep RAM section S7 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
I	RW	S8POWER			Keep RAM section S8 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
J	RW	S9POWER			Keep RAM section S9 ON or OFF in System ON mode.
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.
			On	1	Off
K	RW	S10POWER			Keep RAM section S10 ON or OFF in System ON mode.
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			Off	0	Off																														
			On	1	On																														
W	RW	S6RETENTION	Off	0	Keep retention on RAM section S6 when RAM section is in OFF																														
			On	1	On																														
X	RW	S7RETENTION	Off	0	Keep retention on RAM section S7 when RAM section is in OFF																														
			On	1	On																														
Y	RW	S8RETENTION	Off	0	Keep retention on RAM section S8 when RAM section is in OFF																														
			On	1	On																														
Z	RW	S9RETENTION	Off	0	Keep retention on RAM section S9 when RAM section is in OFF																														
			On	1	On																														
a	RW	S10RETENTION	Off	0	Keep retention on RAM section S10 when RAM section is in OFF																														
			On	1	On																														
b	RW	S11RETENTION	Off	0	Keep retention on RAM section S11 when RAM section is in OFF																														
			On	1	On																														
c	RW	S12RETENTION	Off	0	Keep retention on RAM section S12 when RAM section is in OFF																														
			On	1	On																														
d	RW	S13RETENTION	Off	0	Keep retention on RAM section S13 when RAM section is in OFF																														
			On	1	On																														
e	RW	S14RETENTION	Off	0	Keep retention on RAM section S14 when RAM section is in OFF																														
			On	1	On																														
f	RW	S15RETENTION	Off	0	Keep retention on RAM section S15 when RAM section is in OFF																														
			On	1	On																														

## 16.9.14 RAM[0].POWERSET

Address offset: 0x904

RAM0 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	On	1	Keep RAM section S0 of RAM0 on or off in System ON mode																														
B	W	S1POWER	On	1	Keep RAM section S1 of RAM0 on or off in System ON mode																														
C	W	S2POWER	On	1	Keep RAM section S2 of RAM0 on or off in System ON mode																														
D	W	S3POWER	On	1	Keep RAM section S3 of RAM0 on or off in System ON mode																														
E	W	S4POWER	On	1	Keep RAM section S4 of RAM0 on or off in System ON mode																														
F	W	S5POWER			Keep RAM section S5 of RAM0 on or off in System ON mode																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
			On		1	On																													
G	W	S6POWER	On		1	Keep RAM section S6 of RAM0 on or off in System ON mode																													
			On		1	On																													
H	W	S7POWER	On		1	Keep RAM section S7 of RAM0 on or off in System ON mode																													
			On		1	On																													
I	W	S8POWER	On		1	Keep RAM section S8 of RAM0 on or off in System ON mode																													
			On		1	On																													
J	W	S9POWER	On		1	Keep RAM section S9 of RAM0 on or off in System ON mode																													
			On		1	On																													
K	W	S10POWER	On		1	Keep RAM section S10 of RAM0 on or off in System ON mode																													
			On		1	On																													
L	W	S11POWER	On		1	Keep RAM section S11 of RAM0 on or off in System ON mode																													
			On		1	On																													
M	W	S12POWER	On		1	Keep RAM section S12 of RAM0 on or off in System ON mode																													
			On		1	On																													
N	W	S13POWER	On		1	Keep RAM section S13 of RAM0 on or off in System ON mode																													
			On		1	On																													
O	W	S14POWER	On		1	Keep RAM section S14 of RAM0 on or off in System ON mode																													
			On		1	On																													
P	W	S15POWER	On		1	Keep RAM section S15 of RAM0 on or off in System ON mode																													
			On		1	On																													
Q	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																													
			On		1	On																													
R	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																													
			On		1	On																													
S	W	S2RETENTION				Keep retention on RAM section S2 when RAM section is switched off																													
			On		1	On																													
T	W	S3RETENTION				Keep retention on RAM section S3 when RAM section is switched off																													
			On		1	On																													
U	W	S4RETENTION				Keep retention on RAM section S4 when RAM section is switched off																													
			On		1	On																													
V	W	S5RETENTION				Keep retention on RAM section S5 when RAM section is switched off																													
			On		1	On																													
W	W	S6RETENTION				Keep retention on RAM section S6 when RAM section is switched off																													
			On		1	On																													
X	W	S7RETENTION				Keep retention on RAM section S7 when RAM section is switched off																													
			On		1	On																													
Y	W	S8RETENTION				Keep retention on RAM section S8 when RAM section is switched off																													
			On		1	On																													
Z	W	S9RETENTION				Keep retention on RAM section S9 when RAM section is switched off																													
			On		1	On																													
a	W	S10RETENTION				Keep retention on RAM section S10 when RAM section is switched off																													
			On		1	On																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																													
b	W	S11RETENTION	On	1	On	Keep retention on RAM section S11 when RAM section is switched off																													
c	W	S12RETENTION	On	1	On	Keep retention on RAM section S12 when RAM section is switched off																													
d	W	S13RETENTION	On	1	On	Keep retention on RAM section S13 when RAM section is switched off																													
e	W	S14RETENTION	On	1	On	Keep retention on RAM section S14 when RAM section is switched off																													
f	W	S15RETENTION	On	1	On	Keep retention on RAM section S15 when RAM section is switched off																													

## 16.9.15 RAM[0].POWERCLR

Address offset: 0x908

RAM0 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM0 on or off in System ON mode Off																														
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM0 on or off in System ON mode Off																														
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM0 on or off in System ON mode Off																														
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM0 on or off in System ON mode Off																														
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM0 on or off in System ON mode Off																														
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM0 on or off in System ON mode Off																														
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM0 on or off in System ON mode Off																														
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM0 on or off in System ON mode Off																														
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM0 on or off in System ON mode Off																														
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM0 on or off in System ON mode Off																														
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM0 on or off in System ON mode Off																														
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM0 on or off in System ON mode Off																														
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM0 on or off in System ON mode Off																														
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM0 on or off in System ON mode Off																														

Page 88



## 16.9.16 RAM[1].POWER

Address offset: 0x910

RAM1 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER			Keep RAM section S2 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
F	RW	S5POWER			Keep RAM section S5 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
G	RW	S6POWER			Keep RAM section S6 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
H	RW	S7POWER			Keep RAM section S7 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													

Page 90

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value		Description																												
					Off	0	S15RETENTION. All RAM sections will be OFF in System OFF mode.																												
					On	1	On																												
Q	RW	S0RETENTION			Off	0	Keep retention on RAM section S0 when RAM section is in OFF																												
					On	1	On																												
R	RW	S1RETENTION			Off	0	Keep retention on RAM section S1 when RAM section is in OFF																												
					On	1	On																												
S	RW	S2RETENTION			Off	0	Keep retention on RAM section S2 when RAM section is in OFF																												
					On	1	On																												
T	RW	S3RETENTION			Off	0	Keep retention on RAM section S3 when RAM section is in OFF																												
					On	1	On																												
U	RW	S4RETENTION			Off	0	Keep retention on RAM section S4 when RAM section is in OFF																												
					On	1	On																												
V	RW	S5RETENTION			Off	0	Keep retention on RAM section S5 when RAM section is in OFF																												
					On	1	On																												
W	RW	S6RETENTION			Off	0	Keep retention on RAM section S6 when RAM section is in OFF																												
					On	1	On																												
X	RW	S7RETENTION			Off	0	Keep retention on RAM section S7 when RAM section is in OFF																												
					On	1	On																												
Y	RW	S8RETENTION			Off	0	Keep retention on RAM section S8 when RAM section is in OFF																												
					On	1	On																												
Z	RW	S9RETENTION			Off	0	Keep retention on RAM section S9 when RAM section is in OFF																												
					On	1	On																												
a	RW	S10RETENTION			Off	0	Keep retention on RAM section S10 when RAM section is in OFF																												
					On	1	On																												
b	RW	S11RETENTION			Off	0	Keep retention on RAM section S11 when RAM section is in OFF																												
					On	1	On																												
c	RW	S12RETENTION			Off	0	Keep retention on RAM section S12 when RAM section is in OFF																												
					On	1	On																												
d	RW	S13RETENTION			Off	0	Keep retention on RAM section S13 when RAM section is in OFF																												
					On	1	On																												
e	RW	S14RETENTION			Off	0	Keep retention on RAM section S14 when RAM section is in OFF																												
					On	1	On																												
f	RW	S15RETENTION			Off	0	Keep retention on RAM section S15 when RAM section is in OFF																												
					On	1	On																												

## 16.9.17 RAM[1].POWERSET

Address offset: 0x914

RAM1 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																												
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																												
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1																												
Id	RW	Field	Value Id	Value	Description																											
A	W	S0POWER	On	1	Keep RAM section S0 of RAM1 on or off in System ON mode																											
B	W	S1POWER	On	1	Keep RAM section S1 of RAM1 on or off in System ON mode																											
C	W	S2POWER	On	1	Keep RAM section S2 of RAM1 on or off in System ON mode																											
D	W	S3POWER	On	1	Keep RAM section S3 of RAM1 on or off in System ON mode																											
E	W	S4POWER	On	1	Keep RAM section S4 of RAM1 on or off in System ON mode																											
F	W	S5POWER	On	1	Keep RAM section S5 of RAM1 on or off in System ON mode																											
G	W	S6POWER	On	1	Keep RAM section S6 of RAM1 on or off in System ON mode																											
H	W	S7POWER	On	1	Keep RAM section S7 of RAM1 on or off in System ON mode																											
I	W	S8POWER	On	1	Keep RAM section S8 of RAM1 on or off in System ON mode																											
J	W	S9POWER	On	1	Keep RAM section S9 of RAM1 on or off in System ON mode																											
K	W	S10POWER	On	1	Keep RAM section S10 of RAM1 on or off in System ON mode																											
L	W	S11POWER	On	1	Keep RAM section S11 of RAM1 on or off in System ON mode																											
M	W	S12POWER	On	1	Keep RAM section S12 of RAM1 on or off in System ON mode																											
N	W	S13POWER	On	1	Keep RAM section S13 of RAM1 on or off in System ON mode																											
O	W	S14POWER	On	1	Keep RAM section S14 of RAM1 on or off in System ON mode																											
P	W	S15POWER	On	1	Keep RAM section S15 of RAM1 on or off in System ON mode																											
Q	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																											
R	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																											
S	W	S2RETENTION	On	1	Keep retention on RAM section S2 when RAM section is switched off																											
T	W	S3RETENTION	On	1	Keep retention on RAM section S3 when RAM section is switched off																											
U	W	S4RETENTION	On	1	Keep retention on RAM section S4 when RAM section is switched off																											

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
V	W	S5RETENTION	On	1	On	Keep retention on RAM section S5 when RAM section is switched off																													
W	W	S6RETENTION	On	1	On	Keep retention on RAM section S6 when RAM section is switched off																													
X	W	S7RETENTION	On	1	On	Keep retention on RAM section S7 when RAM section is switched off																													
Y	W	S8RETENTION	On	1	On	Keep retention on RAM section S8 when RAM section is switched off																													
Z	W	S9RETENTION	On	1	On	Keep retention on RAM section S9 when RAM section is switched off																													
a	W	S10RETENTION	On	1	On	Keep retention on RAM section S10 when RAM section is switched off																													
b	W	S11RETENTION	On	1	On	Keep retention on RAM section S11 when RAM section is switched off																													
c	W	S12RETENTION	On	1	On	Keep retention on RAM section S12 when RAM section is switched off																													
d	W	S13RETENTION	On	1	On	Keep retention on RAM section S13 when RAM section is switched off																													
e	W	S14RETENTION	On	1	On	Keep retention on RAM section S14 when RAM section is switched off																													
f	W	S15RETENTION	On	1	On	Keep retention on RAM section S15 when RAM section is switched off																													

## 16.9.18 RAM[1].POWERCLR

Address offset: 0x918

RAM1 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																														
A	W	S0POWER	Off	1	Off	Keep RAM section S0 of RAM1 on or off in System ON mode																														
B	W	S1POWER	Off	1	Off	Keep RAM section S1 of RAM1 on or off in System ON mode																														
C	W	S2POWER	Off	1	Off	Keep RAM section S2 of RAM1 on or off in System ON mode																														
D	W	S3POWER	Off	1	Off	Keep RAM section S3 of RAM1 on or off in System ON mode																														
E	W	S4POWER	Off	1	Off	Keep RAM section S4 of RAM1 on or off in System ON mode																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM1 on or off in System ON mode																														
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM1 on or off in System ON mode																														
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM1 on or off in System ON mode																														
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM1 on or off in System ON mode																														
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM1 on or off in System ON mode																														
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM1 on or off in System ON mode																														
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM1 on or off in System ON mode																														
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM1 on or off in System ON mode																														
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM1 on or off in System ON mode																														
O	W	S14POWER	Off	1	Keep RAM section S14 of RAM1 on or off in System ON mode																														
P	W	S15POWER	Off	1	Keep RAM section S15 of RAM1 on or off in System ON mode																														
Q	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off																														
R	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off																														
S	W	S2RETENTION	Off	1	Keep retention on RAM section S2 when RAM section is switched off																														
T	W	S3RETENTION	Off	1	Keep retention on RAM section S3 when RAM section is switched off																														
U	W	S4RETENTION	Off	1	Keep retention on RAM section S4 when RAM section is switched off																														
V	W	S5RETENTION	Off	1	Keep retention on RAM section S5 when RAM section is switched off																														
W	W	S6RETENTION	Off	1	Keep retention on RAM section S6 when RAM section is switched off																														
X	W	S7RETENTION	Off	1	Keep retention on RAM section S7 when RAM section is switched off																														
Y	W	S8RETENTION	Off	1	Keep retention on RAM section S8 when RAM section is switched off																														
Z	W	S9RETENTION	Off	1	Keep retention on RAM section S9 when RAM section is switched off																														
a	W	S10RETENTION	Off	1	Keep retention on RAM section S10 when RAM section is switched off																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
b	W	S11RETENTION			Keep retention on RAM section S11 when RAM section is switched off																																	
			Off	1	Off																																	
c	W	S12RETENTION			Keep retention on RAM section S12 when RAM section is switched off																																	
			Off	1	Off																																	
d	W	S13RETENTION			Keep retention on RAM section S13 when RAM section is switched off																																	
			Off	1	Off																																	
e	W	S14RETENTION			Keep retention on RAM section S14 when RAM section is switched off																																	
			Off	1	Off																																	
f	W	S15RETENTION			Keep retention on RAM section S15 when RAM section is switched off																																	
			Off	1	Off																																	

## 16.9.19 RAM[2].POWER

Address offset: 0x920

RAM2 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER			Keep RAM section S2 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																
Id	RW	Field	Value Id	Value	Description																															
			Off	0	Off																															
			On	1	On																															
			Keep RAM section S5 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.																																	
F	RW	S5POWER	Off	0	Off																															
			On	1	On																															
G	RW	S6POWER	Keep RAM section S6 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
H	RW	S7POWER	Keep RAM section S7 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
I	RW	S8POWER	Keep RAM section S8 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
J	RW	S9POWER	Keep RAM section S9 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
K	RW	S10POWER	Keep RAM section S10 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
L	RW	S11POWER	Keep RAM section S11 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S11RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															
M	RW	S12POWER	Keep RAM section S12 ON or OFF in System ON mode.																																	
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S12RETENTION. All RAM sections will be OFF in System OFF mode.																																	
			Off	0	Off																															
			On	1	On																															



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
N	RW	S13POWER	On	1	On																														
					Keep RAM section S13 ON or OFF in System ON mode.																														
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S13RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																														
			On	1	On																														
O	RW	S14POWER			Keep RAM section S14 ON or OFF in System ON mode.																														
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S14RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																														
					On	1	On																												
P	RW	S15POWER			Keep RAM section S15 ON or OFF in System ON mode.																														
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S15RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																														
					On	1	On																												
Q	RW	S0RETENTION	Off	0	Off																														
			On	1	On																														
R	RW	S1RETENTION	Off	0	Off																														
			On	1	On																														
S	RW	S2RETENTION	Off	0	Off																														
			On	1	On																														
T	RW	S3RETENTION	Off	0	Off																														
			On	1	On																														
U	RW	S4RETENTION	Off	0	Off																														
			On	1	On																														
V	RW	S5RETENTION	Off	0	Off																														
			On	1	On																														
W	RW	S6RETENTION	Off	0	Off																														
			On	1	On																														
X	RW	S7RETENTION	Off	0	Off																														
			On	1	On																														
Y	RW	S8RETENTION	Off	0	Off																														
			On	1	On																														
Z	RW	S9RETENTION	Off	0	Off																														
			On	1	On																														
a	RW	S10RETENTION	Off	0	Off																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
b	RW	S11RETENTION	On	1	On																														
			Off	0	Off																														
			On	1	On																														
c	RW	S12RETENTION	On	1	On																														
			Off	0	Off																														
			On	1	On																														
d	RW	S13RETENTION	On	1	On																														
			Off	0	Off																														
			On	1	On																														
e	RW	S14RETENTION	On	1	On																														
			Off	0	Off																														
			On	1	On																														
f	RW	S15RETENTION	On	1	On																														
			Off	0	Off																														
			On	1	On																														

### 16.9.20 RAM[2].POWERSET

Address offset: 0x924

## RAM2 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																														
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																														
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>																											<b>Description</b>			
A	W	S0POWER	On	1																											Keep RAM section S0 of RAM2 on or off in System ON mode			
B	W	S1POWER	On	1																											Keep RAM section S1 of RAM2 on or off in System ON mode			
C	W	S2POWER	On	1																											Keep RAM section S2 of RAM2 on or off in System ON mode			
D	W	S3POWER	On	1																											Keep RAM section S3 of RAM2 on or off in System ON mode			
E	W	S4POWER	On	1																											Keep RAM section S4 of RAM2 on or off in System ON mode			
F	W	S5POWER	On	1																											Keep RAM section S5 of RAM2 on or off in System ON mode			
G	W	S6POWER	On	1																											Keep RAM section S6 of RAM2 on or off in System ON mode			
H	W	S7POWER	On	1																											Keep RAM section S7 of RAM2 on or off in System ON mode			
I	W	S8POWER	On	1																											Keep RAM section S8 of RAM2 on or off in System ON mode			
J	W	S9POWER	On	1																											Keep RAM section S9 of RAM2 on or off in System ON mode			
K	W	S10POWER	On	1																											Keep RAM section S10 of RAM2 on or off in System ON mode			
L	W	S11POWER	On	1																											Keep RAM section S11 of RAM2 on or off in System ON mode			
M	W	S12POWER	On	1																											Keep RAM section S12 of RAM2 on or off in System ON mode			
N	W	S13POWER																													Keep RAM section S13 of RAM2 on or off in System ON mode			

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			On	1	On																														
O	W	S14POWER	On	1	Keep RAM section S14 of RAM2 on or off in System ON mode																														
			On	1	On																														
P	W	S15POWER	On	1	Keep RAM section S15 of RAM2 on or off in System ON mode																														
			On	1	On																														
Q	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																														
			On	1	On																														
R	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																														
			On	1	On																														
S	W	S2RETENTION	On	1	Keep retention on RAM section S2 when RAM section is switched off																														
			On	1	On																														
T	W	S3RETENTION	On	1	Keep retention on RAM section S3 when RAM section is switched off																														
			On	1	On																														
U	W	S4RETENTION	On	1	Keep retention on RAM section S4 when RAM section is switched off																														
			On	1	On																														
V	W	S5RETENTION	On	1	Keep retention on RAM section S5 when RAM section is switched off																														
			On	1	On																														
W	W	S6RETENTION	On	1	Keep retention on RAM section S6 when RAM section is switched off																														
			On	1	On																														
X	W	S7RETENTION	On	1	Keep retention on RAM section S7 when RAM section is switched off																														
			On	1	On																														
Y	W	S8RETENTION	On	1	Keep retention on RAM section S8 when RAM section is switched off																														
			On	1	On																														
Z	W	S9RETENTION	On	1	Keep retention on RAM section S9 when RAM section is switched off																														
			On	1	On																														
a	W	S10RETENTION	On	1	Keep retention on RAM section S10 when RAM section is switched off																														
			On	1	On																														
b	W	S11RETENTION	On	1	Keep retention on RAM section S11 when RAM section is switched off																														
			On	1	On																														
c	W	S12RETENTION	On	1	Keep retention on RAM section S12 when RAM section is switched off																														
			On	1	On																														
d	W	S13RETENTION	On	1	Keep retention on RAM section S13 when RAM section is switched off																														
			On	1	On																														
e	W	S14RETENTION	On	1	Keep retention on RAM section S14 when RAM section is switched off																														
			On	1	On																														
f	W	S15RETENTION	On	1	Keep retention on RAM section S15 when RAM section is switched off																														
			On	1	On																														

## 16.9.21 RAM[2].POWERCLR

Address offset: 0x928

RAM2 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM2 on or off in System ON mode Off																														
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM2 on or off in System ON mode Off																														
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM2 on or off in System ON mode Off																														
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM2 on or off in System ON mode Off																														
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM2 on or off in System ON mode Off																														
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM2 on or off in System ON mode Off																														
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM2 on or off in System ON mode Off																														
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM2 on or off in System ON mode Off																														
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM2 on or off in System ON mode Off																														
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM2 on or off in System ON mode Off																														
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM2 on or off in System ON mode Off																														
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM2 on or off in System ON mode Off																														
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM2 on or off in System ON mode Off																														
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM2 on or off in System ON mode Off																														
O	W	S14POWER	Off	1	Keep RAM section S14 of RAM2 on or off in System ON mode Off																														
P	W	S15POWER	Off	1	Keep RAM section S15 of RAM2 on or off in System ON mode Off																														
Q	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off Off																														
R	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off Off																														
S	W	S2RETENTION	Off	1	Keep retention on RAM section S2 when RAM section is switched off Off																														
T	W	S3RETENTION	Off	1	Keep retention on RAM section S3 when RAM section is switched off Off																														
U	W	S4RETENTION	Off	1	Keep retention on RAM section S4 when RAM section is switched off Off																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
V	W	S5RETENTION	Off	1	Keep retention on RAM section S5 when RAM section is switched off																														
W	W	S6RETENTION	Off	1	Keep retention on RAM section S6 when RAM section is switched off																														
X	W	S7RETENTION	Off	1	Keep retention on RAM section S7 when RAM section is switched off																														
Y	W	S8RETENTION	Off	1	Keep retention on RAM section S8 when RAM section is switched off																														
Z	W	S9RETENTION	Off	1	Keep retention on RAM section S9 when RAM section is switched off																														
a	W	S10RETENTION	Off	1	Keep retention on RAM section S10 when RAM section is switched off																														
b	W	S11RETENTION	Off	1	Keep retention on RAM section S11 when RAM section is switched off																														
c	W	S12RETENTION	Off	1	Keep retention on RAM section S12 when RAM section is switched off																														
d	W	S13RETENTION	Off	1	Keep retention on RAM section S13 when RAM section is switched off																														
e	W	S14RETENTION	Off	1	Keep retention on RAM section S14 when RAM section is switched off																														
f	W	S15RETENTION	Off	1	Keep retention on RAM section S15 when RAM section is switched off																														

## 16.9.22 RAM[3].POWER

Address offset: 0x930

RAM3 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																			
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																																		
			Off	0	Off																																		
			On	1	On																																		
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																																		
					All RAM sections will be OFF in System OFF mode.																																		
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																																		
			Off	0	Off																																		
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																																		
					All RAM sections will be OFF in System OFF mode.																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
C	RW	S2POWER	On	1	On																																	
			Keep RAM section S2 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
D	RW	S3POWER	On	1	On																																	
			Keep RAM section S3 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
E	RW	S4POWER	On	1	On																																	
			Keep RAM section S4 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
F	RW	S5POWER	On	1	On																																	
			Keep RAM section S5 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
G	RW	S6POWER	On	1	On																																	
			Keep RAM section S6 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
H	RW	S7POWER	On	1	On																																	
			Keep RAM section S7 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
I	RW	S8POWER	On	1	On																																	
			Keep RAM section S8 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
J	RW	S9POWER	On	1	On																																	
			Keep RAM section S9 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION.																																			
			All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
K	RW	S10POWER	On	1	On																																	
			Keep RAM section S10 ON or OFF in System ON mode.																																			



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
U	RW	S4RETENTION			Keep retention on RAM section S4 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
V	RW	S5RETENTION			Keep retention on RAM section S5 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
W	RW	S6RETENTION			Keep retention on RAM section S6 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
X	RW	S7RETENTION			Keep retention on RAM section S7 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
Y	RW	S8RETENTION			Keep retention on RAM section S8 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
Z	RW	S9RETENTION			Keep retention on RAM section S9 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
a	RW	S10RETENTION			Keep retention on RAM section S10 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
b	RW	S11RETENTION			Keep retention on RAM section S11 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
c	RW	S12RETENTION			Keep retention on RAM section S12 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
d	RW	S13RETENTION			Keep retention on RAM section S13 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
e	RW	S14RETENTION			Keep retention on RAM section S14 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
f	RW	S15RETENTION			Keep retention on RAM section S15 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	

## 16.9.23 RAM[3].POWERSET

Address offset: 0x934

RAM3 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	On	1	Keep RAM section S0 of RAM3 on or off in System ON mode																														
B	W	S1POWER	On	1	Keep RAM section S1 of RAM3 on or off in System ON mode																														
C	W	S2POWER	On	1	Keep RAM section S2 of RAM3 on or off in System ON mode																														
D	W	S3POWER			Keep RAM section S3 of RAM3 on or off in System ON mode																														



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
			On	1	On																																	
E	W	S4POWER	On	1	Keep RAM section S4 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
F	W	S5POWER	On	1	Keep RAM section S5 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
G	W	S6POWER	On	1	Keep RAM section S6 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
H	W	S7POWER	On	1	Keep RAM section S7 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
I	W	S8POWER	On	1	Keep RAM section S8 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
J	W	S9POWER	On	1	Keep RAM section S9 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
K	W	S10POWER	On	1	Keep RAM section S10 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
L	W	S11POWER	On	1	Keep RAM section S11 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
M	W	S12POWER	On	1	Keep RAM section S12 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
N	W	S13POWER	On	1	Keep RAM section S13 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
O	W	S14POWER	On	1	Keep RAM section S14 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
P	W	S15POWER	On	1	Keep RAM section S15 of RAM3 on or off in System ON mode																																	
			On	1	On																																	
Q	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																	
			On	1	On																																	
R	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																	
			On	1	On																																	
S	W	S2RETENTION	On	1	Keep retention on RAM section S2 when RAM section is switched off																																	
			On	1	On																																	
T	W	S3RETENTION	On	1	Keep retention on RAM section S3 when RAM section is switched off																																	
			On	1	On																																	
U	W	S4RETENTION	On	1	Keep retention on RAM section S4 when RAM section is switched off																																	
			On	1	On																																	
V	W	S5RETENTION	On	1	Keep retention on RAM section S5 when RAM section is switched off																																	
			On	1	On																																	
W	W	S6RETENTION	On	1	Keep retention on RAM section S6 when RAM section is switched off																																	
			On	1	On																																	
X	W	S7RETENTION	On	1	Keep retention on RAM section S7 when RAM section is switched off																																	
			On	1	On																																	
Y	W	S8RETENTION	On	1	Keep retention on RAM section S8 when RAM section is switched off																																	
			On	1	On																																	
Z	W	S9RETENTION	On	1	Keep retention on RAM section S9 when RAM section is switched off																																	
			On	1	On																																	

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																															
a	W	S10RETENTION	On	1	Keep retention on RAM section S10 when RAM section is switched off																															
b	W	S11RETENTION	On	1	Keep retention on RAM section S11 when RAM section is switched off																															
c	W	S12RETENTION	On	1	Keep retention on RAM section S12 when RAM section is switched off																															
d	W	S13RETENTION	On	1	Keep retention on RAM section S13 when RAM section is switched off																															
e	W	S14RETENTION	On	1	Keep retention on RAM section S14 when RAM section is switched off																															
f	W	S15RETENTION	On	1	Keep retention on RAM section S15 when RAM section is switched off																															

## 16.9.24 RAM[3].POWERCLR

Address offset: 0x938

RAM3 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM3 on or off in System ON mode Off																														
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM3 on or off in System ON mode Off																														
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM3 on or off in System ON mode Off																														
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM3 on or off in System ON mode Off																														
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM3 on or off in System ON mode Off																														
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM3 on or off in System ON mode Off																														
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM3 on or off in System ON mode Off																														
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM3 on or off in System ON mode Off																														
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM3 on or off in System ON mode Off																														
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM3 on or off in System ON mode Off																														
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM3 on or off in System ON mode Off																														
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM3 on or off in System ON mode Off																														
M	W	S12POWER			Keep RAM section S12 of RAM3 on or off in System ON mode																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value				Description																											
			Off	1				Off																											
N	W	S13POWER	Off	1				Keep RAM section S13 of RAM3 on or off in System ON mode																											
			Off	1				Off																											
O	W	S14POWER	Off	1				Keep RAM section S14 of RAM3 on or off in System ON mode																											
			Off	1				Off																											
P	W	S15POWER	Off	1				Keep RAM section S15 of RAM3 on or off in System ON mode																											
			Off	1				Off																											
Q	W	S0RETENTION						Keep retention on RAM section S0 when RAM section is switched off																											
			Off	1				Off																											
R	W	S1RETENTION						Keep retention on RAM section S1 when RAM section is switched off																											
			Off	1				Off																											
S	W	S2RETENTION						Keep retention on RAM section S2 when RAM section is switched off																											
			Off	1				Off																											
T	W	S3RETENTION						Keep retention on RAM section S3 when RAM section is switched off																											
			Off	1				Off																											
U	W	S4RETENTION						Keep retention on RAM section S4 when RAM section is switched off																											
			Off	1				Off																											
V	W	S5RETENTION						Keep retention on RAM section S5 when RAM section is switched off																											
			Off	1				Off																											
W	W	S6RETENTION						Keep retention on RAM section S6 when RAM section is switched off																											
			Off	1				Off																											
X	W	S7RETENTION						Keep retention on RAM section S7 when RAM section is switched off																											
			Off	1				Off																											
Y	W	S8RETENTION						Keep retention on RAM section S8 when RAM section is switched off																											
			Off	1				Off																											
Z	W	S9RETENTION						Keep retention on RAM section S9 when RAM section is switched off																											
			Off	1				Off																											
a	W	S10RETENTION						Keep retention on RAM section S10 when RAM section is switched off																											
			Off	1				Off																											
b	W	S11RETENTION						Keep retention on RAM section S11 when RAM section is switched off																											
			Off	1				Off																											
c	W	S12RETENTION						Keep retention on RAM section S12 when RAM section is switched off																											
			Off	1				Off																											
d	W	S13RETENTION						Keep retention on RAM section S13 when RAM section is switched off																											
			Off	1				Off																											
e	W	S14RETENTION						Keep retention on RAM section S14 when RAM section is switched off																											
			Off	1				Off																											
f	W	S15RETENTION						Keep retention on RAM section S15 when RAM section is switched off																											
			Off	1				Off																											

## 16.9.25 RAM[4].POWER

Address offset: 0x940

RAM4 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER			Keep RAM section S2 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
F	RW	S5POWER			Keep RAM section S5 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
G	RW	S6POWER			Keep RAM section S6 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
H	RW	S7POWER			Keep RAM section S7 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			f e d c b a z Y X W V U T S R Q P O N M L K J I H G F E D C B A																														
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																														
Id	RW	Field	Value Id	Value	Description																												
I	RW	S8POWER	On	1	On																												
			Keep RAM section S8 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
J	RW	S9POWER	On	1	On																												
			Keep RAM section S9 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
K	RW	S10POWER	On	1	On																												
			Keep RAM section S10 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
L	RW	S11POWER	On	1	On																												
			Keep RAM section S11 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S11RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
M	RW	S12POWER	On	1	On																												
			Keep RAM section S12 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S12RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
N	RW	S13POWER	On	1	On																												
			Keep RAM section S13 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S13RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
O	RW	S14POWER	On	1	On																												
			Keep RAM section S14 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S14RETENTION. All RAM sections will be OFF in System OFF mode.																														
			Off	0	Off																												
P	RW	S15POWER	On	1	On																												
			Keep RAM section S15 ON or OFF in System ON mode.																														
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value		Description																												
				Off	0		S15RETENTION. All RAM sections will be OFF in System OFF mode.																												
				On	1		Off																												
Q	RW	S0RETENTION	Off	0		Keep retention on RAM section S0 when RAM section is in OFF																													
				On	1		Off																												
R	RW	S1RETENTION	Off	0		Keep retention on RAM section S1 when RAM section is in OFF																													
				On	1		Off																												
S	RW	S2RETENTION	Off	0		Keep retention on RAM section S2 when RAM section is in OFF																													
				On	1		Off																												
T	RW	S3RETENTION	Off	0		Keep retention on RAM section S3 when RAM section is in OFF																													
				On	1		Off																												
U	RW	S4RETENTION	Off	0		Keep retention on RAM section S4 when RAM section is in OFF																													
				On	1		Off																												
V	RW	S5RETENTION	Off	0		Keep retention on RAM section S5 when RAM section is in OFF																													
				On	1		Off																												
W	RW	S6RETENTION	Off	0		Keep retention on RAM section S6 when RAM section is in OFF																													
				On	1		Off																												
X	RW	S7RETENTION	Off	0		Keep retention on RAM section S7 when RAM section is in OFF																													
				On	1		Off																												
Y	RW	S8RETENTION	Off	0		Keep retention on RAM section S8 when RAM section is in OFF																													
				On	1		Off																												
Z	RW	S9RETENTION	Off	0		Keep retention on RAM section S9 when RAM section is in OFF																													
				On	1		Off																												
a	RW	S10RETENTION	Off	0		Keep retention on RAM section S10 when RAM section is in OFF																													
				On	1		Off																												
b	RW	S11RETENTION	Off	0		Keep retention on RAM section S11 when RAM section is in OFF																													
				On	1		Off																												
c	RW	S12RETENTION	Off	0		Keep retention on RAM section S12 when RAM section is in OFF																													
				On	1		Off																												
d	RW	S13RETENTION	Off	0		Keep retention on RAM section S13 when RAM section is in OFF																													
				On	1		Off																												
e	RW	S14RETENTION	Off	0		Keep retention on RAM section S14 when RAM section is in OFF																													
				On	1		Off																												
f	RW	S15RETENTION	Off	0		Keep retention on RAM section S15 when RAM section is in OFF																													
				On	1		Off																												

## 16.9.26 RAM[4].POWERSET

Address offset: 0x944

RAM4 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																												
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																												
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1																												
Id	RW	Field	Value Id	Value	Description																											
A	W	S0POWER	On	1	Keep RAM section S0 of RAM4 on or off in System ON mode																											
B	W	S1POWER	On	1	Keep RAM section S1 of RAM4 on or off in System ON mode																											
C	W	S2POWER	On	1	Keep RAM section S2 of RAM4 on or off in System ON mode																											
D	W	S3POWER	On	1	Keep RAM section S3 of RAM4 on or off in System ON mode																											
E	W	S4POWER	On	1	Keep RAM section S4 of RAM4 on or off in System ON mode																											
F	W	S5POWER	On	1	Keep RAM section S5 of RAM4 on or off in System ON mode																											
G	W	S6POWER	On	1	Keep RAM section S6 of RAM4 on or off in System ON mode																											
H	W	S7POWER	On	1	Keep RAM section S7 of RAM4 on or off in System ON mode																											
I	W	S8POWER	On	1	Keep RAM section S8 of RAM4 on or off in System ON mode																											
J	W	S9POWER	On	1	Keep RAM section S9 of RAM4 on or off in System ON mode																											
K	W	S10POWER	On	1	Keep RAM section S10 of RAM4 on or off in System ON mode																											
L	W	S11POWER	On	1	Keep RAM section S11 of RAM4 on or off in System ON mode																											
M	W	S12POWER	On	1	Keep RAM section S12 of RAM4 on or off in System ON mode																											
N	W	S13POWER	On	1	Keep RAM section S13 of RAM4 on or off in System ON mode																											
O	W	S14POWER	On	1	Keep RAM section S14 of RAM4 on or off in System ON mode																											
P	W	S15POWER	On	1	Keep RAM section S15 of RAM4 on or off in System ON mode																											
Q	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																											
R	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																											
S	W	S2RETENTION	On	1	Keep retention on RAM section S2 when RAM section is switched off																											
T	W	S3RETENTION	On	1	Keep retention on RAM section S3 when RAM section is switched off																											
U	W	S4RETENTION	On	1	Keep retention on RAM section S4 when RAM section is switched off																											

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
V	W	S5RETENTION	On	1	Keep retention on RAM section S5 when RAM section is switched off																														
W	W	S6RETENTION	On	1	Keep retention on RAM section S6 when RAM section is switched off																														
X	W	S7RETENTION	On	1	Keep retention on RAM section S7 when RAM section is switched off																														
Y	W	S8RETENTION	On	1	Keep retention on RAM section S8 when RAM section is switched off																														
Z	W	S9RETENTION	On	1	Keep retention on RAM section S9 when RAM section is switched off																														
a	W	S10RETENTION	On	1	Keep retention on RAM section S10 when RAM section is switched off																														
b	W	S11RETENTION	On	1	Keep retention on RAM section S11 when RAM section is switched off																														
c	W	S12RETENTION	On	1	Keep retention on RAM section S12 when RAM section is switched off																														
d	W	S13RETENTION	On	1	Keep retention on RAM section S13 when RAM section is switched off																														
e	W	S14RETENTION	On	1	Keep retention on RAM section S14 when RAM section is switched off																														
f	W	S15RETENTION	On	1	Keep retention on RAM section S15 when RAM section is switched off																														

## 16.9.27 RAM[4].POWERCLR

Address offset: 0x948

RAM4 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	W	S0POWER	Off	1	Off	Keep RAM section S0 of RAM4 on or off in System ON mode																														
B	W	S1POWER	Off	1	Off	Keep RAM section S1 of RAM4 on or off in System ON mode																														
C	W	S2POWER	Off	1	Off	Keep RAM section S2 of RAM4 on or off in System ON mode																														
D	W	S3POWER	Off	1	Off	Keep RAM section S3 of RAM4 on or off in System ON mode																														
E	W	S4POWER	Off	1	Off	Keep RAM section S4 of RAM4 on or off in System ON mode																														



Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id						f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																																	
F	W	S5POWER	Off		1	Keep RAM section S5 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
G	W	S6POWER	Off		1	Keep RAM section S6 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
H	W	S7POWER	Off		1	Keep RAM section S7 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
I	W	S8POWER	Off		1	Keep RAM section S8 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
J	W	S9POWER	Off		1	Keep RAM section S9 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
K	W	S10POWER	Off		1	Keep RAM section S10 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
L	W	S11POWER	Off		1	Keep RAM section S11 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
M	W	S12POWER	Off		1	Keep RAM section S12 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
N	W	S13POWER	Off		1	Keep RAM section S13 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
O	W	S14POWER	Off		1	Keep RAM section S14 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
P	W	S15POWER	Off		1	Keep RAM section S15 of RAM4 on or off in System ON mode																																	
			Off		1	Off																																	
Q	W	S0RETENTION				Keep retention on RAM section S0 when RAM section is switched off																																	
			Off		1	Off																																	
R	W	S1RETENTION				Keep retention on RAM section S1 when RAM section is switched off																																	
			Off		1	Off																																	
S	W	S2RETENTION				Keep retention on RAM section S2 when RAM section is switched off																																	
			Off		1	Off																																	
T	W	S3RETENTION				Keep retention on RAM section S3 when RAM section is switched off																																	
			Off		1	Off																																	
U	W	S4RETENTION				Keep retention on RAM section S4 when RAM section is switched off																																	
			Off		1	Off																																	
V	W	S5RETENTION				Keep retention on RAM section S5 when RAM section is switched off																																	
			Off		1	Off																																	
W	W	S6RETENTION				Keep retention on RAM section S6 when RAM section is switched off																																	
			Off		1	Off																																	
X	W	S7RETENTION				Keep retention on RAM section S7 when RAM section is switched off																																	
			Off		1	Off																																	
Y	W	S8RETENTION				Keep retention on RAM section S8 when RAM section is switched off																																	
			Off		1	Off																																	
Z	W	S9RETENTION				Keep retention on RAM section S9 when RAM section is switched off																																	
			Off		1	Off																																	
a	W	S10RETENTION				Keep retention on RAM section S10 when RAM section is switched off																																	
			Off		1	Off																																	

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																																				
b	W	S11RETENTION	Off	1	Off	Keep retention on RAM section S11 when RAM section is switched off																																				
c	W	S12RETENTION	Off	1	Off	Keep retention on RAM section S12 when RAM section is switched off																																				
d	W	S13RETENTION	Off	1	Off	Keep retention on RAM section S13 when RAM section is switched off																																				
e	W	S14RETENTION	Off	1	Off	Keep retention on RAM section S14 when RAM section is switched off																																				
f	W	S15RETENTION	Off	1	Off	Keep retention on RAM section S15 when RAM section is switched off																																				

## 16.9.28 RAM[5].POWER

Address offset: 0x950

RAM5 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																												
A	RW	S0POWER				Keep RAM section S0 ON or OFF in System ON mode.																												
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																												
						All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER				Keep RAM section S1 ON or OFF in System ON mode.																												
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																												
						All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER				Keep RAM section S2 ON or OFF in System ON mode.																												
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																												
						All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER				Keep RAM section S3 ON or OFF in System ON mode.																												
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																												
						All RAM sections will be OFF in System OFF mode.																												
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER				Keep RAM section S4 ON or OFF in System ON mode.																												
						RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																												
						All RAM sections will be OFF in System OFF mode.																												

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
F	RW	S5POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S5 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.																															
G	RW	S6POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S6 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.																															
H	RW	S7POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S7 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.																															
I	RW	S8POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S8 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.																															
J	RW	S9POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S9 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.																															
K	RW	S10POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S10 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.																															
L	RW	S11POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S11 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S11RETENTION. All RAM sections will be OFF in System OFF mode.																															
M	RW	S12POWER	Off	0	Off																													
			On	1	On																													
			Keep RAM section S12 ON or OFF in System ON mode.																															
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S12RETENTION. All RAM sections will be OFF in System OFF mode.																															

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id			f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																													
N	RW	S13POWER	On	1	On																													
					Keep RAM section S13 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S13RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
O	RW	S14POWER			Keep RAM section S14 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S14RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
P	RW	S15POWER			Keep RAM section S15 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S15RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
Q	RW	S0RETENTION			Keep retention on RAM section S0 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
R	RW	S1RETENTION			Keep retention on RAM section S1 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
S	RW	S2RETENTION			Keep retention on RAM section S2 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
T	RW	S3RETENTION			Keep retention on RAM section S3 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
U	RW	S4RETENTION			Keep retention on RAM section S4 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
V	RW	S5RETENTION			Keep retention on RAM section S5 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
W	RW	S6RETENTION			Keep retention on RAM section S6 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
X	RW	S7RETENTION			Keep retention on RAM section S7 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
Y	RW	S8RETENTION			Keep retention on RAM section S8 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
Z	RW	S9RETENTION			Keep retention on RAM section S9 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
a	RW	S10RETENTION			Keep retention on RAM section S10 when RAM section is in OFF																													
			Off	0	Off																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
b	RW	S11RETENTION	On	1	On																																	
			Off	0	Keep retention on RAM section S11 when RAM section is in OFF																																	
			On	1	Off																																	
c	RW	S12RETENTION	On	1	On																																	
			Off	0	Keep retention on RAM section S12 when RAM section is in OFF																																	
			On	1	Off																																	
d	RW	S13RETENTION	On	1	On																																	
			Off	0	Keep retention on RAM section S13 when RAM section is in OFF																																	
			On	1	Off																																	
e	RW	S14RETENTION	On	1	On																																	
			Off	0	Keep retention on RAM section S14 when RAM section is in OFF																																	
			On	1	Off																																	
f	RW	S15RETENTION	On	1	On																																	
			Off	0	Keep retention on RAM section S15 when RAM section is in OFF																																	
			On	1	Off																																	

## 16.9.29 RAM[5].POWERSET

Address offset: 0x954

RAM5 power control set register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
A	W	S0POWER	On	1	Keep RAM section S0 of RAM5 on or off in System ON mode																																	
B	W	S1POWER	On	1	Keep RAM section S1 of RAM5 on or off in System ON mode																																	
C	W	S2POWER	On	1	Keep RAM section S2 of RAM5 on or off in System ON mode																																	
D	W	S3POWER	On	1	Keep RAM section S3 of RAM5 on or off in System ON mode																																	
E	W	S4POWER	On	1	Keep RAM section S4 of RAM5 on or off in System ON mode																																	
F	W	S5POWER	On	1	Keep RAM section S5 of RAM5 on or off in System ON mode																																	
G	W	S6POWER	On	1	Keep RAM section S6 of RAM5 on or off in System ON mode																																	
H	W	S7POWER	On	1	Keep RAM section S7 of RAM5 on or off in System ON mode																																	
I	W	S8POWER	On	1	Keep RAM section S8 of RAM5 on or off in System ON mode																																	
J	W	S9POWER	On	1	Keep RAM section S9 of RAM5 on or off in System ON mode																																	
K	W	S10POWER	On	1	Keep RAM section S10 of RAM5 on or off in System ON mode																																	
L	W	S11POWER	On	1	Keep RAM section S11 of RAM5 on or off in System ON mode																																	
M	W	S12POWER	On	1	Keep RAM section S12 of RAM5 on or off in System ON mode																																	
N	W	S13POWER			Keep RAM section S13 of RAM5 on or off in System ON mode																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																													
O	W	S14POWER	On	1	On																														
			Keep RAM section S14 of RAM5 on or off in System ON mode																																
P	W	S15POWER	On	1	On																														
			Keep RAM section S15 of RAM5 on or off in System ON mode																																
Q	W	S0RETENTION	On	1	On																														
			Keep retention on RAM section S0 when RAM section is switched off																																
R	W	S1RETENTION	On	1	On																														
			Keep retention on RAM section S1 when RAM section is switched off																																
S	W	S2RETENTION	On	1	On																														
			Keep retention on RAM section S2 when RAM section is switched off																																
T	W	S3RETENTION	On	1	On																														
			Keep retention on RAM section S3 when RAM section is switched off																																
U	W	S4RETENTION	On	1	On																														
			Keep retention on RAM section S4 when RAM section is switched off																																
V	W	S5RETENTION	On	1	On																														
			Keep retention on RAM section S5 when RAM section is switched off																																
W	W	S6RETENTION	On	1	On																														
			Keep retention on RAM section S6 when RAM section is switched off																																
X	W	S7RETENTION	On	1	On																														
			Keep retention on RAM section S7 when RAM section is switched off																																
Y	W	S8RETENTION	On	1	On																														
			Keep retention on RAM section S8 when RAM section is switched off																																
Z	W	S9RETENTION	On	1	On																														
			Keep retention on RAM section S9 when RAM section is switched off																																
a	W	S10RETENTION	On	1	On																														
			Keep retention on RAM section S10 when RAM section is switched off																																
b	W	S11RETENTION	On	1	On																														
			Keep retention on RAM section S11 when RAM section is switched off																																
c	W	S12RETENTION	On	1	On																														
			Keep retention on RAM section S12 when RAM section is switched off																																
d	W	S13RETENTION	On	1	On																														
			Keep retention on RAM section S13 when RAM section is switched off																																
e	W	S14RETENTION	On	1	On																														
			Keep retention on RAM section S14 when RAM section is switched off																																
f	W	S15RETENTION	On	1	On																														
			Keep retention on RAM section S15 when RAM section is switched off																																

## 16.9.30 RAM[5].POWERCLR

Address offset: 0x958

RAM5 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																											
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																											
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1																											
Id	RW	Field	Value Id	Value	Description																										
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM5 on or off in System ON mode Off																										
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM5 on or off in System ON mode Off																										
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM5 on or off in System ON mode Off																										
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM5 on or off in System ON mode Off																										
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM5 on or off in System ON mode Off																										
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM5 on or off in System ON mode Off																										
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM5 on or off in System ON mode Off																										
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM5 on or off in System ON mode Off																										
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM5 on or off in System ON mode Off																										
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM5 on or off in System ON mode Off																										
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM5 on or off in System ON mode Off																										
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM5 on or off in System ON mode Off																										
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM5 on or off in System ON mode Off																										
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM5 on or off in System ON mode Off																										
O	W	S14POWER	Off	1	Keep RAM section S14 of RAM5 on or off in System ON mode Off																										
P	W	S15POWER	Off	1	Keep RAM section S15 of RAM5 on or off in System ON mode Off																										
Q	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off Off																										
R	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off Off																										
S	W	S2RETENTION	Off	1	Keep retention on RAM section S2 when RAM section is switched off Off																										
T	W	S3RETENTION	Off	1	Keep retention on RAM section S3 when RAM section is switched off Off																										
U	W	S4RETENTION	Off	1	Keep retention on RAM section S4 when RAM section is switched off Off																										

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
V	W	S5RETENTION	Off	1	Keep retention on RAM section S5 when RAM section is switched off																														
W	W	S6RETENTION	Off	1	Keep retention on RAM section S6 when RAM section is switched off																														
X	W	S7RETENTION	Off	1	Keep retention on RAM section S7 when RAM section is switched off																														
Y	W	S8RETENTION	Off	1	Keep retention on RAM section S8 when RAM section is switched off																														
Z	W	S9RETENTION	Off	1	Keep retention on RAM section S9 when RAM section is switched off																														
a	W	S10RETENTION	Off	1	Keep retention on RAM section S10 when RAM section is switched off																														
b	W	S11RETENTION	Off	1	Keep retention on RAM section S11 when RAM section is switched off																														
c	W	S12RETENTION	Off	1	Keep retention on RAM section S12 when RAM section is switched off																														
d	W	S13RETENTION	Off	1	Keep retention on RAM section S13 when RAM section is switched off																														
e	W	S14RETENTION	Off	1	Keep retention on RAM section S14 when RAM section is switched off																														
f	W	S15RETENTION	Off	1	Keep retention on RAM section S15 when RAM section is switched off																														

## 16.9.31 RAM[6].POWER

Address offset: 0x960

RAM6 power control register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																			
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																																		
			Off	0	Off																																		
			On	1	On																																		
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																																		
					All RAM sections will be OFF in System OFF mode.																																		
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																																		
			Off	0	Off																																		
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																																		
					All RAM sections will be OFF in System OFF mode.																																		



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
C	RW	S2POWER	On	1	On																																	
			Keep RAM section S2 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
D	RW	S3POWER	On	1	On																																	
			Keep RAM section S3 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
E	RW	S4POWER	On	1	On																																	
			Keep RAM section S4 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
F	RW	S5POWER	On	1	On																																	
			Keep RAM section S5 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
G	RW	S6POWER	On	1	On																																	
			Keep RAM section S6 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
H	RW	S7POWER	On	1	On																																	
			Keep RAM section S7 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
I	RW	S8POWER	On	1	On																																	
			Keep RAM section S8 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
J	RW	S9POWER	On	1	On																																	
			Keep RAM section S9 ON or OFF in System ON mode.																																			
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.																																			
			Off	0	Off																																	
K	RW	S10POWER	On	1	On																																	
			Keep RAM section S10 ON or OFF in System ON mode.																																			
			Off	0	Off																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
L	RW	S11POWER			Keep RAM section S11 ON or OFF in System ON mode.																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S11RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
M	RW	S12POWER			Keep RAM section S12 ON or OFF in System ON mode.																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S12RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
N	RW	S13POWER			Keep RAM section S13 ON or OFF in System ON mode.																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S13RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
O	RW	S14POWER			Keep RAM section S14 ON or OFF in System ON mode.																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S14RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
P	RW	S15POWER			Keep RAM section S15 ON or OFF in System ON mode.																														
			Off	0	RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S15RETENTION. All RAM sections will be OFF in System OFF mode.																														
			On	1	On																														
Q	RW	S0RETENTION			Keep retention on RAM section S0 when RAM section is in OFF																														
			Off	0	Off																														
			On	1	On																														
R	RW	S1RETENTION			Keep retention on RAM section S1 when RAM section is in OFF																														
			Off	0	Off																														
			On	1	On																														
S	RW	S2RETENTION			Keep retention on RAM section S2 when RAM section is in OFF																														
			Off	0	Off																														
			On	1	On																														
T	RW	S3RETENTION			Keep retention on RAM section S3 when RAM section is in OFF																														
			Off	0	Off																														
			On	1	On																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
U	RW	S4RETENTION			Keep retention on RAM section S4 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
V	RW	S5RETENTION			Keep retention on RAM section S5 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
W	RW	S6RETENTION			Keep retention on RAM section S6 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
X	RW	S7RETENTION			Keep retention on RAM section S7 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
Y	RW	S8RETENTION			Keep retention on RAM section S8 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
Z	RW	S9RETENTION			Keep retention on RAM section S9 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
a	RW	S10RETENTION			Keep retention on RAM section S10 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
b	RW	S11RETENTION			Keep retention on RAM section S11 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
c	RW	S12RETENTION			Keep retention on RAM section S12 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
d	RW	S13RETENTION			Keep retention on RAM section S13 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
e	RW	S14RETENTION			Keep retention on RAM section S14 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	
f	RW	S15RETENTION			Keep retention on RAM section S15 when RAM section is in OFF																																	
			Off	0	Off																																	
			On	1	On																																	

## 16.9.32 RAM[6].POWERSET

Address offset: 0x964

RAM6 power control set register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																															
A	W	S0POWER	On	1	Keep RAM section S0 of RAM6 on or off in System ON mode																															
B	W	S1POWER	On	1	Keep RAM section S1 of RAM6 on or off in System ON mode																															
C	W	S2POWER	On	1	Keep RAM section S2 of RAM6 on or off in System ON mode																															
D	W	S3POWER			Keep RAM section S3 of RAM6 on or off in System ON mode																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
			On	1	On																																	
E	W	S4POWER	On	1	Keep RAM section S4 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
F	W	S5POWER	On	1	Keep RAM section S5 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
G	W	S6POWER	On	1	Keep RAM section S6 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
H	W	S7POWER	On	1	Keep RAM section S7 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
I	W	S8POWER	On	1	Keep RAM section S8 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
J	W	S9POWER	On	1	Keep RAM section S9 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
K	W	S10POWER	On	1	Keep RAM section S10 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
L	W	S11POWER	On	1	Keep RAM section S11 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
M	W	S12POWER	On	1	Keep RAM section S12 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
N	W	S13POWER	On	1	Keep RAM section S13 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
O	W	S14POWER	On	1	Keep RAM section S14 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
P	W	S15POWER	On	1	Keep RAM section S15 of RAM6 on or off in System ON mode																																	
			On	1	On																																	
Q	W	S0RETENTION	On	1	Keep retention on RAM section S0 when RAM section is switched off																																	
			On	1	On																																	
R	W	S1RETENTION	On	1	Keep retention on RAM section S1 when RAM section is switched off																																	
			On	1	On																																	
S	W	S2RETENTION	On	1	Keep retention on RAM section S2 when RAM section is switched off																																	
			On	1	On																																	
T	W	S3RETENTION	On	1	Keep retention on RAM section S3 when RAM section is switched off																																	
			On	1	On																																	
U	W	S4RETENTION	On	1	Keep retention on RAM section S4 when RAM section is switched off																																	
			On	1	On																																	
V	W	S5RETENTION	On	1	Keep retention on RAM section S5 when RAM section is switched off																																	
			On	1	On																																	
W	W	S6RETENTION	On	1	Keep retention on RAM section S6 when RAM section is switched off																																	
			On	1	On																																	
X	W	S7RETENTION	On	1	Keep retention on RAM section S7 when RAM section is switched off																																	
			On	1	On																																	
Y	W	S8RETENTION	On	1	Keep retention on RAM section S8 when RAM section is switched off																																	
			On	1	On																																	
Z	W	S9RETENTION	On	1	Keep retention on RAM section S9 when RAM section is switched off																																	
			On	1	On																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
a	W	S10RETENTION	On	1	Keep retention on RAM section S10 when RAM section is switched off																																	
					On																																	
b	W	S11RETENTION	On	1	Keep retention on RAM section S11 when RAM section is switched off																																	
					On																																	
c	W	S12RETENTION	On	1	Keep retention on RAM section S12 when RAM section is switched off																																	
					On																																	
d	W	S13RETENTION	On	1	Keep retention on RAM section S13 when RAM section is switched off																																	
					On																																	
e	W	S14RETENTION	On	1	Keep retention on RAM section S14 when RAM section is switched off																																	
					On																																	
f	W	S15RETENTION	On	1	Keep retention on RAM section S15 when RAM section is switched off																																	
					On																																	

### 16.9.33 RAM[6].POWERCLR

Address offset: 0x968

RAM6 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM6 on or off in System ON mode Off																																	
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM6 on or off in System ON mode Off																																	
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM6 on or off in System ON mode Off																																	
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM6 on or off in System ON mode Off																																	
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM6 on or off in System ON mode Off																																	
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM6 on or off in System ON mode Off																																	
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM6 on or off in System ON mode Off																																	
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM6 on or off in System ON mode Off																																	
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM6 on or off in System ON mode Off																																	
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM6 on or off in System ON mode Off																																	
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM6 on or off in System ON mode Off																																	
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM6 on or off in System ON mode Off																																	
M	W	S12POWER			Keep RAM section S12 of RAM6 on or off in System ON mode																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
			Off	1				Off																											
N	W	S13POWER	Off	1				Keep RAM section S13 of RAM6 on or off in System ON mode																											
			Off	1				Off																											
O	W	S14POWER	Off	1				Keep RAM section S14 of RAM6 on or off in System ON mode																											
			Off	1				Off																											
P	W	S15POWER	Off	1				Keep RAM section S15 of RAM6 on or off in System ON mode																											
			Off	1				Off																											
Q	W	S0RETENTION						Keep retention on RAM section S0 when RAM section is switched off																											
			Off	1				Off																											
R	W	S1RETENTION						Keep retention on RAM section S1 when RAM section is switched off																											
			Off	1				Off																											
S	W	S2RETENTION						Keep retention on RAM section S2 when RAM section is switched off																											
			Off	1				Off																											
T	W	S3RETENTION						Keep retention on RAM section S3 when RAM section is switched off																											
			Off	1				Off																											
U	W	S4RETENTION						Keep retention on RAM section S4 when RAM section is switched off																											
			Off	1				Off																											
V	W	S5RETENTION						Keep retention on RAM section S5 when RAM section is switched off																											
			Off	1				Off																											
W	W	S6RETENTION						Keep retention on RAM section S6 when RAM section is switched off																											
			Off	1				Off																											
X	W	S7RETENTION						Keep retention on RAM section S7 when RAM section is switched off																											
			Off	1				Off																											
Y	W	S8RETENTION						Keep retention on RAM section S8 when RAM section is switched off																											
			Off	1				Off																											
Z	W	S9RETENTION						Keep retention on RAM section S9 when RAM section is switched off																											
			Off	1				Off																											
a	W	S10RETENTION						Keep retention on RAM section S10 when RAM section is switched off																											
			Off	1				Off																											
b	W	S11RETENTION						Keep retention on RAM section S11 when RAM section is switched off																											
			Off	1				Off																											
c	W	S12RETENTION						Keep retention on RAM section S12 when RAM section is switched off																											
			Off	1				Off																											
d	W	S13RETENTION						Keep retention on RAM section S13 when RAM section is switched off																											
			Off	1				Off																											
e	W	S14RETENTION						Keep retention on RAM section S14 when RAM section is switched off																											
			Off	1				Off																											
f	W	S15RETENTION						Keep retention on RAM section S15 when RAM section is switched off																											
			Off	1				Off																											

## 16.9.34 RAM[7].POWER

Address offset: 0x970

RAM7 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER			Keep RAM section S2 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
F	RW	S5POWER			Keep RAM section S5 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
G	RW	S6POWER			Keep RAM section S6 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
H	RW	S7POWER			Keep RAM section S7 ON or OFF in System ON mode.  RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													

Page 128



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value		Description																												
			Off	0		S15RETENTION. All RAM sections will be OFF in System OFF mode.																													
			On	1		Off																													
Q	RW	S0RETENTION	Keep retention on RAM section S0 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
R	RW	S1RETENTION	Keep retention on RAM section S1 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
S	RW	S2RETENTION	Keep retention on RAM section S2 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
T	RW	S3RETENTION	Keep retention on RAM section S3 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
U	RW	S4RETENTION	Keep retention on RAM section S4 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
V	RW	S5RETENTION	Keep retention on RAM section S5 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
W	RW	S6RETENTION	Keep retention on RAM section S6 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
X	RW	S7RETENTION	Keep retention on RAM section S7 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
Y	RW	S8RETENTION	Keep retention on RAM section S8 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
Z	RW	S9RETENTION	Keep retention on RAM section S9 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
a	RW	S10RETENTION	Keep retention on RAM section S10 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
b	RW	S11RETENTION	Keep retention on RAM section S11 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
c	RW	S12RETENTION	Keep retention on RAM section S12 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
d	RW	S13RETENTION	Keep retention on RAM section S13 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
e	RW	S14RETENTION	Keep retention on RAM section S14 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													
f	RW	S15RETENTION	Keep retention on RAM section S15 when RAM section is in OFF																																
			Off	0		Off																													
			On	1		On																													

### 16.9.35 RAM[7].POWERSET

Address offset: 0x974

## RAM7 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																														
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1																														
Id	RW	Field	Value	Id	Value	Description																												
A	W	S0POWER	On	1	On	Keep RAM section S0 of RAM7 on or off in System ON mode																												
B	W	S1POWER	On	1	On	Keep RAM section S1 of RAM7 on or off in System ON mode																												
C	W	S2POWER	On	1	On	Keep RAM section S2 of RAM7 on or off in System ON mode																												
D	W	S3POWER	On	1	On	Keep RAM section S3 of RAM7 on or off in System ON mode																												
E	W	S4POWER	On	1	On	Keep RAM section S4 of RAM7 on or off in System ON mode																												
F	W	S5POWER	On	1	On	Keep RAM section S5 of RAM7 on or off in System ON mode																												
G	W	S6POWER	On	1	On	Keep RAM section S6 of RAM7 on or off in System ON mode																												
H	W	S7POWER	On	1	On	Keep RAM section S7 of RAM7 on or off in System ON mode																												
I	W	S8POWER	On	1	On	Keep RAM section S8 of RAM7 on or off in System ON mode																												
J	W	S9POWER	On	1	On	Keep RAM section S9 of RAM7 on or off in System ON mode																												
K	W	S10POWER	On	1	On	Keep RAM section S10 of RAM7 on or off in System ON mode																												
L	W	S11POWER	On	1	On	Keep RAM section S11 of RAM7 on or off in System ON mode																												
M	W	S12POWER	On	1	On	Keep RAM section S12 of RAM7 on or off in System ON mode																												
N	W	S13POWER	On	1	On	Keep RAM section S13 of RAM7 on or off in System ON mode																												
O	W	S14POWER	On	1	On	Keep RAM section S14 of RAM7 on or off in System ON mode																												
P	W	S15POWER	On	1	On	Keep RAM section S15 of RAM7 on or off in System ON mode																												
Q	W	S0RETENTION	On	1	On	Keep retention on RAM section S0 when RAM section is switched off																												
R	W	S1RETENTION	On	1	On	Keep retention on RAM section S1 when RAM section is switched off																												
S	W	S2RETENTION	On	1	On	Keep retention on RAM section S2 when RAM section is switched off																												
T	W	S3RETENTION	On	1	On	Keep retention on RAM section S3 when RAM section is switched off																												
U	W	S4RETENTION	On	1	On	Keep retention on RAM section S4 when RAM section is switched off																												

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
V	W	S5RETENTION	On	1	On	Keep retention on RAM section S5 when RAM section is switched off																													
W	W	S6RETENTION	On	1	On	Keep retention on RAM section S6 when RAM section is switched off																													
X	W	S7RETENTION	On	1	On	Keep retention on RAM section S7 when RAM section is switched off																													
Y	W	S8RETENTION	On	1	On	Keep retention on RAM section S8 when RAM section is switched off																													
Z	W	S9RETENTION	On	1	On	Keep retention on RAM section S9 when RAM section is switched off																													
a	W	S10RETENTION	On	1	On	Keep retention on RAM section S10 when RAM section is switched off																													
b	W	S11RETENTION	On	1	On	Keep retention on RAM section S11 when RAM section is switched off																													
c	W	S12RETENTION	On	1	On	Keep retention on RAM section S12 when RAM section is switched off																													
d	W	S13RETENTION	On	1	On	Keep retention on RAM section S13 when RAM section is switched off																													
e	W	S14RETENTION	On	1	On	Keep retention on RAM section S14 when RAM section is switched off																													
f	W	S15RETENTION	On	1	On	Keep retention on RAM section S15 when RAM section is switched off																													

## 16.9.36 RAM[7].POWERCLR

Address offset: 0x978

RAM7 power control clear register

When read, this register will return the value of the POWER register.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF					0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																														
A	W	S0POWER	Off	1	Off	Keep RAM section S0 of RAM7 on or off in System ON mode																														
B	W	S1POWER	Off	1	Off	Keep RAM section S1 of RAM7 on or off in System ON mode																														
C	W	S2POWER	Off	1	Off	Keep RAM section S2 of RAM7 on or off in System ON mode																														
D	W	S3POWER	Off	1	Off	Keep RAM section S3 of RAM7 on or off in System ON mode																														
E	W	S4POWER	Off	1	Off	Keep RAM section S4 of RAM7 on or off in System ON mode																														

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id						f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																																	
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM7 on or off in System ON mode																																		
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM7 on or off in System ON mode																																		
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM7 on or off in System ON mode																																		
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM7 on or off in System ON mode																																		
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM7 on or off in System ON mode																																		
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM7 on or off in System ON mode																																		
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM7 on or off in System ON mode																																		
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM7 on or off in System ON mode																																		
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM7 on or off in System ON mode																																		
O	W	S14POWER	Off	1	Keep RAM section S14 of RAM7 on or off in System ON mode																																		
P	W	S15POWER	Off	1	Keep RAM section S15 of RAM7 on or off in System ON mode																																		
Q	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off																																		
R	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off																																		
S	W	S2RETENTION	Off	1	Keep retention on RAM section S2 when RAM section is switched off																																		
T	W	S3RETENTION	Off	1	Keep retention on RAM section S3 when RAM section is switched off																																		
U	W	S4RETENTION	Off	1	Keep retention on RAM section S4 when RAM section is switched off																																		
V	W	S5RETENTION	Off	1	Keep retention on RAM section S5 when RAM section is switched off																																		
W	W	S6RETENTION	Off	1	Keep retention on RAM section S6 when RAM section is switched off																																		
X	W	S7RETENTION	Off	1	Keep retention on RAM section S7 when RAM section is switched off																																		
Y	W	S8RETENTION	Off	1	Keep retention on RAM section S8 when RAM section is switched off																																		
Z	W	S9RETENTION	Off	1	Keep retention on RAM section S9 when RAM section is switched off																																		
a	W	S10RETENTION	Off	1	Keep retention on RAM section S10 when RAM section is switched off																																		

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x0000FFFF					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value Id	Value	Description																																	
b	W	S11RETENTION			Keep retention on RAM section S11 when RAM section is switched off																																	
			Off	1	Off																																	
c	W	S12RETENTION			Keep retention on RAM section S12 when RAM section is switched off																																	
			Off	1	Off																																	
d	W	S13RETENTION			Keep retention on RAM section S13 when RAM section is switched off																																	
			Off	1	Off																																	
e	W	S14RETENTION			Keep retention on RAM section S14 when RAM section is switched off																																	
			Off	1	Off																																	
f	W	S15RETENTION			Keep retention on RAM section S15 when RAM section is switched off																																	
			Off	1	Off																																	

## 16.9.37 RAM[8].POWER

Address offset: 0x980

RAM8 power control register

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			f e d c b a z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	S0POWER			Keep RAM section S0 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S0RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
B	RW	S1POWER			Keep RAM section S1 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S1RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
C	RW	S2POWER			Keep RAM section S2 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S2RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
D	RW	S3POWER			Keep RAM section S3 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S3RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
			On	1	On																													
E	RW	S4POWER			Keep RAM section S4 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S4RETENTION.																													
					All RAM sections will be OFF in System OFF mode.																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			Off	0	Off																														
			On	1	On																														
			Keep RAM section S5 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S5RETENTION. All RAM sections will be OFF in System OFF mode.																																
F	RW	S5POWER	Off	0	Off																														
			On	1	On																														
G	RW	S6POWER	Keep RAM section S6 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S6RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
H	RW	S7POWER	Keep RAM section S7 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S7RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
I	RW	S8POWER	Keep RAM section S8 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S8RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
J	RW	S9POWER	Keep RAM section S9 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S9RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
K	RW	S10POWER	Keep RAM section S10 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S10RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
L	RW	S11POWER	Keep RAM section S11 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S11RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														
			On	1	On																														
M	RW	S12POWER	Keep RAM section S12 ON or OFF in System ON mode.																																
			RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S12RETENTION. All RAM sections will be OFF in System OFF mode.																																
			Off	0	Off																														

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id			f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x0000FFFF			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																													
N	RW	S13POWER	On	1	On																													
					Keep RAM section S13 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S13RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
O	RW	S14POWER	On	1	On																													
					Keep RAM section S14 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S14RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
P	RW	S15POWER	On	1	On																													
					Keep RAM section S15 ON or OFF in System ON mode.																													
					RAM sections are always retained when ON, but can also be retained when OFF dependent on the settings in S15RETENTION. All RAM sections will be OFF in System OFF mode.																													
			Off	0	Off																													
Q	RW	S0RETENTION	On	1	On																													
					Keep retention on RAM section S0 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
R	RW	S1RETENTION	On	1	On																													
					Keep retention on RAM section S1 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
S	RW	S2RETENTION	On	1	On																													
					Keep retention on RAM section S2 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
T	RW	S3RETENTION	On	1	On																													
					Keep retention on RAM section S3 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
U	RW	S4RETENTION	On	1	On																													
					Keep retention on RAM section S4 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
V	RW	S5RETENTION	On	1	On																													
					Keep retention on RAM section S5 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
W	RW	S6RETENTION	On	1	On																													
					Keep retention on RAM section S6 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
X	RW	S7RETENTION	On	1	On																													
					Keep retention on RAM section S7 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
Y	RW	S8RETENTION	On	1	On																													
					Keep retention on RAM section S8 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
Z	RW	S9RETENTION	On	1	On																													
					Keep retention on RAM section S9 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													
a	RW	S10RETENTION	On	1	On																													
					Keep retention on RAM section S10 when RAM section is in OFF																													
			Off	0	Off																													
			On	1	On																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x0000FFFF				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value		Description																																
b	RW	S11RETENTION	On	1		On																																
			Off	0		Off																																
			On	1		On																																
c	RW	S12RETENTION	On	1		On																																
			Off	0		Off																																
			On	1		On																																
d	RW	S13RETENTION	On	1		On																																
			Off	0		Off																																
			On	1		On																																
e	RW	S14RETENTION	On	1		On																																
			Off	0		Off																																
			On	1		On																																
f	RW	S15RETENTION	On	1		On																																
			Off	0		Off																																
			On	1		On																																

### 16.9.38 RAM[8].POWERSET

Address offset: 0x984

## RAM8 power control set register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																														
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																														
Id	RW	Field	Value Id	Value		Description																												
A	W	S0POWER	On	1		Keep RAM section S0 of RAM8 on or off in System ON mode																												
B	W	S1POWER	On	1		Keep RAM section S1 of RAM8 on or off in System ON mode																												
C	W	S2POWER	On	1		Keep RAM section S2 of RAM8 on or off in System ON mode																												
D	W	S3POWER	On	1		Keep RAM section S3 of RAM8 on or off in System ON mode																												
E	W	S4POWER	On	1		Keep RAM section S4 of RAM8 on or off in System ON mode																												
F	W	S5POWER	On	1		Keep RAM section S5 of RAM8 on or off in System ON mode																												
G	W	S6POWER	On	1		Keep RAM section S6 of RAM8 on or off in System ON mode																												
H	W	S7POWER	On	1		Keep RAM section S7 of RAM8 on or off in System ON mode																												
I	W	S8POWER	On	1		Keep RAM section S8 of RAM8 on or off in System ON mode																												
J	W	S9POWER	On	1		Keep RAM section S9 of RAM8 on or off in System ON mode																												
K	W	S10POWER	On	1		Keep RAM section S10 of RAM8 on or off in System ON mode																												
L	W	S11POWER	On	1		Keep RAM section S11 of RAM8 on or off in System ON mode																												
M	W	S12POWER	On	1		Keep RAM section S12 of RAM8 on or off in System ON mode																												
N	W	S13POWER				Keep RAM section S13 of RAM8 on or off in System ON mode																												



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
O	W	S14POWER	On	1	On																														
			On	1	Keep RAM section S14 of RAM8 on or off in System ON mode																														
P	W	S15POWER	On	1	On																														
			On	1	Keep RAM section S15 of RAM8 on or off in System ON mode																														
Q	W	S0RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S0 when RAM section is switched off																														
R	W	S1RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S1 when RAM section is switched off																														
S	W	S2RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S2 when RAM section is switched off																														
T	W	S3RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S3 when RAM section is switched off																														
U	W	S4RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S4 when RAM section is switched off																														
V	W	S5RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S5 when RAM section is switched off																														
W	W	S6RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S6 when RAM section is switched off																														
X	W	S7RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S7 when RAM section is switched off																														
Y	W	S8RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S8 when RAM section is switched off																														
Z	W	S9RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S9 when RAM section is switched off																														
a	W	S10RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S10 when RAM section is switched off																														
b	W	S11RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S11 when RAM section is switched off																														
c	W	S12RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S12 when RAM section is switched off																														
d	W	S13RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S13 when RAM section is switched off																														
e	W	S14RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S14 when RAM section is switched off																														
f	W	S15RETENTION	On	1	On																														
			On	1	Keep retention on RAM section S15 when RAM section is switched off																														

## 16.9.39 RAM[8].POWERCLR

Address offset: 0x988

RAM8 power control clear register

When read, this register will return the value of the POWER register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																																
Id	RW	Field	Value Id	Value	Description																															
A	W	S0POWER	Off	1	Keep RAM section S0 of RAM8 on or off in System ON mode Off																															
B	W	S1POWER	Off	1	Keep RAM section S1 of RAM8 on or off in System ON mode Off																															
C	W	S2POWER	Off	1	Keep RAM section S2 of RAM8 on or off in System ON mode Off																															
D	W	S3POWER	Off	1	Keep RAM section S3 of RAM8 on or off in System ON mode Off																															
E	W	S4POWER	Off	1	Keep RAM section S4 of RAM8 on or off in System ON mode Off																															
F	W	S5POWER	Off	1	Keep RAM section S5 of RAM8 on or off in System ON mode Off																															
G	W	S6POWER	Off	1	Keep RAM section S6 of RAM8 on or off in System ON mode Off																															
H	W	S7POWER	Off	1	Keep RAM section S7 of RAM8 on or off in System ON mode Off																															
I	W	S8POWER	Off	1	Keep RAM section S8 of RAM8 on or off in System ON mode Off																															
J	W	S9POWER	Off	1	Keep RAM section S9 of RAM8 on or off in System ON mode Off																															
K	W	S10POWER	Off	1	Keep RAM section S10 of RAM8 on or off in System ON mode Off																															
L	W	S11POWER	Off	1	Keep RAM section S11 of RAM8 on or off in System ON mode Off																															
M	W	S12POWER	Off	1	Keep RAM section S12 of RAM8 on or off in System ON mode Off																															
N	W	S13POWER	Off	1	Keep RAM section S13 of RAM8 on or off in System ON mode Off																															
O	W	S14POWER	Off	1	Keep RAM section S14 of RAM8 on or off in System ON mode Off																															
P	W	S15POWER	Off	1	Keep RAM section S15 of RAM8 on or off in System ON mode Off																															
Q	W	S0RETENTION	Off	1	Keep retention on RAM section S0 when RAM section is switched off Off																															
R	W	S1RETENTION	Off	1	Keep retention on RAM section S1 when RAM section is switched off Off																															
S	W	S2RETENTION	Off	1	Keep retention on RAM section S2 when RAM section is switched off Off																															
T	W	S3RETENTION	Off	1	Keep retention on RAM section S3 when RAM section is switched off Off																															
U	W	S4RETENTION	Off	1	Keep retention on RAM section S4 when RAM section is switched off Off																															

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x0000FFFF				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1																															
Id	RW	Field	Value	Id	Value	Description																													
V	W	S5RETENTION				Keep retention on RAM section S5 when RAM section is switched off																													
			Off		1	Off																													
W	W	S6RETENTION				Keep retention on RAM section S6 when RAM section is switched off																													
			Off		1	Off																													
X	W	S7RETENTION				Keep retention on RAM section S7 when RAM section is switched off																													
			Off		1	Off																													
Y	W	S8RETENTION				Keep retention on RAM section S8 when RAM section is switched off																													
			Off		1	Off																													
Z	W	S9RETENTION				Keep retention on RAM section S9 when RAM section is switched off																													
			Off		1	Off																													
a	W	S10RETENTION				Keep retention on RAM section S10 when RAM section is switched off																													
			Off		1	Off																													
b	W	S11RETENTION				Keep retention on RAM section S11 when RAM section is switched off																													
			Off		1	Off																													
c	W	S12RETENTION				Keep retention on RAM section S12 when RAM section is switched off																													
			Off		1	Off																													
d	W	S13RETENTION				Keep retention on RAM section S13 when RAM section is switched off																													
			Off		1	Off																													
e	W	S14RETENTION				Keep retention on RAM section S14 when RAM section is switched off																													
			Off		1	Off																													
f	W	S15RETENTION				Keep retention on RAM section S15 when RAM section is switched off																													
			Off		1	Off																													

## 16.10 Electrical specification

### 16.10.1 Operating conditions

Symbol	Description	Min.	Typ.	Max.	Units
$V_{DD,START}$	VDD supply voltage needed during power-on reset.	1.75			V
$V_{DD}$	VDD operating voltage.	1.7	3.0	3.6	V
$V_{DDH}$	VDDH operating voltage.	2.5	3.7	5.5	V
$V_{DDOUT}$	Voltage output on VDD when supplied from internal regulator (REG0). Note: VDDH is the input to REG0.	1.8		3.3	V
$I_{EX,OFF}$	Current draw allowed by external circuitry from VDD during System OFF.			1	mA
$V_{EXDIF}$	Minimum difference between voltage supplied on VDDH pin and voltage output on VDD pin.	0.3			V

### 16.10.2 Current consumption, sleep

Symbol	Description	Min.	Typ.	Max.	Units
$I_{OFF,NV}$	System OFF current, no RAM retention, Normal voltage mode (supply on VDD)		0.4		μA

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>ON,NV</sub>	System ON base current, no RAM retention, Normal voltage mode (supply on VDD)		0.7		μA
I <sub>OFF,HV</sub>	System OFF current, no RAM retention, High voltage mode (supply on VDDH)				μA
I <sub>ON,HV</sub>	System ON base current, no RAM retention, High voltage mode (supply on VDDH)				μA
I <sub>RAM</sub>	Additional RAM retention current per 4 KB RAM section		30		nA

### 16.10.3 Device startup times

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>POR</sub>	Time in power-on reset after VDD reaches V <sub>dd,start</sub> for all supply voltages and temperatures. Dependent on supply rise time.				
t <sub>POR,10us</sub>	VDD rise time 10 us		1	10	ms
t <sub>POR,10ms</sub>	VDD rise time 10 ms		9		ms
t <sub>POR,60ms</sub>	VDD rise time 60 ms		23	110	ms
t <sub>RISE,REG0OUT</sub>	REG0 output (VDD) rise time after VDDH reaches minimum VDDH supply voltage				
t <sub>RISE,REG0OUT,10us</sub>	VDDH rise time 10 us		0.22	1.55	ms
t <sub>RISE,REG0OUT,10ms</sub>	VDDH rise time 10 ms		5		ms
t <sub>RISE,REG0OUT,100ms</sub>	VDDH rise time 100 ms	30	50	80	ms
t <sub>PINR</sub>	If a GPIO pin is configured as reset, the maximum time taken to pull up the pin and release reset after power-on reset. Dependent on the pin capacitive load.				
t <sub>PINR,500nF</sub>	500 nF capacitance at reset pin			32.5	ms
t <sub>PINR,10μF</sub>	10 μF capacitance at reset pin			650	ms
t <sub>R2ON</sub>	Time from power-on reset to System ON				
t <sub>R2ON,NOTCONF</sub>	If reset pin not configured.	t <sub>POR</sub>			ms
t <sub>R2ON,CONF</sub>	If reset pin configured.	t <sub>POR</sub> + t <sub>PINR</sub>			ms
t <sub>OFF2ON</sub>	Time from OFF to CPU execute.		16.5		μs
t <sub>IDLE2CPU</sub>	Time from IDLE to CPU execute.		3.0		μs
t <sub>EVTSET,CL1</sub>	Time from HW event to PPI event in Constant Latency System ON mode.		0.0625		μs
t <sub>EVTSET,CL0</sub>	Time from HW event to PPI event in Low Power System ON mode		0.0625		μs

### 16.10.4 Power fail comparator

Symbol	Description	Min.	Typ.	Max.	Units
V <sub>POF,NV</sub>	Nominal power level warning thresholds (falling supply voltage) in Normal voltage mode (supply on VDD). Levels are configurable between Min. and Max. in 100mV increments.	1.7		2.8	V
V <sub>POF,HV</sub>	Nominal power level warning thresholds (falling supply voltage) in High voltage mode (supply on VDDH). Levels are configurable in 100 mV increments.	2.7		4.2	V
V <sub>POFTOL</sub>	Threshold voltage tolerance (applies in both Normal voltage mode and High voltage mode)	-5		5	%
V <sub>POFHYST</sub>	Threshold voltage hysteresis (applies in both Normal voltage mode and High voltage mode)	40	50	60	mV
V <sub>BOR,OFF</sub>	Brownout reset voltage range System OFF mode. Brownout only applies to the voltage on VDD.	1.2		1.62	V
V <sub>BOR,ON</sub>	Brownout reset voltage range System ON mode. Brownout only applies to the voltage on VDD.	1.57	1.6	1.63	V

### 16.10.5 USB operating conditions

Symbol	Description	Min.	Typ.	Max.	Units
$V_{BUS}$	Supply voltage on VBUS pin.	4.35	5	5.5	V
$V_{DPDM}$	Voltage on D+ and D- lines	$V_{SS} - 0.3$ V		$V_{USB33} + V$ 0.3 V	

### 16.10.6 USB regulator specifications

Symbol	Description	Min.	Typ.	Max.	Units
$I_{USB,QUIES}$	USB regulator quiescence current drawn from Vbus (USBD enabled).		170		$\mu A$
$t_{USBPWRRDY}$	Time from USB enabled to USBPWRRDY event triggered, $V_{BUS}$ supply provided.		1		ms
$V_{USB33}$	On voltage at the USB regulator output (DECUSB pin)	3.0	3.3	3.6	V
$R_{SOURCE,VBUS}$	Maximum source resistance on Vbus, incl. cable			2	$\Omega$

### 16.10.7 VBUS detection specifications


Symbol	Description	Min.	Typ.	Max.	Units
$V_{BUS,DETECT}$	Voltage at which rising VBUS gets reported by USBDETECTED	3.45	4.01	4.26	V
$V_{BUS,REMOVE}$	Voltage at which decreasing VBUS gets reported by USBREMOVED	3.1	3.61	3.84	V

## 17 CLOCK — Clock control

The clock control system can source the system clocks from a range of internal or external high and low frequency oscillators and distribute them to modules based upon a module's individual requirements. Clock distribution is automated and grouped independently by module to limit current consumption in unused branches of the clock tree.

Listed here are the main features for CLOCK:

- 64 MHz on-chip oscillator
- 64 MHz crystal oscillator, using external 32 MHz crystal
- 32.768 kHz +/-250 ppm RC oscillator
- 32.768 kHz crystal oscillator, using external 32.768 kHz crystal
- 32.768 kHz oscillator synthesized from 64 MHz oscillator
- Firmware (FW) override control of oscillator activity for low latency start up
- Automatic oscillator and clock control, and distribution for ultra-low power

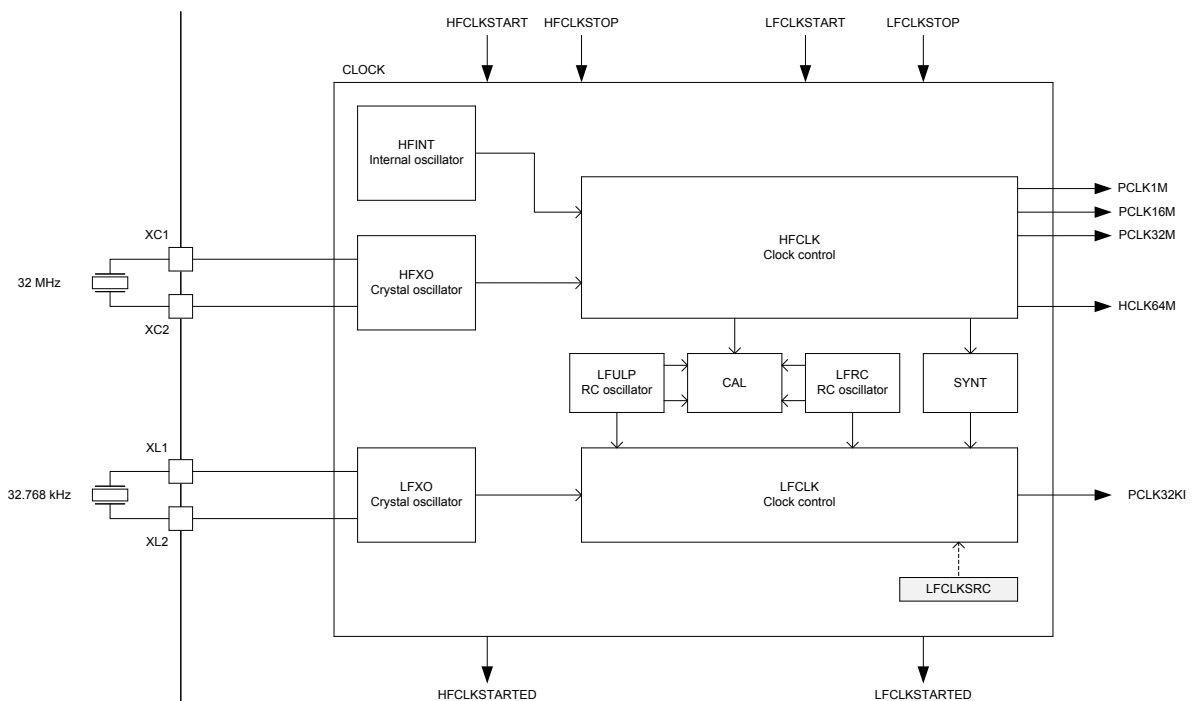

**Figure 17: Clock control**

### 17.1 HFCLK clock controller

The HFCLK clock controller provides the following clocks to the system.

- HCLK64M: 64 MHz CPU clock
- PCLK1M: 1 MHz peripheral clock
- PCLK16M: 16 MHz peripheral clock
- PCLK32M: 32 MHz peripheral clock

The HFCLK controller supports the following high frequency clock (HFCLK) sources:

- 64 MHz internal oscillator (HFINT)
- 64 MHz crystal oscillator (HFXO)

For illustration, see [Figure 17: Clock control](#) on page 142.

When the system requests one or more clocks from the HFCLK controller, the HFCLK controller will automatically provide them. If the system does not request any clocks provided by the HFCLK controller, the controller will enter a power saving mode.

These clocks are only available when the system is in ON mode. When the system enters ON mode, the internal oscillator (HFINT) clock source will automatically start to be able to provide the required HFCLK clock(s) for the system.

The HFINT will be used when HFCLK is requested and HFXO has not been started. The HFXO is started by triggering the HFCLKSTART task and stopped using the HFCLKSTOP task. A HFCLKSTARTED event will be generated when the HFXO has started and its frequency is stable.


The HFXO must be running to use the RADIO or the calibration mechanism associated with the 32.768 kHz RC oscillator.

### 17.1.1 64 MHz crystal oscillator (HFXO)

The 64 MHz crystal oscillator (HFXO) is controlled by a 32 MHz external crystal

The crystal oscillator is designed for use with an AT-cut quartz crystal in parallel resonant mode. To achieve correct oscillation frequency, the load capacitance must match the specification in the crystal data sheet.

*Figure 18: Circuit diagram of the 64 MHz crystal oscillator* on page 143 shows how the 32 MHz crystal is connected to the 64 MHz crystal oscillator.

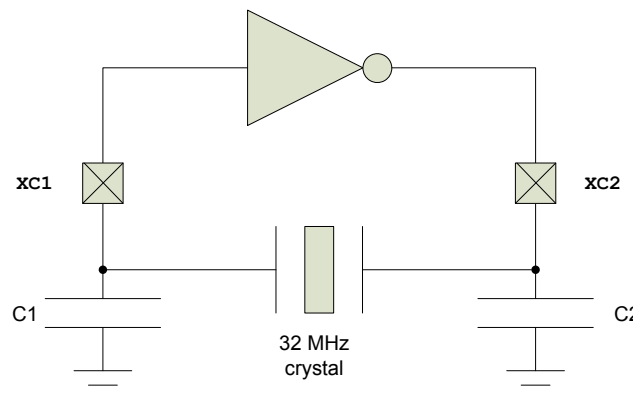

**Figure 18: Circuit diagram of the 64 MHz crystal oscillator**

The load capacitance (CL) is the total capacitance seen by the crystal across its terminals and is given by:

$$CL = \frac{(C1' \cdot C2')}{(C1' + C2')}$$

$$C1' = C1 + C_{pcb1} + C_{pin}$$

$$C2' = C2 + C_{pcb2} + C_{pin}$$

C1 and C2 are ceramic SMD capacitors connected between each crystal terminal and ground. For more information, see [Reference circuitry](#) on page 686.  $C_{pcb1}$  and  $C_{pcb2}$  are stray capacitances on the PCB.  $C_{pin}$  is the pin input capacitance on the XC1 and XC2 pins. See table [64 MHz crystal oscillator \(HFXO\)](#) on page 150. The load capacitors C1 and C2 should have the same value.

For reliable operation, the crystal load capacitance, shunt capacitance, equivalent series resistance, and drive level must comply with the specifications in table [64 MHz crystal oscillator \(HFXO\)](#) on page 150. It is recommended to use a crystal with lower than maximum load capacitance and/or shunt capacitance. A low load capacitance will reduce both start up time and current consumption.

## 17.2 LFCLK clock controller

The system supports several low frequency clock sources.

As illustrated in [Figure 17: Clock control](#) on page 142, the system supports the following low frequency clock sources:

- 32.768 kHz RC oscillator (LFRC)
- 32.768 kHz crystal oscillator (LFXO)
- 32.768 kHz synthesized from HFCLK (LFSYNT)

The LFCLK clock controller and all of the LFCLK clock sources are always switched off when in OFF mode.

The LFCLK clock is started by first selecting the preferred clock source in register [LFCLKSRC](#) on page 149 and then triggering the LFCLKSTART task. If the LFXO is selected as the clock source, the LFCLK will initially start running from the 32.768 kHz LFRC while the LFXO is starting up and automatically switch to using the LFXO once this oscillator is running. The LFCLKSTARTED event will be generated when the LFXO has been started.

The LFCLK clock is stopped by triggering the LFCLKSTOP task.

The [LFCLKSRC](#) on page 149 register controls the clock source, and its allowed swing. The truth table for various situations is as follows:

**Table 17: LFCLKSRC configuration depending on clock source**

SRC	EXTERNAL	BYPASS	Comment
0	0	0	Normal operation, RC is source
0	0	1	DO NOT USE
0	1	X	DO NOT USE
1	0	0	Normal XTAL operation
1	1	0	Apply external low swing signal to XL1, ground XL2
1	1	1	Apply external full swing signal to XL1, leave XL2 grounded or unconnected
1	0	1	DO NOT USE
2	0	0	Normal operation, synth is source
2	0	1	DO NOT USE
2	1	X	DO NOT USE

It is not allowed to write to register [LFCLKSRC](#) on page 149 when the LFCLK is running.

A LFCLKSTOP task will stop the LFCLK oscillator. However, the LFCLKSTOP task can only be triggered after the STATE field in register [LFCLKSTAT](#) on page 148 indicates a 'LFCLK running' state.

The synthesized 32.768 kHz clock depends on the HFCLK to run. If high accuracy is required for the LFCLK running off the synthesized 32.768 kHz clock, the HFCLK must be generated from the HFCLK crystal oscillator.

### 17.2.1 32.768 kHz RC oscillator (LFRC)

The default source of the low frequency clock (LFCLK) is the 32.768 kHz RC oscillator (LFRC).

The LFRC oscillator has two modes of operation, that is normal and ultra-low power (ULP) mode, enabling the user to trade power consumption against accuracy of the clock. The mode/status of the LFRC is selected/read in the [LFRCMODE](#) on page 150 register. It is allowed to change LFRC mode when the LFRC oscillator is running.

The LFRC frequency will be affected by variation in temperature. The LFRC oscillator can be calibrated to improve accuracy by using the HFXO as a reference oscillator during calibration. The LFRC oscillator does not require additional external components.

### 17.2.2 Calibrating the 32.768 kHz RC oscillator

After any of the two 32.768 kHz RC oscillators are started and running, they can be calibrated by triggering the CAL task. The 32.768 kHz RC oscillator will then temporarily request the HFCLK to be used as a reference for the calibration.




A DONE event will be generated when calibration has finished. The calibration mechanism will only work as long as HFCLK is generated from the HFCLK crystal oscillator, it is therefore necessary to explicitly start this crystal oscillator before calibration can be started, see HFCLKSTART task.

### 17.2.3 Calibration timer

The calibration timer can be used to time the calibration interval of the 32.768 kHz RC oscillator.

The calibration timer is started by triggering the CTSTART task and stopped by triggering the CTSTOP task. The calibration timer will always start counting down from the value specified in CTIV and generate a CTTO timeout event when it reaches 0. The Calibration timer will stop by itself when it reaches 0.

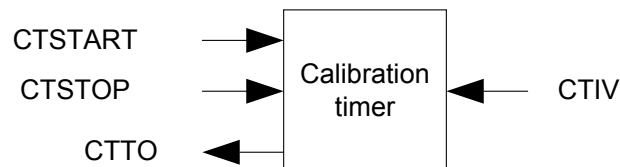

**Figure 19: Calibration timer**

Due to limitations in the calibration timer, only one task related to calibration, that is, CAL, CTSTART and CTSTOP, can be triggered for every period of LFCLK.


### 17.2.4 32.768 kHz crystal oscillator (LFXO)

For higher LFCLK accuracy (when better than +/- 250 ppm accuracy is required), the low frequency crystal oscillator (LFXO) must be used.

The following external clock sources are supported:

- Low swing clock signal applied to the XL1 pin. The XL2 pin shall then be grounded.
- Rail-to-rail clock signal applied to the XL1 pin. The XL2 pin shall then be grounded or left unconnected.

To achieve correct oscillation frequency, the load capacitance must match the specification in the crystal data sheet. [Figure 20: Circuit diagram of the 32.768 kHz crystal oscillator](#) on page 145 shows the LFXO circuitry.

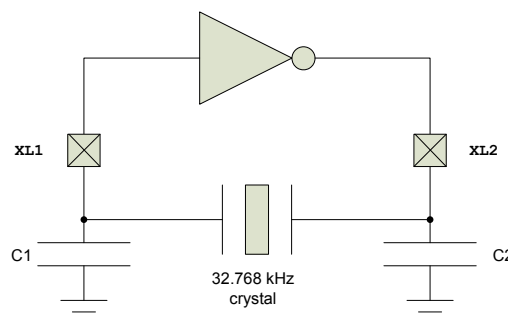

**Figure 20: Circuit diagram of the 32.768 kHz crystal oscillator**

The load capacitance (CL) is the total capacitance seen by the crystal across its terminals and is given by:

$$CL = \frac{(C1' \cdot C2')}{(C1' + C2')}$$

$$C1' = C1 + C_{pcb1} + C_{pin}$$

$$C2' = C2 + C_{pcb2} + C_{pin}$$

C1 and C2 are ceramic SMD capacitors connected between each crystal terminal and ground.  $C_{pcb1}$  and  $C_{pcb2}$  are stray capacitances on the PCB.  $C_{pin}$  is the pin input capacitance on the XC1 and XC2 pins (see [Low frequency crystal oscillator \(LFXO\)](#) on page 151). The load capacitors C1 and C2 should have the same value.

For more information, see [Reference circuitry](#) on page 686.

### 17.2.5 32.768 kHz synthesized from HFCLK (LFSYNT)

LFCLK can also be synthesized from the HFCLK clock source. The accuracy of LFCLK will then be the accuracy of the HFCLK.

Using the LFSYNT clock avoids the requirement for a 32.768 kHz crystal, but increases average power consumption as the HFCLK will need to be requested in the system.

## 17.3 Registers

**Table 18: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40000000	CLOCK	CLOCK	Clock control	

**Table 19: Register Overview**

Register	Offset	Description
TASKS_HFCLKSTART	0x000	Start HFCLK crystal oscillator
TASKS_HFCLKSTOP	0x004	Stop HFCLK crystal oscillator
TASKS_LFCLKSTART	0x008	Start LFCLK source
TASKS_LFCLKSTOP	0x00C	Stop LFCLK source
TASKS_CAL	0x010	Start calibration of LFRC or LFULP oscillator
TASKS_CTSTART	0x014	Start calibration timer
TASKS_CTSTOP	0x018	Stop calibration timer
EVENTS_HFCLKSTARTED	0x100	HFCLK oscillator started
EVENTS_LFCLKSTARTED	0x104	LFCLK started
EVENTS_DONE	0x10C	Calibration of LFCLK RC oscillator complete event
EVENTS_CTTO	0x110	Calibration timer timeout
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">HFCLKRUN</a>	0x408	Status indicating that HFCLKSTART task has been triggered
<a href="#">HFCLKSTAT</a>	0x40C	HFCLK status
<a href="#">LFCLKRUN</a>	0x414	Status indicating that LFCLKSTART task has been triggered
<a href="#">LFCLKSTAT</a>	0x418	LFCLK status
<a href="#">LFCLKSRC</a>	0x41C	Copy of LFCLKSRC register, set when LFCLKSTART task was triggered
<a href="#">LFCLKSRC</a>	0x518	Clock source for the LFCLK
<a href="#">CTIV</a>	0x538	Calibration timer interval
<a href="#">TRACECONFIG</a>	0x55C	Clocking options for the Trace Port debug interface
<a href="#">LFRCMODE</a>	0x5B4	LFRC mode configuration

### 17.3.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	HFCLKSTARTED																														

Write '1' to Enable interrupt for HFCLKSTARTED event  
See [EVENTS\\_HFCLKSTARTED](#)

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				D C B A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
B	RW	LFCLKSTARTED			Write '1' to Enable interrupt for LFCLKSTARTED event																													
				See <a href="#">EVENTS_LFCLKSTARTED</a>																														
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
C	RW	DONE			Write '1' to Enable interrupt for DONE event																													
				See <a href="#">EVENTS_DONE</a>																														
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
D	RW	CTTO			Write '1' to Enable interrupt for CTTO event																													
				See <a href="#">EVENTS_CTTO</a>																														
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													

### 17.3.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	HFCLKSTARTED			Write '1' to Disable interrupt for HFCLKSTARTED event																																		
					See <a href="#">EVENTS_HFCLKSTARTED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
B	RW	LFCLKSTARTED			Write '1' to Disable interrupt for LFCLKSTARTED event																																		
					See <a href="#">EVENTS_LFCLKSTARTED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
C	RW	DONE			Write '1' to Disable interrupt for DONE event																																		
					See <a href="#">EVENTS_DONE</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
D	RW	CTTO			Write '1' to Disable interrupt for CTTO event																																		
					See <a href="#">EVENTS_CTTO</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		

### 17.3.3 HFCLKRUN

Address offset: 0x408

Status indicating that HFCLKSTART task has been triggered

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	STATUS			HFCLKSTART task triggered or not																														
			NotTriggered	0	Task not triggered																														
			Triggered	1	Task triggered																														

### 17.3.4 HFCLKSTAT

Address offset: 0x40C

HFCLK status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				B												A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	SRC			Source of HFCLK																														
			RC	0	64 MHz internal oscillator (HFINT)																														
			Xtal	1	64 MHz crystal oscillator (HFXO)																														
B	R	STATE			HFCLK state																														
			NotRunning	0	HFCLK not running																														
			Running	1	HFCLK running																														

### 17.3.5 LFCLKRUN

Address offset: 0x414

Status indicating that LFCLKSTART task has been triggered

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	R	STATUS			LFCLKSTART task triggered or not																																	
			NotTriggered	0	Task not triggered																																	
			Triggered	1	Task triggered																																	

### 17.3.6 LFCLKSTAT

Address offset: 0x418

LFCLK status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				B												A		A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	SRC			Source of LFCLK																														
			RC	0	32.768 kHz RC oscillator																														
			Xtal	1	32.768 kHz crystal oscillator																														
			Synth	2	32.768 kHz synthesized from HFCLK																														
			LFULP	3	32.768 kHz ultra low power RC oscillator																														
B	R	STATE			LFCLK state																														
			NotRunning	0	LFCLK not running																														
			Running	1	LFCLK running																														

### 17.3.7 LFCLKSRCCOPY

Address offset: 0x41C

Copy of LFCLKSRC register, set when LFCLKSTART task was triggered

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				A	A
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value	Description																																
A	R	SRC			Clock source																																
		RC	0		32.768 kHz RC oscillator																																
		Xtal	1		32.768 kHz crystal oscillator																																
		Synth	2		32.768 kHz synthesized from HFCLK																																
		LFULP	3		32.768 kHz ultra low power RC oscillator																																

### 17.3.8 LFCLKSRC

Address offset: 0x518

Clock source for the LFCLK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																				C		B													A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	RW	SRC							Clock source																											
		RC	0						32.768 kHz RC oscillator																											
		Xtal	1						32.768 kHz crystal oscillator																											
		Synth	2						32.768 kHz synthesized from HFCLK																											
		LFULP	3						32.768 kHz ultra low power RC oscillator																											
B	RW	BYPASS							Enable or disable bypass of LFCLK crystal oscillator with external clock source																											
		Disabled	0						Disable (use with Xtal or low-swing external source)																											
		Enabled	1						Enable (use with rail-to-rail external source)																											
C	RW	EXTERNAL							Enable or disable external source for LFCLK																											
		Disabled	0						Disable external source (use with Xtal)																											
		Enabled	1						Enable use of external source instead of Xtal (SRC needs to be set to Xtal)																											

### 17.3.9 CTIV ( Retained )

Address offset: 0x538

This register is a retained register

Calibration timer interval

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																													A					A					A					A				
Reset 0x00000000					0																								0					0					0					0				
Id	RW	Field	Value		Id	Value		Description																																								
A	RW	CTIV						Calibration timer interval in multiple of 0.25 seconds. Range: 0.25 seconds to 31.75 seconds.																																								

### 17.3.10 TRACECONFIG

Address offset: 0x55C

Clocking options for the Trace Port debug interface

This register is a retained register. Reset behavior is the same as debug components.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																				B	B											A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TRACEPORTSPEED				Speed of Trace Port clock. Note that the TRACECLK pin will output this clock divided by two.																														
			32MHz	0		32 MHz Trace Port clock (TRACECLK = 16 MHz)																														
			16MHz	1		16 MHz Trace Port clock (TRACECLK = 8 MHz)																														
			8MHz	2		8 MHz Trace Port clock (TRACECLK = 4 MHz)																														
			4MHz	3		4 MHz Trace Port clock (TRACECLK = 2 MHz)																														
B	RW	TRACEMUX				Pin multiplexing of trace signals.																														
			GPIO	0		GPIOs multiplexed onto all trace-pins																														
			Serial	1		SWO multiplexed onto P0.18, GPIO multiplexed onto other trace pins																														
			Parallel	2		TRACECLK and TRACEDATA multiplexed onto P0.20, P0.18, P0.16, P0.15 and P0.14.																														

### 17.3.11 LFRCMODE

Address offset: 0x5B4

LFRC mode configuration

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	MODE				Set LFRC mode																																
			Normal	0		Normal mode																																
			ULP	1		Ultra-low power mode (ULP)																																
B	RW	STATUS				Active LFRC mode. This field is read only.																																
			Normal	0		Normal mode																																
			ULP	1		Ultra-low power mode (ULP)																																

## 17.4 Electrical specification

### 17.4.1 64 MHz internal oscillator (HFINT)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_HFINT}}$	Nominal output frequency		64		MHz
$f_{\text{TOL\_HFINT}}$	Frequency tolerance		±1.5	±8	%

### 17.4.2 64 MHz crystal oscillator (HFXO)

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_HFXO}}$	Nominal output frequency		64		MHz
$f_{\text{XTAL\_HFXO}}$	External crystal frequency		32		MHz
$f_{\text{TOL\_HFXO}}$	Frequency tolerance requirement for 2.4 GHz proprietary radio applications			±60	ppm
$f_{\text{TOL\_HFXO\_BLE}}$	Frequency tolerance requirement, Bluetooth low energy applications			±40	ppm
$C_{\text{L\_HFXO}}$	Load capacitance			12	pF
$C_{\text{0\_HFXO}}$	Shunt capacitance			7	pF
$R_{\text{S\_HFXO\_7PF}}$	Equivalent series resistance $C_0 = 7$ pF			60	ohm
$R_{\text{S\_HFXO\_5PF}}$	Equivalent series resistance $C_0 = 5$ pF			60	ohm
$R_{\text{S\_HFXO\_3PF}}$	Equivalent series resistance $C_0 = 3$ pF			100	ohm
$P_{\text{D\_HFXO}}$	Drive level			100	μW
$C_{\text{PIN\_HFXO}}$	Input capacitance XC1 and XC2		3		pF

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>STBY_X32M</sub>	Core standby current for various crystals				
I <sub>STBY_X32M_X0</sub>	Epson TSX-3225		80		μA
I <sub>STBY_X32M_X1</sub>	Epson FA-20H		72		μA
I <sub>STBY_X32M_X2</sub>	Epson FA-128		70		μA
I <sub>STBY_X32M_X3</sub>	NDK NX1612AA		136		μA
I <sub>STBY_X32M_X4</sub>	NDK NX1210AB		143		μA
I <sub>START_X32M</sub>	Average startup current for various crystals, first 1 ms				
I <sub>START_X32M_X0</sub>	Epson TSX-3225		328		mA
I <sub>START_X32M_X1</sub>	Epson FA-20H		363		mA
I <sub>START_X32M_X2</sub>	Epson FA-128		396		mA
I <sub>START_X32M_X3</sub>	NDK NX1612AA		783		mA
I <sub>START_X32M_X4</sub>	NDK NX1210AB		833		mA
t <sub>START_X32M</sub>	Startup time for various crystals				
t <sub>START_X32M_X0</sub>	Epson TSX-3225		304		μs
t <sub>START_X32M_X1</sub>	Epson FA-20H		316		μs
t <sub>START_X32M_X2</sub>	Epson FA-128		328		μs
t <sub>START_X32M_X3</sub>	NDK NX1612AA				μs
t <sub>START_X32M_X4</sub>	NDK NX1210AB				μs

### 17.4.3 Low frequency crystal oscillator (LFXO)

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>NOM_LFXO</sub>	Crystal frequency		32.768		kHz
f <sub>TOL_LFXO_BLE</sub>	Frequency tolerance requirement for BLE stack			±250	ppm
f <sub>TOL_LFXO_ANT</sub>	Frequency tolerance requirement for ANT stack			±50	ppm
C <sub>L_LFXO</sub>	Load capacitance			12.5	pF
C <sub>0_LFXO</sub>	Shunt capacitance			2	pF
R <sub>S_LFXO</sub>	Equivalent series resistance			100	kohm
P <sub>D_LFXO</sub>	Drive level			1	uW
C <sub>pin</sub>	Input capacitance on XL1 and XL2 pads		4		pF
I <sub>LFXO</sub>	Run current for 32.768 kHz crystal oscillator		0.23		μA
t <sub>START_LFXO</sub>	Startup time for 32.768 kHz crystal oscillator		0.25		s

### 17.4.4 Low frequency RC oscillator (LFRC), Normal mode

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>NOM_LFRC</sub>	Nominal frequency		32.768		kHz
f <sub>TOL_LFRC</sub>	Frequency tolerance, uncalibrated			±2.5	%
f <sub>TOL_CAL_LFRC</sub>	Frequency tolerance after calibration <sup>9</sup>			±250	ppm
I <sub>LFRC</sub>	Run current		0.7		μA
t <sub>START_LFRC</sub>	Startup time		1000		us

### 17.4.5 Low frequency RC oscillator (LFRC), Ultra-low power mode (ULP)

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>NOM_LFULP</sub>	Nominal frequency		32.768		kHz
f <sub>TOL_UNCAL_LFULP</sub>	Frequency tolerance, uncalibrated			±7	%
f <sub>TOL_CAL_LFULP</sub>	Frequency tolerance after calibration <sup>10</sup>			±2000	ppm
I <sub>LFULP</sub>	Run current		0.2		μA
t <sub>START_LFULP</sub>	Startup time		1500		us

### 17.4.6 Synthesized low frequency clock (LFSYNT)

<sup>9</sup> Constant temperature within ±0.5 °C and calibration performed at least every 8 seconds, defined as 3 sigma

<sup>10</sup> Constant temperature within ±0.5 °C and calibration performed at least every 8 seconds, defined as 3 sigma


Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{NOM\_LFSYNT}}$	Nominal frequency		32.768		kHz



## 18 Power and clock management

Power and clock management in nRF52840 is optimized for ultra-low power applications.

The core of the power and clock management system is the Power Management Unit (PMU) illustrated in [Figure 21: Power Management Unit](#) on page 153.

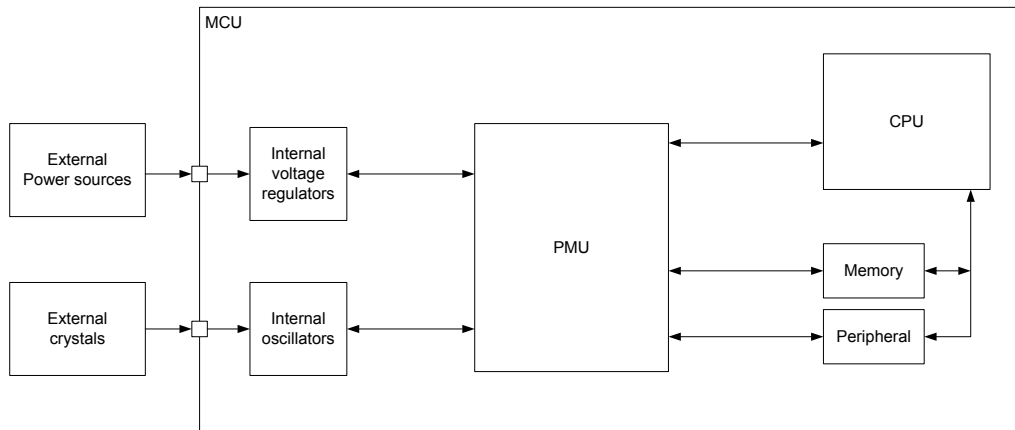

**Figure 21: Power Management Unit**

The user application is not required to actively control power and clock, since the PMU is able to automatically detect which resources are required by the different components in the system at any given time. The PMU will continuously optimize the system based on this information to achieve the lowest power consumption possible without user interaction.

### 18.1 Current consumption scenarios

As the system is being constantly tuned by the PMU, estimating the energy consumption of an application can be challenging if the designer is not able to do measurements on the hardware directly. To facilitate this process, there is a defined set of current consumption scenarios.

See [Electrical specification](#) on page 153 for application scenarios showing average current drawn from the VDD supply.

Each scenario specifies a set of active operations and conditions applying to the given scenario. [Table 20: Current consumption scenarios, common conditions](#) on page 153 shows the conditions used for a scenario unless otherwise is stated in the scenario description.

**Table 20: Current consumption scenarios, common conditions**

Condition	Value
VDD	3 V
Temperature	25°C
CPU	WFI/WFE sleep
Peripherals	All idle
Clock	Not running
Regulator	DC/DC

#### 18.1.1 Electrical specification

##### Current consumption: Radio

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RADIO_TX0</sub>	0 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO		6.4		mA
I <sub>RADIO_TX1</sub>	-40 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO				mA

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RADIO_RX0</sub>	Radio RX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO		6.4		mA
I <sub>RADIO_RX1</sub>	Radio RX @ 2 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Regulator = LDO		11		mA
I <sub>RADIO_RX2</sub>	Radio RX @ 2 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Regulator = LDO		12.6		mA
I <sub>RADIO_RX2</sub>	Radio RX @ 125 kb/s Bluetooth Low Energy mode, Clock = HFXO, Regulator = LDO		10.9		mA

### Current consumption: Radio protocol configurations

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>S0</sub>	CPU running CoreMark from Flash, Radio 0 dBm TX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Cache enabled		9.1		mA
I <sub>S1</sub>	CPU running CoreMark from Flash, Radio RX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Cache enabled		8.9		mA
I <sub>S4</sub>	CPU running CoreMark from Flash, Radio RX @ 1 Mb/s Bluetooth Low Energy mode, Clock = HFXO, Cache enabled, VDDH = 5V, REG0 out = 3V		7.5		mA

### Current consumption: Ultra-low power

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>ON_RAMOFF_EVENT</sub>	System ON, No RAM retention, Wake on any event				μA
I <sub>ON_RAMON_EVENT</sub>	System ON, Full RAM retention, Wake on any event				μA
I <sub>ON_RAMOFF_RTC</sub>	System ON, No RAM retention, Wake on RTC (LFCLK = LFRC, normal mode)		1.3		μA
I <sub>OFF_RAMOFF_RESET</sub>	System OFF, No RAM retention, Wake on reset				μA
I <sub>OFF_RAMOFF_GPIO</sub>	System OFF, No RAM retention, Wake on GPIO				μA
I <sub>OFF_RAMOFF_LPCOMP</sub>	System OFF, No RAM retention, Wake on LPCOMP				μA
I <sub>OFF_RAMOFF_NFC</sub>	System OFF, No RAM retention, Wake on NFC field				μA
I <sub>OFF_RAMON_RESET</sub>	System OFF, Full RAM retention, Wake on reset				μA

### Current consumption: Serial interfaces

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>SPIM,IDLE</sub>	SPIM Idle (enabled, no ongoing data transfer)				mA
I <sub>SPIM,ACTIVE</sub>	SPIM R+W data transfer, 1 MHz SCK frequency, Clock = HFINT				mA
I <sub>SPIS,IDLE</sub>	SPIS Idle (enabled, started, no activity on CSN, CLK, MISO or MOSI)				mA
I <sub>SPIS,ACTIVE</sub>	SPIS R+W data transfer, 1 MHz SCK frequency, Clock = HFINT				mA
I <sub>TWIM,IDLE</sub>	TWIM Idle (enabled, no ongoing data transfer)				mA
I <sub>TWIM,ACTIVE</sub>	SPIM data transfer @ 400 kb/s, Clock = HFINT				mA
I <sub>TWIS,IDLE</sub>	SPIS Idle (enabled, no ongoing data transfer, PREPARETX and/or PREPARERX tasks triggered)				mA
I <sub>TWIS,ACTIVE</sub>	SPIM data transfer @ 400 kb/s, Clock = HFINT				mA

### Current consumption: CPU

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>CPU0</sub>	CPU running from Flash, Clock = HFXO				mA
I <sub>CPU1</sub>	CPU running from RAM, Clock = HFXO				mA
I <sub>CPU2</sub>	CPU running from Flash, Clock = HFINT				mA

## 19 GPIO — General purpose input/output

The general purpose input/output pins (GPIOs) are grouped as one or more ports with each port having up to 32 GPIOs.

The number of ports and GPIOs per port might vary with product variant and package. Refer to [Registers](#) on page 157 and [Pin assignments](#) on page 13 for more information about the number of GPIOs that are supported.

GPIO has the following user-configurable features:

- Up to 32 GPIO pins per GPIO port
- Configurable output drive strength
- Internal pull-up and pull-down resistors
- Wake-up from high or low level triggers on all pins
- Trigger interrupt on state changes on any pin
- All pins can be used by the PPI task/event system
- One or more GPIO outputs can be controlled through PPI and GPIOTE channels
- All pins can be individually mapped to interface blocks for layout flexibility
- GPIO state changes captured on SENSE signal can be stored by LATCH register

The GPIO Port peripheral implements up to 32 pins, `PIN0` through `PIN31`. Each of these pins can be individually configured in the `PIN_CNF[n]` registers ( $n=0..31$ ).

The following parameters can be configured through these registers:


- Direction
- Drive strength
- Enabling of pull-up and pull-down resistors
- Pin sensing
- Input buffer disconnect
- Analog input (for selected pins)

The `PIN_CNF` registers are retained registers. See [POWER — Power supply](#) on page 67 chapter for more information about retained registers.

### 19.1 Pin configuration

Pins can be individually configured, through the `SENSE` field in the `PIN_CNF[n]` register, to detect either a high level or a low level on their input.

When the correct level is detected on any such configured pin, the sense mechanism will set the `DETECT` signal high. Each pin has a separate `DETECT` signal, and the default behaviour, as defined by the `DETECTMODE` register, is that the `DETECT` signal from all pins in the GPIO Port are combined into a common `DETECT` signal that is routed throughout the system, which then can be utilized by other peripherals, see [Figure 22: GPIO Port and the GPIO pin details](#) on page 156. This mechanism is functional in both ON and OFF mode.

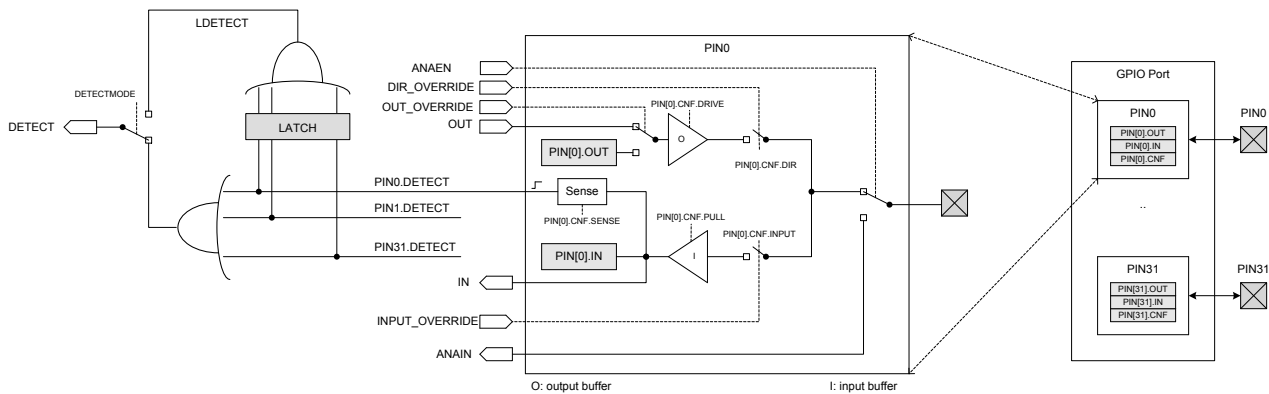

**Figure 22: GPIO Port and the GPIO pin details**

*Figure 22: GPIO Port and the GPIO pin details* on page 156 illustrates the GPIO port containing 32 individual pins, where PIN0 is illustrated in more detail as a reference. All the signals on the left side of the illustration are used by other peripherals in the system, and therefore, are not directly available to the CPU.

Make sure that a pin is in a level that cannot trigger the sense mechanism before enabling it. Detect will go high immediately if the sense condition configured in the PIN\_CNF registers is met when the sense mechanism is enabled. This will trigger a PORT event if the DETECT signal was low before enabling the sense mechanism. See [GPiOTE — GPiO tasks and events](#) on page 201.

See the following peripherals for more information about how the DETECT signal is used:

- **POWER:** uses the DETECT signal to exit from System OFF.
- **GPIOTE:** uses the DETECT signal to generate the PORT event.

When a pin's PINx.DETECT signal goes high, a flag will be set in the LATCH register, e.g. when the PIN0.DETECT signal goes high, bit 0 in the LATCH register will be set to '1'.

The LATCH register will only be cleared if the CPU explicitly clears it by writing a '1' to the bit that shall be cleared, i.e. the LATCH register will not be affected by a PINx.DETECT signal being set low.


If the CPU performs a clear operation on a bit in the LATCH register when the associated PINx.DETECT signal is high, the bit in the LATCH register will not be cleared.

The LDETECT signal will be set high when one or more bits in the LATCH register are '1'. The LDETECT signal will be set low when all bits in the LATCH register are successfully cleared to '0'.

If one or more bits in the LATCH register are '1' after the CPU has performed a clear operation on the LATCH registers, a rising edge will be generated on the LDETECT signal, this is illustrated in [Figure 23: DETECT signal behavior](#) on page 157.

**Important:** The CPU can read the LATCH register at any time to check if a SENSE condition has been met on one or more of the the GPIO pins even if that condition is no longer met at the time the CPU queries the LATCH register. This mechanism will work even if the LDETECT signal is not used as the DETECT signal.

The LDETECT signal is by default not connected to the GPIO port's DETECT signal, but via the DETECTMODE register it is possible to change the behaviour of the GPIO port's DETECT signal from the default behaviour described above to instead be derived directly from the LDETECT signal, see [Figure 22: GPIO Port and the GPIO pin details](#) on page 156. [Figure 23: DETECT signal behavior](#) on page 157 illustrates the DETECT signals behaviour for these two alternatives.

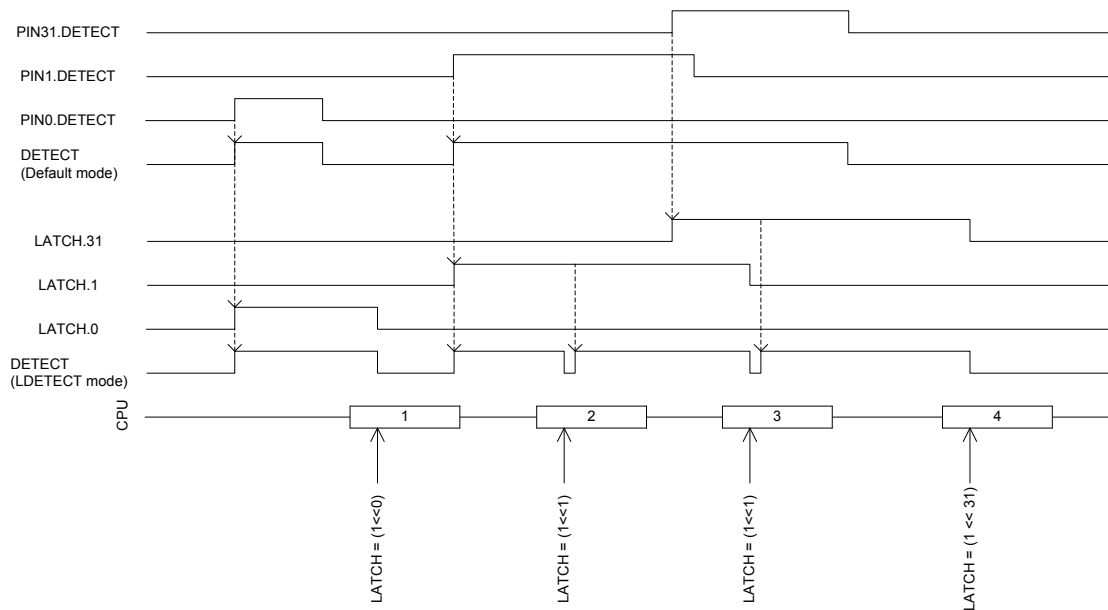

**Figure 23: DETECT signal behavior**

The input buffer of a GPIO pin can be disconnected from the pin to enable power savings when the pin is not used as an input, see [Figure 22: GPIO Port and the GPIO pin details](#) on page 156. Inputs must be connected in order to get a valid input value in the IN register and for the sense mechanism to get access to the pin.

Other peripherals in the system can attach themselves to GPIO pins and override their output value and configuration, or read their analog or digital input value, see [Figure 22: GPIO Port and the GPIO pin details](#) on page 156.

Selected pins also support analog input signals, see ANAIN in [Figure 22: GPIO Port and the GPIO pin details](#) on page 156. The assignment of the analog pins can be found in [Pin assignments](#) on page 13.

**Important:** When a pin is configured as digital input, care has been taken in the nRF52840 design to minimize increased current consumption when the input voltage is between  $V_{IL}$  and  $V_{IH}$ . However, it is a good practice to ensure that the external circuitry does not drive that pin to levels between  $V_{IL}$  and  $V_{IH}$  for a long period of time.

## 19.2 GPIO located near the RADIO

Radio performance parameters, such as sensitivity, may be affected by high frequency digital I/O with large sink/source current close to the radio power supply and antenna pins.

Refer to [Pin assignments](#) on page 13 for recommended usage guidelines to maximize radio performance in an application.

## 19.3 Registers

**Table 21: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x50000000	GPIO	GPIO	General purpose input and output	Deprecated
0x50000000	GPIO	P0	General purpose input and output, port 0	P0.00 to P0.31 implemented
0x50000300	GPIO	P1	General purpose input and output, port 1	P1.00 to P1.15 implemented

**Table 22: Register Overview**

Register	Offset	Description
<i>OUT</i>	0x504	Write GPIO port
<i>OUTSET</i>	0x508	Set individual bits in GPIO port
<i>OUTCLR</i>	0x50C	Clear individual bits in GPIO port
<i>IN</i>	0x510	Read GPIO port
<i>DIR</i>	0x514	Direction of GPIO pins
<i>DIRSET</i>	0x518	DIR set register
<i>DIRCLR</i>	0x51C	DIR clear register
<i>LATCH</i>	0x520	Latch register indicating what GPIO pins that have met the criteria set in the PIN_CNF[n].SENSE registers
<i>DETECTMODE</i>	0x524	Select between default DETECT signal behaviour and LDETECT mode
<i>PIN_CNF[0]</i>	0x700	Configuration of GPIO pins
<i>PIN_CNF[1]</i>	0x704	Configuration of GPIO pins
<i>PIN_CNF[2]</i>	0x708	Configuration of GPIO pins
<i>PIN_CNF[3]</i>	0x70C	Configuration of GPIO pins
<i>PIN_CNF[4]</i>	0x710	Configuration of GPIO pins
<i>PIN_CNF[5]</i>	0x714	Configuration of GPIO pins
<i>PIN_CNF[6]</i>	0x718	Configuration of GPIO pins
<i>PIN_CNF[7]</i>	0x71C	Configuration of GPIO pins
<i>PIN_CNF[8]</i>	0x720	Configuration of GPIO pins
<i>PIN_CNF[9]</i>	0x724	Configuration of GPIO pins
<i>PIN_CNF[10]</i>	0x728	Configuration of GPIO pins
<i>PIN_CNF[11]</i>	0x72C	Configuration of GPIO pins
<i>PIN_CNF[12]</i>	0x730	Configuration of GPIO pins
<i>PIN_CNF[13]</i>	0x734	Configuration of GPIO pins
<i>PIN_CNF[14]</i>	0x738	Configuration of GPIO pins
<i>PIN_CNF[15]</i>	0x73C	Configuration of GPIO pins
<i>PIN_CNF[16]</i>	0x740	Configuration of GPIO pins
<i>PIN_CNF[17]</i>	0x744	Configuration of GPIO pins
<i>PIN_CNF[18]</i>	0x748	Configuration of GPIO pins
<i>PIN_CNF[19]</i>	0x74C	Configuration of GPIO pins
<i>PIN_CNF[20]</i>	0x750	Configuration of GPIO pins
<i>PIN_CNF[21]</i>	0x754	Configuration of GPIO pins
<i>PIN_CNF[22]</i>	0x758	Configuration of GPIO pins
<i>PIN_CNF[23]</i>	0x75C	Configuration of GPIO pins
<i>PIN_CNF[24]</i>	0x760	Configuration of GPIO pins
<i>PIN_CNF[25]</i>	0x764	Configuration of GPIO pins
<i>PIN_CNF[26]</i>	0x768	Configuration of GPIO pins
<i>PIN_CNF[27]</i>	0x76C	Configuration of GPIO pins
<i>PIN_CNF[28]</i>	0x770	Configuration of GPIO pins
<i>PIN_CNF[29]</i>	0x774	Configuration of GPIO pins
<i>PIN_CNF[30]</i>	0x778	Configuration of GPIO pins
<i>PIN_CNF[31]</i>	0x77C	Configuration of GPIO pins

### 19.3.1 OUT

Address offset: 0x504

Write GPIO port

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN0			Pin 0																														
			Low	0	Pin driver is low																														
			High	1	Pin driver is high																														
B	RW	PIN1			Pin 1																														

Page 159

### 19.3.2 OUTSET

### Set individual bits in GPIO port

Read: reads value of OUT register.

Page 160



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
C	RW	PIN2	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
D	RW	PIN3	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
E	RW	PIN4	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
F	RW	PIN5	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
G	RW	PIN6	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
H	RW	PIN7	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
I	RW	PIN8	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
J	RW	PIN9	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
K	RW	PIN10	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
L	RW	PIN11	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
M	RW	PIN12	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
N	RW	PIN13	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
O	RW	PIN14	High	1	Read: pin driver is high																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			Set	1	Write: writing a '1' sets the pin high; writing a '0' has no effect																																	
P	RW	PIN15			Pin 15																																	



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
d	RW	PIN29					Pin 29																													
			Low		0		Read: pin driver is low																													
			High		1		Read: pin driver is high																													
			Set		1		Write: writing a '1' sets the pin high; writing a '0' has no effect																													
e	RW	PIN30					Pin 30																													
			Low		0		Read: pin driver is low																													
			High		1		Read: pin driver is high																													
			Set		1		Write: writing a '1' sets the pin high; writing a '0' has no effect																													
f	RW	PIN31					Pin 31																													
			Low		0		Read: pin driver is low																													
			High		1		Read: pin driver is high																													
			Set		1		Write: writing a '1' sets the pin high; writing a '0' has no effect																													

### 19.3.3 OUTCLR

Address offset: 0x50C

Clear individual bits in GPIO port

Read: reads value of OUT register.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	PIN0				Pin 0																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
B	RW	PIN1				Pin 1																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
C	RW	PIN2				Pin 2																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
D	RW	PIN3				Pin 3																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
E	RW	PIN4				Pin 4																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
F	RW	PIN5				Pin 5																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
G	RW	PIN6				Pin 6																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					
			Clear		1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																					
H	RW	PIN7				Pin 7																																					
			Low		0	Read: pin driver is low																																					
			High		1	Read: pin driver is high																																					

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
I	RW	PIN8	Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
J	RW	PIN9	Clear	1	Pin 9																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
K	RW	PIN10	Clear	1	Pin 10																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
L	RW	PIN11	Clear	1	Pin 11																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
M	RW	PIN12	Clear	1	Pin 12																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
N	RW	PIN13	Clear	1	Pin 13																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
O	RW	PIN14	Clear	1	Pin 14																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
P	RW	PIN15	Clear	1	Pin 15																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
Q	RW	PIN16	Clear	1	Pin 16																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
R	RW	PIN17	Clear	1	Pin 17																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
S	RW	PIN18	Clear	1	Pin 18																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
T	RW	PIN19	Clear	1	Pin 19																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
U	RW	PIN20	Clear	1	Pin 20																																	
			Low	0	Read: pin driver is low																																	
			High	1	Read: pin driver is high																																	
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																																	
V	RW	PIN21	Clear	1	Pin 21																																	
			Low	0	Read: pin driver is low																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
W	RW	PIN22			Pin 22																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
X	RW	PIN23			Pin 23																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
Y	RW	PIN24			Pin 24																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
Z	RW	PIN25			Pin 25																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
a	RW	PIN26			Pin 26																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
b	RW	PIN27			Pin 27																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
c	RW	PIN28			Pin 28																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
d	RW	PIN29			Pin 29																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
e	RW	PIN30			Pin 30																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														
f	RW	PIN31			Pin 31																														
			Low	0	Read: pin driver is low																														
			High	1	Read: pin driver is high																														
			Clear	1	Write: writing a '1' sets the pin low; writing a '0' has no effect																														
			High	1	Read: pin driver is high																														

### 19.3.4 IN

Address offset: 0x510

Read GPIO port

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																																					
A	R	PINO																																										
			Low	0			Pin input is low																																					
			High	1			Pin input is high																																					

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
B	R	PIN1			Pin 1																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
C	R	PIN2			Pin 2																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
D	R	PIN3			Pin 3																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
E	R	PIN4			Pin 4																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
F	R	PIN5			Pin 5																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
G	R	PIN6			Pin 6																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
H	R	PIN7			Pin 7																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
I	R	PIN8			Pin 8																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
J	R	PIN9			Pin 9																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
K	R	PIN10			Pin 10																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
L	R	PIN11			Pin 11																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
M	R	PIN12			Pin 12																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
N	R	PIN13			Pin 13																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
O	R	PIN14			Pin 14																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
P	R	PIN15			Pin 15																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
Q	R	PIN16			Pin 16																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
R	R	PIN17			Pin 17																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
S	R	PIN18			Pin 18																																	
			Low	0	Pin input is low																																	
			High	1	Pin input is high																																	
T	R	PIN19			Pin 19																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																				
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A																																				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0																																				
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>																																		<b>Description</b>																																	
U	R	PIN20	Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 20																																																																				
			Low	0																																		Pin input is low																																	
V	R	PIN21	High	1																																		Pin input is high																																	
			Pin 21																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
W	R	PIN22	Pin 22																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 23																																																																				
X	R	PIN23	Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 24																																																																				
			Low	0																																		Pin input is low																																	
Y	R	PIN24	High	1																																		Pin input is high																																	
			Pin 25																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
Z	R	PIN25	Pin 26																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 27																																																																				
a	R	PIN26	Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 28																																																																				
			Low	0																																		Pin input is low																																	
b	R	PIN27	High	1																																		Pin input is high																																	
			Pin 29																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
c	R	PIN28	Pin 30																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 31																																																																				
d	R	PIN29	Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
			Pin 30																																																																				
			Low	0																																		Pin input is low																																	
e	R	PIN30	High	1																																		Pin input is high																																	
			Pin 31																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	
f	R	PIN31	Pin 31																																																																				
			Low	0																																		Pin input is low																																	
			High	1																																		Pin input is high																																	

### 19.3.5 DIR

Address offset: 0x514

## Direction of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value		Description																													
A	RW	PIN0					Pin 0																													
				Input	0		Pin set as input																													
				Output	1		Pin set as output																													
B	RW	PIN1					Pin 1																													
				Input	0		Pin set as input																													
				Output	1		Pin set as output																													
C	RW	PIN2					Pin 2																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			D	RW	PIN3	Pin 3																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			E	RW	PIN4	Pin 4																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			F	RW	PIN5	Pin 5																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			G	RW	PIN6	Pin 6																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			H	RW	PIN7	Pin 7																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			I	RW	PIN8	Pin 8																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			J	RW	PIN9	Pin 9																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			K	RW	PIN10	Pin 10																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			L	RW	PIN11	Pin 11																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			M	RW	PIN12	Pin 12																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			N	RW	PIN13	Pin 13																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			O	RW	PIN14	Pin 14																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			P	RW	PIN15	Pin 15																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			Q	RW	PIN16	Pin 16																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			R	RW	PIN17	Pin 17																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			S	RW	PIN18	Pin 18																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			T	RW	PIN19	Pin 19																														
			Input		0		Pin set as input																													
			Output		1		Pin set as output																													
			U	RW	PIN20	Pin 20																														
			Input		0		Pin set as input																													



Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
V	RW	PIN21	Output	1	Pin set as output																																					
					Pin 21																																					
			Input	0	Pin set as input																																					
W	RW	PIN22	Output	1	Pin set as output																																					
					Pin 22																																					
			Input	0	Pin set as input																																					
X	RW	PIN23	Output	1	Pin set as output																																					
					Pin 23																																					
			Input	0	Pin set as input																																					
Y	RW	PIN24	Output	1	Pin set as output																																					
					Pin 24																																					
			Input	0	Pin set as input																																					
Z	RW	PIN25	Output	1	Pin set as output																																					
					Pin 25																																					
			Input	0	Pin set as input																																					
a	RW	PIN26	Output	1	Pin set as output																																					
					Pin 26																																					
			Input	0	Pin set as input																																					
b	RW	PIN27	Output	1	Pin set as output																																					
					Pin 27																																					
			Input	0	Pin set as input																																					
c	RW	PIN28	Output	1	Pin set as output																																					
					Pin 28																																					
			Input	0	Pin set as input																																					
d	RW	PIN29	Output	1	Pin set as output																																					
					Pin 29																																					
			Input	0	Pin set as input																																					
e	RW	PIN30	Output	1	Pin set as output																																					
					Pin 30																																					
			Input	0	Pin set as input																																					
f	RW	PIN31	Output	1	Pin set as output																																					
					Pin 31																																					
			Input	0	Pin set as input																																					

### 19.3.6 DIRSET

Address offset: 0x518

DIR set register

Read: reads value of DIR register.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN0					Set as output pin 0																													
			Input	0	Read: pin set as input																															
			Output	1	Read: pin set as output																															
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																															
B	RW	PIN1					Set as output pin 1																													
			Input	0	Read: pin set as input																															
			Output	1	Read: pin set as output																															
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																															
C	RW	PIN2					Set as output pin 2																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
D	RW	PIN3	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 3																																			
E	RW	PIN4	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 4																																			
F	RW	PIN5	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 5																																			
G	RW	PIN6	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 6																																			
H	RW	PIN7	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 7																																			
I	RW	PIN8	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 8																																			
J	RW	PIN9	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 9																																			
K	RW	PIN10	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 10																																			
L	RW	PIN11	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 11																																			
M	RW	PIN12	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 12																																			
N	RW	PIN13	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 13																																			
O	RW	PIN14	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 14																																			
P	RW	PIN15	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Set	1	Write: writing a '1' sets pin to output; writing a '0' has no effect																																	
			Set as output pin 15																																			

Page 171

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
e	RW	PIN30	Set		1	Write: writing a '1' sets pin to output; writing a '0' has no effect																														
						Set as output pin 30																														
			Input		0	Read: pin set as input																														
			Output		1	Read: pin set as output																														
f	RW	PIN31	Set		1	Write: writing a '1' sets pin to output; writing a '0' has no effect																														
						Set as output pin 31																														
			Input		0	Read: pin set as input																														
			Output		1	Read: pin set as output																														
			Set		1	Write: writing a '1' sets pin to output; writing a '0' has no effect																														

### 19.3.7 DIRCLR

Address offset: 0x51C

DIR clear register

Read: reads value of DIR register.

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																						
A	RW	PIN0				Set as input pin 0																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
B	RW	PIN1				Set as input pin 1																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
C	RW	PIN2				Set as input pin 2																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
D	RW	PIN3				Set as input pin 3																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
E	RW	PIN4				Set as input pin 4																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
F	RW	PIN5				Set as input pin 5																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
G	RW	PIN6				Set as input pin 6																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
H	RW	PIN7				Set as input pin 7																																						
			Input	0	Read: pin set as input																																							
			Output	1	Read: pin set as output																																							
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																							
I	RW	PIN8				Set as input pin 8																																						
			Input	0	Read: pin set as input																																							

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
J	RW	PIN9	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
K	RW	PIN10	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
L	RW	PIN11	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
M	RW	PIN12	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
N	RW	PIN13	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
O	RW	PIN14	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
P	RW	PIN15	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
Q	RW	PIN16	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
R	RW	PIN17	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
S	RW	PIN18	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
T	RW	PIN19	Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
U	RW	PIN20	Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
V	RW	PIN21	Output	1	Read: pin set as output																																	
			Clear	1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																	
			Input	0	Read: pin set as input																																	
			Output	1	Read: pin set as output																																	
W	RW	PIN22			Set as input pin 22																																	

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
X	RW	PIN23				Set as input pin 23																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
Y	RW	PIN24				Set as input pin 24																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
Z	RW	PIN25				Set as input pin 25																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
a	RW	PIN26				Set as input pin 26																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
b	RW	PIN27				Set as input pin 27																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
c	RW	PIN28				Set as input pin 28																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
d	RW	PIN29				Set as input pin 29																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
e	RW	PIN30				Set as input pin 30																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				
f	RW	PIN31				Set as input pin 31																																				
			Input		0	Read: pin set as input																																				
			Output		1	Read: pin set as output																																				
			Clear		1	Write: writing a '1' sets pin to input; writing a '0' has no effect																																				

### 19.3.8 LATCH

Address offset: 0x520

Latch register indicating what GPIO pins that have met the criteria set in the PIN\_CNF[n].SENSE registers

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value				Description																										
A	RW	PIN0								Status on whether PIN0 has met criteria set in PIN_CNF0.SENSE register. Write '1' to clear.																										
				NotLatched	0			Criteria has not been met																												
				Latched	1			Criteria has been met																												
B	RW	PIN1								Status on whether PIN1 has met criteria set in PIN_CNF1.SENSE register. Write '1' to clear.																										

Page 175

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
P	RW	PIN15				Status on whether PIN15 has met criteria set in PIN_CNF15.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
Q	RW	PIN16				Status on whether PIN16 has met criteria set in PIN_CNF16.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
R	RW	PIN17				Status on whether PIN17 has met criteria set in PIN_CNF17.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
S	RW	PIN18				Status on whether PIN18 has met criteria set in PIN_CNF18.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
T	RW	PIN19				Status on whether PIN19 has met criteria set in PIN_CNF19.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
U	RW	PIN20				Status on whether PIN20 has met criteria set in PIN_CNF20.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
V	RW	PIN21				Status on whether PIN21 has met criteria set in PIN_CNF21.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
W	RW	PIN22				Status on whether PIN22 has met criteria set in PIN_CNF22.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
X	RW	PIN23				Status on whether PIN23 has met criteria set in PIN_CNF23.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
Y	RW	PIN24				Status on whether PIN24 has met criteria set in PIN_CNF24.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
Z	RW	PIN25				Status on whether PIN25 has met criteria set in PIN_CNF25.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
a	RW	PIN26				Status on whether PIN26 has met criteria set in PIN_CNF26.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
b	RW	PIN27				Status on whether PIN27 has met criteria set in PIN_CNF27.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	
			Latched	1	Criteria has been met																																	
c	RW	PIN28				Status on whether PIN28 has met criteria set in PIN_CNF28.SENSE register. Write '1' to clear.																																
			NotLatched	0	Criteria has not been met																																	



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
			Latched		1	Criteria has been met																																
d	RW	PIN29				Status on whether PIN29 has met criteria set in PIN_CNF29.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																
e	RW	PIN30				Status on whether PIN30 has met criteria set in PIN_CNF30.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																
f	RW	PIN31				Status on whether PIN31 has met criteria set in PIN_CNF31.SENSE register. Write '1' to clear.																																
			NotLatched		0	Criteria has not been met																																
			Latched		1	Criteria has been met																																

### 19.3.9 DETECTMODE

Address offset: 0x524

Select between default DETECT signal behaviour and LDETECT mode

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			A				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DETECTMODE				Select between default DETECT signal behaviour and LDETECT mode																																	
			Default		0	DETECT directly connected to PIN DETECT signals																																	
			LDETECT		1	Use the latched LDETECT behaviour																																	

### 19.3.10 PIN\_CNF[0]

Address offset: 0x700

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																		E	E							D	D	D						C	C	B	A
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	DIR				Pin direction. Same physical register as DIR register																															
			Input		0	Configure pin as an input pin																															
			Output		1	Configure pin as an output pin																															
B	RW	INPUT				Connect or disconnect input buffer																															
			Connect		0	Connect input buffer																															
			Disconnect		1	Disconnect input buffer																															
C	RW	PULL				Pull configuration																															
			Disabled		0	No pull																															
			Pulldown		1	Pull down on pin																															
			Pullup		3	Pull up on pin																															
D	RW	DRIVE				Drive configuration																															
			S0S1		0	Standard '0', standard '1'																															
			H0S1		1	High drive '0', standard '1'																															
			S0H1		2	Standard '0', high drive '1'																															
			H0H1		3	High drive '0', high 'drive '1''																															
			D0S1		4	Disconnect '0' standard '1' (normally used for wired-or connections)																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E					D			D	D	D				C	C	B	A					
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE		Pin sensing mechanism																																		
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.11 PIN\_CNF[1]

Address offset: 0x704

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E					D			D	D				C	C	B	A						
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1''																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																				
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.12 PIN\_CNF[2]

Address offset: 0x708

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															E		E					D			D			D						C			C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 19.3.13 PIN\_CNF[3]

Address offset: 0x70C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E					D			D			D			C			C	B	A			
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE		Pin sensing mechanism																																		
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.14 PIN\_CNF[4]

Address offset: 0x710

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id														E		E					D			D			D			C			C			B			A								
Reset 0x00000002				0										0		0		0			0			0			0			0			0			0			0			1			0		
Id	RW	Field	Value Id	Value	Description																																										
A	RW	DIR			Pin direction. Same physical register as DIR register																																										
			Input	0	Configure pin as an input pin																																										
			Output	1	Configure pin as an output pin																																										
B	RW	INPUT			Connect or disconnect input buffer																																										
			Connect	0	Connect input buffer																																										
			Disconnect	1	Disconnect input buffer																																										
C	RW	PULL			Pull configuration																																										
			Disabled	0	No pull																																										
			Pulldown	1	Pull down on pin																																										
			Pullup	3	Pull up on pin																																										
D	RW	DRIVE			Drive configuration																																										
			S0S1	0	Standard '0', standard '1'																																										
			H0S1	1	High drive '0', standard '1'																																										
			S0H1	2	Standard '0', high drive '1'																																										
			H0H1	3	High drive '0', high 'drive '1''																																										
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																										
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																													
E	RW	SENSE			Pin sensing mechanism																																										
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 19.3.15 PIN\_CNF[5]

Address offset: 0x714

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id														E		E													D		D			D			C		C		B		A				
Reset 0x00000002				0										0		0			0			0										0		0			0			0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																									
A	RW	DIR				Pin direction. Same physical register as DIR register																																									
			Input	0	Configure pin as an input pin																																										
			Output	1	Configure pin as an output pin																																										
B	RW	INPUT				Connect or disconnect input buffer																																									
			Connect	0	Connect input buffer																																										
			Disconnect	1	Disconnect input buffer																																										
C	RW	PULL				Pull configuration																																									
			Disabled	0	No pull																																										
			Pulldown	1	Pull down on pin																																										
			Pullup	3	Pull up on pin																																										
D	RW	DRIVE				Drive configuration																																									
			S0S1	0	Standard '0', standard '1'																																										
			H0S1	1	High drive '0', standard '1'																																										
			S0H1	2	Standard '0', high drive '1'																																										
			H0H1	3	High drive '0', high 'drive '1''																																										
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																										
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE				Pin sensing mechanism																																									
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 19.3.16 PIN\_CNF[6]

Address offset: 0x718

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D		D		D				C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																		E		E					D		D	D				C		C	B	A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE		Pin sensing mechanism																																		
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.17 PIN\_CNF[7]

Address offset: 0x71C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E				D		D	D			C		C	B	A								
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1''																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.18 PIN\_CNF[8]

Address offset: 0x720

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id															E		E				D			D	D				C			C	B	A		
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	DIR				Pin direction. Same physical register as DIR register																														
			Input	0	Configure pin as an input pin																															
			Output	1	Configure pin as an output pin																															
B	RW	INPUT				Connect or disconnect input buffer																														
			Connect	0	Connect input buffer																															
			Disconnect	1	Disconnect input buffer																															
C	RW	PULL				Pull configuration																														
			Disabled	0	No pull																															
			Pulldown	1	Pull down on pin																															
			Pullup	3	Pull up on pin																															
D	RW	DRIVE				Drive configuration																														
			S0S1	0	Standard '0', standard '1'																															
			H0S1	1	High drive '0', standard '1'																															
			S0H1	2	Standard '0', high drive '1'																															
			H0H1	3	High drive '0', high 'drive '1''																															
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																															
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																															
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																															
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																															
E	RW	SENSE				Pin sensing mechanism																														
			Disabled	0	Disabled																															
			High	2	Sense for high level																															
			Low	3	Sense for low level																															

### 19.3.19 PIN\_CNF[9]

Address offset: 0x724

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																				E	E											D	D	D					C	C	B	A
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0						
Id	RW	Field	Value Id	Value	Description																																					
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																					
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																					
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																					
E	RW	SENSE			Pin sensing mechanism																																					
			Disabled	0	Disabled																																					
			High	2	Sense for high level																																					
			Low	3	Sense for low level																																					

### 19.3.20 PIN\_CNF[10]

Address offset: 0x728

Configuration of GPIO pins

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id												E												D												
Reset 0x00000002		0 1 0																																		
Id	RW	Field	Value Id	Value	Description																															
A	RW	DIR			Pin direction. Same physical register as DIR register																															
			Input	0	Configure pin as an input pin																															
			Output	1	Configure pin as an output pin																															
B	RW	INPUT			Connect or disconnect input buffer																															
			Connect	0	Connect input buffer																															
			Disconnect	1	Disconnect input buffer																															
C	RW	PULL			Pull configuration																															
			Disabled	0	No pull																															
			Pulldown	1	Pull down on pin																															
			Pullup	3	Pull up on pin																															
D	RW	DRIVE			Drive configuration																															
			SOS1	0	Standard '0', standard '1'																															
			HOS1	1	High drive '0', standard '1'																															
			SOH1	2	Standard '0', high drive '1'																															
			HOH1	3	High drive '0', high 'drive '1''																															
			DOS1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																															
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																															
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																															
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																															
E	RW	SENSE			Pin sensing mechanism																															
			Disabled	0	Disabled																															
			High	2	Sense for high level																															
			Low	3	Sense for low level																															

### 19.3.21 PIN\_CNF[11]

Address offset: 0x72C

Configuration of GPIO pins



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id														E		E													D		D			D			C		C		B		A				
Reset 0x00000002				0										0		0			0			0										0		0			0			0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																									
A	RW	DIR				Pin direction. Same physical register as DIR register																																									
			Input	0	Configure pin as an input pin																																										
			Output	1	Configure pin as an output pin																																										
B	RW	INPUT				Connect or disconnect input buffer																																									
			Connect	0	Connect input buffer																																										
			Disconnect	1	Disconnect input buffer																																										
C	RW	PULL				Pull configuration																																									
			Disabled	0	No pull																																										
			Pulldown	1	Pull down on pin																																										
			Pullup	3	Pull up on pin																																										
D	RW	DRIVE				Drive configuration																																									
			S0S1	0	Standard '0', standard '1'																																										
			H0S1	1	High drive '0', standard '1'																																										
			S0H1	2	Standard '0', high drive '1'																																										
			H0H1	3	High drive '0', high 'drive '1''																																										
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																										
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE				Pin sensing mechanism																																									
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 19.3.22 PIN\_CNF[12]

Address offset: 0x730

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id														E		E					D			D		D					C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	DIR				Pin direction. Same physical register as DIR register																																			
			Input	0	Configure pin as an input pin																																				
			Output	1	Configure pin as an output pin																																				
B	RW	INPUT				Connect or disconnect input buffer																																			
			Connect	0	Connect input buffer																																				
			Disconnect	1	Disconnect input buffer																																				
C	RW	PULL				Pull configuration																																			
			Disabled	0	No pull																																				
			Pulldown	1	Pull down on pin																																				
			Pullup	3	Pull up on pin																																				
D	RW	DRIVE				Drive configuration																																			
			S0S1	0	Standard '0', standard '1'																																				
			H0S1	1	High drive '0', standard '1'																																				
			S0H1	2	Standard '0', high drive '1'																																				
			H0H1	3	High drive '0', high 'drive '1''																																				
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																				

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id														E		E					D			D	D	D				C	C	B	A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 19.3.23 PIN\_CNF[13]

Address offset: 0x734

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E					D			D	D				C	C	B	A						
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1''																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																				
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.24 PIN\_CNF[14]

Address offset: 0x738

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 19.3.25 PIN\_CNF[15]

Address offset: 0x73C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id														E		E					D			D		D					C		C		B		A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	DIR				Pin direction. Same physical register as DIR register																																			
			Input	0	Configure pin as an input pin																																				
			Output	1	Configure pin as an output pin																																				
B	RW	INPUT				Connect or disconnect input buffer																																			
			Connect	0	Connect input buffer																																				
			Disconnect	1	Disconnect input buffer																																				
C	RW	PULL				Pull configuration																																			
			Disabled	0	No pull																																				
			Pulldown	1	Pull down on pin																																				
			Pullup	3	Pull up on pin																																				
D	RW	DRIVE				Drive configuration																																			
			S0S1	0	Standard '0', standard '1'																																				
			H0S1	1	High drive '0', standard '1'																																				
			S0H1	2	Standard '0', high drive '1'																																				
			H0H1	3	High drive '0', high 'drive '1''																																				
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																				

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id														E		E					D			D			D			C			C	B	A
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE			Pin sensing mechanism																														
			Disabled	0	Disabled																														
			High	2	Sense for high level																														
			Low	3	Sense for low level																														

### 19.3.26 PIN\_CNF[16]

Address offset: 0x740

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																						
A	RW	DIR			Pin direction. Same physical register as DIR register																																						
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT			Connect or disconnect input buffer																																						
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL			Pull configuration																																						
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE			Drive configuration																																						
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																						
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																						
H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																									
E	RW	SENSE			Pin sensing mechanism																																						
			Disabled	0	Disabled																																						
			High	2	Sense for high level																																						
			Low	3	Sense for low level																																						

### 19.3.27 PIN\_CNF[17]

Address offset: 0x744

Configuration of GPIO pins

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id															E		E					D			D			D						C			C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 19.3.28 PIN\_CNF[18]

Address offset: 0x748

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																			E	E											D	D	D											C	C	B	A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0									
Id	RW	Field	Value	Id	Value	Description																																									
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE						Pin sensing mechanism																																							
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 19.3.29 PIN\_CNF[19]

Address offset: 0x74C

Configuration of GPIO pins

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id												E												D												
Reset 0x00000002		0 1 0																																		
Id	RW	Field	Value	Id	Value	Description																														
A	RW	DIR				Pin direction. Same physical register as DIR register																														
			Input	0		Configure pin as an input pin																														
			Output	1		Configure pin as an output pin																														
B	RW	INPUT				Connect or disconnect input buffer																														
			Connect	0		Connect input buffer																														
			Disconnect	1		Disconnect input buffer																														
C	RW	PULL				Pull configuration																														
			Disabled	0		No pull																														
			Pulldown	1		Pull down on pin																														
			Pullup	3		Pull up on pin																														
D	RW	DRIVE				Drive configuration																														
			SOS1	0		Standard '0', standard '1'																														
			HOS1	1		High drive '0', standard '1'																														
			SOH1	2		Standard '0', high drive '1'																														
			HOH1	3		High drive '0', high 'drive '1'																														
			DOS1	4		Disconnect '0' standard '1' (normally used for wired-or connections)																														
			DOH1	5		Disconnect '0', high drive '1' (normally used for wired-or connections)																														
			SOD1	6		Standard '0'. disconnect '1' (normally used for wired-and connections)																														
			HOD1	7		High drive '0', disconnect '1' (normally used for wired-and connections)																														
E	RW	SENSE				Pin sensing mechanism																														
			Disabled	0		Disabled																														
			High	2		Sense for high level																														
			Low	3		Sense for low level																														

### 19.3.30 PIN\_CNF[20]

Address offset: 0x750

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 19.3.31 PIN\_CNF[21]

Address offset: 0x754

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id														E		E					D			D			D			C			C			B			A				
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	DIR				Pin direction. Same physical register as DIR register																																					
			Input	0	Configure pin as an input pin																																						
			Output	1	Configure pin as an output pin																																						
B	RW	INPUT				Connect or disconnect input buffer																																					
			Connect	0	Connect input buffer																																						
			Disconnect	1	Disconnect input buffer																																						
C	RW	PULL				Pull configuration																																					
			Disabled	0	No pull																																						
			Pulldown	1	Pull down on pin																																						
			Pullup	3	Pull up on pin																																						
D	RW	DRIVE				Drive configuration																																					
			S0S1	0	Standard '0', standard '1'																																						
			H0S1	1	High drive '0', standard '1'																																						
			S0H1	2	Standard '0', high drive '1'																																						
			H0H1	3	High drive '0', high 'drive '1''																																						
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id														E		E					D			D			D						C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0							
Id	RW	Field	Value Id	Value	Description																																							
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																							
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																							
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																							
E	RW	SENSE			Pin sensing mechanism																																							
			Disabled	0	Disabled																																							
			High	2	Sense for high level																																							
			Low	3	Sense for low level																																							

### 19.3.32 PIN\_CNF[22]

Address offset: 0x758

Configuration of GPIO pins

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																								
Id																				E		E		D			D			D			C			C			B			A		
Reset 0x00000002				0 1 0																																								
Id	RW	Field	Value Id	Value	Description																																							
A	RW	DIR			Pin direction. Same physical register as DIR register																																							
			Input	0	Configure pin as an input pin																																							
			Output	1	Configure pin as an output pin																																							
B	RW	INPUT			Connect or disconnect input buffer																																							
			Connect	0	Connect input buffer																																							
			Disconnect	1	Disconnect input buffer																																							
C	RW	PULL			Pull configuration																																							
			Disabled	0	No pull																																							
			Pulldown	1	Pull down on pin																																							
			Pullup	3	Pull up on pin																																							
D	RW	DRIVE			Drive configuration																																							
			SOS1	0	Standard '0', standard '1'																																							
			HOS1	1	High drive '0', standard '1'																																							
			SOH1	2	Standard '0', high drive '1'																																							
			HOH1	3	High drive '0', high 'drive '1'																																							
			DOS1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																							
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																							
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																							
HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE			Pin sensing mechanism																																							
			Disabled	0	Disabled																																							
			High	2	Sense for high level																																							
			Low	3	Sense for low level																																							

### 19.3.33 PIN\_CNF[23]

Address offset: 0x75C

Configuration of GPIO pins



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																							
Id														E		E													D			D			D						C			C			B			A								
Reset 0x00000002				0										0		0			0			0										0			0			0			0			0			0			0			1			0		
Id	RW	Field	Value	Id	Value	Description																																																				
A	RW	DIR				Pin direction. Same physical register as DIR register																																																				
			Input	0	Configure pin as an input pin																																																					
			Output	1	Configure pin as an output pin																																																					
B	RW	INPUT				Connect or disconnect input buffer																																																				
			Connect	0	Connect input buffer																																																					
			Disconnect	1	Disconnect input buffer																																																					
C	RW	PULL				Pull configuration																																																				
			Disabled	0	No pull																																																					
			Pulldown	1	Pull down on pin																																																					
			Pullup	3	Pull up on pin																																																					
D	RW	DRIVE				Drive configuration																																																				
			S0S1	0	Standard '0', standard '1'																																																					
			H0S1	1	High drive '0', standard '1'																																																					
			S0H1	2	Standard '0', high drive '1'																																																					
			H0H1	3	High drive '0', high 'drive '1''																																																					
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																																					
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																																					
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																																					
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																																					
E	RW	SENSE				Pin sensing mechanism																																																				
			Disabled	0	Disabled																																																					
			High	2	Sense for high level																																																					
			Low	3	Sense for low level																																																					

### 19.3.34 PIN\_CNF[24]

Address offset: 0x760

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D			D		D					C		C		B		A		
Reset 0x00000002				0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
Id																		E		E					D			D			D						C			C			B			A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
Reset 0x00000002				0																																	0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0			0		

### 19.3.35 PIN\_CNF[25]

Address offset: 0x764

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id														E		E					D			D			D						C			C			B			A			
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																								
A	RW	DIR			Pin direction. Same physical register as DIR register																																								
			Input	0	Configure pin as an input pin																																								
			Output	1	Configure pin as an output pin																																								
B	RW	INPUT			Connect or disconnect input buffer																																								
			Connect	0	Connect input buffer																																								
			Disconnect	1	Disconnect input buffer																																								
C	RW	PULL			Pull configuration																																								
			Disabled	0	No pull																																								
			Pulldown	1	Pull down on pin																																								
			Pullup	3	Pull up on pin																																								
D	RW	DRIVE			Drive configuration																																								
			S0S1	0	Standard '0', standard '1'																																								
			H0S1	1	High drive '0', standard '1'																																								
			S0H1	2	Standard '0', high drive '1'																																								
			H0H1	3	High drive '0', high 'drive '1''																																								
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																								
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																								
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																								
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																								
E	RW	SENSE			Pin sensing mechanism																																								
			Disabled	0	Disabled																																								
			High	2	Sense for high level																																								
			Low	3	Sense for low level																																								

### 19.3.36 PIN\_CNF[26]

Address offset: 0x768

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E			D			D			D			C			C			B			A		
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																		
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																		
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																		
E	RW	SENSE				Pin sensing mechanism																																	
			Disabled	0	Disabled																																		
			High	2	Sense for high level																																		
			Low	3	Sense for low level																																		

### 19.3.37 PIN\_CNF[27]

Address offset: 0x76C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id														E		E					D		D		D				C		C		B		A	
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	DIR				Pin direction. Same physical register as DIR register																														
			Input	0	Configure pin as an input pin																															
			Output	1	Configure pin as an output pin																															
B	RW	INPUT				Connect or disconnect input buffer																														
			Connect	0	Connect input buffer																															
			Disconnect	1	Disconnect input buffer																															
C	RW	PULL				Pull configuration																														
			Disabled	0	No pull																															
			Pulldown	1	Pull down on pin																															
			Pullup	3	Pull up on pin																															
D	RW	DRIVE				Drive configuration																														
			S0S1	0	Standard '0', standard '1'																															
			H0S1	1	High drive '0', standard '1'																															
			S0H1	2	Standard '0', high drive '1'																															
			H0H1	3	High drive '0', high 'drive '1''																															
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E				D			D	D				C	C	B	A							
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.38 PIN\_CNF[28]

Address offset: 0x770

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id														E		E					D			D			D						C			C			B			A			
Reset 0x00000002				0										0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value Id	Value	Description																																								
A	RW	DIR			Pin direction. Same physical register as DIR register																																								
			Input	0	Configure pin as an input pin																																								
			Output	1	Configure pin as an output pin																																								
B	RW	INPUT			Connect or disconnect input buffer																																								
			Connect	0	Connect input buffer																																								
			Disconnect	1	Disconnect input buffer																																								
C	RW	PULL			Pull configuration																																								
			Disabled	0	No pull																																								
			Pulldown	1	Pull down on pin																																								
			Pullup	3	Pull up on pin																																								
D	RW	DRIVE			Drive configuration																																								
			S0S1	0	Standard '0', standard '1'																																								
			H0S1	1	High drive '0', standard '1'																																								
			S0H1	2	Standard '0', high drive '1'																																								
			H0H1	3	High drive '0', high 'drive '1'																																								
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																								
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																								
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																								
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																								
E	RW	SENSE			Pin sensing mechanism																																								
			Disabled	0	Disabled																																								
			High	2	Sense for high level																																								
			Low	3	Sense for low level																																								

### 19.3.39 PIN\_CNF[29]

Address offset: 0x774

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id														E		E													D		D			D			C		C		B		A				
Reset 0x00000002				0										0		0			0			0										0		0			0			0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																									
A	RW	DIR				Pin direction. Same physical register as DIR register																																									
			Input	0	Configure pin as an input pin																																										
			Output	1	Configure pin as an output pin																																										
B	RW	INPUT				Connect or disconnect input buffer																																									
			Connect	0	Connect input buffer																																										
			Disconnect	1	Disconnect input buffer																																										
C	RW	PULL				Pull configuration																																									
			Disabled	0	No pull																																										
			Pulldown	1	Pull down on pin																																										
			Pullup	3	Pull up on pin																																										
D	RW	DRIVE				Drive configuration																																									
			S0S1	0	Standard '0', standard '1'																																										
			H0S1	1	High drive '0', standard '1'																																										
			S0H1	2	Standard '0', high drive '1'																																										
			H0H1	3	High drive '0', high 'drive '1''																																										
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																										
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																										
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																										
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																										
E	RW	SENSE				Pin sensing mechanism																																									
			Disabled	0	Disabled																																										
			High	2	Sense for high level																																										
			Low	3	Sense for low level																																										

### 19.3.40 PIN\_CNF[30]

Address offset: 0x778

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id														E		E					D			D		D					C		C		B		A		
Reset 0x00000002				0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		0		1		0	
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DIR				Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																		
			Output	1	Configure pin as an output pin																																		
B	RW	INPUT				Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																		
			Disconnect	1	Disconnect input buffer																																		
C	RW	PULL				Pull configuration																																	
			Disabled	0	No pull																																		
			Pulldown	1	Pull down on pin																																		
			Pullup	3	Pull up on pin																																		
D	RW	DRIVE				Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																		
			H0S1	1	High drive '0', standard '1'																																		
			S0H1	2	Standard '0', high drive '1'																																		
			H0H1	3	High drive '0', high 'drive '1''																																		
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E				D		D		D				C		C		B		A				
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0			
Id	RW	Field	Value Id	Value	Description																																	
			DOH1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			SOD1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			HOD1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

### 19.3.41 PIN\_CNF[31]

Address offset: 0x77C

Configuration of GPIO pins

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		E		D		D		D				C		C		B		A						
Reset 0x00000002				0 1 0																																		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	DIR			Pin direction. Same physical register as DIR register																																	
			Input	0	Configure pin as an input pin																																	
			Output	1	Configure pin as an output pin																																	
B	RW	INPUT			Connect or disconnect input buffer																																	
			Connect	0	Connect input buffer																																	
			Disconnect	1	Disconnect input buffer																																	
C	RW	PULL			Pull configuration																																	
			Disabled	0	No pull																																	
			Pulldown	1	Pull down on pin																																	
			Pullup	3	Pull up on pin																																	
D	RW	DRIVE			Drive configuration																																	
			S0S1	0	Standard '0', standard '1'																																	
			H0S1	1	High drive '0', standard '1'																																	
			S0H1	2	Standard '0', high drive '1'																																	
			H0H1	3	High drive '0', high 'drive '1'																																	
			D0S1	4	Disconnect '0' standard '1' (normally used for wired-or connections)																																	
			D0H1	5	Disconnect '0', high drive '1' (normally used for wired-or connections)																																	
			S0D1	6	Standard '0'. disconnect '1' (normally used for wired-and connections)																																	
			H0D1	7	High drive '0', disconnect '1' (normally used for wired-and connections)																																	
E	RW	SENSE			Pin sensing mechanism																																	
			Disabled	0	Disabled																																	
			High	2	Sense for high level																																	
			Low	3	Sense for low level																																	

## 19.4 Electrical specification

### 19.4.1 GPIO Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
V <sub>IH</sub>	Input high voltage	0.7 x VDD		VDD	V

Symbol	Description	Min.	Typ.	Max.	Units
$V_{IL}$	Input low voltage	VSS		$0.3 \times V_{DD}$	V
$V_{OH,SD}$	Output high voltage, standard drive, 0.5 mA, $V_{DD} \geq 1.7$	$V_{DD}-0.4$		VDD	V
$V_{OH,HDL}$	Output high voltage, high drive, 5 mA, $V_{DD} \geq 2.7$ V	$V_{DD}-0.4$		VDD	V
$V_{OH,HDL}$	Output high voltage, high drive, 3 mA, $V_{DD} \geq 1.7$ V	$V_{DD}-0.4$		VDD	V
$V_{OL,SD}$	Output low voltage, standard drive, 0.5 mA, $V_{DD} \geq 1.7$	VSS		$V_{SS}+0.4$	V
$V_{OL,HDL}$	Output low voltage, high drive, 5 mA, $V_{DD} \geq 2.7$ V	VSS		$V_{SS}+0.4$	V
$V_{OL,HDL}$	Output low voltage, high drive, 3 mA, $V_{DD} \geq 1.7$ V	VSS		$V_{SS}+0.4$	V
$I_{OL,SD}$	Current at $V_{SS}+0.4$ V, output set low, standard drive, $V_{DD} \geq 1.7$	1	2	4	mA
$I_{OL,HDL}$	Current at $V_{SS}+0.4$ V, output set low, high drive, $V_{DD} \geq 2.7$ V	6	10	15	mA
$I_{OL,HDL}$	Current at $V_{SS}+0.4$ V, output set low, high drive, $V_{DD} \geq 1.7$ V	3			mA
$I_{OH,SD}$	Current at $V_{DD}-0.4$ V, output set high, standard drive, $V_{DD} \geq 1.7$	1	2	4	mA
$I_{OH,HDL}$	Current at $V_{DD}-0.4$ V, output set high, high drive, $V_{DD} \geq 2.7$ V	6	9	14	mA
$I_{OH,HDL}$	Current at $V_{DD}-0.4$ V, output set high, high drive, $V_{DD} \geq 1.7$ V	3			mA
$t_{RF,15pF}$	Rise/fall time, standard drive mode, 10-90%, 15 pF load <sup>1</sup>		9		ns
$t_{RF,25pF}$	Rise/fall time, standard drive mode, 10-90%, 25 pF load <sup>1</sup>		13		ns
$t_{RF,50pF}$	Rise/fall time, standard drive mode, 10-90%, 50 pF load <sup>1</sup>		25		ns
$t_{HRF,15pF}$	Rise/Fall time, high drive mode, 10-90%, 15 pF load <sup>1</sup>		4		ns
$t_{HRF,25pF}$	Rise/Fall time, high drive mode, 10-90%, 25 pF load <sup>1</sup>		5		ns
$t_{HRF,50pF}$	Rise/Fall time, high drive mode, 10-90%, 50 pF load <sup>1</sup>		8		ns
$R_{PU}$	Pull-up resistance	11	13	16	k $\Omega$
$R_{PD}$	Pull-down resistance	11	13	16	k $\Omega$
$C_{PAD}$	Pad capacitance		3		pF
$C_{PAD\_NFC}$	Pad capacitance on NFC pads		4		pF
$I_{NFC\_LEAK}$	Leakage current between NFC pads when driven to different states		1	4	$\mu$ A

The current drawn from the battery when GPIO is active as an output is calculated as follows:

$$I_{GPIO} = V_{DD} C_{load} f$$

$C_{load}$  being the load capacitance and “f” is the switching frequency.

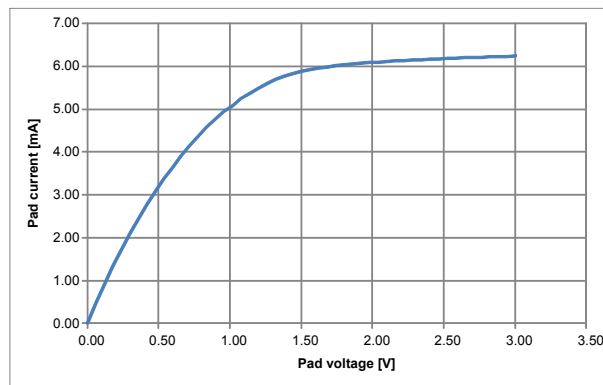


Figure 24: GPIO drive strength vs Voltage, standard drive, VDD = 3.0 V

<sup>1</sup> Rise and fall times based on simulations

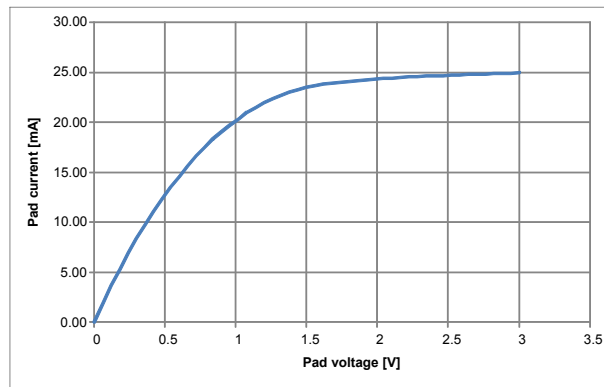


Figure 25: GPIO drive strength vs Voltage, high drive, VDD = 3.0 V

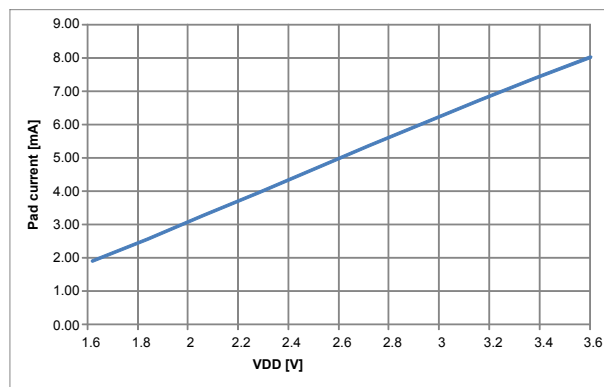


Figure 26: Max sink current vs Voltage, standard drive

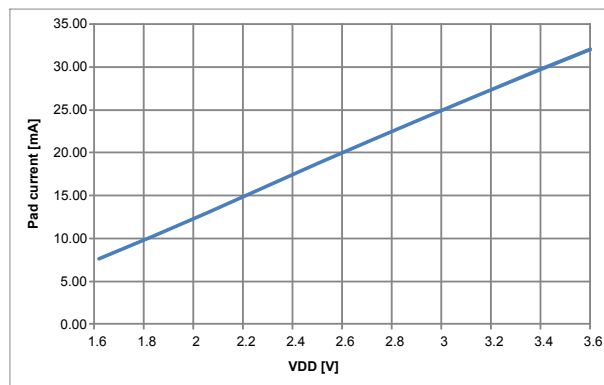


Figure 27: Max sink current vs Voltage, high drive

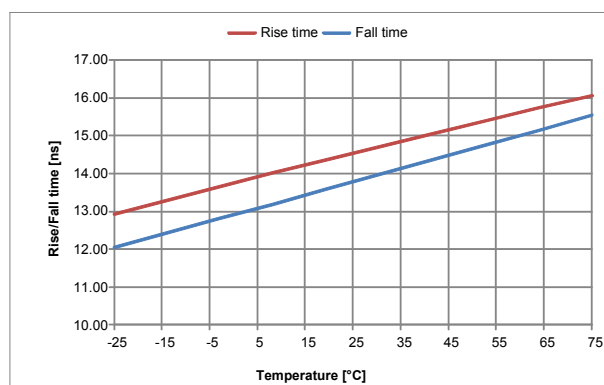


Figure 28: Rise and fall time vs Temperature, 10%-90%, 25pF load capacitance, VDD = 3.0 V



## 20 GPIOTE — GPIO tasks and events

The GPIO tasks and events (GPIOTE) module provides functionality for accessing GPIO pins using tasks and events. Each GPIOTE channel can be assigned to one pin.

A GPIOTE block enables GPIOs to generate events on pin state change which can be used to carry out tasks through the PPI system. A GPIO can also be driven to change state on system events using the PPI system. Low power detection of pin state changes is possible when in System ON or System OFF.

**Table 23: GPIOTE properties**

Instance	Number of GPIOTE channels
GPIOTE	8

Up to three tasks can be used in each GPIOTE channel for performing write operations to a pin. Two tasks are fixed (SET and CLR), and one (OUT) is configurable to perform following operations:

- Set
- Clear
- Toggle

An event can be generated in each GPIOTE channel from one of the following input conditions:

- Rising edge
- Falling edge
- Any change

### 20.1 Pin events and tasks

The GPIOTE module has a number of tasks and events that can be configured to operate on individual GPIO pins.

The tasks (SET[n], CLR[n] and OUT[n]) can be used for writing to individual pins, and the events (IN[n]) can be generated from changes occurring at the inputs of individual pins.

The SET task will set the pin selected in CONFIG[n].PSEL to high.

The CLR task will set the pin low.

The effect of the OUT task on the pin is configurable in CONFIG[n].POLARITY , and can either set the pin high, set it low, or toggle it.

The tasks and events are configured using the CONFIG[n] registers. Every set of SET, CLR and OUT[n] tasks and IN[n] events has one CONFIG[n] register associated with it.

As long as a SET[n], CLR[n] and OUT[n] task or an IN[n] event is configured to control a pin *n*, the pin's output value will only be updated by the GPIOTE module. The pin's output value as specified in the GPIO will therefore be ignored as long as the pin is controlled by GPIOTE. Attempting to write a pin as a normal GPIO pin will have no effect. When the GPIOTE is disconnected from a pin, see MODE field in CONFIG[n] register, the associated pin will get the output and configuration values specified in the GPIO module.

When conflicting tasks are triggered simultaneously (i.e. during the same clock cycle) in one channel, the precedence of the tasks will be as described in [Table 24: Task priorities](#) on page 201.

**Table 24: Task priorities**

Priority	Task
1	OUT
2	CLR
3	SET

When setting the CONFIG[n] registers, MODE=Disabled does not have the same effect as MODE=Task and POLARITY=None. In the latter case, a CLR or SET task occurring at the exact same time as OUT will end up with no change on the pin, according to the priorities described in the table above.

When a GPIOTE channel is configured to operate on a pin as a task, the initial value of that pin is configured in the OUTINIT field of CONFIG[n].

## 20.2 Port event

PORT is an event that can be generated from multiple input pins using the GPIO DETECT signal.

The event will be generated on the rising edge of the DETECT signal. See [GPIO — General purpose input/output](#) on page 155 for more information about the DETECT signal.

Putting the system into System ON IDLE while DETECT is high will not cause DETECT to wake the system up again. Make sure to clear all DETECT sources before entering sleep. If the LATCH register is used as a source, if any bit in LATCH is still high after clearing all or part of the register (for instance due to one of the PINx.DETECT signal still high), a new rising edge will be generated on DETECT, see [Pin configuration](#) on page 155.

Trying to put the system to System OFF while DETECT is high will cause a wakeup from System OFF reset.

This feature is always enabled although the peripheral itself appears to be IDLE, that is, no clocks or other power intensive infrastructure have to be requested to keep this feature enabled. This feature can therefore be used to wake up the CPU from a WFI or WFE type sleep in System ON with all peripherals and the CPU idle, that is, lowest power consumption in System ON mode.

In order to prevent spurious interrupts from the PORT event while configuring the sources, the user shall first disable interrupts on the PORT event (through INTENCLR.PORT), then configure the sources (PIN\_CNF[n].SENSE), clear any potential event that could have occurred during configuration (write '1' to EVENTS\_PORT), and finally enable interrupts (through INTENSET.PORT).

## 20.3 Tasks and events pin configuration

Each GPIOTE channel is associated with one physical GPIO pin through the CONFIG.PSEL field.

When Event mode is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will be configured as an input, overriding the DIR setting in GPIO. Similarly, when Task mode is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will be configured as an output overriding the DIR setting and OUT value in GPIO. When Disabled is selected in CONFIG.MODE, the pin specified by CONFIG.PSEL will use its configuration from the PIN[n].CNF registers in GPIO.

Only one GPIOTE channel can be assigned to one physical pin. Failing to do so may result in unpredictable behavior.

## 20.4 Registers

**Table 25: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40006000	GPIOTE	GPIOTE	GPIO tasks and events	

**Table 26: Register Overview**

Register	Offset	Description
TASKS_OUT[0]	0x000	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is configured in CONFIG[0].POLARITY.
TASKS_OUT[1]	0x004	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is configured in CONFIG[1].POLARITY.

Register	Offset	Description
TASKS_OUT[2]	0x008	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is configured in CONFIG[2].POLARITY.
TASKS_OUT[3]	0x00C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is configured in CONFIG[3].POLARITY.
TASKS_OUT[4]	0x010	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is configured in CONFIG[4].POLARITY.
TASKS_OUT[5]	0x014	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is configured in CONFIG[5].POLARITY.
TASKS_OUT[6]	0x018	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is configured in CONFIG[6].POLARITY.
TASKS_OUT[7]	0x01C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is configured in CONFIG[7].POLARITY.
TASKS_SET[0]	0x030	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is to set it high.
TASKS_SET[1]	0x034	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is to set it high.
TASKS_SET[2]	0x038	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is to set it high.
TASKS_SET[3]	0x03C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is to set it high.
TASKS_SET[4]	0x040	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is to set it high.
TASKS_SET[5]	0x044	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is to set it high.
TASKS_SET[6]	0x048	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is to set it high.
TASKS_SET[7]	0x04C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is to set it high.
TASKS_CLR[0]	0x060	Task for writing to pin specified in CONFIG[0].PSEL. Action on pin is to set it low.
TASKS_CLR[1]	0x064	Task for writing to pin specified in CONFIG[1].PSEL. Action on pin is to set it low.
TASKS_CLR[2]	0x068	Task for writing to pin specified in CONFIG[2].PSEL. Action on pin is to set it low.
TASKS_CLR[3]	0x06C	Task for writing to pin specified in CONFIG[3].PSEL. Action on pin is to set it low.
TASKS_CLR[4]	0x070	Task for writing to pin specified in CONFIG[4].PSEL. Action on pin is to set it low.
TASKS_CLR[5]	0x074	Task for writing to pin specified in CONFIG[5].PSEL. Action on pin is to set it low.
TASKS_CLR[6]	0x078	Task for writing to pin specified in CONFIG[6].PSEL. Action on pin is to set it low.
TASKS_CLR[7]	0x07C	Task for writing to pin specified in CONFIG[7].PSEL. Action on pin is to set it low.
EVENTS_IN[0]	0x100	Event generated from pin specified in CONFIG[0].PSEL
EVENTS_IN[1]	0x104	Event generated from pin specified in CONFIG[1].PSEL
EVENTS_IN[2]	0x108	Event generated from pin specified in CONFIG[2].PSEL
EVENTS_IN[3]	0x10C	Event generated from pin specified in CONFIG[3].PSEL
EVENTS_IN[4]	0x110	Event generated from pin specified in CONFIG[4].PSEL
EVENTS_IN[5]	0x114	Event generated from pin specified in CONFIG[5].PSEL
EVENTS_IN[6]	0x118	Event generated from pin specified in CONFIG[6].PSEL
EVENTS_IN[7]	0x11C	Event generated from pin specified in CONFIG[7].PSEL
EVENTS_PORT	0x17C	Event generated from multiple input GPIO pins with SENSE mechanism enabled
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
CONFIG[0]	0x510	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[1]	0x514	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[2]	0x518	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[3]	0x51C	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[4]	0x520	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[5]	0x524	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[6]	0x528	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event
CONFIG[7]	0x52C	Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

### 20.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	IN0				Write '1' to Enable interrupt for IN[0] event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				I														H G F E D C B A																					
Reset 0x00000000				0 0																																			
Id	RW	Field	Value Id	Value	Description																																		
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			See <a href="#">EVENTS_IN[0]</a>																																				
B	RW	IN1	Write '1' to Enable interrupt for IN[1] event																																				
			See <a href="#">EVENTS_IN[1]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[2] event																																				
			See <a href="#">EVENTS_IN[2]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[3] event																																				
			See <a href="#">EVENTS_IN[3]</a>																																				
D	RW	IN3	Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[4] event																																				
E	RW	IN4	Write '1' to Enable interrupt for IN[4] event																																				
			See <a href="#">EVENTS_IN[4]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[5] event																																				
			See <a href="#">EVENTS_IN[5]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[6] event																																				
			See <a href="#">EVENTS_IN[6]</a>																																				
G	RW	IN6	Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for IN[7] event																																				
H	RW	IN7	Write '1' to Enable interrupt for IN[7] event																																				
			See <a href="#">EVENTS_IN[7]</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Enable interrupt for PORT event																																				
			See <a href="#">EVENTS_PORT</a>																																				
			Set	1	Enable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		

## 20.4.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	IN0				Write '1' to Disable interrupt for IN[0] event																													
						See <a href="#">EVENTS_IN[0]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	IN1				Write '1' to Disable interrupt for IN[1] event																													
						See <a href="#">EVENTS_IN[1]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	IN2				Write '1' to Disable interrupt for IN[2] event																													
						See <a href="#">EVENTS_IN[2]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
D	RW	IN3				Write '1' to Disable interrupt for IN[3] event																													
						See <a href="#">EVENTS_IN[3]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
E	RW	IN4				Write '1' to Disable interrupt for IN[4] event																													
						See <a href="#">EVENTS_IN[4]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
F	RW	IN5				Write '1' to Disable interrupt for IN[5] event																													
						See <a href="#">EVENTS_IN[5]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
G	RW	IN6				Write '1' to Disable interrupt for IN[6] event																													
						See <a href="#">EVENTS_IN[6]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
H	RW	IN7				Write '1' to Disable interrupt for IN[7] event																													
						See <a href="#">EVENTS_IN[7]</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
I	RW	PORT				Write '1' to Disable interrupt for PORT event																													
						See <a href="#">EVENTS_PORT</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 20.4.3 CONFIG[0]

Address offset: 0x510

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D D C B B B B B A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MODE				Mode																													
			Disabled	0		Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																													
			Event	1		Event mode																													
						The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																													
			Task	3		Task mode																													
						The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																													
B	RW	PSEL		[0..31]		GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																													
C	RW	PORT		[0..1]		Port number																													
D	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																													
			None	0		Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																													
			LoToHi	1		Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																													
			HiToLo	2		Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																													
			Toggle	3		Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																													
E	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																													
			Low	0		Task mode: Initial value of pin before task triggering is low																													
			High	1		Task mode: Initial value of pin before task triggering is high																													

#### 20.4.4 CONFIG[1]

Address offset: 0x514

### Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				E																D		D		C				B		B		B		B		A		A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	MODE			Mode																																		
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																		
			Event	1	Event mode																																		
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																		
			Task	3	Task mode																																		
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
							task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																												
B	RW	PSEL			[0..31]		GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																												
C	RW	PORT			[0..1]		Port number																												
D	RW	POLARITY					When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																												
			None		0		Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																												
			LoToHi		1		Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																												
			HiToLo		2		Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																												
			Toggle		3		Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																												
E	RW	OUTINIT					When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																												
			Low		0		Task mode: Initial value of pin before task triggering is low																												
			High		1		Task mode: Initial value of pin before task triggering is high																												

### 20.4.5 CONFIG[2]

Address offset: 0x518

### Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number																																		
Id																																		
Reset 0x00000000			0																															
Id	RW	Field	Value Id	Value	Description																													
A	RW	MODE			Mode																													
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																													
			Event	1	Event mode																													
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																													
			Task	3	Task mode																													
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																													
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																													
C	RW	PORT		[0..1]	Port number																													
D	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																													
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																													
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																E		D		D		C		B	B	B	B													A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value	Description																																				
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																				
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																				
E	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																				
			Low	0	Task mode: Initial value of pin before task triggering is low																																				
			High	1	Task mode: Initial value of pin before task triggering is high																																				

## 20.4.6 CONFIG[3]

Address offset: 0x51C

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																			E	D		D	C		B	B	B	B	B											A	A
Reset 0x00000000				0 0																																					
Id	RW	Field	Value Id	Value	Description																																				
A	RW	MODE			Mode																																				
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																				
			Event	1	Event mode																																				
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																				
			Task	3	Task mode																																				
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																				
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																				
C	RW	PORT		[0..1]	Port number																																				
D	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																				
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																				
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																				
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																				
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																				
E	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																				
			Low	0	Task mode: Initial value of pin before task triggering is low																																				
			High	1	Task mode: Initial value of pin before task triggering is high																																				

## 20.4.7 CONFIG[4]

Address offset: 0x520

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event



### 20.4.8 CONFIG[5]

### Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Page 209

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id														E		D		D	C		B	B	B	B	B											A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																															
						task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																															
B	RW	PSEL			[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																															
C	RW	PORT			[0..1]	Port number																															
D	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																															
			None	0		Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																															
			LoToHi	1		Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																															
			HiToLo	2		Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																															
			Toggle	3		Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																															
E	RW	OUTINIT				When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																															
			Low	0		Task mode: Initial value of pin before task triggering is low																															
			High	1		Task mode: Initial value of pin before task triggering is high																															

## 20.4.9 CONFIG[6]

Address offset: 0x528

Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														E		D		D		C		B	B	B	B	B											A	A
Reset 0x00000000				0 0																																		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	MODE				Mode																																
			Disabled		0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																
			Event		1	Event mode																																
						The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																
			Task		3	Task mode																																
						The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																
B	RW	PSEL			[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																
C	RW	PORT			[0..1]	Port number																																
D	RW	POLARITY				When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																
			None		0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																
			LoToHi		1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																E		D		D			C	B	B	B	B	B											A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value	Description																																			
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																			
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																			
E	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																			
			Low	0	Task mode: Initial value of pin before task triggering is low																																			
			High	1	Task mode: Initial value of pin before task triggering is high																																			

## 20.4.10 CONFIG[7]

Address offset: 0x52C


Configuration for OUT[n], SET[n] and CLR[n] tasks and IN[n] event

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id																			E	D		D	C		B	B	B	B	B											A	A
Reset 0x00000000				0 0																																					
Id	RW	Field	Value Id	Value	Description																																				
A	RW	MODE			Mode																																				
			Disabled	0	Disabled. Pin specified by PSEL will not be acquired by the GPIOTE module.																																				
			Event	1	Event mode																																				
					The pin specified by PSEL will be configured as an input and the IN[n] event will be generated if operation specified in POLARITY occurs on the pin.																																				
			Task	3	Task mode																																				
					The GPIO specified by PSEL will be configured as an output and triggering the SET[n], CLR[n] or OUT[n] task will perform the operation specified by POLARITY on the pin. When enabled as a task the GPIOTE module will acquire the pin and the pin can no longer be written as a regular output pin from the GPIO module.																																				
B	RW	PSEL		[0..31]	GPIO number associated with SET[n], CLR[n] and OUT[n] tasks and IN[n] event																																				
C	RW	PORT		[0..1]	Port number																																				
D	RW	POLARITY			When In task mode: Operation to be performed on output when OUT[n] task is triggered. When In event mode: Operation on input that shall trigger IN[n] event.																																				
			None	0	Task mode: No effect on pin from OUT[n] task. Event mode: no IN[n] event generated on pin activity.																																				
			LoToHi	1	Task mode: Set pin from OUT[n] task. Event mode: Generate IN[n] event when rising edge on pin.																																				
			HiToLo	2	Task mode: Clear pin from OUT[n] task. Event mode: Generate IN[n] event when falling edge on pin.																																				
			Toggle	3	Task mode: Toggle pin from OUT[n]. Event mode: Generate IN[n] when any change on pin.																																				
E	RW	OUTINIT			When in task mode: Initial value of the output when the GPIOTE channel is configured. When in event mode: No effect.																																				
			Low	0	Task mode: Initial value of pin before task triggering is low																																				
			High	1	Task mode: Initial value of pin before task triggering is high																																				

## 20.5 Electrical specification

## 21 PPI — Programmable peripheral interconnect

The Programmable peripheral interconnect (PPI) enables peripherals to interact autonomously with each other using tasks and events independent of the CPU. The PPI allows precise synchronization between peripherals when real-time application constraints exist and eliminates the need for CPU activity to implement behavior which can be predefined using PPI.

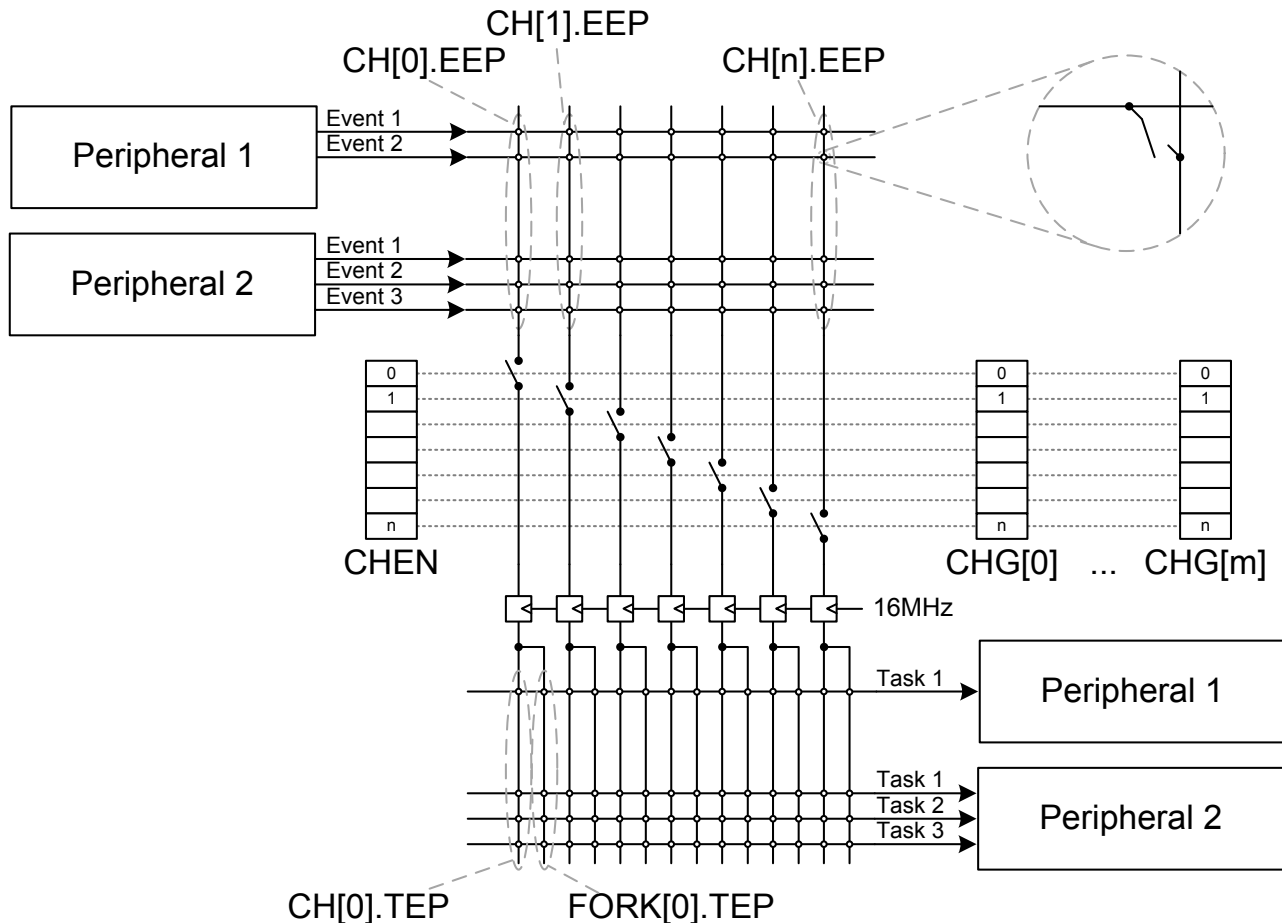

**Figure 29: PPI block diagram**

The PPI system has, in addition to the fully programmable peripheral interconnections, a set of channels where the event end point (EEP) and task end points (TEP) are fixed in hardware. These fixed channels can be individually enabled, disabled, or added to PPI channel groups in the same way as ordinary PPI channels.

**Table 27: Configurable and fixed PPI channels**

Instance	Channel	Number of channels	Number of groups
PPI	0-19	20	6
PPI (fixed)	20-31	12	

The PPI provides a mechanism to automatically trigger a task in one peripheral as a result of an event occurring in another peripheral. A task is connected to an event through a PPI channel. The PPI channel is composed of three end point registers, one EEP and two TEPs. A peripheral task is connected to a TEP using the address of the task register associated with the task. Similarly, a peripheral event is connected to an EEP using the address of the event register associated with the event.

On each PPI channel, the signals are synchronized to the 16 MHz clock, to avoid any internal violation of setup and hold timings. As a consequence, events that are synchronous to the 16 MHz clock will be delayed by one clock period, while other asynchronous events will be delayed by up to one 16 MHz clock period.

Note that shortcuts (as defined in the SHORTS register in each peripheral) are not affected by this 16 MHz synchronization, and are therefore not delayed.

Each TEP implements a fork mechanism that enables a second task to be triggered at the same time as the task specified in the TEP is triggered. This second task is configured in the task end point register in the FORK registers groups, e.g. FORK.TEP[0] is associated with PPI channel CH[0].

There are two ways of enabling and disabling PPI channels:

- Enable or disable PPI channels individually using the CHEN, CHENSET, and CHENCLR registers.
- Enable or disable PPI channels in PPI channel groups through the groups' ENABLE and DISABLE tasks. Prior to these tasks being triggered, the PPI channel group must be configured to define which PPI channels belongs to which groups.

Note that when a channel belongs to two groups m and n, and CHG[m].EN and CHG[n].DIS occur simultaneously (m and n can be equal or different), EN on that channel has priority.

PPI tasks (for example, CHG[0].EN) can be triggered through the PPI like any other task, which means they can be hooked up to a PPI channel as a TEP. One event can trigger multiple tasks by using multiple channels and one task can be triggered by multiple events in the same way.

## 21.1 Pre-programmed channels

Some of the PPI channels are pre-programmed. These channels cannot be configured by the CPU, but can be added to groups and enabled and disabled like the general purpose PPI channels. The FORK TEP for these channels are still programmable and can be used by the application.

For a list of pre-programmed PPI channels, see the table below.

**Table 28: Pre-programmed channels**

Channel	EEP	TEP
20	TIMERO->EVENTS_COMPARE[0]	RADIO->TASKS_TXEN
21	TIMERO->EVENTS_COMPARE[0]	RADIO->TASKS_RXEN
22	TIMERO->EVENTS_COMPARE[1]	RADIO->TASKS_DISABLE
23	RADIO->EVENTS_BCMATCH	AAR->TASKS_START
24	RADIO->EVENTS_READY	CCM->TASKS_KSGEN
25	RADIO->EVENTS_ADDRESS	CCM->TASKS_CRYPT
26	RADIO->EVENTS_ADDRESS	TIMERO->TASKS_CAPTURE[1]
27	RADIO->EVENTS_END	TIMERO->TASKS_CAPTURE[2]
28	RTCO->EVENTS_COMPARE[0]	RADIO->TASKS_TXEN
29	RTCO->EVENTS_COMPARE[0]	RADIO->TASKS_RXEN
30	RTCO->EVENTS_COMPARE[0]	TIMERO->TASKS_CLEAR
31	RTCO->EVENTS_COMPARE[0]	TIMERO->TASKS_START

## 21.2 Registers

**Table 29: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001F000	PPI	PPI	Programmable peripheral interconnect	

**Table 30: Register Overview**

Register	Offset	Description
TASKS_CHG[0].EN	0x000	Enable channel group 0
TASKS_CHG[0].DIS	0x004	Disable channel group 0
TASKS_CHG[1].EN	0x008	Enable channel group 1
TASKS_CHG[1].DIS	0x00C	Disable channel group 1
TASKS_CHG[2].EN	0x010	Enable channel group 2
TASKS_CHG[2].DIS	0x014	Disable channel group 2
TASKS_CHG[3].EN	0x018	Enable channel group 3
TASKS_CHG[3].DIS	0x01C	Disable channel group 3
TASKS_CHG[4].EN	0x020	Enable channel group 4

Register	Offset	Description
TASKS_CHG[4].DIS	0x024	Disable channel group 4
TASKS_CHG[5].EN	0x028	Enable channel group 5
TASKS_CHG[5].DIS	0x02C	Disable channel group 5
CHEN	0x500	Channel enable register
CHENSET	0x504	Channel enable set register
CHENCLR	0x508	Channel enable clear register
CH[0].EEP	0x510	Channel 0 event end-point
CH[0].TEP	0x514	Channel 0 task end-point
CH[1].EEP	0x518	Channel 1 event end-point
CH[1].TEP	0x51C	Channel 1 task end-point
CH[2].EEP	0x520	Channel 2 event end-point
CH[2].TEP	0x524	Channel 2 task end-point
CH[3].EEP	0x528	Channel 3 event end-point
CH[3].TEP	0x52C	Channel 3 task end-point
CH[4].EEP	0x530	Channel 4 event end-point
CH[4].TEP	0x534	Channel 4 task end-point
CH[5].EEP	0x538	Channel 5 event end-point
CH[5].TEP	0x53C	Channel 5 task end-point
CH[6].EEP	0x540	Channel 6 event end-point
CH[6].TEP	0x544	Channel 6 task end-point
CH[7].EEP	0x548	Channel 7 event end-point
CH[7].TEP	0x54C	Channel 7 task end-point
CH[8].EEP	0x550	Channel 8 event end-point
CH[8].TEP	0x554	Channel 8 task end-point
CH[9].EEP	0x558	Channel 9 event end-point
CH[9].TEP	0x55C	Channel 9 task end-point
CH[10].EEP	0x560	Channel 10 event end-point
CH[10].TEP	0x564	Channel 10 task end-point
CH[11].EEP	0x568	Channel 11 event end-point
CH[11].TEP	0x56C	Channel 11 task end-point
CH[12].EEP	0x570	Channel 12 event end-point
CH[12].TEP	0x574	Channel 12 task end-point
CH[13].EEP	0x578	Channel 13 event end-point
CH[13].TEP	0x57C	Channel 13 task end-point
CH[14].EEP	0x580	Channel 14 event end-point
CH[14].TEP	0x584	Channel 14 task end-point
CH[15].EEP	0x588	Channel 15 event end-point
CH[15].TEP	0x58C	Channel 15 task end-point
CH[16].EEP	0x590	Channel 16 event end-point
CH[16].TEP	0x594	Channel 16 task end-point
CH[17].EEP	0x598	Channel 17 event end-point
CH[17].TEP	0x59C	Channel 17 task end-point
CH[18].EEP	0x5A0	Channel 18 event end-point
CH[18].TEP	0x5A4	Channel 18 task end-point
CH[19].EEP	0x5A8	Channel 19 event end-point
CH[19].TEP	0x5AC	Channel 19 task end-point
CHG[0]	0x800	Channel group 0
CHG[1]	0x804	Channel group 1
CHG[2]	0x808	Channel group 2
CHG[3]	0x80C	Channel group 3
CHG[4]	0x810	Channel group 4
CHG[5]	0x814	Channel group 5
FORK[0].TEP	0x910	Channel 0 task end-point
FORK[1].TEP	0x914	Channel 1 task end-point
FORK[2].TEP	0x918	Channel 2 task end-point
FORK[3].TEP	0x91C	Channel 3 task end-point
FORK[4].TEP	0x920	Channel 4 task end-point
FORK[5].TEP	0x924	Channel 5 task end-point

Register	Offset	Description
<i>FORK[6].TEP</i>	0x928	Channel 6 task end-point
<i>FORK[7].TEP</i>	0x92C	Channel 7 task end-point
<i>FORK[8].TEP</i>	0x930	Channel 8 task end-point
<i>FORK[9].TEP</i>	0x934	Channel 9 task end-point
<i>FORK[10].TEP</i>	0x938	Channel 10 task end-point
<i>FORK[11].TEP</i>	0x93C	Channel 11 task end-point
<i>FORK[12].TEP</i>	0x940	Channel 12 task end-point
<i>FORK[13].TEP</i>	0x944	Channel 13 task end-point
<i>FORK[14].TEP</i>	0x948	Channel 14 task end-point
<i>FORK[15].TEP</i>	0x94C	Channel 15 task end-point
<i>FORK[16].TEP</i>	0x950	Channel 16 task end-point
<i>FORK[17].TEP</i>	0x954	Channel 17 task end-point
<i>FORK[18].TEP</i>	0x958	Channel 18 task end-point
<i>FORK[19].TEP</i>	0x95C	Channel 19 task end-point
<i>FORK[20].TEP</i>	0x960	Channel 20 task end-point
<i>FORK[21].TEP</i>	0x964	Channel 21 task end-point
<i>FORK[22].TEP</i>	0x968	Channel 22 task end-point
<i>FORK[23].TEP</i>	0x96C	Channel 23 task end-point
<i>FORK[24].TEP</i>	0x970	Channel 24 task end-point
<i>FORK[25].TEP</i>	0x974	Channel 25 task end-point
<i>FORK[26].TEP</i>	0x978	Channel 26 task end-point
<i>FORK[27].TEP</i>	0x97C	Channel 27 task end-point
<i>FORK[28].TEP</i>	0x980	Channel 28 task end-point
<i>FORK[29].TEP</i>	0x984	Channel 29 task end-point
<i>FORK[30].TEP</i>	0x988	Channel 30 task end-point
<i>FORK[31].TEP</i>	0x98C	Channel 31 task end-point

### 21.2.1 CHEN

Address offset: 0x500

## Channel enable register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CH0			Enable or disable channel 0																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
B	RW	CH1			Enable or disable channel 1																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
C	RW	CH2			Enable or disable channel 2																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
D	RW	CH3			Enable or disable channel 3																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
E	RW	CH4			Enable or disable channel 4																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
F	RW	CH5			Enable or disable channel 5																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
G	RW	CH6			Enable or disable channel 6																																	
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
H	RW	CH7			Enable or disable channel 7																																	

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																											
Id					f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																											
Reset 0x00000000					0 0																											
Id	RW	Field	Value Id	Value	Description																											
I	RW	CH8	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 8																													
J	RW	CH9	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 9																													
K	RW	CH10	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 10																													
L	RW	CH11	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 11																													
M	RW	CH12	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 12																													
N	RW	CH13	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 13																													
O	RW	CH14	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 14																													
P	RW	CH15	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 15																													
Q	RW	CH16	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 16																													
R	RW	CH17	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 17																													
S	RW	CH18	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 18																													
T	RW	CH19	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 19																													
U	RW	CH20	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 20																													
V	RW	CH21	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 21																													
W	RW	CH22	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 22																													
X	RW	CH23	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 23																													
Y	RW	CH24	Disabled	0	Disable channel																											
			Enabled	1	Enable channel																											
			Enable or disable channel 24																													
Z	RW	CH25	Disabled	0	Disable channel																											
			Enable or disable channel 25																													



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value		Description																															
a	RW	CH26	Enabled	1	Enable channel																																	
			Enable or disable channel 26																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 27																																			
			Disabled	0	Disable channel																																	
b	RW	CH27	Enabled	1	Enable channel																																	
			Enable or disable channel 27																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 28																																			
			Disabled	0	Disable channel																																	
c	RW	CH28	Enabled	1	Enable channel																																	
			Enable or disable channel 28																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 29																																			
			Disabled	0	Disable channel																																	
d	RW	CH29	Enabled	1	Enable channel																																	
			Enable or disable channel 29																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 30																																			
			Disabled	0	Disable channel																																	
e	RW	CH30	Enabled	1	Enable channel																																	
			Enable or disable channel 30																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 31																																			
			Disabled	0	Disable channel																																	
f	RW	CH31	Enabled	1	Enable channel																																	
			Enable or disable channel 31																																			
			Disabled	0	Disable channel																																	
			Enabled	1	Enable channel																																	
			Enable or disable channel 31																																			
			Disabled	0	Disable channel																																	

### 21.2.2 CHENSET

Address offset: 0x504

## Channel enable set register

Read: reads value of CH{i} field in CHEN register.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
A	RW	CH0			Channel 0 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
B	RW	CH1			Channel 1 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
C	RW	CH2			Channel 2 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
D	RW	CH3			Channel 3 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
E	RW	CH4			Channel 4 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	
F	RW	CH5			Channel 5 enable set register. Writing '0' has no effect																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Set	1	Write: Enable channel																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																													
G	RW	CH6			Channel 6 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
H	RW	CH7			Channel 7 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
I	RW	CH8			Channel 8 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
J	RW	CH9			Channel 9 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
K	RW	CH10			Channel 10 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
L	RW	CH11			Channel 11 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
M	RW	CH12			Channel 12 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
N	RW	CH13			Channel 13 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
O	RW	CH14			Channel 14 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
P	RW	CH15			Channel 15 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
Q	RW	CH16			Channel 16 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
R	RW	CH17			Channel 17 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
S	RW	CH18			Channel 18 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Set	1	Write: Enable channel																															
T	RW	CH19			Channel 19 enable set register. Writing '0' has no effect																															
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	z	y	x	w	v	u	t	s	r	q	p	o	n	m	l	k	j	i	h	g	f	e	d	c	b	a
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
			Set		1	Write: Enable channel																													
U	RW	CH20				Channel 20 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
V	RW	CH21				Channel 21 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
W	RW	CH22				Channel 22 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
X	RW	CH23				Channel 23 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
Y	RW	CH24				Channel 24 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
Z	RW	CH25				Channel 25 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
a	RW	CH26				Channel 26 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
b	RW	CH27				Channel 27 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
c	RW	CH28				Channel 28 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
d	RW	CH29				Channel 29 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
e	RW	CH30				Channel 30 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													
f	RW	CH31				Channel 31 enable set register. Writing '0' has no effect																													
			Disabled		0	Read: channel disabled																													
			Enabled		1	Read: channel enabled																													
			Set		1	Write: Enable channel																													

### 21.2.3 CHENCLR

Address offset: 0x508

### Channel enable clear register

Read: reads value of CH{i} field in CHEN register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	CH0			Channel 0 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
B	RW	CH1			Channel 1 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
C	RW	CH2			Channel 2 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
D	RW	CH3			Channel 3 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
E	RW	CH4			Channel 4 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
F	RW	CH5			Channel 5 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
G	RW	CH6			Channel 6 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
H	RW	CH7			Channel 7 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
I	RW	CH8			Channel 8 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
J	RW	CH9			Channel 9 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
K	RW	CH10			Channel 10 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
L	RW	CH11			Channel 11 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
M	RW	CH12			Channel 12 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														
N	RW	CH13			Channel 13 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																														
			Enabled	1	Read: channel enabled																														
			Clear	1	Write: disable channel																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
			Channel 14 enable clear register. Writing '0' has no effect																																			
O	RW	CH14	Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
P	RW	CH15	Channel 15 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
Q	RW	CH16	Channel 16 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
R	RW	CH17	Channel 17 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
S	RW	CH18	Channel 18 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
T	RW	CH19	Channel 19 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
U	RW	CH20	Channel 20 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
V	RW	CH21	Channel 21 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
W	RW	CH22	Channel 22 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
X	RW	CH23	Channel 23 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
Y	RW	CH24	Channel 24 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
Z	RW	CH25	Channel 25 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	
a	RW	CH26	Channel 26 enable clear register. Writing '0' has no effect																																			
			Disabled	0	Read: channel disabled																																	
			Enabled	1	Read: channel enabled																																	
			Clear	1	Write: disable channel																																	

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
b	RW	CH27				Channel 27 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Clear	1	Write: disable channel																															
c	RW	CH28				Channel 28 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Clear	1	Write: disable channel																															
d	RW	CH29				Channel 29 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Clear	1	Write: disable channel																															
e	RW	CH30				Channel 30 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Clear	1	Write: disable channel																															
f	RW	CH31				Channel 31 enable clear register. Writing '0' has no effect																														
			Disabled	0	Read: channel disabled																															
			Enabled	1	Read: channel enabled																															
			Clear	1	Write: disable channel																															

### 21.2.4 CH[0].EEP

Address offset: 0x510

Channel 0 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value													Description																		
A	RW	EEP																Pointer to event register. Accepts only addresses to registers from the Event group.																		

### 21.2.5 CH[0].TEP

Address offset: 0x514

Channel 0 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>													<b>Description</b>																		
A	RW	TEP																Pointer to task register. Accepts only addresses to registers from the Task group.																		

### 21.2.6 CH[1].EEP

Address offset: 0x518

### Channel 1 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

### 21.2.7 CH[1].TEP

Address offset: 0x51C

Channel 1 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	TEP																Pointer to task register. Accepts only addresses to registers from the Task group.																	

### 21.2.8 CH[2].EEP

Address offset: 0x520

Channel 2 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																																	

### 21.2.9 CH[2].TEP

Address offset: 0x524

Channel 2 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																															

### 21.2.10 CH[3].EEP

Address offset: 0x528

Channel 3 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

### 21.2.11 CH[3].TEP

Address offset: 0x52C

Channel 3 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																																	

## 21.2.12 CH[4].EEP

Address offset: 0x530

Channel 4 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																
A	RW	EEP																	Pointer to event register. Accepts only addresses to registers from the Event group.																

## 21.2.13 CH[4].TEP

Address offset: 0x534

Channel 4 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value												Description																			
A	RW	TEP														Pointer to task register. Accepts only addresses to registers from the Task group.																			

## 21.2.14 CH[5].EEP

Address offset: 0x538

Channel 5 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.15 CH[5].TEP

Address offset: 0x53C

Channel 5 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

## 21.2.16 CH[6].EEP

Address offset: 0x540

Channel 6 event end-point



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.17 CH[6].TEP

Address offset: 0x544

Channel 6 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																																	

## 21.2.18 CH[7].EEP

Address offset: 0x548

Channel 7 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.19 CH[7].TEP

Address offset: 0x54C

Channel 7 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 21.2.20 CH[8].EEP

Address offset: 0x550

Channel 8 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 21.2.21 CH[8].TEP

Address offset: 0x554

Channel 8 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 21.2.22 CH[9].EEP

Address offset: 0x558

Channel 9 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																																	

## 21.2.23 CH[9].TEP

Address offset: 0x55C

Channel 9 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 21.2.24 CH[10].EEP

Address offset: 0x560

Channel 10 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.25 CH[10].TEP

Address offset: 0x564

Channel 10 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																																	

## 21.2.26 CH[11].EEP

Address offset: 0x568

Channel 11 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 21.2.27 CH[11].TEP

Address offset: 0x56C

Channel 11 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	TEP																Pointer to task register. Accepts only addresses to registers from the Task group.																	

## 21.2.28 CH[12].EEP

Address offset: 0x570

Channel 12 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value												Description																			
A	RW	EEP														Pointer to event register. Accepts only addresses to registers from the Event group.																			

## 21.2.29 CH[12].TEP

Address offset: 0x574

Channel 12 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																															

## 21.2.30 CH[13].EEP

Address offset: 0x578

Channel 13 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 21.2.31 CH[13].TEP

Address offset: 0x57C

Channel 13 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

### 21.2.32 CH[14].EEP

Address offset: 0x580

Channel 14 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																
A	RW	EEP																	Pointer to event register. Accepts only addresses to registers from the Event group.																

### 21.2.33 CH[14].TEP

Address offset: 0x584

Channel 14 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

### 21.2.34 CH[15].EEP

Address offset: 0x588

Channel 15 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>												<b>Description</b>																			
A	RW	EEP														Pointer to event register. Accepts only addresses to registers from the Event group.																			

### 21.2.35 CH[15].TEP

Address offset: 0x58C

Channel 15 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																															

### 21.2.36 CH[16].EEP

Address offset: 0x590

Channel 16 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.37 CH[16].TEP

Address offset: 0x594

Channel 16 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																											

## 21.2.38 CH[17].EEP

Address offset: 0x598

Channel 17 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	EEP						Pointer to event register. Accepts only addresses to registers from the Event group.																											

## 21.2.39 CH[17].TEP

Address offset: 0x59C

Channel 17 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TEP			Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 21.2.40 CH[18].EEP

Address offset: 0x5A0

Channel 18 event end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	EEP			Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.41 CH[18].TEP

Address offset: 0x5A4

Channel 18 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register. Accepts only addresses to registers from the Task group.																												

## 21.2.42 CH[19].EEP

Address offset: 0x5A8

Channel 19 event end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	EEP				Pointer to event register. Accepts only addresses to registers from the Event group.																														

## 21.2.43 CH[19].TEP

Address offset: 0x5AC

Channel 19 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	TEP				Pointer to task register. Accepts only addresses to registers from the Task group.																														

## 21.2.44 CHG[0]

Address offset: 0x800

Channel group 0

Bit number							31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id							f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000							0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value	Description																															
A	RW	CH0					Include or exclude channel 0																															
				Excluded		0	Exclude																															
				Included		1	Include																															
B	RW	CH1					Include or exclude channel 1																															
				Excluded		0	Exclude																															
				Included		1	Include																															
C	RW	CH2					Include or exclude channel 2																															
				Excluded		0	Exclude																															
				Included		1	Include																															
D	RW	CH3					Include or exclude channel 3																															
				Excluded		0	Exclude																															
				Included		1	Include																															
E	RW	CH4					Include or exclude channel 4																															
				Excluded		0	Exclude																															
				Included		1	Include																															
F	RW	CH5					Include or exclude channel 5																															
				Excluded		0	Exclude																															
				Included		1	Include																															
G	RW	CH6					Include or exclude channel 6																															

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value			Description																																			
H	RW	CH7	Excluded	0			Exclude																																			
			Included	1			Include																																			
			Include or exclude channel 7																																							
			Excluded	0			Exclude																																			
I	RW	CH8	Included	1			Include																																			
			Include or exclude channel 8																																							
			Excluded	0			Exclude																																			
			Included	1			Include																																			
J	RW	CH9	Include or exclude channel 9																																							
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			K	RW	CH10	Include or exclude channel 10																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
L	RW	CH11				Include or exclude channel 11																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			M	RW	CH12	Include or exclude channel 12																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
N	RW	CH13				Include or exclude channel 13																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			O	RW	CH14	Include or exclude channel 14																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
P	RW	CH15				Include or exclude channel 15																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			Q	RW	CH16	Include or exclude channel 16																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
R	RW	CH17				Include or exclude channel 17																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			S	RW	CH18	Include or exclude channel 18																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
T	RW	CH19				Include or exclude channel 19																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			U	RW	CH20	Include or exclude channel 20																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
V	RW	CH21				Include or exclude channel 21																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			W	RW	CH22	Include or exclude channel 22																																				
Excluded	0					Exclude																																				
Included	1					Include																																				
X	RW	CH23				Include or exclude channel 23																																				
			Excluded	0			Exclude																																			
			Included	1			Include																																			
			Y	RW	CH24	Include or exclude channel 24																																				
Excluded	0					Exclude																																				

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
Z	RW	CH25	Included	1	Include																														
			Excluded	0	Include or exclude channel 25																														
			Included	1	Exclude																														
a	RW	CH26	Included	1	Include																														
			Excluded	0	Include or exclude channel 26																														
			Included	1	Exclude																														
b	RW	CH27	Included	1	Include																														
			Excluded	0	Include or exclude channel 27																														
			Included	1	Exclude																														
c	RW	CH28	Included	1	Include																														
			Excluded	0	Include or exclude channel 28																														
			Included	1	Exclude																														
d	RW	CH29	Included	1	Include																														
			Excluded	0	Include or exclude channel 29																														
			Included	1	Exclude																														
e	RW	CH30	Included	1	Include																														
			Excluded	0	Include or exclude channel 30																														
			Included	1	Exclude																														
f	RW	CH31	Included	1	Include																														
			Excluded	0	Include or exclude channel 31																														
			Included	1	Exclude																														

### 21.2.45 CHG[1]

Address offset: 0x804

Channel group 1

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																												
A	RW	CH0					Include or exclude channel 0																												
			Excluded	0	Exclude																														
			Included	1	Include																														
B	RW	CH1					Include or exclude channel 1																												
			Excluded	0	Exclude																														
			Included	1	Include																														
C	RW	CH2					Include or exclude channel 2																												
			Excluded	0	Exclude																														
			Included	1	Include																														
D	RW	CH3					Include or exclude channel 3																												
			Excluded	0	Exclude																														
			Included	1	Include																														
E	RW	CH4					Include or exclude channel 4																												
			Excluded	0	Exclude																														
			Included	1	Include																														
F	RW	CH5					Include or exclude channel 5																												
			Excluded	0	Exclude																														
			Included	1	Include																														
G	RW	CH6					Include or exclude channel 6																												
			Excluded	0	Exclude																														
			Included	1	Include																														
H	RW	CH7					Include or exclude channel 7																												
			Excluded	0	Exclude																														



Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value			Description																																					
			Included	1			Include																																					
I	RW	CH8				Include or exclude channel 8																																						
			Excluded			Exclude																																						
			Included			Include																																						
J	RW	CH9				Include or exclude channel 9																																						
			Excluded			Exclude																																						
			Included			Include																																						
K	RW	CH10				Include or exclude channel 10																																						
			Excluded			Exclude																																						
			Included			Include																																						
L	RW	CH11				Include or exclude channel 11																																						
			Excluded			Exclude																																						
			Included			Include																																						
M	RW	CH12				Include or exclude channel 12																																						
			Excluded			Exclude																																						
			Included			Include																																						
N	RW	CH13				Include or exclude channel 13																																						
			Excluded			Exclude																																						
			Included			Include																																						
O	RW	CH14				Include or exclude channel 14																																						
			Excluded			Exclude																																						
			Included			Include																																						
P	RW	CH15				Include or exclude channel 15																																						
			Excluded			Exclude																																						
			Included			Include																																						
Q	RW	CH16				Include or exclude channel 16																																						
			Excluded			Exclude																																						
			Included			Include																																						
R	RW	CH17				Include or exclude channel 17																																						
			Excluded			Exclude																																						
			Included			Include																																						
S	RW	CH18				Include or exclude channel 18																																						
			Excluded			Exclude																																						
			Included			Include																																						
T	RW	CH19				Include or exclude channel 19																																						
			Excluded			Exclude																																						
			Included			Include																																						
U	RW	CH20				Include or exclude channel 20																																						
			Excluded			Exclude																																						
			Included			Include																																						
V	RW	CH21				Include or exclude channel 21																																						
			Excluded			Exclude																																						
			Included			Include																																						
W	RW	CH22				Include or exclude channel 22																																						
			Excluded			Exclude																																						
			Included			Include																																						
X	RW	CH23				Include or exclude channel 23																																						
			Excluded			Exclude																																						
			Included			Include																																						
Y	RW	CH24				Include or exclude channel 24																																						
			Excluded			Exclude																																						
			Included			Include																																						
Z	RW	CH25				Include or exclude channel 25																																						
			Excluded			Exclude																																						
			Included			Include																																						

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
a	RW	CH26					Include or exclude channel 26																												
			Excluded		0		Exclude																												
			Included		1		Include																												
b	RW	CH27					Include or exclude channel 27																												
			Excluded		0		Exclude																												
			Included		1		Include																												
c	RW	CH28					Include or exclude channel 28																												
			Excluded		0		Exclude																												
			Included		1		Include																												
d	RW	CH29					Include or exclude channel 29																												
			Excluded		0		Exclude																												
			Included		1		Include																												
e	RW	CH30					Include or exclude channel 30																												
			Excluded		0		Exclude																												
			Included		1		Include																												
f	RW	CH31					Include or exclude channel 31																												
			Excluded		0		Exclude																												
			Included		1		Include																												

### 21.2.46 CHG[2]

Address offset: 0x808

Channel group 2

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a z y x w v u t s r q p o n m l k j i h g f e d c b a																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CH0				Include or exclude channel 0																													
			Excluded	0	Exclude																														
			Included	1	Include																														
B	RW	CH1				Include or exclude channel 1																													
			Excluded	0	Exclude																														
			Included	1	Include																														
C	RW	CH2				Include or exclude channel 2																													
			Excluded	0	Exclude																														
			Included	1	Include																														
D	RW	CH3				Include or exclude channel 3																													
			Excluded	0	Exclude																														
			Included	1	Include																														
E	RW	CH4				Include or exclude channel 4																													
			Excluded	0	Exclude																														
			Included	1	Include																														
F	RW	CH5				Include or exclude channel 5																													
			Excluded	0	Exclude																														
			Included	1	Include																														
G	RW	CH6				Include or exclude channel 6																													
			Excluded	0	Exclude																														
			Included	1	Include																														
H	RW	CH7				Include or exclude channel 7																													
			Excluded	0	Exclude																														
			Included	1	Include																														
I	RW	CH8				Include or exclude channel 8																													
			Excluded	0	Exclude																														
			Included	1	Include																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																									
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																									
Reset 0x00000000				0 0																									
Id	RW	Field	Value Id	Value	Description																								
J	RW	CH9			Include or exclude channel 9																								
			Excluded	0	Exclude																								
			Included	1	Include																								
K	RW	CH10			Include or exclude channel 10																								
			Excluded	0	Exclude																								
			Included	1	Include																								
L	RW	CH11			Include or exclude channel 11																								
			Excluded	0	Exclude																								
			Included	1	Include																								
M	RW	CH12			Include or exclude channel 12																								
			Excluded	0	Exclude																								
			Included	1	Include																								
N	RW	CH13			Include or exclude channel 13																								
			Excluded	0	Exclude																								
			Included	1	Include																								
O	RW	CH14			Include or exclude channel 14																								
			Excluded	0	Exclude																								
			Included	1	Include																								
P	RW	CH15			Include or exclude channel 15																								
			Excluded	0	Exclude																								
			Included	1	Include																								
Q	RW	CH16			Include or exclude channel 16																								
			Excluded	0	Exclude																								
			Included	1	Include																								
R	RW	CH17			Include or exclude channel 17																								
			Excluded	0	Exclude																								
			Included	1	Include																								
S	RW	CH18			Include or exclude channel 18																								
			Excluded	0	Exclude																								
			Included	1	Include																								
T	RW	CH19			Include or exclude channel 19																								
			Excluded	0	Exclude																								
			Included	1	Include																								
U	RW	CH20			Include or exclude channel 20																								
			Excluded	0	Exclude																								
			Included	1	Include																								
V	RW	CH21			Include or exclude channel 21																								
			Excluded	0	Exclude																								
			Included	1	Include																								
W	RW	CH22			Include or exclude channel 22																								
			Excluded	0	Exclude																								
			Included	1	Include																								
X	RW	CH23			Include or exclude channel 23																								
			Excluded	0	Exclude																								
			Included	1	Include																								
Y	RW	CH24			Include or exclude channel 24																								
			Excluded	0	Exclude																								
			Included	1	Include																								
Z	RW	CH25			Include or exclude channel 25																								
			Excluded	0	Exclude																								
			Included	1	Include																								
a	RW	CH26			Include or exclude channel 26																								
			Excluded	0	Exclude																								
			Included	1	Include																								
b	RW	CH27			Include or exclude channel 27																								

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value		Description																																
c	RW	CH28	Excluded	0		Exclude																																
			Included	1		Include																																
			Include or exclude channel 28																																			
d	RW	CH29	Excluded	0		Exclude																																
			Included	1		Include																																
			Include or exclude channel 29																																			
e	RW	CH30	Excluded	0		Exclude																																
			Included	1		Include																																
			Include or exclude channel 30																																			
f	RW	CH31	Excluded	0		Exclude																																
			Included	1		Include																																
			Include or exclude channel 31																																			

### 21.2.47 CHG[3]

Address offset: 0x80C

Channel group 3

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	z	y	x	w	v	u	t	s	r	q	p	o	n	m	l	k	j	i	h	g	f	e	d	c	b	a		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	CH0				Include or exclude channel 0																																
			Excluded		0	Exclude																																
			Included		1	Include																																
B	RW	CH1				Include or exclude channel 1																																
			Excluded		0	Exclude																																
			Included		1	Include																																
C	RW	CH2				Include or exclude channel 2																																
			Excluded		0	Exclude																																
			Included		1	Include																																
D	RW	CH3				Include or exclude channel 3																																
			Excluded		0	Exclude																																
			Included		1	Include																																
E	RW	CH4				Include or exclude channel 4																																
			Excluded		0	Exclude																																
			Included		1	Include																																
F	RW	CH5				Include or exclude channel 5																																
			Excluded		0	Exclude																																
			Included		1	Include																																
G	RW	CH6				Include or exclude channel 6																																
			Excluded		0	Exclude																																
			Included		1	Include																																
H	RW	CH7				Include or exclude channel 7																																
			Excluded		0	Exclude																																
			Included		1	Include																																
I	RW	CH8				Include or exclude channel 8																																
			Excluded		0	Exclude																																
			Included		1	Include																																
J	RW	CH9				Include or exclude channel 9																																
			Excluded		0	Exclude																																
			Included		1	Include																																
K	RW	CH10				Include or exclude channel 10																																

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id			Value			Description																																	
L	RW	CH11	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 11																																	
			Excluded			0			Exclude																																	
M	RW	CH12	Included			1			Include																																	
									Include or exclude channel 12																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
N	RW	CH13							Include or exclude channel 13																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 14																																	
O	RW	CH14	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 15																																	
			Excluded			0			Exclude																																	
P	RW	CH15	Included			1			Include																																	
									Include or exclude channel 16																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
Q	RW	CH16							Include or exclude channel 17																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 18																																	
R	RW	CH17	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 19																																	
			Excluded			0			Exclude																																	
S	RW	CH18	Included			1			Include																																	
									Include or exclude channel 20																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
T	RW	CH19							Include or exclude channel 21																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 22																																	
U	RW	CH20	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 23																																	
			Excluded			0			Exclude																																	
V	RW	CH21	Included			1			Include																																	
									Include or exclude channel 24																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
W	RW	CH22							Include or exclude channel 25																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 26																																	
X	RW	CH23	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 27																																	
			Excluded			0			Exclude																																	
Y	RW	CH24	Included			1			Include																																	
									Include or exclude channel 28																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
Z	RW	CH25							Include or exclude channel 29																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 30																																	
a	RW	CH26	Excluded			0			Exclude																																	
			Included			1			Include																																	
									Include or exclude channel 31																																	
			Excluded			0			Exclude																																	
b	RW	CH27	Included			1			Include																																	
									Include or exclude channel 32																																	
			Excluded			0			Exclude																																	
			Included			1			Include																																	
c	RW	CH28							Include or exclude channel 33																																	
			Excluded			0			Exclude																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
			Included		1	Include																														
d	RW	CH29				Include or exclude channel 29																														
			Excluded		0	Exclude																														
			Included		1	Include																														
e	RW	CH30				Include or exclude channel 30																														
			Excluded		0	Exclude																														
			Included		1	Include																														
f	RW	CH31				Include or exclude channel 31																														
			Excluded		0	Exclude																														
			Included		1	Include																														

## 21.2.48 CHG[4]

Address offset: 0x810

Channel group 4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CH0				Include or exclude channel 0																														
			Excluded	0	Exclude																															
			Included	1	Include																															
B	RW	CH1				Include or exclude channel 1																														
			Excluded	0	Exclude																															
			Included	1	Include																															
C	RW	CH2				Include or exclude channel 2																														
			Excluded	0	Exclude																															
			Included	1	Include																															
D	RW	CH3				Include or exclude channel 3																														
			Excluded	0	Exclude																															
			Included	1	Include																															
E	RW	CH4				Include or exclude channel 4																														
			Excluded	0	Exclude																															
			Included	1	Include																															
F	RW	CH5				Include or exclude channel 5																														
			Excluded	0	Exclude																															
			Included	1	Include																															
G	RW	CH6				Include or exclude channel 6																														
			Excluded	0	Exclude																															
			Included	1	Include																															
H	RW	CH7				Include or exclude channel 7																														
			Excluded	0	Exclude																															
			Included	1	Include																															
I	RW	CH8				Include or exclude channel 8																														
			Excluded	0	Exclude																															
			Included	1	Include																															
J	RW	CH9				Include or exclude channel 9																														
			Excluded	0	Exclude																															
			Included	1	Include																															
K	RW	CH10				Include or exclude channel 10																														
			Excluded	0	Exclude																															
			Included	1	Include																															
L	RW	CH11				Include or exclude channel 11																														
			Excluded	0	Exclude																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
M	RW	CH12	Included	1	Include																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
N	RW	CH13			Include or exclude channel 13																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
O	RW	CH14			Include or exclude channel 14																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
P	RW	CH15			Include or exclude channel 15																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Q	RW	CH16			Include or exclude channel 16																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
R	RW	CH17			Include or exclude channel 17																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
S	RW	CH18			Include or exclude channel 18																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
T	RW	CH19			Include or exclude channel 19																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
U	RW	CH20			Include or exclude channel 20																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
V	RW	CH21			Include or exclude channel 21																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
W	RW	CH22			Include or exclude channel 22																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
X	RW	CH23			Include or exclude channel 23																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Y	RW	CH24			Include or exclude channel 24																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
Z	RW	CH25			Include or exclude channel 25																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
a	RW	CH26			Include or exclude channel 26																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
b	RW	CH27			Include or exclude channel 27																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
c	RW	CH28			Include or exclude channel 28																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	
d	RW	CH29			Include or exclude channel 29																																	
			Excluded	0	Exclude																																	
			Included	1	Include																																	

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																						
e	RW	CH30				Include or exclude channel 30																																						
			Excluded		0	Exclude																																						
			Included		1	Include																																						
f	RW	CH31				Include or exclude channel 31																																						
			Excluded		0	Exclude																																						
			Included		1	Include																																						

## 21.2.49 CHG[5]

Address offset: 0x814

Channel group 5

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CH0				Include or exclude channel 0																													
			Excluded		0	Exclude																													
			Included		1	Include																													
B	RW	CH1				Include or exclude channel 1																													
			Excluded		0	Exclude																													
			Included		1	Include																													
C	RW	CH2				Include or exclude channel 2																													
			Excluded		0	Exclude																													
			Included		1	Include																													
D	RW	CH3				Include or exclude channel 3																													
			Excluded		0	Exclude																													
			Included		1	Include																													
E	RW	CH4				Include or exclude channel 4																													
			Excluded		0	Exclude																													
			Included		1	Include																													
F	RW	CH5				Include or exclude channel 5																													
			Excluded		0	Exclude																													
			Included		1	Include																													
G	RW	CH6				Include or exclude channel 6																													
			Excluded		0	Exclude																													
			Included		1	Include																													
H	RW	CH7				Include or exclude channel 7																													
			Excluded		0	Exclude																													
			Included		1	Include																													
I	RW	CH8				Include or exclude channel 8																													
			Excluded		0	Exclude																													
			Included		1	Include																													
J	RW	CH9				Include or exclude channel 9																													
			Excluded		0	Exclude																													
			Included		1	Include																													
K	RW	CH10				Include or exclude channel 10																													
			Excluded		0	Exclude																													
			Included		1	Include																													
L	RW	CH11				Include or exclude channel 11																													
			Excluded		0	Exclude																													
			Included		1	Include																													
M	RW	CH12				Include or exclude channel 12																													
			Excluded		0	Exclude																													
			Included		1	Include																													



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
N	RW	CH13				Include or exclude channel 13																																
			Excluded		0	Exclude																																
			Included		1	Include																																
O	RW	CH14				Include or exclude channel 14																																
			Excluded		0	Exclude																																
			Included		1	Include																																
P	RW	CH15				Include or exclude channel 15																																
			Excluded		0	Exclude																																
			Included		1	Include																																
Q	RW	CH16				Include or exclude channel 16																																
			Excluded		0	Exclude																																
			Included		1	Include																																
R	RW	CH17				Include or exclude channel 17																																
			Excluded		0	Exclude																																
			Included		1	Include																																
S	RW	CH18				Include or exclude channel 18																																
			Excluded		0	Exclude																																
			Included		1	Include																																
T	RW	CH19				Include or exclude channel 19																																
			Excluded		0	Exclude																																
			Included		1	Include																																
U	RW	CH20				Include or exclude channel 20																																
			Excluded		0	Exclude																																
			Included		1	Include																																
V	RW	CH21				Include or exclude channel 21																																
			Excluded		0	Exclude																																
			Included		1	Include																																
W	RW	CH22				Include or exclude channel 22																																
			Excluded		0	Exclude																																
			Included		1	Include																																
X	RW	CH23				Include or exclude channel 23																																
			Excluded		0	Exclude																																
			Included		1	Include																																
Y	RW	CH24				Include or exclude channel 24																																
			Excluded		0	Exclude																																
			Included		1	Include																																
Z	RW	CH25				Include or exclude channel 25																																
			Excluded		0	Exclude																																
			Included		1	Include																																
a	RW	CH26				Include or exclude channel 26																																
			Excluded		0	Exclude																																
			Included		1	Include																																
b	RW	CH27				Include or exclude channel 27																																
			Excluded		0	Exclude																																
			Included		1	Include																																
c	RW	CH28				Include or exclude channel 28																																
			Excluded		0	Exclude																																
			Included		1	Include																																
d	RW	CH29				Include or exclude channel 29																																
			Excluded		0	Exclude																																
			Included		1	Include																																
e	RW	CH30				Include or exclude channel 30																																
			Excluded		0	Exclude																																
			Included		1	Include																																
f	RW	CH31				Include or exclude channel 31																																

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
			Excluded		0		Exclude																									
			Included		1		Include																									

### 21.2.50 FORK[0].TEP

Address offset: 0x910

Channel 0 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
A	RW	TEP					Pointer to task register																									

### 21.2.51 FORK[1].TEP

Address offset: 0x914

Channel 1 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
A	RW	TEP					Pointer to task register																									

### 21.2.52 FORK[2].TEP

Address offset: 0x918

Channel 2 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
A	RW	TEP					Pointer to task register																									

### 21.2.53 FORK[3].TEP

Address offset: 0x91C

Channel 3 task end-point

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
A	RW	TEP					Pointer to task register																									

### 21.2.54 FORK[4].TEP

Address offset: 0x920

Channel 4 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.55 FORK[5].TEP

Address offset: 0x924

Channel 5 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.56 FORK[6].TEP

Address offset: 0x928

Channel 6 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.57 FORK[7].TEP

Address offset: 0x92C

Channel 7 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.58 FORK[8].TEP

Address offset: 0x930

Channel 8 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	RW	TEP								Pointer to task register																										

### 21.2.59 FORK[9].TEP

Address offset: 0x934

Channel 9 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	TEP							Pointer to task register																											

### 21.2.60 FORK[10].TEP

Address offset: 0x938

Channel 10 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value										Description																				
A	RW	TEP													Pointer to task register																				

### 21.2.61 FORK[11].TEP

Address offset: 0x93C

## Channel 11 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.62 FORK[12].TEP

Address offset: 0x940

### Channel 12 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.63 FORK[13].TEP

Address offset: 0x944

### Channel 13 task end-point

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 21.2.64 FORK[14].TEP

Address offset: 0x948

### Channel 14 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	TEP							Pointer to task register																										

### 21.2.65 FORK[15].TEP

Address offset: 0x94C

Channel 15 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.66 FORK[16].TEP

Address offset: 0x950

Channel 16 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	TEP								Pointer to task register																										

### 21.2.67 FORK[17].TEP

Address offset: 0x954

Channel 17 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	TEP					Pointer to task register																													

### 21.2.68 FORK[18].TEP

Address offset: 0x958

Channel 18 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.69 FORK[19].TEP

Address offset: 0x95C

Channel 19 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	RW	TEP								Pointer to task register																										

### 21.2.70 FORK[20].TEP

Address offset: 0x960

Channel 20 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value				Description																										
A	RW	TEP								Pointer to task register																										

### 21.2.71 FORK[21].TEP

Address offset: 0x964

## Channel 21 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value										Description																				
A	RW	TEP													Pointer to task register																				

### 21.2.72 FORK[22].TEP

Address offset: 0x968

## Channel 22 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.73 FORK[23].TEP

Address offset: 0x96C

### Channel 23 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.74 FORK[24].TEP

Address offset: 0x970

### Channel 24 task end-point

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.75 FORK[25].TEP

Address offset: 0x974

### Channel 25 task end-point

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																		
A	RW	TEP															Pointer to task register																		

### 21.2.76 FORK[26].TEP

Address offset: 0x978

### Channel 26 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.77 FORK[27].TEP

Address offset: 0x97C

Channel 27 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TEP						Pointer to task register																												

### 21.2.78 FORK[28].TEP

Address offset: 0x980

Channel 28 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value				Description																										
A	RW	TEP								Pointer to task register																										

### 21.2.79 FORK[29].TEP

Address offset: 0x984

Channel 29 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>				<b>Description</b>																											
A	RW	TEP							Pointer to task register																											

### 21.2.80 FORK[30].TEP

Address offset: 0x988

Channel 30 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>		<b>Id</b>	<b>Value</b>				<b>Description</b>																										
A	RW	TEP								Pointer to task register																										

### 21.2.81 FORK[31].TEP

Address offset: 0x98C

Channel 31 task end-point

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	TEP													Pointer to task register																					






## 22 RADIO — 2.4 GHz Radio

The 2.4 GHz radio transceiver is compatible with multiple radio standards such as 1 Mbps, 2 Mbps and long range *Bluetooth*® low energy. IEEE 802.15.4 250 kbps mode is fully supported as well as Nordic's proprietary 1 Mbps and 2 Mbps modes of operation.

Listed here are main features for the RADIO:

- Multi-domain 2.4 GHz radio transceiver:
  - 1 Mbps, 2Mbps and long range (125kbps and 500kbps mode) *Bluetooth*® low energy modes
  - 250kbps IEEE 802.15.4 mode
  - 1Mbps and 2Mbps Nordic proprietary modes
- Best in class link budget and low power operation
- Efficient data interface with EasyDMA support
- Automatic address filtering and pattern matching

EasyDMA in combination with an automated packet assembler and packet disassembler, and an automated CRC generator and CRC checker, makes it very easy to configure and use the RADIO. See [Figure 30: RADIO block diagram](#) on page 249 for details.

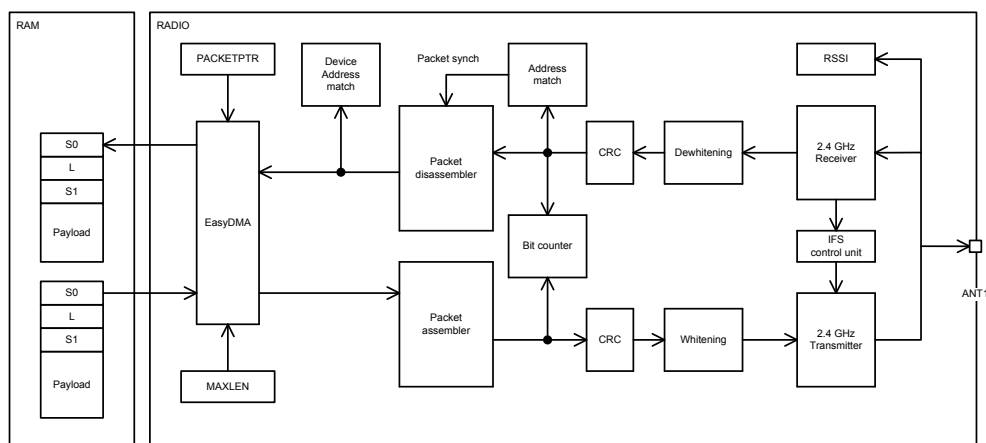


**Figure 30: RADIO block diagram**

The RADIO includes a Device Address match unit and an interframe spacing control unit that can be utilized to simplify address whitelisting and interframe spacing respectively in *Bluetooth* Smart and similar applications.

The RADIO also includes a Received Signal Strength Indicator (RSSI) and a bit counter. The bit counter generates events when a preconfigured number of bits have been sent or received by the RADIO.

### 22.1 Packet configuration

A radio packet contains the following fields: PREAMBLE, ADDRESS, S0, LENGTH, S1, PAYLOAD and CRC.



**Figure 31: On-air packet layout**

See [Figure 31: On-air packet layout](#) on page 249. Not shown in the figure is the static payload add-on (the length of which is defined in STATLEN, and which is 0 bytes long in a standard BLE packet), and would be sent between PAYLOAD and CRC. The Radio sends the different fields in the packet in the order they are illustrated below, from left to right. The preamble will be sent least significant bit first on-air.


The PREAMBLE is one byte long for Nordic proprietary operating modes, and the PLEN field in the PCNF0 register has to be set accordingly. If the first bit of the ADDRESS is 0 the preamble will be set to 0xAA otherwise the PREAMBLE will be set to 0x55.

For MODE = Ble\_2Mbit the PREAMBLE has to be set to 2 byte long through the PLEN field in the PCNF0 register. If the first bit of the ADDRESS is 0 the preamble will be set to 0xAAAA otherwise the PREAMBLE will be set to 0x5555.

For MODE = Ble\_LR125Kbit and MODE = Ble\_LR500Kbit the PREAMBLE is 10 repetitions of 0x3C.

For MODE = leee802154\_250Kbit the PREAMBLE is 4 bytes long and set to all zeros.

Radio packets are stored in memory inside instances of a radio packet data structure as illustrated in [Figure 32: In-RAM representation of radio packet, S0, LENGTH and S1 are optional](#) on page 250. The PREAMBLE, ADDRESS, CI, TERM1, TERM2 and CRC fields are omitted in this data structure.



**Figure 32: In-RAM representation of radio packet, S0, LENGTH and S1 are optional**

The byte ordering on air is always Least Significant Byte First for the ADDRESS and PAYLOAD fields and Most Significant Byte First for the CRC field. The ADDRESS fields are always transmitted and received least significant bit first on-air. The CRC field is always transmitted and received Most Significant Bit first. The bit-endian, i.e. which order the bits are sent and received in, of the S0, LENGTH, S1 and PAYLOAD fields can be configured via the ENDIAN in PCNF1.

The S0INCL field in PCNF0 determines if S0 is present in RAM at all if its length is zero. If present, one byte is allocated in RAM.

The sizes of the S0, LENGTH and S1 fields can be individually configured via S0LEN, LFLEN and S1LEN in PCNF0 respectively. If any of these fields are configured to be less than 8 bit long the, the least significant bits of the fields, as seen from the RAM representation, are used.

If S0, LENGTH or S1 are specified with zero length their fields will be omitted in memory, otherwise each field will be represented as a separate byte, regardless of the number of bits in their on-air counterpart.

Independent of the configuration of MAXLEN, the combined length of S0, LENGTH, S1 and PAYLOAD cannot exceed 258 bytes.

## 22.2 Address configuration

The on-air radio ADDRESS field is composed of two parts, the base address field and the address prefix field.

The size of the base address field is configurable via BALEN in PCNF1. The base address is truncated from LSByte if the BALEN is less than 4. See [Table 31: Definition of logical addresses](#) on page 250.

**Table 31: Definition of logical addresses**

Logical address	Base address	Prefix byte
0	BASE0	PREFIX0.AP0
1	BASE1	PREFIX0.AP1
2	BASE1	PREFIX0.AP2
3	BASE1	PREFIX0.AP3
4	BASE1	PREFIX1.AP4
5	BASE1	PREFIX1.AP5
6	BASE1	PREFIX1.AP6

Logical address	Base address	Prefix byte
7	BASE1	PREFIX1.AP7


The on-air addresses are defined in the BASEn and PREFIXn registers, and it is only when writing these registers the user will have to relate to actual on-air addresses. For other radio address registers such as the TXADDRESS, RXADDRESSES and RXMATCH registers, logical radio addresses ranging from 0 to 7 are being used. The relationship between the on-air radio addresses and the logical addresses is described in [Table 31: Definition of logical addresses](#) on page 250.

## 22.3 Data whitening

The RADIO is able to do packet whitening and de-whitening.

See WHITEEN in PCNF1 register for how to enable whitening. When enabled, whitening and de-whitening will be handled by the RADIO automatically as packets are sent and received.

The whitening word is generated using polynomial  $g(D) = D^7 + D^4 + 1$ , which then is XORed with the data packet that is to be whitened, or de-whitened. See the figure below.

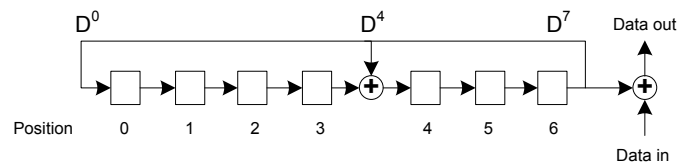

**Figure 33: Data whitening and de-whitening**

Whitening and de-whitening will be performed over the whole packet (except for the preamble and the address field).


The linear feedback shift register, illustrated in [Figure 33: Data whitening and de-whitening](#) on page 251 can be initialised via the DATAWHITEIV register.

## 22.4 CRC

The CRC generator in the RADIO calculates the CRC over the whole packet excluding the preamble. If desirable, the address field can be excluded from the CRC calculation as well

See CRCCNF register for more information.

The CRC polynomial is configurable as illustrated in [Figure 34: CRC generation of an n bit CRC](#) on page 251 where bit 0 in the CRCPOLY register corresponds to  $X^0$  and bit 1 corresponds to  $X^1$  etc. See CRCPOLY for more information.

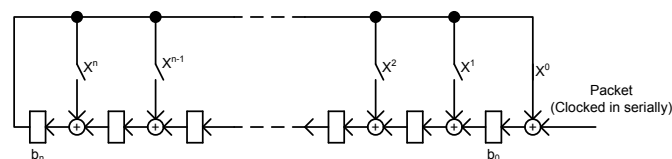

**Figure 34: CRC generation of an n bit CRC**

As illustrated in [Figure 34: CRC generation of an  \$n\$  bit CRC](#) on page 251, the CRC is calculated by feeding the packet serially through the CRC generator. Before the packet is clocked through the CRC generator, the CRC generator's latches  $b_0$  through  $b_n$  will be initialized with a predefined value specified in the CRCINIT register. When the whole packet is clocked through the CRC generator, latches  $b_0$  through  $b_n$  will hold the resulting CRC. This value will be used by the RADIO during both transmission and reception but it is not available to be read by the CPU at any time. A received CRC can however be read by the CPU via the RXCRC register independent of whether or not it has passed the CRC check.

The length ( $n$ ) of the CRC is configurable, see CRCCNF for more information.

After the whole packet including the CRC has been received, the RADIO will generate a CRCOK event if no CRC errors were detected, or alternatively generate a CRCERROR event if CRC errors were detected.

The status of the CRC check can be read from the CRCSTATUS register after a packet has been received.

## 22.5 Radio states


Tasks and events are used to control the operating state of the RADIO.

The RADIO can enter the states described the table below.

**Table 32: RADIO state diagram**

State	Description
DISABLED	No operations are going on inside the radio and the power consumption is at a minimum
RXRU	The radio is ramping up and preparing for reception
RXIDLE	The radio is ready for reception to start
RX	Reception has been started and the addresses enabled in the RXADDRESSES register are being monitored
TXRU	The radio is ramping up and preparing for transmission
TXIDLE	The radio is ready for transmission to start
TX	The radio is transmitting a packet
RXDISABLE	The radio is disabling the receiver
TXDISABLE	The radio is disabling the transmitter

An overview state diagram for the RADIO is illustrated in [Figure 35: Radio states](#) on page 252.

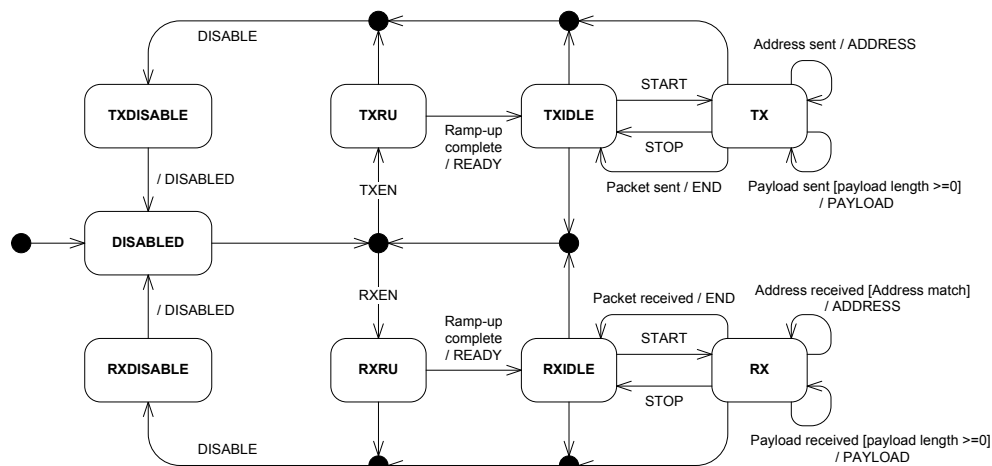


**Figure 35: Radio states**

This figure shows how the tasks and events relate to the RADIO's operation. The RADIO does not prevent a task from being triggered from the wrong state. If a task is triggered from the wrong state, for example if the RXEN task is triggered from the RXDISABLE state, this may lead to incorrect behaviour. As illustrated in [Figure 35: Radio states](#) on page 252, the PAYLOAD event is always generated even if the payload is zero.

## 22.6 Transmit sequence

Before the RADIO is able to transmit a packet, it must first ramp-up in TX mode.


See TXRU in [Figure 35: Radio states](#) on page 252 and [Figure 36: Transmit sequence](#) on page 253. A TXRU ramp-up sequence is initiated when the TXEN task is triggered. After the radio has successfully ramped up it will generate the READY event indicating that a packet transmission can be initiated. A packet transmission is initiated by triggering the START task. As illustrated in [Figure 35: Radio states](#) on page 252 the START task can first be triggered after the RADIO has entered into the TXIDLE state.

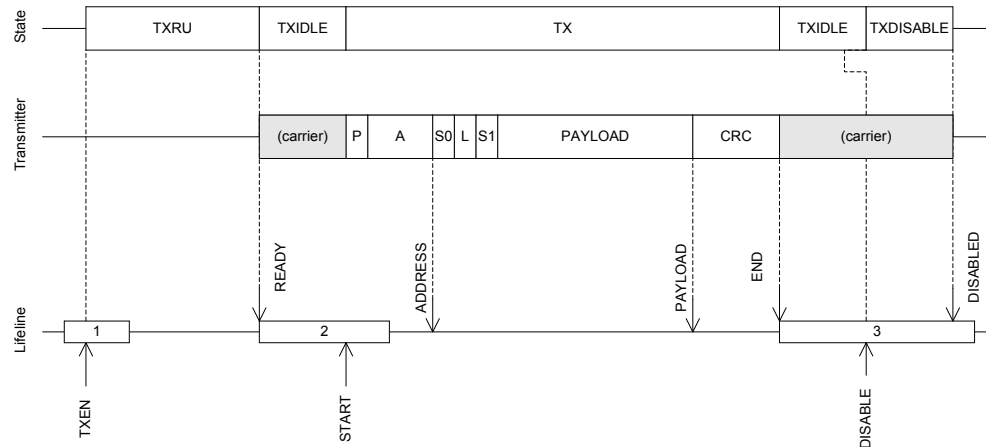

**Figure 36: Transmit sequence**


[Figure 36: Transmit sequence](#) on page 253 illustrates a single packet transmission where the CPU manually triggers the different tasks needed to control the flow of the RADIO, i.e. no shortcuts are used. If shortcuts are not used, a certain amount of delay caused by CPU execution is expected between READY and START, and between END and DISABLE. As illustrated in [Figure 36: Transmit sequence](#) on page 253 the RADIO will by default transmit '1's between READY and START, and between END and DISABLED. What is transmitted can be programmed through the DTX field in the MODECNF0 register.

A slightly modified version of the transmit sequence from [Figure 36: Transmit sequence](#) on page 253 is illustrated in [Figure 37: Transmit sequence using shortcuts to avoid delays](#) on page 253 where the RADIO is configured to use shortcuts between READY and START, and between END and DISABLE, which means that no delay is introduced.

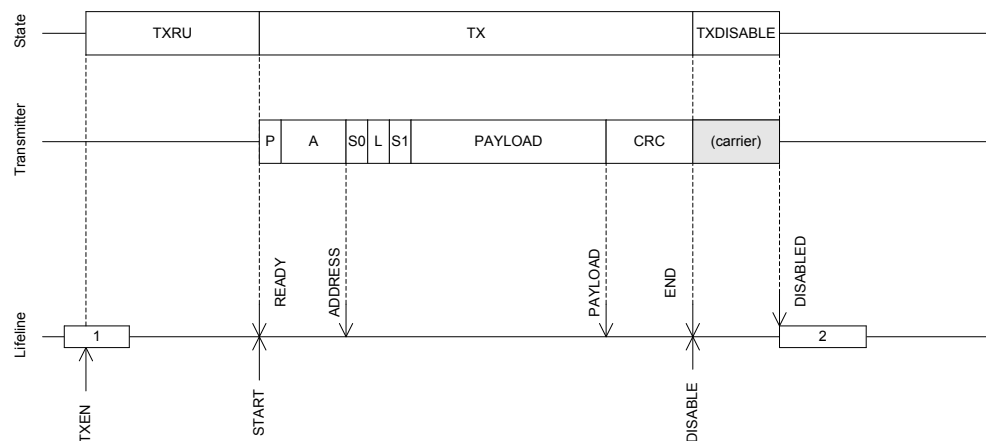

**Figure 37: Transmit sequence using shortcuts to avoid delays**

The RADIO is able to send multiple packets one after the other without having to disable and re-enable the RADIO between packets, this is illustrated in [Figure 38: Transmission of multiple packets](#) on page 254.

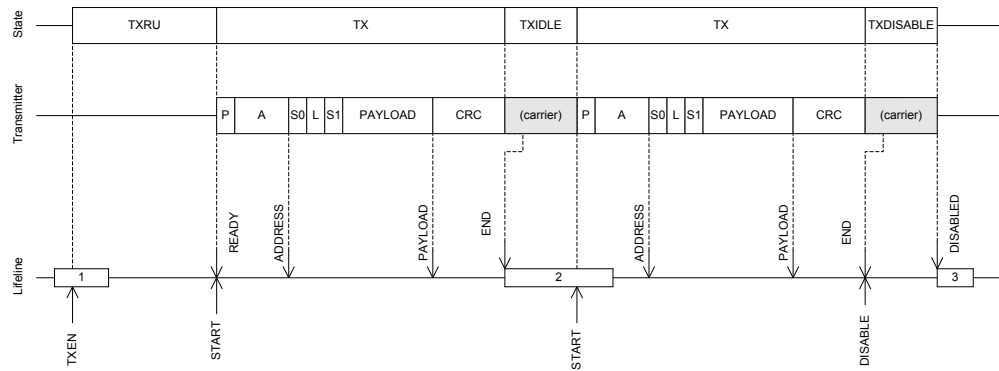


**Figure 38: Transmission of multiple packets**

## 22.7 Receive sequence

Before the RADIO is able to receive a packet, it must first ramp up in RX mode

See RXRU in [Figure 35: Radio states](#) on page 252 and [Figure 39: Receive sequence](#) on page 254.

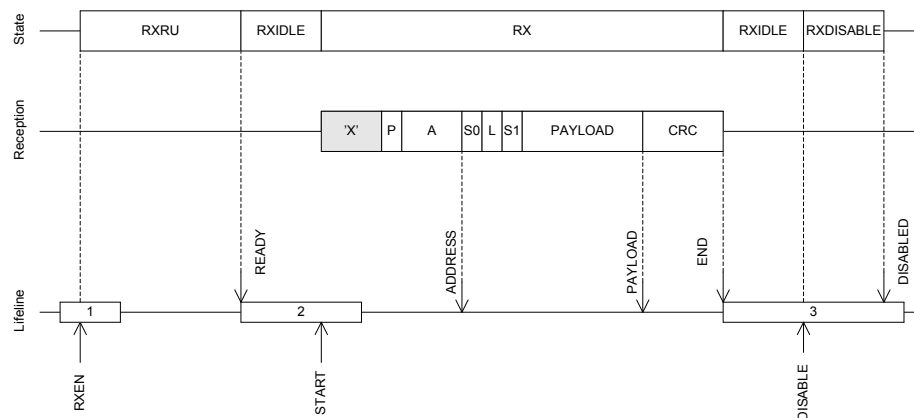


**Figure 39: Receive sequence**

An RXRU ramp-up sequence is initiated when the RXEN task is triggered. After the radio has successfully ramped up it will generate the READY event indicating that a packet reception can be initiated. A packet reception is initiated by triggering the START task. As illustrated in [Figure 35: Radio states](#) on page 252 the START task can first be triggered after the RADIO has entered into the RXIDLE state.


[Figure 39: Receive sequence](#) on page 254 illustrates a single packet reception where the CPU manually triggers the different tasks needed to control the flow of the RADIO, i.e. no shortcuts are used. If shortcuts are not used, a certain amount of delay, caused by CPU execution, is expected between READY and START, and between END and DISABLE. As illustrated [Figure 39: Receive sequence](#) on page 254 the RADIO will be listening and possibly receiving undefined data, represented with an 'X', from START and until a packet with valid preamble (P) is received.

A slightly modified version of the receive sequence from [Figure 39: Receive sequence](#) on page 254 is illustrated in [Figure 40: Receive sequence using shortcuts to avoid delays](#) on page 255 where the RADIO is configured to use shortcuts between READY and START, and between END and DISABLE, which means that no delay is introduced.

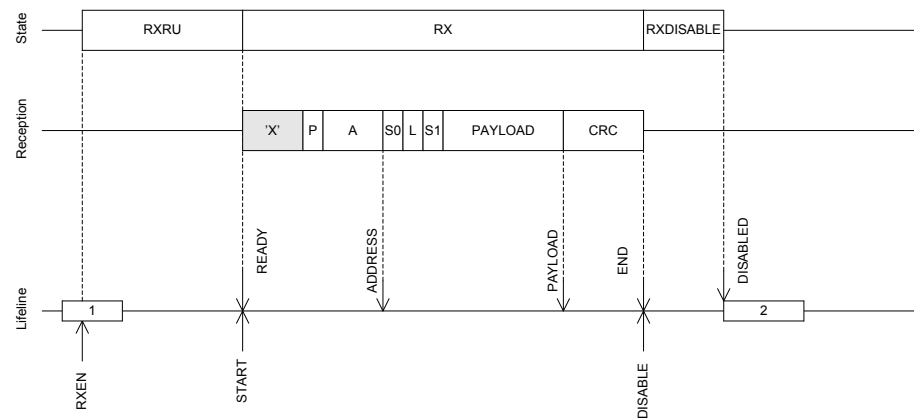

**Figure 40: Receive sequence using shortcuts to avoid delays**

The RADIO is able to receive multiple packets one after the other without having to disable and re-enable the RADIO between packets as illustrated in [Figure 41: Reception of multiple packets](#) on page 255.

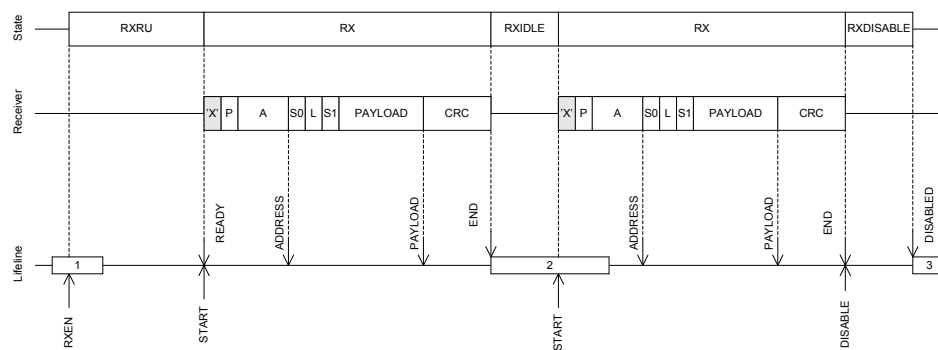

**Figure 41: Reception of multiple packets**

## 22.8 Received Signal Strength Indicator (RSSI)

The radio implements a mechanism for measuring the power in the received radio signal. This feature is called Received Signal Strength Indicator (RSSI).

Sampling of the received signal strength is started by using the RSSISTART task. The sample can be read from the RSSISAMPLE register.

The sample period of the RSSI is defined by  $RSSI_{PERIOD}$ . The RSSI sample will hold the average received signal strength during this sample period.

For the RSSI sample to be valid the radio has to be enabled in receive mode (RXEN task) and the reception has to be started (READY event followed by START task).

## 22.9 Interframe spacing

Interframe spacing is the time interval between two consecutive packets.

It is defined as the time, in micro seconds, from the end of the last bit of the previous packet received and to the start of the first bit of the subsequent packet that is transmitted. The RADIO is able to enforce this interval as specified in the TIFS register as long as TIFS is not specified to be shorter than the RADIO's turn-around time, i.e. the time needed to switch off the receiver, and switch back on the transmitter.

TIFS is only enforced if `END_DISABLE` and `DISABLED_TXEN` or `END_DISABLE` and `DISABLED_RXEN` shortcuts are enabled. TIFS is qualified for use in `BLE_1MBIT`, `BLE_2MBIT`, `BLE_LR125KBIT`, `BLE_LR500KBIT` and `leee802154_250Kbit` mode using default ramp-up mode.

## 22.10 Device address match

The device address match feature is tailored for address white listing in a Bluetooth Smart and similar implementations.

This feature enables on-the-fly device address matching while receiving a packet on air. This feature only works in receive mode and as long as RADIO is configured for little endian, see `PCNF1.ENDIAN`.

The Device Address match unit assumes that the 48 first bits of the payload is the device address and that bit number 6 in `S0` is the TxAdd bit. See the Bluetooth Core Specification for more information about device addresses, TxAdd and whitelisting.

The RADIO is able to listen for eight different device addresses at the same time. These addresses are specified in a DAB/DAP register pair, one pair per address, in addition to a TxAdd bit configured in the DACNF register. The DAB register specifies the 32 least significant bits of the device address, while the DAP register specifies the 16 most significant bits of the device address.

Each of the device addresses can be individually included or excluded from the matching mechanism. This is configured in the DACNF register.

## 22.11 Bit counter

The RADIO implements a simple counter that can be configured to generate an event after a specific number of bits have been transmitted or received.

By using shortcuts, this counter can be started from different events generated by the RADIO and hence count relative to these.


The bit counter is started by triggering the `BCSTART` task, and stopped by triggering the `BCSTOP` task. A `BCMATCH` event will be generated when the bit counter has counted the number of bits specified in the `BCC` register. The bit counter will continue to count bits until the `DISABLED` event is generated or until the `BCSTOP` task is triggered. The CPU can therefore, after a `BCMATCH` event, reconfigure the `BCC` value for new `BCMATCH` events within the same packet.

The bit counter can only be started after the RADIO has received the `ADDRESS` event.

The bit counter will stop and reset on `BCSTOP`, `STOP`, `END` and `DISABLE` tasks.

The figure below illustrates how the bit counter can be used to generate a `BCMATCH` event in the beginning of the packet payload, and again generate a second `BCMATCH` event after sending 2 bytes (16 bits) of the payload.



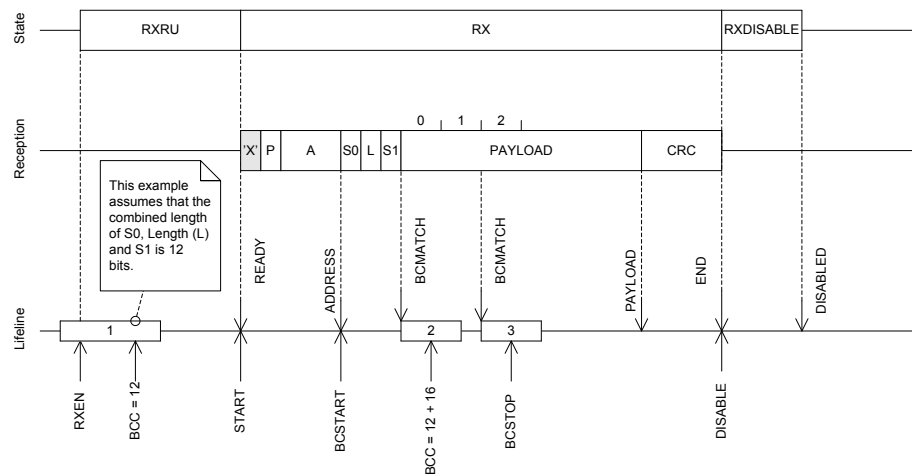

**Figure 42: Bit counter example**

## 22.12 IEEE 802.15.4 Operation

With the MODE=ieee802154\_250kbit the radio module will comply with the IEEE 802.15.4-2006 standard implementing its 250 kbps 2450MHz O-QPSK PHY.

The IEEE 802.15.4 standard differs from Nordic's proprietary and Bluetooth Smart modes. Obvious differences are modulation scheme and channel structure, but also packet structure, security and medium access control.


The main features of the IEEE 802.15.4 mode are:

- Ultra Low power 250 kbps 2450MHz IEEE 802.15.4-2006 compliant link
- Clear Channel Assessment
- Energy detection scan
- CRC Generation

### 22.12.1 Packet Structure

The IEEE 802.15.4 standard defines an on the air frame/packet that is different from what is used in BTLE mode.

[Figure 43: IEEE 802.15.4 Frame Format - PHY-Layer Frame Structure \(PPDU\)](#) on page 257 provides an overview of the physical frame structure and its timing.

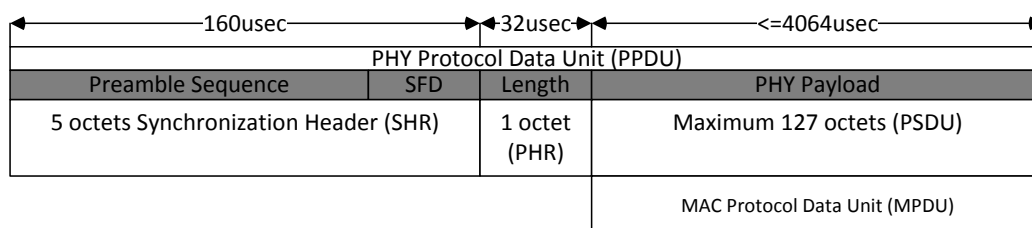

**Figure 43: IEEE 802.15.4 Frame Format - PHY-Layer Frame Structure (PPDU)**

The standard uses the term octet as storage unit for 8-bits within the PPDU. For timing the value symbol is used and it has the duration of 16µsec.


The total usable payload (PSDU) is 127 octets - but when CRC is being used this is reduced to 125 octets of usable payload.

The preamble sequence consists of four octets that are all zero. These are used for the radio receiver to synchronize on. Following the four octets is a single octet named start of frame delimiter (SFD) with a fixed value of 0xA7. The user can program an alternative SFD through the SFD register. This feature is provided for an initial level of frame filtering for those who choose non standard compliance. It is a valuable feature when operating in a congested or private network. The preamble sequence and SFD is generated by the radio module and is not programmed by the user into the frame buffer.

The PHY header (PHR) is a single octet following the SHR. The least significant seven bits denote the frame length of the following PSDU. The most significant bit is reserved and shall be set to zero for frames that wishes to be standards compliant. The radio module will report all eight bits and it can potentially be used to carry some information. The PHR is the first byte that will be written to the frame Data Memory pointed to by PACKETPTR. Frames with zero length will be discarded and the FRAMESTART event will not be generated in this case.

The next N octets will carry the data of the PHY packet - where N equals the value of the PHR. For an implementation also using the IEEE 802.15.4 MAC layer, the PHY data will be a MAC frame of N-2 octets since two octets will occupy a CRC field.

An IEEE 802.15.4 MAC frame will always consist of a header (The frame control field (FCF), Sequence Number and Addressing Fields), a payload and the 16-bit Frame Control Sequence (FCS) as seen in [Figure 44: IEEE 802.15.4 Frame Format - MAC-Layer Frame Structure \(MPDU\)](#) on page 258.

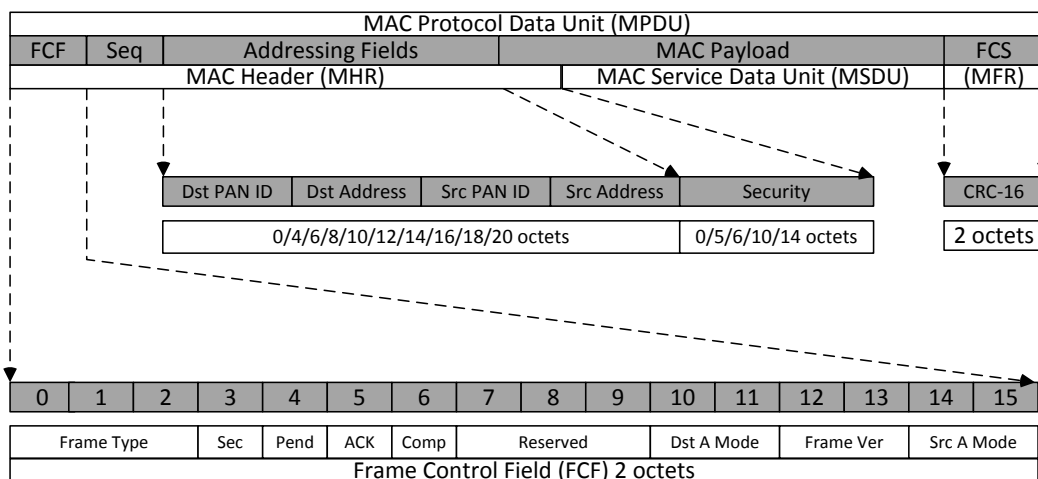

**Figure 44: IEEE 802.15.4 Frame Format - MAC-Layer Frame Structure (MPDU)**

The two FCF octets contains information about what type of frame this is, what addressing it uses and other control flags. This field is decoded when using the assisted operating modes offered by the radio.

The sequence number is a single octet in size and is unique for a frame. It will be used in the associated acknowledgement frame sent upon successful frame reception.

The addressing field can be zero (Acknowledgement Frame) or up to 20 octets in size. The field is used to direct packets to the correct recipient as well as denoting its origin. IEEE 802.15.4 bases it's addressing on networks being organized in PANs with 16-bit identifier and nodes having a 16 or 64-bit address. In the assisted receive mode these parameters are analyzed for address matching and acknowledgement.

The MAC payload carries the data of the next higher layer or in the case of a MAC command frame information used by the MAC layer itself.

The two last octets contain the 16-bit ITU-T CRC. The FCS is calculated over the MAC header (MHR) and MAC payload (MSDU) parts of the frame. This field is calculated automatically when sending a frame - or indicated in the CRCSTATUS register when a frame is received. This feature is taken care of autonomously by the CRC module if configured.

## 22.12.2 Operating Frequencies

The IEEE 802.15.4 standard defines 16 channels [11 - 26] in the 2450MHz frequency band of 5MHz each.

The FREQUENCY register of the radio module must be programmed according to [Table 33: IEEE 802.15.4 Center Frequency Definition](#) on page 259 for correct operation on the center frequency defined for each channel.

**Table 33: IEEE 802.15.4 Center Frequency Definition**

IEEE 802.15.4 Channel	Center Frequency (MHz)	FREQUENCY Setting
Channel 11	2405	5
Channel 12	2410	10
Channel 13	2415	15
Channel 14	2420	20
Channel 15	2425	25
Channel 16	2430	30
Channel 17	2435	35
Channel 18	2440	40
Channel 19	2445	45
Channel 20	2450	50
Channel 21	2455	55
Channel 22	2460	60
Channel 23	2465	65
Channel 24	2470	70
Channel 25	2475	75
Channel 26	2480	80

### 22.12.3 Energy Detection


The IEEE 802.15.4 standard requires that it is possible to sample the received signal power within the bandwidth of a channel for the purpose of determining presence of activity.

There should be no attempt made to decode the signals on the channel, and this is done by disabling the shortcut between READY event and START task before putting the radio in receive mode. The energy detection (ED) measurement time where RSSI samples are averaged over is 8 symbol periods (128 microseconds). The standard further specifies the measurement to be a number between 0 and 0xFF - where 0 shall indicate received power less than 10dB above the selected receiver sensitivity. The power range of the ED values must be at least 40dB with a linear mapping with accuracy of  $\pm 6$ dB. See section 6.9.7 Receiver ED in the standard for further details. An example of an ED scan is given below.

Below is a code snippet showing how to perform a single energy detection measurement.

```
uint8_t sample_ed(void)
{
    NRF_RADIO->TASKS_EDSTART = 1;           //Start
    while (NRF_RADIO->EVENTS_EDEND != 1) {
        //CPU can sleep here or do something else
        //Use of interrupts are encouraged
    }
    return (uint8_t)NRF_RADIO->EDSAMPLE; //Read level
}
```

It is the mlme-scan.req primitive of the MAC layer that is using the ED measurement to detect channels where there might be wireless activity. To assist this primitive a tailored mode of operation is available where the ED measurement runs for a defined number of iterations where it keeps track of the maximum ED level. This is engaged by writing the ED\_CNT register to a value different from 0, it will then run the specified number of iterations reporting the maximum energy measurement in the EDSAMPLE register. The scan is started with EDSTART task and its end indicated with the EDEND event. This greatly reduces the interrupt frequency and hence power consumption. [Figure 45: Energy Detection Measurement Examples](#) on page 260 shows how the ED measurement will operate depending on the ED\_CNT register.

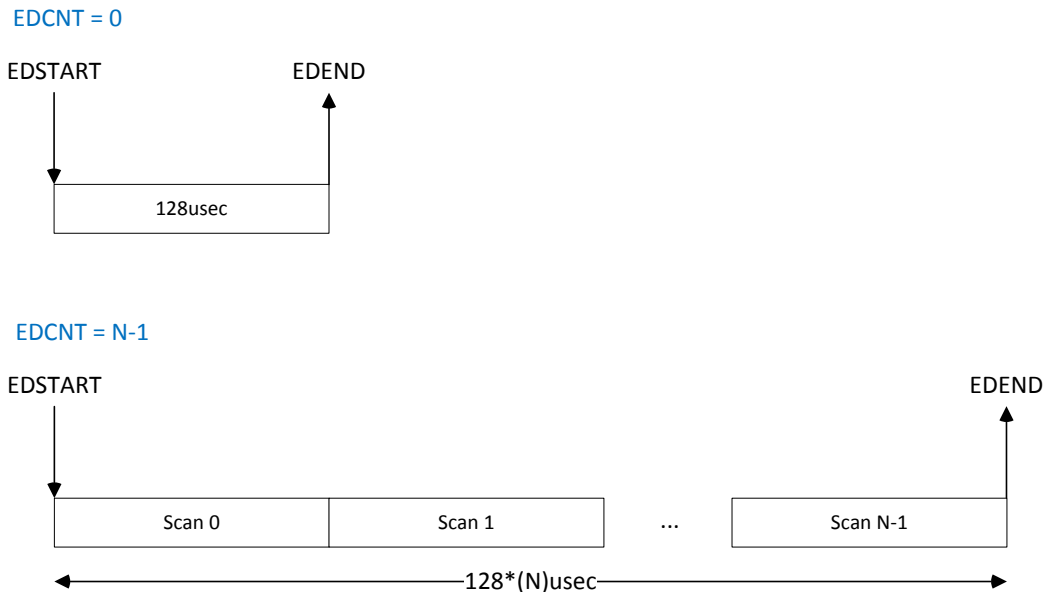

**Figure 45: Energy Detection Measurement Examples**

An ongoing scan can always be stopped by writing the EDSTOP task. It will be followed by the EDSTOPPED event when the module has terminated.

### 22.12.4 Clear Channel Assessment

IEEE 802.15.4 implements a listen-before-talk channel access method to avoid collisions when transmitting - namely Carrier Sense Multiple Access with Collision Avoidance (CSMA-CA). The key part of this is measuring if the wireless medium is busy or not.

At least three methods must be supported:

- Mode 1 (Energy above threshold): The medium is reported busy upon detecting any energy above the ED threshold
- Mode 2 (Carrier sense only): The medium is reported busy upon detection of a signal compliant with the IEEE 802.15.4 standard with the same modulation and spreading characteristics.
- Mode 3 (Carrier sense and threshold): The medium is reported busy by logically ANDing or ORing the results from Mode 1 and Mode 2.

It is furthermore specified that the clear channel assessment should survey a period equal to 8 symbols or 128µsec.

The radio module has to be in receive mode and be able to receive correct packets when performing the CCA. The shortcut between READY and START must be disabled if baseband processing is not to be performed while the measurement is running.

Mode 1 is enabled by first configuring the CCA\_MODE=EdMode and writing the CCA\_EDTHRES to a chosen value. When the CCA\_START task is written the radio module will perform a ED measurement for 8 symbols and compare the measured level with that found in the CCA\_EDTHRES register. If the measured value is higher than or equal to this threshold the CCABUSY event is generated - the CCAIDLE event is generated if the measured level is less than the threshold.

Mode 2 is enabled by configuring the CCA\_MODE=CarrierMode. In carrier mode the module will sample to see if a valid SFD is found during the 8 symbols. If a valid SFD is seen the CCABUSY event is generated and the node should not send any data. The CCABUSY event is also generated if the scan was performed during an ongoing frame reception. In the case where the measurement period completes with no SFD detection the CCAIDLE task is generated. With the CCA\_CORR\_COUNT unequal to zero the algorithm will look at the correlator output in addition to the SFD detection signal. If a SFD is reported during the scan period it will terminate immediately indicating busy medium. Similarly, if the number of peaks above CCA\_CORRTHRES crosses the CCA\_CORR\_COUNT the CCABUSY event is generated. If less than

CCA\_CORR\_COUNT crossings are found and no SFD is reported the CCAIDLE signal will be generated and it is ok for the node to commence sending data.

With the CCA\_MODE=CarrierAndEdMode or CCA\_MODE=CarrierOrEdMode a logical combination of the result from running both Mode 1 and Mode 2 is performed. The CCABUSY or CCAIDLE signal will be generated based on an ANDing or ORing of the internal signals from performing both the energy detection and carrier detection scans.

An ongoing CCA can always be stopped by issuing the CCASTOP task. This will trigger the associated CCASTOPPED event.

For CCA mode automation there are three shortcuts available. One is between CCAIDLE and TXEN. This short must always be used in conjunction with the short between CCAIDLE and STOP. This automation is provided so that the radio can automatically switch between RX (When performing the CCA) and to TX where the packet is sent. The last shortcut associated with the CCA mode is between CCABUSY and DISABLE. This will cause the radio to be disabled whenever the CCA reports a busy medium.

Another handy shortcut is between RXREADY and CCASTART. When the radio has ramped up into RX mode it can immediately start a CCA.

### 22.12.5 Cyclic Redundancy Check

IEEE 802.15.4 uses a 16-bit ITU-T cyclic redundancy check (CRC) calculated over the MHR and MSDU.

The standard defines the following generator polynomial:

$$G(x) = x^{16} + x^{12} + x^5 + 1$$

In receive mode the radio will trigger the CRC module when the first octet after the frame length (PHR) is received. The CRC will then update on each consecutive octet received. When a complete frame is received the CRCSTATUS register will be updated accordingly and the EVENTS\_CRCOK or EVENTS\_CRCERROR generated. When the CRC module is enabled it will not write the two last octets (CRC) to the frame Data RAM. When transmitting the CRC will be computed on the fly, starting with the first octet after PHR, and inserted as the two last octets in the frame. The EasyDMA will fetch frame length - 2 octets from DataRAM and insert the CRC octets insitu.


Below is a code snippet for configuring the CRC module for correct operation when in IEEE 802.15.4 mode. The CRCCNF is written to 16-bit CRC and the CRCPOLY is written to 0x11021. The start value used by IEEE 802.15.4 is zero and CRCINIT is configured to reflect this.

```
/* 16-bit CRC with ITU-T polynomial with 0 as start condition*/
write_reg(NRFRADIO_REG(CRCCNF), 0x202);
write_reg(NRFRADIO_REG(CRCPOLY), 0x11021);
write_reg(NRFRADIO_REG(CRCINIT), 0);
```

The ENDIANESS subregister must be set to LittleEndian since the FCS field is transmitted leftmost bit first.

### 22.12.6 Transmit Sequence

The transmission is started by first putting the radio in receive mode sending the RXEN task.

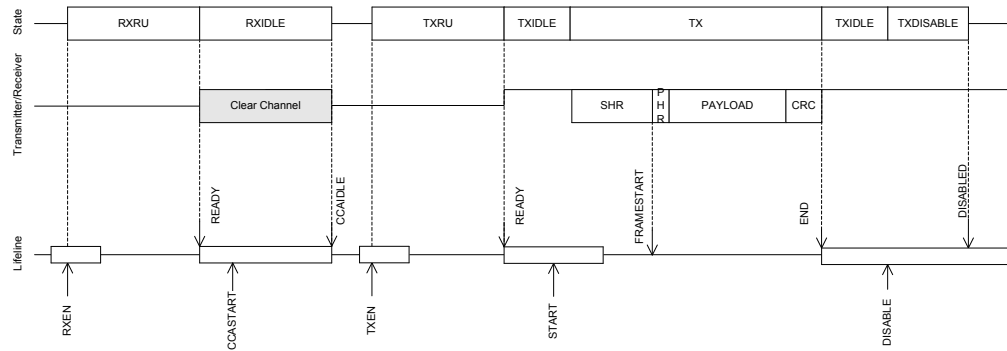

**Figure 46: IEEE 802.15.4 Transmit Sequence**

The receiver will ramp up and enter the RXIDLE state where the READY event is generated. Upon receiving the ready event the CCA is started by writing to the CCASTART task register. The chosen mode of assessment (CCA\_MODE register) will be performed and signal the CCAIDLE or CCABUSY event 128usec later. If the CCABUSY is received the radio will have to retry the CCA after a specific back off period as outlined in the IEEE 802.15.4 standard (See Figure 69 in section 7.5.1.4 The CSMA-CA algorithm of the standard). An outline of the IEEE 802.15.4 transmission can be found in the figure below.


When the CCAIDLE event on the other hand is generated the user shall write to the TXEN task register to enter the TXRU state. The READY event will be generated when the radio is in TXIDLE state and ready to transmit. With the PACKETPTR pointing to the length (PHR) field of the frame the START task can be written. The radio will send the four octet preamble sequence followed by the start of frame delimiter (SFD register). The first byte read from the DataRAM is the length field (PHR) followed by the transmission of the number of bytes indicated as the frame length. If the CRC module is configured it will run for PHR-2 octets. The last two octets will be substituted with the results from running the CRC. The necessary CRC parameters are sampled on the START task. The FCS field of the frame is little endian.

In addition to the already available shortcuts, one is provided between READY event and CCASTART task so that a CCA can automatically start when the receiver is ready. And a second shortcut has been added between CCAIDLE event and the TXEN task so that upon detecting a clear channel the radio can immediately enter transmit mode.

## 22.12.7 Receive Sequence

The reception is started by first putting the radio in receive mode. Writing to the RXEN task the radio will start ramping up and enter the RXRU state.


When the READY event is generated the radio has entered the RXIDLE mode. For the baseband processing to be enabled the START task must be written. An outline of the IEEE 802.15.4 reception can be found in [Figure 47: IEEE 802.15.4 Receive Sequence](#) on page 262

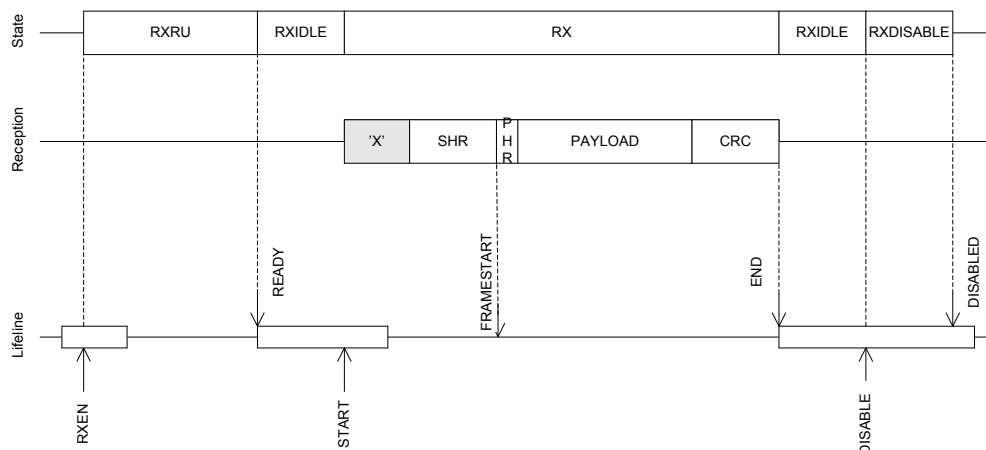

**Figure 47: IEEE 802.15.4 Receive Sequence**

When a valid SHR is received the radio will start storing future octets (Starting with PHR) to the DataMemory pointed to by PACKETPTR. After the SFD octet is received the FRAMESTART event is generated. If the CRC module is enabled it will start updating with the second byte received (First byte in payload) and run for the full frame length. The two last bytes in the frame is not written to DataRAM when CRC is configured. However, if the result of the CRC after running the full frame is zero the CRCOK event will be generated. The END event is generated when the last octet has been received and is available in DataRAM.

When a packet is received a link quality indicator (LQI) is also generated and appended immediately after the last received octet. When using IEEE 802.15.4 compliant frame this will be just after the MSDU since the FCS is not reported. In the case of a non-compliant frame it will be appended after the full frame. The LQI is a number ranging from 0 (lowest link quality) to 255 (highest link quality). The LQI is only valid for frames longer than three octets. When receiving a frame the RSSI (Reported as negative dB) will be measured at three points during the reception. These three values will be sorted and the middle one selected (Median 3) for then to be remapped within the LQI range. See [Figure 48: IEEE 802.15.4 Frame In DataRAM](#) on page 263 for further detail on the LQI measurement and how the data is arranged in the DataRAM.

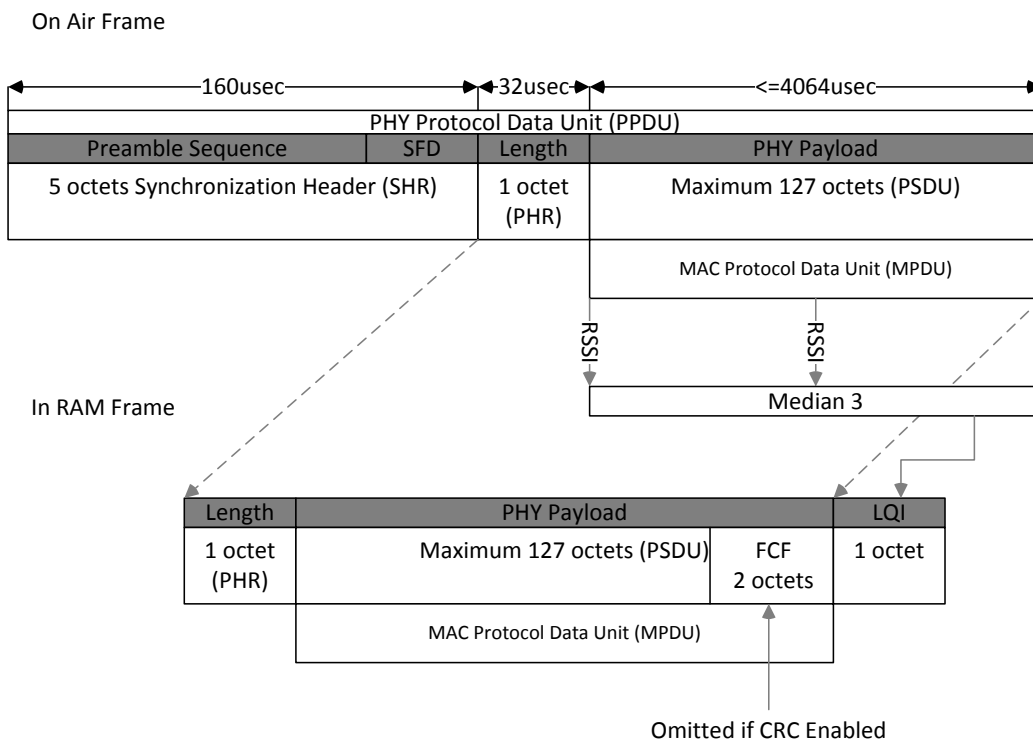

**Figure 48: IEEE 802.15.4 Frame In DataRAM**

A shortcut has been added between FRAMESTART event and the BCSTART task. This can be used to trigger a BCMATCH event after N bits - such as when inspecting the MAC addressing fields.

## 22.12.8 Interframe Spacing

The IEEE 802.15.4 standard defines a specific time that is allotted for the MAC sublayer to process received data. Usage of this interframe spacing (IFS) comes into play to avoid that two frames are transmitted too close to each other in time. If the a transmission is requesting an acknowledgement, the operation to the second frame shall be at least an IFS period.


The IFS is determined to be:

- IFS equals macMinSIFSPeriod (12 symbols) if the MPDU is less than or equal to aMaxSIFSFrameSize (18 octets) octets
- IFS equals macMinLIFSPeriod (40 symbols) if the MPDU is larger than aMaxSIFSFrameSize

Using the efficient assisted modes in the radio module the TIFS will be programmed with the correct value based on the frame being transmitted. If the assisted modes are not being used the user must update the



TIFS register manually. [Figure 49: Interframe Spacing Examples](#) on page 264 provides further detail on what IFS period is valid in both acknowledged and unacknowledged transmissions.

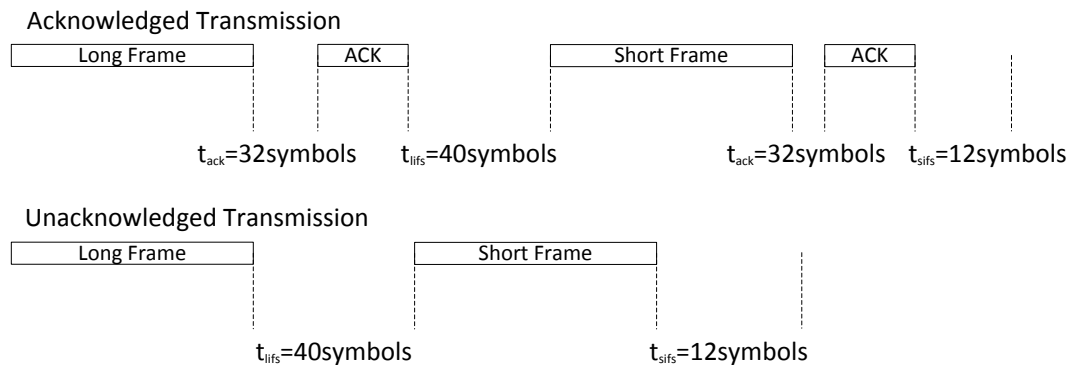

**Figure 49: Interframe Spacing Examples**

## 22.13 EasyDMA

The RADIO uses EasyDMA for reading and writing of data packets from and to the RAM without CPU involvement.

As illustrated in [Figure 30: RADIO block diagram](#) on page 249, the RADIO's EasyDMA utilizes the same PACKETPTR for receiving and transmitting packets. The CPU should reconfigure this pointer every time before the RADIO is started via the START task. The PACKETPTR and MAXLEN registers are double-buffered. They can be updated and prepared for the next transmission.

The structure of a radio packet is described in detail in [Packet configuration](#) on page 249. The data that is stored in Data RAM and transported by EasyDMA consists of S0, LENGTH, S1, the payload itself, and a static add-on sent immediately after the payload.

The size of each of the above elements (S0, LENGTH, S1 and so forth) in the frame received is configurable (see [Packet configuration](#) on page 249), and the space occupied in RAM depends on these settings. A size of zero is possible for any of the fields, it is up to the user to make sure that the resulting frame complies with the RF protocol chosen.

All fields are extended in size to align with a byte boundary in RAM. For instance a 3 bit long field on air will occupy 1 byte in RAM while a 9 bit long field will be extended to 2 bytes.

In addition, the S0INCL field determines if S0 is present in RAM if its length is zero. If present, one byte is allocated in RAM.

The radio packets elements can be configured as follows:

- CI, TERM1 and TERM2 fields are only present in Bluetooth Smart Long Range mode
- S0 is configured through the S0LEN field in PCNF0
- LENGTH is configured through the LFLEN field in PCNF0
- S1 is configured through the S1LEN field in PCNF0
- Size of the payload is configured through the value in RAM corresponding to the LENGTH field
- Size of the static add-on to the payload is configured through the STATLEN field in PCNF1

The MAXLEN field in the PCNF1 register configures the maximum packet payload plus add-on size in number of bytes that can be transmitted or received by the RADIO. This feature can be used to ensure that the RADIO does not overwrite, or read beyond, the RAM assigned to the packet payload. This means that if the packet payload length defined by PCNF1.STATLEN and the LENGTH field in the packet specifies a packet larger than MAXLEN, the payload will be truncated at MAXLEN.

**Important:** The MAXLEN includes the payload and the add-on, but excludes the size occupied by the S0, LENGTH and S1 fields. This has to be taken into account when allocating RAM.

If the payload and add-on length is specified larger than MAXLEN, the RADIO will still transmit or receive in the same way as before except the payload is now truncated to MAXLEN. The packet's LENGTH field will



not be altered when the payload is truncated. The RADIO will calculate CRC as if the packet length is equal to MAXLEN.

**Important:** If the PACKETPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The END event indicates that the last bit has been processed by the radio. The DISABLED event is issued to acknowledge that an DISABLE task is done.

## 22.14 Registers

**Table 34: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40001000	RADIO	RADIO	2.4 GHz radio	

**Table 35: Register Overview**

Register	Offset	Description
TASKS_TXEN	0x000	Enable RADIO in TX mode
TASKS_RXEN	0x004	Enable RADIO in RX mode
TASKS_START	0x008	Start RADIO
TASKS_STOP	0x00C	Stop RADIO
TASKS_DISABLE	0x010	Disable RADIO
TASKS_RSSISTART	0x014	Start the RSSI and take one single sample of the receive signal strength.
TASKS_RSSISTOP	0x018	Stop the RSSI measurement
TASKS_BCSTART	0x01C	Start the bit counter
TASKS_BCSTOP	0x020	Stop the bit counter
TASKS_EDSTART	0x024	Start the Energy Detect measurement used in IEEE 802.15.4 mode
TASKS_EDSTOP	0x028	Stop the Energy Detect measurement
TASKS_CCASTART	0x02C	Start the Clear Channel Assessment used in IEEE 802.15.4 mode
TASKS_CCASTOP	0x030	Stop the Clear Channel Assessment
EVENTS_READY	0x100	RADIO has ramped up and is ready to be started
EVENTS_ADDRESS	0x104	Address sent or received
EVENTS_PAYLOAD	0x108	Packet payload sent or received
EVENTS_END	0x10C	Packet sent or received
EVENTS_DISABLED	0x110	RADIO has been disabled
EVENTS_DEVMATCH	0x114	A device address match occurred on the last received packet
EVENTS_DEVMISS	0x118	No device address match occurred on the last received packet
EVENTS_RSSIEND	0x11C	Sampling of receive signal strength complete.
EVENTS_BCMATCH	0x128	Bit counter reached bit count value.
EVENTS_CRCOK	0x130	Packet received with CRC ok
EVENTS_CRCERROR	0x134	Packet received with CRC error
EVENTS_FRAMESTART	0x138	IEEE 802.15.4 length field received
EVENTS_EDEND	0x13C	Sampling of Energy Detection complete. A new ED sample is ready for readout from the RADIO.EDSAMPLE register
EVENTS_EDSTOPPED	0x140	The sampling of Energy Detection has stopped
EVENTS_CCAIDLE	0x144	Wireless medium in idle - clear to send
EVENTS_CCABUSY	0x148	Wireless medium busy - do not send
EVENTS_CCASTOPPED	0x14C	The CCA has stopped
EVENTS_RATEBOOST	0x150	Ble_LR CI field received, receive mode is changed from Ble_LR125Kbit to Ble_LR500Kbit.
EVENTS_TXREADY	0x154	RADIO has ramped up and is ready to be started TX path
EVENTS_RXREADY	0x158	RADIO has ramped up and is ready to be started RX path
EVENTS_MHRMATCH	0x15C	MAC Header match found.
<a href="#">SHORTS</a>	0x200	Shortcut register
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">CRCSTATUS</a>	0x400	CRC status

Register	Offset	Description
<i>RXMATCH</i>	0x408	Received address
<i>RXCRC</i>	0x40C	CRC field of previously received packet
<i>DAI</i>	0x410	Device address match index
<i>PACKETPTR</i>	0x504	Packet pointer
<i>FREQUENCY</i>	0x508	Frequency
<i>TXPOWER</i>	0x50C	Output power
<i>MODE</i>	0x510	Data rate and modulation
<i>PCNF0</i>	0x514	Packet configuration register 0
<i>PCNF1</i>	0x518	Packet configuration register 1
<i>BASE0</i>	0x51C	Base address 0
<i>BASE1</i>	0x520	Base address 1
<i>PREFIX0</i>	0x524	Prefixes bytes for logical addresses 0-3
<i>PREFIX1</i>	0x528	Prefixes bytes for logical addresses 4-7
<i>TXADDRESS</i>	0x52C	Transmit address select
<i>RXADDRESSES</i>	0x530	Receive address select
<i>CRCCNF</i>	0x534	CRC configuration
<i>CRCPOLY</i>	0x538	CRC polynomial
<i>CRCINIT</i>	0x53C	CRC initial value
<i>TIFS</i>	0x544	Inter Frame Spacing in us
<i>RSSISAMPLE</i>	0x548	RSSI sample
<i>STATE</i>	0x550	Current radio state
<i>DATAWHITEIV</i>	0x554	Data whitening initial value
<i>BCC</i>	0x560	Bit counter compare
<i>DAB[0]</i>	0x600	Device address base segment 0
<i>DAB[1]</i>	0x604	Device address base segment 1
<i>DAB[2]</i>	0x608	Device address base segment 2
<i>DAB[3]</i>	0x60C	Device address base segment 3
<i>DAB[4]</i>	0x610	Device address base segment 4
<i>DAB[5]</i>	0x614	Device address base segment 5
<i>DAB[6]</i>	0x618	Device address base segment 6
<i>DAB[7]</i>	0x61C	Device address base segment 7
<i>DAP[0]</i>	0x620	Device address prefix 0
<i>DAP[1]</i>	0x624	Device address prefix 1
<i>DAP[2]</i>	0x628	Device address prefix 2
<i>DAP[3]</i>	0x62C	Device address prefix 3
<i>DAP[4]</i>	0x630	Device address prefix 4
<i>DAP[5]</i>	0x634	Device address prefix 5
<i>DAP[6]</i>	0x638	Device address prefix 6
<i>DAP[7]</i>	0x63C	Device address prefix 7
<i>DACNF</i>	0x640	Device address match configuration
<i>MHRMATCHCONF</i>	0x644	Search Pattern Configuration
<i>MHRMATCHMAS</i>	0x648	Pattern mask
<i>MODECNFO</i>	0x650	Radio mode configuration register 0
<i>SFD</i>	0x660	IEEE 802.15.4 Start of Frame Delimiter
<i>EDCNT</i>	0x664	IEEE 802.15.4 Energy Detect Loop Count
<i>EDSAMPLE</i>	0x668	IEEE 802.15.4 Energy Detect Level
<i>CCACTRL</i>	0x66C	IEEE 802.15.4 Clear Channel Assessment Control
<i>POWER</i>	0xFFC	Peripheral power control

## 22.14.1 SHORTS

Address offset: 0x200

Shortcut register

Page 267

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																				S R Q P O N M L K H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
			Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between EDEND event and DISABLE task																																			
			See <a href="#">EVENTS_EDEND</a> and <a href="#">TASKS_DISABLE</a>																																			
P	RW	EDEND_DISABLE	Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between EDEND event and DISABLE task																																			
			See <a href="#">EVENTS_EDEND</a> and <a href="#">TASKS_DISABLE</a>																																			
Q	RW	CCAIDLE_STOP	Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between CCAIDLE event and STOP task																																			
			See <a href="#">EVENTS_CCAIDLE</a> and <a href="#">TASKS_STOP</a>																																			
			Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between CCAIDLE event and STOP task																																			
			See <a href="#">EVENTS_CCAIDLE</a> and <a href="#">TASKS_STOP</a>																																			
R	RW	TXREADY_START	Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between TXREADY event and START task																																			
			See <a href="#">EVENTS_TXREADY</a> and <a href="#">TASKS_START</a>																																			
			Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between TXREADY event and START task																																			
			See <a href="#">EVENTS_TXREADY</a> and <a href="#">TASKS_START</a>																																			
S	RW	RXREADY_START	Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between RXREADY event and START task																																			
			See <a href="#">EVENTS_RXREADY</a> and <a href="#">TASKS_START</a>																																			
			Disabled	0	Disable shortcut																																	
			Enabled	1	Enable shortcut																																	
			Shortcut between RXREADY event and START task																																			
			See <a href="#">EVENTS_RXREADY</a> and <a href="#">TASKS_START</a>																																			

## 22.14.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																			V U T S R Q P O N M L K I H G F E D C B A															
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																												
A	RW	READY				Write '1' to Enable interrupt for READY event																												
						See <a href="#">EVENTS_READY</a>																												
			Set		1	Enable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
B	RW	ADDRESS				Write '1' to Enable interrupt for ADDRESS event																												
						See <a href="#">EVENTS_ADDRESS</a>																												
			Set		1	Enable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
C	RW	PAYLOAD				Write '1' to Enable interrupt for PAYLOAD event																												
						See <a href="#">EVENTS_PAYLOAD</a>																												
			Set		1	Enable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
D	RW	END				Write '1' to Enable interrupt for END event																												
						See <a href="#">EVENTS_END</a>																												
			Set		1	Enable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
E	RW	DISABLED				Write '1' to Enable interrupt for DISABLED event																												
						See <a href="#">EVENTS_DISABLED</a>																												
			Set		1	Enable																												
			Disabled		0	Read: Disabled																												

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					V U T S R Q P O N M L K I H G F E D C B A																																	
Reset 0x00000000					0 0																																	
Id	RW	Field	Value Id	Value	Description																																	
F	RW	DEVMATCH	Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for DEVMATCH event																																			
			See <a href="#">EVENTS_DEVMATCH</a>																																			
			Set	1	Enable																																	
G	RW	DEVMISS	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for DEVMISS event																																			
			See <a href="#">EVENTS_DEVMISS</a>																																			
H	RW	RSSIEND	Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for RSSIEND event																																			
I	RW	BCMATCH	See <a href="#">EVENTS_RSSIEND</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
K	RW	CRCOK	Write '1' to Enable interrupt for BCMATCH event																																			
			See <a href="#">EVENTS_CRCOK</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
L	RW	CRCERROR	Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for CRCOK event																																			
			See <a href="#">EVENTS_CRCERROR</a>																																			
			Set	1	Enable																																	
M	RW	FRAMESTART	Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for FRAMESTART event																																			
			See <a href="#">EVENTS_FRAMESTART</a>																																			
N	RW	EDEND	Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for EDEND event																																			
O	RW	EDSTOPPED	See <a href="#">EVENTS_EDEND</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
P	RW	CCAIDLE	Write '1' to Enable interrupt for EDSTOPPED event																																			
			See <a href="#">EVENTS_EDSTOPPED</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Enable interrupt for CCAIDLE event																																			
			See <a href="#">EVENTS_CCAIDLE</a>																																			
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Id																		V	U	T	S	R	Q	P	O	N	M	L	K					I					H	G	F	E	D	C	B	A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																											
Reset 0x00000000						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

## 22.14.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id																	V	U	T	S	R	Q	P	O	N	M	L	K					I					H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																								
A	RW	READY			Write '1' to Disable interrupt for READY event																																								
					See <a href="#">EVENTS_READY</a>																																								
		Clear		1	Disable																																								
		Disabled		0	Read: Disabled																																								
		Enabled		1	Read: Enabled																																								
B	RW	ADDRESS			Write '1' to Disable interrupt for ADDRESS event																																								
					See <a href="#">EVENTS_ADDRESS</a>																																								
		Clear		1	Disable																																								
		Disabled		0	Read: Disabled																																								
		Enabled		1	Read: Enabled																																								
C	RW	PAYLOAD			Write '1' to Disable interrupt for PAYLOAD event																																								
					See <a href="#">EVENTS_PAYLOAD</a>																																								

Page 271

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					V U T S R Q P O N M L K I H G F E D C B A																																		
Reset 0x00000000					0 0																																		
Id	RW	Field	Value Id	Value	Description																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for EDSTOPPED event																																	
						See <a href="#">EVENTS_EDSTOPPED</a>																																	
			Clear	1	Disable																																		
O	RW	EDSTOPPED	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for CCAIDLE event																																	
						See <a href="#">EVENTS_CCAIDLE</a>																																	
			Clear	1	Disable																																		
P	RW	CCAIDLE	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for CCABUSY event																																	
						See <a href="#">EVENTS_CCABUSY</a>																																	
			Clear	1	Disable																																		
Q	RW	CCABUSY	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for CCASTOPPED event																																	
						See <a href="#">EVENTS_CCASTOPPED</a>																																	
			Clear	1	Disable																																		
R	RW	CCASTOPPED	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for RATEBOOST event																																	
						See <a href="#">EVENTS_RATEBOOST</a>																																	
			Clear	1	Disable																																		
S	RW	RATEBOOST	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for TXREADY event																																	
						See <a href="#">EVENTS_TXREADY</a>																																	
			Clear	1	Disable																																		
T	RW	TXREADY	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for RXREADY event																																	
						See <a href="#">EVENTS_RXREADY</a>																																	
			Clear	1	Disable																																		
U	RW	RXREADY	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
						Write '1' to Disable interrupt for MHRMATCH event																																	
						See <a href="#">EVENTS_MHRMATCH</a>																																	
			Clear	1	Disable																																		
V	RW	MHRMATCH	Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		

## 22.14.4 CRCSTATUS

Address offset: 0x400

CRC status



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	R	CRCSTATUS				CRC status of packet received																														
			CRCError	0		Packet received with CRC error																														
			CRCOk	1		Packet received with CRC ok																														

## 22.14.5 RXMATCH

Address offset: 0x408

Received address

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	R	RXMATCH					Received address																												
							Logical address of which previous packet was received																												

## 22.14.6 RXCRC

Address offset: 0x40C

CRC field of previously received packet

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

## 22.14.7 DAI

Address offset: 0x410

Device address match index

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	DAI				Device address match index																													
						Index (n) of device address, see DAB[n] and DAP[n], that got an address match.																													

## 22.14.8 PACKETPTR

Address offset: 0x504

Packet pointer

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id	A A																															
Reset 0x00000000	0 0																															
Id	RW	Field	Value	Id	Value	Description																										
A	RW	PACKETPTR				Packet pointer																										
						Packet address to be used for the next transmission or reception. When transmitting, the packet pointed to by this address will be transmitted and when receiving, the received																										

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
								packet will be written to this address. This address is a byte aligned ram address.																											

## 22.14.9 FREQUENCY

Address offset: 0x508

Frequency

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																											B		A	A	A	A	A	A	A
Reset 0x00000002				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	FREQUENCY		[0..100]	Radio channel frequency																														
					Frequency = 2400 + FREQUENCY (MHz).																														
B	RW	MAP			Channel map selection.																														
			Default	0	Channel map between 2400 MHZ .. 2500 MHz																														
					Frequency = 2400 + FREQUENCY (MHz)																														
			Low	1	Channel map between 2360 MHZ .. 2460 MHz																														
					Frequency = 2360 + FREQUENCY (MHz)																														

## 22.14.10 TXPOWER

Address offset: 0x50C

Output power

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	TXPOWER			RADIO output power.																														
					Output power in number of dBm, i.e. if the value -20 is specified the output power will be set to -20dBm.																														
			Pos9dBm	0x9	+9 dBm																														
			Pos8dBm	0x8	+8 dBm																														
			Pos7dBm	0x7	+7 dBm																														
			Pos6dBm	0x6	+6 dBm																														
			Pos5dBm	0x5	+5 dBm																														
			Pos4dBm	0x4	+4 dBm																														
			Pos3dBm	0x3	+3 dBm																														
			Pos2dBm	0x2	+2 dBm																														
			0dBm	0x0	0 dBm																														
			Neg4dBm	0xFC	-4 dBm																														
			Neg8dBm	0xF8	-8 dBm																														
			Neg12dBm	0xF4	-12 dBm																														
			Neg16dBm	0xF0	-16 dBm																														
			Neg20dBm	0xEC	-20 dBm																														
			Neg30dBm	0xD8	-40 dBm																														
			Neg40dBm	0xD8	-40 dBm																														

Deprecated

## 22.14.11 MODE

Address offset: 0x510

Data rate and modulation

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MODE				Radio data rate and modulation setting. The radio supports Frequency-shift Keying (FSK) modulation.																													
		Nrf_1Mbit	0			1 Mbit/s Nordic proprietary radio mode																													
		Nrf_2Mbit	1			2 Mbit/s Nordic proprietary radio mode																													
		Nrf_250Kbit	2			250 kbit/s Nordic proprietary radio mode																													
		Ble_1Mbit	3			1 Mbit/s Bluetooth Low Energy																													
		Ble_2Mbit	4			2 Mbit/s Bluetooth Low Energy																													
		Ble_LR125Kbit	5			Long range 125 kbit/s (TX Only - RX supports both)																													
		Ble_LR500Kbit	6			Long range 500 kbit/s (TX Only - RX supports both)																													
		Ieee802154_250Kbit	15			IEEE 802.15.4-2006 250 kbit/s																													

## 22.14.12 PCNF0

Address offset: 0x514

Packet configuration register 0

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				J J I H H G G F E E E E C A A A A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	LFLEN				Length on air of LENGTH field in number of bits.																												
C	RW	SOLEN				Length on air of S0 field in number of bytes.																												
E	RW	S1LEN				Length on air of S1 field in number of bits.																												
F	RW	S1INCL				Include or exclude S1 field in RAM																												
		Automatic	0			Include S1 field in RAM only if S1LEN > 0																												
		Include	1			Always include S1 field in RAM independent of S1LEN																												
G	RW	CILEN				Length of Code Indicator - Long Range																												
H	RW	PLEN				Length of preamble on air. Decision point: TASKS_START task																												
		8bit	0			8-bit preamble																												
		16bit	1			16-bit preamble																												
		32bitZero	2			32-bit zero preamble - used for IEEE 802.15.4																												
		LongRange	3			Preamble - used for BTLE Long Range																												
I	RW	CRCINC				Indicates if LENGTH field contains CRC or not																												
		Exclude	0			LENGTH does not contain CRC																												
		Include	1			LENGTH includes CRC																												
J	RW	TERMLEN				Length of TERM field in Long Range operation																												

## 22.14.13 PCNF1

Address offset: 0x518

Packet configuration register 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id												E		D					C		C	C	B	B	B	B	B	B	B	A	A	A	A	A	A	A		
Reset 0x00000000				0				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	MAXLEN	[0..255]			Maximum length of packet payload. If the packet payload is larger than MAXLEN, the radio will truncate the payload to MAXLEN.																																
B	RW	STATLEN	[0..255]			Static length in number of bytes																																
						The static length parameter is added to the total length of the payload when sending and receiving packets, e.g. if the static length is set to N the radio will receive or send N bytes more than what is defined in the LENGTH field of the packet.																																
C	RW	BALEN	[2..4]			Base address length in number of bytes																																

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
Id													E		D										C		C		C		B		B		B		B		B		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A		A	

## 22.14.14 BASE0

Address offset: 0x51C

Base address 0

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value		Description																												
A	RW	BASE0					Base address 0																												
							Radio base address 0.																												

## 22.14.15 BASE1

Address offset: 0x520

Base address 1

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value	Id	Value				Description																											
A	RW	BASE1							Base address 1																											
									Radio base address 1.																											

## 22.14.16 PREFIX0

Address offset: 0x524

Prefixes bytes for logical addresses 0-3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	AP0							Address prefix 0.																										
B	RW	AP1							Address prefix 1.																										
C	RW	AP2							Address prefix 2.																										
D	RW	AP3							Address prefix 3.																										

## 22.14.17 PREFIX1

Address offset: 0x528

Prefixes bytes for logical addresses 4-7

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id									D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value			Id	Value			Description																															
A	RW	AP4								Address prefix 4.																															
B	RW	AP5								Address prefix 5.																															
C	RW	AP6								Address prefix 6.																															
D	RW	AP7								Address prefix 7.																															

## 22.14.18 TXADDRESS

Address offset: 0x52C

Transmit address select

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																		A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	TXADDRESS				Transmit address select																															
						Logical address to be used when transmitting a packet.																															

## 22.14.19 RXADDRESSES

Address offset: 0x530

Receive address select

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ADDR0				Enable or disable reception on logical address 0.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
B	RW	ADDR1				Enable or disable reception on logical address 1.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
C	RW	ADDR2				Enable or disable reception on logical address 2.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
D	RW	ADDR3				Enable or disable reception on logical address 3.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
E	RW	ADDR4				Enable or disable reception on logical address 4.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
F	RW	ADDR5				Enable or disable reception on logical address 5.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
G	RW	ADDR6				Enable or disable reception on logical address 6.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														
H	RW	ADDR7				Enable or disable reception on logical address 7.																														
			Disabled		0	Disable																														
			Enabled		1	Enable																														

## 22.14.20 CRCCNF

Address offset: 0x534

CRC configuration

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												B	B					A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value		Description																												
A	RW	LEN				[1..3]		CRC length in number of bytes.																												
										Note: For MODE Ble_LR125Kbit and Ble_LR500Kbit, only LEN set to 3 is supported																										
				Disabled	0			CRC length is zero and CRC calculation is disabled																												
				One	1			CRC length is one byte and CRC calculation is enabled																												
				Two	2			CRC length is two bytes and CRC calculation is enabled																												
				Three	3			CRC length is three bytes and CRC calculation is enabled																												
B	RW	SKIPADDR						Include or exclude packet address field out of CRC calculation.																												
				Include	0			CRC calculation includes address field																												
				Skip	1			CRC calculation does not include address field. The CRC calculation will start at the first byte after the address.																												
				leee802154	2			CRC calculation as per 802.15.4 standard. Starting at first byte after length field.																												

## 22.14.21 CRCPOLY

Address offset: 0x538

CRC polynomial

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CRCPOLY				CRC polynomial																														
Each term in the CRC polynomial is mapped to a bit in this register which index corresponds to the term's exponent. The least significant term/bit is hard-wired internally to 1, and bit number 0 of the register content is ignored by the hardware. The following example is for an 8 bit CRC polynomial: $x^8 + x^7 + x^3 + x^2 + 1 = 1\ 1000\ 1101$ .																																				

## 22.14.22 CRCINIT

Address offset: 0x53C

CRC initial value

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value			Description																											
A	RW	CRCINIT							CRC initial value																											
								Initial value for CRC calculation.																												

## 22.14.23 TIFS

Address offset: 0x544

Inter Frame Spacing in us

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																								A	A	A	A	A	A	A	A	
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																										
A	RW	TIFS				Inter Frame Spacing in us																										

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0									
Id	RW	Field	Value	Id	Value	Description																																								
						Inter frame space is the time interval between two consecutive packets. It is defined as the time, in micro seconds, from the end of the last bit of the previous packet to the start of the first bit of the subsequent packet.																																								

## 22.14.24 RSSISAMPLE

Address offset: 0x548

RSSI sample

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	R	RSSISAMPLE			[0..127]	RSSI sample																															
						RSSI sample result. The value of this register is read as a positive value while the actual received signal strength is a negative value. Actual received signal strength is therefore as follows: received signal strength = -A dBm																															

## 22.14.25 STATE

Address offset: 0x550

Current radio state

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																		A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	R	STATE				Current radio state																															
			Disabled	0		RADIO is in the Disabled state																															
			RxRu	1		RADIO is in the RXRU state																															
			RxIdle	2		RADIO is in the RXIDLE state																															
			Rx	3		RADIO is in the RX state																															
			RxDisable	4		RADIO is in the RXDISABLED state																															
			TxRu	9		RADIO is in the TXRU state																															
			TxIdle	10		RADIO is in the TXIDLE state																															
			Tx	11		RADIO is in the TX state																															
			TxDisable	12		RADIO is in the TXDISABLED state																															

## 22.14.26 DATAWHITEIV

Address offset: 0x554

Data whitening initial value

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A A A A A A A																														
Reset 0x00000040	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	DATAWHITEIV				Data whitening initial value. Bit 6 is hard-wired to '1', writing '0' to it has no effect, and it will always be read back and used by the device as '1'.  Bit 0 corresponds to Position 6 of the LSFR, Bit 1 to Position 5, etc.																									





Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	DAB					Device address base segment 4																													

### 22.14.33 DAB[5]

Address offset: 0x614

Device address base segment 5

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	DAB					Device address base segment 5																													

### 22.14.34 DAB[6]

Address offset: 0x618

Device address base segment 6

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																													
A	RW	DAB					Device address base segment 6																													

### 22.14.35 DAB[7]

Address offset: 0x61C

Device address base segment 7

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																													
A	RW	DAB					Device address base segment 7																													

### 22.14.36 DAP[0]

Address offset: 0x620

Device address prefix 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																															
A	RW	DAP					Device address prefix 0																															

### 22.14.37 DAP[1]

Address offset: 0x624

Device address prefix 1

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					A A																															

### 22.14.38 DAP[2]

Address offset: 0x628

Device address prefix 2

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	RW	DAP						Device address prefix 2																											

### 22.14.39 DAP[3]

Address offset: 0x62C

Device address prefix 3

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	DAP						Device address prefix 3																											

### 22.14.40 DAP[4]

Address offset: 0x630

Device address prefix 4

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	DAP						Device address prefix 4																											

### 22.14.41 DAP[5]

Address offset: 0x634

Device address prefix 5

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value								Description																							
A	RW	DAP										Device address prefix 5																							

### 22.14.42 DAP[6]

Address offset: 0x638

Device address prefix 6

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field																	Value Id														Description
A	RW	DAP																														Device address prefix 6	

### 22.14.43 DAP[7]

Address offset: 0x63C

Device address prefix 7

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value		Id	Value		Description																														
A	RW	DAP						Device address prefix 7																														

## 22.14.44 DACNF

Address offset: 0x640

Device address match configuration

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					P O N M L K J I H G F E D C B A																																	
Reset 0x00000000					0 0																																	
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ENA0				Enable or disable device address matching using device address 0																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
B	RW	ENA1				Enable or disable device address matching using device address 1																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
C	RW	ENA2				Enable or disable device address matching using device address 2																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
D	RW	ENA3				Enable or disable device address matching using device address 3																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
E	RW	ENA4				Enable or disable device address matching using device address 4																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
F	RW	ENA5				Enable or disable device address matching using device address 5																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
G	RW	ENA6				Enable or disable device address matching using device address 6																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
H	RW	ENA7				Enable or disable device address matching using device address 7																																
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
I	RW	TXADD0				TxAdd for device address 0																																
J	RW	TXADD1				TxAdd for device address 1																																
K	RW	TXADD2				TxAdd for device address 2																																
L	RW	TXADD3				TxAdd for device address 3																																
M	RW	TXADD4				TxAdd for device address 4																																
N	RW	TXADD5				TxAdd for device address 5																																
O	RW	TXADD6				TxAdd for device address 6																																
P	RW	TXADD7				TxAdd for device address 7																																

## 22.14.45 MHRMATCHCONF

Address offset: 0x644

## Search Pattern Configuration

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											

### 22.14.46 MHRMATCHMAS

Address offset: 0x648

Pattern mask

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value			Description																												

### 22.14.47 MODECNF0

Address offset: 0x650

Radio mode configuration register 0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												C		C					A
Reset 0x00000200				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	RU			Radio ramp-up time																														
			Default	0	Default ramp-up time (tRXEN), compatible with firmware written for nRF51																														
			Fast	1	Fast ramp-up (tRXEN,FAST), see electrical specification for more information																														
C	RW	DTX			Default TX value																														
					Specifies what the RADIO will transmit when it is not started, i.e. between:																														
					RADIO.EVENTS_READY and RADIO.TASKS_START																														
					RADIO.EVENTS_END and RADIO.TASKS_START																														
					RADIO.EVENTS_END and RADIO.EVENTS_DISABLED																														
			B1	0	Transmit '1'																														
			B0	1	Transmit '0'																														
			Center	2	Transmit center frequency																														
					When tuning the crystal for centre frequency, the RADIO must be set in DTX = Center mode to be able to achieve the expected accuracy.																														

### 22.14.48 SFD

Address offset: 0x660

IEEE 802.15.4 Start of Frame Delimiter

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A A A A				A A A A			
Reset 0x000000A7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	1	1	1
Id	RW	Field	Value Id	Value	Description																											
A	RW	SFD			IEEE 802.15.4 Start of Frame Delimiter																											

### 22.14.49 EDCNT

Address offset: 0x664

## IEEE 802.15.4 Energy Detect Loop Count

Number of iterations to perform an ED scan. If set to 0 one scan is performed, otherwise the specified number + 1 of ED scans will be performed and the max ED value tracked in EDSAMPLE

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	EDCNT						IEEE 802.15.4 Energy Detect Loop Count																											

## 22.14.50 EDSAMPLE

Address offset: 0x668

### IEEE 802.15.4 Energy Detect Level

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	EDLVL						IEEE 802.15.4 Energy Detect Level																											

## 22.14.51 CCACTRL

Address offset: 0x66C

### IEEE 802.15.4 Clear Channel Assessment Control

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B							A	A	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CCAMODE			CCA Mode Of Operation																																	
			EdMode	0	Energy Above Threshold																																	
					Will report busy whenever energy is detected above CCAEDTHRES																																	
			CarrierMode	1	Carrier Seen																																	
					Will report busy whenever compliant IEEE 802.15.4 signal is seen																																	
			CarrierAndEdMode	2	Energy Above Threshold AND Carrier Seen																																	
			CarrierOrEdMode	3	Energy Above Threshold OR Carrier Seen																																	
			EdModeTest1	4	Energy Above Threshold test mode that will abort when first ED measurement over threshold is seen. No averaging.																																	
B	RW	CCAEDTHRES			CCA Energy Busy Threshold. Used in all the CCA modes except CarrierMode.																																	
C	RW	CCACORRTHRES			CCA Correlator Busy Threshold. Only relevant to CarrierMode, CarrierAndEdMode and CarrierOrEdMode.																																	
D	RW	CCACORRCNT			Limit for occurrences above CCACORRTHRES. When not equal to zero the correlator based signal detect is enabled.																																	

## 22.14.52 POWER

Address offset: 0xFFC

Peripheral power control

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value	Description																															
A	RW	POWER				Peripheral power control. The peripheral and its registers will be reset to its initial state by switching the peripheral off and then back on again.																															
			Disabled	0		Peripheral is powered off																															
			Enabled	1		Peripheral is powered on																															

## 22.15 Electrical specification

### 22.15.1 General Radio Characteristics

Symbol	Description	Min.	Typ.	Max.	Units
$f_{OP}$	Operating frequencies	2360		2500	MHz
$f_{PLL,CH,SP}$	PLL channel spacing		1		MHz
$f_{DELTA,1M}$	Frequency deviation @ 1 Msps		±170		kHz
$f_{DELTA,BLE,1M}$	Frequency deviation @ BLE 1Msps		±250		kHz
$f_{DELTA,2M}$	Frequency deviation @ 2 Msps		±320		kHz
$f_{skSPS}$	On-the-air data rate	125		2000	ksps
$f_{chip, IEEE 802.15.4}$	Chip rate in IEEE 802.15.4 mode		2000		kchip/s

### 22.15.2 Radio current consumption (Transmitter)

Symbol	Description	Min.	Typ.	Max.	Units
$I_{TX,PLUS9dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = +9$ dBm		13.6		mA
$I_{TX,PLUS9dBm}$	TX only run current $P_{RF} = +9$ dBm		29.2		mA
$I_{TX,PLUS8dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = +8$ dBm		12.8		mA
$I_{TX,PLUS8dBm}$	TX only run current $P_{RF} = +8$ dBm		27.6		mA
$I_{TX,PLUS4dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = +4$ dBm		8.7		mA
$I_{TX,PLUS4dBm}$	TX only run current $P_{RF} = +4$ dBm		18.9		mA
$I_{TX,0dBm,DCDC,5V,REG0HI}$	TX only run current (DCDC, 5V, REG0 out = 3.3 V) $P_{RF} = 0$ dBm		6.0		mA
$I_{TX,0dBm,DCDC,5V,REG0LO}$	TX only run current (DCDC, 5V, REG0 out = 1.8 V) $P_{RF} = 0$ dBm		5.2		mA
$I_{TX,0dBm,DCDC}$	TX only run current (DCDC, 3V) $P_{RF} = 0$ dBm		5.3		mA
$I_{TX,0dBm}$	TX only run current $P_{RF} = 0$ dBm		11.6		mA
$I_{TX,MINUS4dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -4$ dBm		3.4		mA
$I_{TX,MINUS4dBm}$	TX only run current $P_{RF} = -4$ dBm		7.3		mA
$I_{TX,MINUS8dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -8$ dBm		3.0		mA
$I_{TX,MINUS8dBm}$	TX only run current $P_{RF} = -8$ dBm		6.4		mA
$I_{TX,MINUS12dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -12$ dBm		2.7		mA
$I_{TX,MINUS12dBm}$	TX only run current $P_{RF} = -12$ dBm		5.7		mA
$I_{TX,MINUS16dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -16$ dBm		2.5		mA
$I_{TX,MINUS16dBm}$	TX only run current $P_{RF} = -16$ dBm		5.3		mA
$I_{TX,MINUS20dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -20$ dBm		2.3		mA
$I_{TX,MINUS20dBm}$	TX only run current $P_{RF} = -20$ dBm		5.0		mA
$I_{TX,MINUS40dBm,DCDC}$	TX only run current DCDC, 3V $P_{RF} = -40$ dBm		2.0		mA
$I_{TX,MINUS40dBm}$	TX only run current $P_{RF} = -40$ dBm		4.0		mA
$I_{START,TX,DCDC}$	TX start-up current DCDC, 3V, $P_{RF} = 4$ dBm		5.2		mA
$I_{START,TX}$	TX start-up current, $P_{RF} = 4$ dBm		11.0		mA
$I_{0dBm} (DCDC, 3V)$	TX current (DCDC 3V) 1Msps BLE measured from VBAT with $P_{RF}=0$ dBm		6.4		mA
$I_{2dBm} (DCDC, 3V)$	TX current (DCDC 3V) 1Msps BLE measured from VBAT with $P_{RF}=2$ dBm		8.9		mA
$I_{4dBm} (DCDC, 3V)$	TX current (DCDC 3V) 1Msps BLE measured from VBAT with $P_{RF}=4$ dBm		10.6		mA

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>9dBm</sub> (DCDC, 3V)	TX current (DCDC 3V) 1Msps BLE measured from VBAT with P <sub>RF</sub> =9dBm		15.5		mA
I <sub>0dBm</sub> (3V)	TX current (3V) 1Msps BLE measured from VBAT with P <sub>RF</sub> =0dBm		11.2		mA
I <sub>9dBm</sub> (3V)	TX current (3V) 1Msps BLE measured from VBAT with P <sub>RF</sub> =9dBm		30.7		mA

### 22.15.3 Radio current consumption (Receiver)

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RX,1M,DCDC</sub>	RX only run current (DCDC, 3V) 1Msps / 1Msps BLE		5.4		mA
I <sub>RX,1M</sub>	RX only run current (LDO, 3V) 1Msps / 1Msps BLE		11.7		mA
I <sub>RX,2M,DCDC</sub>	RX only run current (DCDC, 3V) 2Msps / 2Msps BLE		5.4		mA
I <sub>RX,2M</sub>	RX only run current (LDO, 3V) 2Msps / 2Msps BLE		12.9		mA
I <sub>START,RX,1M,DCDC</sub>	RX start-up current (DCDC 3V) 1Msps / 1Msps BLE		3.7		mA
I <sub>START,RX,1M</sub>	RX start-up current 1Msps / 1Msps BLE		6.7		mA

### 22.15.4 Transmitter specification

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>RF</sub>	Maximum output power		8 <sup>11</sup>		dBm
P <sub>RFC</sub>	RF power control range		28		dB
P <sub>RFCR</sub>	RF power accuracy			±4	dB
P <sub>RF1,1</sub>	1st Adjacent Channel Transmit Power 1 MHz (1 Msps)		-23		dBc
P <sub>RF2,1</sub>	2nd Adjacent Channel Transmit Power 2 MHz (1 Msps)		-50		dBc
P <sub>RF1,2</sub>	1st Adjacent Channel Transmit Power 2 MHz (2 Msps)		-24		dBc
P <sub>RF2,2</sub>	2nd Adjacent Channel Transmit Power 4 MHz (2 Msps)		-50		dBc
E <sub>vm</sub>	Error Vector Magnitude IEEE 802.15.4				%rms
P <sub>harm2nd</sub> , IEEE 802.15.4	2nd Harmonics in IEEE 802.15.4 mode				dBm
P <sub>harm3rd</sub> , IEEE 802.15.4	3rd Harmonics in IEEE 802.15.4				dBm

### 22.15.5 Receiver operation

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>RX,MAX</sub>	Maximum received signal strength at < 0.1% PER		0		dBm
P <sub>SENS,IT,1M</sub>	Sensitivity, 1Msps nRF mode <sup>12</sup>		-93		dBm
P <sub>SENS,IT,SP,1M,BLE</sub>	Sensitivity, 1Msps BLE ideal transmitter, <=37 bytes BER=1E-3 <sup>13</sup>		-96		dBm
P <sub>SENS,IT,LP,1M,BLE</sub>	Sensitivity, 1Msps BLE ideal transmitter >=128 bytes BER=1E-4 <sup>14</sup>		-95		dBm
P <sub>SENS,IT,2M</sub>	Sensitivity, 2Msps nRF mode <sup>15</sup>		-89		dBm
P <sub>SENS,IT,SP,2M,BLE</sub>	Sensitivity, 2Msps BLE ideal transmitter, Packet length <=37bytes		-92		dBm
P <sub>SENS,IT,BLE 1E125k</sub>	Sensitivity, 125ksps BLE mode		-103		dBm
P <sub>SENS,IT,BLE 1E500k</sub>	Sensitivity, 500ksps BLE mode		-99		dBm
P <sub>sense</sub> , IEEE 802.15.4	Sensitivity in IEEE 802.15.4 mode		-100		dBm

### 22.15.6 RX selectivity

RX selectivity with equal modulation on interfering signal<sup>16</sup>

<sup>11</sup> Maximum output power is obtained by using Pos9dBm setting in TXPOWER register.

<sup>12</sup> Typical sensitivity applies when ADDR0 is used for receiver address correlation. When ADDR[1...7] are used for receiver address correlation, the typical sensitivity for this mode is degraded by 3dB.

<sup>13</sup> As defined in the Bluetooth Core Specification v4.0 Volume 6: Core System Package (Low Energy Controller Volume)

<sup>14</sup> Equivalent BER limit < 10E-04

<sup>15</sup> Typical sensitivity applies when ADDR0 is used for receiver address correlation. When ADDR[1...7] are used for receiver address correlation, the typical sensitivity for this mode is degraded by 3dB.

<sup>16</sup> Wanted signal level at PIN = -67 dBm. One interferer is used, having equal modulation as the wanted signal. The input power of the interferer where the sensitivity equals BER = 0.1% is presented

Symbol	Description	Min.	Typ.	Max.	Units
C/I <sub>1M,co-channel</sub>	1Msps mode, Co-Channel interference		9		dB
C/I <sub>1M,-1MHz</sub>	1 Msps mode, Adjacent (-1 MHz) interference		-2		dB
C/I <sub>1M,+1MHz</sub>	1 Msps mode, Adjacent (+1 MHz) interference		-10		dB
C/I <sub>1M,-2MHz</sub>	1 Msps mode, Adjacent (-2 MHz) interference		-19		dB
C/I <sub>1M,+2MHz</sub>	1 Msps mode, Adjacent (+2 MHz) interference		-42		dB
C/I <sub>1M,-3MHz</sub>	1 Msps mode, Adjacent (-3 MHz) interference		-38		dB
C/I <sub>1M,+3MHz</sub>	1 Msps mode, Adjacent (+3 MHz) interference		-48		dB
C/I <sub>1M,±6MHz</sub>	1 Msps mode, Adjacent (≥6 MHz) interference		-50		dB
C/I <sub>1MBLE,co-channel</sub>	1 Msps BLE mode, Co-Channel interference		6		dB
C/I <sub>1MBLE,-1MHz</sub>	1 Msps BLE mode, Adjacent (-1 MHz) interference		-2		dB
C/I <sub>1MBLE,+1MHz</sub>	1 Msps BLE mode, Adjacent (+1 MHz) interference		-9		dB
C/I <sub>1MBLE,-2MHz</sub>	1 Msps BLE mode, Adjacent (-2 MHz) interference		-22		dB
C/I <sub>1MBLE,+2MHz</sub>	1 Msps BLE mode, Adjacent (+2 MHz) interference		-46		dB
C/I <sub>1MBLE,≥3MHz</sub>	1 Msps BLE mode, Adjacent (≥3 MHz) interference		-50		dB
C/I <sub>1MBLE,image</sub>	Image frequency Interference		-22		dB
C/I <sub>1MBLE,image,1MHz</sub>	Adjacent (1 MHz) interference to in-band image frequency		-35		dB
C/I <sub>2M,co-channel</sub>	2Msps mode, Co-Channel interference		10		dB
C/I <sub>2M,-2MHz</sub>	2 Msps mode, Adjacent (-2 MHz) interference		6		dB
C/I <sub>2M,+2MHz</sub>	2 Msps mode, Adjacent (+2 MHz) interference		-19		dB
C/I <sub>2M,-4MHz</sub>	2 Msps mode, Adjacent (-4 MHz) interference		-20		dB
C/I <sub>2M,+4MHz</sub>	2 Msps mode, Adjacent (+4 MHz) interference		-44		dB
C/I <sub>2M,-6MHz</sub>	2 Msps mode, Adjacent (-6 MHz) interference		-42		dB
C/I <sub>2M,+6MHz</sub>	2 Msps mode, Adjacent (+6 MHz) interference		-42		dB
C/I <sub>2M,≥12MHz</sub>	2 Msps mode, Adjacent (≥12 MHz) interference		-52		dB
C/I <sub>125k BLE LR,co-channel</sub>	125 ksps BLE LR mode, Co-Channel interference				dB
C/I <sub>125k BLE LR,-1MHz</sub>	125 ksps BLE LR mode, Adjacent (-1 MHz) interference				dB
C/I <sub>125k BLE LR,+1MHz</sub>	125 ksps BLE LR mode, Adjacent (+1 MHz) interference				dB
C/I <sub>125k BLE LR,-2MHz</sub>	125 ksps BLE LR mode, Adjacent (-2 MHz) interference				dB
C/I <sub>125k BLE LR,+2MHz</sub>	125 ksps BLE LR mode, Adjacent (+2 MHz) interference				dB
C/I <sub>125k BLE LR,≥3MHz</sub>	125 ksps BLE LR mode, Adjacent (≥3 MHz) interference				dB
C/I <sub>125k BLE LR,image</sub>	Image frequency Interference				dB
C/I <sub>500k BLE LR,co-channel</sub>	500 ksps BLE LR mode, Co-Channel interference				dB
C/I <sub>500k BLE LR,-1MHz</sub>	500 ksps BLE LR mode, Adjacent (-1 MHz) interference				dB
C/I <sub>500k BLE LR,+1MHz</sub>	500 ksps BLE LR mode, Adjacent (+1 MHz) interference				dB
C/I <sub>500k BLE LR,-2MHz</sub>	500 ksps BLE LR mode, Adjacent (-2 MHz) interference				dB
C/I <sub>500k BLE LR,+2MHz</sub>	500 ksps BLE LR mode, Adjacent (+2 MHz) interference				dB
C/I <sub>500k BLE LR,≥3MHz</sub>	500 ksps BLE LR mode, Adjacent (≥3 MHz) interference				dB
C/I <sub>500k BLE LR,image</sub>	Image frequency Interference				dB

## 22.15.7 RX intermodulation

### RX intermodulation<sup>17</sup>

Symbol	Description	Min.	Typ.	Max.	Units
P <sub>IMD,1M</sub>	IMD performance, 1 Msps, 3rd, 4th, and 5th offset channel		-29		dBm
P <sub>IMD,1M,BLE</sub>	IMD performance, BLE 1 Msps, 3rd, 4th, and 5th offset channel		-30		dBm
P <sub>IMD,2M</sub>	IMD performance, 2 Msps, 3rd, 4th, and 5th offset channel		-30		dBm

## 22.15.8 Radio timing

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TXEN</sub>	Time between TXEN task and READY event after channel FREQUENCY configured		140		us
t <sub>TXEN,FAST</sub>	Time between TXEN task and READY event after channel FREQUENCY configured (Fast Mode)		40		us

<sup>17</sup> Wanted signal level at PIN = -64 dBm. Two interferers with equal input power are used. The interferer closest in frequency is not modulated, the other interferer is modulated equal with the wanted signal. The input power of the interferers where the sensitivity equals BER = 0.1% is presented.



Symbol	Description	Min.	Typ.	Max.	Units
$t_{TXDISABLE}$	Time between DISABLE task and DISABLED event when the radio was in TX and mode is set to 1Msps		6		us
$t_{TXDISABLE,2M}$	Time between DISABLE task and DISABLED event when the radio was in TX and mode is set to 2Msps	..	..	..	us
$t_{RXEN}$	Time between the RXEN task and READY event after channel FREQUENCY configured in default mode		140		us
$t_{RXEN,FAST}$	Time between the RXEN task and READY event after channel FREQUENCY configured in fast mode		40		us
$t_{RXDISABLE}$	Time between DISABLE task and DISABLED event when the radio was in RX		0		us
$t_{TXCHAIN}$	TX chain delay		0.6		us
$t_{RXCHAIN}$	RX chain delay		9.4		us
$t_{RXCHAIN,2M}$	RX chain delay in 2Msps mode		5		us
$t_{RXCHAIN,LR\ 125k}$	RX chain delay in BLE LR125kps mode	..	..	..	us
$t_{RXCHAIN,LR\ 500k}$	RX chain delay in BLE LR500kps mode	..	..	..	us
$t_{RX-to-TX\ turnaround}$	Maximum TX-to-RX or RX-to-TX turnaround time in IEEE 802.15.4 mode	..	..	..	us

## 22.15.9 Received Signal Strength Indicator (RSSI) specifications

Symbol	Description	Min.	Typ.	Max.	Units
$RSSI_{ACC}$	RSSI Accuracy Valid range -90 to -20 dBm		-2		dB
$RSSI_{RESOLUTION}$	RSSI resolution		1		dB
$RSSI_{PERIOD}$	Sample period		8		us
$RSSI_{min, IEEE\ 802.15.4}$	Minimum RSSI sensitivity in 802.15.4 mode				dBm

## 22.15.10 Jitter


Symbol	Description	Min.	Typ.	Max.	Units
$t_{DISABLEDJITTER}$	Jitter on DISABLED event relative to END event when shortcut between END and DISABLE is enabled.		0.25		us
$t_{READYJITTER}$	Jitter on READY event relative to TXEN and RXEN task.		0.25		us

## 22.15.11 Delay when disabling the RADIO

Symbol	Description	Min.	Typ.	Max.	Units
$t_{TXDISABLE,1M}$	Disable delay from TX.  Delay between DISABLE and DISABLED for MODE = Nrf_1Mbit and MODE = Ble_1Mbit		6		us
$t_{RXDISABLE,1M}$	Disable delay from RX.  Delay between DISABLE and DISABLED for MODE = Nrf_1Mbit and MODE = Ble_1Mbit		0		us

## 23 TIMER — Timer/counter

The TIMER can operate in two modes: timer and counter.

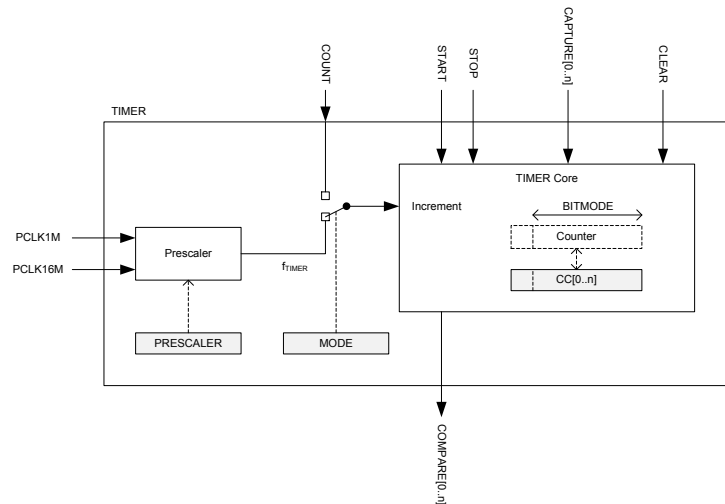

**Figure 50: Block schematic for timer/counter**

The timer/counter runs on the high-frequency clock source (HFCLK) and includes a four-bit (1/2X) prescaler that can divide the timer input clock from the HFCLK controller. Clock source selection between PCLK16M and PCLK1M is automatic according to TIMER base frequency set by the prescaler. The TIMER base frequency is always given as 16 MHz divided by the prescaler value.

The PPI system allows a TIMER event to trigger a task of any other system peripheral of the device. The PPI system also enables the TIMER task/event features to generate periodic output and PWM signals to any GPIO. The number of input/outputs used at the same time is limited by the number of GPIOTE channels.

The TIMER can operate in two modes, Timer mode and Counter mode. In both modes, the TIMER is started by triggering the START task, and stopped by triggering the STOP task. After the timer is stopped the timer can resume timing/counting by triggering the START task again. When timing/counting is resumed, the timer will continue from the value it had prior to being stopped.

The status (Started or Stopped) of each TIMER instance can be checked by reading its STATUS register.

In Timer mode, the TIMER's internal Counter register is incremented by one for every tick of the timer frequency  $f_{\text{TIMER}}$  as illustrated in [Figure 50: Block schematic for timer/counter](#) on page 290. The timer frequency is derived from PCLK16M as shown below, using the values specified in the PRESCALER register:

$$f_{\text{TIMER}} = 16 \text{ MHz} / (2^{\text{PRESCALER}})$$

When  $f_{\text{TIMER}} \leq 1 \text{ MHz}$  the TIMER will use PCLK1M instead of PCLK16M for reduced power consumption.

In counter mode, the TIMER's internal Counter register is incremented by one each time the COUNT task is triggered, that is, the timer frequency and the prescaler are not utilized in counter mode. Similarly, the COUNT task has no effect in Timer mode.

The TIMER's maximum value is configured by changing the bit-width of the timer in the [BITMODE](#) on page 295 register.

[PRESCALER](#) on page 296 and the [BITMODE](#) on page 295 must only be updated when the timer is stopped. If these registers are updated while the TIMER is started then this may result in unpredictable behavior.

When the timer is incremented beyond its maximum value the Counter register will overflow and the TIMER will automatically start over from zero.

The Counter register can be cleared, that is, its internal value set to zero explicitly, by triggering the CLEAR task.

The TIMER implements multiple capture/compare registers.

Independent of prescaler setting the accuracy of the TIMER is equivalent to one tick of the timer frequency  $f_{\text{TIMER}}$  as illustrated in [Figure 50: Block schematic for timer/counter](#) on page 290.

## 23.1 Capture

The TIMER implements one capture task for every available capture/compare register.

Every time the CAPTURE[n] task is triggered, the Counter value is copied to the CC[n] register.

## 23.2 Compare

The TIMER implements one COMPARE event for every available capture/compare register.

A COMPARE event is generated when the Counter is incremented and then becomes equal to the value specified in one of the capture compare registers. When the Counter value becomes equal to the value specified in a capture compare register CC[n], the corresponding compare event COMPARE[n] is generated.

[BITMODE](#) on page 295 specifies how many bits of the Counter register and the capture/compare register that are used when the comparison is performed. Other bits will be ignored.

## 23.3 Task delays

After the TIMER is started, the CLEAR task, COUNT task and the STOP task will guarantee to take effect within one clock cycle of the PCLK16M.

## 23.4 Task priority

If the START task and the STOP task are triggered at the same time, that is, within the same period of PCLK16M, the STOP task will be prioritized.

## 23.5 Registers

**Table 36: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40008000	TIMER	TIMER0	Timer 0	This timer instance has 4 CC registers (CC[0..3])
0x40009000	TIMER	TIMER1	Timer 1	This timer instance has 4 CC registers (CC[0..3])
0x4000A000	TIMER	TIMER2	Timer 2	This timer instance has 4 CC registers (CC[0..3])
0x4001A000	TIMER	TIMER3	Timer 3	This timer instance has 6 CC registers (CC[0..5])
0x4001B000	TIMER	TIMER4	Timer 4	This timer instance has 6 CC registers (CC[0..5])

Register	Offset	Description	
TASKS_START	0x000	Start Timer	
TASKS_STOP	0x004	Stop Timer	
TASKS_COUNT	0x008	Increment Timer (Counter mode only)	
TASKS_CLEAR	0x00C	Clear time	
TASKS_SHUTDOWN	0x010	Shut down timer	Deprecated
TASKS_CAPTURE[0]	0x040	Capture Timer value to CC[0] register	
TASKS_CAPTURE[1]	0x044	Capture Timer value to CC[1] register	
TASKS_CAPTURE[2]	0x048	Capture Timer value to CC[2] register	
TASKS_CAPTURE[3]	0x04C	Capture Timer value to CC[3] register	
TASKS_CAPTURE[4]	0x050	Capture Timer value to CC[4] register	
TASKS_CAPTURE[5]	0x054	Capture Timer value to CC[5] register	
EVENTS_COMPARE[0]	0x140	Compare event on CC[0] match	
EVENTS_COMPARE[1]	0x144	Compare event on CC[1] match	
EVENTS_COMPARE[2]	0x148	Compare event on CC[2] match	
EVENTS_COMPARE[3]	0x14C	Compare event on CC[3] match	
EVENTS_COMPARE[4]	0x150	Compare event on CC[4] match	
EVENTS_COMPARE[5]	0x154	Compare event on CC[5] match	
SHORTS	0x200	Shortcut register	
INTENSET	0x304	Enable interrupt	
INTENCLR	0x308	Disable interrupt	
STATUS	0x400	Timer status	
MODE	0x504	Timer mode selection	
BITMODE	0x508	Configure the number of bits used by the TIMER	
PRESCALER	0x510	Timer prescaler register	
CC[0]	0x540	Capture/Compare register 0	
CC[1]	0x544	Capture/Compare register 1	
CC[2]	0x548	Capture/Compare register 2	
CC[3]	0x54C	Capture/Compare register 3	
CC[4]	0x550	Capture/Compare register 4	
CC[5]	0x554	Capture/Compare register 5	

Address offset: 0x200

## Shortcut register

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																									L	K	J	I	H	G			F	E	D	C	B	A
Reset 0x00000000						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																
A	RW	COMPARE0_CLEAR				Shortcut between COMPARE[0] event and CLEAR task																																
						See <a href="#">EVENTS_COMPARE[0]</a> and <a href="#">TASKS_CLEAR</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
B	RW	COMPARE1_CLEAR				Shortcut between COMPARE[1] event and CLEAR task																																
						See <a href="#">EVENTS_COMPARE[1]</a> and <a href="#">TASKS_CLEAR</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
C	RW	COMPARE2_CLEAR				Shortcut between COMPARE[2] event and CLEAR task																																
						See <a href="#">EVENTS_COMPARE[2]</a> and <a href="#">TASKS_CLEAR</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
D	RW	COMPARE3_CLEAR				Shortcut between COMPARE[3] event and CLEAR task																																
						See <a href="#">EVENTS_COMPARE[3]</a> and <a href="#">TASKS_CLEAR</a>																																
			Disabled		0	Disable shortcut																																

Page 293

<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>
C	RW	COMPARE2		Disabled	Read: Disabled
				Enabled	Read: Enabled
			Write '1' to Enable interrupt for COMPARE[2] event		
			See <a href="#">EVENTS_COMPARE[2]</a>		
				Set	Enable
D	RW	COMPARE3		Disabled	Read: Disabled
				Enabled	Read: Enabled
			Write '1' to Enable interrupt for COMPARE[3] event		
			See <a href="#">EVENTS_COMPARE[3]</a>		
				Set	Enable
E	RW	COMPARE4		Disabled	Read: Disabled
				Enabled	Read: Enabled
			Write '1' to Enable interrupt for COMPARE[4] event		
			See <a href="#">EVENTS_COMPARE[4]</a>		
				Set	Enable
F	RW	COMPARE5		Disabled	Read: Disabled
				Enabled	Read: Enabled
			Write '1' to Enable interrupt for COMPARE[5] event		
			See <a href="#">EVENTS_COMPARE[5]</a>		
				Set	Enable

Address offset: 0x308

Bit number

<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>
A	RW	COMPARE0			Write '1' to Disable interrupt for COMPARE[0] event  See <a href="#">EVENTS_COMPARE[0]</a>  Clear 1 Disable Disabled 0 Read: Disabled Enabled 1 Read: Enabled
B	RW	COMPARE1			Write '1' to Disable interrupt for COMPARE[1] event  See <a href="#">EVENTS_COMPARE[1]</a>  Clear 1 Disable Disabled 0 Read: Disabled Enabled 1 Read: Enabled
C	RW	COMPARE2			Write '1' to Disable interrupt for COMPARE[2] event  See <a href="#">EVENTS_COMPARE[2]</a>  Clear 1 Disable Disabled 0 Read: Disabled Enabled 1 Read: Enabled
D	RW	COMPARE3			Write '1' to Disable interrupt for COMPARE[3] event  See <a href="#">EVENTS_COMPARE[3]</a>  Clear 1 Disable Disabled 0 Read: Disabled Enabled 1 Read: Enabled







Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	RW	CC							Capture/Compare value																											
					Only the number of bits indicated by BITMODE will be used by the TIMER.																															

### 23.5.12 CC[4]

Address offset: 0x550

Capture/Compare register 4

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	RW	CC							Capture/Compare value																											
					Only the number of bits indicated by BITMODE will be used by the TIMER.																															

### 23.5.13 CC[5]

Address offset: 0x554

Capture/Compare register 5

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	RW	CC							Capture/Compare value																											
					Only the number of bits indicated by BITMODE will be used by the TIMER.																															


## 23.6 Electrical specification

### 23.6.1 Timers Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>TIMER_1M</sub>	Run current with 1 MHz clock input (PCLK1M)	3	5	8	μA
I <sub>TIMER_16M</sub>	Run current with 16 MHz clock input (PCLK16M)	50	70	120	μA
t <sub>TIMER,START</sub>	Time from START task is given until timer starts counting		0.25		μs

## 24 RTC — Real-time counter

The Real-time counter (RTC) module provides a generic, low power timer on the low-frequency clock source (LFCLK).

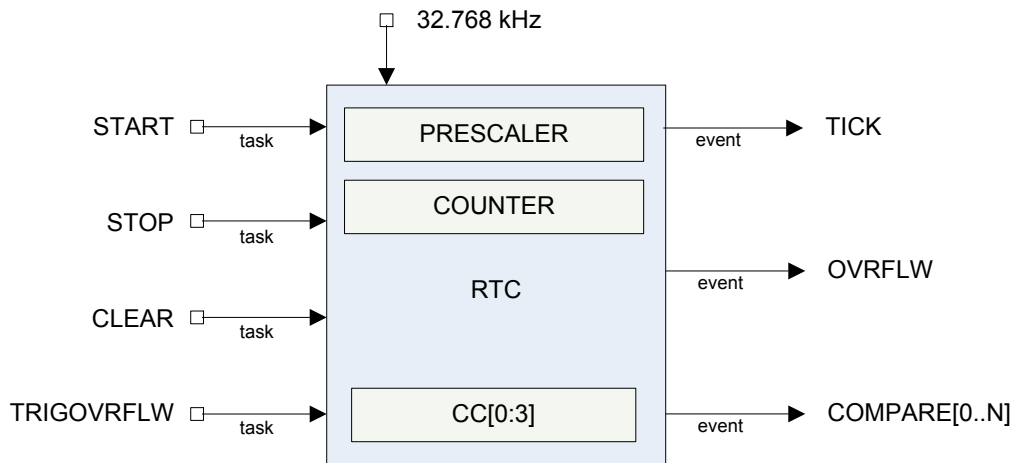

**Figure 51: RTC block schematic**

The RTC module features a 24-bit COUNTER, a 12-bit (1/X) prescaler, capture/compare registers, and a tick event generator for low power, tickless RTOS implementation.

### 24.1 Clock source

The RTC will run off the LFCLK.

The COUNTER resolution will therefore be 30.517  $\mu$ s. Depending on the source, the RTC is able to run while the HFCLK is OFF and PCLK16M is not available.

The software has to explicitly start LFCLK before using the RTC.

See [CLOCK — Clock control](#) on page 142 for more information about clock sources.

### 24.2 Resolution versus overflow and the PRESCALER

Counter increment frequency:

$$f_{\text{RTC}} [\text{kHz}] = 32.768 / (\text{PRESCALER} + 1)$$

The PRESCALER register is read/write when the RTC is stopped. The PRESCALER register is read-only once the RTC is STARTed. Writing to the PRESCALER register when the RTC is started has no effect.

The PRESCALER is restarted on START, CLEAR and TRIGOVFLW, that is, the prescaler value is latched to an internal register (<<PRESC>>) on these tasks.

Examples:

1. Desired COUNTER frequency 100 Hz (10 ms counter period)

$$\text{PRESCALER} = \text{round}(32.768 \text{ kHz} / 100 \text{ Hz}) - 1 = 327$$

$$f_{\text{RTC}} = 99.9 \text{ Hz}$$

10009.576  $\mu$ s counter period

- Desired COUNTER frequency 8 Hz (125 ms counter period)

PRESALER =  $\text{round}(32.768 \text{ kHz} / 8 \text{ Hz}) - 1 = 4095$

$f_{\text{RTC}} = 8 \text{ Hz}$


125 ms counter period

**Table 38: RTC resolution versus overflow**


Prescaler	Counter resolution	Overflow
0	30.517 $\mu$ s	512 seconds
$2^8 - 1$	7812.5 $\mu$ s	131072 seconds
$2^{12} - 1$	125 ms	582.542 hours

## 24.3 COUNTER register

The COUNTER increments on LFCLK when the internal PRESCALER register (<<PRESC>>) is 0x00. <<PRESC>> is reloaded from the PRESCALER register. If enabled, the TICK event occurs on each increment of the COUNTER. The TICK event is disabled by default.

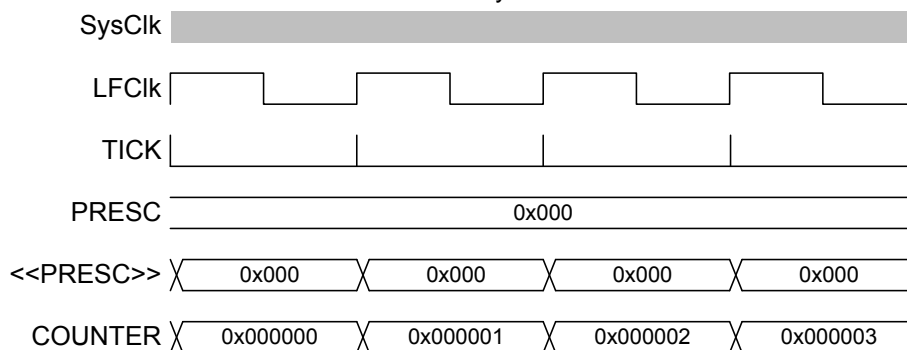

**Figure 52: Timing diagram - COUNTER\_PRESCALER\_0**

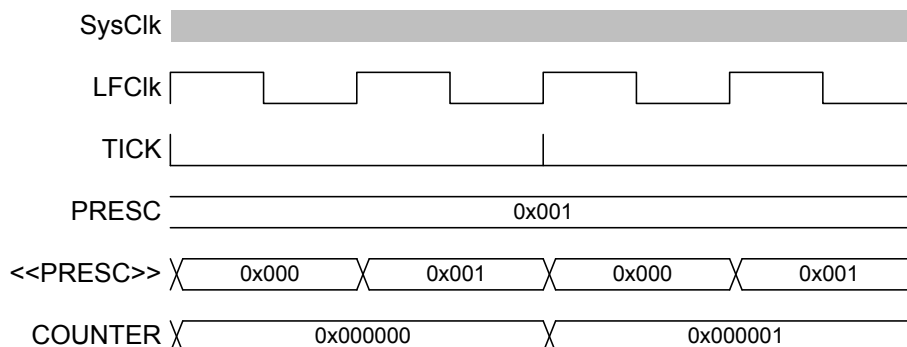

**Figure 53: Timing diagram - COUNTER\_PRESCALER\_1**

## 24.4 Overflow features

The TRIGOVFLW task sets the COUNTER value to 0xFFFFF0 to allow SW test of the overflow condition. OVRFLW occurs when COUNTER overflows from 0xFFFFF to 0.

**Important:** The OVRFLW event is disabled by default.

## 24.5 TICK event

The TICK event enables low power "tick-less" RTOS implementation as it optionally provides a regular interrupt source for a RTOS without the need to use the ARM® SysTick feature.

Using the RTC TICK event rather than the SysTick allows the CPU to be powered down while still keeping RTOS scheduling active.


**Important:** The TICK event is disabled by default.

## 24.6 Event control feature

To optimize RTC power consumption, events in the RTC can be individually disabled to prevent PCLK16M and HFCLK being requested when those events are triggered. This is managed using the EVTEN register.

For example, if the TICK event is not required for an application, this event should be disabled as it is frequently occurring and may increase power consumption if HFCLK otherwise could be powered down for long durations.

This means that the RTC implements a slightly different task and event system compared to the standard system described in [Peripheral interface](#) on page 58. The RTC task and event system is illustrated in [Figure 54: Tasks, events and interrupts in the RTC](#) on page 300.

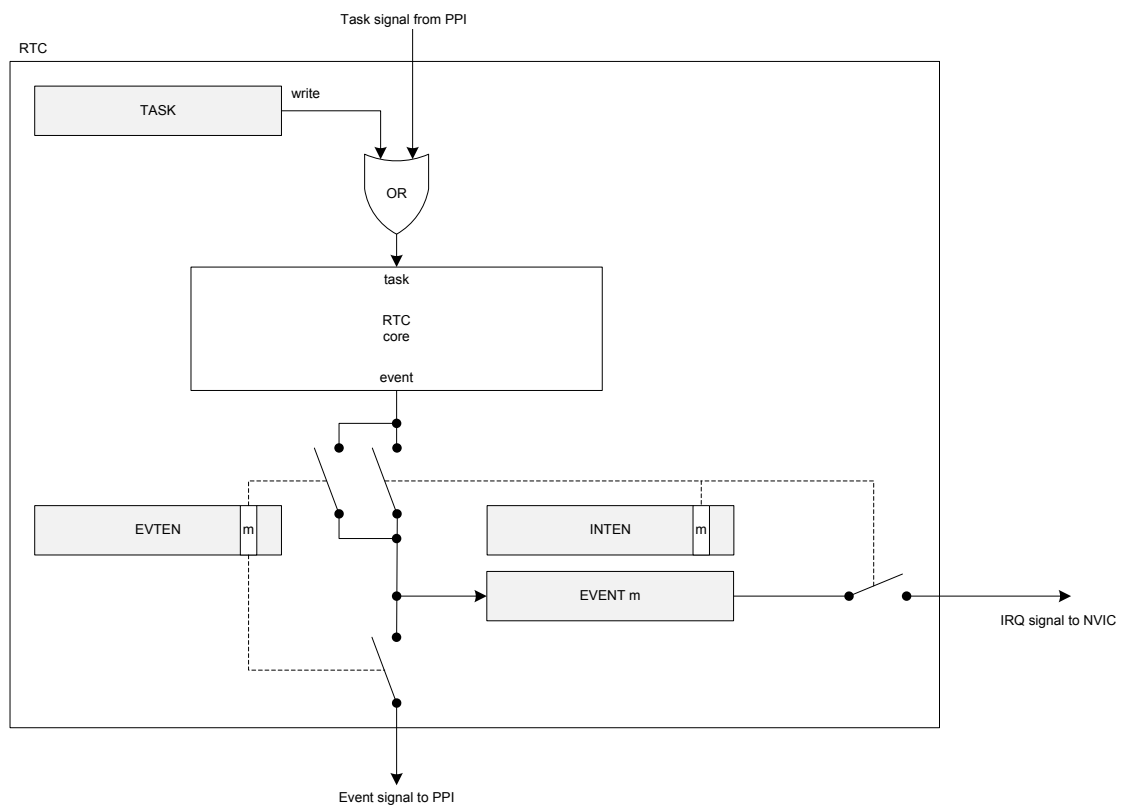

**Figure 54: Tasks, events and interrupts in the RTC**


## 24.7 Compare feature

There are a number of Compare registers.

For more information, see [Registers](#) on page 304.


When setting a compare register, the following behavior of the RTC compare event should be noted:

- If a CC register value is 0 when a CLEAR task is set, this will not trigger a COMPARE event.

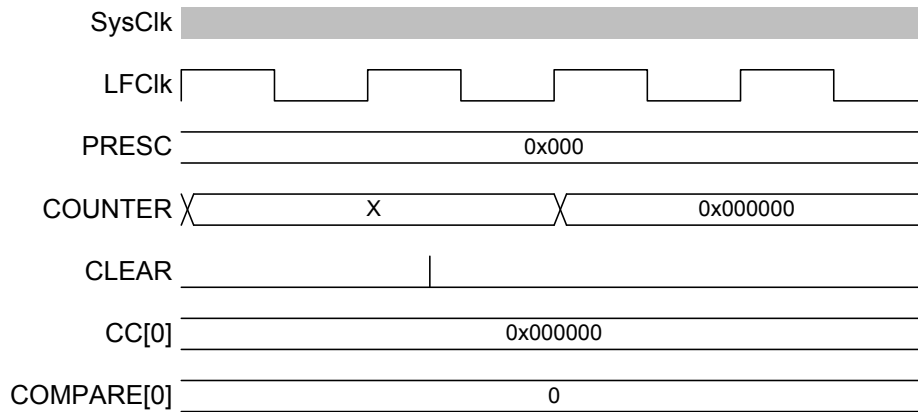


**Figure 55: Timing diagram - COMPARE\_CLEAR**

- If a CC register is N and the COUNTER value is N when the START task is set, this will not trigger a COMPARE event.

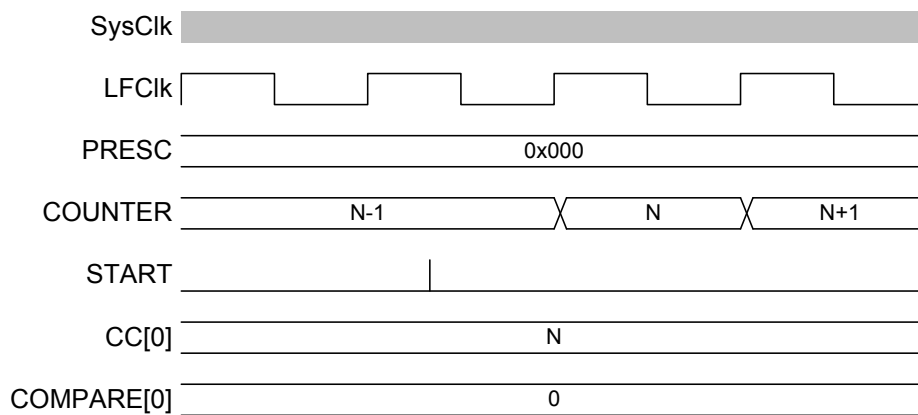


**Figure 56: Timing diagram - COMPARE\_START**

- COMPARE occurs when a CC register is N and the COUNTER value transitions from N-1 to N.

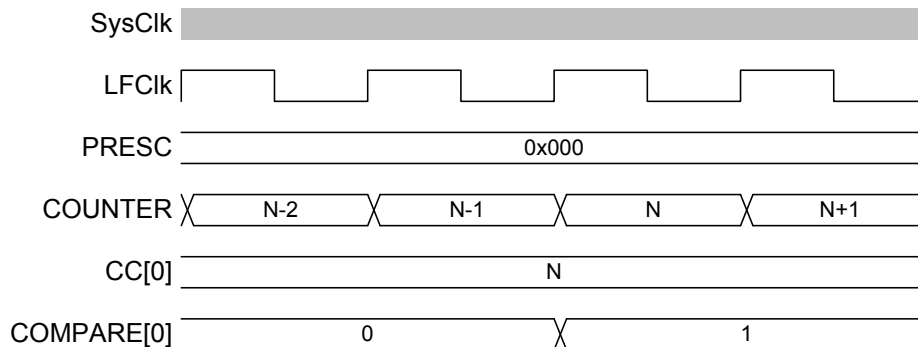


**Figure 57: Timing diagram - COMPARE**

- If the COUNTER is N, writing N+2 to a CC register is guaranteed to trigger a COMPARE event at N+2.

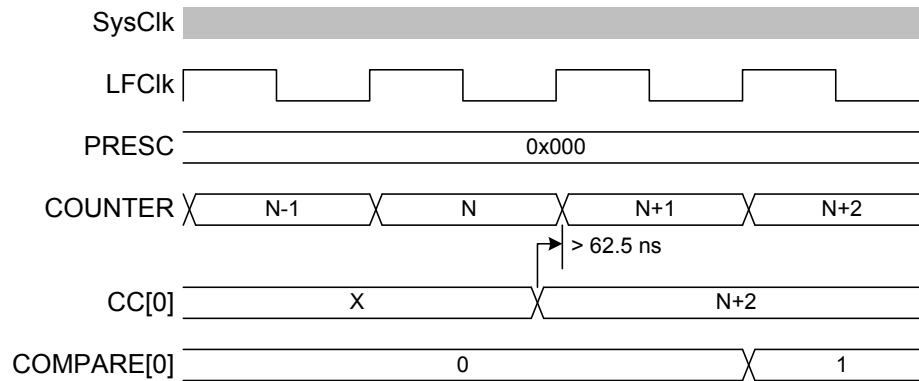


**Figure 58: Timing diagram - COMPARE\_N+2**

- If the COUNTER is N, writing N or N+1 to a CC register may not trigger a COMPARE event.

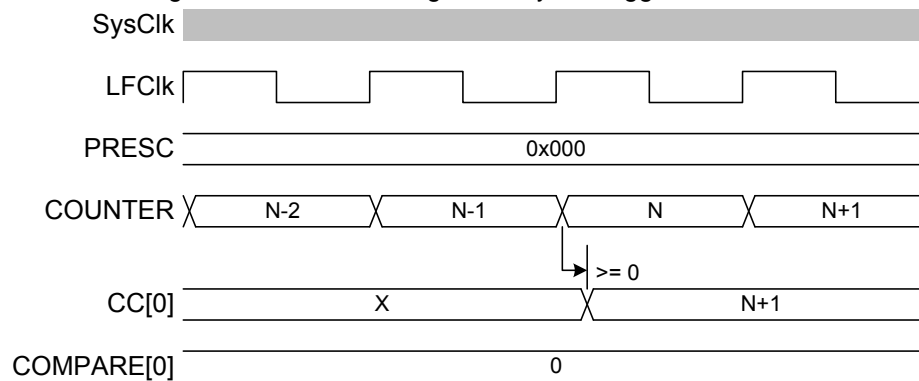

**Figure 59: Timing diagram - COMPARE\_N+1**

- If the COUNTER is N and the current CC register value is N+1 or N+2 when a new CC value is written, a match may trigger on the previous CC value before the new value takes effect. If the current CC value greater than N+2 when the new value is written, there will be no event due to the old value.

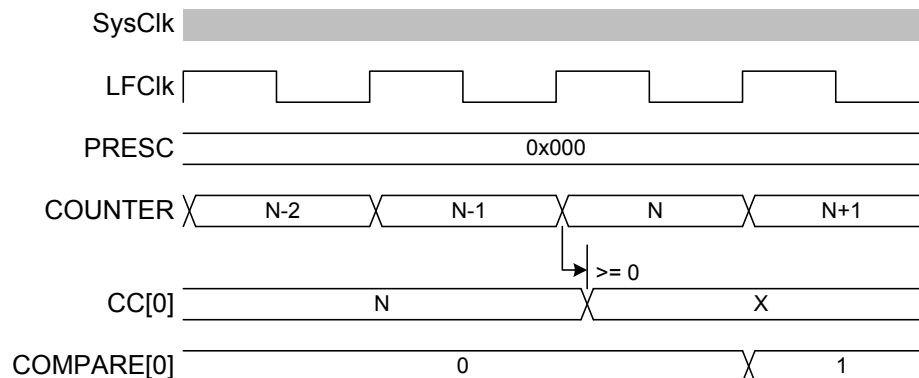

**Figure 60: Timing diagram - COMPARE\_N-1**

## 24.8 TASK and EVENT jitter/delay

Jitter or delay in the RTC is due to the peripheral clock being a low frequency clock (LFCLK) which is not synchronous to the faster PCLK16M.

Registers in the peripheral interface, part of the PCLK16M domain, have a set of mirrored registers in the LFCLK domain. For example, the COUNTER value accessible from the CPU is in the PCLK16M domain and is latched on read from an internal register called COUNTER in the LFCLK domain. COUNTER is the register which is actually modified each time the RTC ticks. These registers must be synchronised between clock domains (PCLK16M and LFCLK).

The following is a summary of the jitter introduced on tasks and events. Figures illustrating jitter follow.



**Table 39: RTC jitter magnitudes on tasks**

Task	Delay
CLEAR, STOP, START, TRIGOVRFLOW	+15 to 46 $\mu$ s

**Table 40: RTC jitter magnitudes on events**

Operation/Function	Jitter
START to COUNTER increment	+/- 15 $\mu$ s
COMPARE to COMPARE <sup>18</sup>	+/- 62.5 ns

1. CLEAR and STOP (and TRIGOVRFLOW; not shown) will be delayed as long as it takes for the peripheral to clock a falling edge and rising of the LFCLK. This is between 15.2585  $\mu$ s and 45.7755  $\mu$ s – rounded to 15  $\mu$ s and 46  $\mu$ s for the remainder of the section.

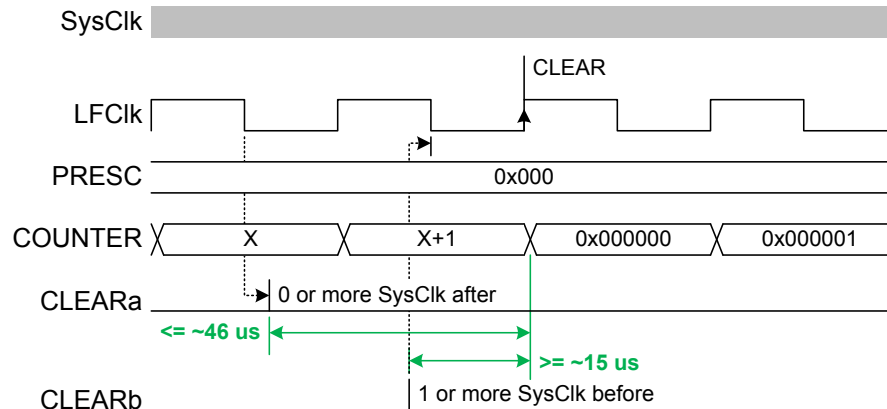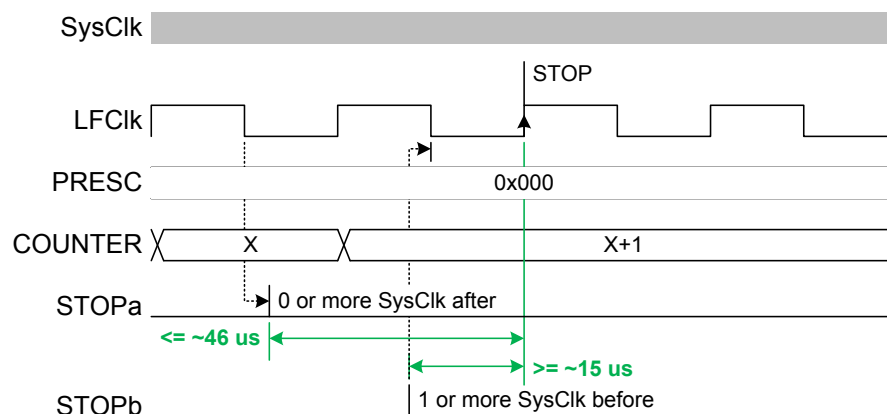
**Figure 61: Timing diagram - DELAY\_CLEAR**

**Figure 62: Timing diagram - DELAY\_STOP**

2. The START task will start the RTC. Assuming that the LFCLK was previously running and stable, the first increment of COUNTER (and instance of TICK event) will be typically after 30.5  $\mu$ s +/- 15  $\mu$ s. In some cases, in particular if the RTC is STARTed before the LFCLK is running, that timing can be up to ~250  $\mu$ s. The software should therefore wait for the first TICK if it has to make sure the RTC is running. Sending a TRIGOVRFLOW task sets the COUNTER to a value close to overflow. However, since the update of COUNTER relies on a stable LFCLK, sending this task while LFCLK is not running will start LFCLK, but the update will then be delayed by the same amount of time of up to ~250  $\mu$ s. The figures show the smallest and largest delays to on the START task which appears as a +/- 15  $\mu$ s jitter on the first COUNTER increment.

<sup>18</sup> Assumes RTC runs continuously between these events.

**Note:** 32.768 kHz clock jitter is additional to the numbers provided above.

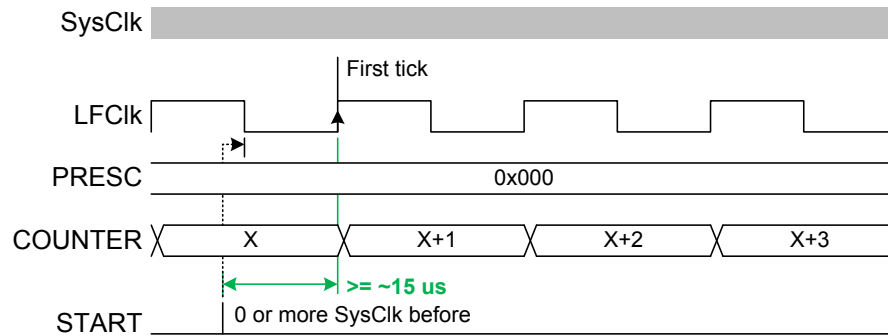


Figure 63: Timing diagram - JITTER\_START-

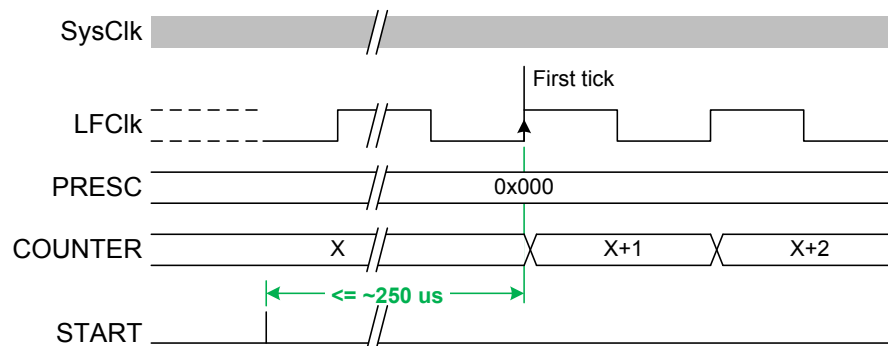


Figure 64: Timing diagram - JITTER\_START+

## 24.9 Reading the COUNTER register

To read the COUNTER register, the internal <<COUNTER>> value is sampled.

To ensure that the <<COUNTER>> is safely sampled (considering an LFCLK transition may occur during a read), the CPU and core memory bus are halted for three cycles by lowering the core PREADY signal. The Read takes the CPU 2 cycles in addition resulting in the COUNTER register read taking a fixed five PCLK16M clock cycles.

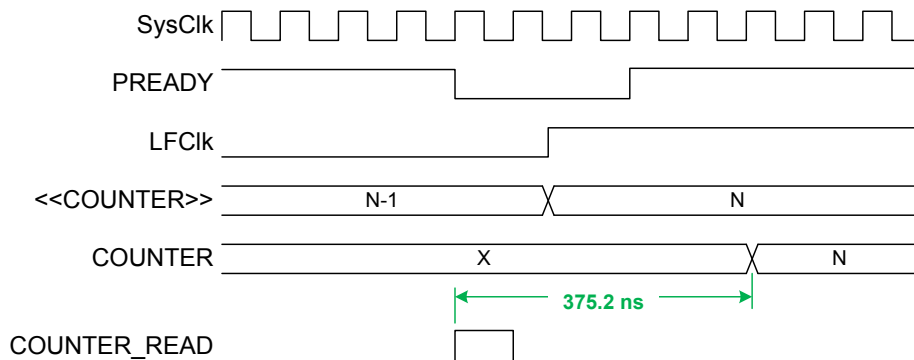


Figure 65: Timing diagram - COUNTER\_READ

## 24.10 Registers

Table 41: Instances

Base address	Peripheral	Instance	Description	Configuration
0x4000B000	RTC	RTC0	Real-time counter 0	CC[0..2] implemented, CC[3] not implemented
0x40011000	RTC	RTC1	Real-time counter 1	CC[0..3] implemented



Base address	Peripheral	Instance	Description	Configuration
0x40024000	RTC	RTC2	Real-time counter 2	CC[0..3] implemented

**Table 42: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start RTC COUNTER
TASKS_STOP	0x004	Stop RTC COUNTER
TASKS_CLEAR	0x008	Clear RTC COUNTER
TASKS_TRIGOVFLW	0x00C	Set COUNTER to 0xFFFFF0
EVENTS_TICK	0x100	Event on COUNTER increment
EVENTS_OVRFLW	0x104	Event on COUNTER overflow
EVENTS_COMPARE[0]	0x140	Compare event on CC[0] match
EVENTS_COMPARE[1]	0x144	Compare event on CC[1] match
EVENTS_COMPARE[2]	0x148	Compare event on CC[2] match
EVENTS_COMPARE[3]	0x14C	Compare event on CC[3] match
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>EVTEN</i>	0x340	Enable or disable event routing
<i>EVTENSET</i>	0x344	Enable event routing
<i>EVTENCLR</i>	0x348	Disable event routing
<i>COUNTER</i>	0x504	Current COUNTER value
<i>PRESCALER</i>	0x508	12 bit prescaler for COUNTER frequency (32768/(PRESICALER+1)). Must be written when RTC is stopped
<i>CC[0]</i>	0x540	Compare register 0
<i>CC[1]</i>	0x544	Compare register 1
<i>CC[2]</i>	0x548	Compare register 2
<i>CC[3]</i>	0x54C	Compare register 3

## 24.10.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0													
Id																	F				E				D				C								B				A							
Reset 0x00000000				0													0				0				0				0				0				0				0				0			
Id	RW	Field	Value Id	Value		Description																																										
A	RW	TICK				Write '1' to Enable interrupt for TICK event																																										
						See <a href="#">EVENTS_TICK</a>																																										
			Set	1		Enable																																										
			Disabled	0		Read: Disabled																																										
			Enabled	1		Read: Enabled																																										
B	RW	OVRFLW				Write '1' to Enable interrupt for OVRFLW event																																										
						See <a href="#">EVENTS_OVRFLW</a>																																										
			Set	1		Enable																																										
			Disabled	0		Read: Disabled																																										
			Enabled	1		Read: Enabled																																										
C	RW	COMPARE0				Write '1' to Enable interrupt for COMPARE[0] event																																										
						See <a href="#">EVENTS_COMPARE[0]</a>																																										
			Set	1		Enable																																										
			Disabled	0		Read: Disabled																																										
			Enabled	1		Read: Enabled																																										
D	RW	COMPARE1				Write '1' to Enable interrupt for COMPARE[1] event																																										
						See <a href="#">EVENTS_COMPARE[1]</a>																																										
			Set	1		Enable																																										
			Disabled	0		Read: Disabled																																										
			Enabled	1		Read: Enabled																																										

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
E	RW	COMPARE2				Write '1' to Enable interrupt for COMPARE[2] event																													
						See <a href="#">EVENTS_COMPARE[2]</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
F	RW	COMPARE3				Write '1' to Enable interrupt for COMPARE[3] event																													
						See <a href="#">EVENTS_COMPARE[3]</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

## 24.10.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																								
Id				F E D C B A																																								
Reset 0x00000000				0 0																																								
Id	RW	Field	Value	Id	Value	Description																																						
A	RW	TICK				Write '1' to Disable interrupt for TICK event																																						
						See <a href="#">EVENTS_TICK</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							
B	RW	OVRFLW				Write '1' to Disable interrupt for OVRFLW event																																						
						See <a href="#">EVENTS_OVRFLW</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							
C	RW	COMPARE0				Write '1' to Disable interrupt for COMPARE[0] event																																						
						See <a href="#">EVENTS_COMPARE[0]</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							
D	RW	COMPARE1				Write '1' to Disable interrupt for COMPARE[1] event																																						
						See <a href="#">EVENTS_COMPARE[1]</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							
E	RW	COMPARE2				Write '1' to Disable interrupt for COMPARE[2] event																																						
						See <a href="#">EVENTS_COMPARE[2]</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							
F	RW	COMPARE3				Write '1' to Disable interrupt for COMPARE[3] event																																						
						See <a href="#">EVENTS_COMPARE[3]</a>																																						
			Clear		1																																							
			Disabled		0																																							
			Enabled		1																																							

### 24.10.3 EVTEN

Address offset: 0x340

Enable or disable event routing

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				F E D C																B A															
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	TICK				Enable or disable event routing for TICK event																													
						See <a href="#">EVENTS_TICK</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
B	RW	OVRFLW				Enable or disable event routing for OVRFLW event																													
						See <a href="#">EVENTS_OVRFLW</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
C	RW	COMPARE0				Enable or disable event routing for COMPARE[0] event																													
						See <a href="#">EVENTS_COMPARE[0]</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
D	RW	COMPARE1				Enable or disable event routing for COMPARE[1] event																													
						See <a href="#">EVENTS_COMPARE[1]</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
E	RW	COMPARE2				Enable or disable event routing for COMPARE[2] event																													
						See <a href="#">EVENTS_COMPARE[2]</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													
F	RW	COMPARE3				Enable or disable event routing for COMPARE[3] event																													
						See <a href="#">EVENTS_COMPARE[3]</a>																													
			Disabled		0	Disable																													
			Enabled		1	Enable																													

### 24.10.4 EVTENSET

Address offset: 0x344

Enable event routing

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F E D C																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	TICK				Write '1' to Enable event routing for TICK event																													
						See <a href="#">EVENTS_TICK</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
B	RW	OVRFLW				Write '1' to Enable event routing for OVRFLW event																													
						See <a href="#">EVENTS_OVRFLW</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	COMPARE0				Write '1' to Enable event routing for COMPARE[0] event																													
						See <a href="#">EVENTS_COMPARE[0]</a>																													
			Set		1	Enable																													



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																				F	E	D	C													B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
F	RW	COMPARE3				Write '1' to Disable event routing for COMPARE[3] event																																
						See <a href="#">EVENTS_COMPARE[3]</a>																																
		Clear	1			Disable																																
		Disabled	0			Read: Disabled																																
		Enabled	1			Read: Enabled																																

## 24.10.6 COUNTER

Address offset: 0x504

Current COUNTER value

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	COUNTER				Counter value																										

## 24.10.7 PRESCALER

Address offset: 0x508

12 bit prescaler for COUNTER frequency  $(32768 / (\text{PRESCALER} + 1))$ . Must be written when RTC is stopped

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																	A															
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	PRESCALER				Prescaler value																										

## 24.10.8 CC[0]

Address offset: 0x540

Compare register 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	COMPARE				Compare value																										

## 24.10.9 CC[1]

Address offset: 0x544

Compare register 1

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	RW	COMPARE						Compare value																											

## 24.10.10 CC[2]

Address offset: 0x548

Compare register 2

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id				Value				Description																															
A	RW	COMPARE									Compare value																															

## 24.10.11 CC[3]

Address offset: 0x54C

Compare register 3

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id				Value				Description																														
A	RW	COMPARE									Compare value																														


## 24.11 Electrical specification

### 24.11.1 RTC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>RTC</sub>	Run current Real Time Counter (LFCLK source)		0.1		μA

## 25 RNG — Random number generator

The Random number generator (RNG) generates true non-deterministic random numbers based on internal thermal noise that are suitable for cryptographic purposes. The RNG does not require a seed value.

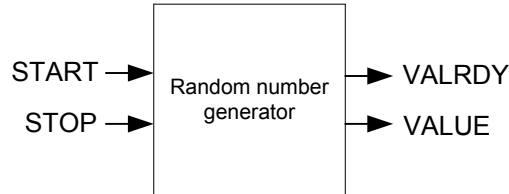

**Figure 66: Random number generator**

The RNG is started by triggering the START task and stopped by triggering the STOP task. When started, new random numbers are generated continuously and written to the VALUE register when ready. A VALRDY event is generated for every new random number that is written to the VALUE register. This means that after a VALRDY event is generated the CPU has the time until the next VALRDY event to read out the random number from the VALUE register before it is overwritten by a new random number.

### 25.1 Bias correction

A bias correction algorithm is employed on the internal bit stream to remove any bias toward '1' or '0'. The bits are then queued into an eight-bit register for parallel readout from the VALUE register.

It is possible to enable bias correction in the CONFIG register. This will result in slower value generation, but will ensure a statistically uniform distribution of the random values.

### 25.2 Speed

The time needed to generate one random byte of data is unpredictable, and may vary from one byte to the next. This is especially true when bias correction is enabled.

### 25.3 Registers

**Table 43: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x400D000	RNG	RNG	Random number generator	

**Table 44: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Task starting the random number generator
TASKS_STOP	0x004	Task stopping the random number generator
EVENTS_VALRDY	0x100	Event being generated for every new random number written to the VALUE register
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
CONFIG	0x504	Configuration register
VALUE	0x508	Output random number

#### 25.3.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	VALRDY_STOP				Shortcut between VALRDY event and STOP task																													
						See <a href="#">EVENTS_VALRDY</a> and <a href="#">TASKS_STOP</a>																													
		Disabled	0			Disable shortcut																													
		Enabled	1			Enable shortcut																													

## 25.3.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																							A
Reset 0x00000000				0 0																																			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	VALRDY				Write '1' to Enable interrupt for VALRDY event																																	
						See <a href="#">EVENTS_VALRDY</a>																																	
		Set	1			Enable																																	
		Disabled	0			Read: Disabled																																	
		Enabled	1			Read: Enabled																																	

## 25.3.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																													
A	RW	VALRDY				Write '1' to Disable interrupt for VALRDY event																													
						See <a href="#">EVENTS_VALRDY</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

## 25.3.4 CONFIG

Address offset: 0x504

Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	DERCEN				Bias correction																													
		Disabled	0			Disabled																													
		Enabled	1			Enabled																													

## 25.3.5 VALUE

Address offset: 0x508

Output random number



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																														
A	R	VALUE			[0..255]		Generated random number																														

## 25.4 Electrical specification

### 25.4.1 RNG Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{\text{RNG}}$	Run current, CPU sleeping.		500		$\mu\text{A}$
$t_{\text{RNG,START}}$	Time from setting the START task to generation begins. This is a one-time delay on START signal and does not apply between samples.		128		$\mu\text{s}$
$t_{\text{RNG,RAW}}$	Run time per byte without bias correction. Uniform distribution of 0 and 1 is not guaranteed.		30		$\mu\text{s}$
$t_{\text{RNG,BC}}$	Run time per byte with bias correction. Uniform distribution of 0 and 1 is guaranteed. Time to generate a byte cannot be guaranteed.		120		$\mu\text{s}$

## 26 TEMP — Temperature sensor

The temperature sensor measures die temperature over the temperature range of the device. Linearity compensation can be implemented if required by the application.

Listed here are the main features for TEMP:

- Temperature range is greater than or equal to operating temperature of the device
- Resolution is 0.25 degrees

TEMP is started by triggering the START task.

When the temperature measurement is completed, a DATARDY event will be generated and the result of the measurement can be read from the TEMP register.

To achieve the measurement accuracy stated in the electrical specification, the crystal oscillator must be selected as the HFCLK source, see [CLOCK — Clock control](#) on page 142 for more information.

When the temperature measurement is completed, TEMP analog electronics power down to save power.

TEMP only supports one-shot operation, meaning that every TEMP measurement has to be explicitly started using the START task.

### 26.1 Registers

**Table 45: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000C000	TEMP	TEMP	Temperature sensor	

**Table 46: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start temperature measurement
TASKS_STOP	0x004	Stop temperature measurement
EVENTS_DATARDY	0x100	Temperature measurement complete, data ready
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">TEMP</a>	0x508	Temperature in °C (0.25° steps)
<a href="#">A0</a>	0x520	Slope of 1st piece wise linear function
<a href="#">A1</a>	0x524	Slope of 2nd piece wise linear function
<a href="#">A2</a>	0x528	Slope of 3rd piece wise linear function
<a href="#">A3</a>	0x52C	Slope of 4th piece wise linear function
<a href="#">A4</a>	0x530	Slope of 5th piece wise linear function
<a href="#">A5</a>	0x534	Slope of 6th piece wise linear function
<a href="#">B0</a>	0x540	y-intercept of 1st piece wise linear function
<a href="#">B1</a>	0x544	y-intercept of 2nd piece wise linear function
<a href="#">B2</a>	0x548	y-intercept of 3rd piece wise linear function
<a href="#">B3</a>	0x54C	y-intercept of 4th piece wise linear function
<a href="#">B4</a>	0x550	y-intercept of 5th piece wise linear function
<a href="#">B5</a>	0x554	y-intercept of 6th piece wise linear function
<a href="#">T0</a>	0x560	End point of 1st piece wise linear function
<a href="#">T1</a>	0x564	End point of 2nd piece wise linear function
<a href="#">T2</a>	0x568	End point of 3rd piece wise linear function
<a href="#">T3</a>	0x56C	End point of 4th piece wise linear function
<a href="#">T4</a>	0x570	End point of 5th piece wise linear function

### 26.1.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																						A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	DATARDY				Write '1' to Enable interrupt for DATARDY event																																	
						See <a href="#">EVENTS_DATARDY</a>																																	
		Set	1			Enable																																	
		Disabled	0			Read: Disabled																																	
		Enabled	1			Read: Enabled																																	

### 26.1.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																						A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	DATARDY				Write '1' to Disable interrupt for DATARDY event																																
						See <a href="#">EVENTS_DATARDY</a>																																
		Clear	1			Disable																																
		Disabled	0			Read: Disabled																																
		Enabled	1			Read: Enabled																																

### 26.1.3 TEMP

Address offset: 0x508

Temperature in °C (0.25° steps)

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	TEMP				Temperature in °C (0.25° steps)																													
						Result of temperature measurement. Die temperature in °C, 2's complement format, 0.25 °C steps																													
						Decision point: DATARDY																													

### 26.1.4 A0

Address offset: 0x520

Slope of 1st piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																								A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000326				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	1	0	0	1	1	0	0							
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	A0				Slope of 1st piece wise linear function																																					

### 26.1.5 A1

Address offset: 0x524

### Slope of 2nd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000348	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	0	1	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	A1					Slope of 2nd piece wise linear function																									

### 26.1.6 A2

Address offset: 0x528

### Slope of 3rd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x000003AA	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	1	0	1	0	1	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	A2					Slope of 3rd piece wise linear function																									

### 26.1.7 A3

Address offset: 0x52C

### Slope of 4th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000040E	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1	1	1	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	A3					Slope of 4th piece wise linear function																									

### 26.1.8 A4

Address offset: 0x530

### Slope of 5th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x000004BD	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	1	1	1	1	0	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A4					Slope of 5th piece wise linear function																									

### 26.1.9 A5

Address offset: 0x534

### Slope of 6th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x000005A3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	0	1	0	0	0	1	1
Id	RW	Field	Value Id		Value		Description																									
A	RW	A5					Slope of 6th piece wise linear function																									

### 26.1.10 B0

Address offset: 0x540

### y-intercept of 1st piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003FEF	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	1	1	1
Id	RW	Field																														
A	RW	B0																														
y-intercept of 1st piece wise linear function																																

### 26.1.11 B1

Address offset: 0x544

y-intercept of 2nd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003FBE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	1	1	1	0
Id	RW	Field																														
A	RW	B1																														
y-intercept of 2nd piece wise linear function																																

### 26.1.12 B2

Address offset: 0x548

y-intercept of 3rd piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00003FBE	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	1	1	1	0
Id	RW	Field																														
A	RW	B2																														
y-intercept of 3rd piece wise linear function																																

### 26.1.13 B3

Address offset: 0x54C

y-intercept of 4th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000012	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
Id	RW	Field																														
A	RW	B3																														
y-intercept of 4th piece wise linear function																																

### 26.1.14 B4

Address offset: 0x550

y-intercept of 5th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	1	0
Id	RW	Field																														
A	RW	B4																														
y-intercept of 5th piece wise linear function																																

### 26.1.15 B5

Address offset: 0x554

y-intercept of 6th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x0000027C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	1	1	1	0	0
Id	RW	Field																														
A	RW	B5																														
y-intercept of 6th piece wise linear function																																

### 26.1.16 T0

Address offset: 0x560

End point of 1st piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A	A	A	A	A	A	A	A			
Reset 0x000000E2				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	0	0	0	1	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	T0				End point of 1st piece wise linear function																																

### 26.1.17 T1

Address offset: 0x564

End point of 2nd piece wise linear function

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	T1				End point of 2nd piece wise linear function																																

### 26.1.18 T2

Address offset: 0x568

End point of 3rd piece wise linear function

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000019				0 1 1 0 0 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	T2				End point of 3rd piece wise linear function																													

### 26.1.19 T3

Address offset: 0x56C

End point of 4th piece wise linear function

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																									A	A	A	A	A	A	A	A	
Reset 0x0000003C	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	0	
Id	RW	Field	Value	Id	Value	Description																											
A	RW	T3				End point of 4th piece wise linear function																											

### 26.1.20 T4

Address offset: 0x570

End point of 5th piece wise linear function

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000050				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	T4				End point of 5th piece wise linear function																													

## 26.2 Electrical specification

### 26.2.1 Temperature Sensor Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TEMP</sub>	Time required for temperature measurement		36		μs
T <sub>TEMP,RANGE</sub>	Temperature sensor range	-40		85	°C
T <sub>TEMP,ACC</sub>	Temperature sensor accuracy	-5		5	°C
T <sub>TEMP,RES</sub>	Temperature sensor resolution		0.25		°C
T <sub>TEMP,STB</sub>	Sample to sample stability at constant device temperature	-0.25		0.25	°C
T <sub>TEMP,OFFST</sub>	Sample offset at 25°C	-2.5		2.5	°C

## 27 ECB — AES electronic codebook mode encryption

The AES electronic codebook mode encryption (ECB) can be used for a range of cryptographic functions like hash generation, digital signatures, and keystream generation for data encryption/decryption. The ECB encryption block supports 128 bit AES encryption (encryption only, not decryption).

AES ECB operates with EasyDMA access to system Data RAM for in-place operations on cleartext and ciphertext during encryption. ECB uses the same AES core as the CCM and AAR blocks and is an asynchronous operation which may not complete if the AES core is busy.

AES ECB features:

- 128 bit AES encryption
- Supports standard AES ECB block encryption
- Memory pointer support
- DMA data transfer

AES ECB performs a 128 bit AES block encrypt. At the STARTECB task, data and key is loaded into the algorithm by EasyDMA. When output data has been written back to memory, the ENDECB event is triggered.

AES ECB can be stopped by triggering the STOPECB task.

### 27.1 Shared resources

The ECB, CCM, and AAR share the same AES module. The ECB will always have lowest priority and if there is a sharing conflict during encryption, the ECB operation will be aborted and an ERRORECB event will be generated.

### 27.2 EasyDMA

The ECB implements an EasyDMA mechanism for reading and writing to the Data RAM. This DMA cannot access the program memory or any other parts of the memory area except RAM.

If the ECBDATAPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The EasyDMA will have finished accessing the Data RAM when the ENDECB or ERRORECB is generated.

### 27.3 ECB data structure

Input to the block encrypt and output from the block encrypt are stored in the same data structure. ECBDATAPTR should point to this data structure before STARTECB is initiated.

**Table 47: ECB data structure overview**

Property	Address offset	Description
KEY	0	16 byte AES key
CLEARTEXT	16	16 byte AES cleartext input block
CIPHERTEXT	32	16 byte AES ciphertext output block



## 27.4 Registers

**Table 48: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000E000	ECB	ECB	AES electronic code book (ECB) mode block encryption	

**Table 49: Register Overview**

Register	Offset	Description
TASKS_STARTECB	0x000	Start ECB block encrypt
TASKS_STOPECB	0x004	Abort a possible executing ECB operation
EVENTS_ENDECB	0x100	ECB block encrypt complete
EVENTS_ERRORECB	0x104	ECB block encrypt aborted because of a STOPECB task or due to an error
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>ECBDATAPTR</i>	0x504	ECB block encrypt memory pointers

### 27.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	B A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	ENDECB				Write '1' to Enable interrupt for ENDECB event																									
						See <a href="#">EVENTS_ENDECB</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									
B	RW	ERRORECB				Write '1' to Enable interrupt for ERRORECB event																									
						See <a href="#">EVENTS_ERRORECB</a>																									
		Set	1			Enable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									

### 27.4.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	B A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	ENDECB				Write '1' to Disable interrupt for ENDECB event																									
						See <a href="#">EVENTS_ENDECB</a>																									
		Clear	1			Disable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									
B	RW	ERRORECB				Write '1' to Disable interrupt for ERRORECB event																									
						See <a href="#">EVENTS_ERRORECB</a>																									
		Clear	1			Disable																									
		Disabled	0			Read: Disabled																									

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				B A	
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value			Description																														
			Enabled	1			Read: Enabled																														

### 27.4.3 ECBDATAPTR

Address offset: 0x504

ECB block encrypt memory pointers

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	ECBDATAPTR					Pointer to the ECB data structure (see Table 1 ECB data structure overview)																												

## 27.5 Electrical specification

### 27.5.1 ECB Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{ECB}$	Run time per 16 byte block in all modes			7.2	$\mu s$


## 28 CCM — AES CCM mode encryption

Cipher block chaining - message authentication code (CCM) mode is an authenticated encryption algorithm designed to provide both authentication and confidentiality during data transfer. CCM combines counter mode encryption and CBC-MAC authentication. The CCM terminology "Message authentication code (MAC)" is called the "Message integrity check (MIC)" in *Bluetooth* terminology and also in this document.

The CCM block generates an encrypted keystream that is applied to input data using the XOR operation and generates the 4 byte MIC field in one operation. The CCM and radio can be configured to work synchronously. The CCM will encrypt in time for transmission and decrypt after receiving bytes into memory from the radio. All operations can complete within the packet RX or TX time. CCM on this device is implemented according to *Bluetooth* requirements and the algorithm as defined in IETF [RFC3610](#), and depends on the AES-128 block cipher. A description of the CCM algorithm can also be found in [NIST Special Publication 800-38C](#). The *Bluetooth* specification describes the configuration of counter mode blocks and encryption blocks to implement compliant encryption for BLE.

The CCM block uses EasyDMA to load key, counter mode blocks (including the nonce required), and to read/write plain text and cipher text.

The AES CCM supports three operations: key-stream generation, packet encryption, and packet decryption. All these operations are done in compliance with the *Bluetooth* specification.<sup>19</sup>

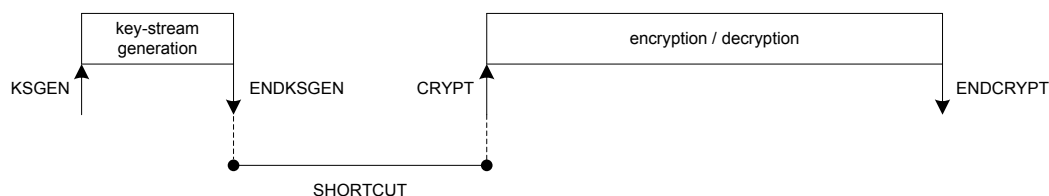

**Figure 67: Key-stream generation followed by encryption or decryption. The shortcut is optional.**

### 28.1 Shared resources

The CCM shares registers and other resources with other peripherals that have the same ID as the CCM. The user must therefore disable all peripherals that have the same ID as the CCM before the CCM can be configured and used.

Disabling a peripheral that have the same ID as the CCM will not reset any of the registers that are shared with the CCM. It is therefore important to configure all relevant CCM registers explicitly to secure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.

### 28.2 Key-steam generationin

A new key-stream needs to be generated before a new packet encryption or packet decryption operation can be started.

A key-stream is generated by triggering the KSGEN task and an ENDKSGEN event will be generated when the key-stream has been generated.

Key-stream generation, packet encryption, and packet decryption operations utilize the configuration specified in the data structure pointed to by [CNFPTR](#) on page 331. It is necessary to configure this pointer and its underlying data structure, and the [MODE](#) on page 330 register before the KSGEN task is triggered.

<sup>19</sup> *Bluetooth* AES CCM 128 bit block encryption, see *Bluetooth* Core specification Version 4.0.

The key-stream will be stored in the AES CCM's temporary memory area, specified by the [SCRATCHPTR](#) on page 331, where it will be used in subsequent encryption and decryption operations.

For default length packets, that is when MODE.LENGTH is set to Default, the size of the generated key-stream is 27 bytes. When using extended length packets, that is when MODE.LENGTH is set to Extended, The [MAXPACKETSIZE](#) on page 331 register specifies the length of the key-stream to be generated. The length of the generated key-stream must be greater or equal to the length of the subsequent packet to be encrypted or decrypted.

If a shortcut is used between ENDKSGEN event and CRYPT task, the [INPTR](#) on page 331 pointer and the [OUTPTR](#) on page 331 pointers must also be configured before the KSGEN task is triggered.

## 28.3 Encryption


During packet encryption, the AES CCM will read the unencrypted packet located in RAM at the address specified in the INPTR pointer, encrypt the packet and append a four byte long Message Integrity Check (MIC) field to the packet.

Encryption is started by triggering the CRYPT task with the [MODE](#) on page 330 register set to ENCRYPTION. An ENDCRYPT event will be generated when packet encryption is completed

The AES CCM will also modify the length field of the packet to adjust for the appended MIC field, that is, add four bytes to the length, and store the resulting packet back into RAM at the address specified in the [OUTPTR](#) on page 331 pointer, see [Figure 68: Encryption](#) on page 324.

Empty packets (length field is set to 0) will not be encrypted but instead moved unmodified through the AES CCM.

The CCM supports different widths of the LENGTH field in the data structure for encrypted packets. This is configured in the [MODE](#) on page 330 register.

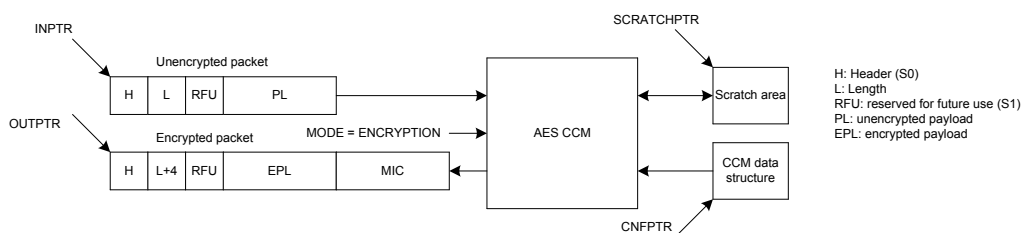

**Figure 68: Encryption**

## 28.4 Decryption

During packet decryption, the AES CCM will read the encrypted packet located in RAM at the address specified in the INPTR pointer, decrypt the packet, authenticate the packet's MIC field and generate the appropriate MIC status.


Decryption is started by triggering the CRYPT task with the [MODE](#) on page 330 register set to DECRYPTION. An DESCRYPT event will be generated when packet decryption is completed

The AES CCM will also modify the length field of the packet to adjust for the MIC field, that is, subtract four bytes from the length, and then store the decrypted packet into RAM at the address pointed to by the OUTPTR pointer, see [Figure 69: Decryption](#) on page 325.

The CCM is only able to decrypt packets that are at least 5 bytes long, that is, 1 byte or more encrypted payload (EPL) and 4 bytes of MIC. The CCM will therefore generate a MIC error for packets where the length field is set to 1, 2, 3 or 4.

Empty packets (length field is set to 0) will not be decrypted but instead moved unmodified through the AES CCM, these packets will always pass the MIC check.

The CCM supports different widths of the LENGTH field in the data structure for decrypted packets. This is configured in the [MODE](#) on page 330 register.

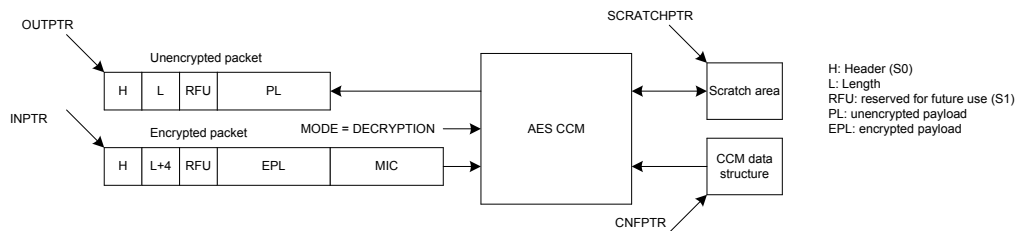

**Figure 69: Decryption**

## 28.5 AES CCM and RADIO concurrent operation

The CCM module is able to encrypt/decrypt data synchronously to data being transmitted or received on the radio.


In order for the CCM module to run synchronously with the radio, the data rate setting in the [MODE](#) on page 330 register needs to match the radio data rate. The settings in this register apply whenever either the KSGEN or CRYPT tasks are triggered.

The data rate setting of the [MODE](#) on page 330 register can also be overridden on-the-fly during an ongoing encrypt/decrypt operation by the contents of the [RATEOVERRIDE](#) on page 332 register. The data rate setting in this register applies whenever the RATEOVERRIDE task is triggered. This feature can be useful in cases where the radio data rate is changed during an ongoing packet transaction.

## 28.6 Encrypting packets on-the-fly in radio transmit mode

When the AES CCM is encrypting a packet on-the-fly at the same time as the radio is transmitting it, the radio must read the encrypted packet from the same memory location as the AES CCM is writing to.

The [OUTPTR](#) on page 331 pointer in the AES CCM must therefore point to the same memory location as the PACKETPTR pointer in the radio, see [Figure 70: Configuration of on-the-fly encryption](#) on page 325.

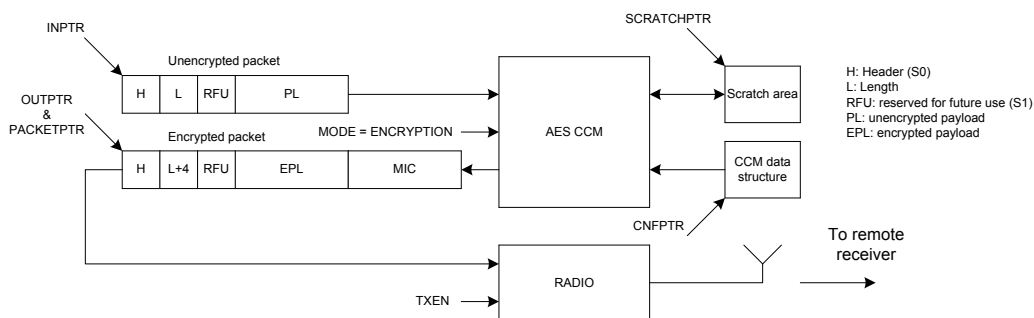


**Figure 70: Configuration of on-the-fly encryption**

In order to match the RADIO's timing, the KSGEN task must be triggered early enough to allow the key-stream generation to complete before the transmission and encryption of the packet shall start.

For short packets, that is when MODE.LENGTH = Default, the KSGEN task must be triggered no later than when the START task in the RADIO is triggered. In addition the shortcut between the ENDKSGEN event and the CRYPT task must be enabled. This use-case is illustrated in [Figure 71: On-the-fly encryption using a PPI connection](#) on page 326 using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM.

For long packets, that is when MODE.LENGTH = Extended, the key-stream generation will need to be started even earlier.

**Important:** Refer to [Timing specification](#) on page 332 for information about the time needed for generating a key-stream.

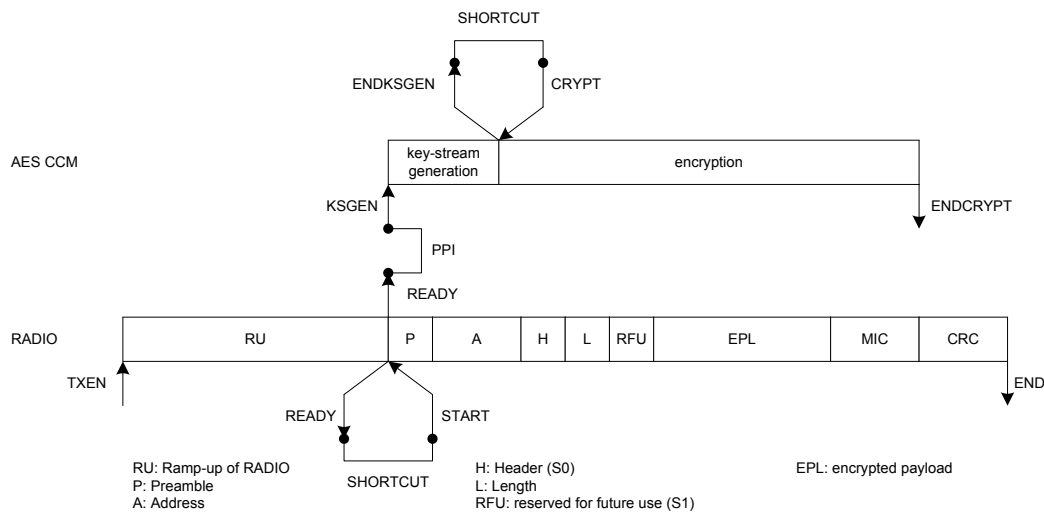


**Figure 71: On-the-fly encryption using a PPI connection**

## 28.7 Decrypting packets on-the-fly in radio receive mode

When the AES CCM is decrypting a packet on-the-fly at the same time as the RADIO is receiving it, the AES CCM must read the encrypted packet from the same memory location as the RADIO is writing to.

The [INPTR](#) on page 331 pointer in the AES CCM must therefore point to the same memory location as the PACKETPTR pointer in the RADIO, see [Figure 72: Configuration of on-the-fly decryption](#) on page 326.

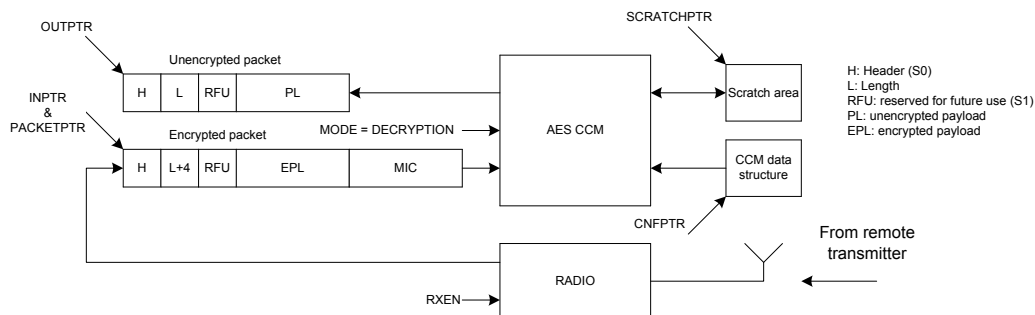

**Figure 72: Configuration of on-the-fly decryption**

In order to match the RADIO's timing, the KSGEN task must be triggered early enough to allow the key-stream generation to complete before packet reception and decryption shall start.


For short packets, that is when MODE.LENGTH = Default, the KSGEN task must be triggered no later than when the START task in the RADIO is triggered. In addition, the CRYPT task must be triggered no earlier than when the ADDRESS event is generated by the RADIO.

If the CRYPT task is triggered exactly at the same time as the ADDRESS event is generated by the RADIO, the AES CCM will guarantee that the decryption is completed no later than when the END event in the RADIO is generated.

This use-case is illustrated in [Figure 73: On-the-fly decryption using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM](#) on page 327 using a PPI connection between the ADDRESS event in the RADIO and the CRYPT task in the AES CCM. The KSGEN task is triggered from the READY event in the RADIO through a PPI connection.

For long packets, that is when MODE.LENGTH = Extended, the key-stream generation will need to be started even earlier.

**Important:** Refer to [Timing specification](#) on page 332 for information about the time needed for generating a key-stream.

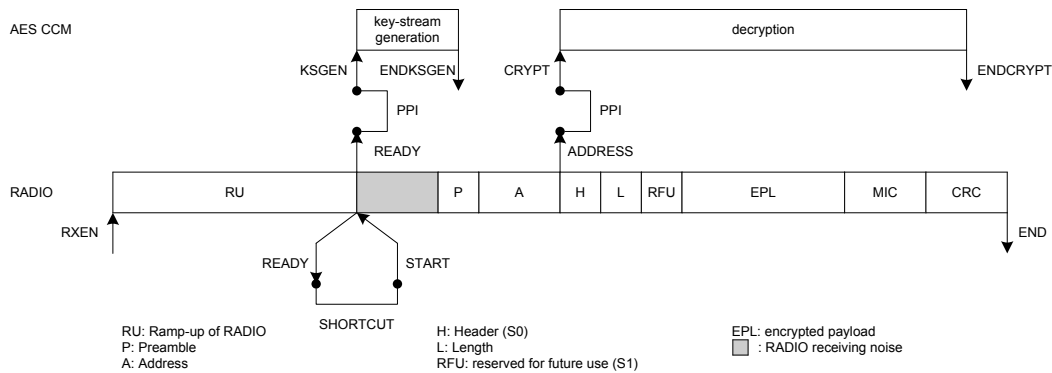

**Figure 73: On-the-fly decryption using a PPI connection between the READY event in the RADIO and the KSGEN task in the AES CCM**

## 28.8 CCM data structure

The CCM data structure is located in Data RAM at the memory location specified by the CNFPTR pointer register.

**Table 50: CCM data structure overview**

Property	Address offset	Description
KEY	0	16 byte AES key
PKTCTR	16	Octet0 (LSO) of packet counter
	17	Octet1 of packet counter
	18	Octet2 of packet counter
	19	Octet3 of packet counter
	20	Bit 6 – Bit 0: Octet4 (7 most significant bits of packet counter, with Bit 6 being the most significant bit) Bit7: Ignored
	21	Ignored
	22	Ignored
IV	23	Ignored
	24	Bit 0: Direction bit Bit 7 – Bit 1: Zero padded
	25	8 byte initialization vector (IV) Octet0 (LSO) of IV, Octet1 of IV, ..., Octet7 (MSO) of IV

The NONCE vector (as specified by the *Bluetooth* Core Specification) will be generated by hardware based on the information specified in the CCM data structure from [Table 50: CCM data structure overview](#) on page 327 .

**Table 51: Data structure for unencrypted packet**

Property	Address offset	Description
HEADER	0	Packet Header
LENGTH	1	Number of bytes in unencrypted payload
RFU	2	Reserved Future Use
PAYLOAD	3	Unencrypted payload

**Table 52: Data structure for encrypted packet**

Property	Address offset	Description
HEADER	0	Packet Header
LENGTH	1	Number of bytes in encrypted payload including length of MIC

**Important:** LENGTH will be 0 for empty packets since the MIC is not added to empty packets

Property	Address offset	Description
RFU	2	Reserved Future Use
PAYLOAD	3	Encrypted payload
MIC	3 + payload length	ENCRYPT: 4 bytes encrypted MIC

**Important:** MIC is not added to empty packets

## 28.9 EasyDMA and ERROR event

The CCM implements an EasyDMA mechanism for reading and writing to the RAM.

In cases where the CPU and other EasyDMA enabled peripherals are accessing the same RAM block at the same time, a high level of bus collisions may cause too slow operation for correct on the fly encryption. In this case the ERROR event will be generated.

The EasyDMA will have finished accessing the RAM when the ENDKSGEN and ENDCRYPT events are generated.

If the CNFPTR, SCRATCHPTR, INPTR and the OUTPTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

## 28.10 Registers

**Table 53: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000F000	CCM	CCM	AES counter with CBC-MAC (CCM) mode block encryption	

**Table 54: Register Overview**

Register	Offset	Description
TASKS_KSGEN	0x000	Start generation of key-stream. This operation will stop by itself when completed.
TASKS_CRYPT	0x004	Start encryption/decryption. This operation will stop by itself when completed.
TASKS_STOP	0x008	Stop encryption/decryption
TASKS_RATEOVERRIDE	0x00C	Override DATARATE setting in MODE register with the contents of the RATEOVERRIDE register for any ongoing encryption/decryption
EVENTS_ENDKSGEN	0x100	Key-stream generation complete
EVENTS_ENDCRYPT	0x104	Encrypt/decrypt complete
EVENTS_ERROR	0x108	CCM error event
<a href="#">SHORTS</a>	0x200	Shortcut register
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">MICSTATUS</a>	0x400	MIC check result
<a href="#">ENABLE</a>	0x500	Enable
<a href="#">MODE</a>	0x504	Operation mode
<a href="#">CNFPTR</a>	0x508	Pointer to data structure holding AES key and NONCE vector
<a href="#">INPTR</a>	0x50C	Input pointer
<a href="#">OUTPTR</a>	0x510	Output pointer
<a href="#">SCRATCHPTR</a>	0x514	Pointer to data area used for temporary storage
<a href="#">MAXPACKETSIZE</a>	0x518	Length of key-stream generated when MODE.LENGTH = Extended.
<a href="#">RATEOVERRIDE</a>	0x51C	Data rate override setting.

### 28.10.1 SHORTS

Address offset: 0x200

Shortcut register



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																						A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
A	RW	ENDKSGEN_CRYPT				Shortcut between ENDKSGEN event and CRYPT task																																
						See <a href="#">EVENTS_ENDKSGEN</a> and <a href="#">TASKS_CRYPT</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																

## 28.10.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENDKSGEN			Write '1' to Enable interrupt for ENDKSGEN event																														
					See <a href="#">EVENTS_ENDKSGEN</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	ENDCRYPT			Write '1' to Enable interrupt for ENDCRYPT event																														
					See <a href="#">EVENTS_ENDCRYPT</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	ERROR			Write '1' to Enable interrupt for ERROR event																														
					See <a href="#">EVENTS_ERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

## 28.10.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENDKSGEN				Write '1' to Disable interrupt for ENDKSGEN event																													
						See <a href="#">EVENTS_ENDKSGEN</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
B	RW	ENDCRYPT				Write '1' to Disable interrupt for ENDCRYPT event																													
						See <a href="#">EVENTS_ENDCRYPT</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	ERROR				Write '1' to Disable interrupt for ERROR event																													
						See <a href="#">EVENTS_ERROR</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id																																				C B A		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value	Id	Value		Description																															
			Enabled	1			Read: Enabled																															

## 28.10.4 MICSTATUS

Address offset: 0x400

MIC check result

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	R	MICSTATUS				The result of the MIC check performed during the previous decryption operation																									
			CheckFailed	0		MIC check failed																									
			CheckPassed	1		MIC check passed																									

## 28.10.5 ENABLE

Address offset: 0x500

Enable

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	ENABLE				Enable or disable CCM																															
			Disabled	0		Disable																															
			Enabled	2		Enable																															

## 28.10.6 MODE

Address offset: 0x504

Operation mode

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id															C		B		B													A				
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value	Id	Value		Description																													
A	RW	MODE					The mode of operation to be used. The settings in this register apply whenever either the KSGEN or CRYPT tasks are triggered.																													
			Encryption	0			AES CCM packet encryption mode																													
			Decryption	1			AES CCM packet decryption mode																													
B	RW	DATARATE					Radio data rate that the CCM shall run synchronous with																													
			1Mbit	0			1 Mbps																													
			2Mbit	1			2 Mbps																													
			125Kbps	2			125 Kbps																													
			500Kbps	3			500 Kbps																													
C	RW	LENGTH					Packet length configuration																													
			Default	0			Default length. Effective length of LENGTH field in encrypted/decrypted packet is 5 bits. A key-stream for packets up to 27 bytes will be generated.																													
			Extended	1			Extended length. Effective length of LENGTH field in encrypted/decrypted packet is 8 bits. A key-stream for packets up to MAXPACKETSIZE bytes will be generated.																													

### 28.10.7 CNFPTR

Address offset: 0x508

Pointer to data structure holding AES key and NONCE vector

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	CNFPTR					Pointer to the data structure holding the AES key and the CCM NONCE vector (see Table 1 CCM data structure overview)																													

### 28.10.8 INPTR

Address offset: 0x50C

Input pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value				Description																											
A	RW	INPTR							Input pointer																											

### 28.10.9 OUTPTR

Address offset: 0x510

Output pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	OUTPTR								Output pointer																										

### 28.10.10 SCRATCHPTR

Address offset: 0x514

Pointer to data area used for temporary storage

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																					
A	RW	SCRATCHPTR													Pointer to a scratch data area used for temporary storage during key-stream generation, MIC generation and encryption/decryption.  The scratch area is used for temporary storage of data during key-stream generation and encryption.  When MODE.LENGTH = Default, a space of 43 bytes is required for this temporary storage. MODE.LENGTH = Extended (16 + MAXPACKETSIZE) bytes of storage is required.																					

### 28.10.11 MAXPACKETSIZE

Address offset: 0x518

Length of key-stream generated when MODE.LENGTH = Extended.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																													A	A	A	A	A	A	A	A		
Reset 0x000000FB					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0	1	1	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
A	RW	MAXPACKETSIZE		[0x001B..0x00FB]	Length of key-stream generated when MODE.LENGTH = Extended. This value must be greater or equal to the subsequent packet to be encrypted/decrypted.																																	

## 28.10.12 RATEOVERRIDE

Address offset: 0x51C

Data rate override setting.

Override value to be used instead of the setting of MODE.DATARATE. This override value applies when the RATEOVERRIDE task is triggered.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																		A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	RATEOVERRIDE			Data rate override setting.																														
			1Mbit	0	1 Mbps																														
			2Mbit	1	2 Mbps																														
			125Kbps	2	125 Kbps																														
			500Kbps	3	500 Kbps																														

## 28.11 Electrical specification

### 28.11.1 Timing specification

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>gen</sub>	Time needed for key-stream generation (given priority access to destination RAM block).			48	μs

## 29 AAR — Accelerated address resolver

Accelerated address resolver is a cryptographic support function for implementing the "Resolvable Private Address Resolution Procedure" described in the *Bluetooth Core specification v4.0*. "Resolvable private address generation" should be achieved using ECB and is not supported by AAR.

The procedure allows two devices that share a secret key to generate and resolve a hash based on their device address. The AAR block enables real-time address resolution on incoming packets when configured as described in this chapter. This allows real-time packet filtering (whitelisting) using a list of known shared keys (Identity Resolving Keys (IRK) in *Bluetooth*).

### 29.1 Shared resources

The AAR shares registers and other resources with the peripherals that have the same ID as the AAR. The user must therefore disable all peripherals that have the same ID as the AAR before the AAR can be configured and used.

Disabling a peripheral that have the same ID as the AAR will not reset any of the registers that are shared with the AAR. It is therefore important to configure all relevant AAR registers explicitly to secure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.


### 29.2 EasyDMA

The AAR implements EasyDMA for reading and writing to the RAM. The EasyDMA will have finished accessing the RAM when the END, RESOLVED, and NOTRESOLVED events are generated.

If the IRKPTR, ADDRPTR and the SCRATCHPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

### 29.3 Resolving a resolvable address

As per *Bluetooth* specification, a private resolvable address is composed of six bytes.

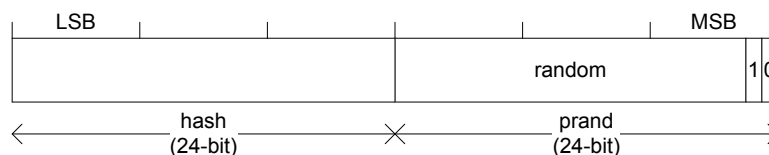

**Figure 74: Resolvable address**

To resolve an address the ADDRPTR register must point to the start of packet. The resolver is started by triggering the START task. A RESOLVED event is generated when the AAR manages to resolve the address using one of the Identity Resolving Keys (IRK) found in the IRK data structure. The AAR will use the IRK specified in the register IRK0 to IRK15 starting from IRK0. How many to be used is specified by the NIRK register. The AAR module will generate a NOTRESOLVED event if it is not able to resolve the address using the specified list of IRKs.


The AAR will go through the list of available IRKs in the IRK data structure and for each IRK try to resolve the address according to the Resolvable Private Address Resolution Procedure described in the *Bluetooth Specification*<sup>20</sup>. The time it takes to resolve an address may vary depending on where in the list the

<sup>20</sup> *Bluetooth Specification Version 4.0 [Vol 3] chapter 10.8.2.3.*

resolvable address is located. The resolution time will also be affected by RAM accesses performed by other peripherals and the CPU. See the [Electrical specifications](#) for more information about resolution time.

The AAR will only do a comparison of the received address to those programmed in the module. And not check what type of address it actually is.


The AAR will stop as soon as it has managed to resolve the address, or after trying to resolve the address using NIRK number of IRKs from the IRK data structure. The AAR will generate an END event after it has stopped.

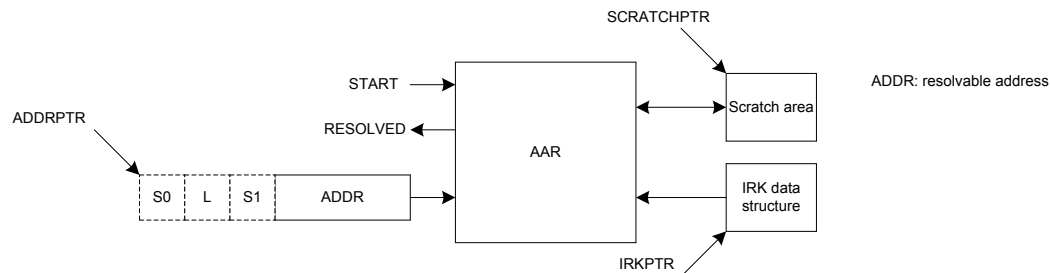

**Figure 75: Address resolution with packet preloaded into RAM**

## 29.4 Use case example for chaining RADIO packet reception with address resolution using AAR

The AAR may be started as soon as the 6 bytes required by the AAR have been received by the RADIO and stored in RAM. The ADDRPTR pointer must point to the start of packet.

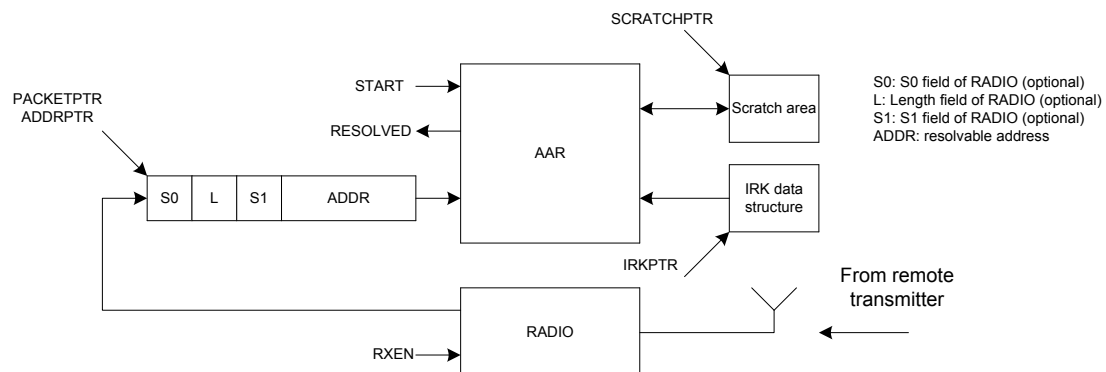

**Figure 76: Address resolution with packet loaded into RAM by the RADIO**

## 29.5 IRK data structure

The IRK data structure is located in RAM at the memory location specified by the CNFPTR pointer register.

**Table 55: IRK data structure overview**

Property	Address offset	Description
IRK0	0	IRK number 0 (16 - byte)
IRK1	16	IRK number 1 (16 - byte)
...	...	...
IRK15	240	IRK number 15 (16 - byte)

## 29.6 Registers

**Table 56: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4000F000	AAR	AAR	Accelerated address resolver	

**Table 57: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start resolving addresses based on IRKs specified in the IRK data structure
TASKS_STOP	0x008	Stop resolving addresses
EVENTS_END	0x100	Address resolution procedure complete
EVENTS_RESOLVED	0x104	Address resolved
EVENTS_NOTRESOLVED	0x108	Address not resolved
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>STATUS</i>	0x400	Resolution status
<i>ENABLE</i>	0x500	Enable AAR
<i>NIRK</i>	0x504	Number of IRKs
<i>IRKPTR</i>	0x508	Pointer to IRK data structure
<i>ADDRPTR</i>	0x510	Pointer to the resolvable address
<i>SCRATCHPTR</i>	0x514	Pointer to data area used for temporary storage

### 29.6.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																C	B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END				Write '1' to Enable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
		Set	1			Enable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	RESOLVED				Write '1' to Enable interrupt for RESOLVED event																													
						See <a href="#">EVENTS_RESOLVED</a>																													
		Set	1			Enable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	NOTRESOLVED				Write '1' to Enable interrupt for NOTRESOLVED event																													
						See <a href="#">EVENTS_NOTRESOLVED</a>																													
		Set	1			Enable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 29.6.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
B	RW	RESOLVED				Write '1' to Disable interrupt for RESOLVED event																													
						See <a href="#">EVENTS_RESOLVED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													
C	RW	NOTRESOLVED				Write '1' to Disable interrupt for NOTRESOLVED event																													
						See <a href="#">EVENTS_NOTRESOLVED</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 29.6.3 STATUS

Address offset: 0x400

Resolution status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value			Description																															
A	R	STATUS			[0..15]			The IRK that was used last time an address was resolved																															

### 29.6.4 ENABLE

Address offset: 0x500

Enable AAR

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ENABLE				Enable or disable AAR																														
		Disabled	0			Disable																														
		Enabled	3			Enable																														

### 29.6.5 NIRK

Address offset: 0x504

Number of IRKs

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																A	A	A	A
Reset 0x00000001		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
Id	RW	Field	Value	Id	Value	Description																													
A	RW	NIRK	[1..16]			Number of Identity root keys available in the IRK data structure																													

### 29.6.6 IRKPTR

Address offset: 0x508



## Pointer to IRK data structure

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	IRKPTR				Pointer to the IRK data structure																																	

## 29.6.7 ADDRPTR

Address offset: 0x510

Pointer to the resolvable address

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ADDRPTR				Pointer to the resolvable address (6-bytes)																														

## 29.6.8 SCRATCHPTR

Address offset: 0x514

Pointer to data area used for temporary storage

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	SCRATCHPTR				Pointer to a scratch data area used for temporary storage during resolution.A space of minimum 3 bytes must be reserved.																															

## 29.7 Electrical specification

### 29.7.1 AAR Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{AAR}$	Address resolution time per IRK. Total time for several IRKs is given as $(1 \mu s + n * t_{AAR})$ , where n is the number of IRKs. (Given priority to the actual destination RAM block).			6	$\mu s$
$t_{AAR,8}$	Time for address resolution of 8 IRKs. (Given priority to the actual destination RAM block).			49	$\mu s$

## 30 SPIM — Serial peripheral interface master with EasyDMA

The SPI master can communicate with multiple SPI slaves using individual chip select signals for each slave.

Listed here are the main features for the SPIM

- EasyDMA direct transfer to/from RAM
- SPI mode 0-3
- Individual selection of IO pin for each SPI signal

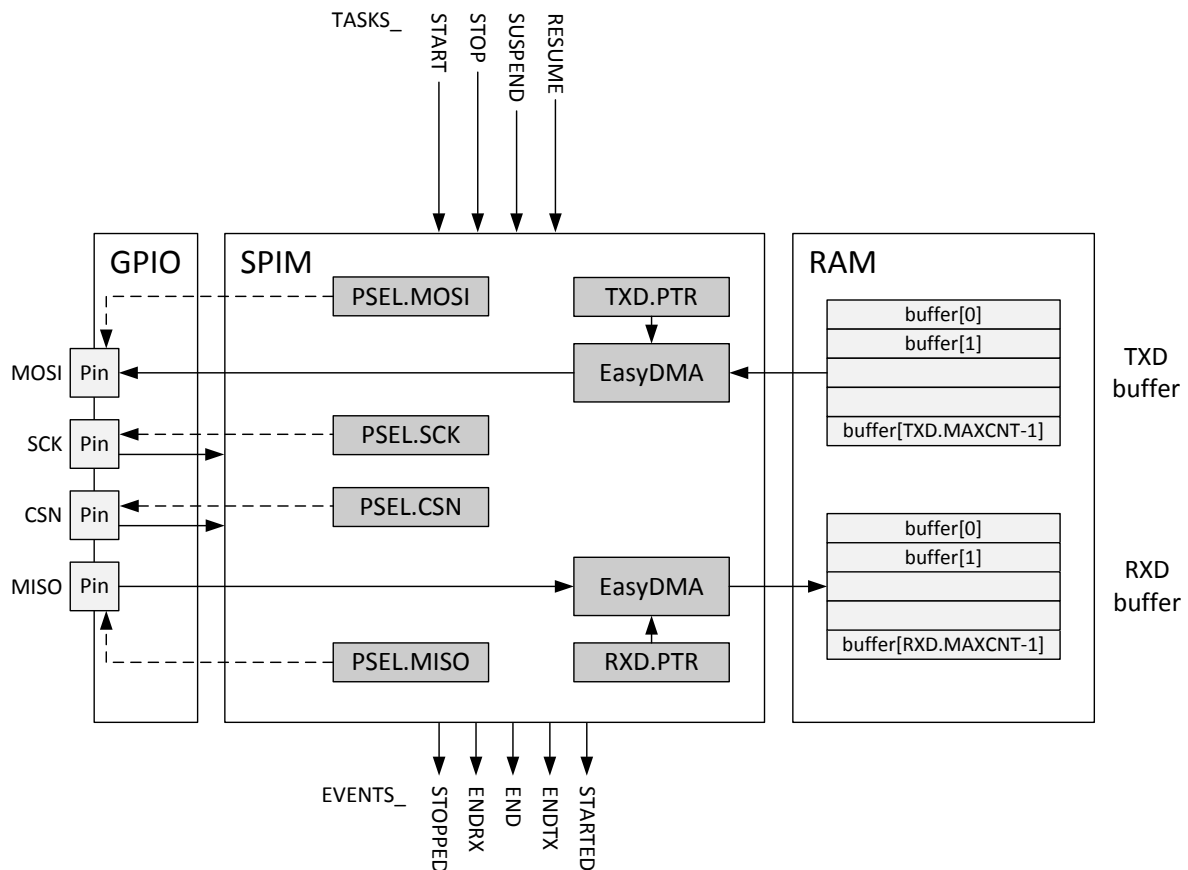


Figure 77: SPIM — SPI master with EasyDMA

### 30.1 SPI master transaction sequence

An SPI master transaction consists of a sequence started by the START task followed by a number of bytes being transmitted/received on MOSI/MISO.

An SPI master transaction is started by triggering the START task. When started, a number of bytes will be transmitted/received on MOSI/MISO. This is illustrated in [Figure 78: SPI master transaction](#) on page 339.

The ENDTX is generated when all bytes in the [TXD.PTR](#) on page 347 buffer as specified in the [TXD.MAXCNT](#) on page 347 register have been transmitted. The ENDRX event will be generated when the [RXD.PTR](#) on page 346 buffer is full, that is after the number of bytes specified in the [RXD.MAXCNT](#) on page 346 register have been received. The transaction stops automatically after MAX([TXD.MAXCNT](#) on page 347, [RXD.MAXCNT](#) on page 346) number of bytes have been transmitted/received. In the case when [RXD.MAXCNT](#) on page 346 > [TXD.MAXCNT](#) on page 347 the contents of the [ORC](#) on


page 348 register will be transmitted after the last byte in the [TXD.PTR](#) on page 347 buffer has been transmitted.

The END event will be generated after both the ENDRX and ENDTX events have been generated.

The SPI master can be stopped in the middle of a transaction by triggering the STOP task. A STOPPED event is generated when the SPI master has stopped.

If the ENDTX event has not already been generated when the SPI master has come to a stop, the ENDTX event will be generated even though all bytes in the [TXD.PTR](#) on page 347 buffer have not been transmitted.

If the ENDRX event has not already been generated when the SPI master has come to a stop, the ENDRX event will be generated even though the [RXD.PTR](#) on page 346 buffer is not full.

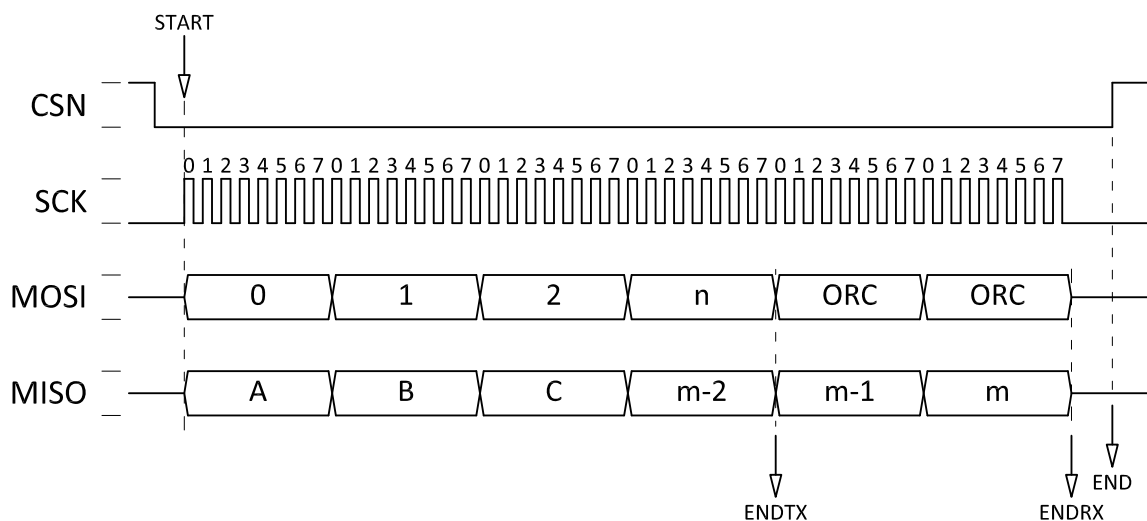

**Figure 78: SPI master transaction**

## 30.2 Pin configuration

The SCK, CSN, MOSI, and MISO signals associated with the SPIM are mapped to physical pins according to the configuration specified in the PSEL.n registers.

The contents of [PSEL.SCK](#) on page 344, [PSEL.CSN](#) on page 345, [PSEL.MOSI](#) on page 345 and [PSEL.MISO](#) on page 345 registers are only used when the SPIM is enabled and retained only as long as the device is in System On mode. The PSEL.n registers can only be configured when the SPIM is disabled. Enabling/disabling is done using the [ENABLE](#) on page 344 register.

To ensure correct behavior the pins used by the SPIM must be configured in the GPIO peripheral as described in [Table 58: GPIO configuration](#) on page 339 before the SPIM is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 58: GPIO configuration**

SPI master signal	SPI master pin	Direction	Output value	Comments
SCK	As specified in PSEL.SCK	Output	Same as CONFIG.CPOL	
CSN	As specified in PSEL.CSN	Output	Same as CONFIG.CPOL	
MOSI	As specified in PSEL.MOSI	Output	0	
MISO	As specified in PSEL.MISO	Input	Not applicable	

Some SPIM instances do not have support for controlling CSN automatically. In these cases available GPIO pins needs to be used to control CSN directly. Refer to [Table 60: Instances](#) on page 341 for information about what features are supported in the various SPIM instances.

The SPIM supports SPI modes 0 through 3. The [CONFIG](#) on page 347 register allows setting CPOL and CPHA appropriately.

**Table 59: SPI modes**

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE 0 (Leading)	0 (Active High)	0 (Active High)
SPI_MODE 0 (Leading)	1 (Active Low)	1 (Active Low)
SPI_MODE 1 (Trailing)	0 (Active High)	0 (Active High)
SPI_MODE 1 (Trailing)	1 (Active Low)	1 (Active Low)

## 30.3 Shared resources

The SPI shares registers and other resources with other peripherals that have the same ID as the SPI. Therefore, the user must disable all peripherals that have the same ID as the SPI before the SPI can be configured and used.

Disabling a peripheral that has the same ID as the SPI will not reset any of the registers that are shared with the SPI. It is therefore important to configure all relevant SPI registers explicitly to secure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.

## 30.4 EasyDMA

The SPI master implements EasyDMA for reading and writing of data packets from and to the DATA RAM without CPU involvement.

The RXD.PTR and TXD.PTR point to the RXD buffer (receive buffer) and TXD buffer (transmit buffer) respectively, see [Figure 77: SPIM — SPI master with EasyDMA](#) on page 338. RXD.MAXCNT and TXD.MAXCNT specify the maximum number of bytes allocated to the buffers.

The SPI master will automatically stop transmitting after TXD.MAXCNT bytes have been transmitted and RXD.MAXCNT bytes have been received. If TXD.MAXCNT is larger than RXD.MAXCNT, the superfluous received bytes will be ignored. If RXD.MAXCNT is larger than TXD.MAXCNT, the remaining transmitted bytes will contain the value defined in the ORC register.

If the RXD.PTR and the TXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next transmission immediately after having received the STARTED event.

The ENDRX/ENDTX event indicate that EasyDMA has finished accessing respectively the RX/TX buffer in RAM. The END event gets generated when both RX and TX are finished accessing the buffers in RAM.

In the case where several AHB bus masters try to access the same AHB slave at the same time, AHB bus congestion might occur. The SPIM is such an AHB master, and when congestion occurs the SPIM might have to wait for access to RAM to be granted. If the SPIM has to wait for bus access the transaction will be temporary stalled, but resume once the SPIM is granted access to the bus. See the [AHB multilayer](#) on page 25 for more information on this subject. Note that some SPIM instances do not support this stalling mechanism. Refer to [Table 60: Instances](#) on page 341 for information about what features are supported in the various instances.

### 30.4.1 EasyDMA list

EasyDMA supports one list type.

The supported list type is:

- Array list

### EasyDMA array list

The EasyDMA array list can be represented by the data structure `ArrayList_type`.

For illustration, see the code example below. This data structure includes only a buffer with size equal to `Channel.MAXCNT`. EasyDMA will use the `Channel.MAXCNT` register to determine when the buffer is full. Replace 'Channel' by the specific data channel you want to use, for instance 'NRF\_SPIM->RXD', 'NRF\_SPIM->TXD', 'NRF\_TWIM->RXD', etc.

The `Channel.MAXCNT` register cannot be specified larger than the actual size of the buffer. If `Channel.MAXCNT` is specified larger than the size of the buffer, the EasyDMA channel may overflow the buffer.

This array list does not provide a mechanism to explicitly specify where the next item in the list is located. Instead, it assumes that the list is organized as a linear array where items are located one after the other in RAM.

```
#define BUFFER_SIZE 4

typedef struct ArrayList
{
    uint8_t buffer[BUFFER_SIZE];
} ArrayList_type;

ArrayList_type MyArrayList[3];

//replace 'Channel' below by the specific data channel you want to use,
//      for instance 'NRF_SPIM->RXD', 'NRF_TWIM->RXD', etc.
Channel.MAXCNT = BUFFER_SIZE;
Channel.PTR = &MyArrayList;
```

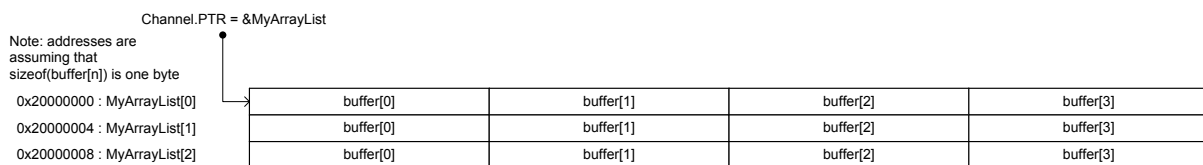


Figure 79: EasyDMA array list

## 30.5 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 30.6 Registers

Table 60: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPIM	SPIM0	SPI master 0	Not supported: > 8 Mbps data rate, IFTIMING.x registers, hardware CSN control (PSEL.CSN), stalling mechanism during AHB bus contention

Base address	Peripheral	Instance	Description	Configuration
0x40004000	SPIM	SPIM1	SPI master 1	Not supported: > 8 Mbps data rate, IFTIMING.x registers, hardware CSN control (PSEL.CSN), stalling mechanism during AHB bus contention
0x40023000	SPIM	SPIM2	SPI master 2	Not supported: > 8 Mbps data rate, IFTIMING.x registers, hardware CSN control (PSEL.CSN), stalling mechanism during AHB bus contention
0x4002B000	SPIM	SPIM3	SPI master 3	

**Table 61: Register Overview**

Register	Offset	Description
TASKS_START	0x010	Start SPI transaction
TASKS_STOP	0x014	Stop SPI transaction
TASKS_SUSPEND	0x01C	Suspend SPI transaction
TASKS_RESUME	0x020	Resume SPI transaction
EVENTS_STOPPED	0x104	SPI transaction has stopped
EVENTS_ENDRX	0x110	End of RXD buffer reached
EVENTS_END	0x118	End of RXD buffer and TXD buffer reached
EVENTS_ENDTX	0x120	End of TXD buffer reached
EVENTS_STARTED	0x14C	Transaction started
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
STALLSTAT	0x400	Stall status for EasyDMA RAM accesses. The fields in this register is set to STALL by hardware whenever a stall occurs and can be cleared (set to NOSTALL) by the CPU.
ENABLE	0x500	Enable SPIM
PSEL.SCK	0x508	Pin select for SCK
PSEL.MOSI	0x50C	Pin select for MOSI signal
PSEL.MISO	0x510	Pin select for MISO signal
PSEL.CSN	0x514	Pin select for CSN
FREQUENCY	0x524	SPI frequency. Accuracy depends on the HFCLK source selected.
RXD.PTR	0x534	Data pointer
RXD.MAXCNT	0x538	Maximum number of bytes in receive buffer
RXD.AMOUNT	0x53C	Number of bytes transferred in the last transaction
RXD.LIST	0x540	EasyDMA list type
TXD.PTR	0x544	Data pointer
TXD.MAXCNT	0x548	Number of bytes in transmit buffer
TXD.AMOUNT	0x54C	Number of bytes transferred in the last transaction
TXD.LIST	0x550	EasyDMA list type
CONFIG	0x554	Configuration register
IFTIMING.RXDELAY	0x560	Sample delay for input serial data on MISO
IFTIMING.CSNDUR	0x564	Minimum duration between edge of CSN and edge of SCK and minimum duration CSN must stay high between transactions
ORC	0x5C0	Byte transmitted after TXD.MAXCNT bytes have been transmitted in the case when RXD.MAXCNT is greater than TXD.MAXCNT

### 30.6.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	END_START			Shortcut between END event and START task																														







## Pin select for SCK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
Id				C																								B					A					A					A									
Reset 0xFFFFFFFF				1																								1					1					1					1					1				
Id	RW	Field	Value Id	Value				Description																																												
A	RW	PIN		[0..31]				Pin number																																												
B	RW	PORT		[0..1]				Port number																																												
C	RW	CONNECT						Connection																																												
			Disconnected	1				Disconnect																																												
			Connected	0				Connect																																												

## 30.6.7 PSEL.MOSI

Address offset: 0x50C

### Pin select for MOSI signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																										B	A	A	A	A	
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PIN		[0..31]		Pin number																													
B	RW	PORT		[0..1]		Port number																													
C	RW	CONNECT				Connection																													
			Disconnected	1		Disconnect																													
			Connected	0		Connect																													

## 30.6.8 PSEL.MISO

Address offset: 0x510

### Pin select for MISO signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																										B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PIN		[0..31]		Pin number																													
B	RW	PORT		[0..1]		Port number																													
C	RW	CONNECT				Connection																													
			Disconnected	1		Disconnect																													
			Connected	0		Connect																													

## 30.6.9 PSEL.CSN

Address offset: 0x514

### Pin select for CSN

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id				C																								B					A					A					A				
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1											
Id	RW	Field	Value Id	Value				Description																																							
A	RW	PIN		[0..31]				Pin number																																							
B	RW	PORT		[0..1]				Port number																																							
C	RW	CONNECT						Connection																																							
			Disconnected	1				Disconnect																																							
			Connected	0				Connect																																							

## 30.6.10 FREQUENCY

Address offset: 0x524

SPI frequency. Accuracy depends on the HFCLK source selected.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x04000000				0 0 0 0 0 0 1 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	FREQUENCY			SPI master data rate																														
			K125	0x02000000	125 kbps																														
			K250	0x04000000	250 kbps																														
			K500	0x08000000	500 kbps																														
			M1	0x10000000	1 Mbps																														
			M2	0x20000000	2 Mbps																														
			M4	0x40000000	4 Mbps																														
			M8	0x80000000	8 Mbps																														
			M16	0x0A000000	16 Mbps																														
			M32	0x14000000	32 Mbps																														

### 30.6.11 RXD.PTR

Address offset: 0x534

Data pointer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PTR			Data pointer																														

### 30.6.12 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				A A																																
Reset 0x00000000				0 0																																
Id	RW	Field	Value Id	Value	Description																															
A	RW	MAXCNT			Maximum number of bytes in receive buffer																															

### 30.6.13 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	AMOUNT			Number of bytes transferred in the last transaction																														

### 30.6.14 RXD.LIST

Address offset: 0x540

EasyDMA list type

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	LIST			List type																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
			Disabled	0		Disable EasyDMA list																													
			ArrayList	1		Use array list																													

### 30.6.15 TXD.PTR

Address offset: 0x544

Data pointer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	PTR				Data pointer																										

### 30.6.16 TXD.MAXCNT

Address offset: 0x548

Number of bytes in transmit buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in transmit buffer																													

### 30.6.17 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	R	AMOUNT						Number of bytes transferred in the last transaction																											

### 30.6.18 TXD.LIST

Address offset: 0x550

EasyDMA list type

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																															A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	LIST				List type																										
			Disabled	0		Disable EasyDMA list																										
			ArrayList	1		Use array list																										

### 30.6.19 CONFIG

Address offset: 0x554

Configuration register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ORDER				Bit order																																
			MsbFirst	0	Most significant bit shifted out first																																	
			LsbFirst	1	Least significant bit shifted out first																																	
B	RW	CPHA				Serial clock (SCK) phase																																
			Leading	0	Sample on leading edge of clock, shift serial data on trailing edge																																	
			Trailing	1	Sample on trailing edge of clock, shift serial data on leading edge																																	
C	RW	CPOL				Serial clock (SCK) polarity																																
			ActiveHigh	0	Active high																																	
			ActiveLow	1	Active low																																	

### 30.6.20 IFTIMING.RXDELAY

Address offset: 0x560

Sample delay for input serial data on MISO

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	RXDELAY	[7..0]			Sample delay for input serial data on MISO. The value specifies the number of 64 MHz clock cycles (15.625 ns) delay from the the sampling edge of SCK (leading edge for CONFIG.CPHA = 0, trailing edge for CONFIG.CPHA = 1) until the input serial data is sampled. As an example, if RXDELAY = 0 and CONFIG.CPHA = 0, the input serial data is sampled on the rising edge of SCK.																																

### 30.6.21 IFTIMING.CSNDUR

Address offset: 0x564

Minimum duration between edge of CSN and edge of SCK and minimum duration CSN must stay high between transactions

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																													A					A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	Value		Description																																	
A	RW	CSNDUR			[0xFF..0]		Minimum duration between edge of CSN and edge of SCK and minimum duration CSN must stay high between transactions.  The value is specified in number of 64 MHz clock cycles (15.625 ns).																																	

### 30.6.22 ORC

Address offset: 0x5C0

Byte transmitted after TXD.MAXCNT bytes have been transmitted in the case when RXD.MAXCNT is greater than TXD.MAXCNT

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																
Id																																		A	A	A	A	A	A	A	A											
Reset 0x00000000					0																								0					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																																												
A	RW	ORC						Byte transmitted after TXD.MAXCNT bytes have been transmitted in the case when RXD.MAXCNT is greater than TXD.MAXCNT.																																												

## 30.7 Electrical specification

### 30.7.1 Current consumption

Symbol	Description	Min.	Typ.	Max.	Units
$I_{SPIM,2Mbps}$	Run current for SPIM, 2 Mbps		50		$\mu A$
$I_{SPIM,8Mbps}$	Run current for SPIM, 8 Mbps		50		$\mu A$
$I_{SPIM,16Mbps}$	Run current for SPIM, 16 Mbps	..	..	..	$\mu A$
$I_{SPIM,32Mbps}$	Run current for SPIM, 32 Mbps	..	..	..	$\mu A$
$I_{SPIM,IDLE}$	Idle current for SPIM (STARTed, no CSN activity)		1		$\mu A$


### 30.7.2 Timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{SPIM}$	Bit rates for SPIM <sup>21</sup>			8 <sup>22</sup>	Mbps
$t_{SPIM,START}$	Time from START task to transmission started		1		$\mu s$
$t_{SPIM,CSCK}$	SCK period	125			ns
$t_{SPIM,RSCK,LD}$	SCK rise time, standard drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPIM,RSCK,HD}$	SCK rise time, high drive <sup>a</sup>			$t_{HRF,25pF}$	
$t_{SPIM,FSCK,LD}$	SCK fall time, standard drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPIM,FSCK,HD}$	SCK fall time, high drive <sup>a</sup>			$t_{HRF,25pF}$	
$t_{SPIM,WHCK}$	SCK high time <sup>a</sup>	$(0.5 * t_{CSCK})$ – $t_{RSCK}$			
$t_{SPIM,WLCK}$	SCK low time <sup>a</sup>	$(0.5 * t_{CSCK})$ – $t_{FSCK}$			
$t_{SPIM,SUMI}$	MISO to CLK edge setup time	19			ns
$t_{SPIM,HMI}$	CLK edge to MISO hold time	18			ns
$t_{SPIM,VMO}$	CLK edge to MOSI valid			59	ns
$t_{SPIM,HMO}$	MOSI hold time after CLK edge	20			ns

<sup>21</sup> High bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>22</sup> The actual maximum data rate depends on the slave's CLK to MISO and MOSI setup and hold timings.


<sup>a</sup> At 25pF load, including GPIO pin capacitance, see GPIO spec.

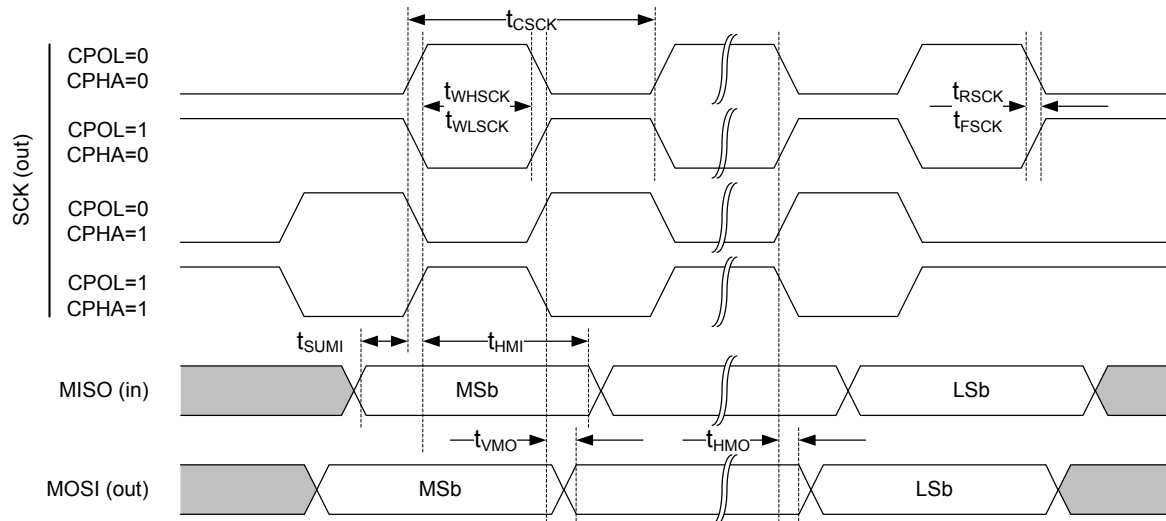

**Figure 80: SPIM timing diagram**

## 31 SPIS — Serial peripheral interface slave with EasyDMA

SPI slave (SPIS) is implemented with EasyDMA support for ultra low power serial communication from an external SPI master. EasyDMA in conjunction with hardware-based semaphore mechanisms removes all real-time requirements associated with controlling the SPI slave from a low priority CPU execution context.

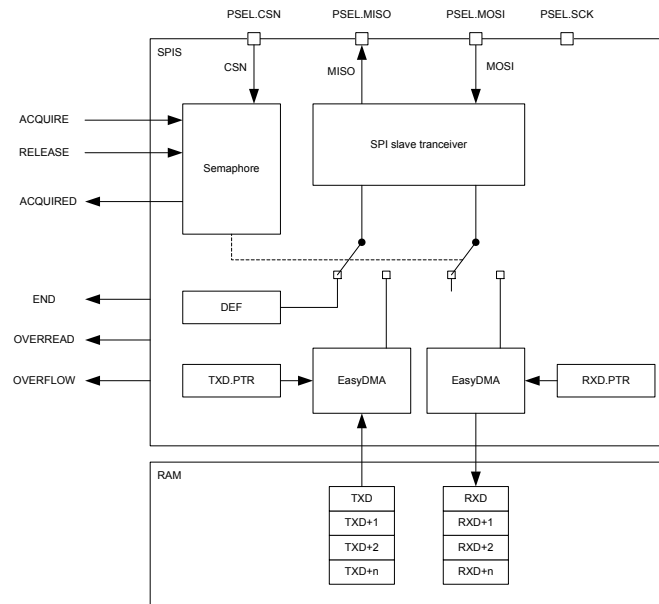

**Figure 81: SPI slave**

The SPIS supports SPI modes 0 through 3. The CONFIG register allows setting CPOL and CPHA appropriately.

**Table 62: SPI modes**

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE0	0 (Leading)	0 (Active High)
SPI_MODE1	0 (Leading)	1 (Active Low)
SPI_MODE2	1 (Trailing)	0 (Active High)
SPI_MODE3	1 (Trailing)	1 (Active Low)

### 31.1 Shared resources

The SPI slave shares registers and other resources with other peripherals that have the same ID as the SPI slave. Therefore, you must disable all peripherals that have the same ID as the SPI slave before the SPI slave can be configured and used.

Disabling a peripheral that has the same ID as the SPI slave will not reset any of the registers that are shared with the SPI slave. It is important to configure all relevant SPI slave registers explicitly to secure that it operates correctly.

The Instantiation table in [Instantiation](#) on page 23 shows which peripherals have the same ID as the SPI slave.

### 31.2 EasyDMA

The SPI slave implements EasyDMA for reading and writing to and from the RAM. The END event indicates that EasyDMA has finished accessing the buffer in RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

### 31.3 SPI slave operation

SPI slave uses two memory pointers, RXD.PTR and TXD.PTR, that point to the RXD buffer (receive buffer) and TXD buffer (transmit buffer) respectively. Since these buffers are located in RAM, which can be accessed by both the SPI slave and the CPU, a hardware based semaphore mechanism is implemented to enable safe sharing.

See [Figure 82: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 353.

Before the CPU can safely update the RXD.PTR and TXD.PTR pointers it must first acquire the SPI semaphore. The CPU can acquire the semaphore by triggering the ACQUIRE task and then receiving the ACQUIRED event. When the CPU has updated the RXD.PTR and TXD.PTR pointers the CPU must release the semaphore before the SPI slave will be able to acquire it. The CPU releases the semaphore by triggering the RELEASE task. This is illustrated in [Figure 82: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 353. Triggering the RELEASE task when the semaphore is not granted to the CPU will have no effect.

The semaphore mechanism does not, at any time, prevent the CPU from performing read or write access to the RXD.PTR register, the TXD.PTR registers, or the RAM that these pointers are pointing to. The semaphore is only telling when these can be updated by the CPU so that safe sharing is achieved.

The semaphore is by default assigned to the CPU after the SPI slave is enabled. No ACQUIRED event will be generated for this initial semaphore handover. An ACQUIRED event will be generated immediately if the ACQUIRE task is triggered while the semaphore is assigned to the CPU.

The SPI slave will try to acquire the semaphore when CSN goes low. If the SPI slave does not manage to acquire the semaphore at this point, the transaction will be ignored. This means that all incoming data on MOSI will be discarded, and the DEF (default) character will be clocked out on the MISO line throughout the whole transaction. This will also be the case even if the semaphore is released by the CPU during the transaction. In case of a race condition where the CPU and the SPI slave try to acquire the semaphore at the same time, as illustrated in lifeline item 2 in [Figure 82: SPI transaction when shortcut between END and ACQUIRE is enabled](#) on page 353, the semaphore will be granted to the CPU.

If the SPI slave acquires the semaphore, the transaction will be granted. The incoming data on MOSI will be stored in the RXD buffer and the data in the TXD buffer will be clocked out on MISO.

When a granted transaction is completed and CSN goes high, the SPI slave will automatically release the semaphore and generate the END event.

As long as the semaphore is available the SPI slave can be granted multiple transactions one after the other. If the CPU is not able to reconfigure the TXD.PTR and RXD.PTR between granted transactions, the same TX data will be clocked out and the RX buffers will be overwritten. To prevent this from happening, the END\_ACQUIRE shortcut can be used. With this shortcut enabled the semaphore will be handed over to the CPU automatically after the granted transaction has completed, giving the CPU the ability to update the TXPTR and RXPTR between every granted transaction.

If the CPU tries to acquire the semaphore while it is assigned to the SPI slave, an immediate handover will not be granted. However, the semaphore will be handed over to the CPU as soon as the SPI slave has released the semaphore after the granted transaction is completed. If the END\_ACQUIRE shortcut is enabled and the CPU has triggered the ACQUIRE task during a granted transaction, only one ACQUIRE request will be served following the END event.

The MAXRX register specifies the maximum number of bytes the SPI slave can receive in one granted transaction. If the SPI slave receives more than MAXRX number of bytes, an OVERFLOW will be indicated in the STATUS register and the incoming bytes will be discarded.

The MAXTX parameter specifies the maximum number of bytes the SPI slave can transmit in one granted transaction. If the SPI slave is forced to transmit more than MAXTX number of bytes, an OVERREAD will be indicated in the STATUS register and the ORC character will be clocked out.



The RXD.AMOUNT and TXD.AMOUNT registers are updated when a granted transaction is completed. The TXD.AMOUNT register indicates how many bytes were read from the TX buffer in the last transaction, that is, ORC (over-read) characters are not included in this number. Similarly, the RXD.AMOUNT register indicates how many bytes were written into the RX buffer in the last transaction.

The ENDRX event is generated when the RX buffer has been filled.

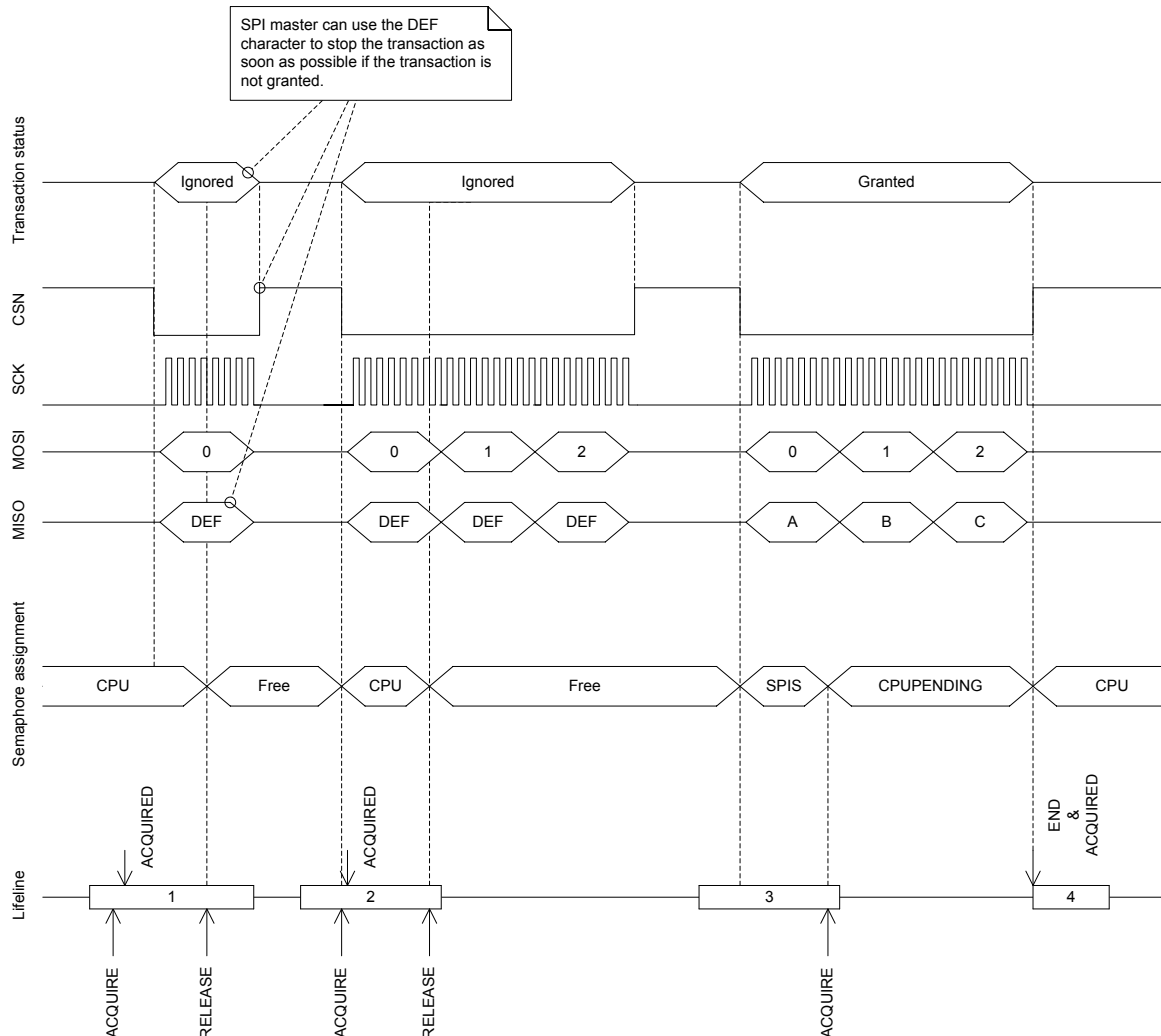


Figure 82: SPI transaction when shortcut between END and ACQUIRE is enabled

## 31.4 Pin configuration

The CSN, SCK, MOSI, and MISO signals associated with the SPI slave are mapped to physical pins according to the configuration specified in the PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers respectively. If the CONNECT field of any of these registers is set to Disconnected, the associated SPI slave signal will not be connected to any physical pins.

The PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers and their configurations are only used as long as the SPI slave is enabled, and retained only as long as the device is in System ON mode, see [POWER — Power supply](#) on page 67 chapter for more information about power modes. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.CSN, PSEL.SCK, PSEL.MOSI, and PSEL.MISO must only be configured when the SPI slave is disabled.

To secure correct behavior in the SPI slave, the pins used by the SPI slave must be configured in the GPIO peripheral as described in [Table 63: GPIO configuration before enabling peripheral](#) on page 354 before enabling the SPI slave. This is to secure that the pins used by the SPI slave are driven correctly if the SPI

slave itself is temporarily disabled, or if the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected I/Os as long as the SPI slave is to be recognized by an external SPI master.

The MISO line is set in high impedance as long as the SPI slave is not selected with CSN.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 63: GPIO configuration before enabling peripheral**

SPI signal	SPI pin	Direction	Output value	Comment
CSN	As specified in PSEL.CSN	Input	Not applicable	
SCK	As specified in PSEL.SCK	Input	Not applicable	
MOSI	As specified in PSEL.MOSI	Input	Not applicable	
MISO	As specified in PSEL.MISO	Input	Not applicable	Emulates that the SPI slave is not selected.

## 31.5 Registers

**Table 64: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPIS	SPIS0	SPI slave 0	
0x40004000	SPIS	SPIS1	SPI slave 1	
0x40023000	SPIS	SPIS2	SPI slave 2	

**Table 65: Register Overview**

Register	Offset	Description	
TASKS_ACQUIRE	0x024	Acquire SPI semaphore	
TASKS_RELEASE	0x028	Release SPI semaphore, enabling the SPI slave to acquire it	
EVENTS_END	0x104	Granted transaction completed	
EVENTS_ENDRX	0x110	End of RXD buffer reached	
EVENTS_ACQUIRED	0x128	Semaphore acquired	
<i>SHORTS</i>	0x200	Shortcut register	
<i>INTENSET</i>	0x304	Enable interrupt	
<i>INTENCLR</i>	0x308	Disable interrupt	
<i>SEMSTAT</i>	0x400	Semaphore status register	
<i>STATUS</i>	0x440	Status from last transaction	
<i>ENABLE</i>	0x500	Enable SPI slave	
<i>PSELSCK</i>	0x508	Pin select for SCK	Deprecated
<i>PSELMISO</i>	0x50C	Pin select for MISO	Deprecated
<i>PSELMOSI</i>	0x510	Pin select for MOSI	Deprecated
<i>PSELCSN</i>	0x514	Pin select for CSN	Deprecated
<i>PSEL.SCK</i>	0x508	Pin select for SCK	
<i>PSEL.MISO</i>	0x50C	Pin select for MISO signal	
<i>PSEL.MOSI</i>	0x510	Pin select for MOSI signal	
<i>PSEL.CSN</i>	0x514	Pin select for CSN signal	
<i>RXDPTR</i>	0x534	RXD data pointer	Deprecated
<i>MAXRX</i>	0x538	Maximum number of bytes in receive buffer	Deprecated
<i>AMOUNTRX</i>	0x53C	Number of bytes received in last granted transaction	Deprecated
<i>RXD.PTR</i>	0x534	RXD data pointer	
<i>RXD.MAXCNT</i>	0x538	Maximum number of bytes in receive buffer	
<i>RXD.AMOUNT</i>	0x53C	Number of bytes received in last granted transaction	
<i>TXDPTR</i>	0x544	TXD data pointer	Deprecated
<i>MAXTX</i>	0x548	Maximum number of bytes in transmit buffer	Deprecated
<i>AMOUNTTX</i>	0x54C	Number of bytes transmitted in last granted transaction	Deprecated
<i>TXD.PTR</i>	0x544	TXD data pointer	
<i>TXD.MAXCNT</i>	0x548	Maximum number of bytes in transmit buffer	
<i>TXD.AMOUNT</i>	0x54C	Number of bytes transmitted in last granted transaction	
<i>CONFIG</i>	0x554	Configuration register	

Register	Offset	Description
<i>DEF</i>	0x55C	Default character. Character clocked out in case of an ignored transaction.
<i>ORC</i>	0x5C0	Over-read character

### 31.5.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	END_ACQUIRE				Shortcut between END event and ACQUIRE task																									
						See <a href="#">EVENTS_END</a> and <a href="#">TASKS_ACQUIRE</a>																									
			Disabled	0		Disable shortcut																									
			Enabled	1		Enable shortcut																									

### 31.5.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																					C				B				A							
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	END				Write '1' to Enable interrupt for END event																														
			Set	1		See <a href="#">EVENTS_END</a>																														
			Disabled	0		Read: Disabled																														
			Enabled	1		Read: Enabled																														
B	RW	ENDRX				Write '1' to Enable interrupt for ENDRX event																														
			Set	1		See <a href="#">EVENTS_ENDRX</a>																														
			Disabled	0		Read: Disabled																														
			Enabled	1		Read: Enabled																														
C	RW	ACQUIRED				Write '1' to Enable interrupt for ACQUIRED event																														
			Set	1		See <a href="#">EVENTS_ACQUIRED</a>																														
			Disabled	0		Read: Disabled																														
			Enabled	1		Read: Enabled																														

### 31.5.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	ENDRX				Write '1' to Disable interrupt for ENDRX event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																				C				B				A							
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_ENDRX</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	ACQUIRED				Write '1' to Disable interrupt for ACQUIRED event																													
						See <a href="#">EVENTS_ACQUIRED</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 31.5.4 SEMSTAT

Address offset: 0x400

Semaphore status register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
Id	RW	Field	Value Id	Value	Description																																
A	R	SEMSTAT			Semaphore status																																
			Free	0	Semaphore is free																																
			CPU	1	Semaphore is assigned to CPU																																
			SPIS	2	Semaphore is assigned to SPI slave																																
			CPUPending	3	Semaphore is assigned to SPI but a handover to the CPU is pending																																

### 31.5.5 STATUS

Address offset: 0x440

Status from last transaction

Individual bits are cleared by writing a '1' to the bits that shall be cleared

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				B A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	OVERREAD				TX buffer over-read detected, and prevented																												
			NotPresent	0	Read: error not present																													
			Present	1	Read: error present																													
			Clear	1	Write: clear error on writing '1'																													
B	RW	OVERFLOW				RX buffer overflow detected, and prevented																												
			NotPresent	0	Read: error not present																													
			Present	1	Read: error present																													
			Clear	1	Write: clear error on writing '1'																													

### 31.5.6 ENABLE

Address offset: 0x500

Enable SPI slave

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable SPI slave																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value		Description																													
			Disabled	0		Disable SPI slave																													
			Enabled	2		Enable SPI slave																													

### 31.5.7 PSELSCK ( Deprecated )

Address offset: 0x508

Pin select for SCK

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PSELSCK		[0..31]		Pin number configuration for SPI SCK signal																													
			Disconnected	0xFFFFFFFF		Disconnect																													

### 31.5.8 PSELMISO ( Deprecated )

Address offset: 0x50C

Pin select for MISO

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	RW	PSELMISO		[0..31]				Pin number configuration for SPI MISO signal																											
			Disconnected	0xFFFFFFFF				Disconnect																											

### 31.5.9 PSELMOSI ( Deprecated )

Address offset: 0x510

Pin select for MOSI

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	RW	PSELMOSI		[0..31]				Pin number configuration for SPI MOSI signal																											
			Disconnected	0xFFFFFFFF				Disconnect																											

### 31.5.10 PSELCSN ( Deprecated )

Address offset: 0x514

Pin select for CSN

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value				Description																											
A	RW	PSELCSN		[0..31]				Pin number configuration for SPI CSN signal																											
			Disconnected	0xFFFFFFFF				Disconnect																											

### 31.5.11 PSEL.SCK

Address offset: 0x508

Pin select for SCK

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					C																										B				A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PIN			[0..31]	Pin number																																
B	RW	PORT			[0..1]	Port number																																
C	RW	CONNECT				Connection																																
			Disconnected		1	Disconnect																																
			Connected		0	Connect																																

### 31.5.12 PSEL.MISO

Address offset: 0x50C

Pin select for MISO signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected		1		Disconnect																													
			Connected		0		Connect																													

### 31.5.13 PSEL.MOSI

Address offset: 0x510

Pin select for MOSI signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected		1		Disconnect																													
			Connected		0		Connect																													

### 31.5.14 PSEL.CSN

Address offset: 0x514

Pin select for CSN signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected		1		Disconnect																													
			Connected		0		Connect																													

### 31.5.15 RXDPTR ( Deprecated )

Address offset: 0x534

RXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value			Description																											
A	RW	RXDPTR							RXD data pointer																											

### 31.5.16 MAXRX ( Deprecated )

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXRX				Maximum number of bytes in receive buffer																													

### 31.5.17 AMOUNTRX ( Deprecated )

Address offset: 0x53C

Number of bytes received in last granted transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNTRX				Number of bytes received in the last granted transaction																													

### 31.5.18 RXD.PTR

Address offset: 0x534

RXD data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	PTR							RXD data pointer																										

### 31.5.19 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in receive buffer																													

### 31.5.20 RXD.AMOUNT

Address offset: 0x53C

Number of bytes received in last granted transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes received in the last granted transaction																													

### 31.5.21 TXDPTR ( Deprecated )

Address offset: 0x544

TXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	TXDPTR						TXD data pointer																												

### 31.5.22 MAXTX ( Deprecated )

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXTX				Maximum number of bytes in transmit buffer																													

### 31.5.23 AMOUNTTX ( Deprecated )

Address offset: 0x54C

Number of bytes transmitted in last granted transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNTTX				Number of bytes transmitted in last granted transaction																													

### 31.5.24 TXD.PTR

Address offset: 0x544

TXD data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PTR				TXD data pointer																														

### 31.5.25 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in transmit buffer																													

### 31.5.26 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transmitted in last granted transaction



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transmitted in last granted transaction																													

### 31.5.27 CONFIG

Address offset: 0x554

Configuration register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																					C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	ORDER				Bit order																																	
			MsbFirst	0		Most significant bit shifted out first																																	
			LsbFirst	1		Least significant bit shifted out first																																	
B	RW	CPHA				Serial clock (SCK) phase																																	
			Leading	0		Sample on leading edge of clock, shift serial data on trailing edge																																	
			Trailing	1		Sample on trailing edge of clock, shift serial data on leading edge																																	
C	RW	CPOL				Serial clock (SCK) polarity																																	
			ActiveHigh	0		Active high																																	
			ActiveLow	1		Active low																																	

### 31.5.28 DEF

Address offset: 0x55C

Default character. Character clocked out in case of an ignored transaction.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																												A					A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field		Value Id				Value				Description																										
A	RW	DEF										Default character. Character clocked out in case of an ignored transaction.																										

### 31.5.29 ORC

Address offset: 0x5C0

Over-read character

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ORC				Over-read character. Character clocked out after an over-read of the transmit buffer.																													

## 31.6 Electrical specification

### 31.6.1 SPIS slave interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{SPIS}}$	Bit rates for SPIS <sup>23</sup>			8 <sup>24</sup>	Mbps
$I_{\text{SPIS},2\text{Mbps}}$	Run current for SPIS, 2 Mbps		45		$\mu\text{A}$
$I_{\text{SPIS},8\text{Mbps}}$	Run current for SPIS, 8 Mbps		45		$\mu\text{A}$
$I_{\text{SPIS},\text{IDLE}}$	Idle current for SPIS (STARTed, no CSN activity)		1		$\mu\text{A}$
$t_{\text{SPIS},\text{START}}$	Time from RELEASE task to receive/transmit (CSN active)		0.125		$\mu\text{s}$

### 31.6.2 Serial Peripheral Interface Slave (SPIS) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{SPIS},\text{CSCKIN}}$	SCK input period	125			ns
$t_{\text{SPIS},\text{RFSCCKIN}}$	SCK input rise/fall time			30	ns
$t_{\text{SPIS},\text{WHSCCKIN}}$	SCK input high time	30			ns
$t_{\text{SPIS},\text{WLSCKIN}}$	SCK input low time	30			ns
$t_{\text{SPIS},\text{SUCSN}}$	CSN to CLK setup time	1000			ns
$t_{\text{SPIS},\text{HCSN}}$	CLK to CSN hold time	2000			ns
$t_{\text{SPIS},\text{ASA}}$	CSN to MISO driven	0			ns
$t_{\text{SPIS},\text{ASO}}$	CSN to MISO valid <sup>a</sup>			1000	ns
$t_{\text{SPIS},\text{DISSO}}$	CSN to MISO disabled <sup>a</sup>			68	ns
$t_{\text{SPIS},\text{CWH}}$	CSN inactive time	300			ns
$t_{\text{SPIS},\text{VSO}}$	CLK edge to MISO valid			19	ns
$t_{\text{SPIS},\text{HSO}}$	MISO hold time after CLK edge	18 <sup>25</sup>			ns
$t_{\text{SPIS},\text{SUSI}}$	MOSI to CLK edge setup time	59			ns
$t_{\text{SPIS},\text{HSI}}$	CLK edge to MOSI hold time	20			ns

<sup>23</sup> High bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>24</sup> The actual maximum data rate depends on the master's CLK to MISO and MOSI setup and hold timings.

<sup>a</sup> At 25pF load, including GPIO capacitance, see GPIO spec.

<sup>25</sup> This is to ensure compatibility to SPI masters sampling MISO on the same edge as MOSI is output

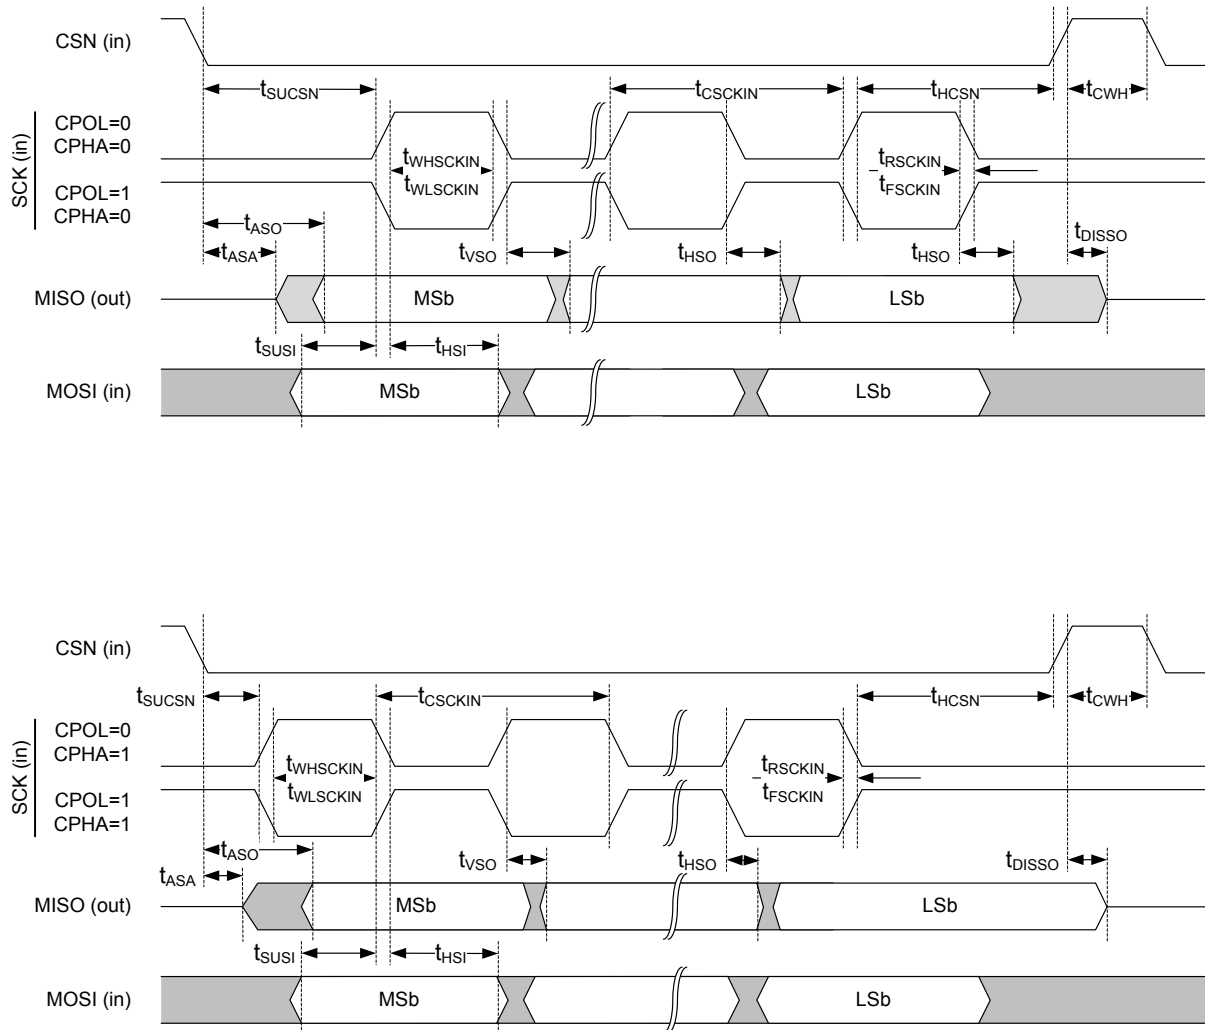


Figure 83: SPIS timing diagram

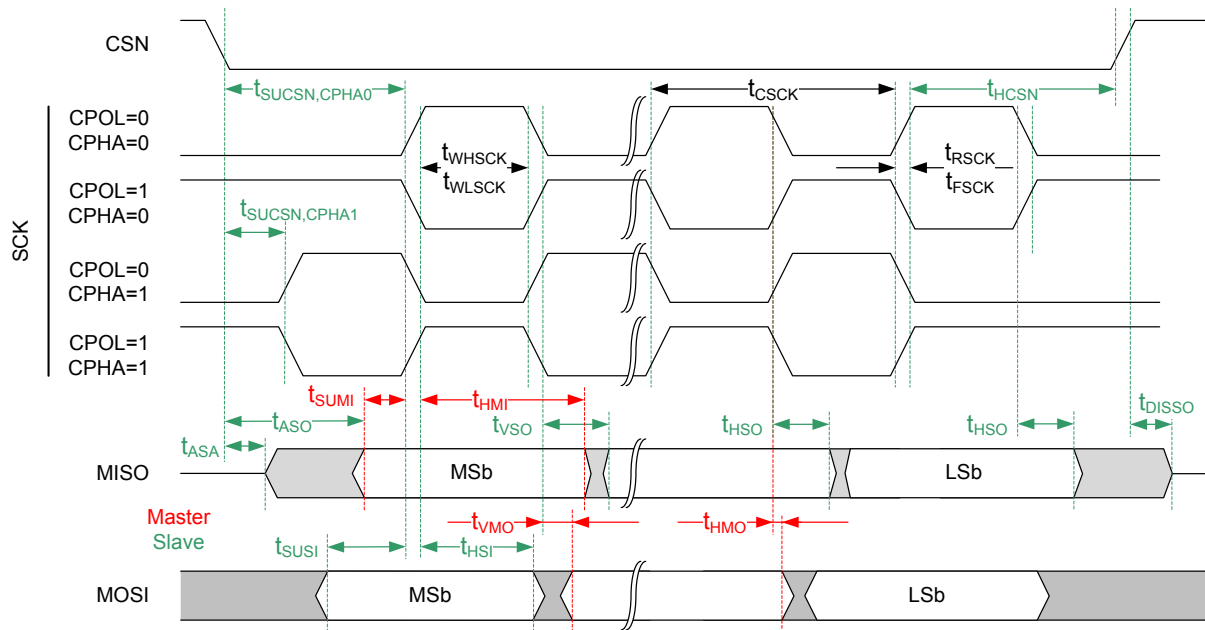


Figure 84: Common SPIM and SPIS timing diagram

## 32 TWIM — I<sup>2</sup>C compatible two-wire interface master with EasyDMA


TWI master with EasyDMA (TWIM) is a two-wire half-duplex master which can communicate with multiple slave devices connected to the same bus

Listed here are the main features for TWIM:

- I<sup>2</sup>C compatible
- 100 kbps, 250 kbps, or 400 kbps
- Support for clock stretching
- EasyDMA


The two-wire interface can communicate with a bi-directional wired-AND bus with two lines (SCL, SDA). The protocol makes it possible to interconnect up to 127 individually addressable devices. TWIM is not compatible with CBUS.

The GPIOs used for each two-wire interface line can be chosen from any GPIO on the device and are independently configurable. This enables great flexibility in device pinout and efficient use of board space and signal routing.

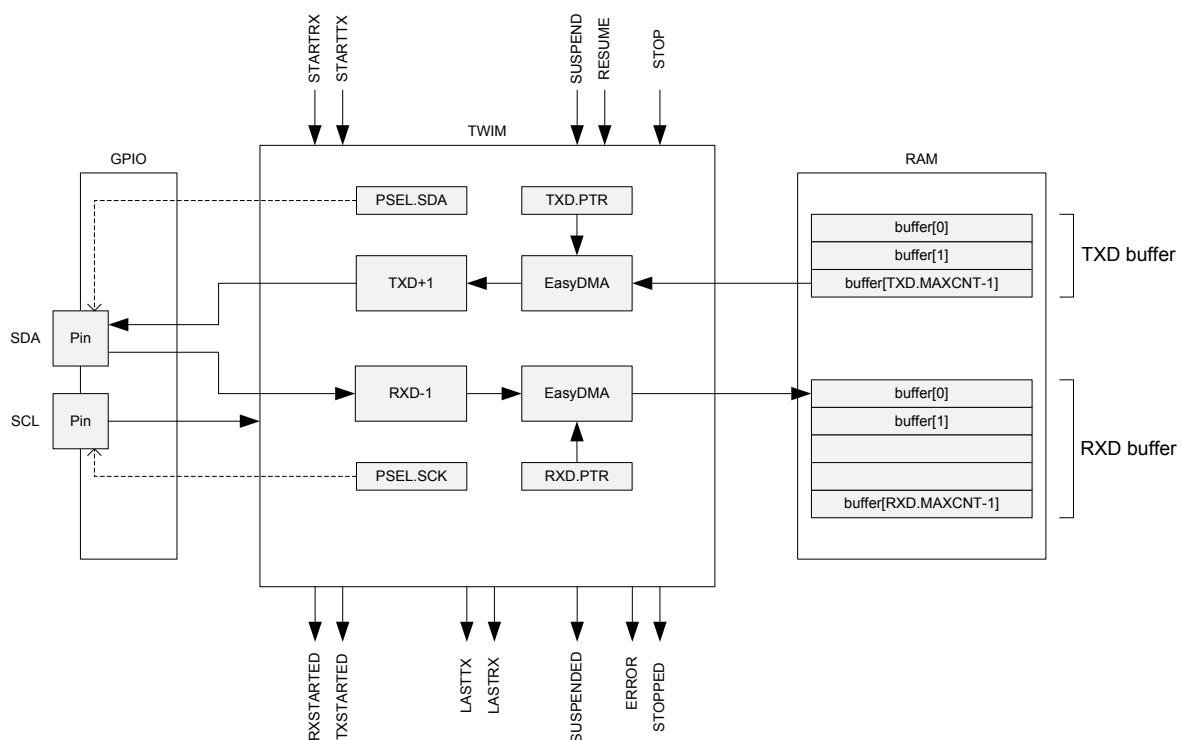

**Figure 85: TWI master with EasyDMA**

A typical TWI setup consists of one master and one or more slaves. For an example, see [Figure 86: A typical TWI setup comprising one master and three slaves](#) on page 365. This TWIM is only able to operate as a single master on the TWI bus. Multi-master bus configuration is not supported.

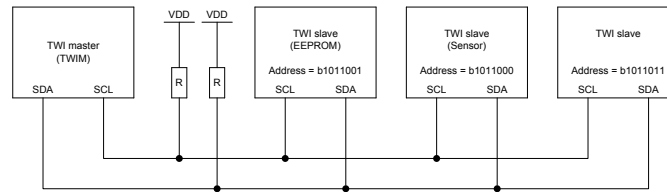

**Figure 86: A typical TWI setup comprising one master and three slaves**

This TWI master supports clock stretching performed by the slaves. The TWI master is started by triggering the STARTTX or STARTRX tasks, and stopped by triggering the STOP task. The TWI master will generate a STOPPED event when it has stopped following a STOP task.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

After the TWI master is started, the STARTTX task or the STARTRX task should not be triggered again before the TWI master has stopped, i.e. following a LASTRX, LASTTX or STOPPED event.

If a NACK is clocked in from the slave, the TWI master will generate an ERROR event.

## 32.1 Shared resources

The TWI master shares registers and other resources with other peripherals that have the same ID as the TWI master. Therefore, you must disable all peripherals that have the same ID as the TWI master before the TWI master can be configured and used.

Disabling a peripheral that has the same ID as the TWI master will not reset any of the registers that are shared with the TWI master. It is therefore important to configure all relevant registers explicitly to secure that the TWI master operates correctly.

The Instantiation table in [Instantiation](#) on page 23 shows which peripherals have the same ID as the TWI.

## 32.2 EasyDMA

The TWI master implements EasyDMA for reading and writing to and from the RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next RX/TX transmission immediately after having received the RXSTARTED/TXSTARTED event.

The STOPPED event indicates that EasyDMA has finished accessing the buffer in RAM.

## 32.3 Master write sequence


A TWI master write sequence is started by triggering the STARTTX task. After the STARTTX task has been triggered, the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1).

The address must match the address of the slave device that the master wants to write to. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) generated by the slave.

After receiving the ACK bit, the TWI master will clock out the data bytes found in the transmit buffer located in RAM at the address specified in the TXD.PTR register. Each byte clocked out from the master will be followed by an ACK/NACK bit clocked in from the slave.

A typical TWI master write sequence is illustrated in [Figure 87: TWI master writing data to a slave](#) on page 366. Occurrence 2 in the figure illustrates clock stretching performed by the TWI master following a SUSPEND task.

A SUSPENDED event indicates that the SUSPEND task has taken effect; this event can be used to synchronize the software.

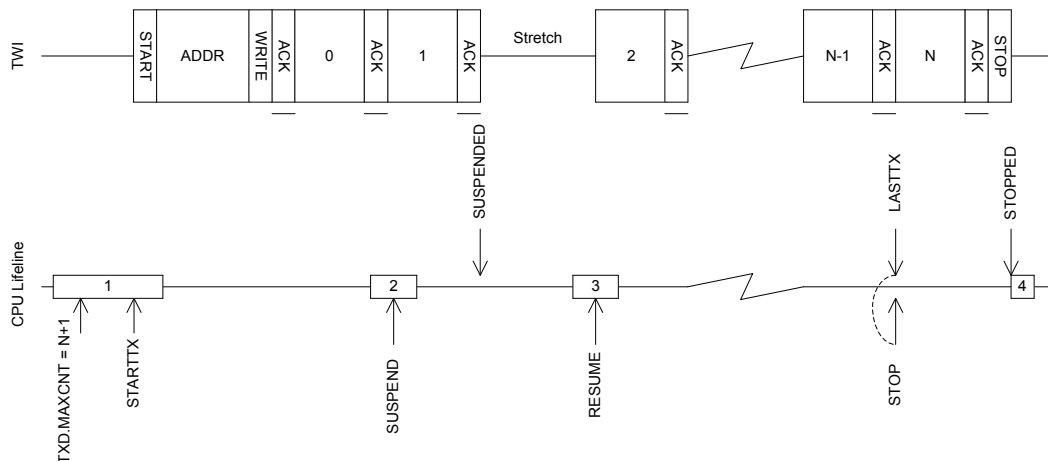

**Figure 87: TWI master writing data to a slave**

The TWI master will generate a LASTTX event when it starts to transmit the last byte, this is illustrated in [Figure 87: TWI master writing data to a slave](#) on page 366

The TWI master is stopped by triggering the STOP task, this task should be triggered during the transmission of the last byte to secure that the TWI will stop as fast as possible after sending the last byte. It is safe to use the shortcut between LASTTX and STOP to accomplish this.

Note that the TWI master does not stop by itself when the whole RAM buffer has been sent, or when an error occurs. The STOP task must be issued, through the use of a local or PPI shortcut, or in software as part of the error handler.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

## 32.4 Master read sequence

A TWI master read sequence is started by triggering the STARTRX task. After the STARTRX task has been triggered the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE = 0, READ = 1). The address must match the address of the slave device that the master wants to read from. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK = 1) generated by the slave.

After having sent the ACK bit the TWI slave will send data to the master using the clock generated by the master.

Data received will be stored in RAM at the address specified in the RXD.PTR register. The TWI master will generate an ACK after all but the last byte received from the slave. The TWI master will generate a NACK after the last byte received to indicate that the read sequence shall stop.

A typical TWI master read sequence is illustrated in [Figure 88: The TWI master reading data from a slave](#) on page 367. Occurrence 2 in the figure illustrates clock stretching performed by the TWI master following a SUSPEND task.


A SUSPENDED event indicates that the SUSPEND task has taken effect; this event can be used to synchronize the software.

The TWI master will generate a LASTRX event when it is ready to receive the last byte, this is illustrated in [Figure 88: The TWI master reading data from a slave](#) on page 367. If RXD.MAXCNT > 1 the LASTRX event is generated after sending the ACK of the previously received byte. If RXD.MAXCNT = 1 the LASTRX event is generated after receiving the ACK following the address and READ bit.

The TWI master is stopped by triggering the STOP task, this task must be triggered before the NACK bit is supposed to be transmitted. The STOP task can be triggered at any time during the reception of the last byte. It is safe to use the shortcut between LASTRX and STOP to accomplish this.

Note that the TWI master does not stop by itself when the RAM buffer is full, or when an error occurs. The STOP task must be issued, through the use of a local or PPI shortcut, or in software as part of the error handler.

The TWI master cannot get stopped while it is suspended, so the STOP task has to be issued after the TWI master has been resumed.

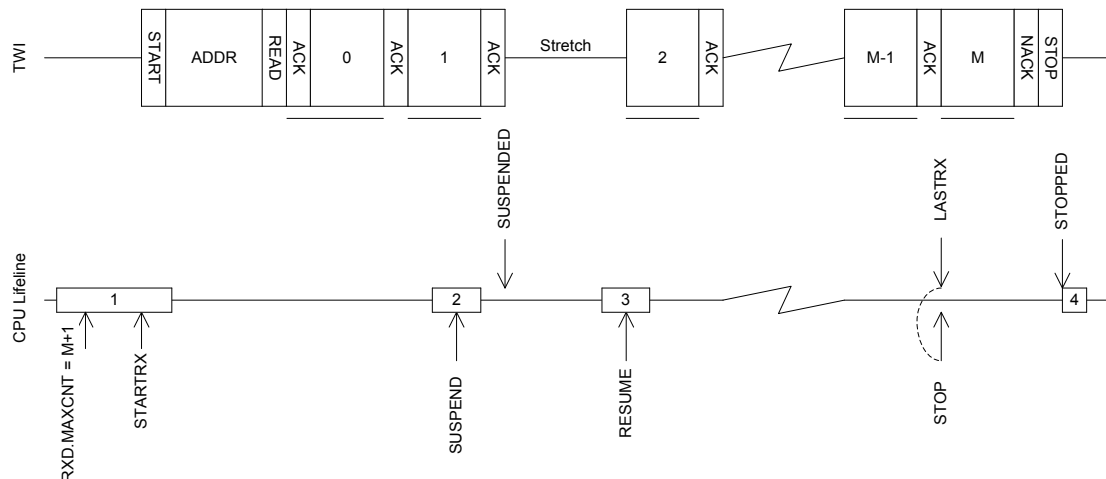


**Figure 88: The TWI master reading data from a slave**

## 32.5 Master repeated start sequence

A typical repeated start sequence is one in which the TWI master writes two bytes to the slave followed by reading four bytes from the slave. This example uses shortcuts to perform the simplest type of repeated start sequence, i.e. one write followed by one read. The same approach can be used to perform a repeated start sequence where the sequence is read followed by write.


The figure [Figure 89: A repeated start sequence, where the TWI master writes two bytes followed by reading 4 bytes from the slave](#) on page 367 illustrates this:

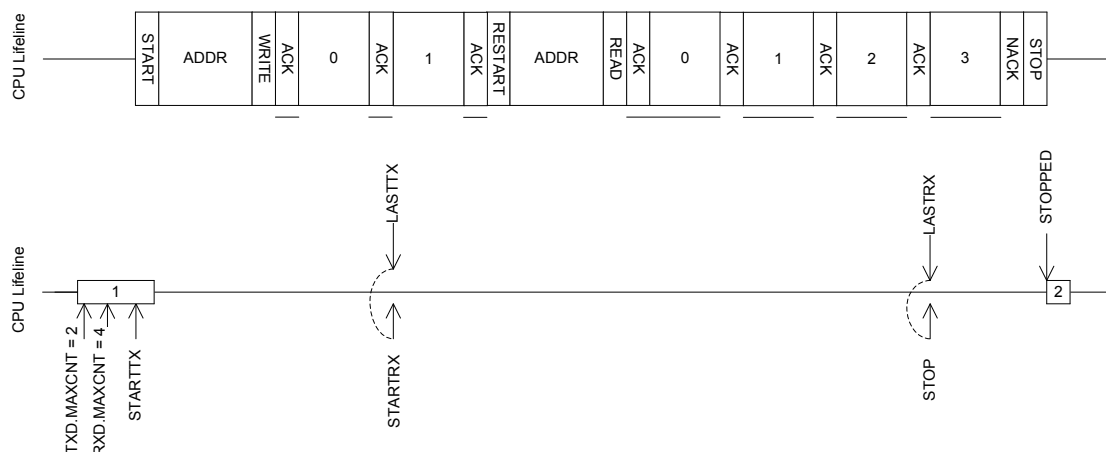

**Figure 89: A repeated start sequence, where the TWI master writes two bytes followed by reading 4 bytes from the slave**

If a more complex repeated start sequence is needed and the TWI firmware driver is serviced in a low priority interrupt it may be necessary to use the SUSPEND task and SUSPENDED event to guarantee that the

correct tasks are generated at the correct time. This is illustrated in [Figure 90: A double repeated start sequence using the SUSPEND task to secure safe operation in low priority interrupts](#) on page 368.

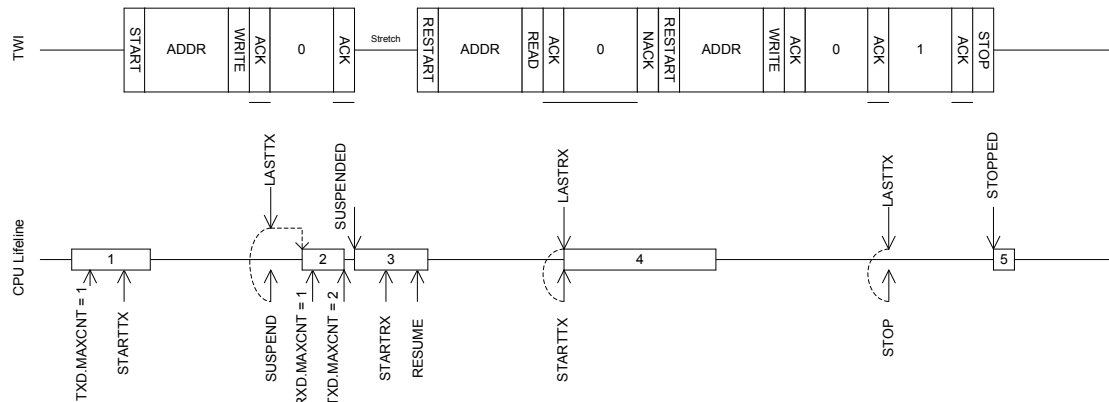

**Figure 90: A double repeated start sequence using the SUSPEND task to secure safe operation in low priority interrupts**

## 32.6 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 32.7 Master mode pin configuration

The SCL and SDA signals associated with the TWI master are mapped to physical pins according to the configuration specified in the PSEL.SCL and PSEL.SDA registers respectively.

The PSEL.SCL and PSEL.SDA registers and their configurations are only used as long as the TWI master is enabled, and retained only as long as the device is in ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.SCL, PSEL.SDA must only be configured when the TWI master is disabled.

To secure correct signal levels on the pins used by the TWI master when the system is in OFF mode, and when the TWI master is disabled, these pins must be configured in the GPIO peripheral as described in [Table 66: GPIO configuration before enabling peripheral](#) on page 368.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 66: GPIO configuration before enabling peripheral**

TWI master signal	TWI master pin	Direction	Output value	Drive strength
SCL	As specified in PSEL.SCL	Input	Not applicable	S0D1
SDA	As specified in PSEL.SDA	Input	Not applicable	S0D1

## 32.8 Registers

**Table 67: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWIM	TWIM0	Two-wire interface master 0	
0x40004000	TWIM	TWIM1	Two-wire interface master 1	



**Table 68: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start TWI receive sequence
TASKS_STARTTX	0x008	Start TWI transmit sequence
TASKS_STOP	0x014	Stop TWI transaction. Must be issued while the TWI master is not suspended.
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_ERROR	0x124	TWI error
EVENTS_SUSPENDED	0x148	Last byte has been sent out after the SUSPEND task has been issued, TWI traffic is now suspended.
EVENTS_RXSTARTED	0x14C	Receive sequence started
EVENTS_TXSTARTED	0x150	Transmit sequence started
EVENTS_LASTRX	0x15C	Byte boundary, starting to receive the last byte
EVENTS_LASTTX	0x160	Byte boundary, starting to transmit the last byte
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4C4	Error source
ENABLE	0x500	Enable TWIM
PSEL_SCL	0x508	Pin select for SCL signal
PSEL_SDA	0x50C	Pin select for SDA signal
FREQUENCY	0x524	TWI frequency. Accuracy depends on the HFCLK source selected.
RXD_PTR	0x534	Data pointer
RXD_MAXCNT	0x538	Maximum number of bytes in receive buffer
RXD_AMOUNT	0x53C	Number of bytes transferred in the last transaction
RXD_LIST	0x540	EasyDMA list type
TXD_PTR	0x544	Data pointer
TXD_MAXCNT	0x548	Maximum number of bytes in transmit buffer
TXD_AMOUNT	0x54C	Number of bytes transferred in the last transaction
TXD_LIST	0x550	EasyDMA list type
ADDRESS	0x588	Address used in the TWI transfer

### 32.8.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														F				D				C				B				A								
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	LASTTX_STARTRX				Shortcut between LASTTX event and STARTRX task																																
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_STARTRX</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
B	RW	LASTTX_SUSPEND				Shortcut between LASTTX event and SUSPEND task																																
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_SUSPEND</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
C	RW	LASTTX_STOP				Shortcut between LASTTX event and STOP task																																
						See <a href="#">EVENTS_LASTTX</a> and <a href="#">TASKS_STOP</a>																																
			Disabled		0	Disable shortcut																																
			Enabled		1	Enable shortcut																																
D	RW	LASTRX_STARTTX				Shortcut between LASTRX event and STARTTX task																																
						See <a href="#">EVENTS_LASTRX</a> and <a href="#">TASKS_STARTTX</a>																																
			Disabled		0	Disable shortcut																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																		F				D				C				B				A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																															
			Enabled		1	Enable shortcut																															
F	RW	LASTRX_STOP				Shortcut between LASTRX event and STOP task																															
						See <a href="#">EVENTS_LASTRX</a> and <a href="#">TASKS_STOP</a>																															
			Disabled		0	Disable shortcut																															
			Enabled		1	Enable shortcut																															

## 32.8.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														J	I	H				G	F					D								A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	STOPPED				Enable or disable interrupt for STOPPED event																																
						See <a href="#">EVENTS_STOPPED</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
D	RW	ERROR				Enable or disable interrupt for ERROR event																																
						See <a href="#">EVENTS_ERROR</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
F	RW	SUSPENDED				Enable or disable interrupt for SUSPENDED event																																
						See <a href="#">EVENTS_SUSPENDED</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
G	RW	RXSTARTED				Enable or disable interrupt for RXSTARTED event																																
						See <a href="#">EVENTS_RXSTARTED</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
H	RW	TXSTARTED				Enable or disable interrupt for TXSTARTED event																																
						See <a href="#">EVENTS_TXSTARTED</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
I	RW	LASTRX				Enable or disable interrupt for LASTRX event																																
						See <a href="#">EVENTS_LASTRX</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																
J	RW	LASTTX				Enable or disable interrupt for LASTTX event																																
						See <a href="#">EVENTS_LASTTX</a>																																
			Disabled	0		Disable																																
			Enabled	1		Enable																																

## 32.8.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				J I H G F D A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
D	RW	ERROR				Write '1' to Enable interrupt for ERROR event																													
						See <a href="#">EVENTS_ERROR</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
F	RW	SUSPENDED				Write '1' to Enable interrupt for SUSPENDED event																													
						See <a href="#">EVENTS_SUSPENDED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
G	RW	RXSTARTED				Write '1' to Enable interrupt for RXSTARTED event																													
						See <a href="#">EVENTS_RXSTARTED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
H	RW	TXSTARTED				Write '1' to Enable interrupt for TXSTARTED event																													
						See <a href="#">EVENTS_TXSTARTED</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
I	RW	LASTRX				Write '1' to Enable interrupt for LASTRX event																													
						See <a href="#">EVENTS_LASTRX</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
J	RW	LASTTX				Write '1' to Enable interrupt for LASTTX event																													
						See <a href="#">EVENTS_LASTTX</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 32.8.4 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id															J	I					H	G	F											D					A	0
Reset 0x00000000					0										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																																	
A	RW	STOPPED					Write '1' to Disable interrupt for STOPPED event																																	
							See <a href="#">EVENTS_STOPPED</a>																																	
			Clear	1			Disable																																	
			Disabled	0			Read: Disabled																																	
			Enabled	1			Read: Enabled																																	
D	RW	ERROR					Write '1' to Disable interrupt for ERROR event																																	
							See <a href="#">EVENTS_ERROR</a>																																	

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																														
Id														J	I											H	G	F											D											A
Reset 0x00000000				0 0																																														
Id	RW	Field	Value	Id	Value	Description																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										
F	RW	SUSPENDED							Write '1' to Disable interrupt for SUSPENDED event																																									
						See <a href="#">EVENTS_SUSPENDED</a>																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										
G	RW	RXSTARTED							Write '1' to Disable interrupt for RXSTARTED event																																									
						See <a href="#">EVENTS_RXSTARTED</a>																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										
H	RW	TXSTARTED							Write '1' to Disable interrupt for TXSTARTED event																																									
						See <a href="#">EVENTS_TXSTARTED</a>																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										
I	RW	LASTRX							Write '1' to Disable interrupt for LASTRX event																																									
						See <a href="#">EVENTS_LASTRX</a>																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										
J	RW	LASTTX							Write '1' to Disable interrupt for LASTTX event																																									
						See <a href="#">EVENTS_LASTTX</a>																																												
						Clear	1	Disable																																										
						Disabled	0	Read: Disabled																																										
						Enabled	1	Read: Enabled																																										

### 32.8.5 ERRORSRC

Address offset: 0x4C4

### Error source

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	C	B	A
Id	RW	Field	Value	Id	Value	Description																															
A	RW	OVERRUN				Overrun error																															
						A new byte was received before previous byte got transferred into RXD buffer. (Previous data is lost)																															
			NotReceived	0		Error did not occur																															
			Received	1		Error occurred																															
B	RW	ANACK				NACK received after sending the address (write '1' to clear)																															
			NotReceived	0		Error did not occur																															
			Received	1		Error occurred																															
C	RW	DNACK				NACK received after sending a data byte (write '1' to clear)																															
			NotReceived	0		Error did not occur																															
			Received	1		Error occurred																															

### 32.8.6 ENABLE

Address offset: 0x500



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	PTR						Data pointer																											

### 32.8.11 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	MAXCNT		[1..255]	Maximum number of bytes in receive buffer																														

### 32.8.12 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																												A	A	A	A	A	A	A	A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value												Description																							
A	R	AMOUNT														Number of bytes transferred in the last transaction. In case of NACK error, includes the NACK'ed byte.																							

### 32.8.13 RXD.LIST

Address offset: 0x540

EasyDMA list type

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	LIST			List type																														
			Disabled	0	Disable EasyDMA list																														
			ArrayList	1	Use array list																														

### 32.8.14 TXD.PTR

Address offset: 0x544

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value			Description																												
A	RW	PTR					Data pointer																												

### 32.8.15 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[1..255]	Maximum number of bytes in transmit buffer																													

### 32.8.16 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction. In case of NACK error, includes the NACK'ed byte.																													

### 32.8.17 TXD.LIST

Address offset: 0x550

EasyDMA list type

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A					
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	LIST				List type																													
			Disabled	0		Disable EasyDMA list																													
			ArrayList	1		Use array list																													

### 32.8.18 ADDRESS

Address offset: 0x588

Address used in the TWI transfer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																															A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field		Value	Id	Value					Description																											
A	RW	ADDRESS									Address used in the TWI transfer																											

## 32.9 Electrical specification

### 32.9.1 TWIM interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWIM,SCL</sub>	Bit rates for TWIM <sup>26</sup>	100		400	kbps
I <sub>TWIM,100kbps</sub>	Run current for TWIM, 100 kbps		50		μA
I <sub>TWIM,400kbps</sub>	Run current for TWIM, 400 kbps		50		μA
t <sub>TWIM,START</sub>	Time from STARTRX/STARTTX task to transmission started		1.5		μs

### 32.9.2 Two Wire Interface Master (TWIM) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TWIM,SU_DAT</sub>	Data setup time before positive edge on SCL – all modes	300			ns
t <sub>TWIM,HD_DAT</sub>	Data hold time after negative edge on SCL – all modes	500			ns

<sup>26</sup> High bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{TWIM,HD\_STA,100kbps}$	TWIM master hold time for START and repeated START condition, 100 kbps	10000			ns
$t_{TWIM,HD\_STA,250kbps}$	TWIM master hold time for START and repeated START condition, 250kbps	4000			ns
$t_{TWIM,HD\_STA,400kbps}$	TWIM master hold time for START and repeated START condition, 400 kbps	2500			ns
$t_{TWIM,SU\_STO,100kbps}$	TWIM master setup time from SCL high to STOP condition, 100 kbps	5000			ns
$t_{TWIM,SU\_STO,250kbps}$	TWIM master setup time from SCL high to STOP condition, 250 kbps	2000			ns
$t_{TWIM,SU\_STO,400kbps}$	TWIM master setup time from SCL high to STOP condition, 400 kbps	1250			ns
$t_{TWIM,BUF,100kbps}$	TWIM master bus free time between STOP and START conditions, 100 kbps	5800			ns
$t_{TWIM,BUF,250kbps}$	TWIM master bus free time between STOP and START conditions, 250 kbps	2700			ns
$t_{TWIM,BUF,400kbps}$	TWIM master bus free time between STOP and START conditions, 400 kbps	2100			ns

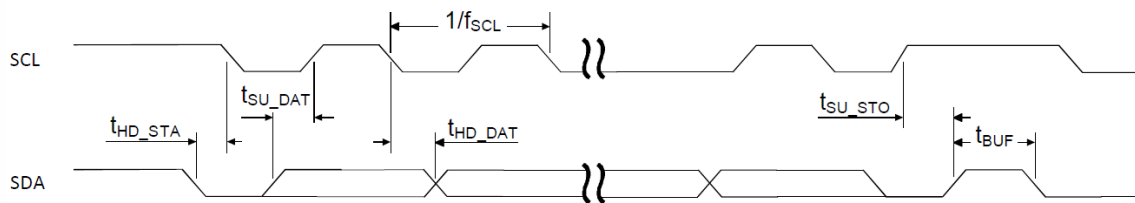


Figure 91: TWIM timing diagram, 1 byte transaction

## 32.10 Pullup resistor

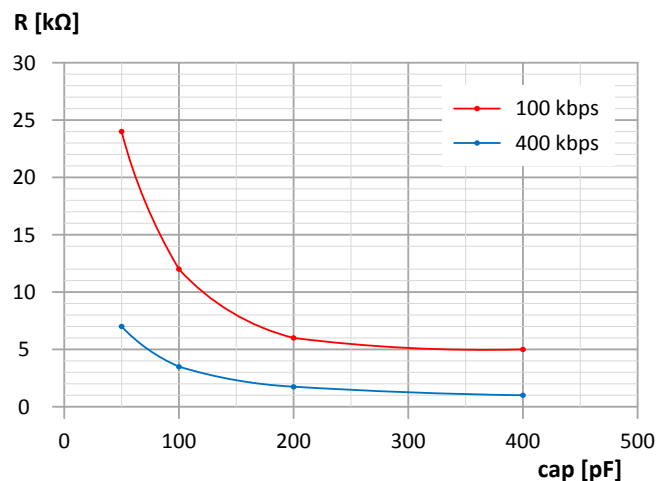



Figure 92: Recommended TWIM pullup value vs. line capacitance

- The I2C specification allows a line capacitance of 400 pF at most.
- The value of internal pullup resistor ( $R_{PU}$ ) for nRF52840 can be found in the [GPIO — General purpose input/output](#) on page 155 section.




## 33 TWIS — I<sup>2</sup>C compatible two-wire interface slave with EasyDMA

TWI slave with EasyDMA (TWIS) is compatible with I<sup>2</sup>C operating at 100 kHz and 400 kHz. The TWI transmitter and receiver implement EasyDMA.

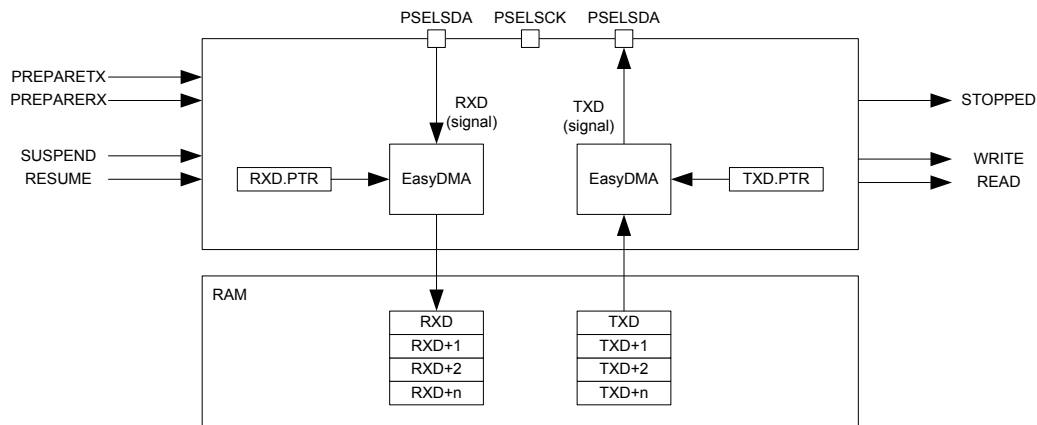

**Figure 93: TWI slave with EasyDMA**

A typical TWI setup consists of one master and one or more slaves. For an example, see [Figure 94: A typical TWI setup comprising one master and three slaves](#) on page 377. TWIS is only able to operate with a single master on the TWI bus.

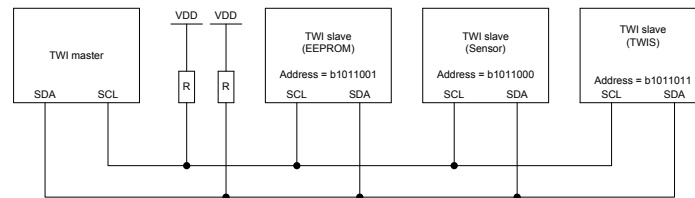

**Figure 94: A typical TWI setup comprising one master and three slaves**

The TWI slave state machine is illustrated in [Figure 95: TWI slave state machine](#) on page 378 and [Table 69: TWI slave state machine symbols](#) on page 378 is explaining the different symbols used in the state machine.

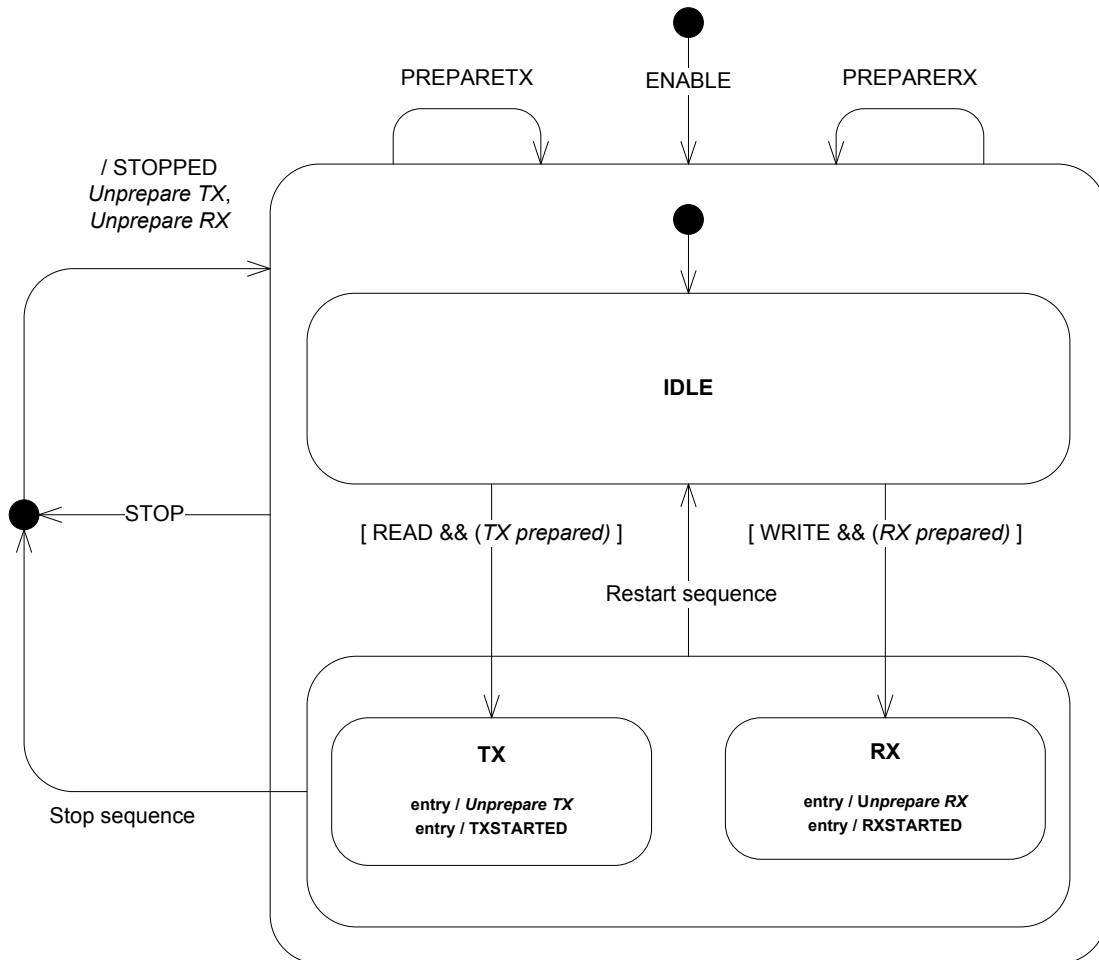


Figure 95: TWI slave state machine

Table 69: TWI slave state machine symbols

Symbol	Type	Description
ENABLE	Register	The TWI slave has been enabled via the <a href="#">ENABLE</a> register
PREPARETX	Task	The <a href="#">TASKS_PREPARETX</a> task has been triggered
STOP	Task	The <a href="#">TASKS_STOP</a> task has been triggered
PREPARERX	Task	The <a href="#">TASKS_PREPARERX</a> task has been triggered
STOPPED	Event	The <a href="#">EVENTS_STOPPED</a> event was generated
RXSTARTED	Event	The <a href="#">EVENTS_RXSTARTED</a> event was generated
TXSTARTED	Event	The <a href="#">EVENTS_TXSTARTED</a> event was generated
TX prepared	Internal	Internal flag indicating that a <a href="#">TASKS_PREPARETX</a> task has been triggered. This flag is not visible to the user.
RX prepared	Internal	Internal flag indicating that a <a href="#">TASKS_PREPARERX</a> task has been triggered. This flag is not visible to the user.
Unprepare TX	Internal	Clears the internal 'TX prepared' flag until next <a href="#">TASKS_PREPARETX</a> task.
Unprepare RX	Internal	Clears the internal 'RX prepared' flag until next <a href="#">TASKS_PREPARERX</a> task.
Stop sequence	TWI protocol	A TWI stop sequence was detected
Restart sequence	TWI protocol	A TWI restart sequence was detected

The TWI slave supports clock stretching performed by the master.

The TWI slave operates in a low power mode while waiting for a TWI master to initiate a transfer. As long as the TWI slave is not addressed, it will remain in this low power mode.

To secure correct behaviour of the TWI slave, PSEL.SCL, PSEL.SDA, CONFIG and the ADDRESS[n] registers, must be configured prior to enabling the TWI slave through the ENABLE register. Similarly, changing these settings must be performed while the TWI slave is disabled. Failing to do so may result in unpredictable behaviour.

## 33.1 Shared resources

The TWI slave shares registers and other resources with other peripherals that have the same ID as the TWI slave.

Therefore, you must disable all peripherals that have the same ID as the TWI slave before the TWI slave can be configured and used. Disabling a peripheral that has the same ID as the TWI slave will not reset any of the registers that are shared with the TWI slave. It is therefore important to configure all relevant registers explicitly to secure that the TWI slave operates correctly.

The Instantiation table in [Instantiation](#) on page 23 shows which peripherals have the same ID as the TWI slave.

## 33.2 EasyDMA

The TWI slave implements EasyDMA for reading and writing to and from the RAM.

The STOPPED event indicates that EasyDMA has finished accessing the buffer in RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

## 33.3 TWI slave responding to a read command

Before the TWI slave can respond to a read command the TWI slave must be configured correctly and enabled via the ENABLE register. When enabled the TWI slave will be in its IDLE state where it will consume I<sub>IDLE</sub>.

A read command is started when the TWI master generates a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE=0, READ=1). The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) response from the TWI slave.

The TWI slave is able to listen for up to two addresses at the same time. Which addresses to listen for is configured in the ADDRESS registers and the CONFIG register.

The TWI slave will only acknowledge (ACK) the read command if the address presented by the master matches one of the addresses the slave is configured to listen for. The TWI slave will generate a READ event when it acknowledges the read command.

The TWI slave is only able to detect a read command from the IDLE state.

The TWI slave will set an internal 'TX prepared' flag when the PREPARETX task is triggered.

When the read command is received the TWI slave will enter the TX state if the internal 'TX prepared' flag is set.

If the internal 'TX prepared' flag is not set when the read command is received, the TWI slave will stretch the master's clock until the PREPARETX task is triggered and the internal 'TX prepared' flag is set.

The TWI slave will generate the TXSTARTED event and clear the 'TX prepared' flag ('unprepare TX') when it enters the TX state. In this state the TWI slave will send the data bytes found in the transmit buffer to the master using the master's clock. The TWI slave will consume I<sub>TX</sub> in this mode.

The TWI slave will go back to the IDLE state if the TWI slave receives a restart command when it is in the TX state.

The TWI slave is stopped when it receives the stop condition from the TWI master. A STOPPED event will be generated when the transaction has stopped. The TWI slave will clear the 'TX prepared' flag ('unprepare TX') and go back to the IDLE state when it has stopped.

The transmit buffer is located in RAM at the address specified in the TXD.PTR register. The TWI slave will only be able to send TXD.MAXCNT bytes from the transmit buffer for each transaction. If the TWI master


forces the slave to send more than TXD.MAXCNT bytes, the slave will send the byte specified in the ORC register to the master instead. If this happens, an ERROR event will be generated.

The EasyDMA configuration registers, see TXD.PTR etc., are latched when the TXSTARTED event is generated.

The TWI slave can be forced to stop by triggering the STOP task. A STOPPED event will be generated when the TWI slave has stopped. The TWI slave will clear the 'TX prepared' flag and go back to the IDLE state when it has stopped, see also [Terminating an ongoing TWI transaction](#) on page 382.

Each byte sent from the slave will be followed by an ACK/NACK bit sent from the master. The TWI master will generate a NACK following the last byte that it wants to receive to tell the slave to release the bus so that the TWI master can generate the stop condition. The TXD.AMOUNT register can be queried after a transaction to see how many bytes were sent.

A typical TWI slave read command response is illustrated in [Figure 96: The TWI slave responding to a read command](#) on page 380. Occurrence 2 in the figure illustrates clock stretching performed by the TWI slave following a SUSPEND task.

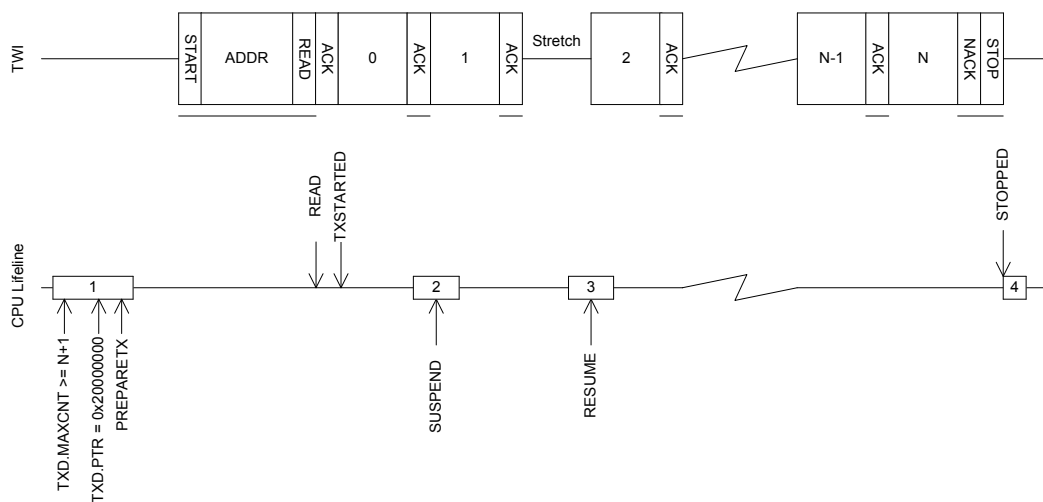

**Figure 96: The TWI slave responding to a read command**

### 33.4 TWI slave responding to a write command

Before the TWI slave can respond to a write command the TWI slave must be configured correctly and enabled via the ENABLE register. When enabled the TWI slave will be in its IDLE state where it will consume I<sub>IDLE</sub>.

A write command is started when the TWI master generates a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1). The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) response from the slave.

The TWI slave is able to listen for up to two addresses at the same time. Which addresses to listen for is configured in the ADDRESS registers and the CONFIG register.

The TWI slave will only acknowledge (ACK) the write command if the address presented by the master matches one of the addresses the slave is configured to listen for. The TWI slave will generate a WRITE event if it acknowledges the write command.

The TWI slave is only able to detect a write command from the IDLE state.

The TWI slave will set an internal 'RX prepared' flag when the PREPARERX task is triggered.

When the write command is received the TWI slave will enter the RX state if the internal 'RX prepared' flag is set.

If the internal 'RX prepared' flag is not set when the write command is received, the TWI slave will stretch the master's clock until the PREPARERX task is triggered and the internal 'RX prepared' flag is set.

The TWI slave will generate the RXSTARTED event and clear the internal 'RX prepared' flag ('unprepare RX') when it enters the RX state. In this state the TWI slave will be able to receive the bytes sent by the TWI master. The TWI slave will consume I<sub>RX</sub> in this mode.

The TWI slave will go back to the IDLE state if the TWI slave receives a restart command when it is in the RX state.

The TWI slave is stopped when it receives the stop condition from the TWI master. A STOPPED event will be generated when the transaction has stopped. The TWI slave will clear the internal 'RX prepared' flag ('unprepare RX') and go back to the IDLE state when it has stopped.


The receive buffer is located in RAM at the address specified in the TXD.PTR register. The TWI slave will only be able to receive as many bytes as specified in the RXD.MAXCNT register. If the TWI master tries to send more bytes to the slave than the slave is able to receive, these bytes will be discarded and the bytes will be NACKed by the slave. If this happens, an ERROR event will be generated.

The EasyDMA configuration registers, see RXD.PTR etc., are latched when the RXSTARTED event is generated.

The TWI slave can be forced to stop by triggering the STOP task. A STOPPED event will be generated when the TWI slave has stopped. The TWI slave will clear the internal 'RX prepared' flag and go back to the IDLE state when it has stopped, see also [Terminating an ongoing TWI transaction](#) on page 382.

The TWI slave will generate an ACK after every byte received from the master. The RXD.AMOUNT register can be queried after a transaction to see how many bytes were received.

A typical TWI slave write command response is illustrated in [Figure 97: The TWI slave responding to a write command](#) on page 381. Occurrence 2 in the figure illustrates clock stretching performed by the TWI slave following a SUSPEND task.

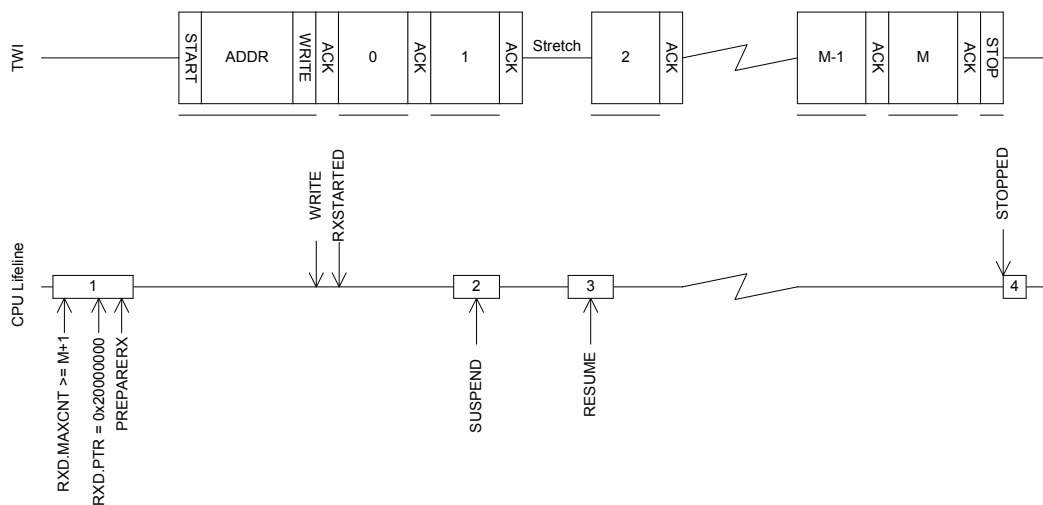


**Figure 97: The TWI slave responding to a write command**

### 33.5 Master repeated start sequence

An example of a repeated start sequence is one in which the TWI master writes two bytes to the slave followed by reading four bytes from the slave.

This is illustrated in [Figure 98: A repeated start sequence, where the TWI master writes two bytes followed by reading four bytes from the slave](#) on page 382.

It is here assumed that the receiver does not know in advance what the master wants to read, and that this information is provided in the first two bytes received in the write part of the repeated start sequence. To guarantee that the CPU is able to process the received data before the TWI slave starts to reply to the read command, the SUSPEND task is triggered via a shortcut from the READ event generated when the read command is received. When the CPU has processed the incoming data and prepared the correct data response, the CPU will resume the transaction by triggering the RESUME task.

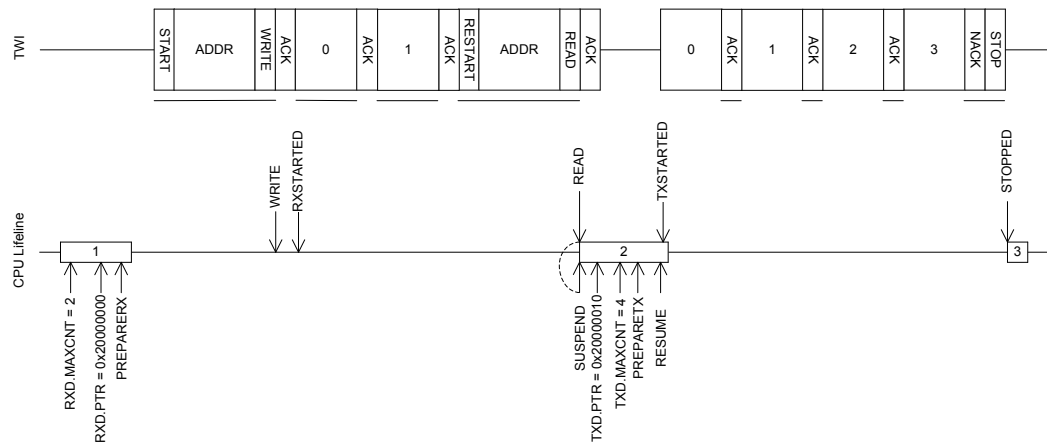

**Figure 98: A repeated start sequence, where the TWI master writes two bytes followed by reading four bytes from the slave**

### 33.6 Terminating an ongoing TWI transaction

In some situations, e.g. if the external TWI master is not responding correctly, it may be required to terminate an ongoing transaction.

This can be achieved by triggering the STOP task. In this situation a STOPPED event will be generated when the TWI has stopped independent of whether or not a STOP condition has been generated on the TWI bus. The TWI slave will release the bus when it has stopped and go back to its IDLE state.

### 33.7 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

### 33.8 Slave mode pin configuration

The SCL and SDA signals associated with the TWI slave are mapped to physical pins according to the configuration specified in the PSEL.SCL and PSEL.SDA registers respectively.

The PSEL.SCL and PSEL.SDA registers and their configurations are only used as long as the TWI slave is enabled, and retained only as long as the device is in ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register. PSEL.SCL and PSEL.SDA must only be configured when the TWI slave is disabled.

To secure correct signal levels on the pins used by the TWI slave when the system is in OFF mode, and when the TWI slave is disabled, these pins must be configured in the GPIO peripheral as described in [Table 70: GPIO configuration before enabling peripheral](#) on page 382.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 70: GPIO configuration before enabling peripheral**

TWI slave signal	TWI slave pin	Direction	Output value	Drive strength
SCL	As specified in PSEL.SCL	Input	Not applicable	S0D1
SDA	As specified in PSEL.SDA	Input	Not applicable	S0D1

## 33.9 Registers

**Table 71: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWIS	TWIS0	Two-wire interface slave 0	
0x40004000	TWIS	TWIS1	Two-wire interface slave 1	

**Table 72: Register Overview**

Register	Offset	Description
TASKS_STOP	0x014	Stop TWI transaction
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
TASKS_PREPARERX	0x030	Prepare the TWI slave to respond to a write command
TASKS_PREPARETX	0x034	Prepare the TWI slave to respond to a read command
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_ERROR	0x124	TWI error
EVENTS_RXSTARTED	0x14C	Receive sequence started
EVENTS_TXSTARTED	0x150	Transmit sequence started
EVENTS_WRITE	0x164	Write command received
EVENTS_READ	0x168	Read command received
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4D0	Error source
MATCH	0x4D4	Status register indicating which address had a match
ENABLE	0x500	Enable TWIS
PSEL_SCL	0x508	Pin select for SCL signal
PSEL_SDA	0x50C	Pin select for SDA signal
RXD_PTR	0x534	RXD Data pointer
RXD_MAXCNT	0x538	Maximum number of bytes in RXD buffer
RXD_AMOUNT	0x53C	Number of bytes transferred in the last RXD transaction
TXD_PTR	0x544	TXD Data pointer
TXD_MAXCNT	0x548	Maximum number of bytes in TXD buffer
TXD_AMOUNT	0x54C	Number of bytes transferred in the last TXD transaction
ADDRESS[0]	0x588	TWI slave address 0
ADDRESS[1]	0x58C	TWI slave address 1
CONFIG	0x594	Configuration register for the address match mechanism
ORC	0x5C0	Over-read character. Character sent out in case of an over-read of the transmit buffer.

### 33.9.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																					B A															
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	WRITE_SUSPEND				Shortcut between WRITE event and SUSPEND task																														
						See <a href="#">EVENTS_WRITE</a> and <a href="#">TASKS_SUSPEND</a>																														
			Disabled	0		Disable shortcut																														
			Enabled	1		Enable shortcut																														
B	RW	READ_SUSPEND				Shortcut between READ event and SUSPEND task																														
						See <a href="#">EVENTS_READ</a> and <a href="#">TASKS_SUSPEND</a>																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

### 33.9.2 INTEN

Address offset: 0x300

## Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				H G								F E								B								A										
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	STOPPED			Enable or disable interrupt for STOPPED event																																	
					See <a href="#">EVENTS_STOPPED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
B	RW	ERROR			Enable or disable interrupt for ERROR event																																	
					See <a href="#">EVENTS_ERROR</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
E	RW	RXSTARTED			Enable or disable interrupt for RXSTARTED event																																	
					See <a href="#">EVENTS_RXSTARTED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
F	RW	TXSTARTED			Enable or disable interrupt for TXSTARTED event																																	
					See <a href="#">EVENTS_TXSTARTED</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
G	RW	WRITE			Enable or disable interrupt for WRITE event																																	
					See <a href="#">EVENTS_WRITE</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	
H	RW	READ			Enable or disable interrupt for READ event																																	
					See <a href="#">EVENTS_READ</a>																																	
			Disabled	0	Disable																																	
			Enabled	1	Enable																																	

### 33.9.3 INTENSET

Address offset: 0x304

### Enable interrupt

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id											H		G				F		E										B				A			
Reset 0x00000000			0 0																																	
Id	RW	Field	Value Id	Value	Description																															
A	RW	STOPPED			Write '1' to Enable interrupt for STOPPED event																															
					See <a href="#">EVENTS_STOPPED</a>																															
			Set	1	Enable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
B	RW	ERROR			Write '1' to Enable interrupt for ERROR event																															



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				H G								F E								B								A							
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_ERROR</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	RXSTARTED			Write '1' to Enable interrupt for RXSTARTED event																														
					See <a href="#">EVENTS_RXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	TXSTARTED			Write '1' to Enable interrupt for TXSTARTED event																														
					See <a href="#">EVENTS_TXSTARTED</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
G	RW	WRITE			Write '1' to Enable interrupt for WRITE event																														
					See <a href="#">EVENTS_WRITE</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
H	RW	READ			Write '1' to Enable interrupt for READ event																														
					See <a href="#">EVENTS_READ</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 33.9.4 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																			
Id				H G																F E								B								A			
Reset 0x00000000				0 0																																			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	STOPPED			Write '1' to Disable interrupt for STOPPED event																																		
					See <a href="#">EVENTS_STOPPED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
B	RW	ERROR			Write '1' to Disable interrupt for ERROR event																																		
					See <a href="#">EVENTS_ERROR</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
E	RW	RXSTARTED			Write '1' to Disable interrupt for RXSTARTED event																																		
					See <a href="#">EVENTS_RXSTARTED</a>																																		
			Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
F	RW	TXSTARTED			Write '1' to Disable interrupt for TXSTARTED event																																		
					See <a href="#">EVENTS_TXSTARTED</a>																																		
			Clear	1	Disable																																		

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					H								G		F								E		B								A				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																														
G	RW	WRITE	Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
			Write '1' to Disable interrupt for WRITE event																																		
			See <a href="#">EVENTS_WRITE</a>																																		
			Clear	1	Disable																																
H	RW	READ	Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
			Write '1' to Disable interrupt for READ event																																		
			See <a href="#">EVENTS_READ</a>																																		
			Clear	1	Disable																																
H	RW	READ	Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																

### 33.9.5 ERRORSRC

Address offset: 0x4D0

Error source

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																																					C			B		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field		Value Id	Value	Description																																					
A	RW	OVERFLOW				RX buffer overflow detected, and prevented																																					
			NotDetected	0	Error did not occur																																						
			Detected	1	Error occurred																																						
B	RW	DNACK				NACK sent after receiving a data byte																																					
			NotReceived	0	Error did not occur																																						
			Received	1	Error occurred																																						
C	RW	OVERREAD				TX buffer over-read detected, and prevented																																					
			NotDetected	0	Error did not occur																																						
			Detected	1	Error occurred																																						

### 33.9.6 MATCH

Address offset: 0x4D4

Status register indicating which address had a match

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id					A																																			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id		Value		Description																																	
A	R	MATCH			[0..1]		Which of the addresses in {ADDRESS} matched the incoming address																																	

### 33.9.7 ENABLE

Address offset: 0x500

Enable TWIS

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable TWIS																													
			Disabled	0	Disable TWIS																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
			Enabled	9			Enable TWIS																												

### 33.9.8 PSEL.SCL

Address offset: 0x508

Pin select for SCL signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PIN			[0..31]	Pin number																														
B	RW	PORT			[0..1]	Port number																														
C	RW	CONNECT				Connection																														
			Disconnected	1		Disconnect																														
			Connected	0		Connect																														

### 33.9.9 PSEL.SDA

Address offset: 0x50C

Pin select for SDA signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected	1			Disconnect																													
			Connected	0			Connect																													

### 33.9.10 RXD.PTR

Address offset: 0x534

RXD Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id	Value					Description																										
A	RW	PTR								RXD Data pointer																										

### 33.9.11 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in RXD buffer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT				Maximum number of bytes in RXD buffer																													

### 33.9.12 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last RXD transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	R	AMOUNT					Number of bytes transferred in the last RXD transaction																									

### 33.9.13 TXD.PTR

Address offset: 0x544

TXD Data pointer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	PTR					TXD Data pointer																									

### 33.9.14 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in TXD buffer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	MAXCNT					Maximum number of bytes in TXD buffer																									

### 33.9.15 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last TXD transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	R	AMOUNT					Number of bytes transferred in the last TXD transaction																									

### 33.9.16 ADDRESS[0]

Address offset: 0x588

TWI slave address 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	ADDRESS					TWI slave address																									

### 33.9.17 ADDRESS[1]

Address offset: 0x58C

TWI slave address 1

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

### 33.9.18 CONFIG

Address offset: 0x594

Configuration register for the address match mechanism

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000001				0 1																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ADDRESS0				Enable or disable address matching on ADDRESS[0]																													
			Disabled	0	Disabled																														
			Enabled	1	Enabled																														
B	RW	ADDRESS1				Enable or disable address matching on ADDRESS[1]																													
			Disabled	0	Disabled																														
			Enabled	1	Enabled																														

### 33.9.19 ORC

Address offset: 0x5C0

Over-read character. Character sent out in case of an over-read of the transmit buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ORC				Over-read character. Character sent out in case of an over-read of the transmit buffer.																													

## 33.10 Electrical specification

### 33.10.1 TWIS slave interface electrical specifications


Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWIS,SCL</sub>	Bit rates for TWIS <sup>27</sup>	100		400	kbps
I <sub>TWIS,100kbps</sub>	Run current for TWIS (Average current to receive and transfer a byte to RAM), 100 kbps		45		μA
I <sub>TWIS,400kbps</sub>	Run current for TWIS (Average current to receive and transfer a byte to RAM), 400 kbps		45		μA
I <sub>TWIS,IDLE</sub>	Idle current for TWIS		1		μA
t <sub>TWIS,START</sub>	Time from PREPARERX/PREPARETX task to ready to receive/transmit		1.5		μs

### 33.10.2 TWIS slave timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TWIS,SU_DAT</sub>	Data setup time before positive edge on SCL – all modes	300			ns
t <sub>TWIS,HD_DAT</sub>	Data hold time after negative edge on SCL – all modes	500			ns
t <sub>TWIS,HD_STA,100kbps</sub>	TWI slave hold time from for START condition (SDA low to SCL low), 100 kbps	5200			ns

<sup>27</sup> High bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{TWIS,HD\_STA,400kbps}}$	TWI slave hold time from for START condition (SDA low to SCL low), 400 kbps	1300			ns
$t_{\text{TWIS,SU\_STO,100kbps}}$	TWI slave setup time from SCL high to STOP condition, 100 kbps	5200			ns
$t_{\text{TWIS,SU\_STO,400kbps}}$	TWI slave setup time from SCL high to STOP condition, 400 kbps	1300			ns
$t_{\text{TWIS,BUF,100kbps}}$	TWI slave bus free time between STOP and START conditions, 100 kbps		4700		ns
$t_{\text{TWIS,BUF,400kbps}}$	TWI slave bus free time between STOP and START conditions, 400 kbps		1300		ns

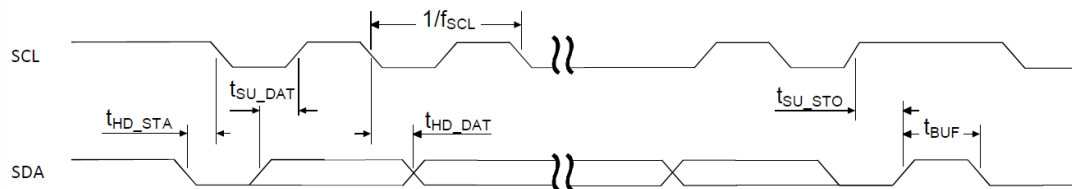


**Figure 99: TWIS timing diagram, 1 byte transaction**

## 34 UARTE — Universal asynchronous receiver/ transmitter with EasyDMA

The Universal asynchronous receiver/transmitter with EasyDMA (UARTE) offers fast, full-duplex, asynchronous serial communication with built-in flow control (CTS, RTS) support in hardware at a rate up to 1 Mbps, and EasyDMA data transfer from/to RAM.

Listed here are the main features for UARTE:

- Full-duplex operation
- Automatic hardware flow control
- Optional even parity bit checking and generation
- EasyDMA
- Up to 1 Mbps baudrate
- Return to IDLE between transactions supported (when using HW flow control)
- One or two stop bit
- Least significant bit (LSB) first

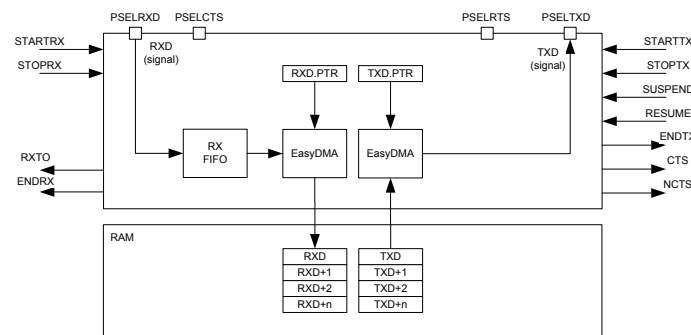

**Figure 100: UARTE configuration**

The GPIOs used for each UART interface can be chosen from any GPIO on the device and are independently configurable. This enables great flexibility in device pinout and efficient use of board space and signal routing.

### 34.1 Shared resources

The UARTE shares registers and other resources with other peripherals that have the same ID as the UARTE.

Therefore, you must disable all peripherals that have the same ID as the UARTE before the UARTE can be configured and used. Disabling a peripheral that has the same ID as the UARTE will not reset any of the registers that are shared with the UARTE. It is therefore important to configure all relevant UARTE registers explicitly to ensure that it operates correctly.

See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.

### 34.2 EasyDMA

The UARTE implements EasyDMA for reading and writing to and from the RAM.

If the TXD.PTR and the RXD.PTR are not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The .PTR and .MAXCNT registers are double-buffered. They can be updated and prepared for the next RX/TX transmission immediately after having received the RXSTARTED/TXSTARTED event.

The ENDRX/ENDTX event indicates that EasyDMA has finished accessing respectively the RX/TX buffer in RAM.

### 34.3 Transmission

The first step of a DMA transmission is storing bytes in the transmit buffer and configuring EasyDMA. This is achieved by writing the initial address pointer to TXD.PTR, and the number of bytes in the RAM buffer to TXD.MAXCNT. The UARTE transmission is started by triggering the STARTTX task.


After each byte has been sent over the TXD line, a TXDRDY event will be generated.

When all bytes in the TXD buffer, as specified in the TXD.MAXCNT register, have been transmitted, the UARTE transmission will end automatically and an ENDTX event will be generated.

A UARTE transmission sequence is stopped by triggering the STOPTX task, a TXSTOPPED event will be generated when the UARTE transmitter has stopped.

If the ENDTX event has not already been generated when the UARTE transmitter has come to a stop, the UARTE will generate the ENDTX event explicitly even though all bytes in the TXD buffer, as specified in the TXD.MAXCNT register, have not been transmitted.

If flow control is enabled through the HWFC field in the CONFIG register, a transmission will be automatically suspended when CTS is deactivated and resumed when CTS is activated again, as illustrated in [Figure 101: UARTE transmission](#) on page 392. A byte that is in transmission when CTS is deactivated will be fully transmitted before the transmission is suspended.

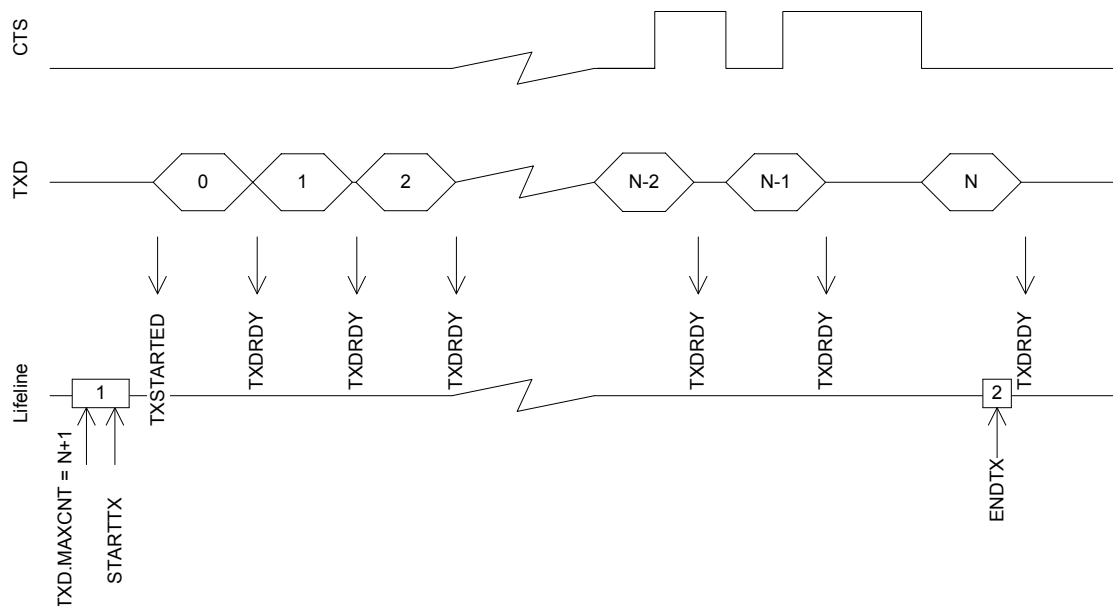

**Figure 101: UARTE transmission**

The UARTE transmitter will be in its lowest activity level, and consume the least amount of energy, when it is stopped, i.e. before it is started via STARTTX or after it has been stopped via STOPTX and the TXSTOPPED event has been generated. See [POWER — Power supply](#) on page 67 for more information about power modes.

### 34.4 Reception


The UARTE receiver is started by triggering the STARTRX task. The UARTE receiver is using EasyDMA to store incoming data in an RX buffer in RAM.



The RX buffer is located at the address specified in the RXD.PTR register. The RXD.PTR register is double-buffered and it can be updated and prepared for the next STARTRX task immediately after the RXSTARTED event is generated. The size of the RX buffer is specified in the RXD.MAXCNT register and the UARTE will generate an ENDRX event when it has filled up the RX buffer, see [Figure 102: UARTE reception](#) on page 393.

For each byte received over the RXD line, an RXDRDY event will be generated. This event is likely to occur before the corresponding data has been transferred to Data RAM.

The RXD.AMOUNT register can be queried following an ENDRX event to see how many new bytes have been transferred to the RX buffer in RAM since the previous ENDRX event.

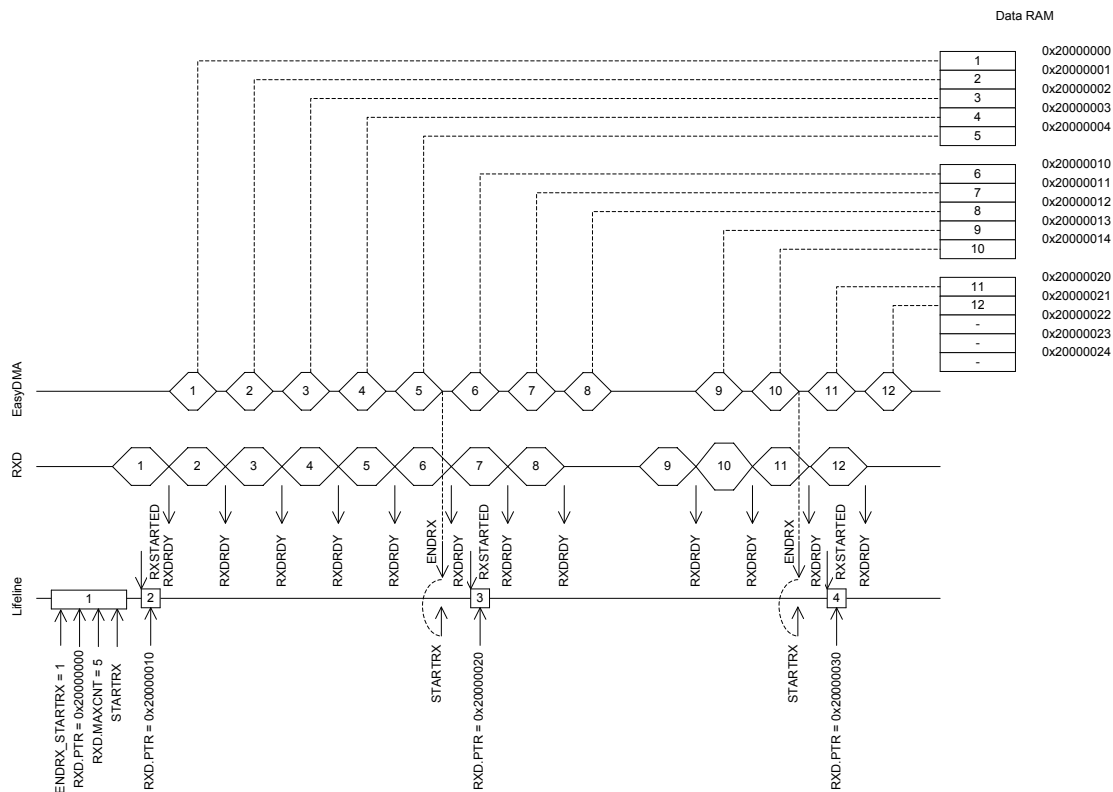

**Figure 102: UARTE reception**

The UARTE receiver is stopped by triggering the STOPRX task. An RXTO event is generated when the UARTE has stopped. The UARTE will make sure that an impending ENDRX event will be generated before the RXTO event is generated. This means that the UARTE will guarantee that no ENDRX event will be generated after RXTO, unless the UARTE is restarted or a FLUSHRX command is issued after the RXTO event is generated.


**Important:** If the ENDRX event has not already been generated when the UARTE receiver has come to a stop, which implies that all pending content in the RX FIFO has been moved to the RX buffer, the UARTE will generate the ENDRX event explicitly even though the RX buffer is not full. In this scenario the ENDRX event will be generated before the RXTO event is generated.

To be able to know how many bytes have actually been received into the RX buffer, the CPU can read the RXD.AMOUNT register following the ENDRX event or the RXTO event.

The UARTE is able to receive up to four bytes after the STOPRX task has been triggered as long as these are sent in succession immediately after the RTS signal is deactivated. This is possible because after the RTS is deactivated the UARTE is able to receive bytes for an extended period equal to the time it takes to send 4 bytes on the configured baud rate.

After the RXTO event is generated the internal RX FIFO may still contain data, and to move this data to RAM the FLUSHRX task must be triggered. To make sure that this data does not overwrite data in the RX buffer, the RX buffer should be emptied or the RXD.PTR should be updated before the FLUSHRX task is triggered.

To make sure that all data in the RX FIFO is moved to the RX buffer, the RXD.MAXCNT register must be set to RXD.MAXCNT > 4, see [Figure 103: UARTE reception with forced stop via STOPRX](#) on page 394. The UARTE will generate the ENDRX event after completing the FLUSHRX task even if the RX FIFO was empty or if the RX buffer does not get filled up. To be able to know how many bytes have actually been received into the RX buffer in this case, the CPU can read the RXD.AMOUNT register following the ENDRX event.

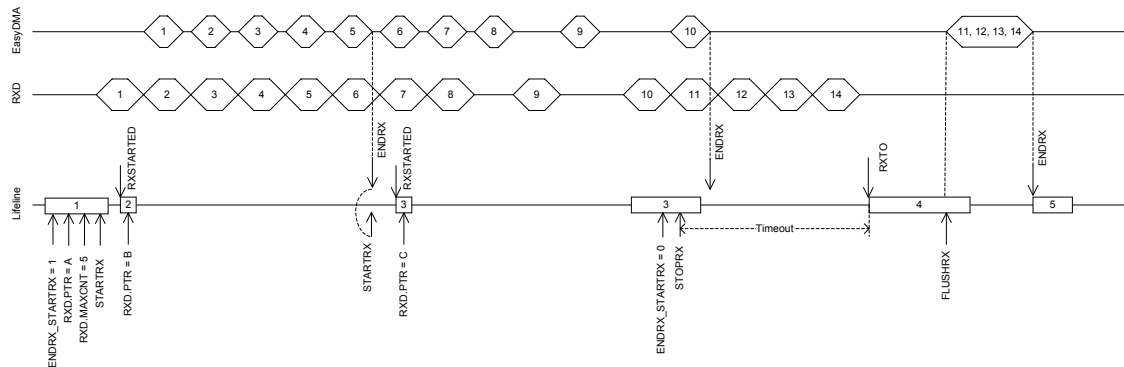

**Figure 103: UARTE reception with forced stop via STOPRX**

If HW flow control is enabled through the HWFC field in the CONFIG register, the RTS signal will be deactivated when the receiver is stopped via the STOPRX task or when the UARTE is only able to receive four more bytes in its internal RX FIFO.

With flow control disabled, the UARTE will function in the same way as when the flow control is enabled except that the RTS line will not be used. This means that no signal will be generated when the UARTE has reached the point where it is only able to receive four more bytes in its internal RX FIFO. Data received when the internal RX FIFO is filled up, will be lost.

The UARTE receiver will be in its lowest activity level, and consume the least amount of energy, when it is stopped, i.e. before it is started via STARTRX or after it has been stopped via STOPRX and the RXTO event has been generated. See [POWER — Power supply](#) on page 67 for more information about power modes.

### 34.5 Error conditions

An ERROR event, in the form of a framing error, will be generated if a valid stop bit is not detected in a frame. Another ERROR event, in the form of a break condition, will be generated if the RXD line is held active low for longer than the length of a data frame. Effectively, a framing error is always generated before a break condition occurs.

An ERROR event will not stop reception. If the error was a parity error, the received byte will still be transferred into Data RAM, and so will following incoming bytes. If there was a framing error (wrong stop bit), that specific byte will NOT be stored into Data RAM, but following incoming bytes will.

### 34.6 Using the UARTE without flow control

If flow control is not enabled, the interface will behave as if the CTS and RTS lines are kept active all the time.

### 34.7 Parity and stop bit configuration

When parity is enabled through the PARITY field in the CONFIG register, the parity will be generated automatically from the even parity of TXD and RXD for transmission and reception respectively.

The amount of stop bits can be configured through the STOP field in the CONFIG register.

## 34.8 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOPTH and STOPRX tasks may not be always needed (the peripheral might already be stopped), but if STOPTH and/or STOPRX is sent, software shall wait until the TXSTOPPED and/or RXTO event is received in response, before disabling the peripheral through the ENABLE register.

## 34.9 Pin configuration

The different signals RXD, CTS (Clear To Send, active low), RTS (Request To Send, active low), and TXD associated with the UARTE are mapped to physical pins according to the configuration specified in the PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers respectively.

The PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers and their configurations are only used as long as the UARTE is enabled, and retained only for the duration the device is in ON mode. PSEL.RXD, PSEL.RTS, PSEL.RTS and PSEL.TXD must only be configured when the UARTE is disabled.

To secure correct signal levels on the pins by the UARTE when the system is in OFF mode, the pins must be configured in the GPIO peripheral as described in [Table 73: GPIO configuration before enabling peripheral](#) on page 395.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 73: GPIO configuration before enabling peripheral**

UARTE signal	UARTE pin	Direction	Output value
RXD	As specified in PSEL.RXD	Input	Not applicable
CTS	As specified in PSEL.CTS	Input	Not applicable
RTS	As specified in PSEL.RTS	Output	1
TXD	As specified in PSEL.TXD	Output	1

## 34.10 Registers

**Table 74: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40002000	UARTE	UARTE0	Universal asynchronous receiver/ transmitter with EasyDMA, unit 0	
0x40028000	UARTE	UARTE1	Universal asynchronous receiver/ transmitter with EasyDMA, unit 1	

**Table 75: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start UART receiver
TASKS_STOPRX	0x004	Stop UART receiver
TASKS_STARTTX	0x008	Start UART transmitter
TASKS_STOPTH	0x00C	Stop UART transmitter
TASKS_FLUSHRX	0x02C	Flush RX FIFO into RX buffer
EVENTS_CTS	0x100	CTS is activated (set low). Clear To Send.
EVENTS_NCTS	0x104	CTS is deactivated (set high). Not Clear To Send.
EVENTS_RXDRDY	0x108	Data received in RXD (but potentially not yet transferred to Data RAM)
EVENTS_ENDRX	0x110	Receive buffer is filled up
EVENTS_TXDRDY	0x11C	Data sent from TXD
EVENTS_ENDTX	0x120	Last TX byte transmitted
EVENTS_ERROR	0x124	Error detected
EVENTS_RXTO	0x144	Receiver timeout

Register	Offset	Description
EVENTS_RXSTARTED	0x14C	UART receiver has started
EVENTS_TXSTARTED	0x150	UART transmitter has started
EVENTS_TXSTOPPED	0x158	Transmitter stopped
<b>SHORTS</b>	0x200	Shortcut register
<b>INTEN</b>	0x300	Enable or disable interrupt
<b>INTENSET</b>	0x304	Enable interrupt
<b>INTENCLR</b>	0x308	Disable interrupt
<b>ERRORSRC</b>	0x480	Error source
Note : this register is read / write one to clear.		
<b>ENABLE</b>	0x500	Enable UART
<b>PSEL.RTS</b>	0x508	Pin select for RTS signal
<b>PSEL.TXD</b>	0x50C	Pin select for TXD signal
<b>PSEL.CTS</b>	0x510	Pin select for CTS signal
<b>PSEL.RXD</b>	0x514	Pin select for RXD signal
<b>BAUDRATE</b>	0x524	Baud rate. Accuracy depends on the HFCLK source selected.
<b>RXD.PTR</b>	0x534	Data pointer
<b>RXD.MAXCNT</b>	0x538	Maximum number of bytes in receive buffer
<b>RXD.AMOUNT</b>	0x53C	Number of bytes transferred in the last transaction
<b>TXD.PTR</b>	0x544	Data pointer
<b>TXD.MAXCNT</b>	0x548	Maximum number of bytes in transmit buffer
<b>TXD.AMOUNT</b>	0x54C	Number of bytes transferred in the last transaction
<b>CONFIG</b>	0x56C	Configuration of parity and hardware flow control

### 34.10.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	D C																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
C	RW	ENDRX_STARTRX				Shortcut between ENDRX event and STARTRX task																									
						See <a href="#">EVENTS_ENDRX</a> and <a href="#">TASKS_STARTRX</a>																									
			Disabled	0		Disable shortcut																									
			Enabled	1		Enable shortcut																									
D	RW	ENDRX_STOPRX				Shortcut between ENDRX event and STOPRX task																									
						See <a href="#">EVENTS_ENDRX</a> and <a href="#">TASKS_STOPRX</a>																									
			Disabled	0		Disable shortcut																									
			Enabled	1		Enable shortcut																									

### 34.10.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				L J I H G F E D C B A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	CTS				Enable or disable interrupt for CTS event																												
						See <a href="#">EVENTS_CTS</a>																												
			Disabled	0		Disable																												
			Enabled	1		Enable																												
B	RW	NCTS				Enable or disable interrupt for NCTS event																												
						See <a href="#">EVENTS_NCTS</a>																												

### 34.10.3 INTENSET

## Enable interrupt

Page 397

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	B	RW	NCTS		Write '1' to Enable interrupt for NCTS event																														
					See <a href="#">EVENTS_NCTS</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	C	RW	RXDRDY		Write '1' to Enable interrupt for RXDRDY event																														
					See <a href="#">EVENTS_RXDRDY</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
	D	RW	ENDRX		Write '1' to Enable interrupt for ENDRX event																														
					See <a href="#">EVENTS_ENDRX</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		E	RW	TXDRDY		Write '1' to Enable interrupt for TXDRDY event																													
						See <a href="#">EVENTS_TXDRDY</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		F	RW	ENDTX		Write '1' to Enable interrupt for ENDTX event																													
						See <a href="#">EVENTS_ENDTX</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		G	RW	ERROR		Write '1' to Enable interrupt for ERROR event																													
						See <a href="#">EVENTS_ERROR</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		H	RW	RXTO		Write '1' to Enable interrupt for RXTO event																													
						See <a href="#">EVENTS_RXTO</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		I	RW	RXSTARTED		Write '1' to Enable interrupt for RXSTARTED event																													
						See <a href="#">EVENTS_RXSTARTED</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		J	RW	TXSTARTED		Write '1' to Enable interrupt for TXSTARTED event																													
						See <a href="#">EVENTS_TXSTARTED</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
		L	RW	TXSTOPPED		Write '1' to Enable interrupt for TXSTOPPED event																													
						See <a href="#">EVENTS_TXSTOPPED</a>																													
				Set	1	Enable																													
			Disabled	0	Read: Disabled																														

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Id																L				J				I				H												G				F				E												D				C				B				A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Reset 0x00000000								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

### 34.10.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number								31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Id																L				J				I				H												G				F				E								D				C				B				A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
Reset 0x00000000								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0								0							

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id															L	J	I	H											G	F	E				D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																	
					See <a href="#">EVENTS_RXSTARTED</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
J	RW	TXSTARTED			Write '1' to Disable interrupt for TXSTARTED event																																	
					See <a href="#">EVENTS_TXSTARTED</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
L	RW	TXSTOPPED			Write '1' to Disable interrupt for TXSTOPPED event																																	
					See <a href="#">EVENTS_TXSTOPPED</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

### 34.10.5 ERRORSRC

Address offset: 0x480

Error source

Note : this register is read / write one to clear.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	OVERRUN			Overrun error																														
					A start bit is received while the previous data still lies in RXD. (Previous data is lost.)																														
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
B	RW	PARITY			Parity error																														
					A character with bad parity is received, if HW parity check is enabled.																														
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
C	RW	FRAMING			Framing error occurred																														
					A valid stop bit is not detected on the serial data input after all bits in a character have been received.																														
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
D	RW	BREAK			Break condition																														
					The serial data input is '0' for longer than the length of a data frame. (The data frame length is 10 bits without parity bit, and 11 bits with parity bit.).																														
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														

### 34.10.6 ENABLE

Address offset: 0x500

Enable UART



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable UARTE																														
			Disabled	0	Disable UARTE																														
			Enabled	8	Enable UARTE																														

### 34.10.7 PSEL.RTS

Address offset: 0x508

Pin select for RTS signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value Id	Value		Description																														
A	RW	PIN		[0..31]		Pin number																														
B	RW	PORT		[0..1]		Port number																														
C	RW	CONNECT				Connection																														
			Disconnected	1		Disconnect																														
			Connected	0		Connect																														

### 34.10.8 PSEL.TXD

Address offset: 0x50C

Pin select for TXD signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value Id	Value				Description																												
A	RW	PIN		[0..31]				Pin number																												
B	RW	PORT		[0..1]				Port number																												
C	RW	CONNECT						Connection																												
			Disconnected	1				Disconnect																												
			Connected	0				Connect																												

### 34.10.9 PSEL.CTS

Address offset: 0x510

Pin select for CTS signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value Id	Value		Description																														
A	RW	PIN		[0..31]		Pin number																														
B	RW	PORT		[0..1]		Port number																														
C	RW	CONNECT				Connection																														
			Disconnected	1		Disconnect																														
			Connected	0		Connect																														

### 34.10.10 PSEL.RXD

Address offset: 0x514

Pin select for RXD signal

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id					C																								B					A					A				
Reset 0xFFFFFFFF					1 1																																						
Id	RW	Field	Value	Id	Value		Description																																				
A	RW	PIN			[0..31]		Pin number																																				
B	RW	PORT			[0..1]		Port number																																				
C	RW	CONNECT					Connection																																				
			Disconnected		1		Disconnect																																				
			Connected		0		Connect																																				

### 34.10.11 BAUDRATE

Address offset: 0x524

Baud rate. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	BAUDRATE					Baud rate																												
			Baud1200		0x0004F000		1200 baud (actual rate: 1205)																												
			Baud2400		0x0009D000		2400 baud (actual rate: 2396)																												
			Baud4800		0x0013B000		4800 baud (actual rate: 4808)																												
			Baud9600		0x00275000		9600 baud (actual rate: 9598)																												
			Baud14400		0x003AF000		14400 baud (actual rate: 14401)																												
			Baud19200		0x004EA000		19200 baud (actual rate: 19208)																												
			Baud28800		0x0075C000		28800 baud (actual rate: 28777)																												
			Baud31250		0x00800000		31250 baud																												
			Baud38400		0x009D0000		38400 baud (actual rate: 38369)																												
			Baud56000		0x00E50000		56000 baud (actual rate: 55944)																												
			Baud57600		0x00EB0000		57600 baud (actual rate: 57554)																												
			Baud76800		0x013A9000		76800 baud (actual rate: 76923)																												
			Baud115200		0x01D60000		115200 baud (actual rate: 115108)																												
			Baud230400		0x03B00000		230400 baud (actual rate: 231884)																												
			Baud250000		0x04000000		250000 baud																												
			Baud460800		0x07400000		460800 baud (actual rate: 457143)																												
			Baud921600		0x0F000000		921600 baud (actual rate: 941176)																												
			Baud1M		0x10000000		1Mega baud																												

### 34.10.12 RXD.PTR

Address offset: 0x534

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	PTR							Data pointer																										

### 34.10.13 RXD.MAXCNT

Address offset: 0x538

Maximum number of bytes in receive buffer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																								A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value		Description																									
A	RW	MAXCNT					Maximum number of bytes in receive buffer																									

### 34.10.14 RXD.AMOUNT

Address offset: 0x53C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value				Description																											
A	R	AMOUNT						Number of bytes transferred in the last transaction																											

### 34.10.15 TXD.PTR

Address offset: 0x544

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value Id		Value		Description																											
A	RW	PTR						Data pointer																											

### 34.10.16 TXD.MAXCNT

Address offset: 0x548

Maximum number of bytes in transmit buffer

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			A A A A A A A A A A																														
Reset 0x00000000			0 0																														
Id	RW	Field	Value Id			Value			Description																								
A	RW	MAXCNT							Maximum number of bytes in transmit buffer																								

### 34.10.17 TXD.AMOUNT

Address offset: 0x54C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 34.10.18 CONFIG

Address offset: 0x56C

Configuration of parity and hardware flow control

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				C B B B A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	HWFC			Hardware flow control																													

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																													
Id	C B B B A																													
Reset 0x00000000	0 0																													
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																									
B	RW	PARITY	Disabled	0	Disabled																									
			Enabled	1	Enabled																									
			Excluded	0x0	Exclude parity bit																									
			Included	0x7	Include even parity bit																									
C	RW	STOP			Stop bits																									
			One	0	One stop bit																									
			Two	1	Two stop bits																									

## 34.11 Electrical specification

### 34.11.1 UARTE electrical specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{UARTE}}$	Baud rate for UARTE <sup>28</sup> .			1000	kbps
$I_{\text{UARTE1M}}$	Run current at max baud rate.		55		μA
$I_{\text{UARTE115k}}$	Run current at 115200 bps.		55		μA
$I_{\text{UARTE1k2}}$	Run current at 1200 bps.		55		μA
$I_{\text{UARTE, IDLE}}$	Idle current for UARTE (STARTed, no XXX activity)		1		μA
$t_{\text{UARTE, CTS H}}$	CTS high time	1			μs
$t_{\text{UARTE, START}}$	Time from STARTRX/STARTTX task to transmission started		1		μs


<sup>28</sup> High baud rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

## 35 QDEC — Quadrature decoder

The Quadrature decoder (QDEC) provides buffered decoding of quadrature-encoded sensor signals. It is suitable for mechanical and optical sensors.

The sample period and accumulation are configurable to match application requirements. The QDEC provides the following:

- Decoding of digital waveform from off-chip quadrature encoder.
- Sample accumulation eliminating hard real-time requirements to be enforced on application.
- Optional input de-bounce filters.
- Optional LED output signal for optical encoders.

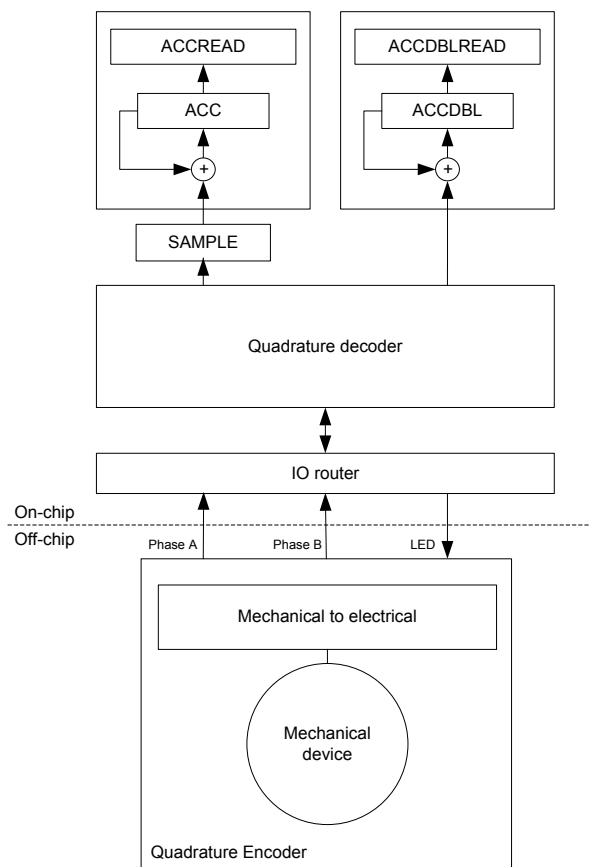

**Figure 104: Quadrature decoder configuration**

### 35.1 Sampling and decoding

The QDEC decodes the output from an incremental motion encoder by sampling the QDEC phase input pins (A and B).

The off-chip quadrature encoder is an incremental motion encoder outputting two waveforms, phase A and phase B. The two output waveforms are always 90 degrees out of phase, meaning that one always changes level before the other. The direction of movement is indicated by which of these two waveforms that changes level first. Invalid transitions may occur, that is when the two waveforms switch simultaneously. This may occur if the wheel rotates too fast relative to the sample rate set for the decoder.

The QDEC decodes the output from the off-chip encoder by sampling the QDEC phase input pins (A and B) at a fixed rate as specified in the SAMPLEPER register.

If the SAMPLEPER value needs to be changed, the QDEC shall be stopped using the STOP task. SAMPLEPER can be then changed upon receiving the STOPPED event, and QDEC can be restarted using the START task. Failing to do so may result in unpredictable behaviour.

It is good practice to change other registers (LEDPOL, REPORTPER, DBFEN and LEDPRE) only when the QDEC is stopped.

When started, the decoder continuously samples the two input waveforms and decodes these by comparing the current sample pair (n) with the previous sample pair (n-1).

The decoding of the sample pairs is described in the table below.

**Table 76: Sampled value encoding**

Previous sample pair(n-1)		Current samples pair(n)		SAMPLE register	ACC operation	ACCDL operation	Description
A	B	A	B				
0	0	0	0	0	No change	No change	No movement
0	0	0	1	1	Increment	No change	Movement in positive direction
0	0	1	0	-1	Decrement	No change	Movement in negative direction
0	0	1	1	2	No change	Increment	Error: Double transition
0	1	0	0	-1	Decrement	No change	Movement in negative direction
0	1	0	1	0	No change	No change	No movement
0	1	1	0	2	No change	Increment	Error: Double transition
0	1	1	1	1	Increment	No change	Movement in positive direction
1	0	0	0	1	Increment	No change	Movement in positive direction
1	0	0	1	2	No change	Increment	Error: Double transition
1	0	1	0	0	No change	No change	No movement
1	0	1	1	-1	Decrement	No change	Movement in negative direction
1	1	0	0	2	No change	Increment	Error: Double transition
1	1	0	1	-1	Decrement	No change	Movement in negative direction
1	1	1	0	1	Increment	No change	Movement in positive direction
1	1	1	1	0	No change	No change	No movement

## 35.2 LED output

The LED output follows the sample period, and the LED is switched on a given period before sampling and switched off immediately after the inputs are sampled. The period the LED is switched on before sampling is given in the LEDPRE register.

The LED output pin polarity is specified in the LEDPOL register.

For using off-chip mechanical encoders not requiring a LED, the LED output can be disabled by writing value 'Disconnected' to the CONNECT field of the PSEL.LED register. In this case the QDEC will not acquire access to a LED output pin and the pin can be used for other purposes by the CPU.

## 35.3 Debounce filters

Each of the two-phase inputs have digital debounce filters.

When enabled through the DBFEN register, the filter inputs are sampled at a fixed 1 MHz frequency during the entire sample period (which is specified in the SAMPLEPER register), and the filters require all of the samples within this sample period to equal before the input signal is accepted and transferred to the output of the filter.

As a result, only input signal with a steady state longer than twice the period specified in SAMPLEPER are guaranteed to pass through the filter, and any signal with a steady state shorter than SAMPLEPER will always be suppressed by the filter. (This is assumed that the frequency during the debounce period never exceeds 500 kHz (as required by the Nyquist theorem when using a 1 MHz sample frequency).

The LED will always be ON when the debounce filters are enabled, as the inputs in this case will be sampled continuously.

Note that when the debounce filters are enabled, displacements reported by the QDEC peripheral are delayed by one SAMPLEPER period.

## 35.4 Accumulators

The quadrature decoder contains two accumulator registers, ACC and ACCDBL, that accumulate respectively valid motion sample values and the number of detected invalid samples (double transitions).

The ACC register will accumulate all valid values (1/-1) written to the SAMPLE register. This can be useful for preventing hard real-time requirements from being enforced on the application. When using the ACC register the application does not need to read every single sample from the SAMPLE register, but can instead fetch the ACC register whenever it fits the application. The ACC register will always hold the relative movement of the external mechanical device since the previous clearing of the ACC register. Sample values indicating a double transition (2) will not be accumulated in the ACC register.

An ACCOF event will be generated if the ACC receives a SAMPLE value that would cause the register to overflow or underflow. Any SAMPLE value that would cause an ACC overflow or underflow will be discarded, but any samples not causing the ACC to overflow or underflow will still be accepted.

The accumulator ACCDBL accumulates the number of detected double transitions since the previous clearing of the ACCDBL register.

The ACC and ACCDBL registers can be cleared by the READCLRACC and subsequently read using the ACCREAD and ACCDBLREAD registers.

The ACC register can be separately cleared by the RDCLRACC and subsequently read using the ACCREAD registers.

The ACCDBL register can be separately cleared by the RDCLRDBL and subsequently read using the ACCDBLREAD registers.

The REPORTPER register allows automating the capture of several samples before it can send out a REPORTRDY event in case a non-null displacement has been captured and accumulated, and a DBLRDY event in case one or more double-displacements have been captured and accumulated. The REPORTPER field in this register selects after how many samples the accumulators contents are evaluated to send (or not) REPORTRDY and DBLRDY events.

Using the RDCLRACC task (manually sent upon receiving the event, or using the DBLRDY\_RDCLRACC shortcut), ACCREAD can then be read.

In case at least one double transition has been captured and accumulated, a DBLRDY event is sent. Using the RDCLRDBL task (manually sent upon receiving the event, or using the DBLRDY\_RDCLRDBL shortcut), ACCDBLREAD can then be read.

## 35.5 Output/input pins

The QDEC uses a three-pin interface to the off-chip quadrature encoder.

These pins will be acquired when the QDEC is enabled in the ENABLE register. The pins acquired by the QDEC cannot be written by the CPU, but they can still be read by the CPU.

The pin numbers to be used for the QDEC are selected using the PSEL.n registers.

## 35.6 Pin configuration

The Phase A, Phase B, and LED signals are mapped to physical pins according to the configuration specified in the PSEL.A, PSEL.B, and PSEL.LED registers respectively.

If the CONNECT field value 'Disconnected' is specified in any of these registers, the associated signal will not be connected to any physical pin. The PSEL.A, PSEL.B, and PSEL.LED registers and their configurations are only used as long as the QDEC is enabled, and retained only as long as the device is in

ON mode. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register.

To secure correct behavior in the QDEC, the pins used by the QDEC must be configured in the GPIO peripheral as described in [Table 77: GPIO configuration before enabling peripheral](#) on page 408 before enabling the QDEC. This configuration must be retained in the GPIO for the selected IOs as long as the QDEC is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

**Table 77: GPIO configuration before enabling peripheral**

QDEC signal	QDEC pin	Direction	Output value	Comment
Phase A	As specified in PSEL.A	Input	Not applicable	
Phase B	As specified in PSEL.B	Input	Not applicable	
LED	As specified in PSEL.LED	Input	Not applicable	

## 35.7 Registers

**Table 78: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40012000	QDEC	QDEC	Quadrature decoder	

**Table 79: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Task starting the quadrature decoder
TASKS_STOP	0x004	Task stopping the quadrature decoder
TASKS_READCLRACC	0x008	Read and clear ACC and ACCDBL
TASKS_RDCLRACC	0x00C	Read and clear ACC
TASKS_RDCLRDBL	0x010	Read and clear ACCDBL
EVENTS_SAMPLERDY	0x100	Event being generated for every new sample value written to the SAMPLE register
EVENTS_REPORTRDY	0x104	Non-null report ready
EVENTS_ACCOF	0x108	ACC or ACCDBL register overflow
EVENTS_DBLRDY	0x10C	Double displacement(s) detected
EVENTS_STOPPED	0x110	QDEC has been stopped
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	Enable the quadrature decoder
LEDPOL	0x504	LED output pin polarity
SAMPLEPER	0x508	Sample period
SAMPLE	0x50C	Motion sample value
REPORTPER	0x510	Number of samples to be taken before REPORTRDY and DBLRDY events can be generated
ACC	0x514	Register accumulating the valid transitions
ACCREAD	0x518	Snapshot of the ACC register, updated by the READCLRACC or RDCLRACC task
PSEL.LED	0x51C	Pin select for LED signal
PSEL.A	0x520	Pin select for A signal
PSEL.B	0x524	Pin select for B signal
DBFEN	0x528	Enable input debounce filters
LEDPRE	0x540	Time period the LED is switched ON prior to sampling
ACCCDBL	0x544	Register accumulating the number of detected double transitions
ACCCDBLREAD	0x548	Snapshot of the ACCDBL, updated by the READCLRACC or RDCLRDBL task

### 35.7.1 SHORTS

Address offset: 0x200

Shortcut register



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																																				G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value	Id	Value	Description																																				
A	RW	REPORTRDY_READCLRACC				Shortcut between REPORTRDY event and READCLRACC task																																				
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_READCLRACC</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
B	RW	SAMPLERDY_STOP				Shortcut between SAMPLERDY event and STOP task																																				
						See <a href="#">EVENTS_SAMPLERDY</a> and <a href="#">TASKS_STOP</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
C	RW	REPORTRDY_RDCLRACC				Shortcut between REPORTRDY event and RDCLRACC task																																				
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_RDCLRACC</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
D	RW	REPORTRDY_STOP				Shortcut between REPORTRDY event and STOP task																																				
						See <a href="#">EVENTS_REPORTRDY</a> and <a href="#">TASKS_STOP</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
E	RW	DBLRDY_RDCLRDBL				Shortcut between DBLRDY event and RDCLRDBL task																																				
						See <a href="#">EVENTS_DBLRDY</a> and <a href="#">TASKS_RDCLRDBL</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
F	RW	DBLRDY_STOP				Shortcut between DBLRDY event and STOP task																																				
						See <a href="#">EVENTS_DBLRDY</a> and <a href="#">TASKS_STOP</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				
G	RW	SAMPLERDY_READCLRACC				Shortcut between SAMPLERDY event and READCLRACC task																																				
						See <a href="#">EVENTS_SAMPLERDY</a> and <a href="#">TASKS_READCLRACC</a>																																				
			Disabled	0		Disable shortcut																																				
			Enabled	1		Enable shortcut																																				

## 35.7.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SAMPLERDY			Write '1' to Enable interrupt for SAMPLERDY event																														
					See <a href="#">EVENTS_SAMPLERDY</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	REPORTRDY			Write '1' to Enable interrupt for REPORTRDY event																														
					See <a href="#">EVENTS_REPORTRDY</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	ACCOF			Write '1' to Enable interrupt for ACCOF event																														
					See <a href="#">EVENTS_ACCOF</a>																														
			Set	1	Enable																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
D	RW	DBLRDY	Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
			Write '1' to Enable interrupt for DBLRDY event																																
			See <a href="#">EVENTS_DBLRDY</a>																																
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
E	RW	STOPPED	Enabled	1	Read: Enabled																														
			Write '1' to Enable interrupt for STOPPED event																																
			See <a href="#">EVENTS_STOPPED</a>																																
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 35.7.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value	Id	Value	Description																												
A	RW	SAMPLERDY				Write '1' to Disable interrupt for SAMPLERDY event																												
						See <a href="#">EVENTS_SAMPLERDY</a>																												
			Clear		1	Disable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
B	RW	REPORTRDY				Write '1' to Disable interrupt for REPORTRDY event																												
						See <a href="#">EVENTS_REPORTRDY</a>																												
			Clear		1	Disable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
C	RW	ACCOF				Write '1' to Disable interrupt for ACCOF event																												
						See <a href="#">EVENTS_ACCOF</a>																												
			Clear		1	Disable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
D	RW	DBLRDY				Write '1' to Disable interrupt for DBLRDY event																												
						See <a href="#">EVENTS_DBLRDY</a>																												
			Clear		1	Disable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												
E	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																												
						See <a href="#">EVENTS_STOPPED</a>																												
			Clear		1	Disable																												
			Disabled		0	Read: Disabled																												
			Enabled		1	Read: Enabled																												

### 35.7.4 ENABLE

Address offset: 0x500

Enable the quadrature decoder

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ENABLE				Enable or disable the quadrature decoder																																
						When enabled the decoder pins will be active. When disabled the quadrature decoder pins are not active and can be used as GPIO .																																
		Disabled	0		0	Disable																																
		Enabled	1		1	Enable																																

### 35.7.5 LEDPOL

Address offset: 0x504

LED output pin polarity

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	LEDPOL			LED output pin polarity																														
			ActiveLow	0	Led active on output pin low																														
			ActiveHigh	1	Led active on output pin high																														

### 35.7.6 SAMPLEPER

Address offset: 0x508

Sample period

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	SAMPLEPER				Sample period. The SAMPLE register will be updated for every new sample																																	
		128us	0		0	128 us																																	
		256us	1		1	256 us																																	
		512us	2		2	512 us																																	
		1024us	3		3	1024 us																																	
		2048us	4		4	2048 us																																	
		4096us	5		5	4096 us																																	
		8192us	6		6	8192 us																																	
		16384us	7		7	16384 us																																	
		32ms	8		8	32768 us																																	
		65ms	9		9	65536 us																																	
		131ms	10		10	131072 us																																	

### 35.7.7 SAMPLE

Address offset: 0x50C

Motion sample value

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	R	SAMPLE			[-1..2]				Last motion sample																										

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
								The value is a 2's complement value, and the sign gives the direction of the motion. The value '2' indicates a double transition.																											

### 35.7.8 REPORTPER

Address offset: 0x510

Number of samples to be taken before REPORTRDY and DBLRDY events can be generated

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	REPORTPER			Specifies the number of samples to be accumulated in the ACC register before the REPORTRDY and DBLRDY events can be generated																															
					The report period in [us] is given as: RPUS = SP * RP Where RPUS is the report period in [us/report], SP is the sample period in [us/sample] specified in SAMPLEPER, and RP is the report period in [samples/report] specified in REPORTPER .																															
			10Smpl	0	10 samples / report																															
			40Smpl	1	40 samples / report																															
			80Smpl	2	80 samples / report																															
			120Smpl	3	120 samples / report																															
			160Smpl	4	160 samples / report																															
			200Smpl	5	200 samples / report																															
			240Smpl	6	240 samples / report																															
			280Smpl	7	280 samples / report																															
			1Smpl	8	1 sample / report																															

### 35.7.9 ACC

Address offset: 0x514

Register accumulating the valid transitions

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	R	ACC		[-1024..1023]				Register accumulating all valid samples (not double transition) read from the SAMPLE register																											
								Double transitions ( SAMPLE = 2 ) will not be accumulated in this register. The value is a 32 bit 2's complement value. If a sample that would cause this register to overflow or underflow is received, the sample will be ignored and an overflow event ( ACCOF ) will be generated. The ACC register is cleared by triggering the READCLRACC or the RDCLRACC task.																											

### 35.7.10 ACCREAD

Address offset: 0x518

Snapshot of the ACC register, updated by the READCLRACC or RDCLRACC task

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	ACCREAD		[-1024..1023]	Snapshot of the ACC register.																														
					The ACCREAD register is updated when the READCLRACC or RDCLRACC task is triggered																														

### 35.7.11 PSEL.LED

Address offset: 0x51C

Pin select for LED signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id				C																																				B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1									
Id	RW	Field	Value Id	Value		Description																																							
A	RW	PIN		[0..31]		Pin number																																							
B	RW	PORT		[0..1]		Port number																																							
C	RW	CONNECT				Connection																																							
			Disconnected	1		Disconnect																																							
			Connected	0		Connect																																							

### 35.7.12 PSEL.A

Address offset: 0x520

Pin select for A signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
Id				C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

### 35.7.13 PSEL.B

Address offset: 0x524

Pin select for B signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				C																																B				A				A				A				A															
Reset 0xFFFFFFFF				1																												1				1				1				1				1				1				1				1				1			
Id	RW	Field	Value Id	Value																												Description																																			
A	RW	PIN		[0..31]																												Pin number																																			
B	RW	PORT		[0..1]																												Port number																																			
C	RW	CONNECT																														Connection																																			
			Disconnected	1																												Disconnect																																			
			Connected	0																												Connect																																			

### 35.7.14 DBFEN

Address offset: 0x528

Enable input debounce filters

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	DBFEN				Enable input debounce filters																														
			Disabled	0		Debounce input filters disabled																														
			Enabled	1		Debounce input filters enabled																														

### 35.7.15 LEDPRE

Address offset: 0x540

Time period the LED is switched ON prior to sampling

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000010				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0											
Id	RW	Field	Value	Id	Value										Description																																
A	RW	LEDPRE			[1..511]										Period in us the LED is switched on prior to sampling																																

### 35.7.16 ACCDBL

Address offset: 0x544

Register accumulating the number of detected double transitions

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	ACCDBL			[0..15]	Register accumulating the number of detected double or illegal transitions. ( SAMPLE = 2 ).																													
						When this register has reached its maximum value the accumulation of double / illegal transitions will stop. An overflow event ( ACCOF ) will be generated if any double or illegal transitions are detected after the maximum value was reached. This field is cleared by triggering the READCLRACC or RDCLRDBL task.																													

### 35.7.17 ACCDBLREAD

Address offset: 0x548

Snapshot of the ACCDBL, updated by the READCLRACC or RDCLRDBL task

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	R	ACCDBLREAD			[0..15]		Snapshot of the ACCDBL register. This field is updated when the READCLRACC or RDCLRDBL task is triggered.																												

## 35.8 Electrical specification

### 35.8.1 QDEC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>QDEC</sub>	Run current		5		μA
t <sub>SAMPLE</sub>	Time between sampling signals from quadrature decoder	128		131072	μs
t <sub>LED</sub>	Time from LED is turned on to signals are sampled	0		511	μs

## 36 SAADC — Successive approximation analog-to-digital converter

The ADC is a differential successive approximation register (SAR) analog-to-digital converter.

Listed here are the main features of SAADC:

- 8/10/12-bit resolution, 14-bit resolution with oversampling
- Up to eight input channels
  - One channel per single-ended input and two channels per differential input
  - Scan mode can be configured with both single-ended channels and differential channels.
- Full scale input range (0 to VDD)
- Sampling triggered via a task from software or a PPI channel for full flexibility on sample frequency source from low power 32.768kHz RTC or more accurate 1/16MHz Timers
- One-shot conversion mode to sample a single channel
- Scan mode to sample a series of channels in sequence. Sample delay between channels is  $t_{ack} + t_{conv}$  which may vary between channels according to user configuration of  $t_{ack}$ .
- Support for direct sample transfer to RAM using EasyDMA
- Interrupts on single sample and full buffer events
- Samples stored as 16-bit 2's complement values for differential and single-ended sampling
- Continuous sampling without the need of an external timer
- Internal resistor string
- Limit checking on the fly

### 36.1 Shared resources


The ADC can coexist with COMP, LPCOMP and other peripherals using one of AIN0–AIN7, provided these are assigned to different pins.

It is not recommended to select the same analog input pin for both modules.

### 36.2 Overview

The ADC supports up to eight external analog input channels, depending on package variant. It can be operated in a one-shot mode with sampling under software control, or a continuous conversion mode with a programmable sampling rate.

The analog inputs can be configured as eight single-ended inputs, four differential inputs or a combination of these. Each channel can be configured to select AIN0 to AIN7 pins, or the VDD pin. Channels can be sampled individually in one-shot or continuous sampling modes, or, using scan mode, multiple channels can be sampled in sequence. Channels can also be oversampled to improve noise performance.

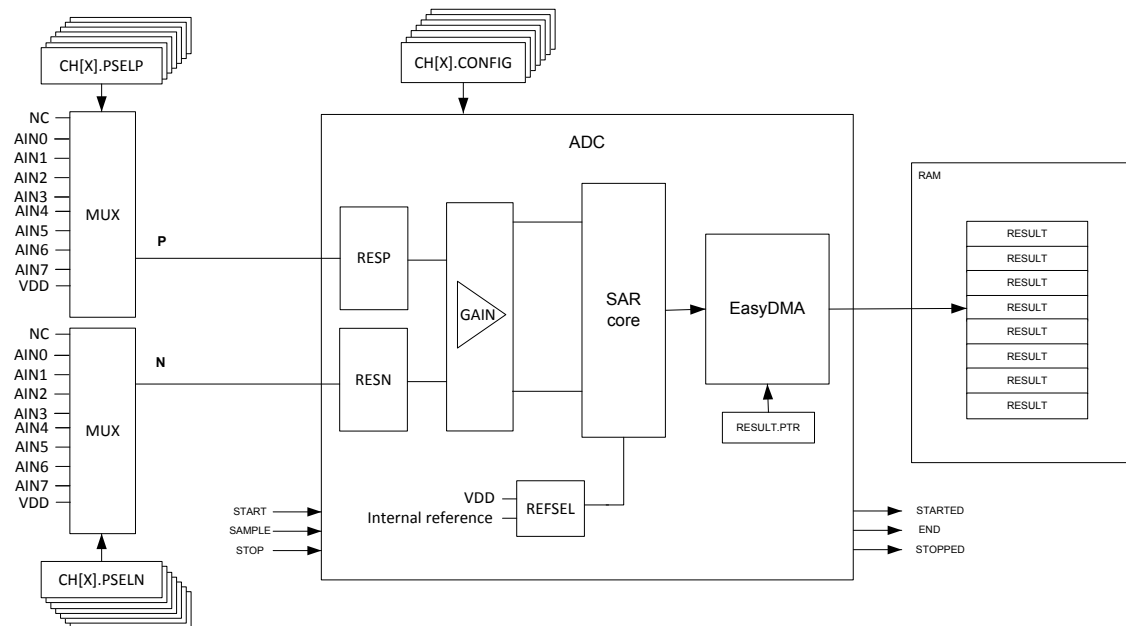

**Figure 105: Simplified ADC block diagram**

Internally, the ADC is always a differential analog-to-digital converter, but by default it is configured with single-ended input in the MODE field of the CH[n].CONFIG register. In single-ended mode, the negative input will be shorted to ground internally.

The assumption in single-ended mode is that the internal ground of the ADC is the same as the external ground that the measured voltage is referred to. The ADC is thus sensitive to ground bounce on the PCB in single-ended mode. If this is a concern we recommend using differential measurement.

## 36.3 Digital output

The output result of the ADC depends on the settings in the CH[n].CONFIG and RESOLUTION registers as follows:

$$\text{RESULT} = [V(P) - V(N)] * \text{GAIN}/\text{REFERENCE} * 2^{(\text{RESOLUTION} - m)}$$

where

**V(P)**

is the voltage at input P

**V(N)**

is the voltage at input N

**GAIN**

is the selected gain setting

**REFERENCE**

is the selected reference voltage

and  $m=0$  if CONFIG.MODE=SE, or  $m=1$  if CONFIG.MODE=Diff.

The result generated by the ADC will deviate from the expected due to DC errors like offset, gain, differential non-linearity (DNL), and integral non-linearity (INL). See [Electrical specification](#) for details on these parameters. The result can also vary due to AC errors like non-linearities in the GAIN block, settling errors due to high source impedance and sampling jitter. For battery measurement the DC errors are most noticeable.



The ADC has a wide selection of gains controlled in the GAIN field of the CH[n].CONFIG register. If CH[n].CONFIG.REFSEL=0, the input range of the ADC core is nominally  $\pm 0.6$  V differential and the input must be scaled accordingly.

The ADC has a temperature dependent offset. If the ADC is to operate over a large temperature range, we recommend running CALIBRATEOFFSET at regular intervals, a CALIBRATEDONE event will be fired when the calibration is complete. Since calibration involves acquiring a sample, a DONE and a RESULTDONE event will be fired as well.

## 36.4 Analog inputs and channels

Up to eight analog input channels, CH[n](n=0..7), can be configured.

See [Shared resources](#) on page 415 for shared input with comparators.

Any one of the available channels can be enabled for the ADC to operate in one-shot mode. If more than one CH[n] is configured, the ADC enters scan mode.

An analog input is selected as a positive converter input if CH[n].PSELP is set, setting CH[n].PSELP also enables the particular channel.

An analog input is selected as a negative converter input if CH[n].PSELN is set. The CH[n].PSELN register will have no effect unless differential mode is enabled, see MODE field in CH[n].CONFIG register.

If more than one of the CH[n].PSELP registers is set, the device enters scan mode. Input selections in scan mode are controlled by the CH[n].PSELP and CH[n].PSELN registers, where CH[n].PSELN is only used if the particular scan channel is specified as differential, see MODE field in CH[n].CONFIG register.

**Important:** Channels selected for either COMP or LPCOMP cannot be used at the same time for ADC sampling, though channels not selected for use by these blocks can be used by the ADC.

**Table 80: Legal connectivity CH[n] vs. analog input**

Channel input	Source	Connectivity
CH[n].PSELP	AIN0...AIN7	Yes(any)
CH[n].PSELP	VDD	Yes
CH[n].PSELN	AIN0...AIN7	Yes(any)
CH[n].PSELN	VDD	Yes

## 36.5 Operation modes

The ADC input configuration supports one-shot mode, continuous mode and scan mode.

Scan mode and oversampling cannot be combined.

### 36.5.1 One-shot mode

One-shot operation is configured by enabling only one of the available channels defined by CH[n].PSELP, CH[n].PSELN, and CH[n].CONFIG registers.

Upon a SAMPLE task, the ADC starts to sample the input voltage. The CH[n].CONFIG.TACQ controls the acquisition time.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA. For more information, see [EasyDMA](#) on page 419.

### 36.5.2 Continuous mode

Continuous sampling can be achieved by using the internal timer in the ADC, or triggering the SAMPLE task from one of the general purpose timers through the PPI.

Care shall be taken to ensure that the sample rate fulfils the following criteria, depending on how many channels are active:

$$f_{\text{SAMPLE}} < 1 / [t_{\text{ACQ}} + t_{\text{conv}}]$$

The SAMPLERATE register can be used as a local timer instead of triggering individual SAMPLE tasks. When SAMPLERATE.MODE is set to Timers, it is sufficient to trigger SAMPLE task only once in order to start the SAADC and triggering the STOP task will stop sampling. The SAMPLERATE.CC field controls the sample rate.

The SAMPLERATE timer mode cannot be combined with SCAN mode, and only one channel can be enabled in this mode.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA.

### 36.5.3 Oversampling

An accumulator in the ADC can be used to average noise on the analog input. In general, oversampling improves the signal-to-noise ratio (SNR). Oversampling, however, does not improve the integral non-linearity (INL), or differential non-linearity (DNL).

Oversampling and scan should not be combined, since oversampling and scan will average over input channels.

The accumulator is controlled in the OVERSAMPLE register. The SAMPLE task must be set  $2^{\text{OVERSAMPLE}}$  number of times before the result is written to RAM. This can be achieved by:

- Configuring a fixed sampling rate using the local timer or a general purpose timer and PPI to trigger a SAMPLE task
- Triggering SAMPLE  $2^{\text{OVERSAMPLE}}$  times from software
- Enabling BURST mode

CH[n].CONFIG.BURST can be enabled to avoid setting SAMPLE task  $2^{\text{OVERSAMPLE}}$  times. With BURST = 1 the ADC will sample the input  $2^{\text{OVERSAMPLE}}$  times as fast as it can (actual timing:  $<(t_{\text{ACQ}} + t_{\text{CONV}}) \times 2^{\text{OVERSAMPLE}}$ ). Thus, for the user it will just appear like the conversion took a bit longer time, but other than that, it is similar to one-shot mode. Scan mode can be combined with BURST=1, if burst is enabled on all channels.

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event signals that enough conversions have taken place for an oversampled result to get transferred into RAM. Note that both events may occur before the actual value has been transferred into RAM by EasyDMA.

### 36.5.4 Scan mode

A channel is considered enabled if CH[n].PSELP is set. If more than one channel, CH[n], is enabled, the ADC enters scan mode.

In scan mode, one SAMPLE task will trigger one conversion per enabled channel. The time it takes to sample all channels is:

$$\text{Total time} < \text{Sum}(\text{CH}[x].t_{\text{ACQ}} + t_{\text{CONV}}), \quad x=0.. \text{enabled channels}$$

A DONE event signals that one sample has been taken.

In this mode, the RESULTDONE event signals has the same meaning as DONE when no oversampling takes place. Note that both events may occur before the actual values have been transferred into RAM by EasyDMA.

*Figure 106: Example of RAM placement (even RESULT.MAXCNT), channels 1, 2 and 5 enabled* on page 419 provides an example of results placement in Data RAM, with an even RESULT.MAXCNT. In this example, channels 1, 2 and 5 are enabled, all others are disabled.

	31	16	15	0
RESULT.PTR	CH[2] 1 <sup>st</sup> result		CH[1] 1 <sup>st</sup> result	
RESULT.PTR + 4	CH[1] 2 <sup>nd</sup> result		CH[5] 1 <sup>st</sup> result	
RESULT.PTR + 8	CH[5] 2 <sup>nd</sup> result		CH[2] 2 <sup>nd</sup> result	
	(…)			
RESULT.PTR + 2*(RESULT.MAXCNT – 2)	CH[5] last result		CH[2] last result	

**Figure 106: Example of RAM placement (even RESULT.MAXCNT), channels 1, 2 and 5 enabled**

*Figure 107: Example of RAM placement (odd RESULT.MAXCNT), channels 1, 2 and 5 enabled* on page 419 provides an example of results placement in Data RAM, with an odd RESULT.MAXCNT. In this example, channels 1, 2 and 5 are enabled, all others are disabled. The last 32-bit word is populated only with one 16-bit result.

	31	16	15	0
RESULT.PTR	CH[2] 1 <sup>st</sup> result		CH[1] 1 <sup>st</sup> result	
RESULT.PTR + 4	CH[1] 2 <sup>nd</sup> result		CH[5] 1 <sup>st</sup> result	
RESULT.PTR + 8	CH[5] 2 <sup>nd</sup> result		CH[2] 2 <sup>nd</sup> result	
	( ... )			
RESULT.PTR + 2*(RESULT.MAXCNT – 1)			CH[5] last result	


**Figure 107: Example of RAM placement (odd RESULT.MAXCNT), channels 1, 2 and 5 enabled**

## 36.6 EasyDMA

After configuring RESULT.PTR and RESULT.MAXCNT, the ADC resources are started by triggering the START task. The ADC is using EasyDMA to store results in a Result buffer in RAM.

The Result buffer is located at the address specified in the RESULT.PTR register. The RESULT.PTR register is double-buffered and it can be updated and prepared for the next START task immediately after the STARTED event is generated. The size of the Result buffer is specified in the RESULT.MAXCNT register and the ADC will generate an END event when it has filled up the Result buffer, see [Figure 108: ADC](#) on page 420. Results are stored in little-endian byte order in Data RAM. Every sample will be sign extended to 16 bit before stored in the Result buffer.

The ADC is stopped by triggering the STOP task. The STOP task will terminate an ongoing sampling. The ADC will generate a STOPPED event when it has stopped. If the ADC is already stopped when the STOP task is triggered, the STOPPED event will still be generated.

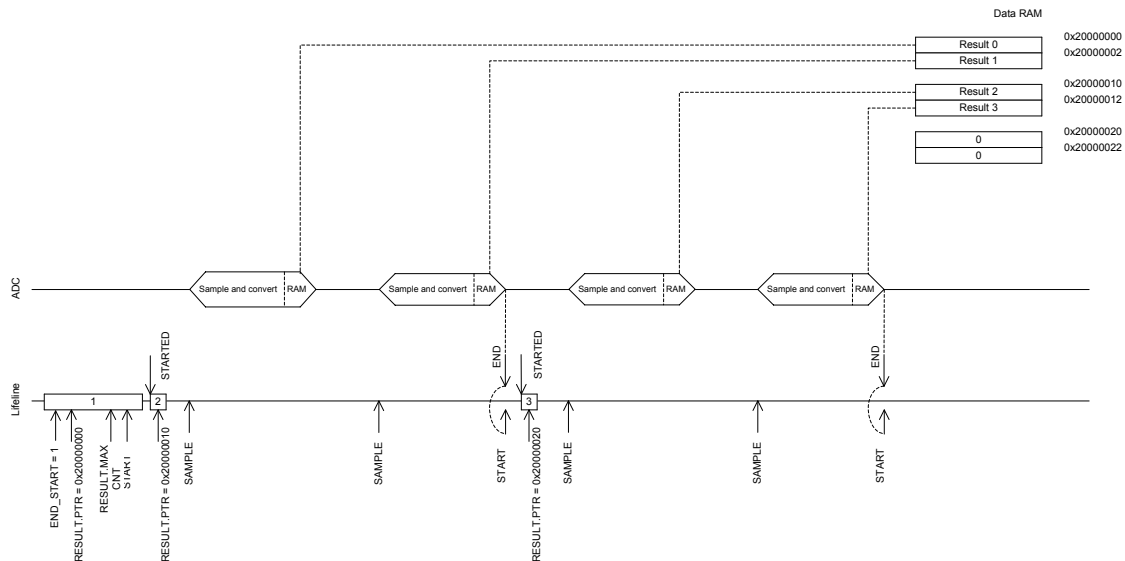

**Figure 108: ADC**

If the `RESULT.PTR` is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

The EasyDMA will have finished accessing the RAM when the `END` or `STOPPED` event has been generated.


The `RESULT.AMOUNT` register can be read following an `END` event or a `STOPPED` event to see how many results have been transferred to the Result buffer in RAM since the `START` task was triggered.

In Scan mode, the size of the Result buffer must be large enough to have room for a minimum one result from each of the enabled channels. To secure this, `RESULT.MAXCNT` must be specified to `RESULT.MAXCNT >= "number of channels enabled"`. See [Scan mode](#) on page 418 for more information about Scan mode.

## 36.7 Resistor ladder

The ADC has an internal resistor string for positive and negative input.

See [Figure 109: Resistor ladder for positive input \(negative input is equivalent, using `RESN` instead of `RESP`\)](#) on page 421. The resistors are controlled in the `CH[n].CONFIG.RESP` and `CH[n].CONFIG.RESN` registers.

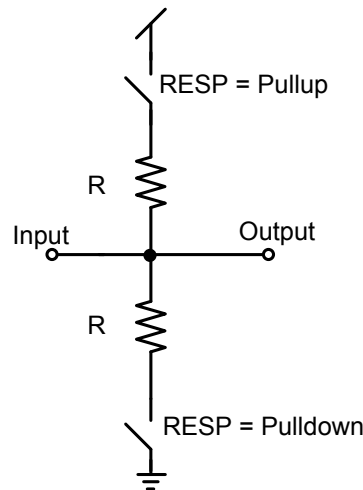

**Figure 109: Resistor ladder for positive input (negative input is equivalent, using RESN instead of RESP)**

## 36.8 Reference

The ADC can use two different references, controlled in the REFSEL field of the CH[n].CONFIG register.

These are:

- Internal reference
- VDD as reference

The internal reference results in an input range of  $\pm 0.6$  V on the ADC core. VDD as reference results in an input range of  $\pm VDD/4$  on the ADC core. The gain block can be used to change the effective input range of the ADC.

$$\text{Input range} = (\pm 0.6 \text{ V or } \pm VDD/4) / \text{Gain}$$

For example, choosing VDD as reference, single ended input (grounded negative input), and a gain of 1/4 the input range will be:

$$\text{Input range} = (VDD/4) / (1/4) = VDD$$

With internal reference, single ended input (grounded negative input), and a gain of 1/6 the input range will be:


$$\text{Input range} = (0.6 \text{ V}) / (1/6) = 3.6 \text{ V}$$

The AIN0-AIN7 inputs cannot exceed VDD, or be lower than VSS.

## 36.9 Acquisition time

To sample the input voltage, the ADC connects a capacitor to the input.

For illustration, see [Figure 110: Simplified ADC sample network](#) on page 422. The acquisition time indicates how long the capacitor is connected, see TACQ field in CH[n].CONFIG register. The required acquisition time depends on the source ( $R_{\text{source}}$ ) resistance. For high source resistance the acquisition time should be increased, see [Table 81: Acquisition time](#) on page 422.

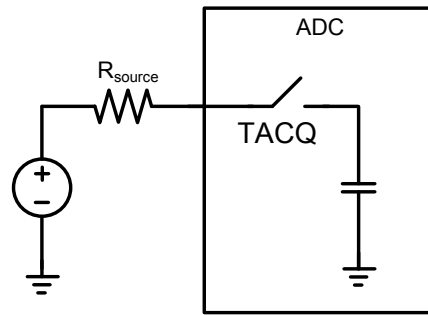

**Figure 110: Simplified ADC sample network**


**Table 81: Acquisition time**

TACQ [ $\mu$ s]	Maximum source resistance [kOhm]
3	10
5	40
10	100
15	200
20	400
40	800

## 36.10 Limits event monitoring

A channel can be event monitored by configuring limit register CH[n].LIMIT.

If the conversion result is higher than the defined high limit, or lower than the defined low limit, the appropriate event will get fired.

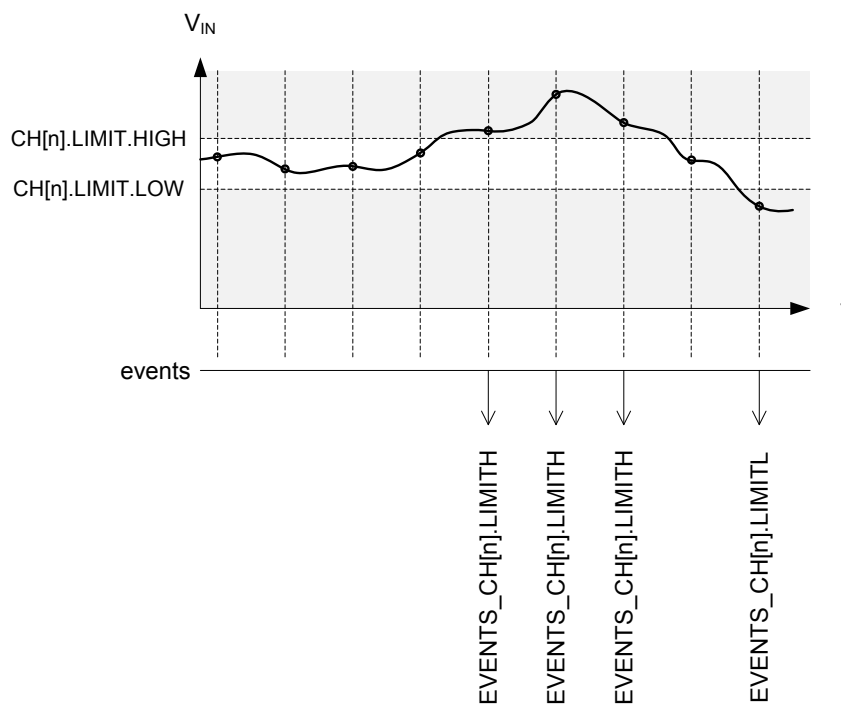

**Figure 111: Example of limits monitoring on channel 'n'**

Note that when setting the limits, CH[n].LIMIT.HIGH shall always be higher than or equal to CH[n].LIMIT.LOW. In other words, an event can be fired only when the input signal has been sampled

outside of the defined limits. It is not possible to fire an event when the input signal is inside a defined range by swapping high and low limits.

The comparison to limits always takes place, there is no need to enable it. If comparison is not required on a channel, the software shall simply ignore the related events. In that situation, the value of the limits registers is irrelevant, so it does not matter if CH[n].LIMIT.LOW is lower than CH[n].LIMIT.HIGH or not.

## 36.11 Registers

**Table 82: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40007000	SAADC	SAADC	Analog to digital converter	

**Table 83: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start the ADC and prepare the result buffer in RAM
TASKS_SAMPLE	0x004	Take one ADC sample, if scan is enabled all channels are sampled
TASKS_STOP	0x008	Stop the ADC and terminate any on-going conversion
TASKS_CALIBRATEOFFSE	0x00C	Starts offset auto-calibration
EVENTS_STARTED	0x100	The ADC has started
EVENTS_END	0x104	The ADC has filled up the Result buffer
EVENTS_DONE	0x108	A conversion task has been completed. Depending on the mode, multiple conversions might be needed for a result to be transferred to RAM.
EVENTS_RESULTDONE	0x10C	A result is ready to get transferred to RAM.
EVENTS_CALIBRATEDON	0x110	Calibration is complete
EVENTS_STOPPED	0x114	The ADC has stopped
EVENTS_CH[0].LIMITH	0x118	Last results is equal or above CH[0].LIMIT.HIGH
EVENTS_CH[0].LIMITL	0x11C	Last results is equal or below CH[0].LIMIT.LOW
EVENTS_CH[1].LIMITH	0x120	Last results is equal or above CH[1].LIMIT.HIGH
EVENTS_CH[1].LIMITL	0x124	Last results is equal or below CH[1].LIMIT.LOW
EVENTS_CH[2].LIMITH	0x128	Last results is equal or above CH[2].LIMIT.HIGH
EVENTS_CH[2].LIMITL	0x12C	Last results is equal or below CH[2].LIMIT.LOW
EVENTS_CH[3].LIMITH	0x130	Last results is equal or above CH[3].LIMIT.HIGH
EVENTS_CH[3].LIMITL	0x134	Last results is equal or below CH[3].LIMIT.LOW
EVENTS_CH[4].LIMITH	0x138	Last results is equal or above CH[4].LIMIT.HIGH
EVENTS_CH[4].LIMITL	0x13C	Last results is equal or below CH[4].LIMIT.LOW
EVENTS_CH[5].LIMITH	0x140	Last results is equal or above CH[5].LIMIT.HIGH
EVENTS_CH[5].LIMITL	0x144	Last results is equal or below CH[5].LIMIT.LOW
EVENTS_CH[6].LIMITH	0x148	Last results is equal or above CH[6].LIMIT.HIGH
EVENTS_CH[6].LIMITL	0x14C	Last results is equal or below CH[6].LIMIT.LOW
EVENTS_CH[7].LIMITH	0x150	Last results is equal or above CH[7].LIMIT.HIGH
EVENTS_CH[7].LIMITL	0x154	Last results is equal or below CH[7].LIMIT.LOW
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
STATUS	0x400	Status
ENABLE	0x500	Enable or disable ADC
CH[0].PSEL	0x510	Input positive pin selection for CH[0]
CH[0].PSELN	0x514	Input negative pin selection for CH[0]
CH[0].CONFIG	0x518	Input configuration for CH[0]
CH[0].LIMIT	0x51C	High/low limits for event monitoring a channel
CH[1].PSEL	0x520	Input positive pin selection for CH[1]
CH[1].PSELN	0x524	Input negative pin selection for CH[1]
CH[1].CONFIG	0x528	Input configuration for CH[1]
CH[1].LIMIT	0x52C	High/low limits for event monitoring a channel
CH[2].PSEL	0x530	Input positive pin selection for CH[2]

Register	Offset	Description
<a href="#">CH[2].PSELN</a>	0x534	Input negative pin selection for CH[2]
<a href="#">CH[2].CONFIG</a>	0x538	Input configuration for CH[2]
<a href="#">CH[2].LIMIT</a>	0x53C	High/low limits for event monitoring a channel
<a href="#">CH[3].PSELP</a>	0x540	Input positive pin selection for CH[3]
<a href="#">CH[3].PSELN</a>	0x544	Input negative pin selection for CH[3]
<a href="#">CH[3].CONFIG</a>	0x548	Input configuration for CH[3]
<a href="#">CH[3].LIMIT</a>	0x54C	High/low limits for event monitoring a channel
<a href="#">CH[4].PSELP</a>	0x550	Input positive pin selection for CH[4]
<a href="#">CH[4].PSELN</a>	0x554	Input negative pin selection for CH[4]
<a href="#">CH[4].CONFIG</a>	0x558	Input configuration for CH[4]
<a href="#">CH[4].LIMIT</a>	0x55C	High/low limits for event monitoring a channel
<a href="#">CH[5].PSELP</a>	0x560	Input positive pin selection for CH[5]
<a href="#">CH[5].PSELN</a>	0x564	Input negative pin selection for CH[5]
<a href="#">CH[5].CONFIG</a>	0x568	Input configuration for CH[5]
<a href="#">CH[5].LIMIT</a>	0x56C	High/low limits for event monitoring a channel
<a href="#">CH[6].PSELP</a>	0x570	Input positive pin selection for CH[6]
<a href="#">CH[6].PSELN</a>	0x574	Input negative pin selection for CH[6]
<a href="#">CH[6].CONFIG</a>	0x578	Input configuration for CH[6]
<a href="#">CH[6].LIMIT</a>	0x57C	High/low limits for event monitoring a channel
<a href="#">CH[7].PSELP</a>	0x580	Input positive pin selection for CH[7]
<a href="#">CH[7].PSELN</a>	0x584	Input negative pin selection for CH[7]
<a href="#">CH[7].CONFIG</a>	0x588	Input configuration for CH[7]
<a href="#">CH[7].LIMIT</a>	0x58C	High/low limits for event monitoring a channel
<a href="#">RESOLUTION</a>	0x5F0	Resolution configuration
<a href="#">OVERSAMPLE</a>	0x5F4	Oversampling configuration. OVERSAMPLE should not be combined with SCAN. The RESOLUTION is applied before averaging, thus for high OVERSAMPLE a higher RESOLUTION should be used.
<a href="#">SAMPLERATE</a>	0x5F8	Controls normal or continuous sample rate
<a href="#">RESULT.PTR</a>	0x62C	Data pointer
<a href="#">RESULT.MAXCNT</a>	0x630	Maximum number of buffer words to transfer
<a href="#">RESULT.AMOUNT</a>	0x634	Number of buffer words transferred since last START

### 36.11.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																														
A	RW	STARTED			Enable or disable interrupt for STARTED event																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	END			Enable or disable interrupt for END event																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	DONE			Enable or disable interrupt for DONE event																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
D	RW	RESULTDONE			Enable or disable interrupt for RESULTDONE event																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																
Id				V																U																T																S																R																Q																P																O																N																M																L																K																J																I																H																G																F																E																D																C																B																A															
Reset 0x00000000				0																																																																																																																																																																																																																																																																																																																																																															
Id	RW	Field	Value Id	Value	Description																																																																																																																																																																																																																																																																																																																																																														
E	RW	CALIBRATEDONE			Enable or disable interrupt for CALIBRATEDONE event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
F	RW	STOPPED			Enable or disable interrupt for STOPPED event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
G	RW	CH0LIMITH			Enable or disable interrupt for CH[0].LIMITH event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
H	RW	CH0LIMITL			Enable or disable interrupt for CH[0].LIMITL event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
I	RW	CH1LIMITH			Enable or disable interrupt for CH[1].LIMITH event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
J	RW	CH1LIMITL			Enable or disable interrupt for CH[1].LIMITL event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
K	RW	CH2LIMITH			Enable or disable interrupt for CH[2].LIMITH event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
L	RW	CH2LIMITL			Enable or disable interrupt for CH[2].LIMITL event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
M	RW	CH3LIMITH			Enable or disable interrupt for CH[3].LIMITH event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
N	RW	CH3LIMITL			Enable or disable interrupt for CH[3].LIMITL event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
O	RW	CH4LIMITH			Enable or disable interrupt for CH[4].LIMITH event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
P	RW	CH4LIMITL			Enable or disable interrupt for CH[4].LIMITL event																																																																																																																																																																																																																																																																																																																																																														
			Disabled	0	Disable																																																																																																																																																																																																																																																																																																																																																														
			Enabled	1	Enable																																																																																																																																																																																																																																																																																																																																																														
Q	RW	CH5LIMITH			Enable or disable interrupt for CH[5].LIMITH event																																																																																																																																																																																																																																																																																																																																																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id															V					U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																			
R	RW	CH5LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[5].LIMITL event																																		
						See <a href="#">EVENTS_CH[5].LIMITL</a>																																		
S	RW	CH6LIMITH	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[6].LIMITH event																																		
						See <a href="#">EVENTS_CH[6].LIMITH</a>																																		
T	RW	CH6LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[6].LIMITL event																																		
						See <a href="#">EVENTS_CH[6].LIMITL</a>																																		
U	RW	CH7LIMITH	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[7].LIMITH event																																		
						See <a href="#">EVENTS_CH[7].LIMITH</a>																																		
V	RW	CH7LIMITL	Disabled	0	Disable																																			
			Enabled	1	Enable																																			
						Enable or disable interrupt for CH[7].LIMITL event																																		
						See <a href="#">EVENTS_CH[7].LIMITL</a>																																		

### 36.11.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																
A	RW	STARTED			Write '1' to Enable interrupt for STARTED event																																
					See <a href="#">EVENTS_STARTED</a>																																
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
B	RW	END	Enabled	1	Read: Enabled																																
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																
C	RW	DONE			Write '1' to Enable interrupt for DONE event																																
					See <a href="#">EVENTS_DONE</a>																																
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
D	RW	RESULTDONE	Enabled	1	Read: Enabled																																
			Set	1	Enable																																
			Disabled	0	Read: Disabled																																
			Enabled	1	Read: Enabled																																

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value	Id	Value	Description																												
E	RW	CALIBRATEDONE				Write '1' to Enable interrupt for CALIBRATEDONE event																												
						See <a href="#">EVENTS_CALIBRATEDONE</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
F	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																												
						See <a href="#">EVENTS_STOPPED</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
G	RW	CH0LIMITH				Write '1' to Enable interrupt for CH[0].LIMITH event																												
						See <a href="#">EVENTS_CH[0].LIMITH</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
H	RW	CH0LIMITL				Write '1' to Enable interrupt for CH[0].LIMITL event																												
						See <a href="#">EVENTS_CH[0].LIMITL</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
I	RW	CH1LIMITH				Write '1' to Enable interrupt for CH[1].LIMITH event																												
						See <a href="#">EVENTS_CH[1].LIMITH</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
J	RW	CH1LIMITL				Write '1' to Enable interrupt for CH[1].LIMITL event																												
						See <a href="#">EVENTS_CH[1].LIMITL</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
K	RW	CH2LIMITH				Write '1' to Enable interrupt for CH[2].LIMITH event																												
						See <a href="#">EVENTS_CH[2].LIMITH</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
L	RW	CH2LIMITL				Write '1' to Enable interrupt for CH[2].LIMITL event																												
						See <a href="#">EVENTS_CH[2].LIMITL</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
M	RW	CH3LIMITH				Write '1' to Enable interrupt for CH[3].LIMITH event																												
						See <a href="#">EVENTS_CH[3].LIMITH</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
N	RW	CH3LIMITL				Write '1' to Enable interrupt for CH[3].LIMITL event																												
						See <a href="#">EVENTS_CH[3].LIMITL</a>																												
		Set	1			Enable																												
		Disabled	0			Read: Disabled																												
		Enabled	1			Read: Enabled																												
O	RW	CH4LIMITH				Write '1' to Enable interrupt for CH[4].LIMITH event																												

Bit number																																			
Id				V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_CH[4].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
P	RW	CH4LIMITL			Write '1' to Enable interrupt for CH[4].LIMITL event																														
					See <a href="#">EVENTS_CH[4].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
Q	RW	CH5LIMITH			Write '1' to Enable interrupt for CH[5].LIMITH event																														
					See <a href="#">EVENTS_CH[5].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
R	RW	CH5LIMITL			Write '1' to Enable interrupt for CH[5].LIMITL event																														
					See <a href="#">EVENTS_CH[5].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
S	RW	CH6LIMITH			Write '1' to Enable interrupt for CH[6].LIMITH event																														
					See <a href="#">EVENTS_CH[6].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
T	RW	CH6LIMITL			Write '1' to Enable interrupt for CH[6].LIMITL event																														
					See <a href="#">EVENTS_CH[6].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
U	RW	CH7LIMITH			Write '1' to Enable interrupt for CH[7].LIMITH event																														
					See <a href="#">EVENTS_CH[7].LIMITH</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
V	RW	CH7LIMITL			Write '1' to Enable interrupt for CH[7].LIMITL event																														
					See <a href="#">EVENTS_CH[7].LIMITL</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 36.11.3 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id															V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	STARTED				Write '1' to Disable interrupt for STARTED event																														
						See <a href="#">EVENTS_STARTED</a>																														
		Clear	1			Disable																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				V U T S R Q P O N M L K J I H G F E D C B A																																			
Reset 0x00000000				0 0																																			
Id	RW	Field	Value Id	Value	Description																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for END event																																				
			See <a href="#">EVENTS_END</a>																																				
B	RW	END	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for END event																																				
C	RW	DONE	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for DONE event																																				
D	RW	RESULTDONE	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for RESULTDONE event																																				
E	RW	CALIBRATEDONE	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for CALIBRATEDONE event																																				
F	RW	STOPPED	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for STOPPED event																																				
G	RW	CH0LIMITH	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for CH[0].LIMITH event																																				
H	RW	CH0LIMITL	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for CH[0].LIMITL event																																				
I	RW	CH1LIMITH	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for CH[1].LIMITH event																																				
J	RW	CH1LIMITL	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Enabled	1	Read: Enabled																																		
			Write '1' to Disable interrupt for CH[1].LIMITL event																																				
K	RW	CH2LIMITH	Clear	1	Disable																																		
			Disabled	0	Read: Disabled																																		
			Write '1' to Disable interrupt for CH[2].LIMITH event																																				
			See <a href="#">EVENTS_CH[2].LIMITH</a>																																				

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000			0 0																															
Id	RW	Field	Value Id	Value	Description																													
L	RW	CH2LIMITL	Enabled	1	Read: Enabled																													
					Write '1' to Disable interrupt for CH[2].LIMITL event																													
					See <a href="#">EVENTS_CH[2].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
M	RW	CH3LIMITH			Write '1' to Disable interrupt for CH[3].LIMITH event																													
					See <a href="#">EVENTS_CH[3].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
N	RW	CH3LIMITL			Write '1' to Disable interrupt for CH[3].LIMITL event																													
					See <a href="#">EVENTS_CH[3].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
O	RW	CH4LIMITH			Write '1' to Disable interrupt for CH[4].LIMITH event																													
					See <a href="#">EVENTS_CH[4].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
P	RW	CH4LIMITL			Write '1' to Disable interrupt for CH[4].LIMITL event																													
					See <a href="#">EVENTS_CH[4].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
Q	RW	CH5LIMITH			Write '1' to Disable interrupt for CH[5].LIMITH event																													
					See <a href="#">EVENTS_CH[5].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
R	RW	CH5LIMITL			Write '1' to Disable interrupt for CH[5].LIMITL event																													
					See <a href="#">EVENTS_CH[5].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
S	RW	CH6LIMITH			Write '1' to Disable interrupt for CH[6].LIMITH event																													
					See <a href="#">EVENTS_CH[6].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
T	RW	CH6LIMITL			Write '1' to Disable interrupt for CH[6].LIMITL event																													
					See <a href="#">EVENTS_CH[6].LIMITL</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												
U	RW	CH7LIMITH			Write '1' to Disable interrupt for CH[7].LIMITH event																													
					See <a href="#">EVENTS_CH[7].LIMITH</a>																													
			Clear	1	Disable																													
			Disabled	0	Read: Disabled																													
				Enabled	1	Read: Enabled																												

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
V	RW	CH7LIMITL				Write '1' to Disable interrupt for CH[7].LIMITL event																													
						See <a href="#">EVENTS_CH[7].LIMITL</a>																													
		Clear	1			Disable																													
		Disabled	0			Read: Disabled																													
		Enabled	1			Read: Enabled																													

### 36.11.4 STATUS

Address offset: 0x400

Status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	R	STATUS				Status																																
		Ready	0			ADC is ready. No on-going conversion.																																
		Busy	1			ADC is busy. Conversion in progress.																																

### 36.11.5 ENABLE

Address offset: 0x500

Enable or disable ADC

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																
A	RW	ENABLE				Enable or disable ADC																																
		Disabled	0			Disable ADC																																
		Enabled	1			Enable ADC																																
					When enabled, the ADC will acquire access to the analog input pins specified in the CH[n].PSELP and CH[n].PSELN registers.																																	

### 36.11.6 CH[0].PSELP

Address offset: 0x510

Input positive pin selection for CH[0]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	PSELP			Analog positive input channel																															
			NC	0	Not connected																															
			AnalogInput0	1	AIN0																															
			AnalogInput1	2	AIN1																															
			AnalogInput2	3	AIN2																															
			AnalogInput3	4	AIN3																															
			AnalogInput4	5	AIN4																															
			AnalogInput5	6	AIN5																															
			AnalogInput6	7	AIN6																															
			AnalogInput7	8	AIN7																															
			VDD	9	VDD																															
			VDDHDIV5	0x11	VDDH/5																															

### 36.11.7 CH[0].PSELN

Address offset: 0x514

Input negative pin selection for CH[0]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																											
Id																																				A	A	A	A	A																						
Reset 0x00000000				0																																0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																																																									
A	RW	PSELN		Analog negative input, enables differential channel																																																										
			NC	0	Not connected																																																									
			AnalogInput0	1	AIN0																																																									
			AnalogInput1	2	AIN1																																																									
			AnalogInput2	3	AIN2																																																									
			AnalogInput3	4	AIN3																																																									
			AnalogInput4	5	AIN4																																																									
			AnalogInput5	6	AIN5																																																									
			AnalogInput6	7	AIN6																																																									
			AnalogInput7	8	AIN7																																																									
			VDD	9	VDD																																																									
			VDDHDIV5	0x11	VDDH/5																																																									

### 36.11.8 CH[0].CONFIG

Address offset: 0x518

### Input configuration for CH[0]

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id			G F E E E D C C C B B A A																														
Reset 0x00020000			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																														
Id	RW	Field	Value Id	Value	Description																												
A	RW	RESP			Positive channel resistor control																												
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
B	RW	RESN			Negative channel resistor control																												
			Bypass	0	Bypass resistor ladder																												
			Pulldown	1	Pull-down to GND																												
			Pullup	2	Pull-up to VDD																												
			VDD1_2	3	Set input at VDD/2																												
C	RW	GAIN			Gain control																												
			Gain1_6	0	1/6																												
			Gain1_5	1	1/5																												
			Gain1_4	2	1/4																												
			Gain1_3	3	1/3																												
			Gain1_2	4	1/2																												
			Gain1	5	1																												
			Gain2	6	2																												
D	RW	REFSEL			Reference control																												
			Internal	0	Internal reference (0.6 V)																												
			VDD1_4	1	VDD/4 as reference																												
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																												
			3us	0	3 us																												
			5us	1	5 us																												
			10us	2	10 us																												
			15us	3	15 us																												



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id				G								F				E			E			D			C			C			B			B			A			A		
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field	Value Id	Value	Description																																					
F	RW	MODE	20us	4	20 us																																					
			40us	5	40 us																																					
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																					
			Diff	1	Differential																																					
G	RW	BURST			Enable burst mode																																					
			Disabled	0	Burst mode is disabled (normal operation)																																					
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																					

### 36.11.9 CH[0].LIMIT

Address offset: 0x51C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value														Description																	
A	RW	LOW		[-32768 to +32767]														Low level limit																	
B	RW	HIGH		[-32768 to +32767]														High level limit																	

### 36.11.10 CH[1].PSELP

Address offset: 0x520

Input positive pin selection for CH[1]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 36.11.11 CH[1].PSELN

Address offset: 0x524

Input negative pin selection for CH[1]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																A	A	A	A	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value		Description																																
A	RW	PSELN				Analog negative input, enables differential channel																																

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value	Description																																		
			NC	0	Not connected																																			
			AnalogInput0	1	AIN0																																			
			AnalogInput1	2	AIN1																																			
			AnalogInput2	3	AIN2																																			
			AnalogInput3	4	AIN3																																			
			AnalogInput4	5	AIN4																																			
			AnalogInput5	6	AIN5																																			
			AnalogInput6	7	AIN6																																			
			AnalogInput7	8	AIN7																																			
			VDD	9	VDD																																			
			VDDHDIV5	0x11	VDDH/5																																			

### 36.11.12 CH[1].CONFIG

Address offset: 0x528

Input configuration for CH[1]

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id																				G					F	E	E	E					D	C	C	C					B	B					A	A
Reset 0x00020000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																										
A	RW	RESP				Positive channel resistor control																																										
			Bypass	0		Bypass resistor ladder																																										
			Pulldown	1		Pull-down to GND																																										
			Pullup	2		Pull-up to VDD																																										
			VDD1_2	3		Set input at VDD/2																																										
B	RW	RESN				Negative channel resistor control																																										
			Bypass	0		Bypass resistor ladder																																										
			Pulldown	1		Pull-down to GND																																										
			Pullup	2		Pull-up to VDD																																										
			VDD1_2	3		Set input at VDD/2																																										
C	RW	GAIN				Gain control																																										
			Gain1_6	0		1/6																																										
			Gain1_5	1		1/5																																										
			Gain1_4	2		1/4																																										
			Gain1_3	3		1/3																																										
			Gain1_2	4		1/2																																										
			Gain1	5		1																																										
			Gain2	6		2																																										
			Gain4	7		4																																										
D	RW	REFSEL				Reference control																																										
			Internal	0		Internal reference (0.6 V)																																										
			VDD1_4	1		VDD/4 as reference																																										
E	RW	TACQ				Acquisition time, the time the ADC uses to sample the input voltage																																										
			3us	0		3 us																																										
			5us	1		5 us																																										
			10us	2		10 us																																										
			15us	3		15 us																																										
			20us	4		20 us																																										
			40us	5		40 us																																										
F	RW	MODE				Enable differential mode																																										
			SE	0		Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																										
			Diff	1		Differential																																										

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
Id													G				F				E				E				E								D				C				C				C								B				B								A				A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Reset 0x00020000					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0				

### 36.11.13 CH[1].LIMIT

Address offset: 0x52C

High/low limits for event monitoring a channel

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	LOW			[-32768 to +32767]	Low level limit																										
B	RW	HIGH			[-32768 to +32767]	High level limit																										

### 36.11.14 CH[2].PSELP

Address offset: 0x530

Input positive pin selection for CH[2]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																					A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value	Description																																			
A	RW	PSELP				Analog positive input channel																																			
			NC		0	Not connected																																			
			AnalogInput0		1	AIN0																																			
			AnalogInput1		2	AIN1																																			
			AnalogInput2		3	AIN2																																			
			AnalogInput3		4	AIN3																																			
			AnalogInput4		5	AIN4																																			
			AnalogInput5		6	AIN5																																			
			AnalogInput6		7	AIN6																																			
			AnalogInput7		8	AIN7																																			
			VDD		9	VDD																																			
			VDDHDIV5		0x11	VDDH/5																																			

### 36.11.15 CH[2].PSELN

Address offset: 0x534

Input negative pin selection for CH[2]

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PSELN				Analog negative input, enables differential channel																														
			NC		0	Not connected																														
			AnalogInput0		1	AIN0																														
			AnalogInput1		2	AIN1																														
			AnalogInput2		3	AIN2																														
			AnalogInput3		4	AIN3																														
			AnalogInput4		5	AIN4																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			AnalogInput5	6	AIN5																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														
			VDDHDIV5	0x11	VDDH/5																														

### 36.11.16 CH[2].CONFIG

Address offset: 0x538

Input configuration for CH[2]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id														G	F			E	E	E	D					C	C	C	B			B	A		A			
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	RESP			Positive channel resistor control																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
B	RW	RESN			Negative channel resistor control																																	
			Bypass	0	Bypass resistor ladder																																	
			Pulldown	1	Pull-down to GND																																	
			Pullup	2	Pull-up to VDD																																	
			VDD1_2	3	Set input at VDD/2																																	
C	RW	GAIN			Gain control																																	
			Gain1_6	0	1/6																																	
			Gain1_5	1	1/5																																	
			Gain1_4	2	1/4																																	
			Gain1_3	3	1/3																																	
			Gain1_2	4	1/2																																	
			Gain1	5	1																																	
			Gain2	6	2																																	
D	RW	REFSEL			Reference control																																	
			Internal	0	Internal reference (0.6 V)																																	
			VDD1_4	1	VDD/4 as reference																																	
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																	
			3us	0	3 us																																	
			5us	1	5 us																																	
			10us	2	10 us																																	
			15us	3	15 us																																	
			20us	4	20 us																																	
			40us	5	40 us																																	
F	RW	MODE			Enable differential mode																																	
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																	
			Diff	1	Differential																																	
G	RW	BURST			Enable burst mode																																	
			Disabled	0	Burst mode is disabled (normal operation)																																	
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																	

### 36.11.17 CH[2].LIMIT

Address offset: 0x53C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>														<b>Description</b>																	
A	RW	LOW		[-32768 to +32767]														Low level limit																	
B	RW	HIGH		[-32768 to +32767]														High level limit																	

### 36.11.18 CH[3].PSELP

Address offset: 0x540

Input positive pin selection for CH[3]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELP			Analog positive input channel																														
			NC	0	Not connected																														
			AnalogInput0	1	AIN0																														
			AnalogInput1	2	AIN1																														
			AnalogInput2	3	AIN2																														
			AnalogInput3	4	AIN3																														
			AnalogInput4	5	AIN4																														
			AnalogInput5	6	AIN5																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														
			VDDHDIV5	0x11	VDDH/5																														

### 36.11.19 CH[3].PSELN

Address offset: 0x544

Input negative pin selection for CH[3]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELN			Analog negative input, enables differential channel																														
			NC	0	Not connected																														
			AnalogInput0	1	AIN0																														
			AnalogInput1	2	AIN1																														
			AnalogInput2	3	AIN2																														
			AnalogInput3	4	AIN3																														
			AnalogInput4	5	AIN4																														
			AnalogInput5	6	AIN5																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														
			VDDHDIV5	0x11	VDDH/5																														

### 36.11.20 CH[3].CONFIG

Address offset: 0x548

### Input configuration for CH[3]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id												G					F					E	E	E					D	C	C	C					B	B					A	A
Reset 0x00020000												0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																							
A	RW	RESP			Positive channel resistor control																																							
			Bypass	0	Bypass resistor ladder																																							
			Pulldown	1	Pull-down to GND																																							
			Pullup	2	Pull-up to VDD																																							
			VDD1_2	3	Set input at VDD/2																																							
B	RW	RESN			Negative channel resistor control																																							
			Bypass	0	Bypass resistor ladder																																							
			Pulldown	1	Pull-down to GND																																							
			Pullup	2	Pull-up to VDD																																							
			VDD1_2	3	Set input at VDD/2																																							
C	RW	GAIN			Gain control																																							
			Gain1_6	0	1/6																																							
			Gain1_5	1	1/5																																							
			Gain1_4	2	1/4																																							
			Gain1_3	3	1/3																																							
			Gain1_2	4	1/2																																							
			Gain1	5	1																																							
			Gain2	6	2																																							
D	RW	REFSEL			Reference control																																							
			Internal	0	Internal reference (0.6 V)																																							
			VDD1_4	1	VDD/4 as reference																																							
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																							
			3us	0	3 us																																							
			5us	1	5 us																																							
			10us	2	10 us																																							
			15us	3	15 us																																							
			20us	4	20 us																																							
			40us	5	40 us																																							
F	RW	MODE			Enable differential mode																																							
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																							
			Diff	1	Differential																																							
G	RW	BURST			Enable burst mode																																							
			Disabled	0	Burst mode is disabled (normal operation)																																							
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																							

### 36.11.21 CH[3].LIMIT

Address offset: 0x54C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	LOW			[-32768 to +32767] Low level limit																															
B	RW	HIGH			[-32768 to +32767] High level limit																															

### 36.11.22 CH[4].PSELP

Address offset: 0x550

### Input positive pin selection for CH[4]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELP			Analog positive input channel																														
			NC	0	Not connected																														
			AnalogInput0	1	AIN0																														
			AnalogInput1	2	AIN1																														
			AnalogInput2	3	AIN2																														
			AnalogInput3	4	AIN3																														
			AnalogInput4	5	AIN4																														
			AnalogInput5	6	AIN5																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														
			VDDHDIV5	0x11	VDDH/5																														

### 36.11.23 CH[4].PSELN

Address offset: 0x554

#### Input negative pin selection for CH[4]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSELN			Analog negative input, enables differential channel																														
			NC	0	Not connected																														
			AnalogInput0	1	AIN0																														
			AnalogInput1	2	AIN1																														
			AnalogInput2	3	AIN2																														
			AnalogInput3	4	AIN3																														
			AnalogInput4	5	AIN4																														
			AnalogInput5	6	AIN5																														
			AnalogInput6	7	AIN6																														
			AnalogInput7	8	AIN7																														
			VDD	9	VDD																														
			VDDHDIV5	0x11	VDDH/5																														

### 36.11.24 CH[4].CONFIG

Address offset: 0x558

#### Input configuration for CH[4]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				G F E E E D C C C B B A A																															
Reset 0x00020000				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	RESP			Positive channel resistor control																														
			Bypass	0	Bypass resistor ladder																														
			Pulldown	1	Pull-down to GND																														
			Pullup	2	Pull-up to VDD																														
			VDD1_2	3	Set input at VDD/2																														
B	RW	RESN			Negative channel resistor control																														
			Bypass	0	Bypass resistor ladder																														
			Pulldown	1	Pull-down to GND																														
			Pullup	2	Pull-up to VDD																														
			VDD1_2	3	Set input at VDD/2																														

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id			G								F				E				E				D				C				C				B				B				A		A	
Reset 0x00020000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Id	RW	Field	Value	Id	Value	Description																																								
C	RW	GAIN				Gain control																																								
			Gain1_6	0	1/6																																									
			Gain1_5	1	1/5																																									
			Gain1_4	2	1/4																																									
			Gain1_3	3	1/3																																									
			Gain1_2	4	1/2																																									
			Gain1	5	1																																									
			Gain2	6	2																																									
D	RW	REFSEL				Reference control																																								
			Internal	0	Internal reference (0.6 V)																																									
			VDD1_4	1	VDD/4 as reference																																									
E	RW	TACQ				Acquisition time, the time the ADC uses to sample the input voltage																																								
			3us	0	3 us																																									
			5us	1	5 us																																									
			10us	2	10 us																																									
			15us	3	15 us																																									
			20us	4	20 us																																									
			40us	5	40 us																																									
F	RW	MODE				Enable differential mode																																								
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																									
			Diff	1	Differential																																									
G	RW	BURST				Enable burst mode																																								
			Disabled	0	Burst mode is disabled (normal operation)																																									
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																									

## 36.11.25 CH[4].LIMIT

Address offset: 0x55C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	LOW				[-32768 to +32767]																													
B	RW	HIGH				[-32768 to +32767]																													

## 36.11.26 CH[5].PSELP

Address offset: 0x560

Input positive pin selection for CH[5]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 36.11.27 CH[5].PSELN

Address offset: 0x564

Input negative pin selection for CH[5]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	PSELN			Analog negative input, enables differential channel																															
			NC	0	Not connected																															
			AnalogInput0	1	AIN0																															
			AnalogInput1	2	AIN1																															
			AnalogInput2	3	AIN2																															
			AnalogInput3	4	AIN3																															
			AnalogInput4	5	AIN4																															
			AnalogInput5	6	AIN5																															
			AnalogInput6	7	AIN6																															
			AnalogInput7	8	AIN7																															
			VDD	9	VDD																															
			VDDHDIV5	0x11	VDDH/5																															

### 36.11.28 CH[5].CONFIG

Address offset: 0x568

Input configuration for CH[5]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id												G		F			E			E	E				D		C		C	C				B		B				A		A
Reset 0x00020000				0								0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field		Value Id	Value			Description																																		
A	RW	RESP						Positive channel resistor control																																		
				Bypass	0			Bypass resistor ladder																																		
				Pulldown	1			Pull-down to GND																																		
				Pullup	2			Pull-up to VDD																																		
				VDD1_2	3			Set input at VDD/2																																		
B	RW	RESN						Negative channel resistor control																																		
				Bypass	0			Bypass resistor ladder																																		
				Pulldown	1			Pull-down to GND																																		
				Pullup	2			Pull-up to VDD																																		
				VDD1_2	3			Set input at VDD/2																																		
C	RW	GAIN						Gain control																																		
				Gain1_6	0			1/6																																		
				Gain1_5	1			1/5																																		
				Gain1_4	2			1/4																																		
				Gain1_3	3			1/3																																		
				Gain1_2	4			1/2																																		

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																
Id				G								F				E				E				D				C				C				B				B				A				A			
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0														
Id	RW	Field	Value Id	Value	Description																																														
			Gain1	5	1																																														
			Gain2	6	2																																														
			Gain4	7	4																																														
D	RW	REFSEL			Reference control																																														
			Internal	0	Internal reference (0.6 V)																																														
			VDD1_4	1	VDD/4 as reference																																														
E	RW	TACQ			Acquisition time, the time the ADC uses to sample the input voltage																																														
			3us	0	3 us																																														
			5us	1	5 us																																														
			10us	2	10 us																																														
			15us	3	15 us																																														
			20us	4	20 us																																														
			40us	5	40 us																																														
F	RW	MODE			Enable differential mode																																														
			SE	0	Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																														
			Diff	1	Differential																																														
G	RW	BURST			Enable burst mode																																														
			Disabled	0	Burst mode is disabled (normal operation)																																														
			Enabled	1	Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																														

### 36.11.29 CH[5].LIMIT

Address offset: 0x56C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	LOW		[-32768 to +32767]				Low level limit																											
B	RW	HIGH		[-32768 to +32767]				High level limit																											

### 36.11.30 CH[6].PSELP

Address offset: 0x570

Input positive pin selection for CH[6]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	PSELP			Analog positive input channel																															
			NC	0	Not connected																															
			AnalogInput0	1	AIN0																															
			AnalogInput1	2	AIN1																															
			AnalogInput2	3	AIN2																															
			AnalogInput3	4	AIN3																															
			AnalogInput4	5	AIN4																															
			AnalogInput5	6	AIN5																															
			AnalogInput6	7	AIN6																															
			AnalogInput7	8	AIN7																															
			VDD	9	VDD																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value		Description																														
			VDDHDIV5	0x11		VDDH/5																														

### 36.11.31 CH[6].PSELN

Address offset: 0x574

Input negative pin selection for CH[6]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																				A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value	Description																																			
A	RW	PSELN			Analog negative input, enables differential channel																																			
			NC	0	Not connected																																			
			AnalogInput0	1																																				
			AnalogInput1	2																																				
			AnalogInput2	3																																				
			AnalogInput3	4																																				
			AnalogInput4	5																																				
			AnalogInput5	6																																				
			AnalogInput6	7																																				
			AnalogInput7	8																																				
			VDD	9																																				
			VDDHDIV5	0x11	VDDH/5																																			

### 36.11.32 CH[6].CONFIG

Address offset: 0x578

Input configuration for CH[6]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id														G	F			E	E	E						D	C	C	C						B	B				A	A
Reset 0x00020000														0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																																				
A	RW	RESP			Positive channel resistor control																																				
			Bypass	0	Bypass resistor ladder																																				
			Pulldown	1	Pull-down to GND																																				
			Pullup	2	Pull-up to VDD																																				
			VDD1_2	3	Set input at VDD/2																																				
B	RW	RESN			Negative channel resistor control																																				
			Bypass	0	Bypass resistor ladder																																				
			Pulldown	1	Pull-down to GND																																				
			Pullup	2	Pull-up to VDD																																				
			VDD1_2	3	Set input at VDD/2																																				
C	RW	GAIN			Gain control																																				
			Gain1_6	0	1/6																																				
			Gain1_5	1	1/5																																				
			Gain1_4	2	1/4																																				
			Gain1_3	3	1/3																																				
			Gain1_2	4	1/2																																				
			Gain1	5	1																																				
			Gain2	6	2																																				
			Gain4	7	4																																				
D	RW	REFSEL			Reference control																																				
			Internal	0	Internal reference (0.6 V)																																				
			VDD1_4	1	VDD/4 as reference																																				

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																								
Id													G			F			E			E			E						D			C			C			C						B			B						A			A		
Reset 0x00020000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0																					
Id	RW	Field	Value	Id	Value	Description																																																						
E	RW	TACQ				Acquisition time, the time the ADC uses to sample the input voltage																																																						
			3us	0		3 us																																																						
			5us	1		5 us																																																						
			10us	2		10 us																																																						
			15us	3		15 us																																																						
			20us	4		20 us																																																						
			40us	5		40 us																																																						
F	RW	MODE				Enable differential mode																																																						
			SE	0		Single ended, PSELN will be ignored, negative input to ADC shorted to GND																																																						
			Diff	1		Differential																																																						
G	RW	BURST				Enable burst mode																																																						
			Disabled	0		Burst mode is disabled (normal operation)																																																						
			Enabled	1		Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																																						

### 36.11.33 CH[6].LIMIT

Address offset: 0x57C

High/low limits for event monitoring a channel

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000					0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	LOW				[-32768 to +32767]																														
B	RW	HIGH				[-32768 to +32767]																														

### 36.11.34 CH[7].PSELP

Address offset: 0x580

Input positive pin selection for CH[7]

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 36.11.35 CH[7].PSELN

Address offset: 0x584

Input negative pin selection for CH[7]

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0									
Id																																							A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0									
Id	RW	Field	Value	Id	Value																																			Description				
A	RW	PSELN																																						Analog negative input, enables differential channel				
			NC	0																																				Not connected				
			AnalogInput0	1																																				AIN0				
			AnalogInput1	2																																				AIN1				
			AnalogInput2	3																																				AIN2				
			AnalogInput3	4																																				AIN3				
			AnalogInput4	5																																				AIN4				
			AnalogInput5	6																																				AIN5				
			AnalogInput6	7																																				AIN6				
			AnalogInput7	8																																				AIN7				
			VDD	9																																				VDD				
			VDDHDIV5	0x11																																				VDDH/5				

### 36.11.36 CH[7].CONFIG

Address offset: 0x588

### Input configuration for CH[7]

Bit number																																	
Id			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Reset 0x00020000			G F E E E D C C C B B A A																														
Reset 0x00020000			0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																														
Id	RW	Field	Value	Id	Value	Description																											
A	RW	RESP				Positive channel resistor control																											
			Bypass	0		Bypass resistor ladder																											
			Pulldown	1		Pull-down to GND																											
			Pullup	2		Pull-up to VDD																											
			VDD1_2	3		Set input at VDD/2																											
B	RW	RESN				Negative channel resistor control																											
			Bypass	0		Bypass resistor ladder																											
			Pulldown	1		Pull-down to GND																											
			Pullup	2		Pull-up to VDD																											
			VDD1_2	3		Set input at VDD/2																											
C	RW	GAIN				Gain control																											
			Gain1_6	0		1/6																											
			Gain1_5	1		1/5																											
			Gain1_4	2		1/4																											
			Gain1_3	3		1/3																											
			Gain1_2	4		1/2																											
			Gain1	5		1																											
			Gain2	6		2																											
			Gain4	7		4																											
D	RW	REFSEL				Reference control																											
			Internal	0		Internal reference (0.6 V)																											
			VDD1_4	1		VDD/4 as reference																											
E	RW	TACQ				Acquisition time, the time the ADC uses to sample the input voltage																											
			3us	0		3 us																											
			5us	1		5 us																											
			10us	2		10 us																											
			15us	3		15 us																											
			20us	4		20 us																											
			40us	5		40 us																											
F	RW	MODE				Enable differential mode																											
			SE	0		Single ended, PSELN will be ignored, negative input to ADC shorted to GND																											

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id												G					F					E	E	E					D	C	C	C					B	B			A	A
Reset 0x00020000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value	Id	Value	Description																																				
		Diff	1			Differential																																				
G	RW	BURST				Enable burst mode																																				
		Disabled	0			Burst mode is disabled (normal operation)																																				
		Enabled	1			Burst mode is enabled. SAADC takes 2^OVERSAMPLE number of samples as fast as it can, and sends the average to Data RAM.																																				

### 36.11.37 CH[7].LIMIT

Address offset: 0x58C

High/low limits for event monitoring a channel

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x7FFF8000				0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value												Description																			
A	RW	LOW			[-32768 to +32767]												Low level limit																			
B	RW	HIGH			[-32768 to +32767]												High level limit																			

### 36.11.38 RESOLUTION

Address offset: 0x5F0

Resolution configuration

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																						A	A	A
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1				
Id	RW	Field	Value	Id	Value	Description																																		
A	RW	VAL				Set the resolution																																		
		8bit	0			8 bit																																		
		10bit	1			10 bit																																		
		12bit	2			12 bit																																		
		14bit	3			14 bit																																		

### 36.11.39 OVERSAMPLE

Address offset: 0x5F4

Oversampling configuration. OVERSAMPLE should not be combined with SCAN. The RESOLUTION is applied before averaging, thus for high OVERSAMPLE a higher RESOLUTION should be used.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 36.11.40 SAMPLERATE

Address offset: 0x5F8

Controls normal or continuous sample rate

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																													B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Id	RW	Field	Value Id		Value		Description																																								
A	RW	CC			[80..2047]		Capture and compare value. Sample rate is 16 MHz/CC																																								
B	RW	MODE					Select mode for sample rate control																																								
			Task		0		Rate is controlled from SAMPLE task																																								
			Timers		1		Rate is controlled from local timer (use CC to control the rate)																																								

### 36.11.41 RESULT.PTR

Address offset: 0x62C

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value				Description																											
A	RW	PTR							Data pointer																											

### 36.11.42 RESULT.MAXCNT

Address offset: 0x630

Maximum number of buffer words to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															

### 36.11.43 RESULT.AMOUNT

Address offset: 0x634

Number of buffer words transferred since last START

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value		Description																													
A	R	AMOUNT				Number of buffer words transferred since last START. This register can be read after an END or STOPPED event.																													


## 36.12 Electrical specification

### 36.12.1 SAADC Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
DNL	Differential non-linearity, 10-bit resolution	-0.95	<1		LSB
INL	Integral non-linearity, 10-bit resolution		1		LSB
V <sub>OS</sub>	Differential offset error (calibrated), 10-bit resolution <sup>a</sup>		+2		LSB
C <sub>EG</sub>	Gain error temperature coefficient		0.02		%/°C

<sup>a</sup> Digital output code at zero volt differential input.

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{SAMPLE}}$	Maximum sampling rate			200	kHz
$t_{\text{ACQ},10k}$	Acquisition time (configurable), source Resistance $\leq 10k\Omega$		3		$\mu\text{s}$
$t_{\text{ACQ},40k}$	Acquisition time (configurable), source Resistance $\leq 40k\Omega$		5		$\mu\text{s}$
$t_{\text{ACQ},100k}$	Acquisition time (configurable), source Resistance $\leq 100k\Omega$		10		$\mu\text{s}$
$t_{\text{ACQ},200k}$	Acquisition time (configurable), source Resistance $\leq 200k\Omega$		15		$\mu\text{s}$
$t_{\text{ACQ},400k}$	Acquisition time (configurable), source Resistance $\leq 400k\Omega$		20		$\mu\text{s}$
$t_{\text{ACQ},800k}$	Acquisition time (configurable), source Resistance $\leq 800k\Omega$		40		$\mu\text{s}$
$t_{\text{CONV}}$	Conversion time		$<2$		$\mu\text{s}$
$I_{\text{ADC,CONV}}$	ADC current during ACQuisition and CONVersion		700		$\mu\text{A}$
$I_{\text{ADC,IDLE}}$	Idle current, when not sampling, excluding clock sources and regulator base currents <sup>29</sup>		$<5$		$\mu\text{A}$
$E_{G1/6}$	Error <sup>b</sup> for Gain = 1/6	-3		3	%
$E_{G1/4}$	Error <sup>b</sup> for Gain = 1/4	-3		3	%
$E_{G1/2}$	Error <sup>b</sup> for Gain = 1/2	-3		4	%
$E_{G1}$	Error <sup>b</sup> for Gain = 1	-3		4	%
$C_{\text{SAMPLE}}$	Sample and hold capacitance at maximum gain <sup>30</sup>		2.5		pF
$R_{\text{INPUT}}$	Input resistance		$>1$		M $\Omega$
$E_{\text{NOB}}$	Effective number of bits, differential mode, 12-bit resolution, 1/1 gain, 3 $\mu\text{s}$ acquisition time, crystal HFCLK, 200 kbps		9		Bit
$S_{\text{NDR}}$	Peak signal to noise and distortion ratio, differential mode, 12-bit resolution, 1/1 gain, 3 $\mu\text{s}$ acquisition time, crystal HFCLK, 200 kbps		56		dB
$S_{\text{FDR}}$	Spurious free dynamic range, differential mode, 12-bit resolution, 1/1 gain, 3 $\mu\text{s}$ acquisition time, crystal HFCLK, 200 kbps		70		dBc
$R_{\text{LADDER}}$	Ladder resistance		160		k $\Omega$

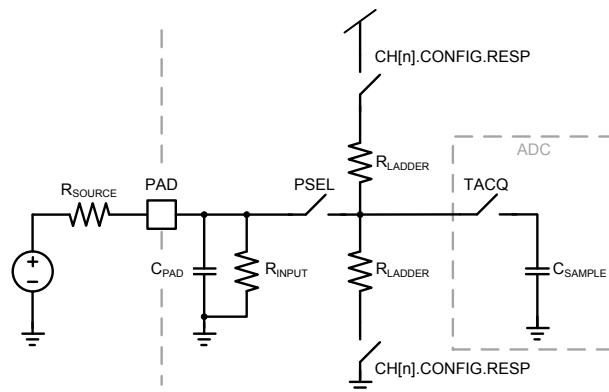

**Figure 112: Model of SAADC input (one channel)**

Note: SAADC average current calculation for a given application is based on the sample period, conversion and acquisition time ( $t_{\text{CONV}}$  and  $t_{\text{ACQ}}$ ) and conversion and idle current ( $I_{\text{ADC,CONV}}$  and  $I_{\text{ADC,IDLE}}$ ). For example, sampling at 4kHz gives a sample period of 250 $\mu\text{s}$ . The average current consumption would then be:

$$I_{\text{AVERAGE}} = \left( \frac{(t_{\text{CONV}} + t_{\text{ACQ}})}{250} \right) (I_{\text{ADC,CONV}}) + \left( \frac{250 - (t_{\text{CONV}} + t_{\text{ACQ}})}{250} \right) (I_{\text{ADC,IDLE}})$$

<sup>29</sup> When  $t_{\text{ACQ}}$  is 10 $\mu\text{s}$  or longer, and if DC/DC is active, it will be allowed to work in refresh mode if no other resource is requiring a high quality power supply from 1V3. If  $t_{\text{ACQ}}$  is smaller than 10 $\mu\text{s}$  and DC/DC is active, refresh mode will not be allowed, and it will remain in normal mode from the START task to the STOPPED event. So depending on  $t_{\text{ACQ}}$  and other resources' needs, the appropriate base current needs to be taken into account.

<sup>b</sup> Does not include temperature drift

<sup>30</sup> Maximum gain corresponds to highest capacitance.



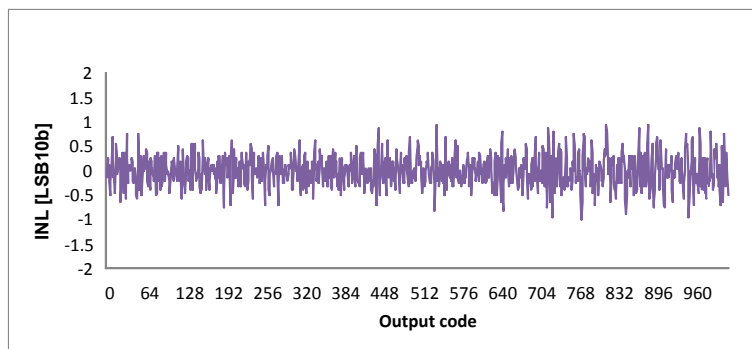


Figure 113: ADC INL vs Output Code

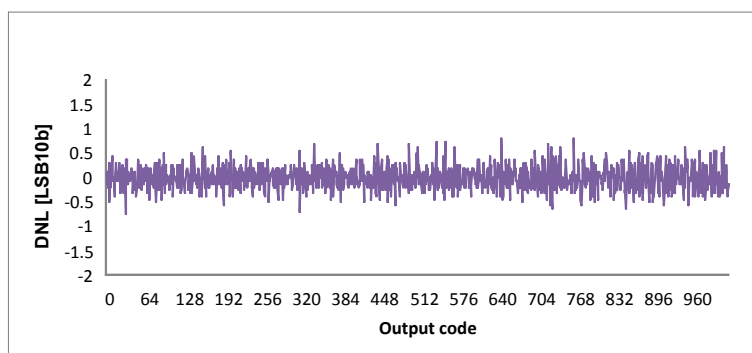


Figure 114: ADC DNL vs Output Code

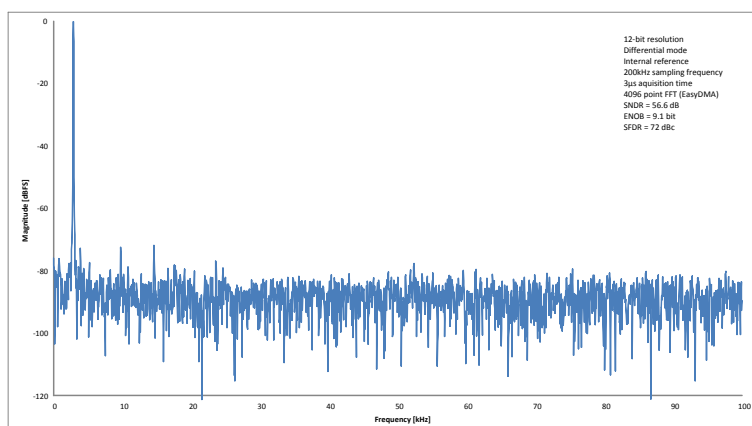


Figure 115: FFT of a 2.8 kHz sine at 200 ksps ()

## 36.13 Performance factors

Clock jitter, affecting sample timing accuracy, and circuit noise can affect ADC performance.


Jitter can be between START tasks or from START task to acquisition. START timer accuracy and startup times of regulators and references will contribute to variability. Sources of circuit noise may include CPU activity and the DC/DC regulator. Best ADC performance is achieved using START timing based on the TIMER module, HFXO clock source, and Constant Latency mode.

## 37 COMP — Comparator

The Comparator (COMP) compares the input voltage (VIN+) that is derived from an analog input pin selected via the PSEL register against a second input voltage (VIN-) that can be derived from multiple sources depending on operation mode.

Listed here are the main features for COMP:

- Input range from 0 V to VDD
- Single-ended mode
  - Fully flexible hysteresis using a 64-level reference ladder
- Differential mode
  - Configurable 50 mV hysteresis
- Reference inputs:
  - VDD
  - External reference from AIN0 to AIN1 (between 0 V and VDD)
  - Internal references 1.2 V, 1.8 V and 2.4 V
- Three operation modes: low power, normal and high-speed
- Single-pin capacitive sensor support
- Event generation on output changes
  - UP event on VIN- > VIN+
  - DOWN event on VIN- < VIN+
  - CROSS event on VIN+ and VIN- crossing
  - READY event on core and internal reference (if used) ready

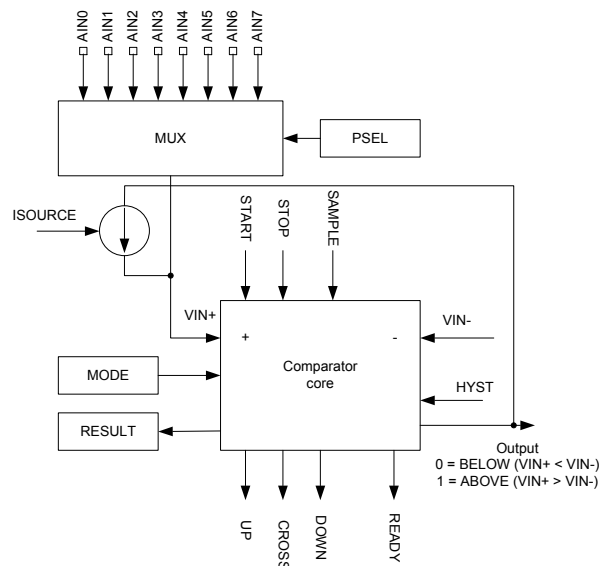

**Figure 116: Comparator overview**

**Important:** COMP cannot be used (STARTed) at the same time as LPCOMP. Only one comparator can be used at a time.

The COMP is started by triggering the START task, and stopped by triggering the STOP task. After a start-up time of  $t_{\text{COMP,START}}$ <sup>31</sup> the COMP will generate a READY event to indicate that the comparator is ready

<sup>31</sup> See  $t_{\text{PROPDLY,LP}}$ ,  $t_{\text{PROPDLY,N}}$ ,  $t_{\text{PROPDLY,HS}}$ ,  $I_{\text{COMP,LP}}$ ,  $I_{\text{COMP,N}}$  and  $I_{\text{COMP,HS}}$  in [Electrical parameters](#) for more information about COMP speed and power characteristics related to these different modes.

to use and the output of the COMP is correct. When the COMP module is started, events will be generated every time VIN+ crosses VIN-.

VIN- can be derived directly from AIN0 or AIN1 in differential mode, or VREF in single-ended mode. VUP and VDOWN thresholds can be set to implement a hysteresis on VIN- using the Reference Ladder. VREF can be derived from VDD, AIN0, AIN1 or internal 1.2V, 1.8V and 2.4V references.

An upward crossing will generate an UP event and a downward crossing will generate a DOWN event. The CROSS event will be generated every time there is a crossing, independent of direction.

An optional hysteresis on VIN+ and VIN- can be enabled when the module is used in differential mode through the HYST register. In single ended mode the two reference ladders (VUP and VDOWN, see [Figure 119: Comparator in single-ended mode](#) on page 453) will be used instead of the hysteresis mechanism configured in HYST.

This hysteresis is in the order of magnitude of 50 mV, and shall prevent noise on the signal to create unwanted events. See [Figure 120: Hysteresis example where VIN+ starts below VUP](#) on page 453 for illustration of the effect of an active hysteresis on a noisy input signal.

The COMP can be configured to operate in two main operation modes, differential mode and single-ended mode, see MODE register for more information.

The COMP can, for both main operation modes, operate in different speed and power consumption modes, see MODE register. High-speed mode will consume more power compared to low-power mode, and low-power mode will result in slower response time compared to high-speed mode.

The immediate value of the COMP can be sampled to the RESULT register by triggering the SAMPLE task.

A selectable current can be applied (ISOURCE register) on the currently selected AINx line. Enabling the block creates a feedback path around the comparator, forming a relaxation oscillator. The circuit will sink current from VIN+ when the comparator output is high, and source current into VIN+ when the comparator output is low. The frequency of the oscillator is dependent on the capacitance at the analog input pin, the reference voltages and the value of the current source. In this mode, only a capacitive sensor needs to be attached between the analog input pin and ground. With a selected current of 10  $\mu$ A, VUP-VDOWN equal to 1 V, and an external capacity of typically 10 pF, the resulting oscillation frequency is around 500 kHz.

The frequency of the oscillator can be calculated as

$$f_{OSC} = I_{SOURCE} / (2C \cdot (VUP - VDOWN))$$

## 37.1 Shared resources

The COMP shares analog resources with the SAADC and LPCOMP peripherals.

While it is possible to use SAADC at the same time as COMP or LPCOMP, COMP and LPCOMP are mutually exclusive: enabling one will automatically disable the other. In addition, when using SAADC and COMP or LPCOMP simultaneously, it is not possible to select the same analog input pin for both modules.

**Important:** The COMP peripheral shall not be disabled (by writing to the ENABLE register) before the peripheral has stopped. Failing to do so may result in unpredictable behaviour.

## 37.2 Differential mode

In differential mode, the reference input VIN- is derived directly from one of the AINx pins.

In this mode, the impedance on VIN-'s signal path is equal to the impedance on VIN+'s signal path. See Z<sub>COMPVINP</sub> and Z<sub>COMPVINND</sub> for more information. In differential mode, the PSEL, MODE and EXTREFSEL registers must be configured before the COMP is enabled via the ENABLE register. When HYST is turned on while in this mode, the Output of the comparator (and associated events) will change from ABOVE to BELOW whenever VIN+ becomes smaller than (VIN- - (V<sub>DIFFHYST</sub> / 2)). Similarly, it will change from BELOW to ABOVE whenever VIN+ becomes larger than (VIN- + (V<sub>DIFFHYST</sub> / 2)), as illustrated in [Figure 118: Hysteresis enabled in differential mode](#) on page 452.

**Restriction:** Depending on the device, not all the analog inputs may be available for each MUX.

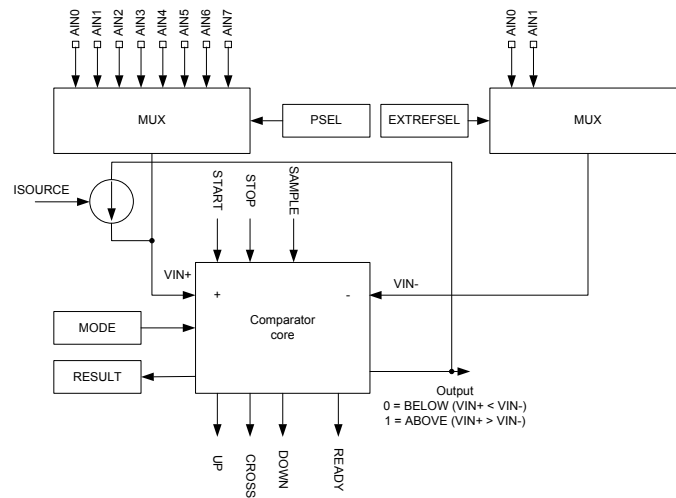


Figure 117: Comparator in differential mode

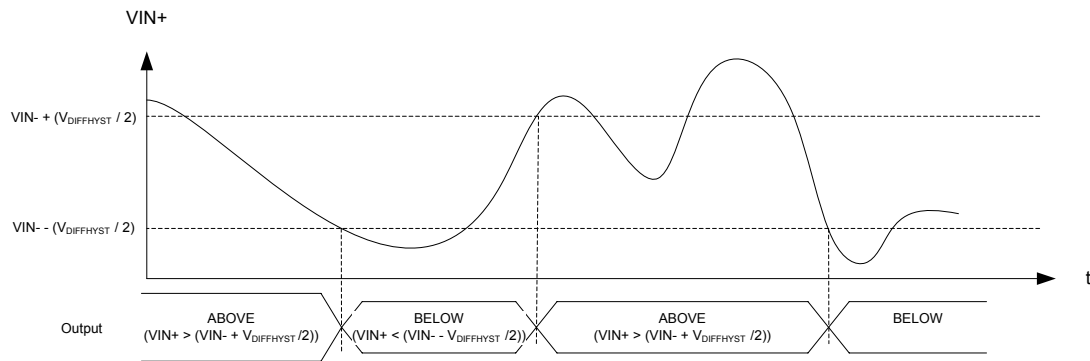


Figure 118: Hysteresis enabled in differential mode

### 37.3 Single-ended mode

In single-ended mode, VIN- is derived from the Reference Ladder.

The Reference Ladder uses the reference voltage VREF to derive two new voltage references, VUP and VDOWN. VUP and VDOWN are configured via THUP and THDOWN in the TH register. VREF can be sourced from any of the available references sources as illustrated in [Figure 119: Comparator in single-ended mode](#) on page 453. This is configured via EXTREFSEL and REFSEL.

When the comparator core detects that  $VIN+ > VIN-$ , i.e. ABOVE as per the RESULT register, VIN- will switch to VDOWN. When VIN- falls below VIN- again, VIN- will be switched back to VUP. By specifying VUP larger than VDOWN, a hysteresis as illustrated in [Figure 120: Hysteresis example where VIN+ starts below VUP](#) on page 453 and [Figure 121: Hysteresis example where VIN+ starts above VUP](#) on page 454 can be generated. In single-ended mode, the PSEL, MODE, EXTREFSEL, REFSEL and TH registers must be configured before the COMP is enabled via the ENABLE register.

**Restriction:** Depending on the device, not all the analog inputs may be available for each MUX.

Writing to the HYST register has no effect in single-ended mode, and the content of this register is ignored.

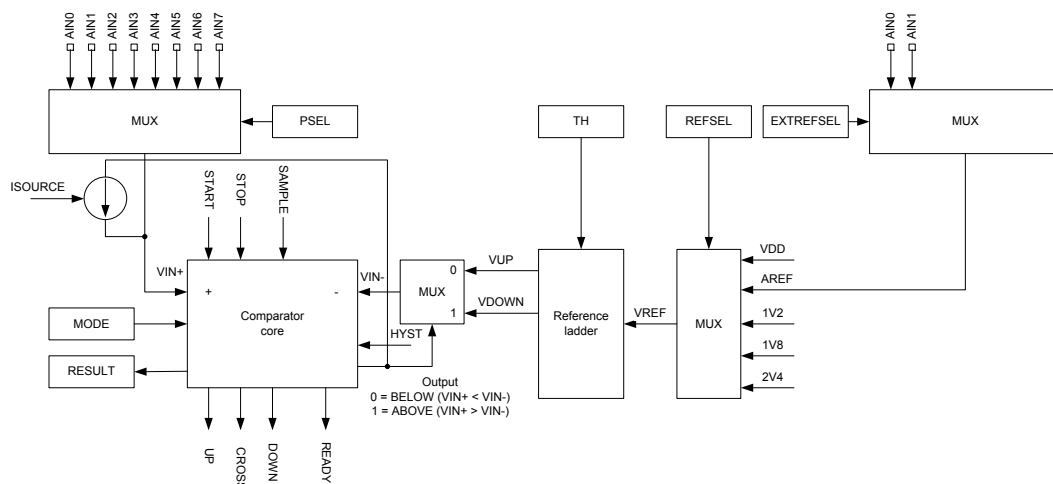


Figure 119: Comparator in single-ended mode


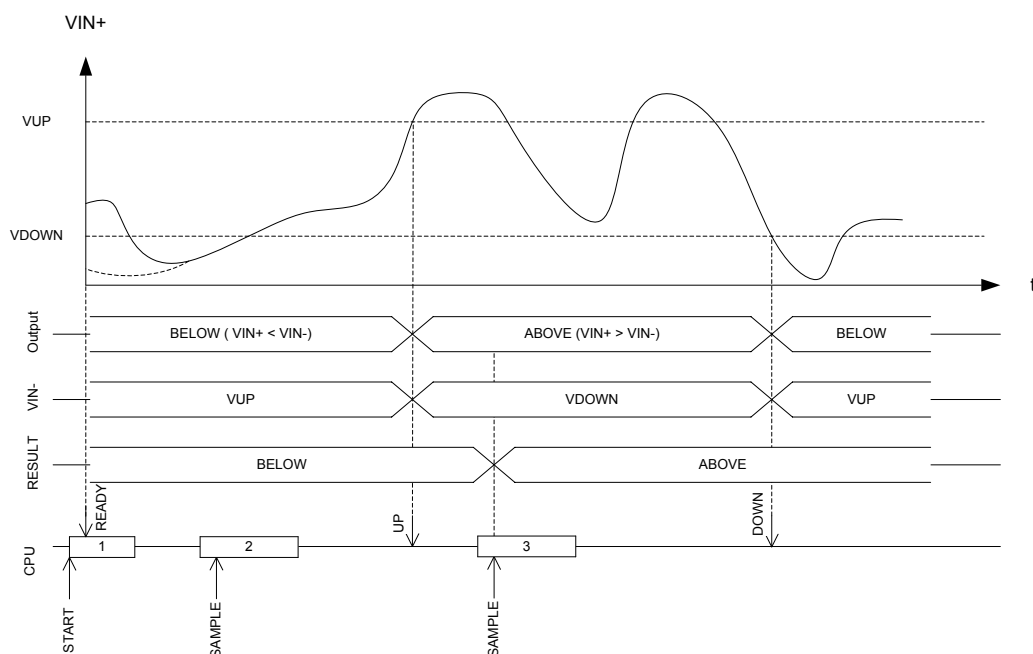


Figure 120: Hysteresis example where  $VIN+$  starts below  $VUP$

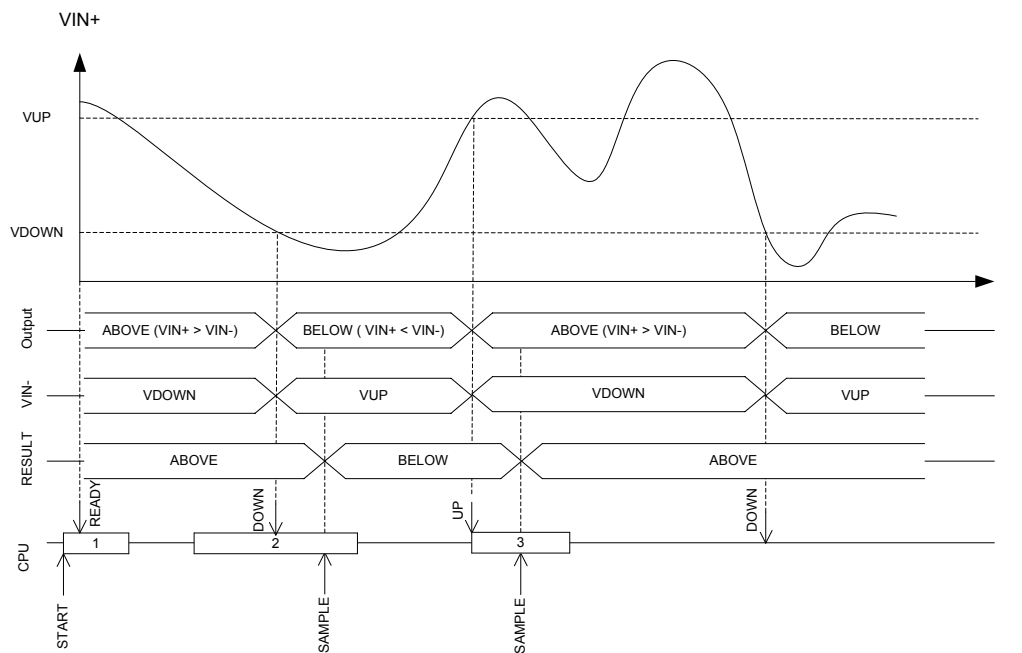

**Figure 121: Hysteresis example where VIN+ starts above VUP**

## 37.4 Pin configuration

The user can use the PSEL register to select one of the analog input pins, AIN0 through AIN7, as input VIN+.

See [Figure 119: Comparator in single-ended mode](#) on page 453. Similarly the user can use the EXTREFSEL register to select one of the AINx analog input pins as reference input, in case AREF is selected in REFSEL. The selected analog pins will be acquired by the COMP when it is enabled via the ENABLE register.

Depending on the device, not all the analog inputs may be available for each MUX. See PSEL and EXTREFSEL register definition for more information about which analog pins are available on a particular device.

## 37.5 Registers

**Table 84: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40013000	COMP	COMP	General purpose comparator	

**Table 85: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start comparator
TASKS_STOP	0x004	Stop comparator
TASKS_SAMPLE	0x008	Sample comparator value
EVENTS_READY	0x100	COMP is ready and output is valid
EVENTS_DOWN	0x104	Downward crossing
EVENTS_UP	0x108	Upward crossing
EVENTS_CROSS	0x10C	Downward or upward crossing
<a href="#">SHORTS</a>	0x200	Shortcut register
<a href="#">INTEN</a>	0x300	Enable or disable interrupt
<a href="#">INTENSET</a>	0x304	Enable interrupt

Register	Offset	Description
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">RESULT</a>	0x400	Compare result
<a href="#">ENABLE</a>	0x500	COMP enable
<a href="#">PSEL</a>	0x504	Pin select
<a href="#">REFSEL</a>	0x508	Reference source select
<a href="#">EXTREFSEL</a>	0x50C	External reference select
<a href="#">TH</a>	0x530	Threshold configuration for hysteresis unit
<a href="#">MODE</a>	0x534	Mode configuration
<a href="#">HYST</a>	0x538	Comparator hysteresis enable
<a href="#">ISOURCE</a>	0x53C	Current source select on analog input

### 37.5.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																	E D C B A			
Reset 0x00000000					0 0																															
Id	RW	Field	Value	Id	Value	Description																														
A	RW	READY_SAMPLE				Shortcut between READY event and SAMPLE task																														
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_SAMPLE</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
B	RW	READY_STOP				Shortcut between READY event and STOP task																														
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_STOP</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
C	RW	DOWN_STOP				Shortcut between DOWN event and STOP task																														
						See <a href="#">EVENTS_DOWN</a> and <a href="#">TASKS_STOP</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
D	RW	UP_STOP				Shortcut between UP event and STOP task																														
						See <a href="#">EVENTS_UP</a> and <a href="#">TASKS_STOP</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
E	RW	CROSS_STOP				Shortcut between CROSS event and STOP task																														
						See <a href="#">EVENTS_CROSS</a> and <a href="#">TASKS_STOP</a>																														
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															

### 37.5.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																														D C B A					
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Enable or disable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	DOWN				Enable or disable interrupt for DOWN event																													
						See <a href="#">EVENTS_DOWN</a>																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
C	RW	UP	Disabled		0	Disable																																	
			Enabled		1	Enable																																	
			Enable or disable interrupt for UP event																																				
			See <a href="#">EVENTS_UP</a>																																				
D	RW	CROSS	Disabled		0	Disable																																	
			Enabled		1	Enable																																	
			Enable or disable interrupt for CROSS event																																				
			See <a href="#">EVENTS_CROSS</a>																																				
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	

### 37.5.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	READY			Write '1' to Enable interrupt for READY event																														
					See <a href="#">EVENTS_READY</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	DOWN			Write '1' to Enable interrupt for DOWN event																														
					See <a href="#">EVENTS_DOWN</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	UP			Write '1' to Enable interrupt for UP event																														
					See <a href="#">EVENTS_UP</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	CROSS			Write '1' to Enable interrupt for CROSS event																														
					See <a href="#">EVENTS_CROSS</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 37.5.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Write '1' to Disable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Clear		1	Disable																													



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																					D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value		Description																																	
			Disabled		0	Read: Disabled																																		
			Enabled		1	Read: Enabled																																		
			Write '1' to Disable interrupt for DOWN event																																					
			See <a href="#">EVENTS_DOWN</a>																																					
			Clear		1	Disable																																		
B	RW	DOWN	Disabled		0	Read: Disabled																																		
			Enabled		1	Read: Enabled																																		
			Write '1' to Disable interrupt for UP event																																					
			See <a href="#">EVENTS_UP</a>																																					
			Clear		1	Disable																																		
			Disabled		0	Read: Disabled																																		
			Enabled		1	Read: Enabled																																		
			Write '1' to Disable interrupt for CROSS event																																					
			See <a href="#">EVENTS_CROSS</a>																																					
			Clear		1	Disable																																		
D	RW	CROSS	Disabled		0	Read: Disabled																																		
			Enabled		1	Read: Enabled																																		
			Write '1' to Disable interrupt for CROSS event																																					
			See <a href="#">EVENTS_CROSS</a>																																					
			Clear		1	Disable																																		
			Disabled		0	Read: Disabled																																		
			Enabled		1	Read: Enabled																																		

### 37.5.5 RESULT

Address offset: 0x400

Compare result

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	RESULT				Result of last compare. Decision point SAMPLE task.																													
			Below	0	Input voltage is below the threshold (VIN+ < VIN-)																														
			Above	1	Input voltage is above the threshold (VIN+ > VIN-)																														

### 37.5.6 ENABLE

Address offset: 0x500

COMP enable

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable COMP																													
			Disabled		0	Disable																													
			Enabled		2	Enable																													

### 37.5.7 PSEL

Address offset: 0x504

Pin select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PSEL				Analog pin select																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			AnalogInput0	0	AIN0 selected as analog input																														
			AnalogInput1	1	AIN1 selected as analog input																														
			AnalogInput2	2	AIN2 selected as analog input																														
			AnalogInput3	3	AIN3 selected as analog input																														
			AnalogInput4	4	AIN4 selected as analog input																														
			AnalogInput5	5	AIN5 selected as analog input																														
			AnalogInput6	6	AIN6 selected as analog input																														
			AnalogInput7	7	AIN7 selected as analog input																														

### 37.5.8 REFSEL

Address offset: 0x508

Reference source select

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A	A	A
Reset 0x00000004				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	REFSEL				Reference select																																
			Int1V2	0	VREF = internal 1.2 V reference (VDD >= 1.7 V)																																	
			Int1V8	1	VREF = internal 1.8 V reference (VDD >= VREF + 0.2 V)																																	
			Int2V4	2	VREF = internal 2.4 V reference (VDD >= VREF + 0.2 V)																																	
			VDD	4	VREF = VDD																																	
			AREf	7	VREF = AREF (VDD >= VREF >= AREFMIN)																																	

### 37.5.9 EXTREFSEL

Address offset: 0x50C

External reference select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	EXTREFSEL				External analog reference select																													
			AnalogReference0	0		Use AIN0 as external analog reference																													
			AnalogReference1	1		Use AIN1 as external analog reference																													

### 37.5.10 TH

Address offset: 0x530

Threshold configuration for hysteresis unit

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B B B B B B A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	THDOWN	[63:0]		VDOWN = (THDOWN+1)/64*VREF																														
B	RW	THUP	[63:0]		VUP = (THUP+1)/64*VREF																														

### 37.5.11 MODE

Address offset: 0x534

Mode configuration

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																													B								A		A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																																	
A	RW	SP					Speed and power mode																																	
			Low	0	Low power mode																																			
			Normal	1	Normal mode																																			
			High	2	High speed mode																																			
B	RW	MAIN					Main operation mode																																	
			SE	0	Single ended mode																																			
			Diff	1	Differential mode																																			

### 37.5.12 HYST

Address offset: 0x538

Comparator hysteresis enable

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	HYST				Comparator hysteresis																													
			NoHyst	0	Comparator hysteresis disabled																														
			Hyst50mV	1	Comparator hysteresis enabled																														

### 37.5.13 ISOURCE

Address offset: 0x53C

Current source select on analog input

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ISOURCE				Comparator hysteresis																													
			Off	0		Current source disabled																													
			Ien2mA5	1		Current source enabled (+/- 2.5 uA)																													
			Ien5mA	2		Current source enabled (+/- 5 uA)																													
			Ien10mA	3		Current source enabled (+/- 10 uA)																													

## 37.6 Electrical specification

### 37.6.1 COMP Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>COMP,LP</sub>	Core run current in low power mode		2		μA
I <sub>COMP,N</sub>	Core run current in normal mode		5		μA
I <sub>COMP,HS</sub>	Core run current in high-speed mode		10		μA
t <sub>PROPDLY,LP</sub>	Propagation delay, low power mode <sup>a</sup>		0.6		μS
t <sub>PROPDLY,N</sub>	Propagation delay, normal mode <sup>a</sup>		0.2		μS
t <sub>PROPDLY,HS</sub>	Propagation delay, high-speed mode <sup>a</sup>		0.1		μS
V <sub>DIFFHYST</sub>	Optional hysteresis applied to differential input		30		mV
V <sub>VDD-VREF</sub>	Required difference between VDD and a selected VREF, VDD > VREF	0.3			V
I <sub>INT_REF</sub>	Current used by the internal bandgap reference when selected as source for VREF		13		μA

<sup>a</sup> Propagation delay is with 10mV overdrive.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{INT\_REF,START}}$	Startup time for the internal bandgap reference		50	80	$\mu\text{S}$
$E_{\text{INT\_REF}}$	Internal bandgap reference error. Measured on internal 1v2 reference.	-3		3	%
$R_{\text{LADDER}}$	Reference ladder resistance, $ILADDER = V_{\text{REF}} / R_{\text{LADDER}}$		550		$\text{k}\Omega$
$V_{\text{INPUTOFFSET}}$	Input offset. Includes offset of the comparator core and the reference ladder.	-10		10	mV
$t_{\text{COMP,START}}$	Startup time for the comparator core		3		$\mu\text{S}$

## 38 LPCOMP — Low power comparator


LPCOMP compares an input voltage against a reference voltage.

Listed here are the main features of LPCOMP:

- 0 - VDD input range
- Ultra low power
- Eight input options (AIN0 to AIN7)
- Reference voltage options:
  - Two external analog reference inputs, or
  - 15-level internal reference ladder (VDD/16)
- Optional hysteresis enable on input
- Wakeup source from OFF mode

In System ON, the LPCOMP can generate separate events on rising and falling edges of a signal, or sample the current state of the pin as being above or below the selected reference. The block can be configured to use any of the analog inputs on the device. Additionally, the low power comparator can be used as an analog wakeup source from System OFF or System ON. The comparator threshold can be programmed to a range of fractions of the supply voltage.

**Restriction:** LPCOMP cannot be used (STARTed) at the same time as COMP. Only one comparator can be used at a time.

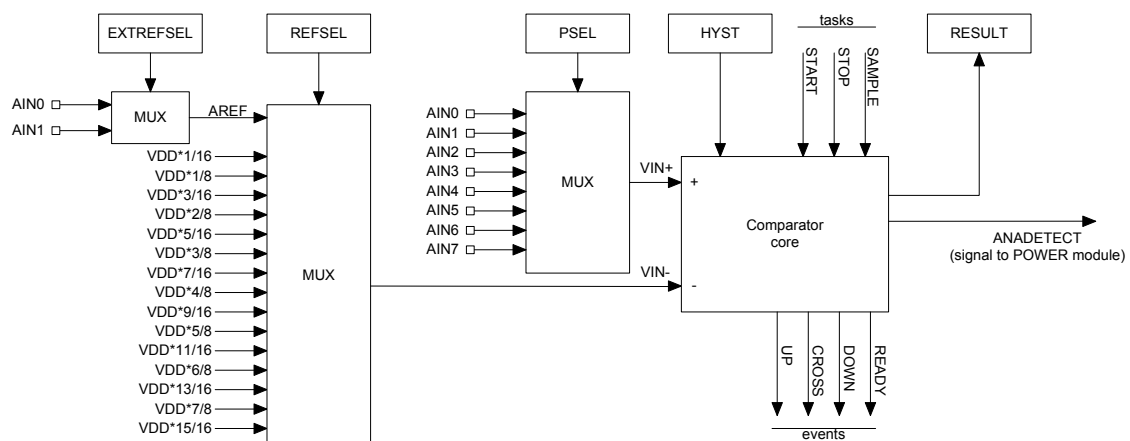

**Figure 122: Low power comparator**

The wakeup comparator (LPCOMP) compares an input voltage (VIN+), which comes from an analog input pin selected via the PSEL register against a reference voltage (VIN-) selected via the [REFSEL](#) on page 466 and [EXTREFSEL](#) registers.


The [PSEL](#), [REFSEL](#), and [EXTREFSEL](#) registers must be configured before the LPCOMP is enabled through the [ENABLE](#) register.

The [HYST](#) register allows enabling an optional hysteresis in the comparator core. This hysteresis is in the order of magnitude of 50 mV, and shall prevent noise on the signal to create unwanted events. See [Figure 123: Effect of hysteresis on a noisy input signal](#) on page 462 for illustration of the effect of an active hysteresis on a noisy input signal. It is disabled by default, and shall be configured before enabling LPCOMP as well.

The LPCOMP is started by triggering the START task. After a start-up time of  $t_{LPCOMP,STARTUP}$  the LPCOMP will generate a READY event to indicate that the comparator is ready to use and the output of the LPCOMP is correct. The LPCOMP will generate events every time VIN+ crosses VIN-. More specifically, every time VIN+ rises above VIN- (upward crossing) an UP event is generated along with a CROSS event. Every time VIN+ falls below VIN- (downward crossing), a DOWN event is generated along with a CROSS event. When

hysteresis is enabled, the upward crossing level becomes  $(V_{IN-} + V_{HYST}/2)$ , and the downward crossing level becomes  $(V_{IN-} - V_{HYST}/2)$ .

The LPCOMP is stopped by triggering the STOP task.

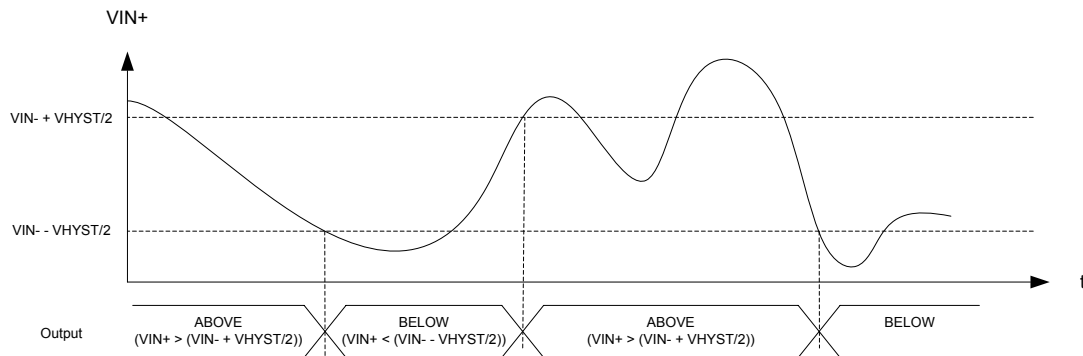

**Figure 123: Effect of hysteresis on a noisy input signal**

LPCOMP will be operational in both System ON and System OFF mode when it is enabled through the ENABLE register. See [POWER — Power supply](#) on page 67 for more information about power modes. Note that it is not allowed to go to System OFF when a READY event is pending to be generated.

All LPCOMP registers, including [ENABLE](#), are classified as retained registers when the LPCOMP is enabled. However, when the device wakes up from System OFF, all LPCOMP registers will be reset.

The LPCOMP can wake up the system from System OFF by asserting the ANADETECT signal. The ANADETECT signal can be derived from any of the event sources that generate the UP, DOWN and CROSS events. In case of wakeup from System OFF, no events will be generated, only the ANADETECT signal. See the ANADETECT register ( [ANADETECT](#) on page 466) for more information on how to configure the ANADETECT signal.

The immediate value of the LPCOMP can be sampled to [RESULT](#) on page 465 by triggering the SAMPLE task.

See [RESETREAS](#) on page 78 for more information on how to detect a wakeup from LPCOMP.

## 38.1 Shared resources

The LPCOMP shares resources with other peripherals.

The LPCOMP shares analog resources with SAADC and COMP. While it is possible to use SAADC at the same time as COMP or LPCOMP, COMP and LPCOMP are mutually exclusive: enabling one will automatically disable the other. In addition, when using SAADC and COMP or LPCOMP simultaneously, it is not possible to select the same analog input pin for both modules.

The LPCOMP peripheral shall not be disabled (by writing to the ENABLE register) before the peripheral has been stopped. Failing to do so may result in unpredictable behaviour.

## 38.2 Pin configuration

You can use the LPCOMP.PSEL register to select one of the analog input pins, AIN0 through AIN7, as the analog input pin for the LPCOMP.

See [GPIO — General purpose input/output](#) on page 155 for more information about the pins. Similarly, you can use [EXTREFSEL](#) on page 466 to select one of the analog reference input pins, AIN0 and AIN1, as input for AREF in case AREF is selected in [EXTREFSEL](#) on page 466. The selected analog pins will be acquired by the LPCOMP when it is enabled through [ENABLE](#) on page 465.

## 38.3 Registers

**Table 86: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40013000	LPCOMP	LPCOMP	Low power comparator	

**Table 87: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start comparator
TASKS_STOP	0x004	Stop comparator
TASKS_SAMPLE	0x008	Sample comparator value
EVENTS_READY	0x100	LPCOMP is ready and output is valid
EVENTS_DOWN	0x104	Downward crossing
EVENTS_UP	0x108	Upward crossing
EVENTS_CROSS	0x10C	Downward or upward crossing
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
RESULT	0x400	Compare result
ENABLE	0x500	Enable LPCOMP
PSEL	0x504	Input pin select
REFSEL	0x508	Reference select
EXTREFSEL	0x50C	External reference select
ANADETECT	0x520	Analog detect configuration
HYST	0x538	Comparator hysteresis enable

### 38.3.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																			E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	READY_SAMPLE				Shortcut between READY event and SAMPLE task																																	
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_SAMPLE</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
B	RW	READY_STOP				Shortcut between READY event and STOP task																																	
						See <a href="#">EVENTS_READY</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
C	RW	DOWN_STOP				Shortcut between DOWN event and STOP task																																	
						See <a href="#">EVENTS_DOWN</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
D	RW	UP_STOP				Shortcut between UP event and STOP task																																	
						See <a href="#">EVENTS_UP</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	
			Enabled		1	Enable shortcut																																	
E	RW	CROSS_STOP				Shortcut between CROSS event and STOP task																																	
						See <a href="#">EVENTS_CROSS</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled		0	Disable shortcut																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
Id																																		E				D				C				B				A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0														
Id	RW	Field	Value	Id	Value				Description																																												
			Enabled	1					Enable shortcut																																												

### 38.3.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Write '1' to Enable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	DOWN				Write '1' to Enable interrupt for DOWN event																													
						See <a href="#">EVENTS_DOWN</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	UP				Write '1' to Enable interrupt for UP event																													
						See <a href="#">EVENTS_UP</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
D	RW	CROSS				Write '1' to Enable interrupt for CROSS event																													
						See <a href="#">EVENTS_CROSS</a>																													
			Set	1		Enable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

### 38.3.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	READY				Write '1' to Disable interrupt for READY event																													
						See <a href="#">EVENTS_READY</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
B	RW	DOWN				Write '1' to Disable interrupt for DOWN event																													
						See <a href="#">EVENTS_DOWN</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													
C	RW	UP				Write '1' to Disable interrupt for UP event																													
						See <a href="#">EVENTS_UP</a>																													



Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	CROSS					Write '1' to Disable interrupt for CROSS event																												
				See <a href="#">EVENTS_CROSS</a>																															
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 38.3.4 RESULT

Address offset: 0x400

Compare result

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	RESULT				Result of last compare. Decision point SAMPLE task.																													
			Below	0		Input voltage is below the reference threshold (VIN+ < VIN-).																													
			Above	1		Input voltage is above the reference threshold (VIN+ > VIN-).																													

### 38.3.5 ENABLE

Address offset: 0x500

Enable LPCOMP

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																															
A	RW	ENABLE				Enable or disable LPCOMP																															
			Disabled	0	Disable																																
			Enabled	1	Enable																																

### 38.3.6 PSEL

Address offset: 0x504

Input pin select

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PSEL			Analog pin select																														
			AnalogInput0	0	AIN0 selected as analog input																														
			AnalogInput1	1	AIN1 selected as analog input																														
			AnalogInput2	2	AIN2 selected as analog input																														
			AnalogInput3	3	AIN3 selected as analog input																														
			AnalogInput4	4	AIN4 selected as analog input																														
			AnalogInput5	5	AIN5 selected as analog input																														
			AnalogInput6	6	AIN6 selected as analog input																														
			AnalogInput7	7	AIN7 selected as analog input																														

### 38.3.7 REFSEL

Address offset: 0x508

Reference select

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																				A	A	A	A
Reset 0x00000004				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0				
Id	RW	Field	Value Id	Value	Description																																		
A	RW	REFSEL			Reference select																																		
			Ref1_8Vdd	0	VDD * 1/8 selected as reference																																		
			Ref2_8Vdd	1	VDD * 2/8 selected as reference																																		
			Ref3_8Vdd	2	VDD * 3/8 selected as reference																																		
			Ref4_8Vdd	3	VDD * 4/8 selected as reference																																		
			Ref5_8Vdd	4	VDD * 5/8 selected as reference																																		
			Ref6_8Vdd	5	VDD * 6/8 selected as reference																																		
			Ref7_8Vdd	6	VDD * 7/8 selected as reference																																		
			AREf	7	External analog reference selected																																		
			Ref1_16Vdd	8	VDD * 1/16 selected as reference																																		
			Ref3_16Vdd	9	VDD * 3/16 selected as reference																																		
			Ref5_16Vdd	10	VDD * 5/16 selected as reference																																		
			Ref7_16Vdd	11	VDD * 7/16 selected as reference																																		
			Ref9_16Vdd	12	VDD * 9/16 selected as reference																																		
			Ref11_16Vdd	13	VDD * 11/16 selected as reference																																		
			Ref13_16Vdd	14	VDD * 13/16 selected as reference																																		
			Ref15_16Vdd	15	VDD * 15/16 selected as reference																																		

### 38.3.8 EXTREFSEL

Address offset: 0x50C

### External reference select

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																
A	RW	EXTREFSEL			External analog reference select																																
			AnalogReference0	0	Use AIN0 as external analog reference																																
			AnalogReference1	1	Use AIN1 as external analog reference																																

### 38.3.9 ANADETECT

Address offset: 0x520

## Analog detect configuration

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
A	RW	ANADETECT																																				
		Cross	0			Generate ANADETECT on crossing, both upward crossing and downward crossing																																
		Up	1			Generate ANADETECT on upward crossing only																																
		Down	2			Generate ANADETECT on downward crossing only																																

### 38.3.10 HYST

Address offset: 0x538

Comparator hysteresis enable

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																																				A
Reset 0x00000000				0 0																																
Id	RW	Field	Value Id	Value	Description																															
A	RW	HYST			Comparator hysteresis enable																															
			NoHyst	0	Comparator hysteresis disabled																															
			Hyst50mV	1	Comparator hysteresis disabled (typ. 50 mV)																															

## 38.4 Electrical specification

### 38.4.1 LPCOMP Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{LPC}$	Run current for low power comparator		0.5		$\mu A$
$t_{LPCANADET}$	Time from VIN crossing ( $\geq 50mV$ above threshold) to ANADETECT signal generated.		5		$\mu s$
$V_{INPOFFSET}$	Input offset including reference ladder error	-40		40	mV
$V_{HYST}$	Optional hysteresis		35		mV
$t_{STARTUP}$	Startup time for LPCOMP		140		$\mu s$

## 39 WDT — Watchdog timer

A countdown watchdog timer using the low-frequency clock source (LFCLK) offers configurable and robust protection against application lock-up.

The watchdog timer is started by triggering the START task.

The watchdog can be paused during long CPU sleep periods for low power applications and when the debugger has halted the CPU. The watchdog is implemented as a down-counter that generates a TIMEOUT event when it wraps over after counting down to 0. When the watchdog timer is started through the START task, the watchdog counter is loaded with the value specified in the CRV register. This counter is also reloaded with the value specified in the CRV register when a reload request is granted.

The watchdog's timeout period is given by:

$$\text{timeout [s]} = ( \text{CRV} + 1 ) / 32768$$

When started, the watchdog will automatically force the 32.768 kHz RC oscillator on as long as no other 32.768 kHz clock source is running and generating the 32.768 kHz system clock, see chapter [CLOCK — Clock control](#) on page 142.

### 39.1 Reload criteria

The watchdog has eight separate reload request registers, which shall be used to request the watchdog to reload its counter with the value specified in the CRV register. To reload the watchdog counter, the special value 0x6E524635 needs to be written to all enabled reload registers.

One or more RR registers can be individually enabled through the RREN register.

### 39.2 Temporarily pausing the watchdog

By default, the watchdog will be active counting down the down-counter while the CPU is sleeping and when it is halted by the debugger. It is however possible to configure the watchdog to automatically pause while the CPU is sleeping as well as when it is halted by the debugger.

### 39.3 Watchdog reset

A TIMEOUT event will automatically lead to a watchdog reset.

See [Reset](#) on page 74 for more information about reset sources. If the watchdog is configured to generate an interrupt on the TIMEOUT event, the watchdog reset will be postponed with two 32.768 kHz clock cycles after the TIMEOUT event has been generated. Once the TIMEOUT event has been generated, the impending watchdog reset will always be effectuated.

The watchdog must be configured before it is started. After it is started, the watchdog's configuration registers, which comprise registers CRV, RREN, and CONFIG, will be blocked for further configuration.

The watchdog can be reset from several reset sources, see [Reset behavior](#) on page 75.

When the device starts running again, after a reset, or waking up from OFF mode, the watchdog configuration registers will be available for configuration again.

## 39.4 Registers

**Table 88: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40010000	WDT	WDT	Watchdog timer	

**Table 89: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Start the watchdog
EVENTS_TIMEOUT	0x100	Watchdog timeout
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>RUNSTATUS</i>	0x400	Run status
<i>REQSTATUS</i>	0x404	Request status
<i>CRV</i>	0x504	Counter reload value
<i>RREN</i>	0x508	Enable register for reload request registers
<i>CONFIG</i>	0x50C	Configuration register
<i>RR[0]</i>	0x600	Reload request 0
<i>RR[1]</i>	0x604	Reload request 1
<i>RR[2]</i>	0x608	Reload request 2
<i>RR[3]</i>	0x60C	Reload request 3
<i>RR[4]</i>	0x610	Reload request 4
<i>RR[5]</i>	0x614	Reload request 5
<i>RR[6]</i>	0x618	Reload request 6
<i>RR[7]</i>	0x61C	Reload request 7

### 39.4.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	TIMEOUT			Write '1' to Enable interrupt for TIMEOUT event																														
					See <a href="#">EVENTS_TIMEOUT</a>																														
		Set		1	Enable																														
		Disabled		0	Read: Disabled																														
		Enabled		1	Read: Enabled																														

### 39.4.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																						A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value		Description																															
A	RW	TIMEOUT					Write '1' to Disable interrupt for TIMEOUT event																															
							See <a href="#">EVENTS_TIMEOUT</a>																															
		Clear	1				Disable																															
		Disabled	0				Read: Disabled																															
		Enabled	1				Read: Enabled																															

### 39.4.3 RUNSTATUS

Address offset: 0x400

Run status

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				A																																
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	R	RUNSTATUS			Indicates whether or not the watchdog is running																															
			NotRunning	0	Watchdog not running																															
			Running	1	Watchdog is running																															

### 39.4.4 REQSTATUS

Address offset: 0x404

Request status

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id					H G F E D C B A																																
Reset 0x00000001					0 1																																
Id	RW	Field	Value Id	Value	Description																																
A	R	RR0			Request status for RR[0] register																																
			DisabledOrRequested	0	RR[0] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[0] register is enabled, and are not yet requesting reload																																
B	R	RR1			Request status for RR[1] register																																
			DisabledOrRequested	0	RR[1] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[1] register is enabled, and are not yet requesting reload																																
C	R	RR2			Request status for RR[2] register																																
			DisabledOrRequested	0	RR[2] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[2] register is enabled, and are not yet requesting reload																																
D	R	RR3			Request status for RR[3] register																																
			DisabledOrRequested	0	RR[3] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[3] register is enabled, and are not yet requesting reload																																
E	R	RR4			Request status for RR[4] register																																
			DisabledOrRequested	0	RR[4] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[4] register is enabled, and are not yet requesting reload																																
F	R	RR5			Request status for RR[5] register																																
			DisabledOrRequested	0	RR[5] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[5] register is enabled, and are not yet requesting reload																																
G	R	RR6			Request status for RR[6] register																																
			DisabledOrRequested	0	RR[6] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[6] register is enabled, and are not yet requesting reload																																
H	R	RR7			Request status for RR[7] register																																
			DisabledOrRequested	0	RR[7] register is not enabled, or are already requesting reload																																
			EnabledAndUnrequested	1	RR[7] register is enabled, and are not yet requesting reload																																

### 39.4.5 CRV

Address offset: 0x504

Counter reload value

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	CRV		[0x0000000F..0xFFFFFFFF]	Counter reload value in number of cycles of the 32.768 kHz clock																																	

### 39.4.6 RREN

Address offset: 0x508

Enable register for reload request registers

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id																																					H	G	F	E	D	C	B	A
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1								
Id	RW	Field	Value	Id	Value	Description																																						
A	RW	RR0				Enable or disable RR[0] register																																						
			Disabled	0	Disable RR[0] register																																							
			Enabled	1	Enable RR[0] register																																							
B	RW	RR1				Enable or disable RR[1] register																																						
			Disabled	0	Disable RR[1] register																																							
			Enabled	1	Enable RR[1] register																																							
C	RW	RR2				Enable or disable RR[2] register																																						
			Disabled	0	Disable RR[2] register																																							
			Enabled	1	Enable RR[2] register																																							
D	RW	RR3				Enable or disable RR[3] register																																						
			Disabled	0	Disable RR[3] register																																							
			Enabled	1	Enable RR[3] register																																							
E	RW	RR4				Enable or disable RR[4] register																																						
			Disabled	0	Disable RR[4] register																																							
			Enabled	1	Enable RR[4] register																																							
F	RW	RR5				Enable or disable RR[5] register																																						
			Disabled	0	Disable RR[5] register																																							
			Enabled	1	Enable RR[5] register																																							
G	RW	RR6				Enable or disable RR[6] register																																						
			Disabled	0	Disable RR[6] register																																							
			Enabled	1	Enable RR[6] register																																							
H	RW	RR7				Enable or disable RR[7] register																																						
			Disabled	0	Disable RR[7] register																																							
			Enabled	1	Enable RR[7] register																																							

### 39.4.7 CONFIG

Address offset: 0x50C

Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C A																															
Reset 0x00000001				0 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SLEEP			Configure the watchdog to either be paused, or kept running, while the CPU is sleeping																														
			Pause	0	Pause watchdog while the CPU is sleeping																														
			Run	1	Keep the watchdog running while the CPU is sleeping																														
C	RW	HALT			Configure the watchdog to either be paused, or kept running, while the CPU is halted by the debugger																														
			Pause	0	Pause watchdog while the CPU is halted by the debugger																														
			Run	1	Keep the watchdog running while the CPU is halted by the debugger																														

### 39.4.8 RR[0]

Address offset: 0x600

Reload request 0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.9 RR[1]

Address offset: 0x604

Reload request 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.10 RR[2]

Address offset: 0x608

Reload request 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.11 RR[3]

Address offset: 0x60C

Reload request 3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.12 RR[4]

Address offset: 0x610

Reload request 4

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>		<b>Description</b>																													
A	W	RR				Reload request register																													
			Reload	0x6E524635		Value to request a reload of the watchdog timer																													

### 39.4.13 RR[5]

Address offset: 0x614

Reload request 5



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.14 RR[6]

Address offset: 0x618

Reload request 6

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

### 39.4.15 RR[7]

Address offset: 0x61C

Reload request 7

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	W	RR						Reload request register																											
			Reload	0x6E524635				Value to request a reload of the watchdog timer																											

## 39.5 Electrical specification

### 39.5.1 Watchdog Timer Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{WDT}$	Run current for watchdog timer		0.3	2	$\mu A$
$t_{WDT}$	Time out interval	458 $\mu s$		36 h	

## 40 SWI — Software interrupts

A set of interrupts have been reserved for use as software interrupts.

### 40.1 Registers

**Table 90: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40014000	SWI	SWI0	Software interrupt 0	
0x40015000	SWI	SWI1	Software interrupt 1	
0x40016000	SWI	SWI2	Software interrupt 2	
0x40017000	SWI	SWI3	Software interrupt 3	
0x40018000	SWI	SWI4	Software interrupt 4	
0x40019000	SWI	SWI5	Software interrupt 5	

## 41 NFCT — Near field communication tag

The NFCT peripheral is an implementation of an NFC Forum compliant listening device NFC-A.

With appropriate software, the NFCT peripheral can be used as the listening device NFC-A as specified by the [NFC Forum](#).

Listed here are the main features for the NFCT peripheral:

- NFC-A listen mode operation
  - 13.56 MHz input frequency
  - Bit rate 106 kbps
- Wake-on-field low power field detection (SENSE) mode
- Frame assemble and disassemble for the NFC-A frames specified by the NFC Forum
- Programmable frame timing controller
- Integrated automatic collision resolution, cyclic redundancy check (CRC), and parity functions


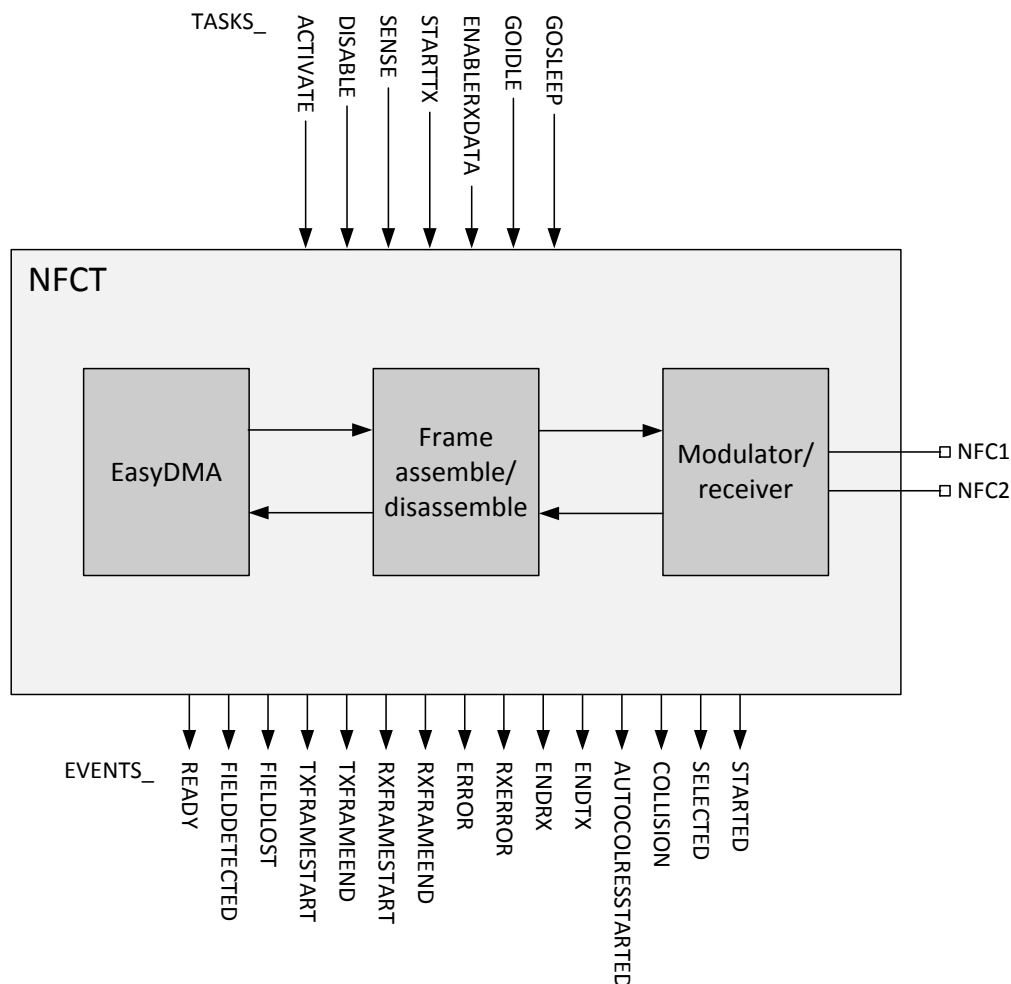


Figure 124: NFCT block diagram

### 41.1 Overview

The NFCT peripheral contains a 13.56 MHz AM receiver and a 13.56 MHz load modulator with 106 kbps data rate as defined by the NFC Forum.

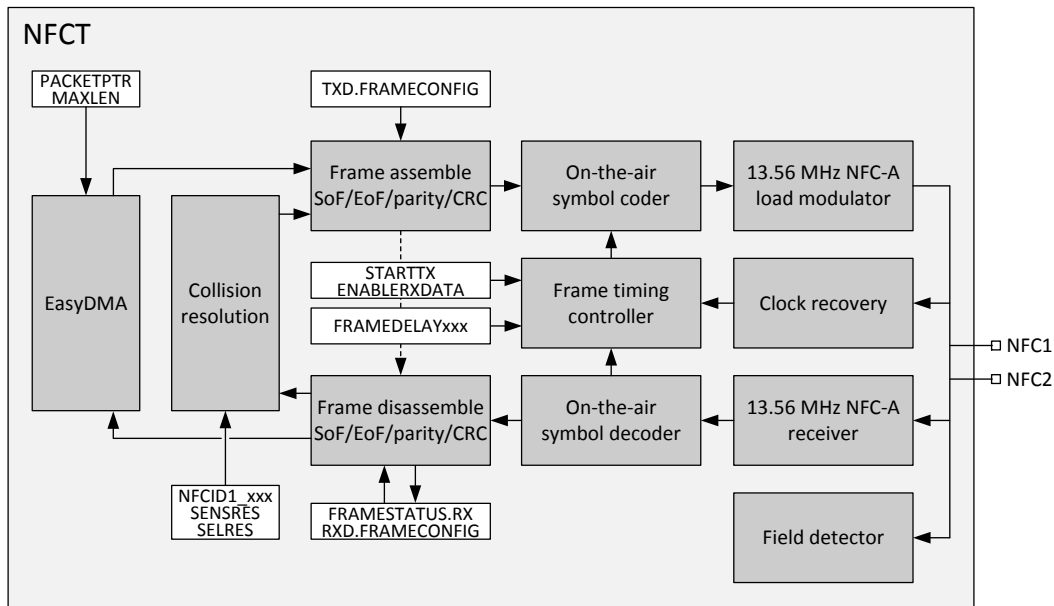

**Figure 125: NFCT overview**

When transmitting, the frame data will be transferred directly from RAM and transmitted with configurable frame type and delay timing. The system will be notified by an event whenever a complete frame is received or sent. The received frames will be automatically disassembled and the data part of the frame transferred to RAM.

The NFCT peripheral also supports the collision detection and resolution ("anticollision") as defined by the NFC Forum.

Wake-on-field is supported in SENSE mode while the device is either in System OFF or System ON mode. When the antenna enters an NFC field, an event will be triggered notifying the system to activate the NFCT functionality for incoming frames. In System ON, if the energy detected at the antenna increases beyond a threshold value, the module will generate a [FIELDDETECTED](#) event. When the strength of the field no longer supports NFC communication, the module will generate a [FIELDLOST](#) event. For the Low Power Field Detect threshold values, refer to [NFCT Electrical Specification](#) on page 496.

In System OFF, the NFCT Low Power Field Detect function can wake the system up through a reset. The NFC bit in the RESETREAS register in [POWER — Power supply](#) on page 67 will be set as the cause of the wake-up.

If the system is put into System OFF mode while a field is already present, the NFCT Low Power Field Detect function will wake the system up right away and generate a reset.

**Important:** As a consequence of a reset, NFCT is disabled, and therefore the reset handler will have to activate NFCT again and set it up properly.

The HFXO must be running before the NFCT peripheral goes into ACTIVATED state. Note that the NFCT peripheral calibration is automatically done on [ACTIVATE](#) task. The HFXO can be turned off when the NFCT peripheral goes into SENSE mode. The shortcut [FIELDDETECTED\\_ACTIVATE](#) can be used when the HFXO is already running while in SENSE mode.

Outgoing data will be collected from RAM with the EasyDMA function and assembled according to the [TXD.FRAMECONFIG](#) on page 492 register. Incoming data will be disassembled according to the [RXD.FRAMECONFIG](#) register and the data section in the frame will be written to RAM via the EasyDMA function.

The NFCT peripheral includes a frame timing controller that can be used to accurately control the inter-frame delay between the incoming frame and a corresponding outgoing frame. It also includes optional CRC functionality.

## 41.2 Operating states

Tasks and events are used to control the operating state of the peripheral. The module can change state by triggering a task, or when specific operations are finalized. Events and tasks allow software to keep track of and change the current state.

See [Figure 124: NFCT block diagram](#) on page 475 and [Figure 126: NFCT state diagram, automatic collision resolution enabled](#) on page 477 for more information.

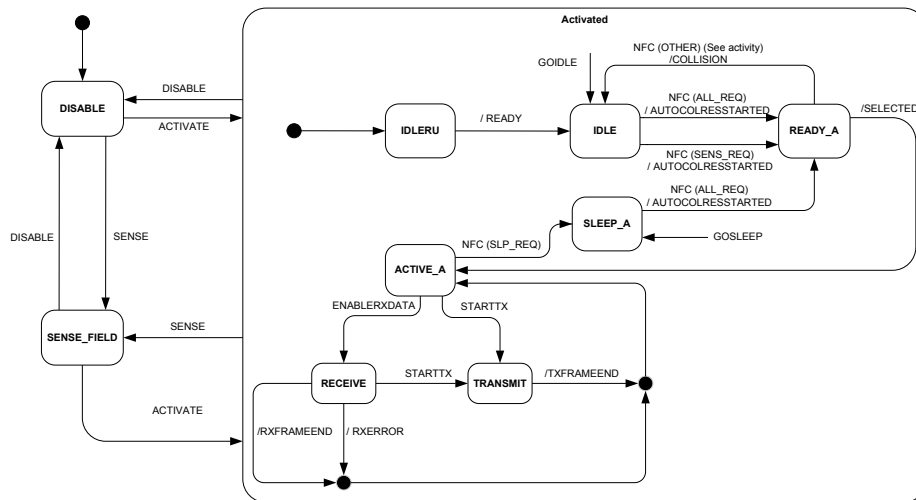


Figure 126: NFCT state diagram, automatic collision resolution enabled

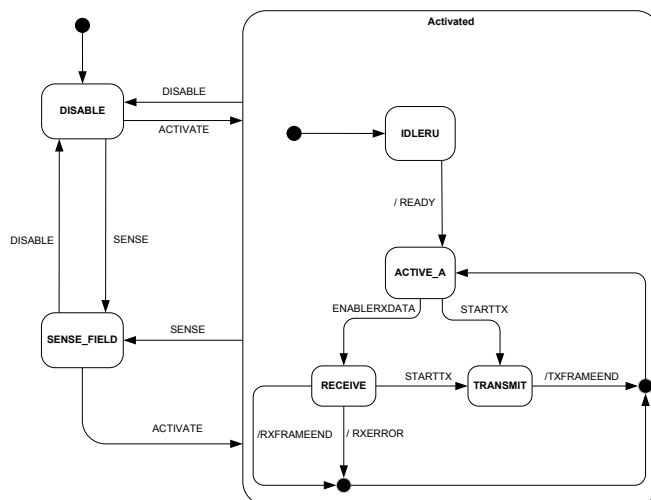


Figure 127: NFCT state diagram, automatic collision resolution disabled

### Important:

- **FIELDLOST** event will not be reflected in the state machine (for instance by going back to the DISABLE state). It is up to software to decide on the actions to take when a field lost occurs.
- FIELDLOST event is not generated in SENSE mode.
- Sending SENSE task while field is still present does not generate **FIELDDETECTED** event.
- If the FIELDDETECTED event is cleared before sending the **ACTIVATE** task, then the FIELDDETECTED event shows up again after sending the ACTIVATE task. The shortcut FIELDDETECTED\_ACTIVATE can be used to avoid this condition.

## 41.3 Pin configuration

NFCT uses two pins to connect the antenna and these pins are shared with GPIOs.

The PROTECT field in the NFCPINS register in [UICR](#) defines the usage of these pins and their protection level against excessive voltages. The content of the NFCPINS register is reloaded at every reset. See [Pin assignments](#) on page 13 for the pins used by the NFCT peripheral.

When NFCPINS.PROTECT=NFC, a protection circuit will be enabled on the dedicated pins, preventing the chip from being damaged in the presence of a strong NFC field. The protection circuit will short the two pins together if voltage difference exceeds approximately 2V. The GPIO function on those pins will also be disabled.

When NFCPINS.PROTECT=Disabled, the device will not be protected against strong NFC field damages caught by a connected NFCT antenna, and the NFCT peripheral will not operate as expected, as it will never leave the DISABLE state.

The pins dedicated to the NFCT antenna function will have some limitation when the pins are configured for normal GPIO operation. The pin capacitance will be higher on those (refer to C<sub>PAD\_NFC</sub> in the Electrical Specification of [GPIO — General purpose input/output](#) on page 155), and some increased leakage current between the two pins is to be expected if they are used in GPIO mode, and are driven to different logical values. To save power, the two pins should always be set to the same logical value whenever entering one of the device power saving modes. For details, refer to I<sub>NFC\_LEAK</sub> in the Electrical Specification of [GPIO — General purpose input/output](#) on page 155.

## 41.4 EasyDMA

The NFCT peripheral implements EasyDMA for reading and writing of data packets from and to the Data RAM.

The NFCT EasyDMA utilizes a pointer called [PACKETPTR](#) on page 492 for receiving and transmitting packets.

The NFCT peripheral uses EasyDMA to read or write RAM, but not both at the same time. The event [RXFRAMESTART](#) indicates that the EasyDMA has started writing to the RAM for a receive frame and the event [RXFRAMEEND](#) indicates that the EasyDMA has completed writing to the RAM. Similarly, the event [TXFRAMESTART](#) indicates that the EasyDMA has started reading from the RAM for a transmit frame and the event [TXFRAMEEND](#) indicates that the EasyDMA has completed reading from the RAM. If a transmit and a receive operation is issued at the same time, the transmit operation would be prioritized.

Starting a transmit operation while the EasyDMA is writing a receive frame to the RAM will result in unpredictable behavior. Starting an EasyDMA operation when there is an ongoing EasyDMA operation may result in unpredictable behavior. It is recommended to wait for the TXFRAMEEND or RXFRAMEEND event for the ongoing transmit or receive before starting a new receive or transmit operation.

The [MAXLEN](#) on page 492 register determines the maximum number of bytes that can be read from or written to the RAM. This feature can be used to ensure that the NFCT peripheral does not overwrite, or read beyond, the RAM assigned to a packet. Note that if the [RXD.AMOUNT](#) or [TXD.AMOUNT](#) register indicates longer data packets than set in MAXLEN, the frames sent to or received from the physical layer will be incomplete. In that situation, in RX, the OVERRUN bit in the [FRAMESTATUS.RX](#) register will be set and an [RXERROR](#) event will be triggered.

**Important:** The RXD.AMOUNT and TXD.AMOUNT define a frame length in bytes and bits excluding start of frame (SoF), end of frame (EoF), and parity, but including CRC for RXD.AMOUNT only. Make sure to take potential additional bits into account when setting MAXLEN.

Only sending task [ENABLERXDATA](#) ensures that a new value in PACKETPTR pointing to the RX buffer in Data RAM is taken into account.

If PACKETPTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a hard fault or RAM corruption. For more information about the different memory regions, see Chapter [Memory](#) on page 20.

The NFCT peripherals normally do alternative receive and transmit frames. Therefore, to prepare for the next frame, the PACKETPTR, MAXLEN, [TXD.FRAMECONFIG](#) and TXD.AMOUNT can be updated while the receive is in progress, and, similarly, the PACKETPTR, MAXLEN and [RXD.FRAMECONFIG](#) can be updated while the transmit is in progress. They can be updated and prepared for the next NFC frame immediately after the [STARTED](#) event of the current frame has been received. Updating the TXD.FRAMECONFIG and TXD.AMOUNT during the current transmit frame or updating RXD.FRAMECONFIG during current receive frame may cause unpredictable behaviour.

In accordance with *NFC Forum, NFC Digital Protocol Technical Specification*, the least significant bit (LSB) from the least significant byte (LSByte) is sent on air first. The bytes are stored in increasing order, starting at the lowest address in the EasyDMA buffer in RAM.

## 41.5 Frame assembler

The NFCT peripheral implements a frame assembler in hardware.

When the NFCT peripheral is in the ACTIVE\_A state, the software can decide to enter RX or TX mode. For RX, see [Frame disassembler](#) on page 480. For TX, the software must indicate the address of the source buffer in Data RAM and its size through programming the [PACKETPTR](#) and MAXLEN registers respectively, then issuing a STARTTX task.

MAXLEN must be set so that it matches the size of the frame to be sent.

The [STARTED](#) event indicates that the PACKETPTR and MAXLEN registers have been captured by the frame assembler EasyDMA.

When asserting the [STARTTX](#) task, the frame assembler module will start reading TXD.AMOUNT.TXDATABYTES bytes (plus one additional byte if TXD.AMOUNT.TXDATABITS > 0) from the RAM position set by the PACKETPTR.


The NFCT peripheral transmits the data as read from RAM, adding framing and the CRC calculated on the fly if set in TXD.FRAMECONFIG. The NFCT peripheral will take (8\*TXD.AMOUNT.TXDATABYTES + TXD.AMOUNT.TXDATABITS) bits and assemble a frame according to the settings in [TXD.FRAMECONFIG](#). Both short frames, standard frames, and bit-oriented SDD frames as specified in the *NFC Forum, NFC Digital Protocol Technical Specification* can be assembled by the correct setting of the TXD.FRAMECONFIG register.

The bytes will be transmitted on air in the same order as they are read from RAM with a rising bit order within each byte, least significant bit (LSB) first. That is, b0 will be transmitted on air before b1, and so on. The bits read from RAM will be coded into symbols as defined in the *NFC Forum, NFC Digital Protocol Technical Specification*.


**Important:** Some NFC Forum documents, such as *NFC Forum, NFC Digital Protocol Technical Specification*, define bit numbering in a byte from b1 (LSB) to b8 (most significant bit (MSB)), while most other technical documents from the NFC Forum, and also the Nordic Semiconductor documentation, traditionally number them from b0 to b7. The present document uses the b0–b7 numbering scheme. Be aware of this when comparing the *NFC Forum, NFC Digital Protocol Technical Specification* to others.

The frame assembler can be configured in TXD.FRAMECONFIG to add SoF symbol, calculate and add parity bits, and calculate and add CRC to the data read from RAM when assembling the frame. The total frame will then be longer than what is defined by TXD.AMOUNT.TXDATABYTES. TXDATABITS. DISCARDMODE will select if the first bits in the first byte read from RAM or the last bits in the last byte read from RAM will be discarded if TXD.AMOUNT.TXDATABITS are not equal to zero. Note that if TXD.FRAMECONFIG.PARITY = Parity and TXD.FRAMECONFIG.DISCARDMODE=DiscardStart, a parity bit will be included after the non-complete first byte. No parity will be added after a non-complete last byte.

The frame assemble operation is illustrated in [Figure 128: Frame assemble illustration](#) on page 480 for different settings in TXD.FRAMECONFIG. All shaded bit fields are added by the frame assembler. Some of these bits are optional and appearances are configured in TXD.FRAMECONFIG. Note that the frames illustrated do not necessarily comply with the NFC specification. The figure is only to illustrate the behavior of the NFCT peripheral.

**Data from RAM**

**Frame on air**

PARITY = Parity  
 TXDATABITS = 0  
 CRCMODETX = CRC16TX



PARITY = Parity  
 TXDATABITS = 4  
 CRCMODETX = NoCRCTX  
 DISCARDMODE = DiscardStart



PARITY = Parity  
 TXDATABITS = 0  
 CRCMODETX = NoCRCTX



**Figure 128: Frame assemble illustration**

The accurate timing for transmitting the frame on air is set using the frame timing controller settings.

## 41.6 Frame disassembler

The NFCT peripheral implements a frame disassembler in hardware.

When the NFCT peripheral is in the `ACTIVE_A` state, the software can decide to enter RX or TX mode. For TX, see [Frame assembler](#) on page 479. For RX, the software must indicate the address and size of the destination buffer in Data RAM through programming the `PACKETPTR` and `MAXLEN` registers before issuing an `ENABLERXDATA` task.

The `STARTED` event indicates that the `PACKETPTR` and `MAXLEN` registers have been captured by the frame disassembler EasyDMA.


When an incoming frame starts, the `RXFRAMESTART` event will get issued and data will be written to the buffer in Data RAM. The frame disassembler will verify and remove any parity bits, start of frame (SoF) and end of frame (EoF) symbols on the fly based on `RXD.FRAMECONFIG` register configuration. It will, however, verify and transfer the CRC bytes into RAM, if the CRC is enabled through `RXD.FRAMECONFIG`.

When an EoF symbol is detected, the NFCT peripheral will assert the `RXFRAMEEND` event and write the `RXD.AMOUNT` register to indicate numbers of received bytes and bits in the data packet. The module does not interpret the content of the data received from the remote NFC device, except for SoF, EoF, parity, and CRC checking, as described above. The frame disassemble operation is illustrated below.



**Frame on air**


PARITY = Parity  
 RXDATABITS = 0  
 CRCMODERX = CRC16RX



PARITY = Parity  
 CRCMODERX = NoCRCTR  
 RXDATABITS = 4



PARITY = NoParity  
 CRCMODERX = NoCRCRX  
 RXDATABITS = 0


**Data to RAM**


**Figure 129: Frame disassemble illustration**

Per NFC specification, the time between EoF to the next SoF can be as short as 86  $\mu$ s, and therefore care must be taken that PACKETPTR and MAXLEN are ready and ENABLERXDATA is issued on time after the end of previous frame. The use of a PPI shortcut from [TXFRAMEEND](#) to ENABLERXDATA is recommended.

## 41.7 Frame timing controller


The NFCT peripheral includes a frame timing controller that continuously keeps track of the number of the 13.56 MHz RF carrier clock periods since the end of the EoF of the last received frame.

The NFCT peripheral can be programmed to send a responding frame within a time window or at an exact count of RF carrier periods. In case of [FRAMEDELAYMODE](#) = Window, a [STARTTX](#) task triggered before the frame timing controller counter is equal to [FRAMEDELAYMIN](#) will force the transmission to halt until the counter is equal to FRAMEDELAYMIN. If the counter is within FRAMEDELAYMIN and [FRAMEDELAYMAX](#) when the STARTTX task is triggered, the NFCT peripheral will start the transmission straight away. In case of FRAMEDELAYMODE = ExactVal, a STARTTX task triggered before the frame delay counter is equal to FRAMEDELAYMAX will halt the actual transmission start until the counter is equal to FRAMEDELAYMAX.

In case of FRAMEDELAYMODE = WindowGrid, the behaviour is similar to the FRAMEDELAYMODE = Window, but the actual transmission between FRAMEDELAYMIN and FRAMEDELAYMAX starts on a bit grid as defined for NFC-A Listen frames (slot duration of 128 RF carrier periods).

An [ERROR](#) event (with FRAMEDELAYTIMEOUT cause in [ERRORSTATUS](#)) will be asserted if the frame timing controller counter reaches FRAMEDELAYMAX without any STARTTX task triggered. This may happen even when the response is not required as per *NFC Forum, NFC Digital Protocol Technical Specification*. Any commands handled by the automatic collision resolution that don't involve a response being generated may also result in an ERROR event (with FRAMEDELAYTIMEOUT cause in ERRORSTATUS). The FRAMEDELAYMIN and FRAMEDELAYMAX values shall only be updated before the STARTTX task is triggered. Failing to do so may cause unpredictable behaviour.

The frame timing controller operation is illustrated in [Figure 130: Frame timing controller \(FRAMEDELAYMODE=Window\)](#) on page 482. The frame timing controller automatically adjusts the frame timing counter based on the last received data bit according to NFC-A technology in the *NFC Forum, NFC Digital Protocol Technical Specification*.

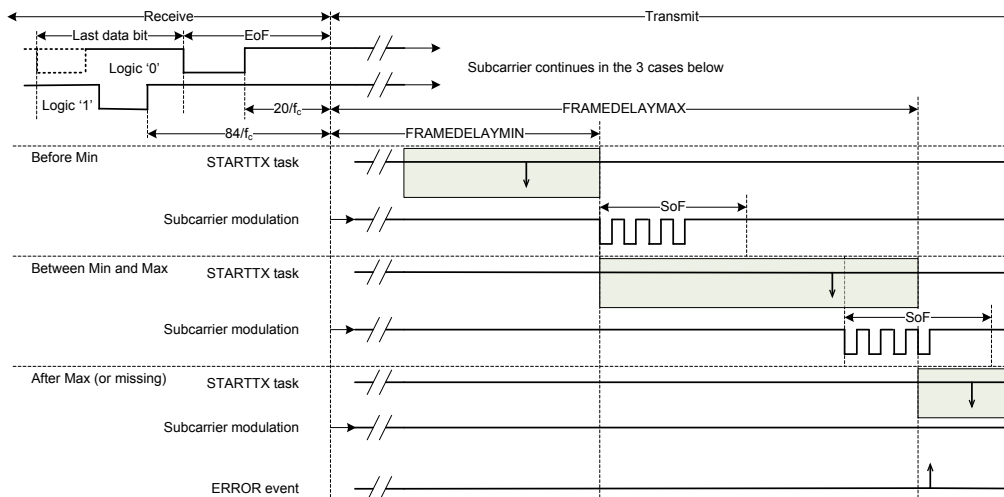

**Figure 130: Frame timing controller (FRAMEDELAYMODE=Window)**

## 41.8 Collision resolution

The NFCT peripheral implements an automatic collision resolution function as defined by the NFC Forum.

Automatic collision resolution is enabled by default, and it is recommended that the feature is used since it is power efficient and reduces the complexity of software handling the collision resolution sequence. This feature can be disabled through the MODE field in the [AUTOCOLRESCONFIG](#) register. When the automatic collision resolution is disabled, all commands will be sent over EasyDMA as defined in frame disassembler.

The [SENSRES](#) and [SELRES](#) registers need to be programmed upfront in order for the collision resolution to behave correctly. Depending on the NFCIDSIZE field in SENSRES, the following registers also need to be programmed upfront:

- NFCID1\_LAST if NFCID1SIZE=NFCID1Single (ID = 4 bytes);
- NFCID1\_2ND\_LAST and NFCID1\_LAST if NFCID1SIZE=NFCID1Double (ID = 7 bytes);
- NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST and NFCID1\_LAST if NFCID1SIZE=NFCID1Triple (ID = 10 bytes);

A pre-defined set of registers, NFC.TAGHEADER0..3, containing a valid NFCID1 value, is available in [FICR](#) and can be used by software to populate the NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST, and NFCID1\_LAST registers.

[Table 91: NFCID1 byte allocation \(top sent first on air\)](#) on page 482 explains the position of the ID bytes in NFCID1\_3RD\_LAST, NFCID1\_2ND\_LAST, and NFCID1\_LAST, depending on the ID size, and as compared to the definition used in the *NFC Forum, NFC Digital Protocol Technical Specification*.

**Table 91: NFCID1 byte allocation (top sent first on air)**

ID = 4 bytes		ID = 7 bytes	ID = 10 bytes
NFCID1_Q			nfcid1 <sub>0</sub>
NFCID1_R			nfcid1 <sub>1</sub>
NFCID1_S			nfcid1 <sub>2</sub>
NFCID1_T		nfcid1 <sub>0</sub>	nfcid1 <sub>3</sub>
NFCID1_U		nfcid1 <sub>1</sub>	nfcid1 <sub>4</sub>
NFCID1_V		nfcid1 <sub>2</sub>	nfcid1 <sub>5</sub>
NFCID1_W	nfcid1 <sub>0</sub>	nfcid1 <sub>3</sub>	nfcid1 <sub>6</sub>
NFCID1_X	nfcid1 <sub>1</sub>	nfcid1 <sub>4</sub>	nfcid1 <sub>7</sub>
NFCID1_Y	nfcid1 <sub>2</sub>	nfcid1 <sub>5</sub>	nfcid1 <sub>8</sub>
NFCID1_Z	nfcid1 <sub>3</sub>	nfcid1 <sub>6</sub>	nfcid1 <sub>9</sub>

The hardware implementation can handle the states from IDLE to ACTIVE\_A automatically as defined in the *NFC Forum, NFC Activity Technical Specification*, and the other states are to be handled by software. The software keeps track of the state through events. The collision resolution will trigger an

**AUTOCOLRESSTARTED** event when it has started. Reaching the ACTIVE\_A state is indicated by the **SELECTED** event.

If collision resolution fails, a **COLLISION** event is triggered. Note that errors occurring during automatic collision resolution may also cause **ERROR** and/or **RXERROR** events to be generated. Other events may also get generated. It is recommended that the software ignores any event except COLLISION, SELECTED and FIELDLOST during automatic collision resolution. Software shall also make sure that any unwanted SHORT or PPI shortcut is disabled during automatic collision resolution.

The automatic collision resolution will be restarted, if the packets are received with CRC or parity errors while in ACTIVE\_A state. The automatic collision resolution feature can be disabled while in ACTIVE\_A state to avoid this.

The SLP\_REQ is automatically handled by the NFCT peripheral when the automatic collision resolution is enabled. However, this results in an ERROR event (with FRAMEDELAYTIMEOUT cause in ERRORSTATUS) since the SLP\_REQ has no response. This error must be ignored until the SELECTED event is triggered and this error should be cleared by the software when the SELECTED event is triggered.

## 41.9 Antenna interface


In ACTIVATED state, an amplitude regulator will adjust the voltage swing on the antenna pins to a value that is within the  $V_{\text{swing}}$  limit.

Refer to [NFCT Electrical Specification](#) on page 496.

## 41.10 NFCT antenna recommendations

The NFCT antenna coil must be connected differential between **NFC1** and **NFC2** pins of the device.

Two external capacitors should be used to tune the resonance of the antenna circuit to 13.56 MHz.

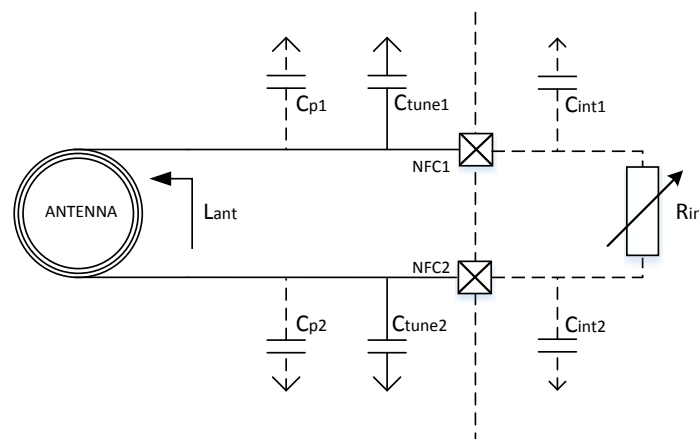

**Figure 131: NFCT antenna recommendations**

The required tuning capacitor value is given by the below equations:

$$C'_{tune} = \frac{1}{(2\pi \cdot 13.56 \text{ MHz})^2 \cdot L_{ant}} \quad \text{where } C'_{tune} = \frac{1}{2} \cdot (C_p + C_{int} + C_{tune})$$

$$\text{and } C_{tune1} = C_{tune2} = C_{tune} \quad C_{p1} = C_{p2} = C_p \quad C_{int1} = C_{int2} = C_{int}$$

$$C_{tune} = \frac{2}{(2\pi \cdot 13.56 \text{ MHz})^2 \cdot L_{ant}} - C_p - C_{int}$$

An antenna inductance of  $L_{ant} = 2 \mu\text{H}$  will give tuning capacitors in the range of 130 pF on each pin. The total capacitance on **NFC1** and **NFC2** must be matched.

## 41.11 Battery protection

If the antenna is exposed to a strong NFC field, current may flow in the opposite direction on the supply due to parasitic diodes and ESD structures.

If the battery used does not tolerate return current, a series diode must be placed between the battery and the device in order to protect the battery.

## 41.12 References

NFC Forum, NFC Analog Specification version 1.0, [www.nfc-forum.org](http://www.nfc-forum.org)

NFC Forum, NFC Digital Protocol Technical Specification version 1.1, [www.nfc-forum.org](http://www.nfc-forum.org)

NFC Forum, NFC Activity Technical Specification version 1.1, [www.nfc-forum.org](http://www.nfc-forum.org)

## 41.13 Registers

**Table 92: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40005000	NFCT	NFCT	Near field communication tag	

**Table 93: Register Overview**

Register	Offset	Description
TASKS_ACTIVATE	0x000	Activate NFCT peripheral for incoming and outgoing frames, change state to activated
TASKS_DISABLE	0x004	Disable NFCT peripheral
TASKS_SENSE	0x008	Enable NFC sense field mode, change state to sense mode
TASKS_STARTTX	0x00C	Start transmission of an outgoing frame, change state to transmit
TASKS_ENABLERXDATA	0x01C	Initializes the EasyDMA for receive.
TASKS_GOIDLE	0x024	Force state machine to IDLE state
TASKS_GOSLEEP	0x028	Force state machine to SLEEP_A state
EVENTS_READY	0x100	The NFCT peripheral is ready to receive and send frames
EVENTS_FIELDDETECTED	0x104	Remote NFC field detected
EVENTS_FIELDLOST	0x108	Remote NFC field lost
EVENTS_TXFRAMESTART	0x10C	Marks the start of the first symbol of a transmitted frame
EVENTS_TXFRAMEEND	0x110	Marks the end of the last transmitted on-air symbol of a frame
EVENTS_RXFRAMESTART	0x114	Marks the end of the first symbol of a received frame
EVENTS_RXFRAMEEND	0x118	Received data has been checked (CRC, parity) and transferred to RAM, and EasyDMA has ended accessing the RX buffer
EVENTS_ERROR	0x11C	NFC error reported. The ERRORSTATUS register contains details on the source of the error.

Register	Offset	Description
EVENTS_RXERROR	0x128	NFC RX frame error reported. The FRAMESTATUS.RX register contains details on the source of the error.
EVENTS_ENDRX	0x12C	RX buffer (as defined by PACKETPTR and MAXLEN) in Data RAM full.
EVENTS_ENDTX	0x130	Transmission of data in RAM has ended, and EasyDMA has ended accessing the TX buffer
EVENTS_AUTOCOLRESST	0x138	Auto collision resolution process has started
EVENTS_COLLISION	0x148	NFC auto collision resolution error reported.
EVENTS_SELECTED	0x14C	NFC auto collision resolution successfully completed
EVENTS_STARTED	0x150	EasyDMA is ready to receive or send frames.
<i>SHORTS</i>	0x200	Shortcut register
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>ERRORSTATUS</i>	0x404	NFC Error Status register
<i>FRAMESTATUS.RX</i>	0x40C	Result of last incoming frame
<i>NFCTAGSTATE</i>	0x410	NfcTag state register
<i>FIELDPRESENT</i>	0x43C	Indicates the presence or not of a valid field
<i>FRAMEDELAYMIN</i>	0x504	Minimum frame delay
<i>FRAMEDELAYMAX</i>	0x508	Maximum frame delay
<i>FRAMEDELAYMODE</i>	0x50C	Configuration register for the Frame Delay Timer
<i>PACKETPTR</i>	0x510	Packet pointer for TXD and RXD data storage in Data RAM
<i>MAXLEN</i>	0x514	Size of the RAM buffer allocated to TXD and RXD data storage each
<i>TXD.FRAMECONFIG</i>	0x518	Configuration of outgoing frames
<i>TXD.AMOUNT</i>	0x51C	Size of outgoing frame
<i>RXD.FRAMECONFIG</i>	0x520	Configuration of incoming frames
<i>RXD.AMOUNT</i>	0x524	Size of last incoming frame
<i>NFCID1_LAST</i>	0x590	Last NFCID1 part (4, 7 or 10 bytes ID)
<i>NFCID1_2ND_LAST</i>	0x594	Second last NFCID1 part (7 or 10 bytes ID)
<i>NFCID1_3RD_LAST</i>	0x598	Third last NFCID1 part (10 bytes ID)
<i>AUTOCOLRESCONFIG</i>	0x59C	Controls the auto collision resolution function. This setting must be done before the NFCT peripheral is enabled.
<i>SENSRES</i>	0x5A0	NFC-A SENS_RES auto-response settings
<i>SELRES</i>	0x5A4	NFC-A SEL_RES auto-response settings

### 41.13.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																														F			B	A	
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	FIELDDETECTED_ACTIVATE			Shortcut between FIELDDETECTED event and ACTIVATE task																														
					See <a href="#">EVENTS_FIELDDETECTED</a> and <a href="#">TASKS_ACTIVATE</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
B	RW	FIELDLOST_SENSE			Shortcut between FIELDLOST event and SENSE task																														
					See <a href="#">EVENTS_FIELDLOST</a> and <a href="#">TASKS_SENSE</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
F	RW	TXFRAMEEND_ENABLERXC			Shortcut between TXFRAMEEND event and ENABLERXDATA task																														
					See <a href="#">EVENTS_TXFRAMEEND</a> and <a href="#">TASKS_ENABLERXDATA</a>																														
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

## 41.13.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																									
Reset 0x00000000						0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																				
A	RW	READY			Enable or disable interrupt for READY event																																				
					See <a href="#">EVENTS_READY</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
B	RW	FIELDDETECTED			Enable or disable interrupt for FIELDDETECTED event																																				
					See <a href="#">EVENTS_FIELDDETECTED</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
C	RW	FIELDLOST			Enable or disable interrupt for FIELDLOST event																																				
					See <a href="#">EVENTS_FIELDLOST</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
D	RW	TXFRAMESTART			Enable or disable interrupt for TXFRAMESTART event																																				
					See <a href="#">EVENTS_TXFRAMESTART</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
E	RW	TXFRAMEEND			Enable or disable interrupt for TXFRAMEEND event																																				
					See <a href="#">EVENTS_TXFRAMEEND</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
F	RW	RXFRAMESTART			Enable or disable interrupt for RXFRAMESTART event																																				
					See <a href="#">EVENTS_RXFRAMESTART</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
G	RW	RXFRAMEEND			Enable or disable interrupt for RXFRAMEEND event																																				
					See <a href="#">EVENTS_RXFRAMEEND</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
H	RW	ERROR			Enable or disable interrupt for ERROR event																																				
					See <a href="#">EVENTS_ERROR</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
K	RW	RXERROR			Enable or disable interrupt for RXERROR event																																				
					See <a href="#">EVENTS_RXERROR</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
L	RW	ENDRX			Enable or disable interrupt for ENDRX event																																				
					See <a href="#">EVENTS_ENDRX</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
M	RW	ENDTX			Enable or disable interrupt for ENDTX event																																				
					See <a href="#">EVENTS_ENDTX</a>																																				
			Disabled	0	Disable																																				
			Enabled	1	Enable																																				
N	RW	AUTOCOLRESSTARTED			Enable or disable interrupt for AUTOCOLRESSTARTED event																																				
					See <a href="#">EVENTS_AUTOCOLRESSTARTED</a>																																				

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				T S R N M L K H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
R	RW	COLLISION	Disabled	0	Disable																														
			Enabled	1	Enable																														
			Enable or disable interrupt for COLLISION event																																
			See <a href="#">EVENTS_COLLISION</a>																																
S	RW	SELECTED	Disabled	0	Disable																														
			Enabled	1	Enable																														
			Enable or disable interrupt for SELECTED event																																
			See <a href="#">EVENTS_SELECTED</a>																																
T	RW	STARTED	Disabled	0	Disable																														
			Enabled	1	Enable																														
			Enable or disable interrupt for STARTED event																																
			See <a href="#">EVENTS_STARTED</a>																																

### 41.13.3 INTENSET

Address offset: 0x304

### Enable interrupt

Bit number			31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id			T S R N M L K H G F E D C B A																															
Reset 0x00000000			0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																													
A	RW	READY			Write '1' to Enable interrupt for READY event																													
					See <a href="#">EVENTS_READY</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
B	RW	FIELDDETECTED			Write '1' to Enable interrupt for FIELDDETECTED event																													
					See <a href="#">EVENTS_FIELDDETECTED</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
C	RW	FIELDLOST			Write '1' to Enable interrupt for FIELDLOST event																													
					See <a href="#">EVENTS_FIELDLOST</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
D	RW	TXFRAMESTART			Write '1' to Enable interrupt for TXFRAMESTART event																													
					See <a href="#">EVENTS_TXFRAMESTART</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
E	RW	TXFRAMEEND			Write '1' to Enable interrupt for TXFRAMEEND event																													
					See <a href="#">EVENTS_TXFRAMEEND</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
			Enabled	1	Read: Enabled																													
F	RW	RXFRAMESTART			Write '1' to Enable interrupt for RXFRAMESTART event																													
					See <a href="#">EVENTS_RXFRAMESTART</a>																													
			Set	1	Enable																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				T S R N M L K H G F E D C B A																																		
Reset 0x00000000				0 0																																		
Id	RW	Field	Value Id	Value	Description																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
G	RW	RXFRAMEEND			Write '1' to Enable interrupt for RXFRAMEEND event																																	
					See <a href="#">EVENTS_RXFRAMEEND</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
H	RW	ERROR			Write '1' to Enable interrupt for ERROR event																																	
					See <a href="#">EVENTS_ERROR</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
K	RW	RXERROR			Write '1' to Enable interrupt for RXERROR event																																	
					See <a href="#">EVENTS_RXERROR</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
L	RW	ENDRX			Write '1' to Enable interrupt for ENDRX event																																	
					See <a href="#">EVENTS_ENDRX</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
M	RW	ENDTX			Write '1' to Enable interrupt for ENDTX event																																	
					See <a href="#">EVENTS_ENDTX</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
N	RW	AUTOCOLRESSTARTED			Write '1' to Enable interrupt for AUTOCOLRESSTARTED event																																	
					See <a href="#">EVENTS_AUTOCOLRESSTARTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
R	RW	COLLISION			Write '1' to Enable interrupt for COLLISION event																																	
					See <a href="#">EVENTS_COLLISION</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
S	RW	SELECTED			Write '1' to Enable interrupt for SELECTED event																																	
					See <a href="#">EVENTS_SELECTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
T	RW	STARTED			Write '1' to Enable interrupt for STARTED event																																	
					See <a href="#">EVENTS_STARTED</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

#### 41.13.4 INTENCLR

Address offset: 0x308



## Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id															T S R										N M L K										H G F E D C B A									
Reset 0x00000000					0 0																																							
Id	RW	Field	Value Id	Value	Description																																							
A	RW	READY			Write '1' to Disable interrupt for READY event																																							
					See <a href="#">EVENTS_READY</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
B	RW	FIELDDETECTED			Write '1' to Disable interrupt for FIELDDETECTED event																																							
					See <a href="#">EVENTS_FIELDDETECTED</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
C	RW	FIELDLOST			Write '1' to Disable interrupt for FIELDLOST event																																							
					See <a href="#">EVENTS_FIELDLOST</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
D	RW	TXFRAMESTART			Write '1' to Disable interrupt for TXFRAMESTART event																																							
					See <a href="#">EVENTS_TXFRAMESTART</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
E	RW	TXFRAMEEND			Write '1' to Disable interrupt for TXFRAMEEND event																																							
					See <a href="#">EVENTS_TXFRAMEEND</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
F	RW	RXFRAMESTART			Write '1' to Disable interrupt for RXFRAMESTART event																																							
					See <a href="#">EVENTS_RXFRAMESTART</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
G	RW	RXFRAMEEND			Write '1' to Disable interrupt for RXFRAMEEND event																																							
					See <a href="#">EVENTS_RXFRAMEEND</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
H	RW	ERROR			Write '1' to Disable interrupt for ERROR event																																							
					See <a href="#">EVENTS_ERROR</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
K	RW	RXERROR			Write '1' to Disable interrupt for RXERROR event																																							
					See <a href="#">EVENTS_RXERROR</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							
L	RW	ENDRX			Write '1' to Disable interrupt for ENDRX event																																							
					See <a href="#">EVENTS_ENDRX</a>																																							
			Clear	1	Disable																																							
			Disabled	0	Read: Disabled																																							
			Enabled	1	Read: Enabled																																							

### 41.13.5 ERRORSTATUS

### NFC Error Status register

Write a bit to '1' to clear it. Writing '0' has no effect.

### 41.13.6 FRAMESTATUS.RX

Result of last incoming frame

Write a bit to '1' to clear it. Writing '0' has no effect.

Page 490

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																		
Id																																				C	B	A
Reset 0x00000000				0 0																																		
Id	RW	Field	Value	Id	Value	Description																																
B	RW	PARITYSTATUS				Parity status of received frame																																
			ParityOK	0	Frame received with parity OK																																	
			ParityError	1	Frame received with parity error																																	
C	RW	OVERRUN				Overrun detected																																
			NoOverrun	0	No overrun detected																																	
			Overrun	1	Overrun error																																	

### 41.13.7 NFCTAGSTATE

Address offset: 0x410

NfcTag state register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	R	NFCTAGSTATE			NfcTag state																														
			Disabled	0	Disabled or sense																														
			RampUp	2	RampUp																														
			Idle	3	Idle																														
			Receive	4	Receive																														
			FrameDelay	5	FrameDelay																														
			Transmit	6	Transmit																														

### 41.13.8 FIELDPRESENT

Address offset: 0x43C

Indicates the presence or not of a valid field

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	FIELDPRESENT				Indicates if a valid field is present. Available only in the activated state.																													
			NoField	0	No valid field detected																														
			FieldPresent	1	Valid field detected																														
B	R	LOCKDETECT				Indicates if the low level has locked to the field																													
			NotLocked	0	Not locked to field																														
			Locked	1	Locked to field																														

### 41.13.9 FRAMEDELAYMIN

Address offset: 0x504

Minimum frame delay

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																A	A	A
Reset 0x00000480		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																												
A	RW	FRAMEDELAYMIN				Minimum frame delay in number of 13.56 MHz clocks																												

### 41.13.10 FRAMEDELAYMAX

Address offset: 0x508

## Maximum frame delay

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00001000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																
A	RW	FRAMEDELAYMAX			Maximum frame delay in number of 13.56 MHz clocks																																

## 41.13.11 FRAMEDELAYMODE

Address offset: 0x50C

Configuration register for the Frame Delay Timer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
Id	RW	Field	Value Id	Value	Description																																
A	RW	FRAMEDELAYMODE			Configuration register for the Frame Delay Timer																																
			FreeRun	0	Transmission is independent of frame timer and will start when the STARTTX task is triggered. No timeout.																																
			Window	1	Frame is transmitted between FRAMEDELAYMIN and FRAMEDELAYMAX																																
			ExactVal	2	Frame is transmitted exactly at FRAMEDELAYMAX																																
			WindowGrid	3	Frame is transmitted on a bit grid between FRAMEDELAYMIN and FRAMEDELAYMAX																																

## 41.13.12 PACKETPTR

Address offset: 0x510

Packet pointer for TXD and RXD data storage in Data RAM

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	PTR			Packet pointer for TXD and RXD data storage in Data RAM. This address is a byte-aligned RAM address.																																	

## 41.13.13 MAXLEN

Address offset: 0x514

Size of the RAM buffer allocated to TXD and RXD data storage each

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Id	RW	Field	Value Id	Value	Description																																									
A	RW	MAXLEN		[0..257]	Size of the RAM buffer allocated to TXD and RXD data storage each																																									

## 41.13.14 TXD.FRAMECONFIG

Address offset: 0x518

Configuration of outgoing frames

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				D C B A																														
Reset 0x00000017				0 1 0 1 1 1																														
Id	RW	Field	Value Id	Value Description																														
A	RW	PARITY		Indicates if parity is added to the frame																														

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000017				0 1 0 1 1 1 1																															
Id	RW	Field	Value Id	Value	Description																														
			NoParity	0	Parity is not added to TX frames																														
			Parity	1	Parity is added to TX frames																														
			B	RW	DISCARDMODE	Discarding unused bits at start or end of a frame																													
			DiscardEnd	0	Unused bits are discarded at end of frame (EoF)																														
			DiscardStart	1	Unused bits are discarded at start of frame (SoF)																														
C	RW	SOF			Adding SoF or not in TX frames																														
			NoSoF	0	SoF symbol not added																														
			SoF	1	SoF symbol added																														
D	RW	CRCMODETX			CRC mode for outgoing frames																														
			NoCRCTX	0	CRC is not added to the frame																														
			CRC16TX	1	16 bit CRC added to the frame based on all the data read from RAM that is used in the frame																														

### 41.13.15 TXD.AMOUNT

Address offset: 0x51C

Size of outgoing frame

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id																																		
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	TXDATABITS			[0..7]	<div>Number of bits in the last or first byte read from RAM that shall be included in the frame (excluding parity bit).</div> <div>The DISCARDMODE field in FRAMECONFIG.TX selects if unused bits is discarded at the start or at the end of a frame. A value of 0 data bytes and 0 data bits is invalid.</div>																												
B	RW	TXDATABYTES			[0..257]	Number of complete bytes that shall be included in the frame, excluding CRC, parity and framing																												

### 41.13.16 RXD.FRAMECONFIG

Address offset: 0x520

Configuration of incoming frames

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																						
Reset 0x00000015				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PARITY				Indicates if parity expected in RX frame																																
			NoParity	0	Parity is not expected in RX frames																																	
			Parity	1	Parity is expected in RX frames																																	
B	RW	SOF				SoF expected or not in RX frames																																
			NoSoF	0	SoF symbol is not expected in RX frames																																	
			SoF	1	SoF symbol is expected in RX frames																																	
C	RW	CRCMODERX				CRC mode for incoming frames																																
			NoCRCRX	0	CRC is not expected in RX frames																																	
			CRC16RX	1	Last 16 bits in RX frame is CRC, CRC is checked and CRCSTATUS updated																																	

### 41.13.17 RXD.AMOUNT

Address offset: 0x524

Size of last incoming frame

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																									B	B	B	B	B	B	B	B	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	RXDATABITS			Number of bits in the last byte in the frame, if less than 8 (including CRC, but excluding parity and SoF/EoF framing).  Frames with 0 data bytes and less than 7 data bits are invalid and are not received properly.																														
B	R	RXDATABYTES			Number of complete bytes received in the frame (including CRC, but excluding parity and SoF/EoF framing)																														

### 41.13.18 NFCID1\_LAST

Address offset: 0x590

Last NFCID1 part (4, 7 or 10 bytes ID)

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id									D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A
Reset 0x00006363									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	1	1	0	1	1	0	0	0	1	1
Id	RW	Field	Value Id	Value	Description																																				
A	RW	NFCID1_Z			NFCID1 byte Z (very last byte sent)																																				
B	RW	NFCID1_Y			NFCID1 byte Y																																				
C	RW	NFCID1_X			NFCID1 byte X																																				
D	RW	NFCID1_W			NFCID1 byte W																																				

### 41.13.19 NFCID1\_2ND\_LAST

Address offset: 0x594

Second last NFCID1 part (7 or 10 bytes ID)

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id												C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	NFCID1_V			NFCID1 byte V																														
B	RW	NFCID1_U			NFCID1 byte U																														
C	RW	NFCID1_T			NFCID1 byte T																														

### 41.13.20 NFCID1\_3RD\_LAST

Address offset: 0x598

Third last NFCID1 part (10 bytes ID)

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id												C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	NFCID1_S			NFCID1 byte S																																	
B	RW	NFCID1_R			NFCID1 byte R																																	
C	RW	NFCID1_Q			NFCID1 byte Q																																	

### 41.13.21 AUTOCOLRESCONFIG

Address offset: 0x59C

Controls the auto collision resolution function. This setting must be done before the NFCT peripheral is enabled.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000002					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																														
A	RW	MODE					Enables/disables auto collision resolution																														
			Enabled	0			Auto collision resolution enabled																														
			Disabled	1			Auto collision resolution disabled																														

## 41.13.22 SENSRES

Address offset: 0x5A0

NFC-A SENS\_RES auto-response settings

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id																													E	E	E	E	D	D	D	D	C	C	B	A	A	A	A	A	A	A
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1									
Id	RW	Field	Value	Id	Value	Description																																								
A	RW	BITFRAMESDD				Bit frame SDD as defined by the b5:b1 of byte 1 in SENS_RES response in the <i>NFC Forum, NFC Digital Protocol Technical Specification</i>																																								
			SDD00000	0		SDD pattern 00000																																								
			SDD00001	1		SDD pattern 00001																																								
			SDD00010	2		SDD pattern 00010																																								
			SDD00100	4		SDD pattern 00100																																								
			SDD01000	8		SDD pattern 01000																																								
			SDD10000	16		SDD pattern 10000																																								
B	RW	RFU5				Reserved for future use. Shall be 0.																																								
C	RW	NFCIDSIZE				NFCID1 size. This value is used by the auto collision resolution engine.																																								
			NFCID1Single	0		NFCID1 size: single (4 bytes)																																								
			NFCID1Double	1		NFCID1 size: double (7 bytes)																																								
			NFCID1Triple	2		NFCID1 size: triple (10 bytes)																																								
D	RW	PLATFCONFIG				Tag platform configuration as defined by the b4:b1 of byte 2 in SENS_RES response in the NFC Forum, NFC Digital Protocol Technical Specification																																								
E	RW	RFU74				Reserved for future use. Shall be 0.																																								

## 41.13.23 SELRES

Address offset: 0x5A4

NFC-A SEL\_RES auto-response settings

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				E D D C C B A A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
A	RW	RFU10				Reserved for future use. Shall be 0.																												
B	RW	CASCADE				Cascade as defined by the b3 of SEL_RES response in the NFC Forum, NFC Digital Protocol Technical Specification (controlled by hardware, shall be 0)																												
C	RW	RFU43				Reserved for future use. Shall be 0.																												
D	RW	PROTOCOL				Protocol as defined by the b7:b6 of SEL_RES response in the NFC Forum, NFC Digital Protocol Technical Specification																												
E	RW	RFU7				Reserved for future use. Shall be 0.																												

## 41.14 Electrical specification

### 41.14.1 NFCT Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_c$	Frequency of operation		13.56		MHz
$C_{MI}$	Carrier modulation index	95			%
DR	Data Rate		106		kbps
$V_{sense}$	Peak differential Field detect threshold level on NFC1-NFC2 <sup>32</sup>		0.59		Vp
$I_{sense}$	Current in SENSE STATE <sup>33</sup>		100		nA
$I_{activated}$	Current in ACTIVATED STATE		400		μA
$I_{max}$	Maximum input current on NFCT pins			80	mA

### 41.14.2 NFCT Timing Parameters

Symbol	Description	Min.	Typ.	Max.	Units
$t_{activate}$	Time from task_ACTIVATE in SENSE or DISABLE state to ACTIVATE_A or IDLE state <sup>34</sup>			500	μs
$t_{sense}$	Time from remote field is present in SENSE mode to FIELDDETECTED event is asserted			20	μs

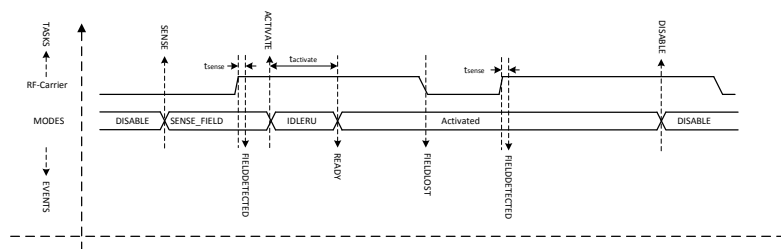


Figure 132: NFCT timing parameters (Shortcuts for FIELDDETECTED and FIELDLOST are disabled)

<sup>32</sup> Input is high impedance in sense mode

<sup>33</sup> This current does not apply when in NFC field

<sup>34</sup> Does not account for voltage supply and oscillator startup times




## 42 PDM — Pulse density modulation interface

The pulse density modulation (PDM) module enables input of pulse density modulated signals from external audio frontends, for example, digital microphones. The PDM module generates the PDM clock and supports single-channel or dual-channel (Left and Right) data input. Data is transferred directly to RAM buffers using EasyDMA.

Listed here are the main features for PDM:

- Up to two PDM microphones configured as a Left/Right pair using the same data input
- 16 kHz output sample rate, 16-bit samples
- EasyDMA support for sample buffering
- HW decimation filters
- Selectable ratio of 64 or 80 between PDM\_CLK and output sample rate

The PDM module illustrated in [Figure 133: PDM module](#) on page 497 is interfacing up to two digital microphones with the PDM interface. It implements EasyDMA, which relieves real-time requirements associated with controlling the PDM slave from a low priority CPU execution context. It also includes all the necessary digital filter elements to produce PCM samples. The PDM module allows continuous audio streaming.

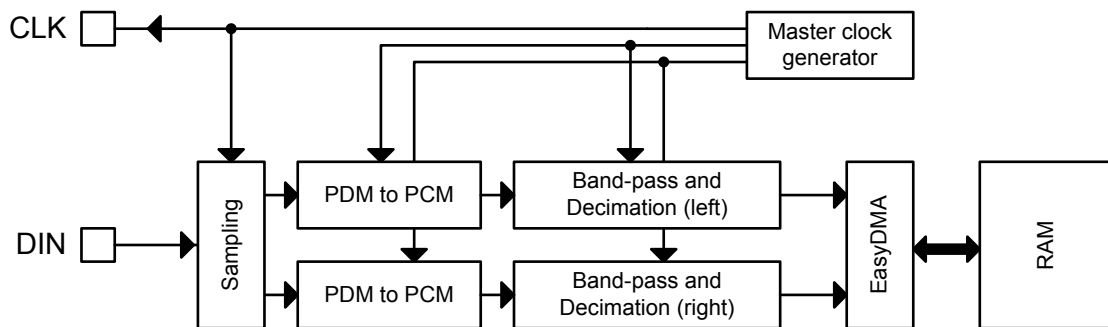

**Figure 133: PDM module**

### 42.1 Master clock generator

The `FREQ` field in the master clock's `PDMCLKCTRL` register allows adjusting the PDM clock's frequency.

The master clock generator does not add any jitter to the `HFCLK` source chosen. It is recommended (but not mandatory) to use the `Xtal` as `HFCLK` source.

### 42.2 Module operation

By default, bits from the left PDM microphone are sampled on `PDM_CLK` falling edge, bits for the right are sampled on the rising edge of `PDM_CLK`, resulting in two bitstreams. Each bitstream is fed into a digital filter which converts the PDM stream into 16-bit PCM samples, and filters and down-samples them to reach the appropriate sample rate.

The `EDGE` field in the `MODE` register allows swapping Left and Right, so that Left will be sampled on rising edge, and Right on falling.

The PDM module uses EasyDMA to store the samples coming out from the filters into one buffer in RAM.

Depending on the mode chosen in the `OPERATION` field in the `MODE` register, memory either contains alternating left and right 16-bit samples (Stereo), or only left 16-bit samples (Mono).

To ensure continuous PDM sampling, it is up to the application to update the EasyDMA destination address pointer as the previous buffer is filled.

The continuous transfer can be started or stopped by sending the START and STOP tasks. STOP becomes effective after the current frame has finished transferring, which will generate the STOPPED event. The STOPPED event indicates that all activity in the module are finished, and that the data is available in RAM (EasyDMA has finished transferring as well). Attempting to restart before receiving the STOPPED event may result in unpredictable behaviour.

## 42.3 Decimation filter

In order to convert the incoming data stream into PCM audio samples, a decimation filter is included in the PDM interface module.

The input of the filter is the two-channel PDM serial stream (with left channel on clock high, right channel on clock low). Depending on the **RATIO** selected, its output is  $2 \times 16$ -bit PCM samples at a sample rate either 64 times or 80 times (depending on the **RATIO** register) lower than the PDM clock rate.

The filter stage of each channel is followed by a digital volume control, to attenuate or amplify the output samples in a range of -20 dB to +20 dB around the default (reset) setting, defined by  $G_{\text{PDM,default}}$ . The gain is controlled by the **GAINL** and **GAINR** registers.

As an example, if the goal is to achieve 2500 RMS output samples (16 bit) with a 1 kHz 90 dBA signal into a -26 dBFS sensitivity PDM microphone, the user will have to sum the PDM module's default gain ( $G_{\text{PDM,default}}$ ) and the gain introduced by the microphone and acoustic path of his implementation (an attenuation would translate into a negative gain), and adjust **GAINL** and **GAINR** by this amount. Assuming that only the PDM module influences the gain, **GAINL** and **GAINR** must be set to  $-G_{\text{PDM,default}}$  dB to achieve the requirement.

With  $G_{\text{PDM,default}}=3.2$  dB, and as **GAINL** and **GAINR** are expressed in 0.5 dB steps, the closest value to program would be 3.0 dB, which can be calculated as:

$$\text{GAINL} = \text{GAINR} = (\text{DefaultGain} - (2 * 3))$$

Remember to check that the resulting values programmed into **GAINL** and **GAINR** fall within **MinGain** and **MaxGain**.

## 42.4 EasyDMA

Samples will be written directly to RAM, and EasyDMA must be configured accordingly.

The address pointer for the EasyDMA channel is set in **SAMPLE.PTR** register. If the destination address set in **SAMPLE.PTR** is not pointing to the Data RAM region, an EasyDMA transfer may result in a **HardFault** or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

DMA supports Stereo (Left+Right 16-bit samples) and Mono (Left only) data transfer, depending on setting in the **OPERATION** field in the **MODE** register. The samples are stored little endian.

**Table 94: DMA sample storage**

MODE.OPERATION	Bits per sample	Result stored per RAM word	Physical RAM allocated (32 bit words)	Result boundary indexes in RAM	Note
Stereo	32 (2x16)	L+R	$\text{ceil}(\text{SAMPLE.MAXCNT}/2)$	$R0=[31:16]; L0=[15:0]$	Default
Mono	16	2xL	$\text{ceil}(\text{SAMPLE.MAXCNT}/2)$	$L1=[31:16]; L0=[15:0]$	

The destination buffer in RAM consists of one block, the size of which is set in **SAMPLE.MAXCNT** register. Format is number of 16-bit samples. The physical RAM allocated is always:

$$(\text{RAM allocation, in bytes}) = \text{SAMPLE.MAXCNT} * 2;$$

(but the mapping of the samples depends on **MODE.OPERATION**).

If **OPERATION**=Stereo, RAM will contain a succession of Left and Right samples.

If **OPERATION**=Mono, RAM will contain a succession of mono samples.

For a given value of `SAMPLE.MAXCNT`, the buffer in RAM can contain half the stereo sampling time as compared to the mono sampling time.


The PDM acquisition can be started by the `START` task, after the `SAMPLE.PTR` and `SAMPLE.MAXCNT` registers have been written. When starting the module, it will take some time for the filters to start outputting valid data. Transients from the PDM microphone itself may also occur. The first few samples (typically around 50) might hence contain invalid values or transients. It is therefore advised to discard the first few samples after a PDM start.

As soon as the `STARTED` event is received, the firmware can write the next `SAMPLE.PTR` value (this register is double-buffered), to ensure continuous operation.


When the buffer in RAM is filled with samples, an `END` event is triggered. The firmware can start processing the data in the buffer. Meanwhile, the PDM module starts acquiring data into the new buffer pointed to by `SAMPLE.PTR`, and sends a new `STARTED` event, so that the firmware can update `SAMPLE.PTR` to the next buffer address.

## 42.5 Hardware example

Connect the microphone clock to `CLK`, and data to `DIN`.

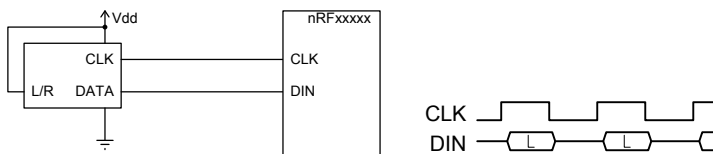


**Figure 134: Example of a single PDM microphone, wired as left**

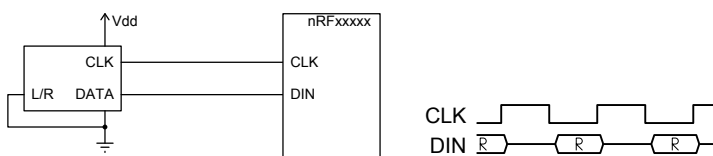

**Figure 135: Example of a single PDM microphone, wired as right**

Note that in a single-microphone (mono) configuration, depending on the microphone's implementation, either the left or the right channel (sampled at falling or rising `CLK` edge respectively) will contain reliable data. If two microphones are used, one of them has to be set as left, the other as right (`L/R` pin tied high or to `GND` on the respective microphone). It is strongly recommended to use two microphones of exactly the same brand and type so that their timings in left and right operation match.

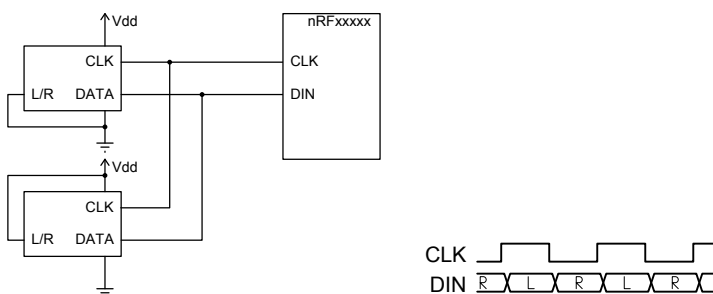

**Figure 136: Example of two PDM microphones**

## 42.6 Pin configuration

The `CLK` and `DIN` signals associated to the PDM module are mapped to physical pins according to the configuration specified in the `PSEL.CLK` and `PSEL.DIN` registers respectively. If the `CONNECT` field in any `PSEL` register is set to `Disconnected`, the associated PDM module signal will not be connected to the required physical pins, and will not operate properly.

The PSEL.CLK and PSEL.DIN registers and their configurations are only used as long as the PDM module is enabled, and retained only as long as the device is in System ON mode. See [POWER — Power supply](#) on page 67 for more information about power modes. When the peripheral is disabled, the pins will behave as regular GPIOs, and use the configuration in their respective OUT bit field and PIN\_CNF[n] register.

To ensure correct behaviour in the PDM module, the pins used by the PDM module must be configured in the GPIO peripheral as described in [Table 95: GPIO configuration before enabling peripheral](#) on page 500 before enabling the PDM module. This is to ensure that the pins used by the PDM module are driven correctly if the PDM module itself is temporarily disabled or the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected I/Os as long as the PDM module is supposed to be connected to an external PDM circuit.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behaviour.

**Table 95: GPIO configuration before enabling peripheral**

PDM signal	PDM pin	Direction	Output value	Comment
CLK	As specified in PSEL.CLK	Output	0	
DIN	As specified in PSEL.DIN	Input	Not applicable	

## 42.7 Registers

**Table 96: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001D000	PDM	PDM	Pulse Density modulation (digital microphone) interface	

**Table 97: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Starts continuous PDM transfer
TASKS_STOP	0x004	Stops PDM transfer
EVENTS_STARTED	0x100	PDM transfer has started
EVENTS_STOPPED	0x104	PDM transfer has finished
EVENTS_END	0x108	The PDM has written the last sample specified by SAMPLE.MAXCNT (or the last sample after a STOP task has been received) to Data RAM
<a href="#">INTEN</a>	0x300	Enable or disable interrupt
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">ENABLE</a>	0x500	PDM module enable register
<a href="#">PDMCLKCTRL</a>	0x504	PDM clock generator control
<a href="#">MODE</a>	0x508	Defines the routing of the connected PDM microphones' signals
<a href="#">GAINL</a>	0x518	Left output gain adjustment
<a href="#">GAINR</a>	0x51C	Right output gain adjustment
<a href="#">RATIO</a>	0x520	Selects the ratio between PDM_CLK and output sample rate. Change PDMCLKCTRL accordingly.
<a href="#">PSEL.CLK</a>	0x540	Pin number configuration for PDM CLK signal
<a href="#">PSEL.DIN</a>	0x544	Pin number configuration for PDM DIN signal
<a href="#">SAMPLE.PTR</a>	0x560	RAM address pointer to write samples to with EasyDMA
<a href="#">SAMPLE.MAXCNT</a>	0x564	Number of samples to allocate memory for in EasyDMA mode

### 42.7.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Enable or disable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	STOPPED				Enable or disable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	END				Enable or disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														

## 42.7.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Write '1' to Enable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	END				Write '1' to Enable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

## 42.7.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	STARTED				Write '1' to Disable interrupt for STARTED event																													
						See <a href="#">EVENTS_STARTED</a>																													
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	END				Write '1' to Disable interrupt for END event																													
						See <a href="#">EVENTS_END</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

## 42.7.4 ENABLE

Address offset: 0x500

PDM module enable register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable or disable PDM module																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													

## 42.7.5 PDMCLKCTRL

Address offset: 0x504

PDM clock generator control

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x08400000				0	0	0	0	1	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	FREQ						PDM_CLK frequency																											
			1000K	0x08000000				PDM_CLK = 32 MHz / 32 = 1.000 MHz																											
			Default	0x08400000				PDM_CLK = 32 MHz / 31 = 1.032 MHz. Nominal clock for RATIO=Ratio64.																											
			1067K	0x08800000				PDM_CLK = 32 MHz / 30 = 1.067 MHz																											
			1231K	0x09800000				PDM_CLK = 32 MHz / 26 = 1.231 MHz																											
			1280K	0x0A000000				PDM_CLK = 32 MHz / 25 = 1.280 MHz. Nominal clock for RATIO=Ratio80.																											
			1333K	0x0A800000				PDM_CLK = 32 MHz / 24 = 1.333 MHz																											

## 42.7.6 MODE

Address offset: 0x508

Defines the routing of the connected PDM microphones' signals

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OPERATION				Mono or stereo operation																													
			Stereo	0		Sample and store one pair (Left + Right) of 16bit samples per RAM word R=[31:16]; L=[15:0]																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																				B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
			Mono	1	Sample and store two successive Left samples (16 bit each) per RAM word L1=[31:16]; L0=[15:0]																																	
B	RW	EDGE	LeftFalling	0	Defines on which PDM_CLK edge Left (or mono) is sampled Left (or mono) is sampled on falling edge of PDM_CLK																																	
			LeftRising	1	Left (or mono) is sampled on rising edge of PDM_CLK																																	

## 42.7.7 GAINL

Address offset: 0x518

Left output gain adjustment

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																A	A	A	A	A	A	A
Reset 0x00000028				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	GAINL				Left output gain adjustment, in 0.5 dB steps, around the default module gain (see electrical parameters)																																
						0x00 -20 dB gain adjust																																
						0x01 -19.5 dB gain adjust																																
						(…)																																
						0x27 -0.5 dB gain adjust																																
						0x28 0 dB gain adjust																																
						0x29 +0.5 dB gain adjust																																
						(…)																																
						0x4F +19.5 dB gain adjust																																
						0x50 +20 dB gain adjust																																
			MinGain	0x00		-20dB gain adjustment (minimum)																																
			DefaultGain	0x28		0dB gain adjustment ('2500 RMS' requirement)																																
			MaxGain	0x50		+20dB gain adjustment (maximum)																																

## 42.7.8 GAINR

Address offset: 0x51C

Right output gain adjustment

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																												A	A	A	A	A	A	A	A	A
Reset 0x00000028				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	RW	GAINR				Right output gain adjustment, in 0.5 dB steps, around the default module gain (see electrical parameters)																														
			MinGain	0x00		-20dB gain adjustment (minimum)																														
			DefaultGain	0x28		0dB gain adjustment ('2500 RMS' requirement)																														
			MaxGain	0x50		+20dB gain adjustment (maximum)																														

## 42.7.9 RATIO

Address offset: 0x520

Selects the ratio between PDM\_CLK and output sample rate. Change PDMCLKCTRL accordingly.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																					A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																														
A	RW	RATIO					Selects the ratio between PDM_CLK and output sample rate																														
			ratio64		0		Ratio of 64																														
			ratio80		1		Ratio of 80																														

### 42.7.10 PSEL.CLK

Address offset: 0x540

Pin number configuration for PDM CLK signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				C																												B	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected	1			Disconnect																													
			Connected	0			Connect																													

### 42.7.11 PSEL.DIN

Address offset: 0x544

Pin number configuration for PDM DIN signal

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id				C																												B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Id	RW	Field	Value	Id	Value	Description																															
A	RW	PIN			[0..31]	Pin number																															
B	RW	PORT			[0..1]	Port number																															
C	RW	CONNECT				Connection																															
			Disconnected	1		Disconnect																															
			Connected	0		Connect																															

### 42.7.12 SAMPLE.PTR

Address offset: 0x560

RAM address pointer to write samples to with EasyDMA

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	SAMPLEPTR							Address to write PDM samples to over DMA																										

### 42.7.13 SAMPLE.MAXCNT

Address offset: 0x564

Number of samples to allocate memory for in EasyDMA mode

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value		Description																												
A	RW	BUFFSIZE			[0..32767]		Length of DMA RAM allocation in number of samples																												



## 42.8 Electrical specification

### 42.8.1 PDM Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{PDM, stereo}$	PDM module active current, stereo operation <sup>35</sup>		250		mA
$f_{PDM, CLK, 64}$	PDM clock speed, RATIO of 64		1.032		MHz
$f_{PDM, CLK, 80}$	PDM clock speed, RATIO of 80	..	..	..	MHz
$t_{PDM, JITTER}$	Jitter in PDM clock output			20	ns
$T_{dPDM, CLK}$	PDM clock duty cycle	40	50	60	%
$t_{PDM, DATA}$	Decimation filter delay			5	ms
$t_{PDM, cv}$	Allowed clock edge to data valid			125	ns
$t_{PDM, ci}$	Allowed (other) clock edge to data invalid	0			ns
$t_{PDM, s}$	Data setup time at $f_{PDM, CLK}=1.024$ MHz or 1.280 MHz	65			ns
$t_{PDM, h}$	Data hold time at $f_{PDM, CLK}=1.024$ MHz or 1.280 MHz	0			ns
$G_{PDM, default}$	Default (reset) absolute gain of the PDM module		3.2		dB

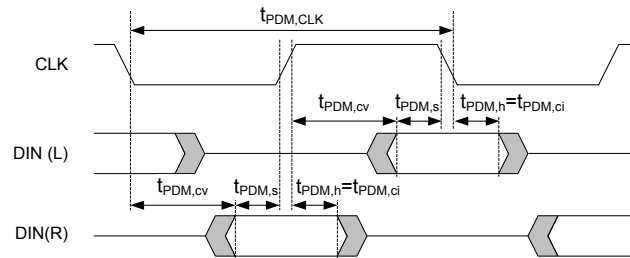


Figure 137: PDM timing diagram

<sup>35</sup> Average current including PDM and DMA transfers, excluding clock and power supply base currents

## 43 I<sup>2</sup>S — Inter-IC sound interface

The I<sup>2</sup>S (Inter-IC Sound) module, supports the original two-channel I<sup>2</sup>S format, and left or right-aligned formats. It implements EasyDMA for sample transfer directly to and from RAM without CPU intervention.

The I<sup>2</sup>S peripheral has the following main features:

- Master and Slave mode
- Simultaneous bi-directional (TX and RX) audio streaming
- Original I<sup>2</sup>S and left- or right-aligned format
- 8, 16 and 24-bit sample width
- Low-jitter Master Clock generator
- Various sample rates

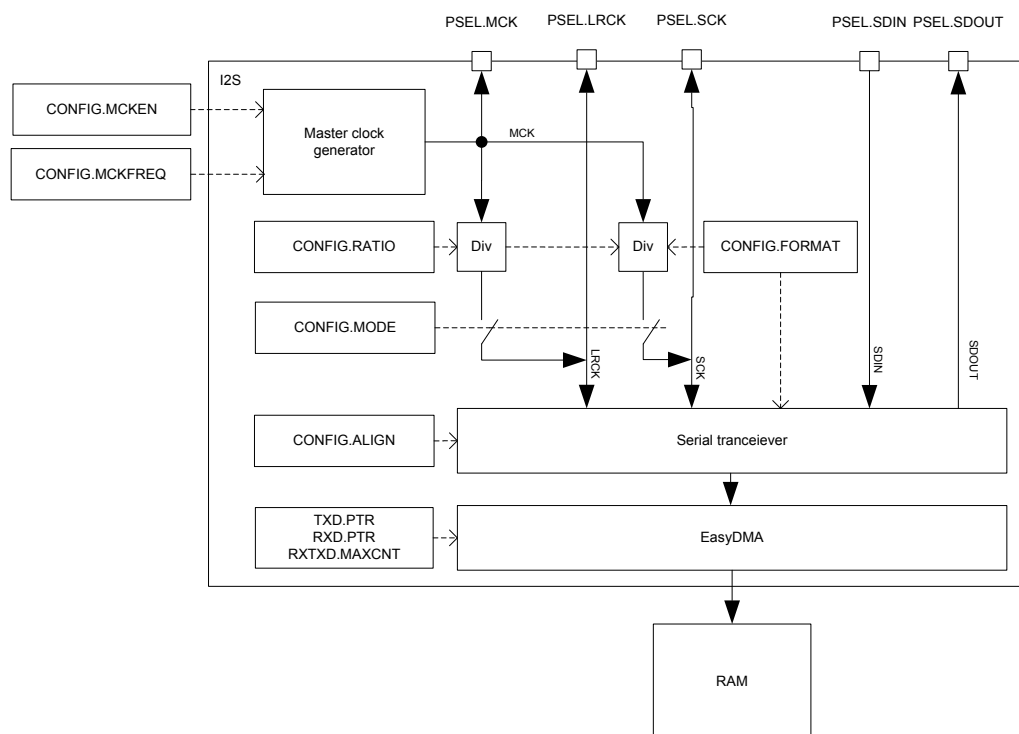


Figure 138: I<sup>2</sup>S master

### 43.1 Mode

The I<sup>2</sup>S protocol specification defines two modes of operation, Master and Slave.

The I<sup>2</sup>S mode decides which of the two sides (Master or Slave) shall provide the clock signals LRCK and SCK, and these signals are always supplied by the Master to the Slave.


### 43.2 Transmitting and receiving

The I<sup>2</sup>S module supports both transmission (TX) and reception (RX) of serial data. In both cases the serial data is shifted synchronously to the clock signals SCK and LRCK.

TX data is written to the SDOUT pin on the falling edge of SCK, and RX data is read from the SDIN pin on the rising edge of SCK. The most significant bit (MSB) is always transmitted first.

TX and RX are available in both Master and Slave modes and can be enabled/disabled independently in the [CONFIG.TXEN](#) on page 516 and [CONFIG.RXEN](#) on page 516.

Transmission and/or reception is started by triggering the START task. When started and transmission is enabled (in [CONFIG.TXEN](#) on page 516), the TXPTRUPD event will be generated for every [RXTXD.MAXCNT](#) on page 519 number of transmitted data words (containing one or more samples). Similarly, when started and reception is enabled (in [CONFIG.RXEN](#) on page 516), the RXPTRUPD event will be generated for every [RXTXD.MAXCNT](#) on page 519 received data words.

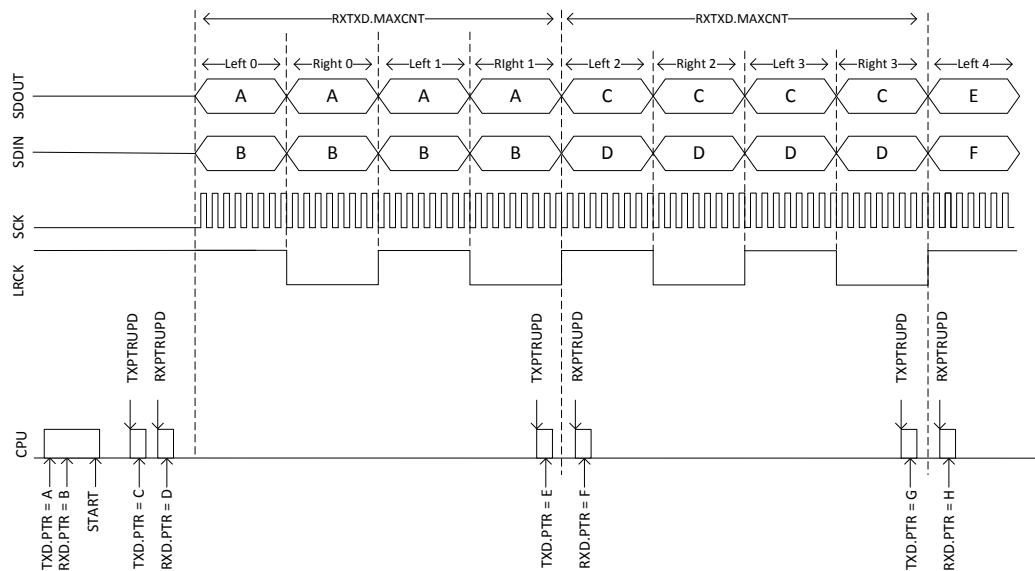

**Figure 139: Transmitting and receiving. CONFIG.FORMAT = Aligned, CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo, RXTXD.MAXCNT = 1.**

### 43.3 Left right clock (LRCK)

The Left Right Clock (LRCK), often referred to as "word clock", "sample clock" or "word select" in I<sup>2</sup>S context, is the clock defining the frames in the serial bit streams sent and received on SDOUT and SDIN, respectively.

In I2S mode, each frame contains one left and right sample pair, with the left sample being transferred during the low half period of LRCK followed by the right sample being transferred during the high period of LRCK.

In Aligned mode, each frame contains one left and right sample pair, with the left sample being transferred during the high half period of LRCK followed by the right sample being transferred during the low period of LRCK.

Consequently, the LRCK frequency is equivalent to the audio sample rate.

When operating in Master mode, the LRCK is generated from the MCK, and the frequency of LRCK is then given as:

$$\text{LRCK} = \text{MCK} / \text{CONFIG.RATIO}$$

LRCK always toggles around the falling edge of the serial clock SCK.

### 43.4 Serial clock (SCK)

The serial clock (SCK), often referred to as the serial bit clock, pulses once for each data bit being transferred on the serial data lines SDIN and SDOUT.

When operating in Master mode the SCK is generated from the MCK, and the frequency of SCK is then given as:

$$SCK = 2 * LRCK * CONFIG.SWIDTH$$

The falling edge of the SCK falls on the toggling edge of LRCK.

When operating in Slave mode SCK is provided by the external I<sup>2</sup>S master.

## 43.5 Master clock (MCK)

The master clock (MCK) is the clock from which LRCK and SCK are derived when operating in Master mode.

The MCK is generated by an internal MCK generator. This generator always needs to be enabled when in Master mode, but the generator can also be enabled when in Slave mode. Enabling the generator when in slave mode can be useful in the case where the external Master is not able to generate its own master clock.

The MCK generator is enabled/disabled in the register [CONFIG.MCKEN](#) on page 517, and the generator is started or stopped by the START or STOP tasks.

In Master mode the LRCK and the SCK frequencies are closely related, as both are derived from MCK and set indirectly through [CONFIG.RATIO](#) on page 517 and [CONFIG.SWIDTH](#) on page 518.

When configuring these registers, the user is responsible for fulfilling the following requirements:

1. SCK frequency can never exceed the MCK frequency, which can be formulated as:


$$CONFIG.RATIO \geq 2 * CONFIG.SWIDTH$$

2. The MCK/LRCK ratio shall be a multiple of  $2 * CONFIG.SWIDTH$ , which can be formulated as:

$$Integer = (CONFIG.RATIO / (2 * CONFIG.SWIDTH))$$

The MCK signal can be routed to an output pin (specified in PSEL.MCK) to supply external I<sup>2</sup>S devices that require the MCK to be supplied from the outside.

When operating in Slave mode, the I<sup>2</sup>S module does not use the MCK and the MCK generator does not need to be enabled.

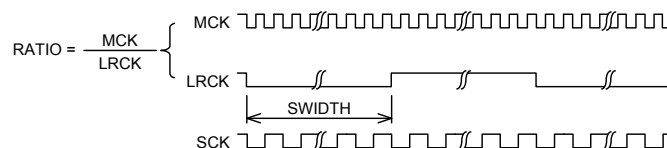

**Figure 140: Relation between RATIO, MCK and LRCK.**

**Table 98: Configuration examples**

Desired LRCK [Hz]	CONFIG.SWIDTH	CONFIG.RATIO	CONFIG.MCKFREQ	MCK [Hz]	LRCK [Hz]	LRCK error [%]
16000	16Bit	32X	32MDIV63	507936.5	15873.0	-0.8
16000	16Bit	64X	32MDIV31	1032258.1	16129.0	0.8
16000	16Bit	256X	32MDIV8	4000000.0	15625.0	-2.3
32000	16Bit	32X	32MDIV31	1032258.1	32258.1	0.8
32000	16Bit	64X	32MDIV16	2000000.0	31250.0	-2.3
32000	16Bit	256X	32MDIV4	8000000.0	31250.0	-2.3
44100	16Bit	32X	32MDIV23	1391304.3	43478.3	-1.4
44100	16Bit	64X	32MDIV11	2909090.9	45454.5	3.1
44100	16Bit	256X	32MDIV3	10666666.7	41666.7	-5.5

## 43.6 Width, alignment and format

The CONFIG.SWIDTH register primarily defines the sample width of the data written to memory. In master mode, it then also sets the amount of bits per frame. In Slave mode it controls padding/trimming if required. Left, right, transmitted, and received samples always have the same width. The CONFIG.FORMAT register specifies the position of the data frames with respect to the LRCK edges in both Master and Slave modes.

When using I<sup>2</sup>S format, the first bit in a half-frame (containing one left or right sample) gets sampled on the second rising edge of the SCK after a LRCK edge. When using Aligned mode, the first bit in a half-frame gets sampled on the first rising edge of SCK following a LRCK edge.

For data being received on SDIN the sample value can be either right or left-aligned inside a half-frame, as specified in [CONFIG.ALIGN](#) on page 518. [CONFIG.ALIGN](#) on page 518 affects only the decoding of the incoming samples (SDIN), while the outgoing samples (SDOUT) are always left-aligned (or justified).

When using left-alignment, each half-frame starts with the MSB of the sample value (both for data being sent on SDOUT and received on SDIN).

When using right-alignment, each half-frame of data being received on SDIN ends with the LSB of the sample value, while each half-frame of data being sent on SDOUT starts with the MSB of the sample value (same as for left-alignment).

In Master mode, the size of a half-frame (in number of SCK periods) equals the sample width (in number of bits), and in this case the alignment setting does not care as each half-frame in any case will start with the MSB and end with the LSB of the sample value.

In slave mode, however, the sample width does not need to equal the frame size. This means you might have extra or fewer SCK pulses per half-frame than what the sample width specified in [CONFIG.SWIDTH](#) requires.

In the case where we use **left-alignment** and the number of SCK pulses per half-frame is **higher** than the sample width, the following will apply:

- For data received on SDIN, all bits after the LSB of the sample value will be discarded.
- For data sent on SDOUT, all bits after the LSB of the sample value will be 0.

In the case where we use **left-alignment** and the number of SCK pulses per frame is **lower** than the sample width, the following will apply:


- Data sent and received on SDOUT and SDIN will be truncated with the LSBs being removed first.

In the case where we use **right-alignment** and the number of SCK pulses per frame is **higher** than the sample width, the following will apply:


- For data received on SDIN, all bits before the MSB of the sample value will be discarded.
- For data sent on SDOUT, all bits after the LSB of the sample value will be 0 (same behavior as for left-alignment).

In the case where we use **right-alignment** and the number of SCK pulses per frame is **lower** than the sample width, the following will apply:

- Data received on SDIN will be sign-extended to "sample width" number of bits before being written to memory.
- Data sent on SDOUT will be truncated with the LSBs being removed first (same behavior as for left-alignment).

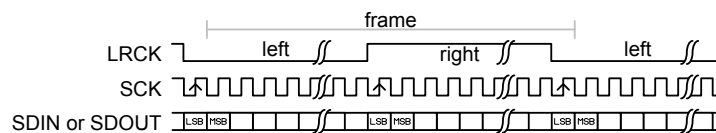

**Figure 141: I<sup>2</sup>S format. CONFIG.SWIDTH equalling half-frame size.**

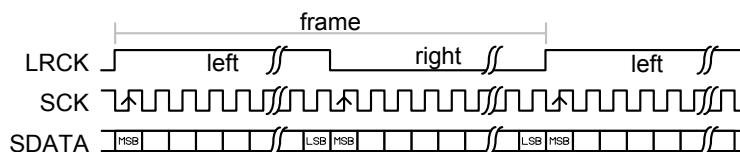

**Figure 142: Aligned format. CONFIG.SWIDTH equalling half-frame size.**

## 43.7 EasyDMA

The I<sup>2</sup>S module implements EasyDMA for accessing internal Data RAM without CPU intervention.

The source and destination pointers for the TX and RX data are configured in [TXD.PTR](#) on page 519 and [RXD.PTR](#) on page 519. The memory pointed to by these pointers will only be read or written when TX or RX are enabled in [CONFIG.TXEN](#) on page 516 and [CONFIG.RXEN](#) on page 516.

The addresses written to the pointer registers [TXD.PTR](#) on page 519 and [RXD.PTR](#) on page 519 are double-buffered in hardware, and these double buffers are updated for every [RXTXD.MAXCNT](#) on page 519 words (containing one or more samples) read/written from/to memory. The events TXPTRUPD and RXPTRUPD are generated whenever the TXD.PTR and RXD.PTR are transferred to these double buffers.


If [TXD.PTR](#) on page 519 is not pointing to the Data RAM region when transmission is enabled, or [RXD.PTR](#) on page 519 is not pointing to the Data RAM region when reception is enabled, an EasyDMA transfer may result in a HardFault and/or memory corruption. See [Memory](#) on page 20 for more information about the different memory regions.

Due to the nature of I<sup>2</sup>S, where the number of transmitted samples always equals the number of received samples (at least when both TX and RX are enabled), one common register [RXTXD.MAXCNT](#) on page 519 is used for specifying the sizes of these two memory buffers. The size of the buffers is specified in a number of 32-bit words. Such a 32-bit memory word can either contain four 8-bit samples, two 16-bit samples or one right-aligned 24-bit sample sign extended to 32 bit.


In stereo mode (CONFIG.CHANNELS=Stereo), the samples are stored as "left and right sample pairs" in memory. Figure [Figure 143: Memory mapping for 8 bit stereo. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo.](#) on page 510, [Figure 145: Memory mapping for 16 bit stereo. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Stereo.](#) on page 511 and [Figure 147: Memory mapping for 24 bit stereo. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Stereo.](#) on page 511 show how the samples are mapped to memory in this mode. The mapping is valid for both RX and TX.

In mono mode (CONFIG.CHANNELS=Left or Right), RX sample from only one channel in the frame is stored in memory, the other channel sample is ignored. Illustrations [Figure 144: Memory mapping for 8 bit mono. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Left.](#) on page 511, [Figure 146: Memory mapping for 16 bit mono, left channel only. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Left.](#) on page 511 and [Figure 148: Memory mapping for 24 bit mono, left channel only. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Left.](#) on page 512 show how RX samples are mapped to memory in this mode.


For TX, the same outgoing sample read from memory is transmitted on both left and right in a frame, resulting in a mono output stream.

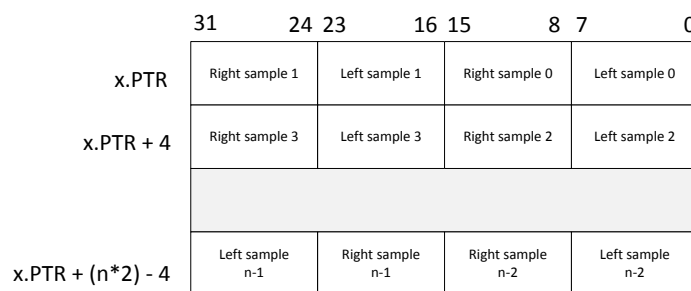


**Figure 143: Memory mapping for 8 bit stereo. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Stereo.**

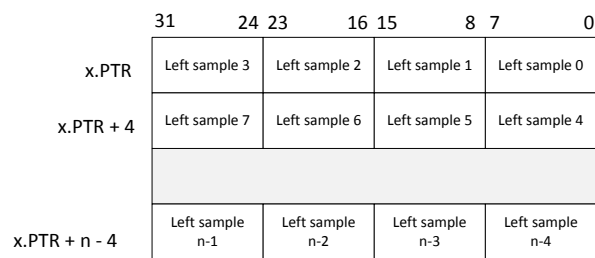


**Figure 144: Memory mapping for 8 bit mono. CONFIG.SWIDTH = 8Bit, CONFIG.CHANNELS = Left.**

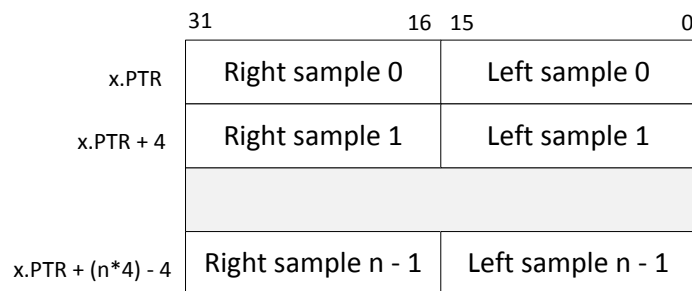


**Figure 145: Memory mapping for 16 bit stereo. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Stereo.**

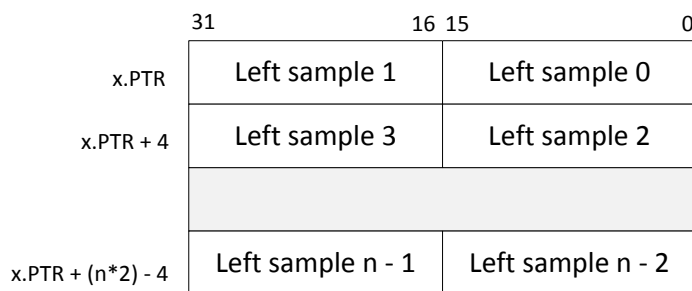

**Figure 146: Memory mapping for 16 bit mono, left channel only. CONFIG.SWIDTH = 16Bit, CONFIG.CHANNELS = Left.**

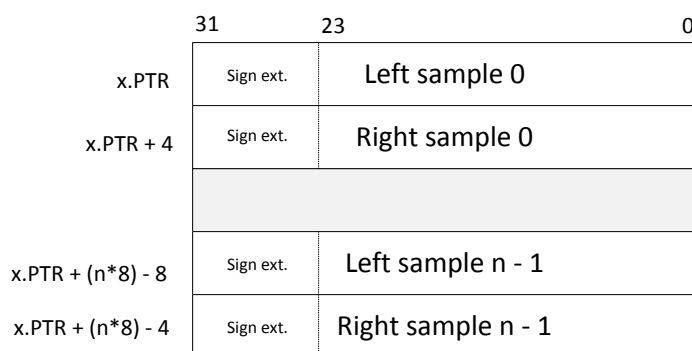

**Figure 147: Memory mapping for 24 bit stereo. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Stereo.**

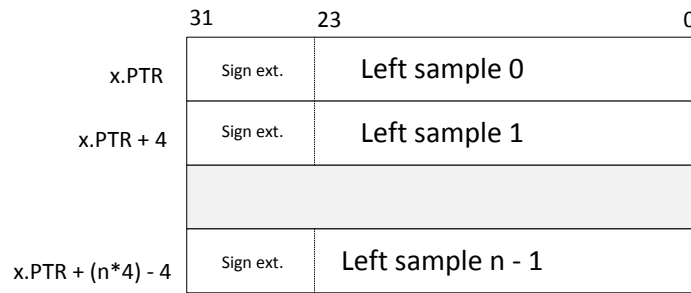

**Figure 148: Memory mapping for 24 bit mono, left channel only. CONFIG.SWIDTH = 24Bit, CONFIG.CHANNELS = Left.**

## 43.8 Module operation

Described here is a typical operating procedure for the I<sup>2</sup>S module.

### 1. Configure the I<sup>2</sup>S module using the CONFIG registers

```
// Enable reception
NRF_I2S->CONFIG.RXEN = (I2S_CONFIG_RXEN_RXEN_Enabled <<
                        I2S_CONFIG_RXEN_RXEN_Pos);

// Enable transmission
NRF_I2S->CONFIG.TXEN = (I2S_CONFIG_TXEN_TXEN_Enabled <<
                        I2S_CONFIG_TXEN_TXEN_Pos);

// Enable MCK generator
NRF_I2S->CONFIG.MCKEN = (I2S_CONFIG_MCKEN_MCKEN_Enabled <<
                        I2S_CONFIG_MCKEN_MCKEN_Pos);

// MCKFREQ = 4 MHz
NRF_I2S->CONFIG.MCKFREQ = I2S_CONFIG_MCKFREQ_MCKFREQ_32MDIV8 <<
                        I2S_CONFIG_MCKFREQ_MCKFREQ_Pos;

// Ratio = 256
NRF_I2S->CONFIG.RATIO = I2S_CONFIG_RATIO_RATIO_256X <<
                        I2S_CONFIG_RATIO_RATIO_Pos;

// MCKFREQ = 4 MHz and Ratio = 256 gives sample rate = 15.625 ks/s
// Sample width = 16 bit
NRF_I2S->CONFIG.SWIDTH = I2S_CONFIG_SWIDTH_SWIDTH_16Bit <<
                        I2S_CONFIG_SWIDTH_SWIDTH_Pos;

// Alignment = Left
NRF_I2S->CONFIG.ALIGN = I2S_CONFIG_ALIGN_ALIGN_Left <<
                        I2S_CONFIG_ALIGN_ALIGN_Pos;

// Format = I2S
NRF_I2S->CONFIG.FORMAT = I2S_CONFIG_FORMAT_FORMAT_I2S <<
                        I2S_CONFIG_FORMAT_FORMAT_Pos;

// Use stereo
NRF_I2S->CONFIG.CHANNELS = I2S_CONFIG_CHANNELS_CHANNELS_Stereo <<
                        I2S_CONFIG_CHANNELS_CHANNELS_Pos;
```

### 2. Map IO pins using the PINSEL registers

```
// MCK routed to pin 0
NRF_I2S->PSEL.MCK = (0 << I2S_PSEL_MCK_PIN_Pos) |
                    (I2S_PSEL_MCK_CONNECT_Connected <<
                     I2S_PSEL_MCK_CONNECT_Pos);

// SCK routed to pin 1
NRF_I2S->PSEL.SCK = (1 << I2S_PSEL_SCK_PIN_Pos) |
                    (I2S_PSEL_SCK_CONNECT_Connected <<
                     I2S_PSEL_SCK_CONNECT_Pos);

// LRCK routed to pin 2
NRF_I2S->PSEL.LRCK = (2 << I2S_PSEL_LRCK_PIN_Pos) |
                     (I2S_PSEL_LRCK_CONNECT_Connected <<
```



```

    I2S_PSEL_LRCK_CONNECT_Pos);
// SDOUT routed to pin 3
NRF_I2S->PSEL.SDOUT = (3 << I2S_PSEL_SDOUT_PIN_Pos) |
                      (I2S_PSEL_SDOUT_CONNECT_Connected <<

    I2S_PSEL_SDOUT_CONNECT_Pos);
// SDIN routed on pin 4
NRF_I2S->PSEL.SDIN = (4 << I2S_PSEL_SDIN_PIN_Pos) |
                    (I2S_PSEL_SDIN_CONNECT_Connected <<

    I2S_PSEL_SDIN_CONNECT_Pos);

```

### 3. Configure TX and RX data pointers using the TXD, RXD and RXTXD registers

```

NRF_I2S->TXD.PTR = my_tx_buf;
NRF_I2S->RXD.PTR = my_rx_buf;
NRF_I2S->TXD.MAXCNT = MY_BUF_SIZE;

```

### 4. Enable the I<sup>2</sup>S module using the ENABLE register

```

NRF_I2S->ENABLE = 1;

```

### 5. Start audio streaming using the START task

```

NRF_I2S->TASKS_START = 1;

```

### 6. Handle received and transmitted data when receiving the TXPTRUPD and RXPTRUPD events

```

if(NRF_I2S->EVENTS_TXPTRUPD != 0)
{
    NRF_I2S->TXD.PTR = my_next_tx_buf;
    NRF_I2S->EVENTS_TXPTRUPD = 0;
}

if(NRF_I2S->EVENTS_RXPTRUPD != 0)
{
    NRF_I2S->RXD.PTR = my_next_rx_buf;
    NRF_I2S->EVENTS_RXPTRUPD = 0;
}

```

## 43.9 Pin configuration

The MCK, SCK, LRCK, SDIN and SDOUT signals associated with the I<sup>2</sup>S module are mapped to physical pins according to the pin numbers specified in the PSEL.x registers.

These pins are acquired whenever the I<sup>2</sup>S module is enabled through the register [ENABLE](#) on page 516.

When a pin is acquired by the I<sup>2</sup>S module, the direction of the pin (input or output) will be configured automatically, and any pin direction setting done in the GPIO module will be overridden. The directions for the various I<sup>2</sup>S pins are shown below in [Table 99: GPIO configuration before enabling peripheral \(master mode\)](#) on page 513 and [Table 100: GPIO configuration before enabling peripheral \(slave mode\)](#) on page 514.

To secure correct signal levels on the pins when the system is in OFF mode, and when the I<sup>2</sup>S module is disabled, these pins must be configured in the GPIO peripheral directly.

**Table 99: GPIO configuration before enabling peripheral (master mode)**

I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
MCK	As specified in PSEL.MCK	Output	0	
LRCK	As specified in PSEL.LRCK	Output	0	

I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
SCK	As specified in PSEL.SCK	Output	0	
SDIN	As specified in PSEL.SDIN	Input	Not applicable	
SDOUT	As specified in PSEL.SDOUT	Output	0	

**Table 100: GPIO configuration before enabling peripheral (slave mode)**

I <sup>2</sup> S signal	I <sup>2</sup> S pin	Direction	Output value	Comment
MCK	As specified in PSEL.MCK	Output	0	
LRCK	As specified in PSEL.LRCK	Input	Not applicable	
SCK	As specified in PSEL.SCK	Input	Not applicable	
SDIN	As specified in PSEL.SDIN	Input	Not applicable	
SDOUT	As specified in PSEL.SDOUT	Output	0	

## 43.10 Registers

**Table 101: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40025000	I2S	I2S	Inter-IC sound interface	

**Table 102: Register Overview**

Register	Offset	Description
TASKS_START	0x000	Starts continuous I2S transfer. Also starts MCK generator when this is enabled.
TASKS_STOP	0x004	Stops I2S transfer. Also stops MCK generator. Triggering this task will cause the {event:STOPPED} event to be generated.
EVENTS_RXPTRUPD	0x104	The RXD.PTR register has been copied to internal double-buffers. When the I2S module is started and RX is enabled, this event will be generated for every RXTXD.MAXCNT words that are received on the SDIN pin.
EVENTS_STOPPED	0x108	I2S transfer stopped.
EVENTS_TXPTRUPD	0x114	The TDX.PTR register has been copied to internal double-buffers. When the I2S module is started and TX is enabled, this event will be generated for every RXTXD.MAXCNT words that are sent on the SDOUT pin.
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt
<i>ENABLE</i>	0x500	Enable I2S module.
<i>CONFIG.MODE</i>	0x504	I2S mode.
<i>CONFIG.RXEN</i>	0x508	Reception (RX) enable.
<i>CONFIG.TXEN</i>	0x50C	Transmission (TX) enable.
<i>CONFIG.MCKEN</i>	0x510	Master clock generator enable.
<i>CONFIG.MCKFREQ</i>	0x514	Master clock generator frequency.
<i>CONFIG.RATIO</i>	0x518	MCK / LRCK ratio.
<i>CONFIG.SWIDTH</i>	0x51C	Sample width.
<i>CONFIG.ALIGN</i>	0x520	Alignment of sample within a frame.
<i>CONFIG.FORMAT</i>	0x524	Frame format.
<i>CONFIG.CHANNELS</i>	0x528	Enable channels.
<i>RXD.PTR</i>	0x538	Receive buffer RAM start address.
<i>TXD.PTR</i>	0x540	Transmit buffer RAM start address.
<i>RXTXD.MAXCNT</i>	0x550	Size of RXD and TXD buffers.
<i>PSEL.MCK</i>	0x560	Pin select for MCK signal.
<i>PSEL.SCK</i>	0x564	Pin select for SCK signal.
<i>PSEL.LRCK</i>	0x568	Pin select for LRCK signal.
<i>PSEL.SDIN</i>	0x56C	Pin select for SDIN signal.
<i>PSEL.SDOUT</i>	0x570	Pin select for SDOUT signal.

### 43.10.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																							
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
B	RW	RXPTRUPD				Enable or disable interrupt for RXPTRUPD event																																	
						See <a href="#">EVENTS_RXPTRUPD</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
C	RW	STOPPED				Enable or disable interrupt for STOPPED event																																	
						See <a href="#">EVENTS_STOPPED</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
F	RW	TXPTRUPD				Enable or disable interrupt for TXPTRUPD event																																	
						See <a href="#">EVENTS_TXPTRUPD</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	

### 43.10.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																								
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>																																		<b>Description</b>	
B	RW	RXPTRUPD																																					Write '1' to Enable interrupt for RXPTRUPD event	
																																							See <a href="#">EVENTS_RXPTRUPD</a>	
			Set		1																																		Enable	
			Disabled		0																																		Read: Disabled	
			Enabled		1																																		Read: Enabled	
C	RW	STOPPED																																					Write '1' to Enable interrupt for STOPPED event	
																																							See <a href="#">EVENTS_STOPPED</a>	
			Set		1																																		Enable	
			Disabled		0																																		Read: Disabled	
			Enabled		1																																		Read: Enabled	
F	RW	TXPTRUPD																																					Write '1' to Enable interrupt for TXPTRUPD event	
																																							See <a href="#">EVENTS_TXPTRUPD</a>	
			Set		1																																		Enable	
			Disabled		0																																		Read: Disabled	
			Enabled		1																																		Read: Enabled	

### 43.10.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																													
B	RW	RXPTRUPD				Write '1' to Disable interrupt for RXPTRUPD event																													
						See <a href="#">EVENTS_RXPTRUPD</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
F	RW	TXPTRUPD				Write '1' to Disable interrupt for TXPTRUPD event																													
						See <a href="#">EVENTS_TXPTRUPD</a>																													
			Clear		1	Disable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

### 43.10.4 ENABLE

Address offset: 0x500

Enable I2S module.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable I2S module.																													
			Disabled	0		Disable																													
			Enabled	1		Enable																													

### 43.10.5 CONFIG.MODE

Address offset: 0x504

I2S mode.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																												
A	RW	MODE																																	
			Master	0			I2S mode.																												
							Master mode. SCK and LRCK generated from internal master																												
							clkck (MCK) and output on pins defined by PSEL.xxx.																												
			Slave	1			Slave mode. SCK and LRCK generated by external master and																												
							received on pins defined by PSEL.xxx																												

### 43.10.6 CONFIG.RXEN

Address offset: 0x508

Reception (RX) enable.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	RXEN																																	
			Disabled		0	Reception (RX) enable.																													
						Reception disabled and now data will be written to the RXD.PTR																													
						address.																													
			Enabled		1	Reception enabled.																													

### 43.10.7 CONFIG.TXEN

Address offset: 0x50C

Transmission (TX) enable.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	TXEN			Transmission (TX) enable.																														
			Disabled	0	Transmission disabled and now data will be read from the RXD.TXD address.																														
			Enabled	1	Transmission enabled.																														

### 43.10.8 CONFIG.MCKEN

Address offset: 0x510

Master clock generator enable.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																				A
Reset 0x00000001				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
Id	RW	Field	Value Id	Value	Description																															
A	RW	MCKEN			Master clock generator enable.																															
			Disabled	0	Master clock generator disabled and PSEL.MCK not connected(available as GPIO).																															
			Enabled	1	Master clock generator running and MCK output on PSEL.MCK.																															

### 43.10.9 CONFIG.MCKFREQ

Address offset: 0x514

Master clock generator frequency.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x20000000				0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	MCKFREQ			Master clock generator frequency.																																	
			32MDIV2	0x80000000	32 MHz / 2 = 16.0 MHz																																	
			32MDIV3	0x50000000	32 MHz / 3 = 10.6666667 MHz																																	
			32MDIV4	0x40000000	32 MHz / 4 = 8.0 MHz																																	
			32MDIV5	0x30000000	32 MHz / 5 = 6.4 MHz																																	
			32MDIV6	0x28000000	32 MHz / 6 = 5.3333333 MHz																																	
			32MDIV8	0x20000000	32 MHz / 8 = 4.0 MHz																																	
			32MDIV10	0x18000000	32 MHz / 10 = 3.2 MHz																																	
			32MDIV11	0x16000000	32 MHz / 11 = 2.9090909 MHz																																	
			32MDIV15	0x11000000	32 MHz / 15 = 2.1333333 MHz																																	
			32MDIV16	0x10000000	32 MHz / 16 = 2.0 MHz																																	
			32MDIV21	0x0C000000	32 MHz / 21 = 1.5238095																																	
			32MDIV23	0x0B000000	32 MHz / 23 = 1.3913043 MHz																																	
			32MDIV30	0x08800000	32 MHz / 30 = 1.0666667 MHz																																	
			32MDIV31	0x08400000	32 MHz / 31 = 1.0322581 MHz																																	
			32MDIV32	0x08000000	32 MHz / 32 = 1.0 MHz																																	
			32MDIV42	0x06000000	32 MHz / 42 = 0.7619048 MHz																																	
			32MDIV63	0x04100000	32 MHz / 63 = 0.5079365 MHz																																	
			32MDIV125	0x020C0000	32 MHz / 125 = 0.256 MHz																																	

### 43.10.10 CONFIG.RATIO

Address offset: 0x518

MCK / LRCK ratio.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A																															
Reset 0x00000006				0 1 1 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	RATIO			MCK / LRCK ratio.																														
			32X	0	LRCK = MCK / 32																														
			48X	1	LRCK = MCK / 48																														
			64X	2	LRCK = MCK / 64																														
			96X	3	LRCK = MCK / 96																														
			128X	4	LRCK = MCK / 128																														
			192X	5	LRCK = MCK / 192																														
			256X	6	LRCK = MCK / 256																														
			384X	7	LRCK = MCK / 384																														
			512X	8	LRCK = MCK / 512																														

### 43.10.11 CONFIG.SWIDTH

Address offset: 0x51C

Sample width.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id					A A																														
Reset 0x00000001					0 1																														
Id	RW	Field	Value Id	Value	Description																														
A	RW	SWIDTH			Sample width.																														
			8Bit	0	8 bit.																														
			16Bit	1	16 bit.																														
			24Bit	2	24 bit.																														

### 43.10.12 CONFIG.ALIGN

Address offset: 0x520

Alignment of sample within a frame.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id																																				A
Reset 0x00000000				0 0																																0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	ALIGN				Alignment of sample within a frame.																														
			Left		0	Left-aligned.																														
			Right		1	Right-aligned.																														

### 43.10.13 CONFIG.FORMAT

Address offset: 0x524

Frame format.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																A
Id																																				A
Reset 0x00000000				0 0																																0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	FORMAT				Frame format.																														
			I2S		0	Original I2S format.																														
			Aligned		1	Alternate (left- or right-aligned) format.																														

### 43.10.14 CONFIG.CHANNELS

Address offset: 0x528

Enable channels.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																				A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value		Description																														
A	RW	CHANNELS					Enable channels.																														
			Stereo	0			Stereo.																														
			Left	1			Left only.																														
			Right	2			Right only.																														

### 43.10.15 RXD.PTR

Address offset: 0x538

Receive buffer RAM start address.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	PTR							Receive buffer Data RAM start address. When receiving, words containing samples will be written to this address. This address is a word aligned Data RAM address.																										

### 43.10.16 TXD.PTR

Address offset: 0x540

Transmit buffer RAM start address.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	PTR							Transmit buffer Data RAM start address. When transmitting, words containing samples will be fetched from this address. This address is a word aligned Data RAM address.																										

### 43.10.17 RXTXD.MAXCNT

Address offset: 0x550

Size of RXD and TXD buffers.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																															A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	MAXCNT				Size of RXD and TXD buffers in number of 32 bit words.																										

### 43.10.18 PSEL.MCK

Address offset: 0x560

Pin select for MCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																
Id				C																																B				A				A				A				A															
Reset 0xFFFFFFFF				1																																1				1				1				1				1				1				1				1			
Id	RW	Field	Value	Id	Value																																Description																														
A	RW	PIN	[0..31]																																Pin number																																
B	RW	PORT	[0..1]																																Port number																																
C	RW	CONNECT																																	Connection																																
			Disconnected	1																																Disconnect																															
			Connected	0																																Connect																															

### 43.10.19 PSEL.SCK

Address offset: 0x564

Pin select for SCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	PORT		[0..1]	Port number																														
C	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 43.10.20 PSEL.LRCK

Address offset: 0x568

Pin select for LRCK signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	PIN		[0..31]				Pin number																											
B	RW	PORT		[0..1]				Port number																											
C	RW	CONNECT						Connection																											
			Disconnected	1				Disconnect																											
			Connected	0				Connect																											

### 43.10.21 PSEL.SDIN

Address offset: 0x56C

Pin select for SDIN signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	PIN		[0..31]				Pin number																											
B	RW	PORT		[0..1]				Port number																											
C	RW	CONNECT						Connection																											
			Disconnected	1				Disconnect																											
			Connected	0				Connect																											

### 43.10.22 PSEL.SDOUT

Address offset: 0x570

Pin select for SDOUT signal.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value				Description																											
A	RW	PIN		[0..31]				Pin number																											
B	RW	PORT		[0..1]				Port number																											
C	RW	CONNECT						Connection																											
			Disconnected	1				Disconnect																											
			Connected	0				Connect																											



## 43.11 Electrical specification

### 43.11.1 I2S timing specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{S\_SDIN}$	SDIN setup time before SCK rising	20			ns
$t_{H\_SDIN}$	SDIN hold time after SCK rising	15			ns
$t_{S\_SDOUT}$	SDOUT setup time after SCK falling	40			ns
$t_{H\_SDOUT}$	SDOUT hold time before SCK falling	6			ns
$t_{SCK\_LRCK}$	SCLK falling to LRCK edge	-5	0	5	ns
$f_{MCK}$	MCK frequency			4000	kHz
$f_{LRCK}$	LRCK frequency			48	kHz
$f_{SCK}$	SCK frequency			2000	kHz
$DC_{CK}$	Clock duty cycle (MCK, LRCK, SCK)	45		55	%

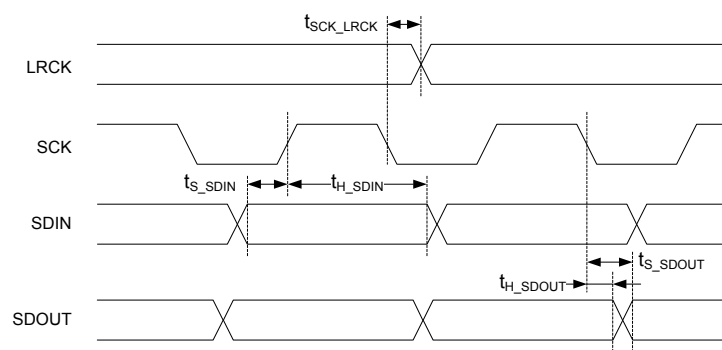


Figure 149: I2S timing diagram

## 44 MWU — Memory watch unit

The Memory watch unit (MWU) can be used to generate events when a memory region is accessed by the CPU. The MWU can be configured to trigger events for access to Data RAM and Peripheral memory segments. The MWU allows an application developer to generate memory access events during development for debugging or during production execution for failure detection and recovery.

Listed here are the main features for MWU:

- Six memory regions, four user-configurable and two fixed regions in peripheral address space
- Flexible configuration of regions with START and END addresses
- Generate events on CPU read and/or write to a defined region of Data RAM or peripheral memory address space
- Programmable maskable or non-maskable (NMI) interrupt on events
- Peripheral interfaces can be watched for read and write access using subregions of the two fixed memory regions

**Table 103: Memory regions**

Memory region	START address	END address
REGION[0..3]	Configurable	Configurable
PREGION[0]	0x40000000	0x4001FFFF
PREGION[1]	0x40020000	0x4003FFFF

Each MWU region is defined by a start address and an end address, configured by the START and END registers respectively. These addresses are byte aligned and inclusive. The END register value has to be greater or equal to the START register value. Each region is associated with a pair of events that indicate that either a write access or a read access from the CPU has been detected inside the region.

For regions containing subregions (see below), a set of status registers PERREGION[0..1].SUBSTATWA and PERREGION[0..1].SUBSTATRA indicate which subregion(s) caused the EVENT\_PREGION[0..1].WA and EVENT\_PREGION[0..1].RA respectively.

The MWU is only able to detect memory accesses in the Data RAM and Peripheral memory segments from the CPU, see [Memory](#) on page 20 for more information about the different memory segments. EasyDMA accesses are not monitored by the MWU. The MWU requires two HCLK cycles to detect and generate the event.

The peripheral regions, PREGION[0..1], are divided into 32 equally sized subregions, SR[0..31]. All subregions are excluded in the main region by default, and any can be included by specifying them in the SUBS register. When a subregion is excluded from the main region, the memory watch mechanism will not trigger any events when that subregion is accessed.

Subregions in PREGION[0..1] cannot be individually configured for read or write access watch. Watch configuration is only possible for a region as a whole. The PRGNiRA and PRGNiWA (i=0..1) fields in the REGIONEN register control watching read and write access.

REGION[0..3] can be individually enabled for read and/or write access watching through their respective RGNiRA and RGNiWA (i=0..3) fields in the REGIONEN register.

REGIONENSET and REGIONENCLR allow respectively enabling and disabling one or multiple REGIONs or PREGIONs watching in a single write access.

### 44.1 Registers

**Table 104: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40020000	MWU	MWU	Memory watch unit	

**Table 105: Register Overview**

Register	Offset	Description
EVENTS_REGION[0].WA	0x100	Write access to region 0 detected
EVENTS_REGION[0].RA	0x104	Read access to region 0 detected
EVENTS_REGION[1].WA	0x108	Write access to region 1 detected
EVENTS_REGION[1].RA	0x10C	Read access to region 1 detected
EVENTS_REGION[2].WA	0x110	Write access to region 2 detected
EVENTS_REGION[2].RA	0x114	Read access to region 2 detected
EVENTS_REGION[3].WA	0x118	Write access to region 3 detected
EVENTS_REGION[3].RA	0x11C	Read access to region 3 detected
EVENTS_PREGION[0].WA	0x160	Write access to peripheral region 0 detected
EVENTS_PREGION[0].RA	0x164	Read access to peripheral region 0 detected
EVENTS_PREGION[1].WA	0x168	Write access to peripheral region 1 detected
EVENTS_PREGION[1].RA	0x16C	Read access to peripheral region 1 detected
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
NMIEN	0x320	Enable or disable non-maskable interrupt
NMIENSET	0x324	Enable non-maskable interrupt
NMIENCLR	0x328	Disable non-maskable interrupt
PERREGION[0].SUBSTAT	0x400	Source of event/interrupt in region 0, write access detected while corresponding subregion was enabled for watching
PERREGION[0].SUBSTAT	0x404	Source of event/interrupt in region 0, read access detected while corresponding subregion was enabled for watching
PERREGION[1].SUBSTAT	0x408	Source of event/interrupt in region 1, write access detected while corresponding subregion was enabled for watching
PERREGION[1].SUBSTAT	0x40C	Source of event/interrupt in region 1, read access detected while corresponding subregion was enabled for watching
REGIONEN	0x510	Enable/disable regions watch
REGIONENSET	0x514	Enable regions watch
REGIONENCLR	0x518	Disable regions watch
REGION[0].START	0x600	Start address for region 0
REGION[0].END	0x604	End address of region 0
REGION[1].START	0x610	Start address for region 1
REGION[1].END	0x614	End address of region 1
REGION[2].START	0x620	Start address for region 2
REGION[2].END	0x624	End address of region 2
REGION[3].START	0x630	Start address for region 3
REGION[3].END	0x634	End address of region 3
PREGION[0].START	0x6C0	Reserved for future use
PREGION[0].END	0x6C4	Reserved for future use
PREGION[0].SUBS	0x6C8	Subregions of region 0
PREGION[1].START	0x6D0	Reserved for future use
PREGION[1].END	0x6D4	Reserved for future use
PREGION[1].SUBS	0x6D8	Subregions of region 1

### 44.1.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	L K J I H G F E D C B A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value Id	Value	Description																										
A	RW	REGION0WA			Enable or disable interrupt for REGION[0].WA event																										
					See <a href="#">EVENTS_REGION[0].WA</a>																										
			Disabled	0	Disable																										

### 44.1.2 INTENSET

### Enable interrupt

Page 525

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					L K J I																H G F E D C B A															
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
						See <a href="#">EVENTS_REGION[1].WA</a>																														
			Set	1		Enable																														
			Disabled	0		Read: Disabled																														
			Enabled	1		Read: Enabled																														
L	RW	PREGION1RA				Write '1' to Enable interrupt for PREGION[1].RA event																														
						See <a href="#">EVENTS_REGION[1].RA</a>																														
			Set	1		Enable																														
			Disabled	0		Read: Disabled																														
			Enabled	1		Read: Enabled																														

### 44.1.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					L K J I																H G F E D C B A																		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	REGION0WA				Write '1' to Disable interrupt for REGION[0].WA event																																	
						See <a href="#">EVENTS_REGION[0].WA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
B	RW	REGION0RA				Write '1' to Disable interrupt for REGION[0].RA event																																	
						See <a href="#">EVENTS_REGION[0].RA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
C	RW	REGION1WA				Write '1' to Disable interrupt for REGION[1].WA event																																	
						See <a href="#">EVENTS_REGION[1].WA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
D	RW	REGION1RA				Write '1' to Disable interrupt for REGION[1].RA event																																	
						See <a href="#">EVENTS_REGION[1].RA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
E	RW	REGION2WA				Write '1' to Disable interrupt for REGION[2].WA event																																	
						See <a href="#">EVENTS_REGION[2].WA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
F	RW	REGION2RA				Write '1' to Disable interrupt for REGION[2].RA event																																	
						See <a href="#">EVENTS_REGION[2].RA</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
G	RW	REGION3WA				Write '1' to Disable interrupt for REGION[3].WA event																																	
						See <a href="#">EVENTS_REGION[3].WA</a>																																	
			Clear		1	Disable																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
Id					L																K																J																I																H																G																F																E																D																C																B																A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
Reset 0x00000000					0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0																0															

## 44.1.4 NMIEN

Address offset: 0x320

Enable or disable non-maskable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	REGION0WA			Enable or disable non-maskable interrupt for REGION[0].WA event																														
					See <a href="#">EVENTS_REGION[0].WA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
B	RW	REGION0RA			Enable or disable non-maskable interrupt for REGION[0].RA event																														
					See <a href="#">EVENTS_REGION[0].RA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	REGION1WA			Enable or disable non-maskable interrupt for REGION[1].WA event																														
					See <a href="#">EVENTS_REGION[1].WA</a>																														
			Disabled	0	Disable																														
			Enabled	1	Enable																														

### 44.1.5 NMIENSET

### Enable non-maskable interrupt



Page 529

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				L K J I																H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
J	RW	PREGION0RA			Write '1' to Enable non-maskable interrupt for PREGION[0].RA event																																	
					See <a href="#">EVENTS_PREGION[0].RA</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
K	RW	PREGION1WA			Write '1' to Enable non-maskable interrupt for PREGION[1].WA event																																	
					See <a href="#">EVENTS_PREGION[1].WA</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
L	RW	PREGION1RA			Write '1' to Enable non-maskable interrupt for PREGION[1].RA event																																	
					See <a href="#">EVENTS_PREGION[1].RA</a>																																	
			Set	1	Enable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

## 44.1.6 NMIENCLR

Address offset: 0x328

Disable non-maskable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				L K J I																H G F E D C B A																		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	REGION0WA			Write '1' to Disable non-maskable interrupt for REGION[0].WA event																																	
					See <a href="#">EVENTS_REGION[0].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
B	RW	REGION0RA			Write '1' to Disable non-maskable interrupt for REGION[0].RA event																																	
					See <a href="#">EVENTS_REGION[0].RA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
C	RW	REGION1WA			Write '1' to Disable non-maskable interrupt for REGION[1].WA event																																	
					See <a href="#">EVENTS_REGION[1].WA</a>																																	
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
D	RW	REGION1RA			Write '1' to Disable non-maskable interrupt for REGION[1].RA event																																	
					See <a href="#">EVENTS_REGION[1].RA</a>																																	

Page 531

## 44.1.7 PERREGION[0].SUBSTATWA

Address offset: 0x400

Source of event/interrupt in region 0, write access detected while corresponding subregion was enabled for watching

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SR0			Subregion 0 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
B	RW	SR1			Subregion 1 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
C	RW	SR2			Subregion 2 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
D	RW	SR3			Subregion 3 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
E	RW	SR4			Subregion 4 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
F	RW	SR5			Subregion 5 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
G	RW	SR6			Subregion 6 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
H	RW	SR7			Subregion 7 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
I	RW	SR8			Subregion 8 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
J	RW	SR9			Subregion 9 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
K	RW	SR10			Subregion 10 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
L	RW	SR11			Subregion 11 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
M	RW	SR12			Subregion 12 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
N	RW	SR13			Subregion 13 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
O	RW	SR14			Subregion 14 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
P	RW	SR15			Subregion 15 in region 0 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														
Q	RW	SR16			Subregion 16 in region 0 (write '1' to clear)																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
R	RW	SR17	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 17 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
S	RW	SR18	Access	1	Write access(es) occurred in this subregion																																	
			Subregion 18 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
T	RW	SR19	Subregion 19 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 20 in region 0 (write '1' to clear)																																			
U	RW	SR20	Subregion 20 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 21 in region 0 (write '1' to clear)																																			
V	RW	SR21	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 22 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
W	RW	SR22	Access	1	Write access(es) occurred in this subregion																																	
			Subregion 23 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
X	RW	SR23	Subregion 23 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 24 in region 0 (write '1' to clear)																																			
Y	RW	SR24	Subregion 24 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 25 in region 0 (write '1' to clear)																																			
Z	RW	SR25	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 26 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
a	RW	SR26	Access	1	Write access(es) occurred in this subregion																																	
			Subregion 27 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
b	RW	SR27	Subregion 27 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 28 in region 0 (write '1' to clear)																																			
c	RW	SR28	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 29 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
d	RW	SR29	Access	1	Write access(es) occurred in this subregion																																	
			Subregion 30 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
e	RW	SR30	Subregion 30 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 31 in region 0 (write '1' to clear)																																			
f	RW	SR31	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 32 in region 0 (write '1' to clear)																																			
			NoAccess	0	No write access occurred in this subregion																																	

#### 44.1.8 PERREGION[0].SUBSTATRA

Address offset: 0x404

Source of event/interrupt in region 0, read access detected while corresponding subregion was enabled for watching

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	SR0				Subregion 0 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
B	RW	SR1				Subregion 1 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
C	RW	SR2				Subregion 2 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
D	RW	SR3				Subregion 3 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
E	RW	SR4				Subregion 4 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
F	RW	SR5				Subregion 5 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
G	RW	SR6				Subregion 6 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
H	RW	SR7				Subregion 7 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
I	RW	SR8				Subregion 8 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
J	RW	SR9				Subregion 9 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
K	RW	SR10				Subregion 10 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
L	RW	SR11				Subregion 11 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
M	RW	SR12				Subregion 12 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
N	RW	SR13				Subregion 13 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
O	RW	SR14				Subregion 14 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
P	RW	SR15				Subregion 15 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
Q	RW	SR16				Subregion 16 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
R	RW	SR17				Subregion 17 in region 0 (write '1' to clear)																																
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
S	RW	SR18				Subregion 18 in region 0 (write '1' to clear)																																

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			T RW SR19			Subregion 19 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			U RW SR20			Subregion 20 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			V RW SR21			Subregion 21 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			W RW SR22			Subregion 22 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			X RW SR23			Subregion 23 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			Y RW SR24			Subregion 24 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			Z RW SR25			Subregion 25 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			a RW SR26			Subregion 26 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			b RW SR27			Subregion 27 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			c RW SR28			Subregion 28 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			d RW SR29			Subregion 29 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			e RW SR30			Subregion 30 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														
			f RW SR31			Subregion 31 in region 0 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																														
			Access	1	Read access(es) occurred in this subregion																														

#### 44.1.9 PERREGION[1].SUBSTATWA

Address offset: 0x408

Source of event/interrupt in region 1, write access detected while corresponding subregion was enabled for watching

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				f e d c b a Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SR0			Subregion 0 in region 1 (write '1' to clear)																														
			NoAccess	0	No write access occurred in this subregion																														
			Access	1	Write access(es) occurred in this subregion																														

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																																	
B	RW	SR1			Subregion 1 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
C	RW	SR2			Subregion 2 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
D	RW	SR3			Subregion 3 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
E	RW	SR4			Subregion 4 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
F	RW	SR5			Subregion 5 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
G	RW	SR6			Subregion 6 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
H	RW	SR7			Subregion 7 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
I	RW	SR8			Subregion 8 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
J	RW	SR9			Subregion 9 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
K	RW	SR10			Subregion 10 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
L	RW	SR11			Subregion 11 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
M	RW	SR12			Subregion 12 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
N	RW	SR13			Subregion 13 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
O	RW	SR14			Subregion 14 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
P	RW	SR15			Subregion 15 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
Q	RW	SR16			Subregion 16 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
R	RW	SR17			Subregion 17 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
S	RW	SR18			Subregion 18 in region 1 (write '1' to clear)																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
T	RW	SR19			Subregion 19 in region 1 (write '1' to clear)																																	



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
			NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 20 in region 1 (write '1' to clear)																																			
U	RW	SR20	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 21 in region 1 (write '1' to clear)																																			
V	RW	SR21	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 22 in region 1 (write '1' to clear)																																			
W	RW	SR22	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 23 in region 1 (write '1' to clear)																																			
X	RW	SR23	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 24 in region 1 (write '1' to clear)																																			
Y	RW	SR24	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 25 in region 1 (write '1' to clear)																																			
Z	RW	SR25	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 26 in region 1 (write '1' to clear)																																			
a	RW	SR26	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 27 in region 1 (write '1' to clear)																																			
b	RW	SR27	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 28 in region 1 (write '1' to clear)																																			
c	RW	SR28	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 29 in region 1 (write '1' to clear)																																			
d	RW	SR29	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 30 in region 1 (write '1' to clear)																																			
e	RW	SR30	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	
			Subregion 31 in region 1 (write '1' to clear)																																			
f	RW	SR31	NoAccess	0	No write access occurred in this subregion																																	
			Access	1	Write access(es) occurred in this subregion																																	

## 44.1.10 PERREGION[1].SUBSTATRA

Address offset: 0x40C

Source of event/interrupt in region 1, read access detected while corresponding subregion was enabled for watching

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																	
A	RW	SR0			Subregion 0 in region 1 (write '1' to clear)																																	
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	
B	RW	SR1			Subregion 1 in region 1 (write '1' to clear)																																	
			NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																	

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
C	RW	SR2					Subregion 2 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
D	RW	SR3					Subregion 3 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
E	RW	SR4					Subregion 4 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
F	RW	SR5					Subregion 5 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
G	RW	SR6					Subregion 6 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
H	RW	SR7					Subregion 7 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
I	RW	SR8					Subregion 8 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
J	RW	SR9					Subregion 9 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
K	RW	SR10					Subregion 10 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
L	RW	SR11					Subregion 11 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
M	RW	SR12					Subregion 12 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
N	RW	SR13					Subregion 13 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
O	RW	SR14					Subregion 14 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
P	RW	SR15					Subregion 15 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
Q	RW	SR16					Subregion 16 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
R	RW	SR17					Subregion 17 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
S	RW	SR18					Subregion 18 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
T	RW	SR19					Subregion 19 in region 1 (write '1' to clear)																													
			NoAccess	0	No read access occurred in this subregion																															
			Access	1	Read access(es) occurred in this subregion																															
U	RW	SR20					Subregion 20 in region 1 (write '1' to clear)																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A					
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																				
			NoAccess	0	No read access occurred in this subregion																																				
			Access	1	Read access(es) occurred in this subregion																																				
			V	RW	SR21			Subregion 21 in region 1 (write '1' to clear)																																	
						NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																				
			W	RW	SR22			Subregion 22 in region 1 (write '1' to clear)																																	
						NoAccess	0	No read access occurred in this subregion																																	
			Access	1	Read access(es) occurred in this subregion																																				
					Subregion 23 in region 1 (write '1' to clear)																																				
			X	RW	SR23	NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 24 in region 1 (write '1' to clear)																																	
Y	RW	SR24				NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 25 in region 1 (write '1' to clear)																																	
			Z	RW	SR25	NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 26 in region 1 (write '1' to clear)																																	
a	RW	SR26				NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 27 in region 1 (write '1' to clear)																																	
			b	RW	SR27	NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 28 in region 1 (write '1' to clear)																																	
c	RW	SR28				NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 29 in region 1 (write '1' to clear)																																	
			d	RW	SR29	NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 30 in region 1 (write '1' to clear)																																	
e	RW	SR30				NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	
								Subregion 31 in region 1 (write '1' to clear)																																	
			f	RW	SR31	NoAccess	0	No read access occurred in this subregion																																	
						Access	1	Read access(es) occurred in this subregion																																	

## 44.1.11 REGIONEN

Address offset: 0x510

Enable/disable regions watch

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0										
Id					L																K	J	I	H																G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0									
Id	RW	Field	Value Id	Value	Description																																									
A	RW	RGN0WA			Enable/disable write access watch in region[0]																																									
			Disable	0	Disable write access watch in this region																																									
			Enable	1	Enable write access watch in this region																																									
B	RW	RGN0RA			Enable/disable read access watch in region[0]																																									
			Disable	0	Disable read access watch in this region																																									
			Enable	1	Enable read access watch in this region																																									
C	RW	RGN1WA			Enable/disable write access watch in region[1]																																									
			Disable	0	Disable write access watch in this region																																									
			Enable	1	Enable write access watch in this region																																									
D	RW	RGN1RA			Enable/disable read access watch in region[1]																																									

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				L K J I																H G F E D C B A															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
			Disable	0	Disable read access watch in this region																														
			Enable	1	Enable read access watch in this region																														
			E	RW	RGN2WA		Enable/disable write access watch in region[2]																												
			Disable	0	Disable write access watch in this region																														
			Enable	1	Enable write access watch in this region																														
			F	RW	RGN2RA		Enable/disable read access watch in region[2]																												
			Disable	0	Disable read access watch in this region																														
			Enable	1	Enable read access watch in this region																														
			G	RW	RGN3WA		Enable/disable write access watch in region[3]																												
			Disable	0	Disable write access watch in this region																														
			Enable	1	Enable write access watch in this region																														
			H	RW	RGN3RA		Enable/disable read access watch in region[3]																												
			Disable	0	Disable read access watch in this region																														
			Enable	1	Enable read access watch in this region																														
			I	RW	PRGN0WA		Enable/disable write access watch in PREGION[0]																												
			Disable	0	Disable write access watch in this PREGION																														
			Enable	1	Enable write access watch in this PREGION																														
			J	RW	PRGN0RA		Enable/disable read access watch in PREGION[0]																												
			Disable	0	Disable read access watch in this PREGION																														
			Enable	1	Enable read access watch in this PREGION																														
			K	RW	PRGN1WA		Enable/disable write access watch in PREGION[1]																												
			Disable	0	Disable write access watch in this PREGION																														
			Enable	1	Enable write access watch in this PREGION																														
			L	RW	PRGN1RA		Enable/disable read access watch in PREGION[1]																												
			Disable	0	Disable read access watch in this PREGION																														
			Enable	1	Enable read access watch in this PREGION																														

## 44.1.12 REGIONENSET

Address offset: 0x514

Enable regions watch

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																
Id				L K J I																H G F E D C B A																
Reset 0x00000000				0 0																																
Id	RW	Field	Value Id	Value	Description																															
A	RW	RGN0WA			Enable write access watch in region[0]																															
			Set	1	Enable write access watch in this region																															
			Disabled	0	Write access watch in this region is disabled																															
			Enabled	1	Write access watch in this region is enabled																															
B	RW	RGN0RA			Enable read access watch in region[0]																															
			Set	1	Enable read access watch in this region																															
			Disabled	0	Read access watch in this region is disabled																															
			Enabled	1	Read access watch in this region is enabled																															
C	RW	RGN1WA			Enable write access watch in region[1]																															
			Set	1	Enable write access watch in this region																															
			Disabled	0	Write access watch in this region is disabled																															
			Enabled	1	Write access watch in this region is enabled																															
D	RW	RGN1RA			Enable read access watch in region[1]																															
			Set	1	Enable read access watch in this region																															
			Disabled	0	Read access watch in this region is disabled																															
			Enabled	1	Read access watch in this region is enabled																															
E	RW	RGN2WA			Enable write access watch in region[2]																															
			Set	1	Enable write access watch in this region																															
			Disabled	0	Write access watch in this region is disabled																															

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
Id					L																K																J																I																H																G																F																E																D																C																B																A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
Reset 0x00000000					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0					0</				

### 44.1.13 REGIONENCLR

Address offset: 0x518

Disable regions watch

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id					L														K	J	I	H														G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																					
A	RW	RGN0WA			Disable write access watch in region[0]																																					
			Clear	1	Disable write access watch in this region																																					
			Disabled	0	Write access watch in this region is disabled																																					
			Enabled	1	Write access watch in this region is enabled																																					
B	RW	RGN0RA			Disable read access watch in region[0]																																					
			Clear	1	Disable read access watch in this region																																					
			Disabled	0	Read access watch in this region is disabled																																					
			Enabled	1	Read access watch in this region is enabled																																					
C	RW	RGN1WA			Disable write access watch in region[1]																																					
			Clear	1	Disable write access watch in this region																																					
			Disabled	0	Write access watch in this region is disabled																																					
			Enabled	1	Write access watch in this region is enabled																																					
D	RW	RGN1RA			Disable read access watch in region[1]																																					
			Clear	1	Disable read access watch in this region																																					
			Disabled	0	Read access watch in this region is disabled																																					
			Enabled	1	Read access watch in this region is enabled																																					

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id					L K J I																								H G F E D C B A						
Reset 0x00000000					0 0																														
Id	RW	Field	Value	Id	Value	Description																													
E	RW	RGN2WA				Disable write access watch in region[2]																													
			Clear	1	Disable write access watch in this region																														
			Disabled	0	Write access watch in this region is disabled																														
			Enabled	1	Write access watch in this region is enabled																														
F	RW	RGN2RA				Disable read access watch in region[2]																													
			Clear	1	Disable read access watch in this region																														
			Disabled	0	Read access watch in this region is disabled																														
			Enabled	1	Read access watch in this region is enabled																														
G	RW	RGN3WA				Disable write access watch in region[3]																													
			Clear	1	Disable write access watch in this region																														
			Disabled	0	Write access watch in this region is disabled																														
			Enabled	1	Write access watch in this region is enabled																														
H	RW	RGN3RA				Disable read access watch in region[3]																													
			Clear	1	Disable read access watch in this region																														
			Disabled	0	Read access watch in this region is disabled																														
			Enabled	1	Read access watch in this region is enabled																														
I	RW	PRGN0WA				Disable write access watch in PREGION[0]																													
			Clear	1	Disable write access watch in this PREGION																														
			Disabled	0	Write access watch in this PREGION is disabled																														
			Enabled	1	Write access watch in this PREGION is enabled																														
J	RW	PRGN0RA				Disable read access watch in PREGION[0]																													
			Clear	1	Disable read access watch in this PREGION																														
			Disabled	0	Read access watch in this PREGION is disabled																														
			Enabled	1	Read access watch in this PREGION is enabled																														
K	RW	PRGN1WA				Disable write access watch in PREGION[1]																													
			Clear	1	Disable write access watch in this PREGION																														
			Disabled	0	Write access watch in this PREGION is disabled																														
			Enabled	1	Write access watch in this PREGION is enabled																														
L	RW	PRGN1RA				Disable read access watch in PREGION[1]																													
			Clear	1	Disable read access watch in this PREGION																														
			Disabled	0	Read access watch in this PREGION is disabled																														
			Enabled	1	Read access watch in this PREGION is enabled																														

#### 44.1.14 REGION[0].START

Address offset: 0x600

Start address for region 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>		<b>Value</b>	<b>Id</b>	<b>Value</b>										<b>Description</b>																				
A	RW	START														Start address for region																				

#### 44.1.15 REGION[0].END

Address offset: 0x604

End address of region 0

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value																Description															
A	RW	END																			End address of region.															

#### 44.1.16 REGION[1].START

Address offset: 0x610

Start address for region 1

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	START				Start address for region																										

#### 44.1.17 REGION[1].END

Address offset: 0x614

End address of region 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	END							End address of region.																										

#### 44.1.18 REGION[2].START

Address offset: 0x620

Start address for region 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																											
A	RW	START							Start address for region																											

#### 44.1.19 REGION[2].END

Address offset: 0x624

End address of region 2

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	END							End address of region.																										

#### 44.1.20 REGION[3].START

Address offset: 0x630

Start address for region 3

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	START				Start address for region																																

#### 44.1.21 REGION[3].END

Address offset: 0x634

End address of region 3

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	END				End address of region.																										

### 44.1.22 PREGION[0].START

Address offset: 0x6C0

Reserved for future use

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	START				Reserved for future use																										

### 44.1.23 PREGION[0].END

Address offset: 0x6C4

Reserved for future use

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	R	END				Reserved for future use																										

### 44.1.24 PREGION[0].SUBS

Address offset: 0x6C8

Subregions of region 0

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	SR0				Include or exclude subregion 0 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
B	RW	SR1				Include or exclude subregion 1 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
C	RW	SR2				Include or exclude subregion 2 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
D	RW	SR3				Include or exclude subregion 3 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
E	RW	SR4				Include or exclude subregion 4 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
F	RW	SR5				Include or exclude subregion 5 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										
G	RW	SR6				Include or exclude subregion 6 in region																										
			Exclude		0	Exclude																										
			Include		1	Include																										



Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>			<b>Description</b>																												
H	RW	SR7						Include or exclude subregion 7 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
I	RW	SR8						Include or exclude subregion 8 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
J	RW	SR9						Include or exclude subregion 9 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
K	RW	SR10						Include or exclude subregion 10 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
L	RW	SR11						Include or exclude subregion 11 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
M	RW	SR12						Include or exclude subregion 12 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
N	RW	SR13						Include or exclude subregion 13 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
O	RW	SR14						Include or exclude subregion 14 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
P	RW	SR15						Include or exclude subregion 15 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
Q	RW	SR16						Include or exclude subregion 16 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
R	RW	SR17						Include or exclude subregion 17 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
S	RW	SR18						Include or exclude subregion 18 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
T	RW	SR19						Include or exclude subregion 19 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
U	RW	SR20						Include or exclude subregion 20 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
V	RW	SR21						Include or exclude subregion 21 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
W	RW	SR22						Include or exclude subregion 22 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
X	RW	SR23						Include or exclude subregion 23 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
Y	RW	SR24						Include or exclude subregion 24 in region																												
			Exclude	0			Exclude																													
			Include	1			Include																													
Z	RW	SR25						Include or exclude subregion 25 in region																												

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
				Exclude	0				Exclude																										
				Include	1				Include																										
a	RW	SR26					Include or exclude subregion 26 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										
b	RW	SR27					Include or exclude subregion 27 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										
c	RW	SR28					Include or exclude subregion 28 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										
d	RW	SR29					Include or exclude subregion 29 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										
e	RW	SR30					Include or exclude subregion 30 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										
f	RW	SR31					Include or exclude subregion 31 in region																												
							Exclude	0				Exclude																							
				Include	1				Include																										

#### 44.1.25 PREGION[1].START

Address offset: 0x6D0

Reserved for future use

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

#### 44.1.26 PREGION[1].END

Address offset: 0x6D4

Reserved for future use

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

#### 44.1.27 PREGION[1].SUBS

Address offset: 0x6D8

### Subregions of region 1

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value													Description																	
A	RW	SR0																Include or exclude subregion 0 in region																	
			Exclude	0														Exclude																	

Bit number										31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id										f	e	d	c	b	a	Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A		
Reset 0x00000000										0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value			Description																																			
B	RW	SR1	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 1 in region																																			
			Include		1			Exclude																																			
C	RW	SR2	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 2 in region																																			
			Include		1			Exclude																																			
D	RW	SR3	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 3 in region																																			
			Include		1			Exclude																																			
E	RW	SR4	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 4 in region																																			
			Include		1			Exclude																																			
F	RW	SR5	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 5 in region																																			
			Include		1			Exclude																																			
G	RW	SR6	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 6 in region																																			
			Include		1			Exclude																																			
H	RW	SR7	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 7 in region																																			
			Include		1			Exclude																																			
I	RW	SR8	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 8 in region																																			
			Include		1			Exclude																																			
J	RW	SR9	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 9 in region																																			
			Include		1			Exclude																																			
K	RW	SR10	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 10 in region																																			
			Include		1			Exclude																																			
L	RW	SR11	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 11 in region																																			
			Include		1			Exclude																																			
M	RW	SR12	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 12 in region																																			
			Include		1			Exclude																																			
N	RW	SR13	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 13 in region																																			
			Include		1			Exclude																																			
O	RW	SR14	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 14 in region																																			
			Include		1			Exclude																																			
P	RW	SR15	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 15 in region																																			
			Include		1			Exclude																																			
Q	RW	SR16	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 16 in region																																			
			Include		1			Exclude																																			
R	RW	SR17	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 17 in region																																			
			Include		1			Exclude																																			
S	RW	SR18	Include		1			Include																																			
			Exclude		0			Include or exclude subregion 18 in region																																			
			Include		1			Exclude																																			

Page 548

## 45 EGU — Event generator unit

The Event generator unit (EGU) provides support for inter-layer signaling. This means support for atomic triggering of both CPU execution and hardware tasks from both firmware (by CPU) and hardware (by PPI). This feature can, for instance, be used for triggering CPU execution at a lower priority execution from a higher priority execution, or to handle a peripheral's ISR execution at a lower priority for some of its events. However, triggering any priority from any priority is possible.

Listed here are the main EGU features:

- Enables SW triggering of interrupts
- Separate interrupt vectors for every EGU instance
- Up to 16 separate event flags per interrupt for multiplexing

Each instance of The EGU implements a set of tasks which can individually be triggered to generate the corresponding event, i.e., the corresponding event for TASKS\_TRIGGER[n] is EVENTS\_TRIGGERED[n].

Refer to [Table 106: Instances](#) on page 549 for a list of the various EGU instances

### 45.1 Registers

**Table 106: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40014000	EGU	EGU0	Event generator unit 0	
0x40015000	EGU	EGU1	Event generator unit 1	
0x40016000	EGU	EGU2	Event generator unit 2	
0x40017000	EGU	EGU3	Event generator unit 3	
0x40018000	EGU	EGU4	Event generator unit 4	
0x40019000	EGU	EGU5	Event generator unit 5	

**Table 107: Register Overview**

Register	Offset	Description
TASKS_TRIGGER[0]	0x000	Trigger 0 for triggering the corresponding TRIGGERED[0] event
TASKS_TRIGGER[1]	0x004	Trigger 1 for triggering the corresponding TRIGGERED[1] event
TASKS_TRIGGER[2]	0x008	Trigger 2 for triggering the corresponding TRIGGERED[2] event
TASKS_TRIGGER[3]	0x00C	Trigger 3 for triggering the corresponding TRIGGERED[3] event
TASKS_TRIGGER[4]	0x010	Trigger 4 for triggering the corresponding TRIGGERED[4] event
TASKS_TRIGGER[5]	0x014	Trigger 5 for triggering the corresponding TRIGGERED[5] event
TASKS_TRIGGER[6]	0x018	Trigger 6 for triggering the corresponding TRIGGERED[6] event
TASKS_TRIGGER[7]	0x01C	Trigger 7 for triggering the corresponding TRIGGERED[7] event
TASKS_TRIGGER[8]	0x020	Trigger 8 for triggering the corresponding TRIGGERED[8] event
TASKS_TRIGGER[9]	0x024	Trigger 9 for triggering the corresponding TRIGGERED[9] event
TASKS_TRIGGER[10]	0x028	Trigger 10 for triggering the corresponding TRIGGERED[10] event
TASKS_TRIGGER[11]	0x02C	Trigger 11 for triggering the corresponding TRIGGERED[11] event
TASKS_TRIGGER[12]	0x030	Trigger 12 for triggering the corresponding TRIGGERED[12] event
TASKS_TRIGGER[13]	0x034	Trigger 13 for triggering the corresponding TRIGGERED[13] event
TASKS_TRIGGER[14]	0x038	Trigger 14 for triggering the corresponding TRIGGERED[14] event
TASKS_TRIGGER[15]	0x03C	Trigger 15 for triggering the corresponding TRIGGERED[15] event
EVENTS_TRIGGERED[0]	0x100	Event number 0 generated by triggering the corresponding TRIGGER[0] task
EVENTS_TRIGGERED[1]	0x104	Event number 1 generated by triggering the corresponding TRIGGER[1] task
EVENTS_TRIGGERED[2]	0x108	Event number 2 generated by triggering the corresponding TRIGGER[2] task
EVENTS_TRIGGERED[3]	0x10C	Event number 3 generated by triggering the corresponding TRIGGER[3] task
EVENTS_TRIGGERED[4]	0x110	Event number 4 generated by triggering the corresponding TRIGGER[4] task
EVENTS_TRIGGERED[5]	0x114	Event number 5 generated by triggering the corresponding TRIGGER[5] task
EVENTS_TRIGGERED[6]	0x118	Event number 6 generated by triggering the corresponding TRIGGER[6] task

Register	Offset	Description
EVENTS_TRIGGERED[7]	0x11C	Event number 7 generated by triggering the corresponding TRIGGER[7] task
EVENTS_TRIGGERED[8]	0x120	Event number 8 generated by triggering the corresponding TRIGGER[8] task
EVENTS_TRIGGERED[9]	0x124	Event number 9 generated by triggering the corresponding TRIGGER[9] task
EVENTS_TRIGGERED[10]	0x128	Event number 10 generated by triggering the corresponding TRIGGER[10] task
EVENTS_TRIGGERED[11]	0x12C	Event number 11 generated by triggering the corresponding TRIGGER[11] task
EVENTS_TRIGGERED[12]	0x130	Event number 12 generated by triggering the corresponding TRIGGER[12] task
EVENTS_TRIGGERED[13]	0x134	Event number 13 generated by triggering the corresponding TRIGGER[13] task
EVENTS_TRIGGERED[14]	0x138	Event number 14 generated by triggering the corresponding TRIGGER[14] task
EVENTS_TRIGGERED[15]	0x13C	Event number 15 generated by triggering the corresponding TRIGGER[15] task
<i>INTEN</i>	0x300	Enable or disable interrupt
<i>INTENSET</i>	0x304	Enable interrupt
<i>INTENCLR</i>	0x308	Disable interrupt

### 45.1.1 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				P O N M L K J I H G F E D C B A															
Reset 0x00000000				0																0															
Id	RW	Field	Value	Id	Value		Description																												
A	RW	TRIGGERED0					Enable or disable interrupt for TRIGGERED[0] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
B	RW	TRIGGERED1					Enable or disable interrupt for TRIGGERED[1] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
C	RW	TRIGGERED2					Enable or disable interrupt for TRIGGERED[2] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
D	RW	TRIGGERED3					Enable or disable interrupt for TRIGGERED[3] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
E	RW	TRIGGERED4					Enable or disable interrupt for TRIGGERED[4] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
F	RW	TRIGGERED5					Enable or disable interrupt for TRIGGERED[5] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
G	RW	TRIGGERED6					Enable or disable interrupt for TRIGGERED[6] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
H	RW	TRIGGERED7					Enable or disable interrupt for TRIGGERED[7] event																												
			Disabled		0		Disable																												
			Enabled		1		Enable																												
I	RW	TRIGGERED8					Enable or disable interrupt for TRIGGERED[8] event																												

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					P O N M L K J I H G F E D C B A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
			Disabled	0	See <a href="#">EVENTS_TRIGGERED[8]</a> Disable																															
			Enabled	1	Enable																															
J	RW	TRIGGERED9			Enable or disable interrupt for TRIGGERED[9] event  See <a href="#">EVENTS_TRIGGERED[9]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
K	RW	TRIGGERED10			Enable or disable interrupt for TRIGGERED[10] event  See <a href="#">EVENTS_TRIGGERED[10]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
L	RW	TRIGGERED11			Enable or disable interrupt for TRIGGERED[11] event  See <a href="#">EVENTS_TRIGGERED[11]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
M	RW	TRIGGERED12			Enable or disable interrupt for TRIGGERED[12] event  See <a href="#">EVENTS_TRIGGERED[12]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
N	RW	TRIGGERED13			Enable or disable interrupt for TRIGGERED[13] event  See <a href="#">EVENTS_TRIGGERED[13]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
O	RW	TRIGGERED14			Enable or disable interrupt for TRIGGERED[14] event  See <a href="#">EVENTS_TRIGGERED[14]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															
P	RW	TRIGGERED15			Enable or disable interrupt for TRIGGERED[15] event  See <a href="#">EVENTS_TRIGGERED[15]</a>																															
			Disabled	0	Disable																															
			Enabled	1	Enable																															

## 45.1.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	TRIGGERED0				Write '1' to Enable interrupt for TRIGGERED[0] event																													
						See <a href="#">EVENTS_TRIGGERED[0]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
B	RW	TRIGGERED1				Write '1' to Enable interrupt for TRIGGERED[1] event																													
						See <a href="#">EVENTS_TRIGGERED[1]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	TRIGGERED2				Write '1' to Enable interrupt for TRIGGERED[2] event																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
					See <a href="#">EVENTS_TRIGGERED[2]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	TRIGGERED3			Write '1' to Enable interrupt for TRIGGERED[3] event																														
					See <a href="#">EVENTS_TRIGGERED[3]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	TRIGGERED4			Write '1' to Enable interrupt for TRIGGERED[4] event																														
					See <a href="#">EVENTS_TRIGGERED[4]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
F	RW	TRIGGERED5			Write '1' to Enable interrupt for TRIGGERED[5] event																														
					See <a href="#">EVENTS_TRIGGERED[5]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
G	RW	TRIGGERED6			Write '1' to Enable interrupt for TRIGGERED[6] event																														
					See <a href="#">EVENTS_TRIGGERED[6]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
H	RW	TRIGGERED7			Write '1' to Enable interrupt for TRIGGERED[7] event																														
					See <a href="#">EVENTS_TRIGGERED[7]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
I	RW	TRIGGERED8			Write '1' to Enable interrupt for TRIGGERED[8] event																														
					See <a href="#">EVENTS_TRIGGERED[8]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
J	RW	TRIGGERED9			Write '1' to Enable interrupt for TRIGGERED[9] event																														
					See <a href="#">EVENTS_TRIGGERED[9]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
K	RW	TRIGGERED10			Write '1' to Enable interrupt for TRIGGERED[10] event																														
					See <a href="#">EVENTS_TRIGGERED[10]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
L	RW	TRIGGERED11			Write '1' to Enable interrupt for TRIGGERED[11] event																														
					See <a href="#">EVENTS_TRIGGERED[11]</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
M	RW	TRIGGERED12			Write '1' to Enable interrupt for TRIGGERED[12] event																														
					See <a href="#">EVENTS_TRIGGERED[12]</a>																														



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																				P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
N	RW	TRIGGERED13			Write '1' to Enable interrupt for TRIGGERED[13] event																														
						See <a href="#">EVENTS_TRIGGERED[13]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
O	RW	TRIGGERED14			Write '1' to Enable interrupt for TRIGGERED[14] event																														
						See <a href="#">EVENTS_TRIGGERED[14]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
P	RW	TRIGGERED15			Write '1' to Enable interrupt for TRIGGERED[15] event																														
						See <a href="#">EVENTS_TRIGGERED[15]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													

### 45.1.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																				P O N M L K J I H G F E D C B A																
Reset 0x00000000				0 0																																
Id	RW	Field	Value Id	Value	Description																															
A	RW	TRIGGERED0			Write '1' to Disable interrupt for TRIGGERED[0] event																															
					See <a href="#">EVENTS_TRIGGERED[0]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
B	RW	TRIGGERED1			Write '1' to Disable interrupt for TRIGGERED[1] event																															
					See <a href="#">EVENTS_TRIGGERED[1]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
C	RW	TRIGGERED2			Write '1' to Disable interrupt for TRIGGERED[2] event																															
					See <a href="#">EVENTS_TRIGGERED[2]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
D	RW	TRIGGERED3			Write '1' to Disable interrupt for TRIGGERED[3] event																															
					See <a href="#">EVENTS_TRIGGERED[3]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															
			Enabled	1	Read: Enabled																															
E	RW	TRIGGERED4			Write '1' to Disable interrupt for TRIGGERED[4] event																															
					See <a href="#">EVENTS_TRIGGERED[4]</a>																															
			Clear	1	Disable																															
			Disabled	0	Read: Disabled																															

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																						P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
F	RW	TRIGGERED5	Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[5] event																																			
			See <a href="#">EVENTS_TRIGGERED[5]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[6] event																																			
G	RW	TRIGGERED6	See <a href="#">EVENTS_TRIGGERED[6]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
H	RW	TRIGGERED7	Write '1' to Disable interrupt for TRIGGERED[7] event																																			
			See <a href="#">EVENTS_TRIGGERED[7]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[8] event																																			
I	RW	TRIGGERED8	See <a href="#">EVENTS_TRIGGERED[8]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
J	RW	TRIGGERED9	Write '1' to Disable interrupt for TRIGGERED[9] event																																			
			See <a href="#">EVENTS_TRIGGERED[9]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[10] event																																			
K	RW	TRIGGERED10	See <a href="#">EVENTS_TRIGGERED[10]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
L	RW	TRIGGERED11	Write '1' to Disable interrupt for TRIGGERED[11] event																																			
			See <a href="#">EVENTS_TRIGGERED[11]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[12] event																																			
M	RW	TRIGGERED12	See <a href="#">EVENTS_TRIGGERED[12]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
N	RW	TRIGGERED13	Write '1' to Disable interrupt for TRIGGERED[13] event																																			
			See <a href="#">EVENTS_TRIGGERED[13]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	
			Write '1' to Disable interrupt for TRIGGERED[14] event																																			
O	RW	TRIGGERED14	See <a href="#">EVENTS_TRIGGERED[14]</a>																																			
			Clear	1	Disable																																	
			Disabled	0	Read: Disabled																																	
			Enabled	1	Read: Enabled																																	

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																			P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
P	RW	TRIGGERED15				Write '1' to Disable interrupt for TRIGGERED[15] event																													
						See <a href="#">EVENTS_TRIGGERED[15]</a>																													
			Clear	1		Disable																													
			Disabled	0		Read: Disabled																													
			Enabled	1		Read: Enabled																													

## 45.2 Electrical specification

### 45.2.1 EGU Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{EGU,EVT}}$	Latency between setting an EGU event flag and the system setting an interrupt		1		cycles


## 46 PWM — Pulse width modulation

The PWM module enables the generation of pulse width modulated signals on GPIO. The module implements an up or up-and-down counter with four PWM channels that drive assigned GPIOs.

Three PWM modules can provide up to 12 PWM channels with individual frequency control in groups of up to four channels. Furthermore, a built-in decoder and EasyDMA capabilities make it possible to manipulate the PWM duty cycles without CPU intervention. Arbitrary duty-cycle sequences are read from Data RAM and can be chained to implement ping-pong buffering or repeated into complex loops.

Listed here are the main features of one PWM module:

- Fixed PWM base frequency with programmable clock divider
- Up to four PWM channels with individual polarity and duty-cycle values
- Edge or center-aligned pulses across PWM channels
- Multiple duty-cycle arrays (sequences) defined in Data RAM
- Autonomous and glitch-free update of duty cycle values directly from memory through EasyDMA
- Change of polarity, duty-cycle, and base frequency possibly on every PWM period
- Data RAM sequences can be repeated or connected into loops

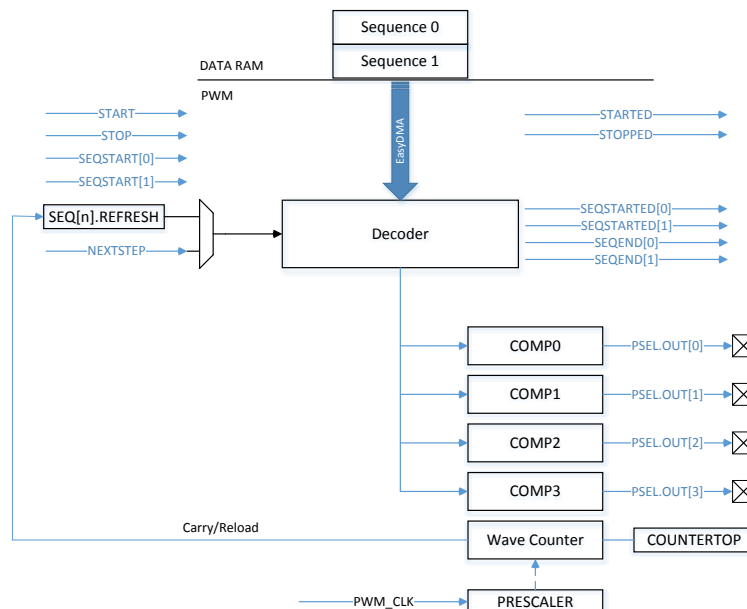

**Figure 150: PWM Module**

### 46.1 Wave counter

The wave counter is responsible for generating the pulses at a duty-cycle that depends on the compare values, and at a frequency that depends on COUNTERTOP.


There is one common 15-bit counter with four compare channels. Thus, all four channels will share the same period (PWM frequency), but can have individual duty-cycle and polarity. The polarity is set by the value read from RAM (see [Figure 153: Decoder memory access modes](#) on page 559), while the MODE register controls if the counter counts up, or up and down. The timer top value is controlled by the COUNTERTOP register. This register value in conjunction with the selected PRESCALER of the PWM\_CLK will result in a given PWM period. A COUNTERTOP value smaller than the compare setting will result in a state where no PWM edges are generated. Respectively, OUT[n] is held high, given that the polarity is set to FallingEdge. All the compare registers are internal and can only be configured through the decoder presented later.

COUNTERTOP can be safely written at any time. It will get sampled following a START task. If DECODER.LOAD is anything else than WaveForm, it will also get sampled following a STARTSEQ[n] task,

and when loading a new value from RAM during a sequence playback. If `DECODER.LOAD=WaveForm`, the register value is ignored, and taken from RAM instead (see [Decoder with EasyDMA](#) on page 559 below).

**Figure 151: PWM up counter example - FallingEdge polarity** on page 557 shows the counter operating in up (MODE=PWM\_MODE\_Up) mode with three PWM channels with the same frequency but different duty cycle. The counter is automatically reset to zero when COUNTERTOP is reached and `OUT[n]` will invert. `OUT[n]` is held low if the compare value is 0 and held high respectively if set to COUNTERTOP given that the polarity is set to FallingEdge. Running in up counter mode will result in pulse widths that are edge-aligned. See the code example below:

```
uint16_t pwm_seq[4] = {PWM_CH0_DUTY, PWM_CH1_DUTY, PWM_CH2_DUTY,
    PWM_CH3_DUTY};
NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
    (PWM_PSEL_OUT_CONNECT_Connected <<
        PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->PSEL.OUT[1] = (second_pin << PWM_PSEL_OUT_PIN_Pos) |
    (PWM_PSEL_OUT_CONNECT_Connected <<
        PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER = (PWM_PRESCALER_PRESCALER_DIV_1 <<
    PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER = (PWM_DECODER_LOAD_Individual << PWM_DECODER_LOAD_Pos) |
    (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR = ((uint32_t) (pwm_seq) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT = ((sizeof(pwm_seq) / sizeof(uint16_t)) <<
    PWM_SEQ_CNT_CNT_Pos);
NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
```

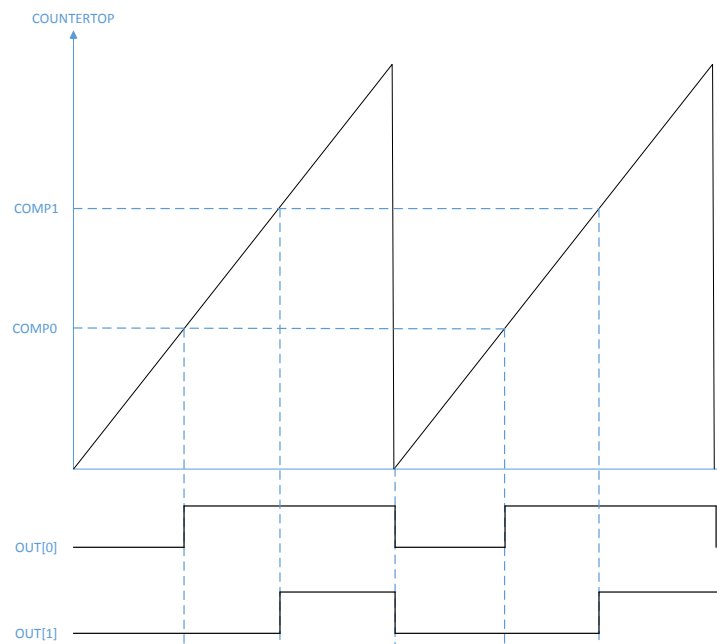

**Figure 151: PWM up counter example - FallingEdge polarity**


In up counting mode, the following formula can be used to compute PWM period and step size:

PWM period:  $T_{PWM(Up)} = T_{PWM\_CLK} * COUNTERTOP$

Step width/Resolution:  $T_{steps} = T_{PWM\_CLK}$

*Figure 152: PWM up-and-down counter example* on page 558 shows the counter operating in up and down mode with (MODE=PWM\_MODE\_UpAndDown) two PWM channels with the same frequency but different duty cycle and output polarity. The counter starts decrementing to zero when COUNTERTOP is reached and will invert the OUT[n] when compare value is hit for the second time. This results in a set of pulses that are center-aligned.

```
uint16_t pwm_seq[4] = {PWM_CH0_DUTY, PWM_CH1_DUTY, PWM_CH2_DUTY,
  PWM_CH3_DUTY};
NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->PSEL.OUT[1] = (second_pin << PWM_PSEL_OUT_PIN_Pos) |
  (PWM_PSEL_OUT_CONNECT_Connected <<
    PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE = (PWM_MODE_UPDOWN_UpAndDown << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER = (PWM_PRESCALER_PRESCALER_DIV_1 <<
  PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER = (PWM_DECODER_LOAD_Individual << PWM_DECODER_LOAD_Pos) |
  (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR = ((uint32_t)(pwm_seq) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT = ((sizeof(pwm_seq) / sizeof(uint16_t)) <<
  PWM_SEQ_CNT_CNT_Pos);
NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
```

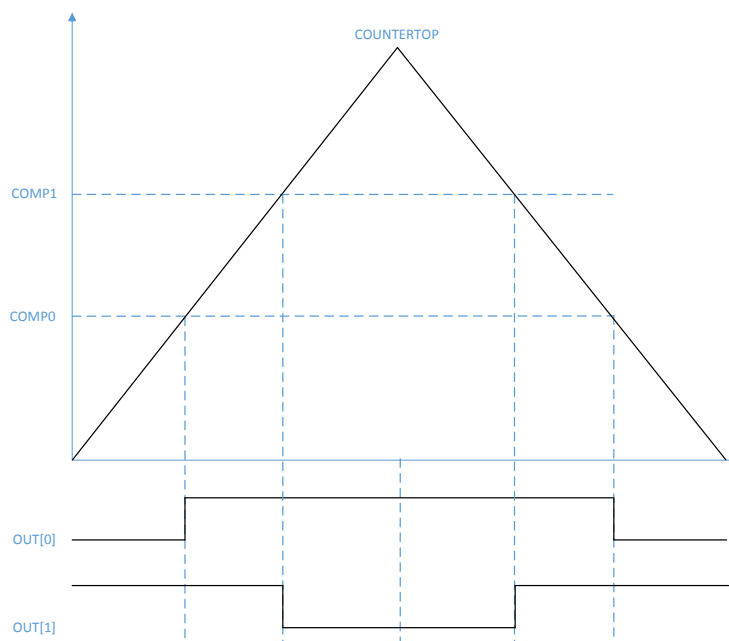

**Figure 152: PWM up-and-down counter example**

In up-and-down counting modes, the following formula can be used to compute PWM period and step size:

$$T_{\text{PWM(Up And Down)}} = T_{\text{PWM\_CLK}} * 2 * \text{COUNTERTOP}$$

$$\text{Step width/Resolution: } T_{\text{steps}} = T_{\text{PWM\_CLK}} * 2$$

## 46.2 Decoder with EasyDMA

The decoder uses EasyDMA to take PWM parameters stored in Data RAM by ways of EasyDMA and updates the internal compare registers of the wave counter based on the mode of operation.

The mentioned PWM parameters are organized into a sequence containing at least one half word (16 bit). Its most significant bit[15] denotes the polarity of the OUT[n] while bit[14:0] is the 15-bit compare value. See below for further details of these RAM defined registers.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Id																				B												A	A	A	A	A	A	A	A	A	A	A																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
Reset 0x00000000				0																0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0												0											

The DECODER register controls how the RAM content is interpreted and loaded to the internal compare registers. The LOAD field can be used to control if the RAM values are loaded to all compare channels - or alternatively to update a group or all channels with individual values. [Figure 153: Decoder memory access modes](#) on page 559 illustrates how the parameters stored in RAM are organized and routed to the various compare channels in the different modes.

A special mode of operation is available when DECODER.LOAD is set to WaveForm. In this mode, up to three PWM channels can be enabled - OUT[0] to OUT[2]. In RAM, four values are loaded at a time: the first, second and third location are used to load the values, and the fourth RAM location is used to load the COUNTERTOP register. This way one can have up to three PWM channels with a frequency base that changes on a per PWM period basis. This mode of operation is useful for arbitrary wave form generation in applications such as LED lighting.

The register SEQ[n].REFRESH=N (one per sequence n=0 or 1) will instruct a new RAM stored pulse width value on every (N+1)<sup>th</sup> PWM period. Setting the register to zero will result in a new duty cycle update every PWM period as long as the minimum PWM period is observed.

Note that registers SEQ[n].REFRESH and SEQ[n].ENDDELAY are ignored when DECODER.MODE=NextStep . The next value is loaded upon receiving every NEXTSTEP task.

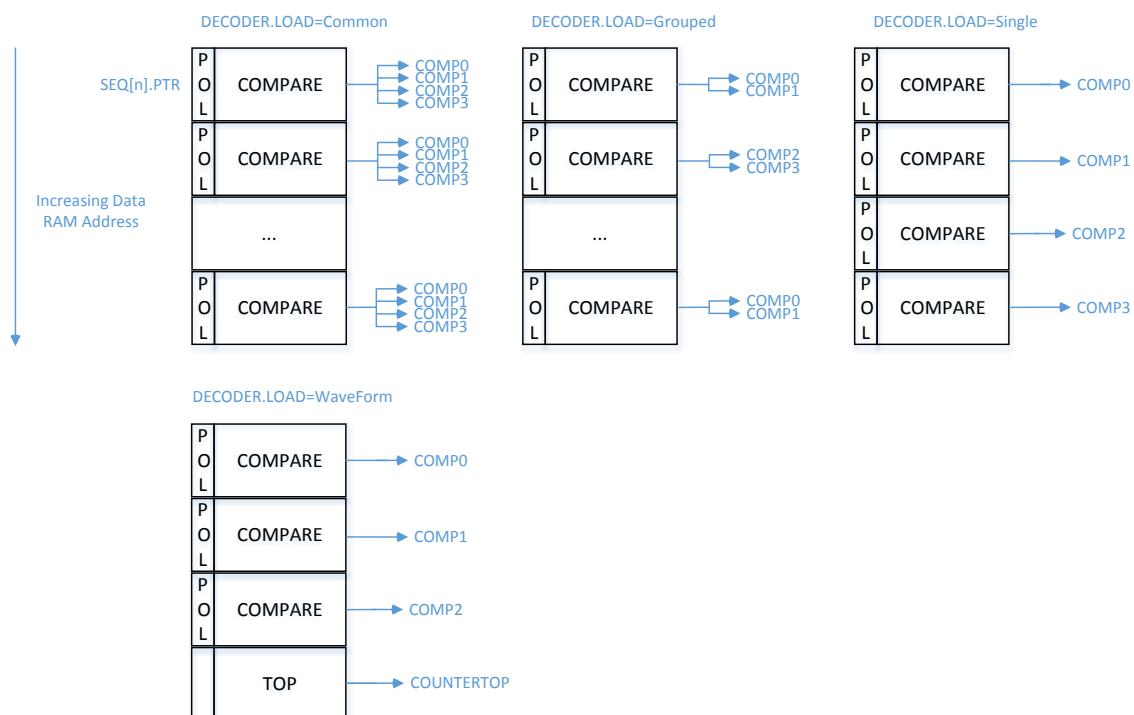


Figure 153: Decoder memory access modes

SEQ[n].PTR is the pointer used to fetch COMPARE values from RAM. If the SEQ[n].PTR is not pointing to the Data RAM region, an EasyDMA transfer may result in a HardFault or RAM corruption. See [Memory](#) on page 20 for more information about the different memory regions.

After the SEQ[n].PTR is set to the desired RAM location, the SEQ[n].CNT register must be set to the number of 16-bit half words in the sequence. It is important to observe that the Grouped and Single modes require one half word per group or one half word per channel respectively, and thus increases RAM size occupation. If PWM generation was not running yet at that point, sending the SEQSTART[n] task will load the first value from RAM, then start the PWM generation. A SEQSTARTED[n] event is generated as soon as the EasyDMA has read the first PWM parameter from RAM and the wave counter has started executing it. When LOOP.CNT=0, sequence n=0 or 1 is played back once. After the last value in the sequence has been loaded and started executing, a SEQEND[n] event is generated. The PWM generation will then continue with the last loaded value. See [Figure 154: Simple sequence example](#) on page 561 for an example of such simple playback.

To completely stop the PWM generation and force the associated pins to a defined state, a STOP task can be fired at any time. A STOPPED event is generated when the PWM generation has stopped at the end of currently running PWM period, and the pins go into their idle state as defined in GPIO->OUT. PWM generation can then only be restarted through a SEQSTART[n] task. SEQSTART[n] will resume PWM generation after having loaded the first value from the RAM buffer defined in the SEQ[n].PTR register.

The table below provides indication of when specific registers get sampled by the hardware. Care should be taken when updating these registers to avoid values to be applied earlier than expected.

**Table 108: When to safely update PWM registers**

Register	Taken into account by hardware	Recommended (safe) update
SEQ[n].PTR	When sending the SEQSTART[n] task	After having received the SEQSTARTED[n] event
SEQ[n].CNT	When sending the SEQSTART[n] task	After having received the SEQSTARTED[n] event
SEQ[0].ENDDELAY	When sending the SEQSTART[0] task  Every time a new value from sequence [0] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	Before starting sequence [0] through a SEQSTART[0] task  When no more value from sequence [0] gets loaded from RAM (indicated by the SEQEND[0] event)
SEQ[1].ENDDELAY	When sending the SEQSTART[1] task  Every time a new value from sequence [1] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	At any time during sequence [1] (which starts when the SEQSTARTED[1] event is fired) Before starting sequence [1] through a SEQSTART[1] task  When no more value from sequence [1] gets loaded from RAM (indicated by the SEQEND[1] event)
SEQ[0].REFRESH	When sending the SEQSTART[0] task  Every time a new value from sequence [0] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	Before starting sequence [0] through a SEQSTART[0] task  At any time during sequence [1] (which starts when the SEQSTARTED[1] event is fired)
SEQ[1].REFRESH	When sending the SEQSTART[1] task  Every time a new value from sequence [1] has been loaded from RAM and gets applied to the Wave Counter (indicated by the PWMPERIODEND event)	Before starting sequence [1] through a SEQSTART[1] task  At any time during sequence [0] (which starts when the SEQSTARTED[0] event is fired)
COUNTERTOP	In DECODER.LOAD=WaveForm: this register is ignored.  In all other LOAD modes: at the end of current PWM period (indicated by the PWMPERIODEND event)	Before starting PWM generation through a SEQSTART[n] task  After a STOP task has been issued, and the STOPPED event has been received.
MODE	Immediately	Before starting PWM generation through a SEQSTART[n] task  After a STOP task has been issued, and the STOPPED event has been received.
DECODER	Immediately	Before starting PWM generation through a SEQSTART[n] task  After a STOP task has been issued, and the STOPPED event has been received.
PRESCALER	Immediately	Before starting PWM generation through a SEQSTART[n] task  After a STOP task has been issued, and the STOPPED event has been received.
LOOP	Immediately	Before starting PWM generation through a SEQSTART[n] task  After a STOP task has been issued, and the STOPPED event has been received.
PSEL.OUT[n]	Immediately	Before enabling the PWM instance through the ENABLE register

**Important:** SEQ[n].REFRESH and SEQ[n].ENDDELAY are ignored at the end of a complex sequence, indicated by a LOOPSDONE event. The reason for this is that the last value loaded from RAM is maintained until further action from software (restarting a new sequence, or stopping PWM generation).



```

NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
                          (PWM_PSEL_OUT_CONNECT_Connected <<
                           PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE       = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE         = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER    = (PWM_PRESCALER_PRESCALER_DIV_1 <<
                          PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP   = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP         = (PWM_LOOP_CNT_Disabled << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER      = (PWM_DECODER_LOAD_Common << PWM_DECODER_LOAD_Pos) |
                          (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR   = ((uint32_t)(seq0_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT   = ((sizeof(seq0_ram) / sizeof(uint16_t)) <<
                          PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[0].REFRESH = 0;
NRF_PWM0->SEQ[0].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;

```



The complex playback always ends with delay 1.


In the example below, sequence 0 is defined with SEQ[0].REFRESH set to one - that means that a new PWM duty cycle is pushed every second PWM period. This complex sequence is started with the SEQSTART[0] task, so SEQ[0] is played first. Since SEQ[0].ENDDELAY=1 there will be one PWM period delay between last period on sequence 0 and the first period on sequence 1. Since SEQ[1].ENDDELAY=0 there is no delay 1, so SEQ[0] would be started immediately after the end of SEQ[1]. However, as LOOP.CNT is one, the playback stops after having played only once SEQ[1], and both SEQEND[1] and LOOPSDONE are generated (their order is not guaranteed in this case).

```

NRF_PWM0->PSEL.OUT[0] = (first_pin << PWM_PSEL_OUT_PIN_Pos) |
                          (PWM_PSEL_OUT_CONNECT_Connected <<
                           PWM_PSEL_OUT_CONNECT_Pos);
NRF_PWM0->ENABLE        = (PWM_ENABLE_ENABLE_Enabled << PWM_ENABLE_ENABLE_Pos);
NRF_PWM0->MODE          = (PWM_MODE_UPDOWN_Up << PWM_MODE_UPDOWN_Pos);
NRF_PWM0->PRESCALER     = (PWM_PRESCALER_PRESCALER_DIV_1 <<
                           PWM_PRESCALER_PRESCALER_Pos);
NRF_PWM0->COUNTERTOP    = (16000 << PWM_COUNTERTOP_COUNTERTOP_Pos); //1 msec
NRF_PWM0->LOOP          = (1 << PWM_LOOP_CNT_Pos);
NRF_PWM0->DECODER       = (PWM_DECODER_LOAD_Common << PWM_DECODER_LOAD_Pos) |
                          (PWM_DECODER_MODE_RefreshCount << PWM_DECODER_MODE_Pos);
NRF_PWM0->SEQ[0].PTR     = ((uint32_t)(seq0_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[0].CNT     = ((sizeof(seq0_ram) / sizeof(uint16_t)) <<
                           PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[0].REFRESH = 1;
NRF_PWM0->SEQ[0].ENDDELAY = 1;
NRF_PWM0->SEQ[1].PTR     = ((uint32_t)(seq1_ram) << PWM_SEQ_PTR_PTR_Pos);
NRF_PWM0->SEQ[1].CNT     = ((sizeof(seq1_ram) / sizeof(uint16_t)) <<
                           PWM_SEQ_CNT_CNT_Pos);

NRF_PWM0->SEQ[1].REFRESH = 0;
NRF_PWM0->SEQ[1].ENDDELAY = 0;
NRF_PWM0->TASKS_SEQSTART[0] = 1;
  
```

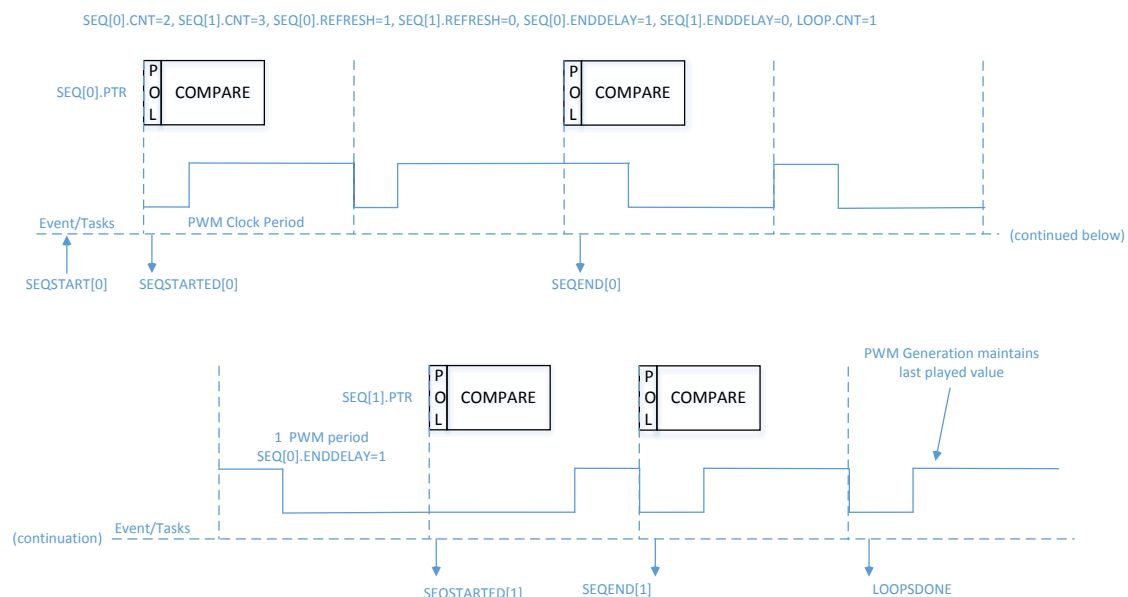

**Figure 155: Example using two sequences**

The decoder can also be configured to asynchronously load a new PWM duty cycle. If the DECODER.MODE register is set to NextStep - then the NEXTSTEP task will cause an update of the internal compare registers on the next PWM period.

The figures below provide an overview of each part of an arbitrary sequence, in various modes (LOOP.CNT=0 and LOOP.CNT>0). In particular are represented:

- Initial and final duty cycle on the PWM output(s)
- Chaining of SEQ[0] and SEQ[1] if LOOP.CNT>0
- Influence of registers on the sequence
- Events fired during a sequence
- DMA activity (loading of next value and applying it to the output(s))

Note that the single-shot example applies also to SEQ[1], only SEQ[0] is represented for simplicity.

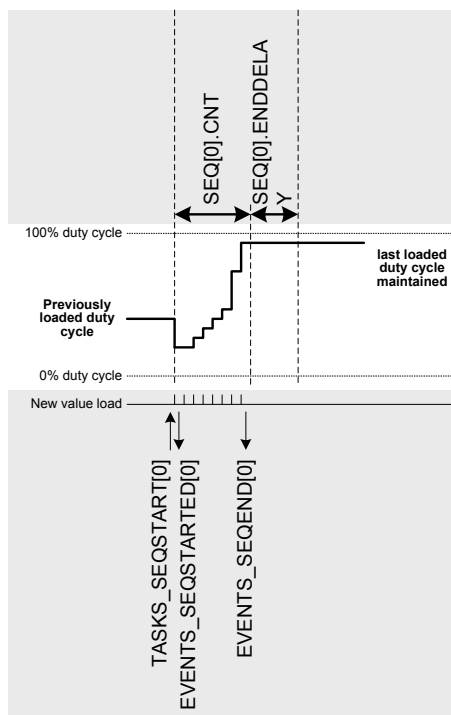


Figure 156: Single shot (LOOP.CNT=0)


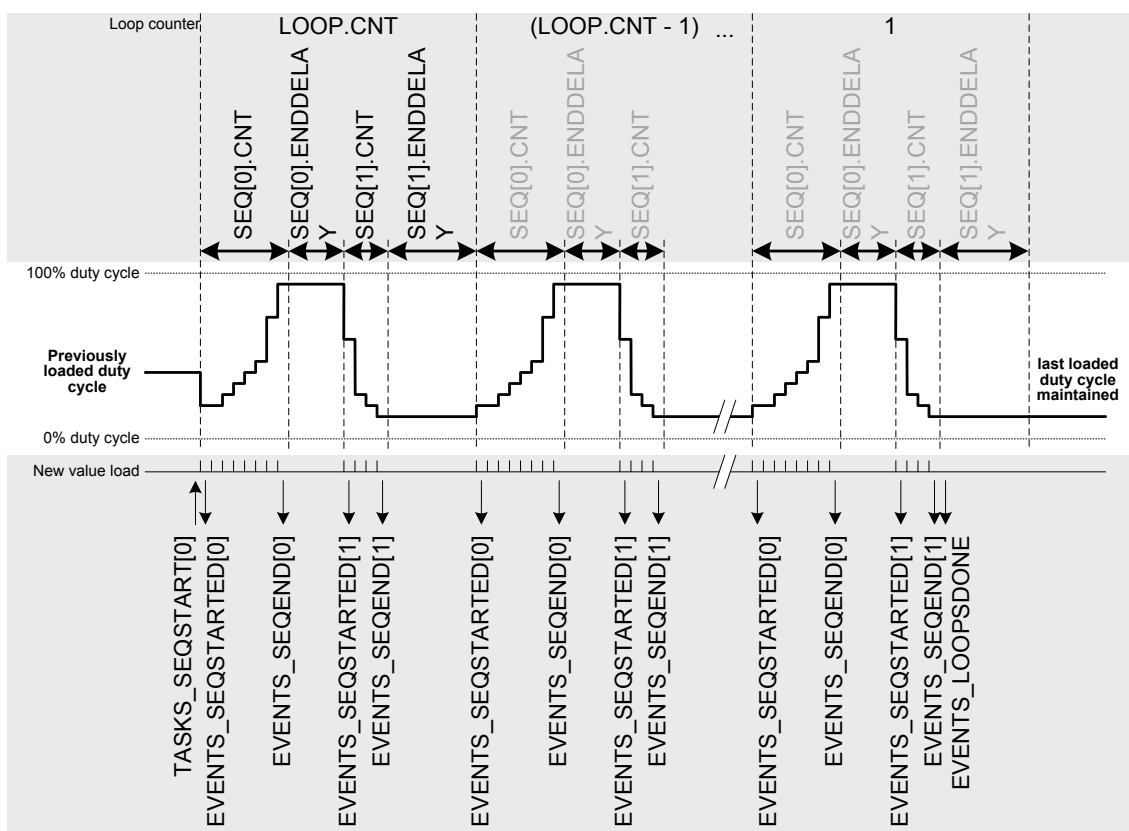


Figure 157: Complex sequence (LOOP.CNT>0) starting with SEQ[0]

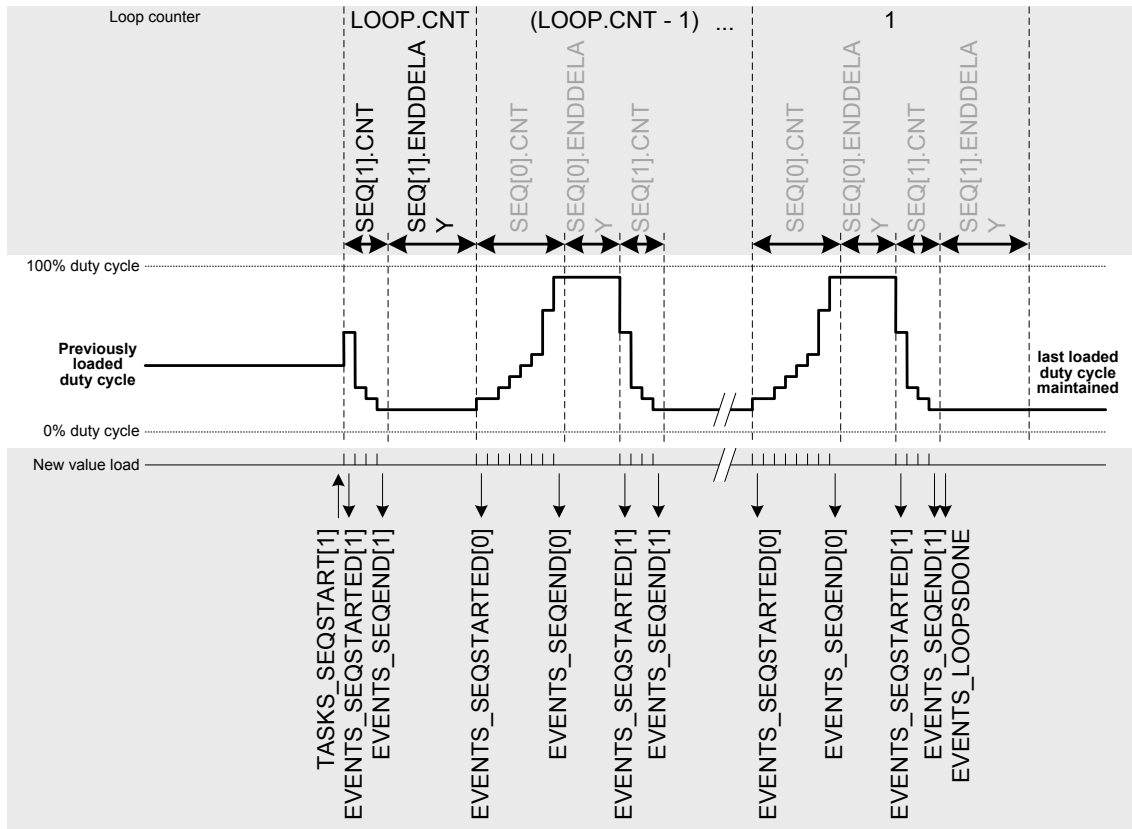

**Figure 158: Complex sequence (LOOP.CNT > 0) starting with SEQ[1]**

Note that if a sequence is in use in a simple or complex sequence, it must have a length of  $\text{SEQ}[n].\text{CNT} > 0$ .

## 46.3 Limitations

The previous compare value will be repeated if the PWM period is selected to be shorter than the time it takes for the EasyDMA to fetch from RAM and update the internal compare registers.

This is to ensure a glitch-free operation even if very short PWM periods are chosen.

## 46.4 Pin configuration

The  $\text{OUT}[n]$  ( $n=0..3$ ) signals associated to each channel of the PWM module are mapped to physical pins according to the configuration specified in the respective  $\text{PSEL.OUT}[n]$  registers. If a  $\text{PSEL.OUT}[n].\text{CONNECT}$  is set to Disconnected, the associated PWM module signal will not be connected to any physical pins.

The  $\text{PSEL.OUT}[n]$  registers and their configurations are only used as long as the PWM module is enabled and PWM generation is active (wave counter started), and retained only as long as the device is in System ON mode, see [POWER](#) chapter for more information about power modes.

To ensure correct behaviour in the PWM module, the pins used by the PWM module must be configured in the GPIO peripheral as described in [Table 109: Recommended GPIO configuration before starting PWM generation](#) on page 565 before enabling the PWM module. The pins' idle state is defined by the OUT registers in the GPIO module. This is to ensure that the pins used by the PWM module are driven correctly, if PWM generation is stopped through a STOP task, the PWM module itself is temporarily disabled, or the device temporarily enters System OFF. This configuration must be retained in the GPIO for the selected IOs as long as the PWM module is supposed to be connected to an external PWM circuit.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behaviour.

**Table 109: Recommended GPIO configuration before starting PWM generation**

PWM signal	PWM pin	Direction	Output value	Comment
OUT[n]	As specified in PSEL.OUT[n] (n=0..3)	Output	0	Idle state defined in GPIO->OUT

## 46.5 Registers

**Table 110: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001C000	PWM	PWM0	Pulse width modulation unit 0	
0x40021000	PWM	PWM1	Pulse width modulation unit 1	
0x40022000	PWM	PWM2	Pulse width modulation unit 2	
0x4002D000	PWM	PWM3	Pulse width modulation unit 3	

**Table 111: Register Overview**

Register	Offset	Description
TASKS_STOP	0x004	Stops PWM pulse generation on all channels at the end of current PWM period, and stops sequence playback
TASKS_SEQSTART[0]	0x008	Loads the first PWM value on all enabled channels from sequence 0, and starts playing that sequence at the rate defined in SEQ[0]REFRESH and/or DECODER.MODE. Causes PWM generation to start it was not running.
TASKS_SEQSTART[1]	0x00C	Loads the first PWM value on all enabled channels from sequence 1, and starts playing that sequence at the rate defined in SEQ[1]REFRESH and/or DECODER.MODE. Causes PWM generation to start it was not running.
TASKS_NEXTSTEP	0x010	Steps by one value in the current sequence on all enabled channels if DECODER.MODE=NextStep. Does not cause PWM generation to start it was not running.
EVENTS_STOPPED	0x104	Response to STOP task, emitted when PWM pulses are no longer generated
EVENTS_SEQSTARTED[0]	0x108	First PWM period started on sequence 0
EVENTS_SEQSTARTED[1]	0x10C	First PWM period started on sequence 1
EVENTS_SEQEND[0]	0x110	Emitted at end of every sequence 0, when last value from RAM has been applied to wave counter
EVENTS_SEQEND[1]	0x114	Emitted at end of every sequence 1, when last value from RAM has been applied to wave counter
EVENTS_PWMPERIODEN	0x118	Emitted at the end of each PWM period
EVENTS_LOOPSDONE	0x11C	Concatenated sequences have been played the amount of times defined in LOOP.CNT
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	PWM module enable register
MODE	0x504	Selects operating mode of the wave counter
COUNTERTOP	0x508	Value up to which the pulse generator counter counts
PRESCALER	0x50C	Configuration for PWM_CLK
DECODER	0x510	Configuration of the decoder
LOOP	0x514	Amount of playback of a loop
SEQ[0].PTR	0x520	Beginning address in Data RAM of this sequence
SEQ[0].CNT	0x524	Amount of values (duty cycles) in this sequence
SEQ[0].REFRESH	0x528	Amount of additional PWM periods between samples loaded into compare register
SEQ[0].ENDDelay	0x52C	Time added after the sequence
SEQ[1].PTR	0x540	Beginning address in Data RAM of this sequence
SEQ[1].CNT	0x544	Amount of values (duty cycles) in this sequence
SEQ[1].REFRESH	0x548	Amount of additional PWM periods between samples loaded into compare register
SEQ[1].ENDDelay	0x54C	Time added after the sequence
PSEL.OUT[0]	0x560	Output pin select for PWM channel 0
PSEL.OUT[1]	0x564	Output pin select for PWM channel 1
PSEL.OUT[2]	0x568	Output pin select for PWM channel 2
PSEL.OUT[3]	0x56C	Output pin select for PWM channel 3

## 46.5.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id					E D C B A																															
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id	Value	Description																															
A	RW	SEQEND0_STOP			Shortcut between SEQEND[0] event and STOP task																															
					See <a href="#">EVENTS_SEQEND[0]</a> and <a href="#">TASKS_STOP</a>																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
B	RW	SEQEND1_STOP			Shortcut between SEQEND[1] event and STOP task																															
					See <a href="#">EVENTS_SEQEND[1]</a> and <a href="#">TASKS_STOP</a>																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
C	RW	LOOPSDONE_SEQSTART0			Shortcut between LOOPSDONE event and SEQSTART[0] task																															
					See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_SEQSTART[0]</a>																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
D	RW	LOOPSDONE_SEQSTART1			Shortcut between LOOPSDONE event and SEQSTART[1] task																															
					See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_SEQSTART[1]</a>																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															
E	RW	LOOPSDONE_STOP			Shortcut between LOOPSDONE event and STOP task																															
					See <a href="#">EVENTS_LOOPSDONE</a> and <a href="#">TASKS_STOP</a>																															
			Disabled	0	Disable shortcut																															
			Enabled	1	Enable shortcut																															

## 46.5.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				H G F E D C B																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
B	RW	STOPPED				Enable or disable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
C	RW	SEQSTARTED0				Enable or disable interrupt for SEQSTARTED[0] event																													
						See <a href="#">EVENTS_SEQSTARTED[0]</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
D	RW	SEQSTARTED1				Enable or disable interrupt for SEQSTARTED[1] event																													
						See <a href="#">EVENTS_SEQSTARTED[1]</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
E	RW	SEQEND0				Enable or disable interrupt for SEQEND[0] event																													
						See <a href="#">EVENTS_SEQEND[0]</a>																													
			Disabled	0	Disable																														
			Enabled	1	Enable																														
F	RW	SEQEND1				Enable or disable interrupt for SEQEND[1] event																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																													H	G	F	E	D	C	B				
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																	
						See <a href="#">EVENTS_SEQEND[1]</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
G	RW	PWMPERIODEND				Enable or disable interrupt for PWMPERIODEND event																																	
						See <a href="#">EVENTS_PWMPERIODEND</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	
H	RW	LOOPSDONE				Enable or disable interrupt for LOOPSDONE event																																	
						See <a href="#">EVENTS_LOOPSDONE</a>																																	
			Disabled		0	Disable																																	
			Enabled		1	Enable																																	

### 46.5.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number			31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													H	G	F	E	D	C	B
Reset 0x00000000			0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																													
B	RW	STOPPED				Write '1' to Enable interrupt for STOPPED event																													
						See <a href="#">EVENTS_STOPPED</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
C	RW	SEQSTARTED0				Write '1' to Enable interrupt for SEQSTARTED[0] event																													
						See <a href="#">EVENTS_SEQSTARTED[0]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
D	RW	SEQSTARTED1				Write '1' to Enable interrupt for SEQSTARTED[1] event																													
						See <a href="#">EVENTS_SEQSTARTED[1]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
E	RW	SEQEND0				Write '1' to Enable interrupt for SEQEND[0] event																													
						See <a href="#">EVENTS_SEQEND[0]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
F	RW	SEQEND1				Write '1' to Enable interrupt for SEQEND[1] event																													
						See <a href="#">EVENTS_SEQEND[1]</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
G	RW	PWMPERIODEND				Write '1' to Enable interrupt for PWMPERIODEND event																													
						See <a href="#">EVENTS_PWMPERIODEND</a>																													
			Set		1	Enable																													
			Disabled		0	Read: Disabled																													
			Enabled		1	Read: Enabled																													
H	RW	LOOPSDONE				Write '1' to Enable interrupt for LOOPSDONE event																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														H	G	F	E	D	C	B	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
						See <a href="#">EVENTS_LOOPSDONE</a>																															
			Set		1	Enable																															
			Disabled		0	Read: Disabled																															
			Enabled		1	Read: Enabled																															

## 46.5.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																	H	G	F	E	D	C	B
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																	
B	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																																	
						See <a href="#">EVENTS_STOPPED</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
C	RW	SEQSTARTED0				Write '1' to Disable interrupt for SEQSTARTED[0] event																																	
						See <a href="#">EVENTS_SEQSTARTED[0]</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
D	RW	SEQSTARTED1				Write '1' to Disable interrupt for SEQSTARTED[1] event																																	
						See <a href="#">EVENTS_SEQSTARTED[1]</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
E	RW	SEQEND0				Write '1' to Disable interrupt for SEQEND[0] event																																	
						See <a href="#">EVENTS_SEQEND[0]</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
F	RW	SEQEND1				Write '1' to Disable interrupt for SEQEND[1] event																																	
						See <a href="#">EVENTS_SEQEND[1]</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
G	RW	PWMPERIODEND				Write '1' to Disable interrupt for PWMPERIODEND event																																	
						See <a href="#">EVENTS_PWMPERIODEND</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	
H	RW	LOOPSDONE				Write '1' to Disable interrupt for LOOPSDONE event																																	
						See <a href="#">EVENTS_LOOPSDONE</a>																																	
			Clear		1	Disable																																	
			Disabled		0	Read: Disabled																																	
			Enabled		1	Read: Enabled																																	

## 46.5.5 ENABLE

Address offset: 0x500



## PWM module enable register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENABLE			Enable or disable PWM module																														
			Disabled	0	Disabled																														
			Enabled	1	Enable																														

## 46.5.6 MODE

Address offset: 0x504

Selects operating mode of the wave counter

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	UPDOWN			Selects up or up and down as wave counter mode																														
			Up	0	Up counter - edge aligned PWM duty-cycle																														
			UpAndDown	1	Up and down counter - center aligned PWM duty cycle																														

## 46.5.7 COUNTERTOP

Address offset: 0x508

Value up to which the pulse generator counter counts

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x000003FF				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	COUNTERTOP		[3..32767]	Value up to which the pulse generator counter counts. This register is ignored when DECODER.MODE=WaveForm and only values from RAM will be used.																														

## 46.5.8 PRESCALER

Address offset: 0x50C

Configuration for PWM\_CLK

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	PRESCALER			Pre-scaler of PWM_CLK																														
			DIV_1	0	Divide by 1 (16MHz)																														
			DIV_2	1	Divide by 2 ( 8MHz)																														
			DIV_4	2	Divide by 4 ( 4MHz)																														
			DIV_8	3	Divide by 8 ( 2MHz)																														
			DIV_16	4	Divide by 16 ( 1MHz)																														
			DIV_32	5	Divide by 32 ( 500kHz)																														
			DIV_64	6	Divide by 64 ( 250kHz)																														
			DIV_128	7	Divide by 128 ( 125kHz)																														

## 46.5.9 DECODER

Address offset: 0x510

Configuration of the decoder

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				B																															
Reset 0x00000000				0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	LOAD			How a sequence is read from RAM and spread to the compare register																														
			Common	0	1st half word (16-bit) used in all PWM channels 0..3																														
			Grouped	1	1st half word (16-bit) used in channel 0..1; 2nd word in channel 2..3																														
			Individual	2	1st half word (16-bit) in ch.0; 2nd in ch.1; ...; 4th in ch.3																														
			WaveForm	3	1st half word (16-bit) in ch.0; 2nd in ch.1; ...; 4th in COUNTERTOP																														
B	RW	MODE			Selects source for advancing the active sequence																														
			RefreshCount	0	SEQ[n].REFRESH is used to determine loading internal compare registers																														
			NextStep	1	NEXTSTEP task causes a new value to be loaded to internal compare registers																														

### 46.5.10 LOOP

Address offset: 0x514

Amount of playback of a loop

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																													
A	RW	CNT						Amount of playback of pattern cycles																													
			Disabled	0				Looping disabled (stop at the end of the sequence)																													

#### 46.5.11 SEQ[0].PTR

Address offset: 0x520

Beginning address in Data RAM of this sequence

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

#### 46.5.12 SEQ[0].CNT

Address offset: 0x524

Amount of values (duty cycles) in this sequence

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>															<b>Description</b>																	
A	RW	CNT																	Amount of values (duty cycles) in this sequence																	
			Disabled	0																Sequence is disabled, and shall not be started as it is empty																

### 46.5.13 SEQ[0].REFRESH

Address offset: 0x528

Amount of additional PWM periods between samples loaded into compare register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
Id	RW	Field	Value	Id	Value	Description																																
A	RW	CNT				Amount of additional PWM periods between samples loaded into compare register (load every REFRESH.CNT+1 PWM periods)																																
			Continuous		0	Update every PWM period																																

#### 46.5.14 SEQ[0].ENDDELAY

Address offset: 0x52C

Time added after the sequence

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value			Description																												
A	RW	CNT							Time added after the sequence in PWM periods																												

#### 46.5.15 SEQ[1].PTR

Address offset: 0x540

Beginning address in Data RAM of this sequence

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	PTR						Beginning address in Data RAM of this sequence																												

#### 46.5.16 SEQ[1].CNT

Address offset: 0x544

Amount of values (duty cycles) in this sequence

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																							A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
A	RW	CNT				Amount of values (duty cycles) in this sequence																																
			Disabled		0	Sequence is disabled, and shall not be started as it is empty																																

#### 46.5.17 SEQ[1].REFRESH

Address offset: 0x548

Amount of additional PWM periods between samples loaded into compare register

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id													A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A		
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	CNT				Amount of additional PWM periods between samples loaded into compare register (load every REFRESH.CNT+1 PWM periods)																																
			Continuous		0	Update every PWM period																																

#### 46.5.18 SEQ[1].ENDDELAY

Address offset: 0x54C

Time added after the sequence

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

## 46.5.19 PSEL.OUT[0]

Address offset: 0x560

Output pin select for PWM channel 0

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
Id					C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					

## 46.5.20 PSEL.OUT[1]

Address offset: 0x564

Output pin select for PWM channel 1

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					C																															
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id		Value		Description																													
A	RW	PIN			[0..31]		Pin number																													
B	RW	PORT			[0..1]		Port number																													
C	RW	CONNECT					Connection																													
			Disconnected		1		Disconnect																													
			Connected		0		Connect																													

## 46.5.21 PSEL.OUT[2]

Address offset: 0x568

Output pin select for PWM channel 2

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Id					C																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																</

## 46.5.22 PSEL.OUT[3]

Address offset: 0x56C

Output pin select for PWM channel 3

Bit number						31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id						C																								B				A				A				A			
Reset 0xFFFFFFFF						1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1							
Id	RW	Field	Value			Id	Value			Description																																			
A	RW	PIN					[0..31]			Pin number																																			
B	RW	PORT					[0..1]			Port number																																			
C	RW	CONNECT								Connection																																			
			Disconnected				1			Disconnect																																			
			Connected				0			Connect																																			


## 46.6 Electrical specification

### 46.6.1 PWM Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{\text{PWM},16\text{MHz}}$	PWM run current, Prescaler set to DIV_1 (16 MHz), excluding DMA and GPIO		200		$\mu\text{A}$
$I_{\text{PWM},8\text{MHz}}$	PWM run current, Prescaler set to DIV_2 (8 MHz), excluding DMA and GPIO		100		$\mu\text{A}$
$I_{\text{PWM},125\text{kHz}}$	PWM run current, Prescaler set to DIV_128 (125 kHz), excluding DMA and GPIO		50		$\mu\text{A}$

## 47 SPI — Serial peripheral interface master

The SPI master provides a simple CPU interface which includes a TXD register for sending data and an RXD register for receiving data. This section is added for legacy support for now.

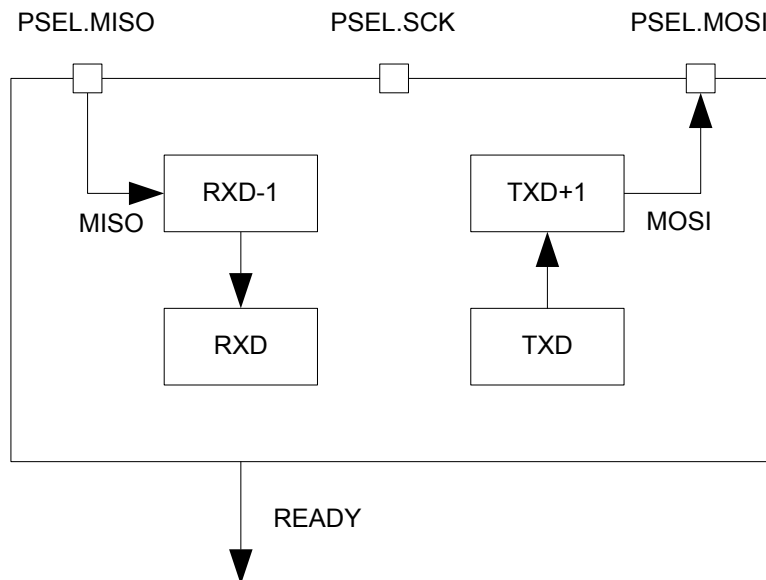

**Figure 159: SPI master**

RXD-1 and TXD+1 illustrate the double buffered version of RXD and TXD respectively.

### 47.1 Functional description

The TXD and RXD registers are double-buffered to enable some degree of uninterrupted data flow in and out of the SPI master.

The SPI master does not implement support for chip select directly. Therefore, the CPU must use available GPIOs to select the correct slave and control this independently of the SPI master. The SPI master supports SPI modes 0 through 3.

**Table 112: SPI modes**

Mode	Clock polarity CPOL	Clock phase CPHA
SPI_MODE 0 (Leading)	0 (Active High)	0 (Active High)
SPI_MODE 0 (Leading)	1 (Active Low)	1 (Active Low)
SPI_MODE 1 (Trailing)	0 (Active High)	0 (Active High)
SPI_MODE 1 (Trailing)	1 (Active Low)	1 (Active Low)

#### 47.1.1 SPI master mode pin configuration

The different signals SCK, MOSI, and MISO associated with the SPI master are mapped to physical pins.

This mapping is according to the configuration specified in the PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers respectively. If the CONNECT field of a PSEL.xxx register is set to Disconnected, the associated SPI master signal is not connected to any physical pin. The PSEL.SCK, PSEL.MOSI, and PSEL.MISO registers and their configurations are only used as long as the SPI master is enabled, and retained only as long as the device is in ON mode. PSEL.SCK, PSEL.MOSI, and PSEL.MISO must only be configured when the SPI master is disabled.

To secure correct behavior in the SPI, the pins used by the SPI must be configured in the GPIO peripheral as described in [Table 113: GPIO configuration](#) on page 575 prior to enabling the SPI. The SCK must

always be connected to a pin, and that pin's input buffer must always be connected for the SPI to work. This configuration must be retained in the GPIO for the selected IOs as long as the SPI is enabled.

Only one peripheral can be assigned to drive a particular GPIO pin at a time, failing to do so may result in unpredictable behavior.

**Table 113: GPIO configuration**

SPI master signal	SPI master pin	Direction	Output value
SCK	As specified in PSEL.SCK	Output	Same as CONFIG.CPOL
MOSI	As specified in PSEL.MOSI	Output	0
MISO	As specified in PSEL.MISO	Input	Not applicable

### 47.1.2 Shared resources

The SPI shares registers and other resources with other peripherals that have the same ID as the SPI. Therefore, the user must disable all peripherals that have the same ID as the SPI before the SPI can be configured and used.

Disabling a peripheral that has the same ID as the SPI will not reset any of the registers that are shared with the SPI. It is therefore important to configure all relevant SPI registers explicitly to secure that it operates correctly.


See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.

### 47.1.3 SPI master transaction sequence

An SPI master transaction is started by writing the first byte, which is to be transmitted by the SPI master, to the TXD register.

Since the transmitter is double buffered, the second byte can be written to the TXD register immediately after the first one. The SPI master will then send these bytes in the order they are written to the TXD register.


The SPI master is a synchronous interface, and for every byte that is sent, a different byte will be received at the same time; this is illustrated in [Figure 160: SPI master transaction](#) on page 576. Bytes that are received will be moved to the RXD register where the CPU can extract them by reading the register. The RXD register is double buffered in the same way as the TXD register, and a second byte can therefore be received at the same time as the first byte is being extracted from RXD by the CPU. The SPI master will generate a READY event every time a new byte is moved to the RXD register. The double buffered byte will be moved from RXD-1 to RXD as soon as the first byte is extracted from RXD. The SPI master will stop when there are no more bytes to send in TXD and TXD+1.

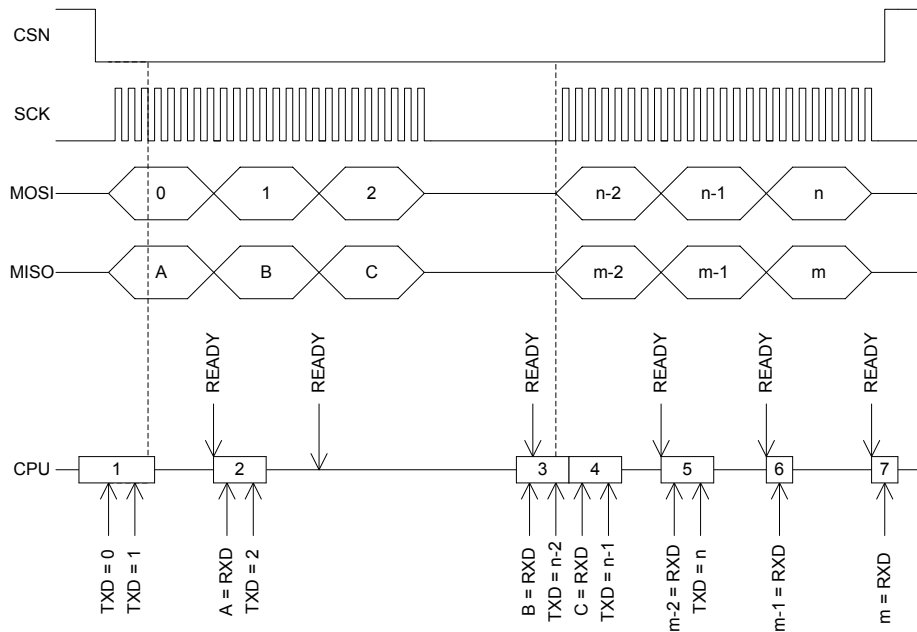

**Figure 160: SPI master transaction**

The READY event of the third byte transaction is delayed until B is extracted from RXD in occurrence number 3 on the horizontal lifeline. The reason for this is that the third event is generated first when C is moved from RXD-1 to RXD after B is read.

The SPI master will move the incoming byte to the RXD register after a short delay following the SCK clock period of the last bit in the byte. This also means that the READY event will be delayed accordingly, see [Figure 161: SPI master transaction](#) on page 576. Therefore, it is important that you always clear the READY event, even if the RXD register and the data that is being received is not used.

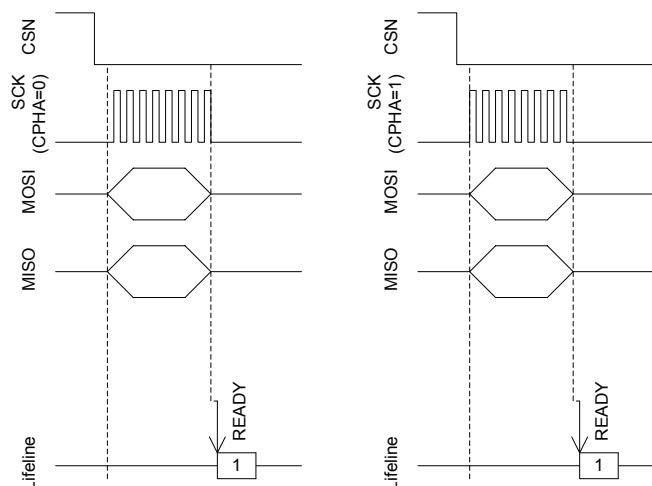

**Figure 161: SPI master transaction**



## 47.2 Registers

**Table 114: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	SPI	SPI0	SPI master 0	Deprecated
0x40004000	SPI	SPI1	SPI master 1	Deprecated
0x40023000	SPI	SPI2	SPI master 2	Deprecated

**Table 115: Register Overview**

Register	Offset	Description
EVENTS_READY	0x108	TXD byte sent and RXD byte received
<a href="#">INTENSET</a>	0x304	Enable interrupt
<a href="#">INTENCLR</a>	0x308	Disable interrupt
<a href="#">ENABLE</a>	0x500	Enable SPI
<a href="#">PSEL_SCK</a>	0x508	Pin select for SCK
<a href="#">PSEL_MOSI</a>	0x50C	Pin select for MOSI signal
<a href="#">PSEL_MISO</a>	0x510	Pin select for MISO signal
<a href="#">RXD</a>	0x518	RXD register
<a href="#">TXD</a>	0x51C	TXD register
<a href="#">FREQUENCY</a>	0x524	SPI frequency. Accuracy depends on the HFCLK source selected.
<a href="#">CONFIG</a>	0x554	Configuration register

### 47.2.1 INTENSET

Address offset: 0x304

Enable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					A																																	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	READY				Write '1' to Enable interrupt for READY event																																
						See <a href="#">EVENTS_READY</a>																																
		Set	1			Enable																																
		Disabled	0			Read: Disabled																																
		Enabled	1			Read: Enabled																																

### 47.2.2 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
A	RW	READY				Write '1' to Disable interrupt for READY event																									
						See <a href="#">EVENTS_READY</a>																									
		Clear	1			Disable																									
		Disabled	0			Read: Disabled																									
		Enabled	1			Read: Enabled																									

### 47.2.3 ENABLE

Address offset: 0x500

Enable SPI

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	ENABLE				Enable or disable SPI																															
			Disabled		0	Disable SPI																															
			Enabled		1	Enable SPI																															

## 47.2.4 PSEL.SCK

Address offset: 0x508

Pin select for SCK

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
Id					C																								B					A					A					A									
Reset 0xFFFFFFFF					1																								1					1					1					1					1				
Id	RW	Field	Value		Id	Value		Description																																													
A	RW	PIN				[0..31]		Pin number																																													
B	RW	PORT				[0..1]		Port number																																													
C	RW	CONNECT						Connection																																													
			Disconnected			1		Disconnect																																													
			Connected			0		Connect																																													

## 47.2.5 PSEL.MOSI

Address offset: 0x50C

Pin select for MOSI signal

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																	
Id					C																								B					A					A					A									
Reset 0xFFFFFFFF					1																								1					1					1					1					1				
Id	RW	Field	Value		Id	Value		Description																																													
A	RW	PIN				[0..31]		Pin number																																													
B	RW	PORT				[0..1]		Port number																																													
C	RW	CONNECT						Connection																																													
			Disconnected			1		Disconnect																																													
			Connected			0		Connect																																													

## 47.2.6 PSEL.MISO

Address offset: 0x510

Pin select for MISO signal

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																											
Id					C																													B					A					A					A														
Reset 0xFFFFFFFF					1																								1					1					1					1					1					1					1				
Id	RW	Field	Value	Id	Value																								Description																																		
A	RW	PIN			[0..31]																								Pin number																																		
B	RW	PORT			[0..1]																								Port number																																		
C	RW	CONNECT																											Connection																																		
			Disconnected		1																								Disconnect																																		
			Connected		0																								Connect																																		

## 47.2.7 RXD

Address offset: 0x518

RXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	R	RXD				RX data received. Double buffered																													

## 47.2.8 TXD

Address offset: 0x51C

TXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	TXD				TX data to send. Double buffered																													

## 47.2.9 FREQUENCY

Address offset: 0x524

SPI frequency. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	FREQUENCY			SPI master data rate																														
			K125	0x02000000	125 kbps																														
			K250	0x04000000	250 kbps																														
			K500	0x08000000	500 kbps																														
			M1	0x10000000	1 Mbps																														
			M2	0x20000000	2 Mbps																														
			M4	0x40000000	4 Mbps																														
			M8	0x80000000	8 Mbps																														

## 47.2.10 CONFIG

Address offset: 0x554

Configuration register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ORDER				Bit order																													
			MsbFirst	0	Most significant bit shifted out first																														
			LsbFirst	1	Least significant bit shifted out first																														
B	RW	CPHA				Serial clock (SCK) phase																													
			Leading	0	Sample on leading edge of clock, shift serial data on trailing edge																														
			Trailing	1	Sample on trailing edge of clock, shift serial data on leading edge																														
C	RW	CPOL				Serial clock (SCK) polarity																													
			ActiveHigh	0	Active high																														
			ActiveLow	1	Active low																														

## 47.3 Electrical specification

### 47.3.1 SPI master interface electrical specifications

Symbol	Description	Min.	Typ.	Max.	Units
$f_{SPI}$	Bit rates for SPI <sup>36</sup>			8 <sup>37</sup>	Mbps
$I_{SPI,2Mbps}$	Run current for SPI, 2 Mbps			50	$\mu A$
$I_{SPI,8Mbps}$	Run current for SPI, 8 Mbps			50	$\mu A$
$I_{SPI,IDLE}$	Idle current for SPI (STARTed, no CSN activity)		<1		$\mu A$
$t_{SPI,START}$	Time from writing TXD register to transmission started		1		$\mu s$

### 47.3.2 Serial Peripheral Interface (SPI) Master timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
$t_{SPI,CCLK}$	SCK period	125			ns
$t_{SPI,RSCK,LD}$	SCK rise time, standard drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPI,RSCK,HD}$	SCK rise time, high drive <sup>a</sup>			$t_{HRF,25pF}$	
$t_{SPI,FSCK,LD}$	SCK fall time, standard drive <sup>a</sup>			$t_{RF,25pF}$	
$t_{SPI,FSCK,HD}$	SCK fall time, high drive <sup>a</sup>			$t_{HRF,25pF}$	
$t_{SPI,WHSCCK}$	SCK high time <sup>a</sup>	$(0.5 * t_{CCLK})$			
$t_{SPI,WLSCCK}$	SCK low time <sup>a</sup>	$(0.5 * t_{CCLK})$			
$t_{SPI,SUMI}$	MISO to CLK edge setup time	19			ns
$t_{SPI,HMI}$	CLK edge to MISO hold time	18			ns
$t_{SPI,VMO}$	CLK edge to MOSI valid			59	ns
$t_{SPI,HMO}$	MOSI hold time after CLK edge	20			ns

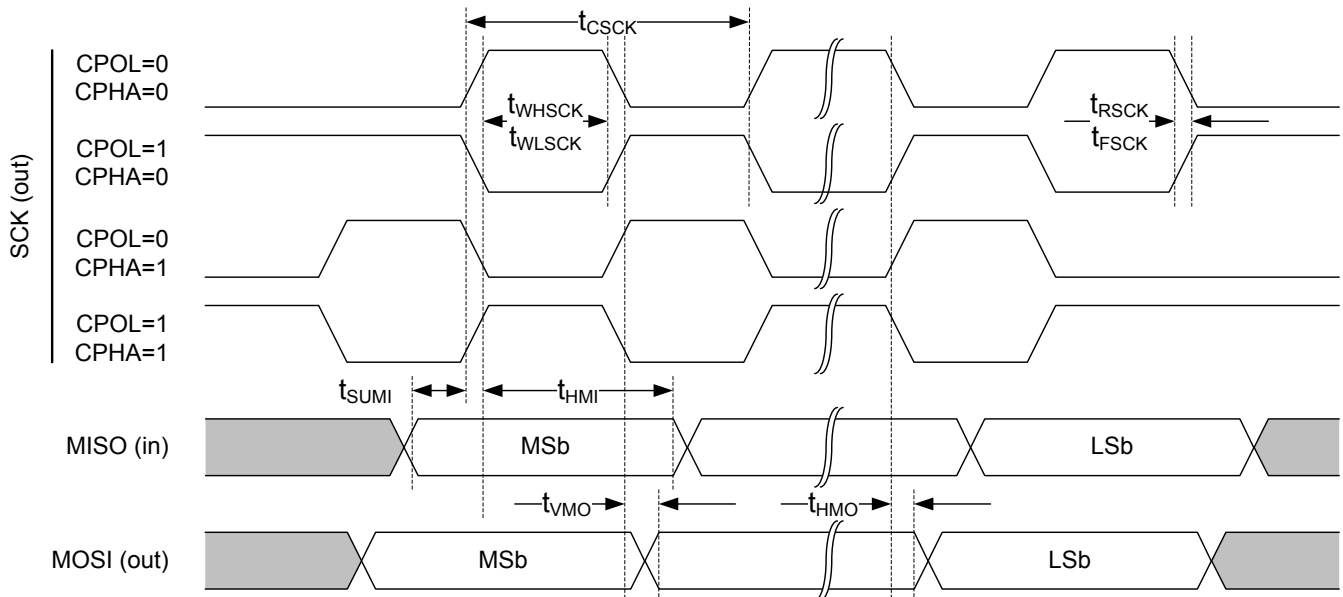


Figure 162: SPI master timing diagram


<sup>36</sup> High bit rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.

<sup>37</sup> The actual maximum data rate depends on the slave's CLK to MISO and MOSI setup and hold timings.

<sup>a</sup> At 25pF load, including GPIO capacitance, see GPIO spec.

## 48 TWI — I<sup>2</sup>C compatible two-wire interface

The TWI master is compatible with I<sup>2</sup>C operating at 100 kHz and 400 kHz.

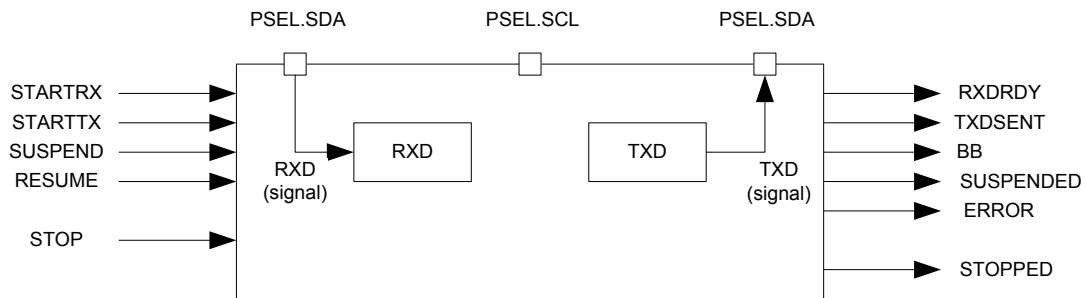


**Figure 163: TWI master's main features**

### 48.1 Functional description

This TWI master is not compatible with CBUS. The TWI transmitter and receiver are single buffered.

See, [Figure 163: TWI master's main features](#) on page 581.

A TWI setup comprising one master and three slaves is illustrated in [Figure 164: A typical TWI setup comprising one master and three slaves](#) on page 581. This TWI master is only able to operate as the only master on the TWI bus.

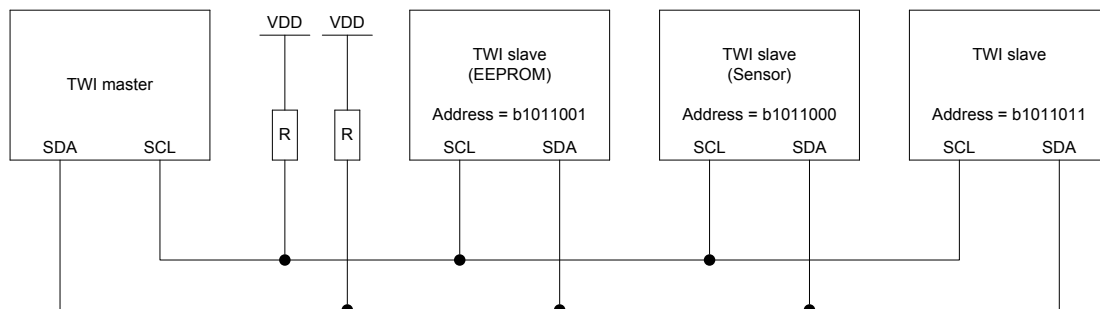

**Figure 164: A typical TWI setup comprising one master and three slaves**

This TWI master supports clock stretching performed by the slaves. The TWI master is started by triggering the STARTTX or STARTRX tasks, and stopped by triggering the STOP task.

If a NACK is clocked in from the slave, the TWI master will generate an ERROR event.

### 48.2 Master mode pin configuration

The different signals SCL and SDA associated with the TWI master are mapped to physical pins according to the configuration specified in the PSEL.SCL and PSEL.SDA registers respectively.

If the CONNECT field of a PSEL.xxx register is set to Disconnected, the associated TWI signal is not connected to any physical pin. The PSEL.SCL and PSEL.SDA registers and their configurations are

only used as long as the TWI master is enabled, and retained only as long as the device is in ON mode. PSEL.SCL and PSEL.SDA must only be configured when the TWI is disabled.

To secure correct signal levels on the pins used by the TWI master when the system is in OFF mode, and when the TWI master is disabled, these pins must be configured in the GPIO peripheral as described in [Table 116: GPIO configuration](#) on page 582.

Only one peripheral can be assigned to drive a particular GPIO pin at a time, failing to do so may result in unpredictable behavior.

**Table 116: GPIO configuration**

TWI master signal	TWI master pin	Direction	Drive strength	Output value
SCL	As specified in PSEL.SCL	Input	S0D1	Not applicable
SDA	As specified in PSEL.SDA	Input	S0D1	Not applicable

## 48.3 Shared resources

The TWI shares registers and other resources with other peripherals that have the same ID as the TWI.

Therefore, you must disable all peripherals that have the same ID as the TWI before the TWI can be configured and used. Disabling a peripheral that has the same ID as the TWI will not reset any of the registers that are shared with the TWI. It is therefore important to configure all relevant TWI registers explicitly to secure that it operates correctly.

The Instantiation table in [Instantiation](#) on page 23 shows which peripherals have the same ID as the TWI.

## 48.4 Master write sequence

A TWI master write sequence is started by triggering the STARTTX task. After the STARTTX task has been triggered, the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 0 (WRITE=0, READ=1).


The address must match the address of the slave device that the master wants to write to. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK=1) generated by the slave.

After receiving the ACK bit, the TWI master will clock out the data bytes that are written to the TXD register. Each byte clocked out from the master will be followed by an ACK/NACK bit clocked in from the slave. A TXDSENT event will be generated each time the TWI master has clocked out a TXD byte, and the associated ACK/NACK bit has been clocked in from the slave.

The TWI master transmitter is single buffered, and a second byte can only be written to the TXD register after the previous byte has been clocked out and the ACK/NACK bit clocked in, that is, after the TXDSENT event has been generated.

If the CPU is prevented from writing to TXD when the TWI master is ready to clock out a byte, the TWI master will stretch the clock until the CPU has written a byte to the TXD register.

A typical TWI master write sequence is illustrated in [Figure 165: The TWI master writing data to a slave](#) on page 583. Occurrence 3 in the figure illustrates delayed processing of the TXDSENT event associated with TXD byte 1. In this scenario the TWI master will stretch the clock to prevent writing erroneous data to the slave.

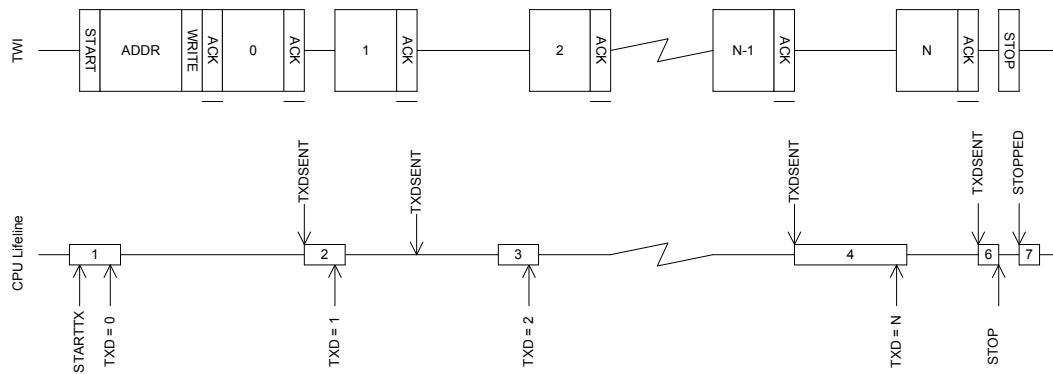

**Figure 165: The TWI master writing data to a slave**

The TWI master write sequence is stopped when the STOP task is triggered whereupon the TWI master will generate a stop condition on the TWI bus.

## 48.5 Master read sequence

A TWI master read sequence is started by triggering the STARTRX task. After the STARTRX task has been triggered the TWI master will generate a start condition on the TWI bus, followed by clocking out the address and the READ/WRITE bit set to 1 (WRITE = 0, READ = 1).

The address must match the address of the slave device that the master wants to read from. The READ/WRITE bit is followed by an ACK/NACK bit (ACK=0 or NACK = 1) generated by the slave.

After having sent the ACK bit the TWI slave will send data to the master using the clock generated by the master.

The TWI master will generate a RXDRDY event every time a new byte is received in the RXD register.

After receiving a byte, the TWI master will delay sending the ACK/NACK bit by stretching the clock until the CPU has extracted the received byte, that is, by reading the RXD register.

The TWI master read sequence is stopped by triggering the STOP task. This task must be triggered before the last byte is extracted from RXD to ensure that the TWI master sends a NACK back to the slave before generating the stop condition.

A typical TWI master read sequence is illustrated in [Figure 166: The TWI master reading data from a slave](#) on page 584. Occurrence 3 in this figure illustrates delayed processing of the RXDRDY event associated with RXD byte B. In this scenario the TWI master will stretch the clock to prevent the slave from overwriting the contents of the RXD register.

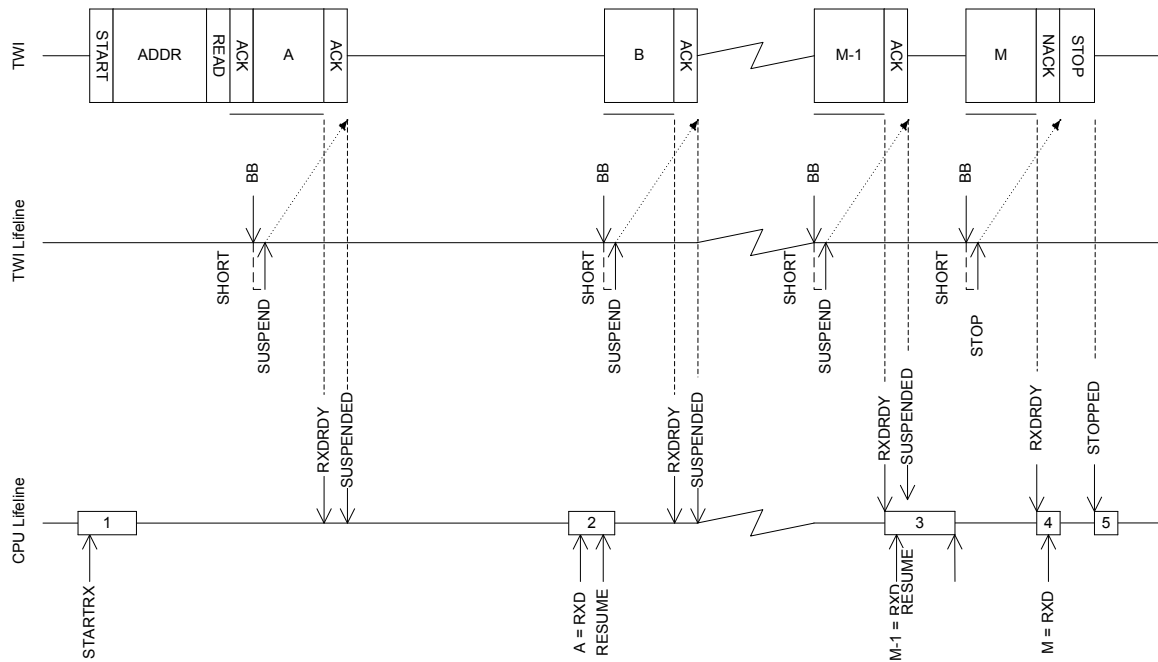


Figure 166: The TWI master reading data from a slave

## 48.6 Master repeated start sequence

A typical repeated start sequence is one in which the TWI master writes one byte to the slave followed by reading M bytes from the slave. Any combination and number of transmit and receive sequences can be combined in this fashion. Only one shortcut to STOP can be enabled at any given time.

The figure below illustrates a repeated start sequence where the TWI master writes one byte, followed by reading M bytes from the slave without performing a stop in-between.

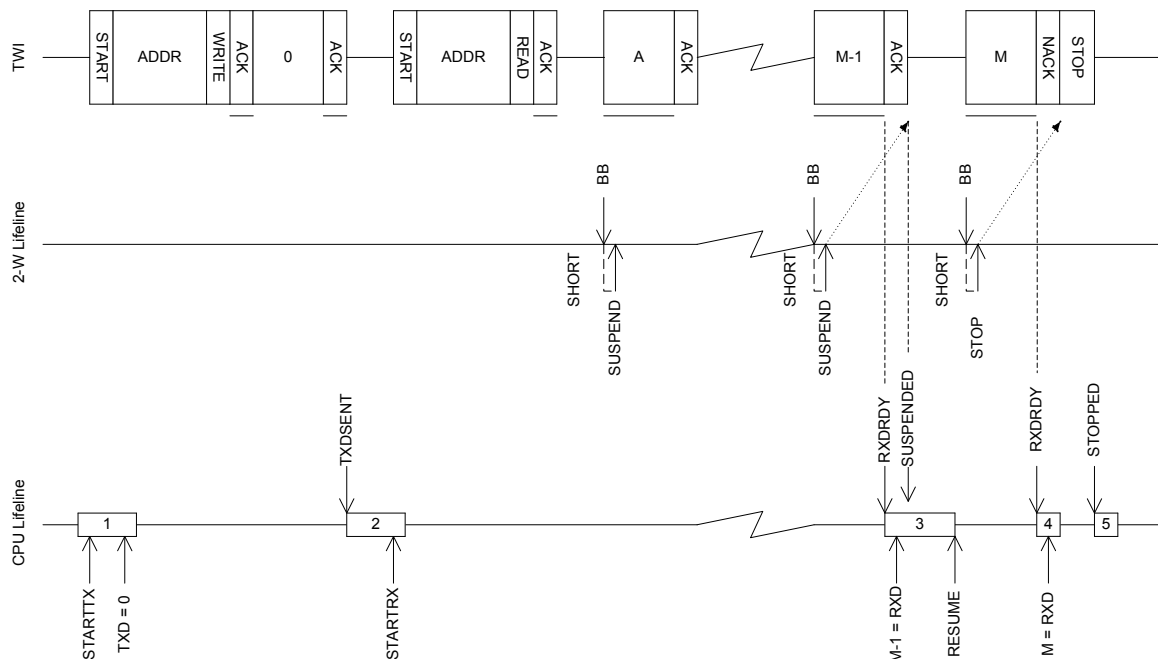


Figure 167: A repeated start sequence, where the TWI master writes one byte, followed by reading M bytes from the slave without performing a stop in-between



To generate a repeated start after a read sequence, a second start task must be triggered instead of the STOP task, that is, STARTRX or STARTTX. This start task must be triggered before the last byte is extracted from RXD to ensure that the TWI master sends a NACK back to the slave before generating the repeated start condition.

## 48.7 Low power

When putting the system in low power and the peripheral is not needed, lowest possible power consumption is achieved by stopping, and then disabling the peripheral.

The STOP task may not be always needed (the peripheral might already be stopped), but if it is sent, software shall wait until the STOPPED event was received as a response before disabling the peripheral through the ENABLE register.

## 48.8 Registers

**Table 117: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40003000	TWI	TWI0	Two-wire interface master 0	Deprecated
0x40004000	TWI	TWI1	Two-wire interface master 1	Deprecated

**Table 118: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start TWI receive sequence
TASKS_STARTTX	0x008	Start TWI transmit sequence
TASKS_STOP	0x014	Stop TWI transaction
TASKS_SUSPEND	0x01C	Suspend TWI transaction
TASKS_RESUME	0x020	Resume TWI transaction
EVENTS_STOPPED	0x104	TWI stopped
EVENTS_RXDREADY	0x108	TWI RXD byte received
EVENTS_TXDSENT	0x11C	TWI TXD byte sent
EVENTS_ERROR	0x124	TWI error
EVENTS_BB	0x138	TWI byte boundary, generated before each byte that is sent or received
EVENTS_SUSPENDED	0x148	TWI entered the suspended state
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x4C4	Error source
ENABLE	0x500	Enable TWI
PSEL_SCL	0x508	Pin select for SCL
PSEL_SDA	0x50C	Pin select for SDA
RXD	0x518	RXD register
TXD	0x51C	TXD register
FREQUENCY	0x524	TWI frequency. Accuracy depends on the HFCLK source selected.
ADDRESS	0x588	Address used in the TWI transfer

### 48.8.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	BB SUSPEND				Shortcut between BB event and SUSPEND task																													

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																						B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
B	RW	BB_STOP				See <a href="#">EVENTS_BB</a> and <a href="#">TASKS_SUSPEND</a>																																	
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		
			Shortcut between BB event and STOP task																																				
						See <a href="#">EVENTS_BB</a> and <a href="#">TASKS_STOP</a>																																	
			Disabled	0	Disable shortcut																																		
			Enabled	1	Enable shortcut																																		

## 48.8.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id														F		E		D		C				B		A								
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	RW	STOPPED			Write '1' to Enable interrupt for STOPPED event																													
					See <a href="#">EVENTS_STOPPED</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
B	RW	RXDREADY			Write '1' to Enable interrupt for RXDREADY event																													
					See <a href="#">EVENTS_RXDREADY</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
C	RW	TXDSENT			Write '1' to Enable interrupt for TXDSENT event																													
					See <a href="#">EVENTS_TXDSENT</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
D	RW	ERROR			Write '1' to Enable interrupt for ERROR event																													
					See <a href="#">EVENTS_ERROR</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
E	RW	BB			Write '1' to Enable interrupt for BB event																													
					See <a href="#">EVENTS_BB</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														
F	RW	SUSPENDED			Write '1' to Enable interrupt for SUSPENDED event																													
					See <a href="#">EVENTS_SUSPENDED</a>																													
			Set	1	Enable																													
			Disabled	0	Read: Disabled																													
		Enabled	1	Read: Enabled																														

## 48.8.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																				F		E				D		C				B		A				
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	STOPPED				Write '1' to Disable interrupt for STOPPED event																																
						See <a href="#">EVENTS_STOPPED</a>																																
			Clear	1		Disable																																
			Disabled	0		Read: Disabled																																
B	RW	RXDREADY	Enabled	1		Read: Enabled																																
						Write '1' to Disable interrupt for RXDREADY event																																
						See <a href="#">EVENTS_RXDREADY</a>																																
			Clear	1		Disable																																
C	RW	TXDSENT	Disabled	0		Read: Disabled																																
			Enabled	1		Read: Enabled																																
						Write '1' to Disable interrupt for TXDSENT event																																
						See <a href="#">EVENTS_TXDSENT</a>																																
D	RW	ERROR	Clear	1		Disable																																
			Disabled	0		Read: Disabled																																
			Enabled	1		Read: Enabled																																
						Write '1' to Disable interrupt for ERROR event																																
E	RW	BB				See <a href="#">EVENTS_ERROR</a>																																
			Clear	1		Disable																																
			Disabled	0		Read: Disabled																																
			Enabled	1		Read: Enabled																																
F	RW	SUSPENDED				Write '1' to Disable interrupt for BB event																																
						See <a href="#">EVENTS_BB</a>																																
			Clear	1		Disable																																
			Disabled	0		Read: Disabled																																
			Enabled	1		Read: Enabled																																
						Write '1' to Disable interrupt for SUSPENDED event																																
						See <a href="#">EVENTS_SUSPENDED</a>																																
			Clear	1		Disable																																
			Disabled	0		Read: Disabled																																
			Enabled	1		Read: Enabled																																

## 48.8.4 ERRORSRC

Address offset: 0x4C4

Error source

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OVERRUN				Overflow error																													
						A new byte was received before previous byte got read by software from the RXD register. (Previous data is lost)																													
			NotPresent	0	Read: no overrun occurred																														
			Present	1	Read: overrun occurred																														
B	RW	ANACK				NACK received after sending the address (write '1' to clear)																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
C	RW	DNACK				NACK received after sending a data byte (write '1' to clear)																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														

### 48.8.5 ENABLE

Address offset: 0x500

## Enable TWI

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																												
A	RW	ENABLE					Enable or disable TWI																												
			Disabled	0			Disable TWI																												
			Enabled	5			Enable TWI																												

### 48.8.6 PSEL.SCL

Address offset: 0x508

### Pin select for SCL

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value	Id	Value																												Description		
A	RW	PIN			[0..31]																												Pin number		
B	RW	PORT			[0..1]																												Port number		
C	RW	CONNECT																															Connection		
			Disconnected		1																												Disconnect		
			Connected		0																												Connect		

### 48.8.7 PSEL.SDA

Address offset: 0x50C

### Pin select for SDA

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value	Id	Value		Description																												
A	RW	PIN			[0..31]		Pin number																												
B	RW	PORT			[0..1]		Port number																												
C	RW	CONNECT					Connection																												
			Disconnected		1		Disconnect																												
			Connected		0		Connect																												

### 48.8.8 RXD

Address offset: 0x518

RXD register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A																														

### 48.8.9 TXD

Address offset: 0x51C

TXD register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value			Description																											
A	RW	TXD						TXD register																											

## 48.8.10 FREQUENCY

Address offset: 0x524

TWI frequency. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	FREQUENCY				TWI master clock frequency																													
			K100		0x01980000	100 kbps																													
			K250		0x04000000	250 kbps																													
			K400		0x06680000	400 kbps (actual rate 410.256 kbps)																													

## 48.8.11 ADDRESS

Address offset: 0x588

Address used in the TWI transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	ADDRESS							Address used in the TWI transfer																										

## 48.9 Electrical specification

### 48.9.1 TWI interface electrical specifications


Symbol	Description	Min.	Typ.	Max.	Units
f <sub>TWI,SCL</sub>	Bit rates for TWI <sup>38</sup>	100		400	kbps
I <sub>TWI,100kbps</sub>	Run current for TWI, 100 kbps		50		μA
I <sub>TWI,400kbps</sub>	Run current for TWI, 400 kbps		50		μA
t <sub>TWI,START</sub>	Time from STARTRX/STARTTX task to transmission started		1.5		μs

### 48.9.2 Two Wire Interface (TWI) timing specifications

Symbol	Description	Min.	Typ.	Max.	Units
t <sub>TWI,SU_DAT</sub>	Data setup time before positive edge on SCL – all modes	300			ns
t <sub>TWI,HD_DAT</sub>	Data hold time after negative edge on SCL – all modes	500			ns
t <sub>TWI,HD_STA,100kbps</sub>	TWI master hold time for START and repeated START condition, 100 kbps	10000			ns
t <sub>TWI,HD_STA,250kbps</sub>	TWI master hold time for START and repeated START condition, 250kbps	4000			ns
t <sub>TWI,HD_STA,400kbps</sub>	TWI master hold time for START and repeated START condition, 400 kbps	2500			ns
t <sub>TWI,SU_STO,100kbps</sub>	TWI master setup time from SCL high to STOP condition, 100 kbps	5000			ns
t <sub>TWI,SU_STO,250kbps</sub>	TWI master setup time from SCL high to STOP condition, 250 kbps	2000			ns

<sup>38</sup> High bit rates or stronger pull-ups may require GPIOs to be set as High Drive, see GPIO chapter for more details.

Symbol	Description	Min.	Typ.	Max.	Units
$t_{TWI,SU\_STO,400\text{kbps}}$	TWI master setup time from SCL high to STOP condition, 400 kbps	1250			ns
$t_{TWI,BUF,100\text{kbps}}$	TWI master bus free time between STOP and START conditions, 100 kbps	5800			ns
$t_{TWI,BUF,250\text{kbps}}$	TWI master bus free time between STOP and START conditions, 250 kbps	2700			ns
$t_{TWI,BUF,400\text{kbps}}$	TWI master bus free time between STOP and START conditions, 400 kbps	2100			ns

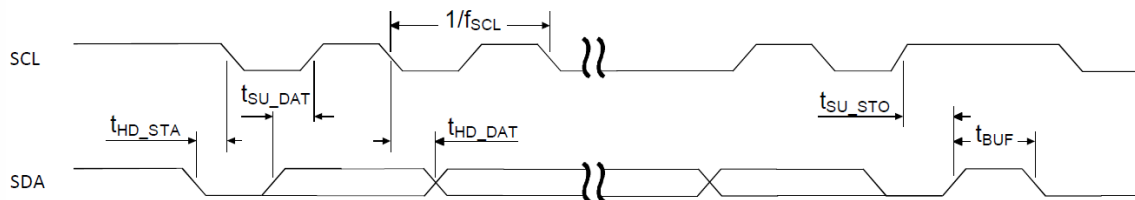

**Figure 168: TWI timing diagram, 1 byte transaction**

## 49 UART — Universal asynchronous receiver/ transmitter

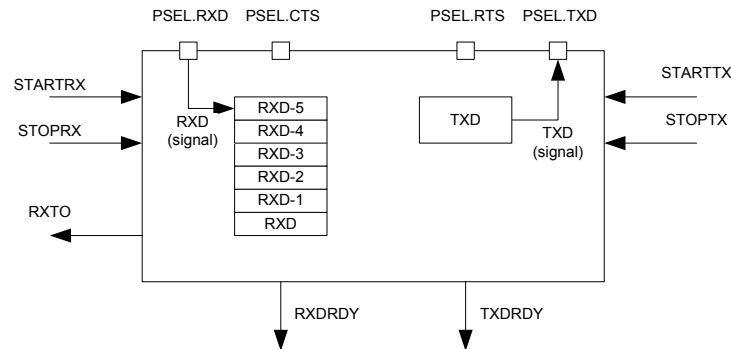


Figure 169: UART configuration

### 49.1 Functional description

Listed here are the main features of UART.

The UART implements support for the following features:

- Full-duplex operation
- Automatic flow control
- Parity checking and generation for the 9<sup>th</sup> data bit

As illustrated in [Figure 169: UART configuration](#) on page 591, the UART uses the TXD and RXD registers directly to transmit and receive data. The UART uses one stop bit.

### 49.2 Pin configuration

The different signals RXD, CTS (Clear To Send, active low), RTS (Request To Send, active low), and TXD associated with the UART are mapped to physical pins according to the configuration specified in the PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers respectively.

If the CONNECT field of a PSEL.xxx register is set to Disconnected, the associated UART signal will not be connected to any physical pin. The PSEL.RXD, PSEL.CTS, PSEL.RTS, and PSEL.TXD registers and their configurations are only used as long as the UART is enabled, and retained only for the duration the device is in ON mode. PSEL.RXD, PSEL.CTS, PSEL.RTS and PSEL.TXD must only be configured when the UART is disabled.

To secure correct signal levels on the pins by the UART when the system is in OFF mode, the pins must be configured in the GPIO peripheral as described in [Pin configuration](#) on page 591.

Only one peripheral can be assigned to drive a particular GPIO pin at a time. Failing to do so may result in unpredictable behavior.

Table 119: GPIO configuration

UART pin	Direction	Output value
RXD	Input	Not applicable
CTS	Input	Not applicable
RTS	Output	1
TXD	Output	1

## 49.3 Shared resources

The UART shares registers and other resources with other peripherals that have the same ID as the UART.

Therefore, you must disable all peripherals that have the same ID as the UART before the UART can be configured and used. Disabling a peripheral that has the same ID as the UART will not reset any of the registers that are shared with the UART. It is therefore important to configure all relevant UART registers explicitly to ensure that it operates correctly.


See the Instantiation table in [Instantiation](#) on page 23 for details on peripherals and their IDs.

## 49.4 Transmission

A UART transmission sequence is started by triggering the STARTTX task.

Bytes are transmitted by writing to the TXD register. When a byte has been successfully transmitted the UART will generate a TXDRDY event after which a new byte can be written to the TXD register. A UART transmission sequence is stopped immediately by triggering the STOPTX task.

If flow control is enabled a transmission will be automatically suspended when CTS is deactivated and resumed when CTS is activated again, as illustrated in [Figure 170: UART transmission](#) on page 592. A byte that is in transmission when CTS is deactivated will be fully transmitted before the transmission is suspended. For more information, see [Suspending the UART](#) on page 593.

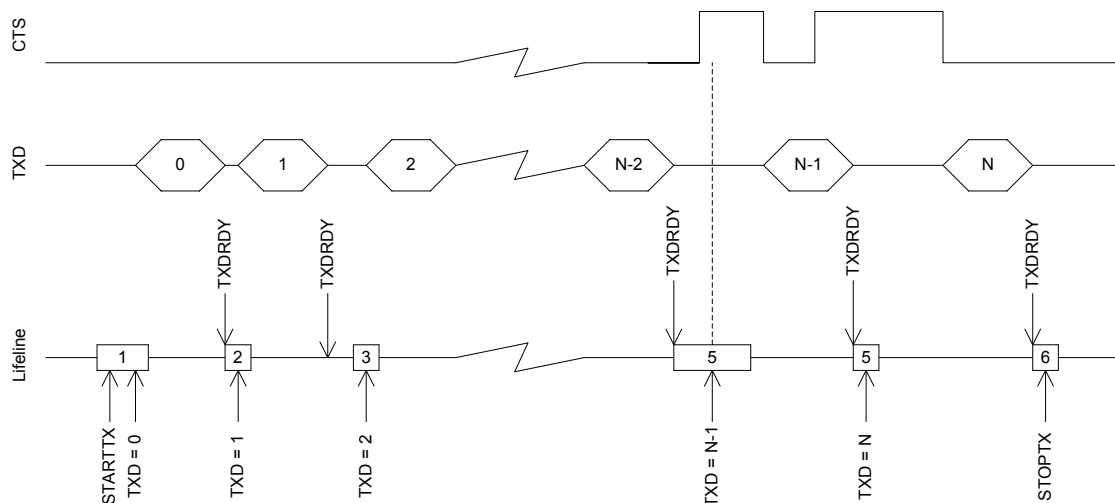

**Figure 170: UART transmission**

## 49.5 Reception

A UART reception sequence is started by triggering the STARTRX task.

The UART receiver chain implements a FIFO capable of storing six incoming RXD bytes before data is overwritten. Bytes are extracted from this FIFO by reading the RXD register. When a byte is extracted from the FIFO a new byte pending in the FIFO will be moved to the RXD register. The UART will generate an RXDRDY event every time a new byte is moved to the RXD register.

When flow control is enabled, the UART will deactivate the RTS signal when there is only space for four more bytes in the receiver FIFO. The counterpart transmitter is therefore able to send up to four bytes after the RTS signal is deactivated before data is being overwritten. To prevent overwriting data in the FIFO, the counterpart UART transmitter must therefore make sure to stop transmitting data within four bytes after the RTS line is deactivated.




The RTS signal will first be activated again when the FIFO has been emptied, that is, when all bytes in the FIFO have been read by the CPU, see [Figure 171: UART reception](#) on page 593.

The RTS signal will also be deactivated when the receiver is stopped through the STOPRX task as illustrated in [Figure 171: UART reception](#) on page 593. The UART is able to receive four to five additional bytes if they are sent in succession immediately after the RTS signal has been deactivated. This is possible because the UART is, even after the STOPRX task is triggered, able to receive bytes for an extended period of time dependent on the configured baud rate. The UART will generate a receiver timeout event (RXTO) when this period has elapsed.

To prevent loss of incoming data the RXD register must only be read one time following every RXDRDY event.

To secure that the CPU can detect all incoming RXDRDY events through the RXDRDY event register, the RXDRDY event register must be cleared before the RXD register is read. The reason for this is that the UART is allowed to write a new byte to the RXD register, and therefore can also generate a new event, immediately after the RXD register is read (emptied) by the CPU.

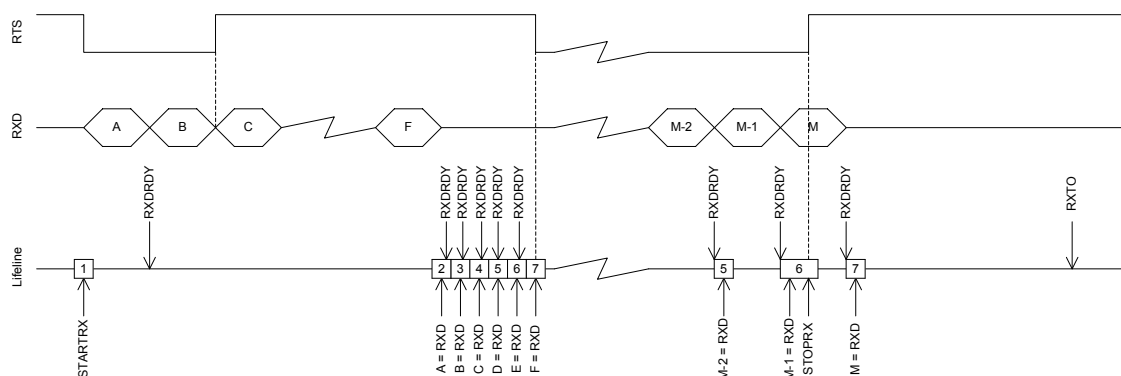

### Figure 171: UART reception

As indicated in occurrence 2 in the figure, the RXDRDY event associated with byte B is generated first after byte A has been extracted from RXD.

## 49.6 Suspending the UART

The UART can be suspended by triggering the SUSPEND task.

SUSPEND will affect both the UART receiver and the UART transmitter, i.e. the transmitter will stop transmitting and the receiver will stop receiving. UART transmission and reception can be resumed, after being suspended, by triggering STARTTX and STARTRX respectively.

Following a SUSPEND task, an ongoing TXD byte transmission will be completed before the UART is suspended.

When the SUSPEND task is triggered, the UART receiver will behave in the same way as it does when the STOPRX task is triggered.

## 49.7 Error conditions

An ERROR event, in the form of a framing error, will be generated if a valid stop bit is not detected in a frame. Another ERROR event, in the form of a break condition, will be generated if the RXD line is held active low for longer than the length of a data frame. Effectively, a framing error is always generated before a break condition occurs.

## 49.8 Using the UART without flow control

If flow control is not enabled, the interface will behave as if the CTS and RTS lines are kept active all the time.

## 49.9 Parity configuration

When parity is enabled, the parity will be generated automatically from the even parity of TXD and RXD for transmission and reception respectively.

## 49.10 Registers

**Table 120: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40002000	UART	UART0	Universal asynchronous receiver/ transmitter	Deprecated

**Table 121: Register Overview**

Register	Offset	Description
TASKS_STARTRX	0x000	Start UART receiver
TASKS_STOPRX	0x004	Stop UART receiver
TASKS_STARTTX	0x008	Start UART transmitter
TASKS_STOPTX	0x00C	Stop UART transmitter
TASKS_SUSPEND	0x01C	Suspend UART
EVENTS_CTS	0x100	CTS is activated (set low). Clear To Send.
EVENTS_NCTS	0x104	CTS is deactivated (set high). Not Clear To Send.
EVENTS_RXDRDY	0x108	Data received in RXD
EVENTS_TXDRDY	0x11C	Data sent from TXD
EVENTS_ERROR	0x124	Error detected
EVENTS_RXTO	0x144	Receiver timeout
SHORTS	0x200	Shortcut register
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ERRORSRC	0x480	Error source
ENABLE	0x500	Enable UART
PSELRTS	0x508	Pin select for RTS
PSELTXD	0x50C	Pin select for TXD
PSELCTS	0x510	Pin select for CTS
PSELRXD	0x514	Pin select for RXD
RXD	0x518	RXD register
TXD	0x51C	TXD register
BAUDRATE	0x524	Baud rate. Accuracy depends on the HFCLK source selected.
CONFIG	0x56C	Configuration of parity and hardware flow control

### 49.10.1 SHORTS

Address offset: 0x200

Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																																			
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CTS_STARTRX				Shortcut between CTS event and STARTRX task																													

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
B	RW	NCTS_STOPRX				See <a href="#">EVENTS_CTS</a> and <a href="#">TASKS_STARTRX</a>																													
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														
			Shortcut between NCTS event and STOPRX task																																
						See <a href="#">EVENTS_NCTS</a> and <a href="#">TASKS_STOPRX</a>																													
			Disabled	0	Disable shortcut																														
			Enabled	1	Enable shortcut																														

## 49.10.2 INTENSET

Address offset: 0x304

Enable interrupt

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																		F						E		D						C	B	A
Reset 0x00000000		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																												
A	RW	CTS				Write '1' to Enable interrupt for CTS event																												
						See <a href="#">EVENTS_CTS</a>																												
			Set	1		Enable																												
			Disabled	0		Read: Disabled																												
B	RW	NCTS	Enabled	1		Read: Enabled																												
						Write '1' to Enable interrupt for NCTS event																												
						See <a href="#">EVENTS_NCTS</a>																												
			Set	1		Enable																												
C	RW	RXDRDY	Disabled	0		Read: Disabled																												
			Enabled	1		Read: Enabled																												
						Write '1' to Enable interrupt for RXDRDY event																												
						See <a href="#">EVENTS_RXDRDY</a>																												
D	RW	TXDRDY	Set	1		Enable																												
			Disabled	0		Read: Disabled																												
			Enabled	1		Read: Enabled																												
						Write '1' to Enable interrupt for TXDRDY event																												
E	RW	ERROR				See <a href="#">EVENTS_TXDRDY</a>																												
						Write '1' to Enable interrupt for ERROR event																												
						See <a href="#">EVENTS_ERROR</a>																												
			Set	1		Enable																												
F	RW	RXTO	Disabled	0		Read: Disabled																												
			Enabled	1		Read: Enabled																												
						Write '1' to Enable interrupt for RXTO event																												
						See <a href="#">EVENTS_RXTO</a>																												
			Set	1		Enable																												
			Disabled	0		Read: Disabled																												
			Enabled	1		Read: Enabled																												

## 49.10.3 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id												F					E					D					C						
Reset 0x00000000		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																											
A	RW	CTS				Write '1' to Disable interrupt for CTS event																											
						See <a href="#">EVENTS_CTS</a>																											
			Clear	1		Disable																											
			Disabled	0		Read: Disabled																											
B	RW	NCTS	Enabled	1		Read: Enabled																											
						Write '1' to Disable interrupt for NCTS event																											
						See <a href="#">EVENTS_NCTS</a>																											
			Clear	1		Disable																											
C	RW	RXDRDY	Disabled	0		Read: Disabled																											
			Enabled	1		Read: Enabled																											
						Write '1' to Disable interrupt for RXDRDY event																											
						See <a href="#">EVENTS_RXDRDY</a>																											
D	RW	TXDRDY	Clear	1		Disable																											
			Disabled	0		Read: Disabled																											
			Enabled	1		Read: Enabled																											
						Write '1' to Disable interrupt for TXDRDY event																											
E	RW	ERROR				See <a href="#">EVENTS_TXDRDY</a>																											
			Clear	1		Disable																											
			Disabled	0		Read: Disabled																											
			Enabled	1		Read: Enabled																											
F	RW	RXTO				Write '1' to Disable interrupt for ERROR event																											
						See <a href="#">EVENTS_ERROR</a>																											
			Clear	1		Disable																											
			Disabled	0		Read: Disabled																											
			Enabled	1		Read: Enabled																											
						Write '1' to Disable interrupt for RXTO event																											
						See <a href="#">EVENTS_RXTO</a>																											
			Clear	1		Disable																											
			Disabled	0		Read: Disabled																											
			Enabled	1		Read: Enabled																											

## 49.10.4 ERRORSRC

Address offset: 0x480

Error source

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	OVERRUN				Overrun error																													
						A start bit is received while the previous data still lies in RXD. (Previous data is lost.)																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
B	RW	PARITY				Parity error																													
						A character with bad parity is received, if HW parity check is enabled.																													
			NotPresent	0	Read: error not present																														
			Present	1	Read: error present																														
C	RW	FRAMING				Framing error occurred																													



## 49.10.8 PSEL.CTS

Address offset: 0x510

Pin select for CTS

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0						
Id				C																																B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1						
Id	RW	Field	Value Id	Value	Description																																				
A	RW	PIN		[0..31]	Pin number																																				
B	RW	PORT		[0..1]	Port number																																				
C	RW	CONNECT			Connection																																				
			Disconnected	1	Disconnect																																				
			Connected	0	Connect																																				

## 49.10.9 PSEL.RXD

Address offset: 0x514

Pin select for RXD

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				C																																		
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1			
Id	RW	Field	Value Id	Value		Description																																
A	RW	PIN		[0..31]		Pin number																																
B	RW	PORT		[0..1]		Port number																																
C	RW	CONNECT				Connection																																
			Disconnected	1		Disconnect																																
			Connected	0		Connect																																

## 49.10.10 RXD

Address offset: 0x518

RXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0												
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Id	RW	Field	Value Id	Value				Description																																							
A	R	RXD						RX data received in previous transfers, double buffered																																							

## 49.10.11 TXD

Address offset: 0x51C

TXD register

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
Id																												A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A

## 49.10.12 BAUDRATE

Address offset: 0x524

Baud rate. Accuracy depends on the HFCLK source selected.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x04000000				0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	BAUDRATE			Baud rate																														
			Baud1200	0x0004F000	1200 baud (actual rate: 1205)																														
			Baud2400	0x0009D000	2400 baud (actual rate: 2396)																														
			Baud4800	0x0013B000	4800 baud (actual rate: 4808)																														
			Baud9600	0x00275000	9600 baud (actual rate: 9598)																														
			Baud14400	0x003B0000	14400 baud (actual rate: 14414)																														
			Baud19200	0x004EA000	19200 baud (actual rate: 19208)																														
			Baud28800	0x0075F000	28800 baud (actual rate: 28829)																														
			Baud31250	0x00800000	31250 baud																														
			Baud38400	0x009D5000	38400 baud (actual rate: 38462)																														
			Baud56000	0x00E50000	56000 baud (actual rate: 55944)																														
			Baud57600	0x00EBF000	57600 baud (actual rate: 57762)																														
			Baud76800	0x013A9000	76800 baud (actual rate: 76923)																														
			Baud115200	0x01D7E000	115200 baud (actual rate: 115942)																														
			Baud230400	0x03AFB000	230400 baud (actual rate: 231884)																														
			Baud250000	0x04000000	250000 baud																														
			Baud460800	0x075F7000	460800 baud (actual rate: 470588)																														
			Baud921600	0x0EBED000	921600 baud (actual rate: 941176)																														
			Baud1M	0x10000000	1Mega baud																														

### 49.10.13 CONFIG

Address offset: 0x56C

Configuration of parity and hardware flow control

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																																	B	B	B	A		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
A	RW	HWFC			Hardware flow control																																	
			Disabled	0	Disabled																																	
			Enabled	1	Enabled																																	
B	RW	PARITY			Parity																																	
			Excluded	0x0	Exclude parity bit																																	
			Included	0x7	Include parity bit																																	

## 49.11 Electrical specification

### 49.11.1 UART electrical specification

Symbol	Description	Min.	Typ.	Max.	Units
$f_{\text{UART}}$	Baud rate for UART <sup>39</sup> .			1000	kbps
$I_{\text{UART1M}}$	Run current at max baud rate.		55		μA
$I_{\text{UART115k}}$	Run current at 115200 bps.		55		μA
$I_{\text{UART1k2}}$	Run current at 1200 bps.		55		μA
$I_{\text{UART,IDLE}}$	Idle current for UART		1		μA
$t_{\text{UART,CTSH}}$	CTS high time	1			μs
$t_{\text{UART,START}}$	Time from STARTRX/STARTTX task to transmission started		1		μs

<sup>39</sup> High baud rates may require GPIOs to be set as High Drive, see GPIO chapter for more details.


## 50 ACL — Access control lists

The Access control lists (ACL) peripheral is designed to assign and enforce access permissions to different regions of the on-chip flash memory map.

Flash memory regions can be assigned individual ACL permission schemes. The following registers are involved:

- PERM register, where the permissions are configured.
- ADDR register, where the word-aligned start address for the flash page is defined.
- SIZE register, where the size of the region the permissions are applied to is determined.

**Important:** The size of the region in bytes is restricted to a multiple of the flash page size. See the [Memory](#) on page 20 chapter for more information.

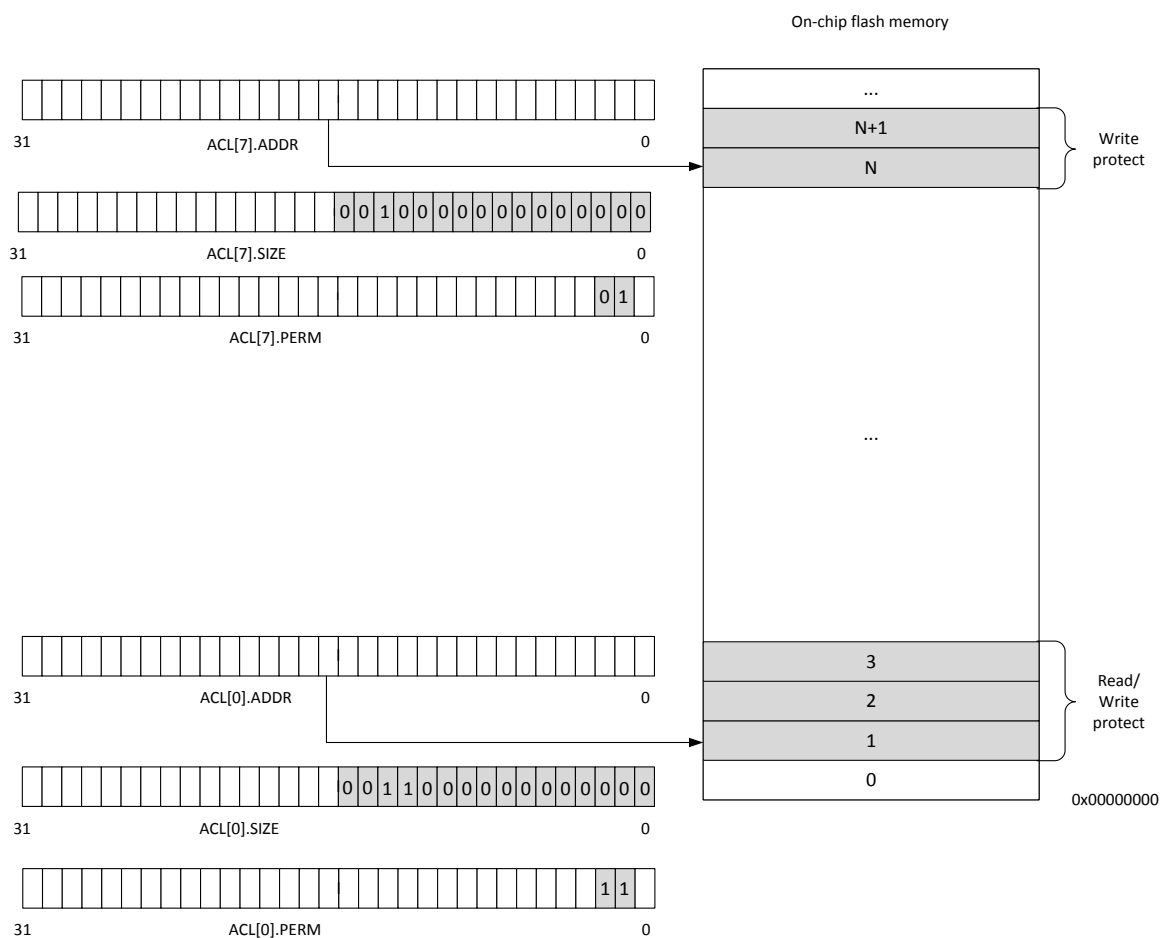

**Figure 172: Protected regions of on-chip flash memory**

There are four defined ACL permission schemes, with different combinations of read/write permissions:

**Table 122: Permission schemes**

Read	Write	Protection description
0	0	No protection. Entire region can be executed, read, written or erased.
0	1	Region can be executed and read, but not written or erased.
1	0	Region can be written and erased, but not executed or read.
1	1	Region is locked for all access until next reset.

**Important:** If a permission violation to a protected region is detected by the ACL peripheral, the request is blocked and a Bus Fault exception is triggered.



Access control to a configured region is enforced by the hardware two CPU clock cycles after the ADDR, SIZE, and PERM registers for an ACL instance have been successfully written. The protection is only enforced if a valid start address of the flash page boundary is written into the ADDR register, and the values of the SIZE and PERM registers are not zero.

The ADDR, SIZE, and PERM registers can only be written once. All ACL configuration registers are cleared on reset (by resetting the device from any reset source), which is also the only way of clearing the configuration registers. To ensure that the desired permission schemes are always enforced by the ACL peripheral, the device boot sequence must perform the necessary configuration.

The protection mechanism for regions is by default turned off when in debug interface mode, and the DISABLEINDEBUG register is set to "Disabled". See the [Debug and trace](#) on page 62 chapter for more information.

## 50.1 Registers

**Table 123: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x4001E000	ACL	ACL	Access control lists	

**Table 124: Register Overview**

Register	Offset	Description	
<a href="#">DISABLEINDEBUG</a>	0x704	Disable all ACL protection mechanisms for regions while in debug mode	
<a href="#">ACL[0].ADDR</a>	0x800	Configure the word-aligned start address of region 0 to protect	
<a href="#">ACL[0].SIZE</a>	0x804	Size of region to protect counting from address ACL[0].ADDR. Write '0' as no effect.	
<a href="#">ACL[0].PERM</a>	0x808	Access permissions for region 0 as defined by start address ACL[0].ADDR and size ACL[0].SIZE	
	0x80C		Reserved
<a href="#">ACL[1].ADDR</a>	0x810	Configure the word-aligned start address of region 1 to protect	
<a href="#">ACL[1].SIZE</a>	0x814	Size of region to protect counting from address ACL[1].ADDR. Write '0' as no effect.	
<a href="#">ACL[1].PERM</a>	0x818	Access permissions for region 1 as defined by start address ACL[1].ADDR and size ACL[1].SIZE	
	0x81C		Reserved
<a href="#">ACL[2].ADDR</a>	0x820	Configure the word-aligned start address of region 2 to protect	
<a href="#">ACL[2].SIZE</a>	0x824	Size of region to protect counting from address ACL[2].ADDR. Write '0' as no effect.	
<a href="#">ACL[2].PERM</a>	0x828	Access permissions for region 2 as defined by start address ACL[2].ADDR and size ACL[2].SIZE	
	0x82C		Reserved
<a href="#">ACL[3].ADDR</a>	0x830	Configure the word-aligned start address of region 3 to protect	
<a href="#">ACL[3].SIZE</a>	0x834	Size of region to protect counting from address ACL[3].ADDR. Write '0' as no effect.	
<a href="#">ACL[3].PERM</a>	0x838	Access permissions for region 3 as defined by start address ACL[3].ADDR and size ACL[3].SIZE	
	0x83C		Reserved
<a href="#">ACL[4].ADDR</a>	0x840	Configure the word-aligned start address of region 4 to protect	
<a href="#">ACL[4].SIZE</a>	0x844	Size of region to protect counting from address ACL[4].ADDR. Write '0' as no effect.	
<a href="#">ACL[4].PERM</a>	0x848	Access permissions for region 4 as defined by start address ACL[4].ADDR and size ACL[4].SIZE	
	0x84C		Reserved
<a href="#">ACL[5].ADDR</a>	0x850	Configure the word-aligned start address of region 5 to protect	
<a href="#">ACL[5].SIZE</a>	0x854	Size of region to protect counting from address ACL[5].ADDR. Write '0' as no effect.	
<a href="#">ACL[5].PERM</a>	0x858	Access permissions for region 5 as defined by start address ACL[5].ADDR and size ACL[5].SIZE	
	0x85C		Reserved
<a href="#">ACL[6].ADDR</a>	0x860	Configure the word-aligned start address of region 6 to protect	
<a href="#">ACL[6].SIZE</a>	0x864	Size of region to protect counting from address ACL[6].ADDR. Write '0' as no effect.	
<a href="#">ACL[6].PERM</a>	0x868	Access permissions for region 6 as defined by start address ACL[6].ADDR and size ACL[6].SIZE	
	0x86C		Reserved
<a href="#">ACL[7].ADDR</a>	0x870	Configure the word-aligned start address of region 7 to protect	
<a href="#">ACL[7].SIZE</a>	0x874	Size of region to protect counting from address ACL[7].ADDR. Write '0' as no effect.	
<a href="#">ACL[7].PERM</a>	0x878	Access permissions for region 7 as defined by start address ACL[7].ADDR and size ACL[7].SIZE	
	0x87C		Reserved

### 50.1.1 DISABLEINDEBUDG

Address offset: 0x704

Disable all ACL protection mechanisms for regions while in debug mode

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000001				0 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	DISABLEINDEBUDG			Disable the protection mechanism for regions while in debug mode.																														
			Disabled	1	ACL is disabled in debug mode																														
			Enabled	0	ACL is enabled in debug mode																														

### 50.1.2 ACL[0].ADDR

Address offset: 0x800

Configure the word-aligned start address of region 0 to protect

This register can only be written once.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ADDR			Valid word-aligned start address of region 0 to protect. Address must point to a flash page boundary.																														

### 50.1.3 ACL[0].SIZE

Address offset: 0x804

Size of region to protect counting from address ACL[0].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SIZE			Size of flash region 0 in bytes. Must be a multiple of the flash page size.																														

### 50.1.4 ACL[0].PERM

Address offset: 0x808

Access permissions for region 0 as defined by start address ACL[0].ADDR and size ACL[0].SIZE

This register can only be written once.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				C	B
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value	Description																																
B	RW	WRITE			Configure write and erase permissions for region 0. Write '0' has no effect.																																
			Enable	0	Allow write and erase instructions to region 0																																
			Disable	1	Block write and erase instructions to region 0																																
C	RW	READ			Configure read permissions for region 0. Write '0' has no effect.																																
			Enable	0	Allow read instructions to region 0																																
			Disable	1	Block read instructions to region 0																																

### 50.1.5 ACL[1].ADDR

Address offset: 0x810

Configure the word-aligned start address of region 1 to protect

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	ADDR			Valid word-aligned start address of region 1 to protect. Address must point to a flash page boundary.																															

### 50.1.6 ACL[1].SIZE

Address offset: 0x814

Size of region to protect counting from address ACL[1].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field		Value Id	Value				Description																											
A	RW	SIZE							Size of flash region 1 in bytes. Must be a multiple of the flash page size.																											

### 50.1.7 ACL[1].PERM

Address offset: 0x818

Access permissions for region 1 as defined by start address ACL[1].ADDR and size ACL[1].SIZE

This register can only be written once.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	C	B	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																														
B	RW	WRITE			Configure write and erase permissions for region 1. Write '0' has no effect.																														
			Enable	0	Allow write and erase instructions to region 1																														
			Disable	1	Block write and erase instructions to region 1																														
C	RW	READ			Configure read permissions for region 1. Write '0' has no effect.																														
			Enable	0	Allow read instructions to region 1																														
			Disable	1	Block read instructions to region 1																														

### 50.1.8 ACL[2].ADDR

Address offset: 0x820

Configure the word-aligned start address of region 2 to protect

This register can only be written once.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	ADDR						Valid word-aligned start address of region 2 to protect. Address must point to a flash page boundary.																											

### 50.1.9 ACL[2].SIZE

Address offset: 0x824

Size of region to protect counting from address ACL[2].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	SIZE																														
			Value Id																													
			Value																													
			Description	Size of flash region 2 in bytes. Must be a multiple of the flash page size.																												

### 50.1.10 ACL[2].PERM

Address offset: 0x828

Access permissions for region 2 as defined by start address ACL[2].ADDR and size ACL[2].SIZE

This register can only be written once.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																C B
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
B	RW	WRITE																														
			Value Id																													
			Value																													
			Description	Configure write and erase permissions for region 2. Write '0' has no effect.																												
			Enable																													
			Disable																													
			0																													
			1																													
			Description	Allow write and erase instructions to region 2																												
			0																													
			1																													
			Description	Block write and erase instructions to region 2																												
			0																													
			1																													
			Description	Configure read permissions for region 2. Write '0' has no effect.																												
			Enable																													
			Disable																													
			0																													
			1																													
			Description	Allow read instructions to region 2																												
			0																													
			1																													
			Description	Block read instructions to region 2																												

### 50.1.11 ACL[3].ADDR

Address offset: 0x830

Configure the word-aligned start address of region 3 to protect

This register can only be written once.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	ADDR																														
			Value Id																													
			Value																													
			Description	Valid word-aligned start address of region 3 to protect. Address must point to a flash page boundary.																												

### 50.1.12 ACL[3].SIZE

Address offset: 0x834

Size of region to protect counting from address ACL[3].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	SIZE																														
			Value Id																													
			Value																													
			Description	Size of flash region 3 in bytes. Must be a multiple of the flash page size.																												



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																C	B		
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
C	RW	READ				Configure read permissions for region 4. Write '0' has no effect.																													
			Enable	0		Allow read instructions to region 4																													
			Disable	1		Block read instructions to region 4																													

### 50.1.17 ACL[5].ADDR

Address offset: 0x850

Configure the word-aligned start address of region 5 to protect

This register can only be written once.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	ADDR							Valid word-aligned start address of region 5 to protect. Address must point to a flash page boundary.																										

### 50.1.18 ACL[5].SIZE

Address offset: 0x854

Size of region to protect counting from address ACL[5].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value				Description																										
A	RW	SIZE							Size of flash region 5 in bytes. Must be a multiple of the flash page size.																										

### 50.1.19 ACL[5].PERM

Address offset: 0x858

Access permissions for region 5 as defined by start address ACL[5].ADDR and size ACL[5].SIZE

This register can only be written once.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				C B																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value	Id	Value	Description																												
B	RW	WRITE				Configure write and erase permissions for region 5. Write '0' has no effect.																												
			Enable	0		Allow write and erase instructions to region 5																												
			Disable	1		Block write and erase instructions to region 5																												
C	RW	READ				Configure read permissions for region 5. Write '0' has no effect.																												
			Enable	0		Allow read instructions to region 5																												
			Disable	1		Block read instructions to region 5																												

### 50.1.20 ACL[6].ADDR

Address offset: 0x860

Configure the word-aligned start address of region 6 to protect

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	ADDR						Valid word-aligned start address of region 6 to protect. Address must point to a flash page boundary.																												

### 50.1.21 ACL[6].SIZE

Address offset: 0x864

Size of region to protect counting from address ACL[6].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value					Description																									
A	RW	SIZE									Size of flash region 6 in bytes. Must be a multiple of the flash page size.																									

### 50.1.22 ACL[6].PERM

Address offset: 0x868

Access permissions for region 6 as defined by start address ACL[6].ADDR and size ACL[6].SIZE

This register can only be written once.

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	C B																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value	Id	Value	Description																									
B	RW	WRITE				Configure write and erase permissions for region 6. Write '0' has no effect.																									
			Enable	0		Allow write and erase instructions to region 6																									
			Disable	1		Block write and erase instructions to region 6																									
C	RW	READ				Configure read permissions for region 6. Write '0' has no effect.																									
			Enable	0		Allow read instructions to region 6																									
			Disable	1		Block read instructions to region 6																									

### 50.1.23 ACL[7].ADDR

Address offset: 0x870

Configure the word-aligned start address of region 7 to protect

This register can only be written once.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>												<b>Description</b>																		
A	RW	ADDR															Valid word-aligned start address of region 7 to protect. Address must point to a flash page boundary.																		

### 50.1.24 ACL[7].SIZE

Address offset: 0x874

Size of region to protect counting from address ACL[7].ADDR. Write '0' as no effect.

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id		Value				Description																											
A	RW	SIZE							Size of flash region 7 in bytes. Must be a multiple of the flash page size.																											

## 50.1.25 ACL[7].PERM

Address offset: 0x878

Access permissions for region 7 as defined by start address ACL[7].ADDR and size ACL[7].SIZE

This register can only be written once.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					C	B
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field		Value Id	Value		Description																															
B	RW	WRITE					Configure write and erase permissions for region 7. Write '0' has no effect.																															
			Enable	0	Allow write and erase instructions to region 7																																	
			Disable	1	Block write and erase instructions to region 7																																	
C	RW	READ					Configure read permissions for region 7. Write '0' has no effect.																															
			Enable	0	Allow read instructions to region 7																																	
			Disable	1	Block read instructions to region 7																																	



## 51 USB — Universal serial bus device

The USB device controller (USB) implements a full speed USB device function that meets 2.0 revision of the USB specification.

Listed here are the main features for USB:

- Fully compliant to [Universal Serial Bus Specification Revision 2.0](#) Full Speed part, including following Engineering Change Notices (ECNs) issued by USB Implementers Forum:
  - Pull-up/pull-down Resistors ECN
  - 5V Short Circuit Withstand Requirement Change ECN
- Implements a USB FS (full speed, 12 Mbps) device
- USB device stack available in the Nordic SDK
- On-chip transceiver
- Software controlled on-chip pull-up on D+
- 2 control (1 IN , 1 OUT), 14 bulk/interrupt (7 IN , 7 OUT) and 2 ISO (1 IN, 1 OUT) endpoints
- Supports double buffering for isochronous endpoint (IN/OUT)
- EasyDMA for all data transfers
- 64 bytes buffer size for each bulk/interrupt endpoint
- Up to 1023 bytes buffer size for ISO endpoints


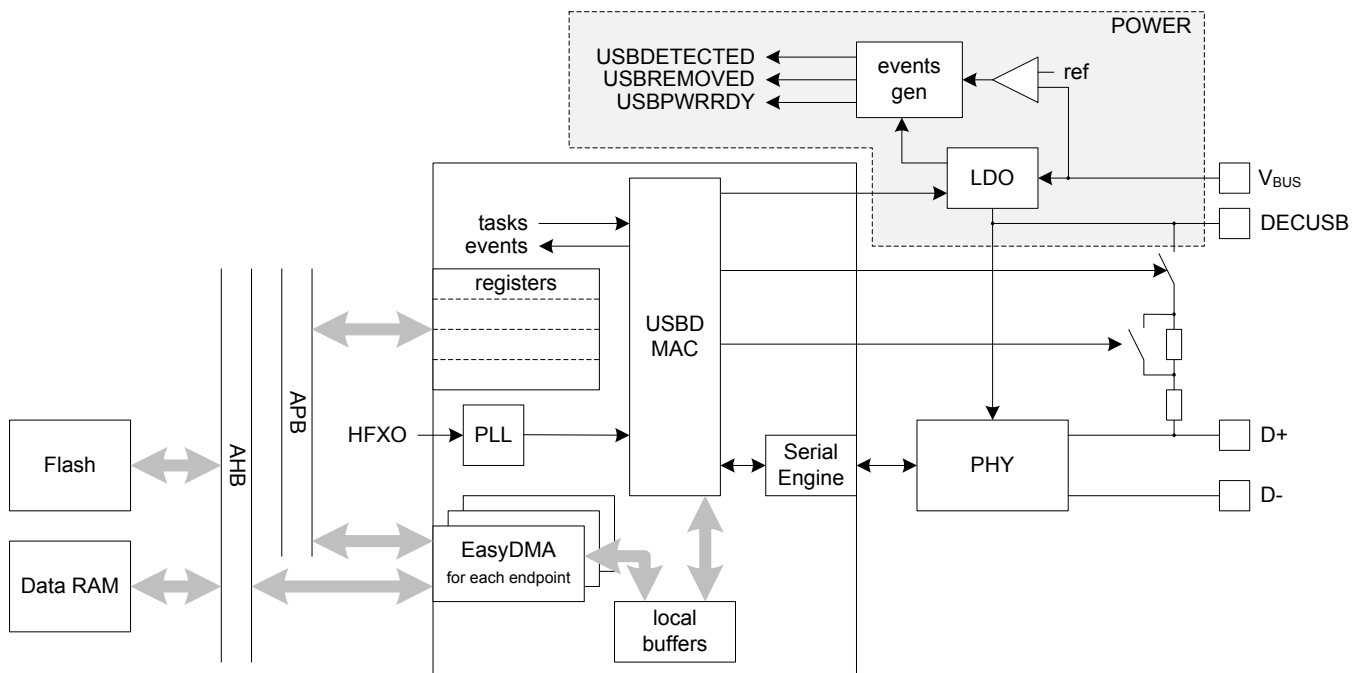


Figure 173: USB block diagram

### 51.1 USB device states

The behaviour of a USB device can be modelled through a state diagram.

**Chapter 9 USB Device Framework** in the USB specification revision 2.0 defines a number of states for a USB device, illustrated below.

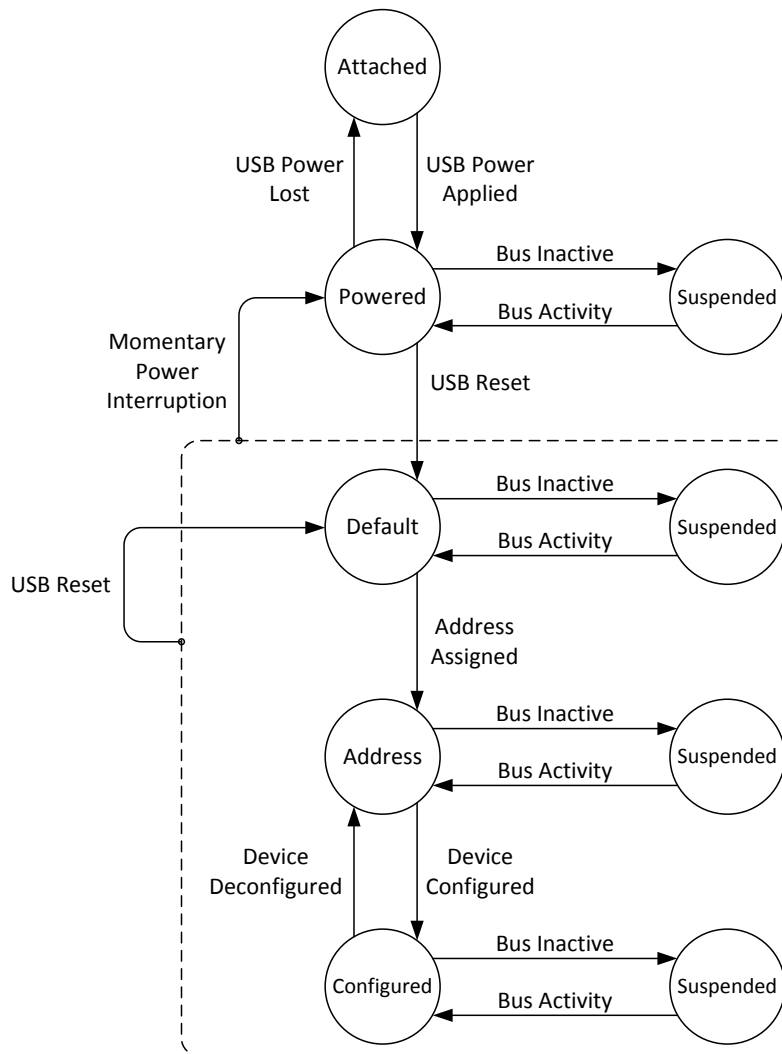

**Figure 174: Device state diagram**

The device must change state according to host-initiated traffic and USB bus states.

It is up to the software to implement a state machine that matches the above definition.

To detect the presence or absence of USB supply ( $V_{BUS}$ ), the [POWER](#) chapter defines two events USBDETECTED and USBREMOVED, they can be used to implement the state machine.

As a general rule when implementing the software, the host behavior shall never be assumed to be predictable, in particular the sequence of commands received during an enumeration. The software shall always react to the current bus conditions or commands sent by the host.

## 51.2 USB terminology

The USB specification defines bus states, rather than logic levels on the D+ and D- lines.

For a full speed device, the bus state where the D+ line is high and the D- line is low is defined as the J state. The bus state where D+ is low and D- high is called the K state.

An idle bus, where D+ and D- lines are only polarized through the pull-up on D+ and pull-downs on the host side, will be in J state.

Both lines low are called SE0 (single-ended 0), and both lines high SE1 (single-ended 1).

## 51.3 USB pins

The USB D peripheral features a number of dedicated pins.

For more information about the pinout, please refer to [Pin assignments](#) on page 13.

The dedicated USB pins can be grouped in two categories: signal and power.

For details on the USB power supply and  $V_{BUS}$  detection, refer to the [POWER](#) chapter.

The signal pins consist of the D+ and D- pins, which are to be connected to the USB host. They are dedicated pins, and not available as standard GPIOs.

The USB D implements the "5V Short Circuit Withstand ECN", which amends the original USB 2.0 Specification. This means that these two pins are not 5 V tolerant.

The signal pins and the pull-up will operate only while  $V_{BUS}$  is in its valid voltage range, and USB D is enabled through the [ENABLE](#) register.

## 51.4 USB D start-up sequence


The PHY of the USB D is powered separately from the rest of the device ( $V_{BUS}$  pin), which has some implications on the USB D power up sequence.

The device is not able to properly signal its presence to the USB host, and handle traffic from the host, unless the PHY's power supply is enabled and stable.

The turning on or off of the PHY's power supply is directly linked to the [ENABLE](#) register. The device provides events that help synchronizing software to the various steps during the power up sequence.

It is recommended to enable USB D only after  $V_{BUS}$  has been detected, and turn on the USB pull-up after a USBPWRRDY event has occurred, and after a USBEVENT has occurred with the READY condition flagged in [EVENTCAUSE](#). This ensures that all resources in USB D are available and the dedicated USB voltage regulator has stabilized.

Below sequence chart illustrates a typical handling of  $V_{BUS}$  power up.

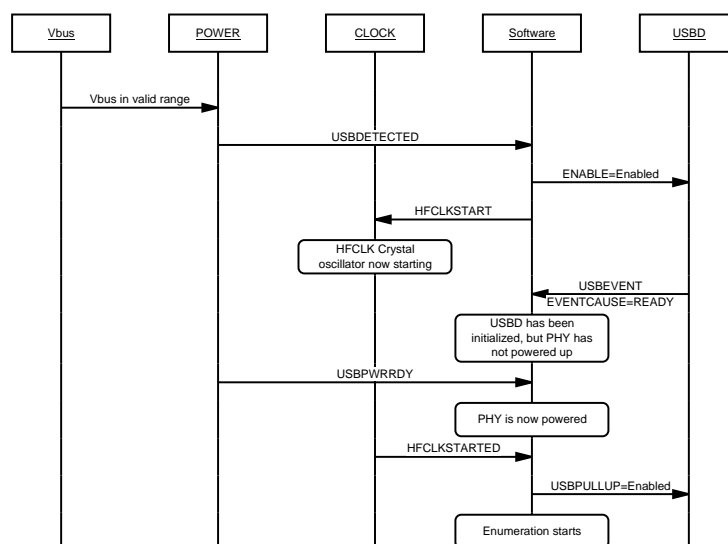

**Figure 175:  $V_{BUS}$  power up sequence**

Upon detection of  $V_{BUS}$  removal, signalled by the USBREMOVED event described in the [POWER](#) chapter, it is recommended to let on-going EasyDMA transfers finish (wait for the relevant ENDEPIN[n], ENDISOIN, ENDEPOUT[n] or ENDISOOUT event, see [EasyDMA](#) on page 614), then to disable USB D through writing ENABLE = Disabled.

## 51.5 USB pull-up

The USB pull-up serves two purposes: it indicates to the host that the device is connected to the USB bus, and indicates the device's speed grade.

When no pull-up is connected to the USB bus, the host sees both D+ and D- lines low, as they are pulled down on the host side by 15 kOhm resistors. The device is not seen by the host, and hence defined to be in detached state, even though it could be physically connected to the host. USB spec does not allow to draw any current on  $V_{BUS}$  in that situation.

When a full-speed device connects its 1.5 kOhm pull-up to D+, the host sees the corresponding line high. The device is then in attached state. The host may attempt to determine if the device supports higher speeds (which it does not), and will then initiate communication with the device to further identify it; this process is called enumeration.

If the host supports higher speed grades and the device is full-speed, the host may attempt to determine if that device is capable of higher speeds. The USB peripheral implemented in this device supports only full-speed (12 Mbps), and will ignore the negotiation for higher speeds, in accordance with the USB specification revision 2.0, full speed part.

The [USBPULLUP](#) register provides means to connect or disconnect the pull-up on D+ under software control. This allows the software to control when USB enumeration takes place. It also allows to emulate a physical disconnect from the USB bus, for instance when re-enumeration is required.

[USBPULLUP](#) has to be set to Enabled to allow the USB to handle USB traffic and generate appropriate events. This forbids the use of an external pull-up.

Note that disconnecting the pull-up through the [USBPULLUP](#) register while connected to a host will result in both D+ and D- lines to be pulled low by the host's pull-down resistors. However, as mentioned above, this will also inhibit the generation of the USBRESET event.

The pull-up is disabled by default after a chip reset.

The pull-up shall only get connected after USB has been enabled through the [ENABLE](#) register. Attempting to access the [USBPULLUP](#) register prior to that will lead to an ACCESSFAULT event to get generated.

The USB pull-up value is automatically changed depending on bus activity, as specified in the "Resistor ECN" which amends the original USB Specification v2.0. The user does not have access to this function, it is handled in hardware.

While they should never be used in normal traffic activity, the task DPDMMDRIVE allows at any time to force the D+ and D- lines to the state specified in the [DPDMVALUE](#) register. The DPDMNODRIVE task stops driving them, and the PHY returns to normal operation.

## 51.6 USB reset

The USB specification defines a USB reset, which shall not be confused with a chip reset.

The USB reset results from a single-ended low state (SE0) on the D+ / D- lines for a time  $T_{DETRST}$ , as specified in the USB specification chapter 7. Only the host is allowed to drive a USB reset condition on the bus.

The USB reset is a normal USB bus condition, and is used as part of the enumeration sequence, it does not reset the chip.

The USB peripheral automatically interprets a SE0 longer than  $t_{USB,DETRST}$  as a USB reset. When the device detects a USB reset and generates a USBRESET event, the device USB stack and related parts of the application shall re-initialize themselves, and go back to the **Default** state.

Some of the registers in the USB peripheral get automatically reset to a known state, in particular all data endpoints will get disabled, and the [USBADDR](#) will be reset to 0.

After having been connected to the USB bus (i.e. after  $V_{BUS}$  gets applied), the device shall not respond to any traffic from the time the pull-up is enabled until it has seen a USB reset condition. This is automatically ensured by the USB.

After a USB reset, the device shall be fully responsive after at most  $T_{RSTRCY}$  (as per USB specification chapter 7). Software shall take into account that it takes  $t_{USB,RSTRCY}$  for the hardware to recover from a USB reset condition.

## 51.7 USB suspend and resume

Normally, the host will maintain activity on the USB at least every millisecond per USB specification.

To signal that the device shall go into low power mode, the host stops activity on the USB bus, which becomes idle, only the device pull-up and host pull-downs act on D+ and D-, and the bus is thus kept at a constant J state. It is up to the device to detect this lack of activity, and enter into a low power mode within a specified time.

The USB host can decide at any moment to suspend USB activity. When this happens, the device is obligated per USB specification to enter a low power mode. The host can decide at any moment to resume USB activity, on its own initiative. If Remote WakeUp has been enabled by the host, the device may also issue a RESUME request to wake up the host.

### 51.7.1 Entering suspend

The USB peripheral automatically detects a lack of activity for more than  $t_{USB,SUSPEND}$  and will generate the corresponding USBEVENT event, with SUSPEND bit set in the **EVENTCAUSE** register. The software shall ensure that the current drawn from the USB supply line  $V_{BUS}$  is within the specified limits before  $T_{2SUSP}$  as defined in chapter 7 of the USB specification.

In order to save power, and provided that no other peripheral needs it, the crystal oscillator (HFXO) in CLOCK may be disabled by software during USB suspend, while the USB pull-up is disconnected, or when  $V_{BUS}$  is not present. Software must explicitly enable it at any other time. The USB will not be able to respond to USB traffic unless HFXO is enabled and stable.

### 51.7.2 Host-initiated resume

If the host resumes bus activity with or without a RESUME condition (in other words: bus activity is defined as any non-J state), the USB peripheral will generate a USBEVENT event, with RESUME bit set in the **EVENTCAUSE** register, and the device has to be responsive to any incoming request on the USB bus within the time  $T_{RSMRCY}$  defined in chapter 7 of the USB specification. It is also allowed to revert to normal power consumption mode.

If the host resumes bus activity simply by restarting sending frames, the USB peripheral will generate SOF events. Also here the device has to be responsive to any incoming request on the USB bus, and can be in normal power consumption mode.

### 51.7.3 Device-initiated remote wake-up

Assuming that remote wake-up is supported by the device and has been enabled by the host, if the device meets a wake-up condition while the device is suspended, the device can request the host to resume.

To do so, the software shall first make sure that HFXO gets enabled.

It can then instruct the USB peripheral to drive a RESUME condition (K state) on the USB bus through the DPMDRIVE task, and hence attempt to wake up the host. By choosing Resume in **DPDMVALUE**, the duration of the RESUME state is under hardware control ( $T_{USB,DRIVEK}$ ). By choosing J or K, the duration of that state is under software control (the J or K state is maintained until a DPDMNODRIVE task is issued), and has to meet  $T_{DRSMUP}$  from USB specification chapter 7.

The value in the **DPDMVALUE** on page 646 register will only be captured and used when the DPMDRIVE task is sent.

Note that the device shall ensure that it does not initiate such a remote wake-up request before  $T_{WTRSM}$  (as per USB specification chapter 7) after the bus has entered idle state. Using the recommended Resume value in [DPDMVALUE](#), rather than K, takes care of this, and postpones the RESUME state accordingly.

As just explained, the [DPDMVALUE](#) register contains the value at which the bus shall be forced after a DPDMDRIVE task. If the software needs to read back the actual D+ and D- lines state, it can do so at any time by reading the [BUSSTATE](#) register.

## 51.8 EasyDMA

The USB\_D peripheral includes EasyDMA so that USB buffers are located in Data RAM .

Each endpoint has an associated set of tasks, events and registers.

The [EPIN\[n\].PTR](#), [EPOUT\[n\].PTR](#) ( $n=0..7$ ), [ISOIN.PTR](#) and [ISOOOUT.PTR](#) registers define the address of the buffer in Data RAM for a specific IN or OUT endpoint.

The [EPIN\[n\].MAXCNT](#) and [ISOIN.MAXCNT](#) registers define the amount of bytes to be sent on USB for next transaction.

The [EPOUT\[n\].MAXCNT](#) ( $n=1..7$ ) and [ISOOOUT.MAXCNT](#) registers define the length of the buffer, in bytes, for next transfer of incoming data. Since the host decides how many bytes are being sent over USB, the MAXCNT value can be copied from the respective [SIZE.EPOUT\[n\]](#) ( $n=1..7$ ) or [SIZE.ISOOOUT](#) register.

The [EPOUT\[0\].MAXCNT](#) register defines the length of the control endpoint OUT buffer, in bytes. If the USB host does not misbehave, the [SIZE.EPOUT\[0\]](#) register will indicate the same value than MaxPacketSize from the device descriptor or wLength from the SETUP command, whichever is the smallest.

The [.AMOUNT](#) registers indicate how many bytes have actually been transferred over EasyDMA during last transfer.

The [STARTEPIN\[n\]](#), [STARTEPOUT\[n\]](#) ( $n=0..7$ ), [STARTISOIN](#) and [STARTISOOOUT](#) tasks capture the [.PTR](#) and [.MAXCNT](#) registers values; for IN endpoints, a transaction over USB gets automatically triggered when the EasyDMA transfer is complete; for OUT endpoints, it is up to software to allow the next transaction over USB, see the examples in [Control transfers](#) on page 615, [Bulk and interrupt transactions](#) on page 618 and [Isochronous transactions](#) on page 620.

The STARTED event confirms that the [.PTR](#), [.MAXCNT](#) and [.CONFIG](#) registers values of the endpoints flagged in the [EPSTATUS](#) register have been captured; those can then be modified by software for the next transfer.

The [ENDEPIN\[n\]](#), [ENDEPOUT\[n\]](#) ( $n=0..7$ ), [ENDISOIN](#) and [ENDISOOOUT](#) events indicate that the whole buffer in Data RAM has been consumed. The buffer can be accessed safely by software.

Only a single EasyDMA transfer can take place in USB\_D at any time. It is up to the software to ensure that no [STARTEPIN\[n\]](#), [STARTISOIN](#), [STARTEPOUT\[n\]](#) or [STARTISOOOUT](#) task is sent before having received the [ENDEPIN\[n\]](#), [ENDISOIN](#), [ENDEPOUT\[n\]](#) or [ENDISOOOUT](#) event from an on-going transfer.

EasyDMA and traffic on USB are tightly related. A number of events provide insight of what is happening on the USB bus, and a number of tasks allow to somewhat automate response to traffic.

The EPDATA event indicates that a successful (acknowledged) data transaction has occurred on the data endpoint(s) flagged in the [EPDATASTATUS](#) register.

In the particular case of the control endpoint 0, OUT transactions are allowed through the EP0RCVOUT task. A successful (acknowledged) data transaction on endpoint 0 is signalled by the EP0DATADONE event. The EP0STATUS task allows a status stage to be initiated, and the EP0STALL task allows stalling further traffic (data or status stage) on the control endpoint.

The EP0SETUP event indicates that a SETUP token has been received on the control endpoint 0. EasyDMA will not copy the SETUP data to Data RAM (it will only transfer data from the data stage), they are available as separate registers in the USB\_D peripheral: [BMREQUESTTYPE](#), [BREQUEST](#), [WVALUEL](#), [WVALUEH](#), [WINDEXL](#), [WINDEXH](#), [WLENGTHL](#) and [WLENGTHH](#).

At any time, the USBEVENT event may be sent, and the [EVENTCAUSE](#) register provides details on what happened, for instance if a CRC error is detected during a transaction, or if bus activity stops or resumes.

Enabling endpoints is controlled through the [EPINEN](#) and [EPOUTEN](#) registers.

Stalling bulk/interrupt endpoints is controlled through the [EPSTALL](#) register.

Note that due to USB specification requirements, the effect of the stalling control endpoint 0 may be overridden by hardware, in particular when a new SETUP token is received.

## 51.9 Control transfers

The USB specification mandates every USB device to implement endpoint 0 IN and OUT as control endpoints.

A control transfer consists of two or three stages:

- Setup stage
- Data stage (optional)
- Status stage

Each control transfer can be of following type:

- Control read
- Control read no data
- Control write
- Control write no data

An EP0SETUP event indicates that the data in the setup stage (i.e. following the SETUP token) is available in the [BREQUEST](#), [BMREQUESTTYPE](#), [WVALUEL](#), [WVALUEH](#), [WINDEXL](#), [WINDEXH](#), [WLENGTHL](#) and [WLENGTHH](#) registers.

The data in the data stage( i.e. following the IN or OUT token) is transferred from or to the desired location in Data RAM using EasyDMA.


Note: the control endpoint buffer size in Data RAM can be of any size in bytes, and there is no constraint to keep it 32-bit aligned.

After receiving the SETUP token, the USB controller will NAK any incoming IN or OUT token until software has finished decoding the command, determined the type of transfer, and prepared the next stage (data or status) appropriately.

The software can choose to STALL the command (both data and status stages) through the EP0STALL task, for instance if the command is not supported, or its wValue, wIndex or wLength parameters are wrong. A stalled Control Read transfer is depicted below, but the same mechanism (same tasks) applies to stalling a Control Write transfer (not depicted).

Refer to the chapter 9 of the USB Specification v2.0 and relevant Class specifications for rules on when to STALL a command.



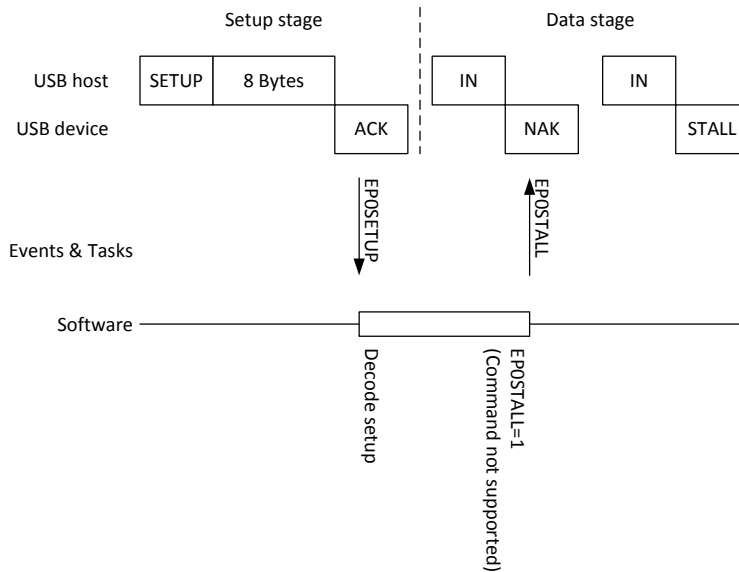

**Figure 176: Control read gets STALLED**

Important: the USB peripheral handles the SetAddress transfer by itself. As a consequence, the software shall not process this command, other than updating its state machine (see [Device state diagram](#)), nor initiate a status stage. If necessary, the address assigned by the host can be read out from the USBADDR register after the command has been processed.

### 51.9.1 Control Read transfer

This section describes how the software behaves to respond to a Control Read transfer.

As mentioned earlier, the USB controller will NAK any incoming IN token until software has finished decoding the command, determined the type of transfer, and prepared the next stage (data or status) appropriately.

For a control-read, transferring the data from Data RAM memory into USB will trigger a valid, ACKed IN transaction on USB.

The software has to prepare EasyDMA by pointing to the buffer containing the data to be transferred. If no other EasyDMA transfer is on-going with USB, software can send the STARTEPIN0 task, which will initiate the data transfer and transaction on USB.


A STARTED event (with EPIN0 bit set in the [EPSTATUS](#) register) will get fired as soon as the EPIN[0].PTR and .MAXCNT registers have been captured. Software may then prepare them for next data transaction.

A ENDEPIN[0] event will get fired when the data has been transferred from memory to the USB peripheral.

Finally, an EP0DATADONE event will get fired when the data has been transmitted over USB and acknowledged by the host.

The software can then either prepare and transmit the next data transaction by repeating the above sequence, or initiate the status stage through the EP0STATUS task.




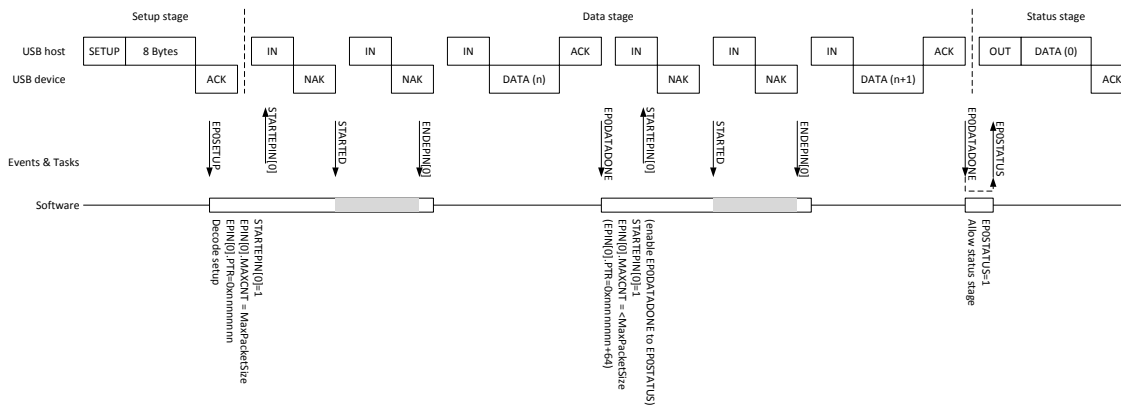

**Figure 177: Control read transfer**

Note the possibility to enable a shortcut from the EP0DATADONE event to the EP0STATUS task, typically if the data stage is expected to take a single transfer.

If there is no data stage, the software can initiate the status stage through the EP0STATUS task right away, as depicted below.

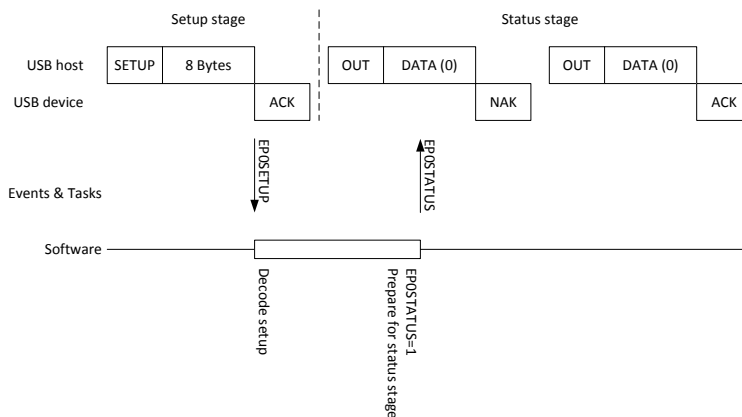

**Figure 178: Control read no data transfer**

### 51.9.2 Control Write transfer

This section describes how the software behaves to respond to a Control Write transfer.


The software has to prepare EasyDMA by pointing to the buffer in Data RAM that shall contain the incoming data. If no other EasyDMA transfer is on-going with USB, software can then send the EP0RCVOUT task, which will make the USB to accept (ACK) the first OUT+DATA transaction from the host.

An EP0DATADONE event will get fired when a new OUT+DATA has been transmitted over USB, and is about to get acknowledged by the device.


A STARTED event (with EPOUT0 bit set in the [EPSTATUS](#) register) will get fired as soon as the EPOUT[0].PTR and .MAXCNT registers have been captured, after receiving the first transaction. Software may then prepare them for next data transaction.

A ENDEP[0] event will get fired when the data has been transferred from the USB peripheral to Data RAM.

The software can then either prepare to receive the next data transaction by repeating the above sequence, or initiate the status stage through the EP0STATUS task. Until then, further incoming OUT + DATA transactions get a NAK response by the device.

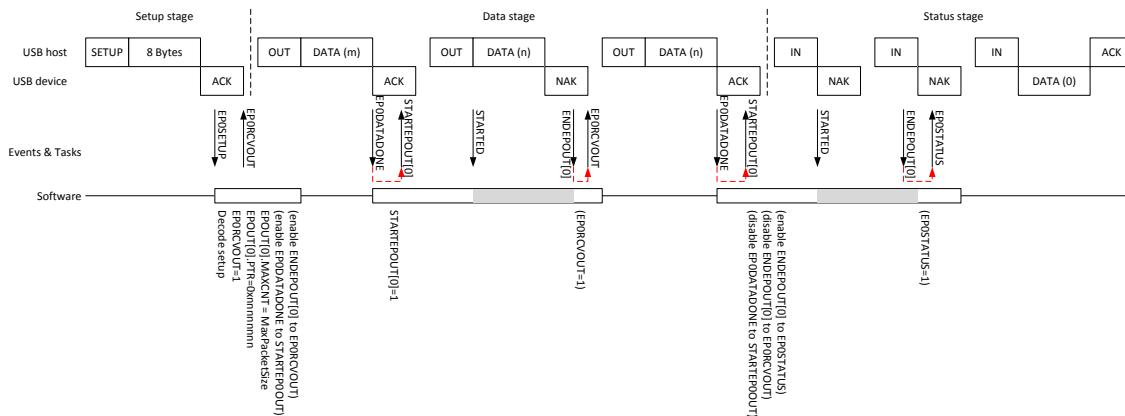

**Figure 179: Control write transfer**

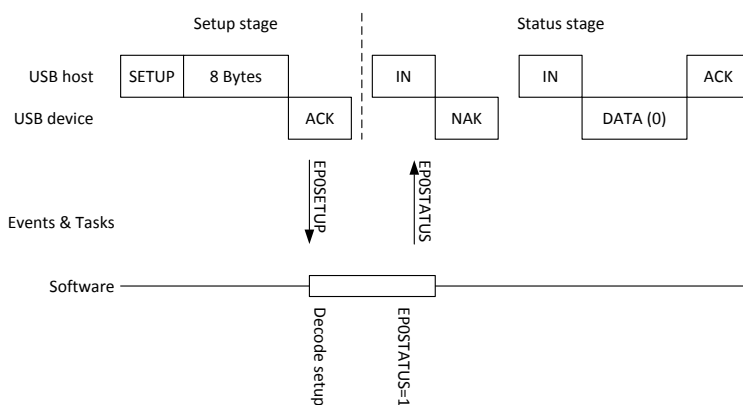

**Figure 180: Control write no data transfer**

## 51.10 Bulk and interrupt transactions

The USBD peripheral implements seven pairs of bulk/interrupt endpoints.

The bulk/interrupt endpoints have a fixed USB endpoint number, summarized in the table below.

**Table 125: Bulk/interrupt endpoint numbering**

Bulk endpoint #	USB IN endpoint	USB OUT endpoint
[1]	0x81	0x01
[2]	0x82	0x02
[3]	0x83	0x03
[4]	0x84	0x04
[5]	0x85	0x05
[6]	0x86	0x06
[7]	0x87	0x07

A bulk/interrupt transaction consists of a single data stage. Two consecutive, successful transactions are distinguished through alternating leading PID: DATA0 follows DATA1, DATA1 follows DATA0, etc.

A repeated transaction is detected by re-using the same PID as previous transaction, i.e DATA0 follows DATA0, or DATA1 follows DATA1.

The USBD controller automatically toggles DATA0/DATA1 PIDs for every bulk/interrupt transaction, and in general software does not need to care about it.

If an incoming data is corrupted (CRC does not match), the USBD controller automatically prevents DATA0/DATA1 from toggling, to request the host to resend the data.

In specific cases, the software may want to force data toggle (usually reset) on a specific IN endpoint, or force the expected toggle on an OUT endpoint, for instance as a consequence of the host issuing a

ClearFeature, SetInterface or selecting an alternate setting. Controlling the data toggle of data IN or OUT endpoint  $n=1..7$  is done through the [DTOGGLE](#) register.

The maximum size of a bulk/interrupt transaction in USB Full Speed is 64 Bytes, and has to be a multiple of 4 bytes, and be 32-bit aligned in Data RAM. However, the amount of DATA bytes transmitted on the USB data endpoint can be of any size (up to 64 bytes).

When the transaction is done over USB, a EPDATA event is sent, and the hardware will automatically NAK further IN tokens, until software is ready to send more data and has finished configuring EasyDMA, has started it, and the whole buffer content has been moved to the USB controller (signalled by the ENDEPIN[n] event).

Each IN or OUT data endpoint has to be explicitly enabled by software through the [EPINEN](#) or [EPOUTEN](#) register, according to the configuration declared by the device and selected by the host through the SetConfig command.

A disabled data endpoint will not respond to any traffic from the host.

An enabled data endpoint will normally respond NAK or ACK (depending on the readiness of the buffers), or STALL if configured so through the [EPSTALL](#) register (in which case the endpoint is said to be halted).

The halted (or not) state of a given endpoint can be read back from the [HALTED.EPIN\[n\]](#) or [HALTED.EPOUT\[n\]](#) register. The format of the returned 16 bit value can be copied as is as response to a GetStatusEndpoint request from the host.

Note that enabling or disabling an endpoint will not change its halted state. However, a USB reset will disable and clear the halted state of all data endpoints.


The control endpoint 0 IN and OUT can also get enabled and/or halted through the same mechanisms, but due to USB specification, receiving a SETUP will override its state.

### 51.10.1 Bulk and interrupt IN transaction

The host issues IN tokens to receive bulk/interrupt data. In order to send data, the software has to enable the endpoint and prepare an EasyDMA transfer on the desired endpoint, as illustrated below.

Bulk/interrupt IN endpoints are enabled or disabled through their respective INn bit ( $n=1..7$ ) in [EPINEN](#) register.

It is also possible to stall or un-stall an endpoint through the [EPSTALL](#) register.

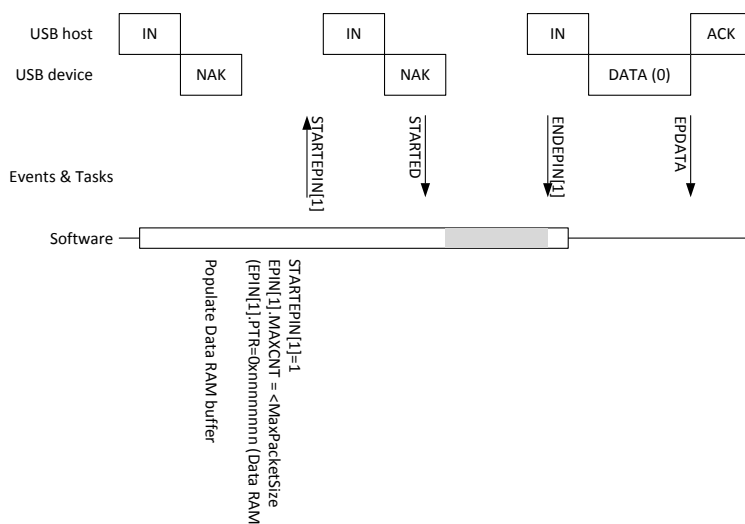

**Figure 181: Bulk/interrupt IN transaction**

It is possible (and some situations mandate it) to respond to an IN with a zero-length data packet.

Note: on many USB hosts, not responding (DATA+ACK or NAK) to three IN tokens on a interrupt endpoint would have the host disable that endpoint as a consequence. Re-enumerating the device (unplug-replug)

may be required to restore functionality. Make sure the relevant data endpoints are enabled for normal operation as soon as the device gets configured through a SetConfig request.

### 51.10.2 Bulk and interrupt OUT transaction

When the host wants to transmit bulk/interrupt data, it issues an OUT Token packet followed by a DATA packet on a given endpoint  $n$ .

A NAK handshake is returned until the software writes any value to `SIZE.EPOUT[n]`, indicating that the local buffer's content can be overwritten. Upon receiving the next OUT + DATA transaction, an ACK handshake is returned to the host while a EPDATA event is sent (and `EPSTATUS` register flags set to indicate on which endpoint this happened), and once the EasyDMA is prepared and enabled through writing the `EPOUT[n]` registers and sending the `STARTEPOUT[n]` task, the incoming data will be transferred to Data RAM. Until that transfer is finished, the hardware will automatically NAK further incoming OUT+DATA packets. Only when the EasyDMA transfer is done (signalled by the `ENDEPOUT[n]` event) and the software has written any value to `SIZE.EPOUT[n]`, the endpoint  $n$  will accept incoming OUT + DATA again.

It is allowed for the host to send out a zero-length data packet.

Bulk/interrupt OUT endpoints are enabled or disabled through their respective OUT $n$  bit ( $n=1..7$ ) in the `EPOUTEN` register. It is also possible to stall or un-stall an endpoint through the `EPSTALL` register.

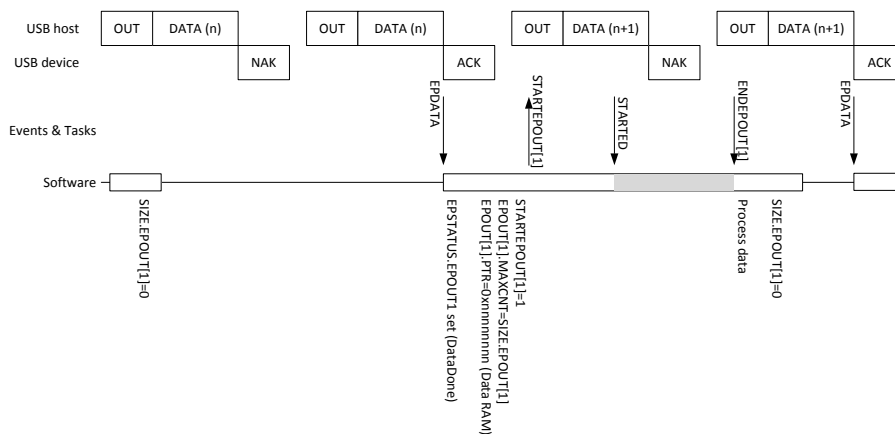


Figure 182: Bulk/interrupt OUT transaction

## 51.11 Isochronous transactions

The USB device peripheral implements isochronous (iso) endpoints.

The iso endpoints have a fixed USB endpoint number, summarized in the table below.

Table 126: Isochronous endpoint numbering

Iso endpoint #	USB IN endpoint	USB OUT endpoint
[0]	0x88	0x08

A isochronous transaction consists of a single, non-acknowledged data stage. The host sends out a start of frame at a regular interval (1ms), and data follows IN or OUT tokens within each frame.

EasyDMA allows transferring iso data directly from and to Data RAM; EasyDMA transfers must be initiated by software, which can synchronize to the SOF events.

Because the timing of the start of frame is very accurate, the SOF event can be used for instance to synchronize a local timer through the SOF event and PPI. The SOF event gets synchronized to the 16 MHz clock prior to being made available to PPI.

Every Start of Frame increments a free-running counter, which can be read by software through the `FRAMECNTR` register.

Each IN or OUT iso data endpoint has to be explicitly enabled by software through the [EPINEN](#) or [EPOUTEN](#) register, according to the configuration declared by the device and selected by the host through the SetConfig command.

A disabled iso IN data endpoint will not respond to any traffic from the host.

A disabled iso OUT data endpoint will ignore any incoming traffic from the host.

The USB device peripheral has an internal 1 kByte buffer associated with iso endpoints. The user can either allocate the full amount to the IN or the OUT endpoint, or split the buffer allocation between the two. This is done through the [ISOSPLIT](#) register, which provides a number of pre-determined splits.

### 51.11.1 Isochronous IN transaction


When the host wants to receive isochronous (iso) data, it issues an IN token on the isochronous endpoint.

On the isochronous IN endpoint, after the data has been transferred using the EasyDMA, the USB controller responds to the IN token with the data that had been transferred, using the [ISOIN.MAXCNT](#) for the size of the packet.

The iso IN data endpoint has to be explicitly enabled by software through the ISOIN0 bit in the [EPINEN](#) register.

When the iso IN endpoint is enabled, and if no data had been transferred with EasyDMA, the response of the USB device depends on the setting of the RESPONSE field in the [ISOINCONFIG](#) register. If set to NoResp, no response to an IN token will be provided. If set to ZeroData, the USB device responds with a zero-length data.

Note: the maximum size of an isochronous IN transfer in USB Full Speed is 1023 Bytes, and the data buffer in RAM has to be a multiple of 4 bytes, and be 32-bit aligned in Data RAM. However, the amount of bytes transferred on the USB data endpoint can be of any size (up to 1023 Byte if not shared with an OUT iso endpoint).

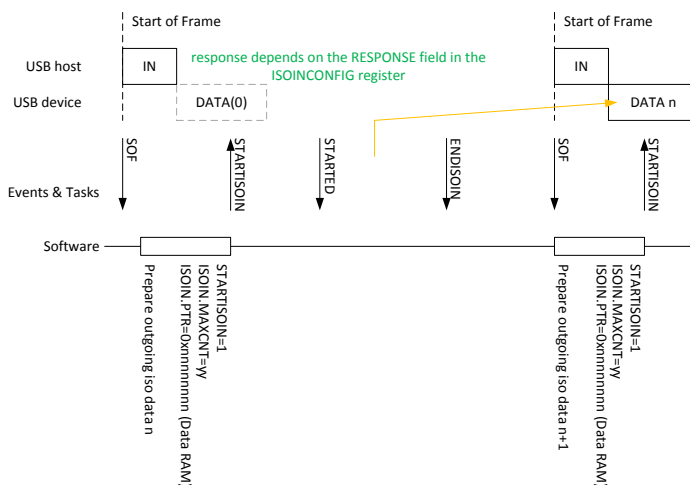

**Figure 183: Isochronous IN transfer**

### 51.11.2 Isochronous OUT transaction

When the host wants to send isochronous (iso) data, it issues an OUT token on the isochronous endpoint, followed by data.

The iso OUT data endpoint has to be explicitly enabled by software through the ISOOUT0 bit in the [EPOUTEN](#) register.

The amount of last received iso OUT data is provided in the [SIZE.ISOOUT](#) register.

Software shall interpret the ZERO and SIZE fields as follows:

**Table 127: Iso OUT incoming data size**

ZERO	SIZE	last received data size
Normal	0	No data received at all


ZERO	SIZE	last received data size
Normal	1..1023	1..1023 bytes of data received
ZeroData	(don't care)	Zero-length data packet received

When the EasyDMA is prepared and started, sending a `STARTISOOUT` task initiates an EasyDMA transfer to Data RAM. Software shall synchronize iso OUT transfers to the SOF events. If OUT data is not consumed and processed until next SOF, it will be overwritten by more recent data.

EasyDMA uses the address in `ISOOUT.PTR` and size in `ISOOUT.MAXCNT` for every new transfer.

Note: the maximum size of an isochronous OUT transfer in USB Full Speed is 1023 Bytes, and the data buffer in RAM has to be a multiple of 4 bytes, and be 32-bit aligned in Data RAM. However, the amount of bytes transferred on the USB data endpoint can be of any size (up to 1023 Byte if not shared with an IN iso endpoint).

If the last received iso data packet is corrupted (wrong CRC), the USB controller sends an `USBEVENT` event (at the same time as SOF) and indicates a CRC error on `ISOOUTCRC` in the `EVENTCAUSE` register. EasyDMA will transfer the data anyway if it has been set up properly.

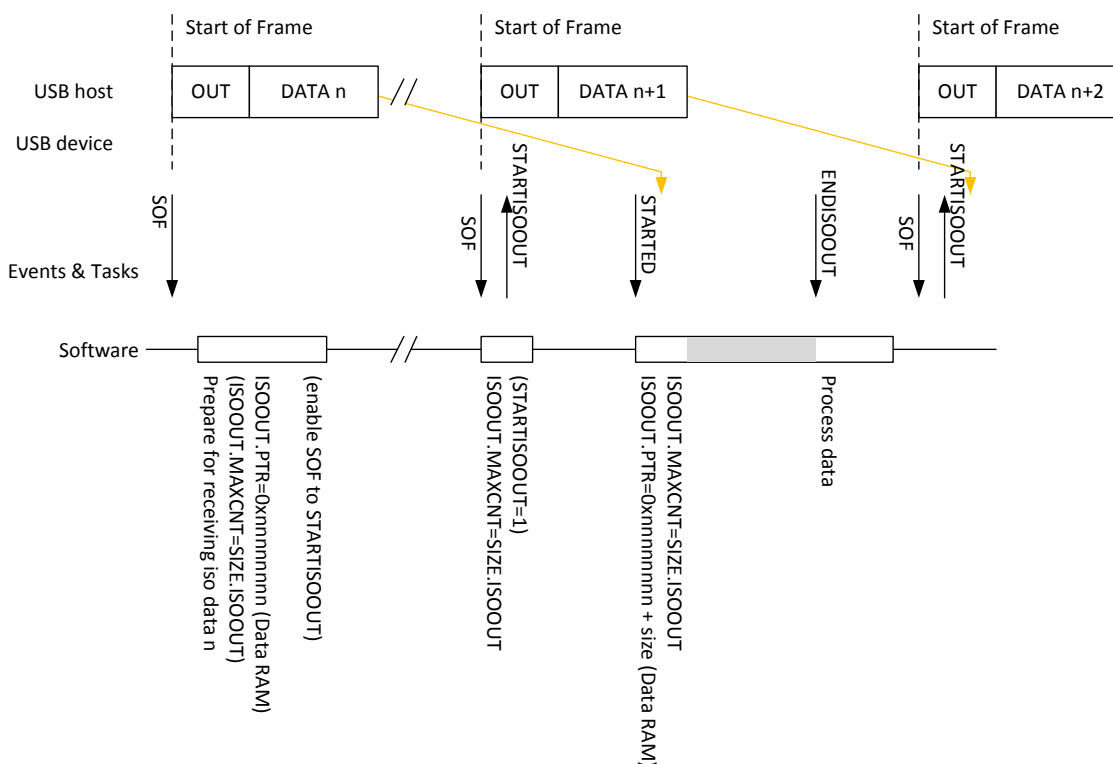

**Figure 184: Isochronous OUT transfer**

## 51.12 USB register access limitations

Some of the registers in USBD cannot get accessed in specific conditions.

This is the case while USBD is not enabled (through the `ENABLE` register) and ready (signalled by the `READY` bit in `EVENTCAUSE` after the `USBEVENT` event), or when USBD has been placed in low power while the USB bus is suspended.

If any of the register listed below gets accessed (read or write) by software or through the debugger, an `ACCESSFAULT` event will get fired, and if the associated interrupt has been enabled through the `INTEN` or `INTENSET` register in USBD, an interrupt will be taken.

Following registers are affected by this behaviour:

- firing any task, including through PPI
- `BUSSTATE`

- HALTED.EPIN[0..7]
- HALTED.EPOUT[0..7]
- USBADDR
- BMREQUESTTYPE
- BREQUEST
- WVALUEL
- WVALUEH
- WINDEXL
- WINDEXH
- WLENGTHL
- WLENGTHH
- SIZE.EPOUT[0..7]
- SIZE.ISOOUT
- USBPULLUP
- DTOGGLE
- EPINEN
- EPOUTEN
- EPSTALL
- ISOSPLIT
- FRAMECNTR

## 51.13 Registers

**Table 128: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x40027000	USB D	USB D	Universal serial bus device	

**Table 129: Register Overview**

Register	Offset	Description
TASKS_STARTEPIN[0]	0x004	Captures the EPIN[0].PTR, EPIN[0].MAXCNT and EPIN[0].CONFIG registers values, and enables endpoint IN 0 to respond to traffic from host
TASKS_STARTEPIN[1]	0x008	Captures the EPIN[1].PTR, EPIN[1].MAXCNT and EPIN[1].CONFIG registers values, and enables endpoint IN 1 to respond to traffic from host
TASKS_STARTEPIN[2]	0x00C	Captures the EPIN[2].PTR, EPIN[2].MAXCNT and EPIN[2].CONFIG registers values, and enables endpoint IN 2 to respond to traffic from host
TASKS_STARTEPIN[3]	0x010	Captures the EPIN[3].PTR, EPIN[3].MAXCNT and EPIN[3].CONFIG registers values, and enables endpoint IN 3 to respond to traffic from host
TASKS_STARTEPIN[4]	0x014	Captures the EPIN[4].PTR, EPIN[4].MAXCNT and EPIN[4].CONFIG registers values, and enables endpoint IN 4 to respond to traffic from host
TASKS_STARTEPIN[5]	0x018	Captures the EPIN[5].PTR, EPIN[5].MAXCNT and EPIN[5].CONFIG registers values, and enables endpoint IN 5 to respond to traffic from host
TASKS_STARTEPIN[6]	0x01C	Captures the EPIN[6].PTR, EPIN[6].MAXCNT and EPIN[6].CONFIG registers values, and enables endpoint IN 6 to respond to traffic from host
TASKS_STARTEPIN[7]	0x020	Captures the EPIN[7].PTR, EPIN[7].MAXCNT and EPIN[7].CONFIG registers values, and enables endpoint IN 7 to respond to traffic from host
TASKS_STARTISOIN	0x024	Captures the ISOIN.PTR, ISOIN.MAXCNT and ISOIN.CONFIG registers values, and enables sending data on iso endpoint
TASKS_STARTEPOUT[0]	0x028	Captures the EPOUT[0].PTR, EPOUT[0].MAXCNT and EPOUT[0].CONFIG registers values, and enables endpoint 0 to respond to traffic from host
TASKS_STARTEPOUT[1]	0x02C	Captures the EPOUT[1].PTR, EPOUT[1].MAXCNT and EPOUT[1].CONFIG registers values, and enables endpoint 1 to respond to traffic from host
TASKS_STARTEPOUT[2]	0x030	Captures the EPOUT[2].PTR, EPOUT[2].MAXCNT and EPOUT[2].CONFIG registers values, and enables endpoint 2 to respond to traffic from host

Register	Offset	Description
TASKS_STARTEPOUT[3]	0x034	Captures the EPOUT[3].PTR, EPOUT[3].MAXCNT and EPOUT[3].CONFIG registers values, and enables endpoint 3 to respond to traffic from host
TASKS_STARTEPOUT[4]	0x038	Captures the EPOUT[4].PTR, EPOUT[4].MAXCNT and EPOUT[4].CONFIG registers values, and enables endpoint 4 to respond to traffic from host
TASKS_STARTEPOUT[5]	0x03C	Captures the EPOUT[5].PTR, EPOUT[5].MAXCNT and EPOUT[5].CONFIG registers values, and enables endpoint 5 to respond to traffic from host
TASKS_STARTEPOUT[6]	0x040	Captures the EPOUT[6].PTR, EPOUT[6].MAXCNT and EPOUT[6].CONFIG registers values, and enables endpoint 6 to respond to traffic from host
TASKS_STARTEPOUT[7]	0x044	Captures the EPOUT[7].PTR, EPOUT[7].MAXCNT and EPOUT[7].CONFIG registers values, and enables endpoint 7 to respond to traffic from host
TASKS_STARTISOOUT	0x048	Captures the ISOOUT.PTR, ISOOUT.MAXCNT and ISOOUT.CONFIG registers values, and enables receiving of data on iso endpoint
TASKS_EPORCVOUT	0x04C	Allows OUT data stage on control endpoint 0
TASKS_EPOSTATUS	0x050	Allows status stage on control endpoint 0
TASKS_EPOSTALL	0x054	STALLs data and status stage on control endpoint 0
TASKS_DPDMDRIVE	0x058	Forces D+ and D- lines to the state defined in the DPDMVALUE register
TASKS_DPDMNODRIVE	0x05C	Stops forcing D+ and D- lines to any state (USB engine takes control)
EVENTS_USBRESET	0x100	Signals that a USB reset condition has been detected on the USB lines
EVENTS_STARTED	0x104	Confirms that the EPIN[n].PTR, EPIN[n].MAXCNT, EPIN[n].CONFIG, or EPOUT[n].PTR, EPOUT[n].MAXCNT and EPOUT[n].CONFIG registers have been captured on all endpoints reported in the EPSTATUS register
EVENTS_ENDEPIN[0]	0x108	The whole EPIN[0] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[1]	0x10C	The whole EPIN[1] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[2]	0x110	The whole EPIN[2] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[3]	0x114	The whole EPIN[3] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[4]	0x118	The whole EPIN[4] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[5]	0x11C	The whole EPIN[5] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[6]	0x120	The whole EPIN[6] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPIN[7]	0x124	The whole EPIN[7] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_EP0DATADONE	0x128	An acknowledged data transfer has taken place on the control endpoint
EVENTS_ENDISOIN	0x12C	The whole ISOIN buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[0]	0x130	The whole EPOUT[0] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[1]	0x134	The whole EPOUT[1] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[2]	0x138	The whole EPOUT[2] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[3]	0x13C	The whole EPOUT[3] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[4]	0x140	The whole EPOUT[4] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[5]	0x144	The whole EPOUT[5] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[6]	0x148	The whole EPOUT[6] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDEPOUT[7]	0x14C	The whole EPOUT[7] buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_ENDISOOUT	0x150	The whole ISOOUT buffer has been consumed. The RAM buffer can be accessed safely by software.
EVENTS_SOF	0x154	Signals that a SOF (start of frame) condition has been detected on the USB lines
EVENTS_USBEVENT	0x158	An event or an error not covered by specific events has occurred, check EVENTCAUSE register to find the cause
EVENTS_EPOSETUP	0x15C	A valid SETUP token has been received (and acknowledged) on the control endpoint
EVENTS_EPDATA	0x160	A data transfer has occurred on a data endpoint, indicated by the EPDATASTATUS register
EVENTS_ACCESSFAULT	0x164	Access to an unavailable USB register has been attempted (software or EasyDMA). This event can get fired even when USB_D is not ENABLED.
SHORTS	0x200	Shortcut register
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt



Register	Offset	Description
<i>INTENCLR</i>	0x308	Disable interrupt
<i>EVENTCAUSE</i>	0x400	Details on event that caused the USBEVENT event
<i>BUSSTATE</i>	0x404	Provides the logic state of the D+ and D- lines
<i>HALTED.EPIN[0]</i>	0x420	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[1]</i>	0x424	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[2]</i>	0x428	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[3]</i>	0x42C	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[4]</i>	0x430	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[5]</i>	0x434	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[6]</i>	0x438	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPIN[7]</i>	0x43C	IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[0]</i>	0x444	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[1]</i>	0x448	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[2]</i>	0x44C	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[3]</i>	0x450	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[4]</i>	0x454	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[5]</i>	0x458	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[6]</i>	0x45C	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>HALTED.EPOUT[7]</i>	0x460	OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.
<i>EPSTATUS</i>	0x468	Provides information on which endpoint's EasyDMA registers have been captured
<i>EPDATASTATUS</i>	0x46C	Provides information on which endpoint(s) an acknowledged data transfer has occurred (EPDATA event)
<i>USBADDR</i>	0x470	Device USB address
<i>BMREQUESTTYPE</i>	0x480	SETUP data, byte 0, bmRequestType
<i>BREQUEST</i>	0x484	SETUP data, byte 1, bRequest
<i>WVALUEL</i>	0x488	SETUP data, byte 2, LSB of wValue
<i>WVALUEH</i>	0x48C	SETUP data, byte 3, MSB of wValue
<i>WINDEXL</i>	0x490	SETUP data, byte 4, LSB of wIndex
<i>WINDEXH</i>	0x494	SETUP data, byte 5, MSB of wIndex
<i>WLENGTHL</i>	0x498	SETUP data, byte 6, LSB of wLength
<i>WLENGTHH</i>	0x49C	SETUP data, byte 7, MSB of wLength
<i>SIZE.EPOUT[0]</i>	0x4A0	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[1]</i>	0x4A4	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[2]</i>	0x4A8	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[3]</i>	0x4AC	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[4]</i>	0x4B0	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[5]</i>	0x4B4	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[6]</i>	0x4B8	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.EPOUT[7]</i>	0x4BC	Amount of bytes received last in the data stage of this OUT endpoint
<i>SIZE.ISOOUT</i>	0x4C0	Amount of bytes received last on this iso OUT data endpoint
<i>ENABLE</i>	0x500	Enable USB
<i>USBPULLUP</i>	0x504	Control of the USB pull-up
<i>DPDMVALUE</i>	0x508	State at which the DPDMNODRIVE task will force D+ and D-. The DPDMNODRIVE task reverts the control of the lines to MAC IP (no forcing).
<i>DTOGGLE</i>	0x50C	Data toggle control and status.
<i>EPINEN</i>	0x510	Endpoint IN enable
<i>EPOUTEN</i>	0x514	Endpoint OUT enable
<i>EPSTALL</i>	0x518	STALL endpoints
<i>ISOSPLIT</i>	0x51C	Controls the split of ISO buffers
<i>FRAMECNTR</i>	0x520	Returns the current value of the start of frame counter
<i>ISOINCONFIG</i>	0x530	Controls the response of the ISO IN endpoint to an IN token when no data is ready to be sent
<i>EPIN[0].PTR</i>	0x600	Data pointer
<i>EPIN[0].MAXCNT</i>	0x604	Maximum number of bytes to transfer
<i>EPIN[0].AMOUNT</i>	0x608	Number of bytes transferred in the last transaction
<i>EPIN[1].PTR</i>	0x614	Data pointer
<i>EPIN[1].MAXCNT</i>	0x618	Maximum number of bytes to transfer
<i>EPIN[1].AMOUNT</i>	0x61C	Number of bytes transferred in the last transaction
<i>EPIN[2].PTR</i>	0x628	Data pointer

Register	Offset	Description
<i>EPIN[2].MAXCNT</i>	0x62C	Maximum number of bytes to transfer
<i>EPIN[2].AMOUNT</i>	0x630	Number of bytes transferred in the last transaction
<i>EPIN[3].PTR</i>	0x63C	Data pointer
<i>EPIN[3].MAXCNT</i>	0x640	Maximum number of bytes to transfer
<i>EPIN[3].AMOUNT</i>	0x644	Number of bytes transferred in the last transaction
<i>EPIN[4].PTR</i>	0x650	Data pointer
<i>EPIN[4].MAXCNT</i>	0x654	Maximum number of bytes to transfer
<i>EPIN[4].AMOUNT</i>	0x658	Number of bytes transferred in the last transaction
<i>EPIN[5].PTR</i>	0x664	Data pointer
<i>EPIN[5].MAXCNT</i>	0x668	Maximum number of bytes to transfer
<i>EPIN[5].AMOUNT</i>	0x66C	Number of bytes transferred in the last transaction
<i>EPIN[6].PTR</i>	0x678	Data pointer
<i>EPIN[6].MAXCNT</i>	0x67C	Maximum number of bytes to transfer
<i>EPIN[6].AMOUNT</i>	0x680	Number of bytes transferred in the last transaction
<i>EPIN[7].PTR</i>	0x68C	Data pointer
<i>EPIN[7].MAXCNT</i>	0x690	Maximum number of bytes to transfer
<i>EPIN[7].AMOUNT</i>	0x694	Number of bytes transferred in the last transaction
<i>ISOIN.PTR</i>	0x6A0	Data pointer
<i>ISOIN.MAXCNT</i>	0x6A4	Maximum number of bytes to transfer
<i>ISOIN.AMOUNT</i>	0x6A8	Number of bytes transferred in the last transaction
<i>EPOUT[0].PTR</i>	0x700	Data pointer
<i>EPOUT[0].MAXCNT</i>	0x704	Maximum number of bytes to transfer
<i>EPOUT[0].AMOUNT</i>	0x708	Number of bytes transferred in the last transaction
<i>EPOUT[1].PTR</i>	0x714	Data pointer
<i>EPOUT[1].MAXCNT</i>	0x718	Maximum number of bytes to transfer
<i>EPOUT[1].AMOUNT</i>	0x71C	Number of bytes transferred in the last transaction
<i>EPOUT[2].PTR</i>	0x728	Data pointer
<i>EPOUT[2].MAXCNT</i>	0x72C	Maximum number of bytes to transfer
<i>EPOUT[2].AMOUNT</i>	0x730	Number of bytes transferred in the last transaction
<i>EPOUT[3].PTR</i>	0x73C	Data pointer
<i>EPOUT[3].MAXCNT</i>	0x740	Maximum number of bytes to transfer
<i>EPOUT[3].AMOUNT</i>	0x744	Number of bytes transferred in the last transaction
<i>EPOUT[4].PTR</i>	0x750	Data pointer
<i>EPOUT[4].MAXCNT</i>	0x754	Maximum number of bytes to transfer
<i>EPOUT[4].AMOUNT</i>	0x758	Number of bytes transferred in the last transaction
<i>EPOUT[5].PTR</i>	0x764	Data pointer
<i>EPOUT[5].MAXCNT</i>	0x768	Maximum number of bytes to transfer
<i>EPOUT[5].AMOUNT</i>	0x76C	Number of bytes transferred in the last transaction
<i>EPOUT[6].PTR</i>	0x778	Data pointer
<i>EPOUT[6].MAXCNT</i>	0x77C	Maximum number of bytes to transfer
<i>EPOUT[6].AMOUNT</i>	0x780	Number of bytes transferred in the last transaction
<i>EPOUT[7].PTR</i>	0x78C	Data pointer
<i>EPOUT[7].MAXCNT</i>	0x790	Maximum number of bytes to transfer
<i>EPOUT[7].AMOUNT</i>	0x794	Number of bytes transferred in the last transaction
<i>ISOOUT.PTR</i>	0x7A0	Data pointer
<i>ISOOUT.MAXCNT</i>	0x7A4	Maximum number of bytes to transfer
<i>ISOOUT.AMOUNT</i>	0x7A8	Number of bytes transferred in the last transaction

### 51.13.1 SHORTS

Address offset: 0x200

## Shortcut register

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	EP0DATADONE_STARTEPIN			Shortcut between EP0DATADONE event and STARTEPIN[0] task																														

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																																					
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																															
			Disabled		0	See <a href="#">EVENTS_EP0DATADONE</a> and <a href="#">TASKS_STARTEPIN[0]</a>																															
			Enabled		1	Disable shortcut																															
			Enabled		1	Enable shortcut																															
B	RW	EP0DATADONE_STARTEPC				Shortcut between EP0DATADONE event and STARTEPOUT[0] task																															
			Disabled		0	See <a href="#">EVENTS_EP0DATADONE</a> and <a href="#">TASKS_STARTEPOUT[0]</a>																															
			Enabled		1	Disable shortcut																															
			Enabled		1	Enable shortcut																															
C	RW	EP0DATADONE_EPOSTATU				Shortcut between EP0DATADONE event and EPOSTATUS task																															
			Disabled		0	See <a href="#">EVENTS_EP0DATADONE</a> and <a href="#">TASKS_EPOSTATUS</a>																															
			Enabled		1	Disable shortcut																															
			Enabled		1	Enable shortcut																															
D	RW	ENDEPOUT0_EPOSTATUS				Shortcut between ENDEPOUT[0] event and EPOSTATUS task																															
			Disabled		0	See <a href="#">EVENTS_ENDEPOUT[0]</a> and <a href="#">TASKS_EPOSTATUS</a>																															
			Enabled		1	Disable shortcut																															
			Enabled		1	Enable shortcut																															
E	RW	ENDEPOUT0_EPORCVOUT				Shortcut between ENDEPOUT[0] event and EPORCVOUT task																															
			Disabled		0	See <a href="#">EVENTS_ENDEPOUT[0]</a> and <a href="#">TASKS_EPORCVOUT</a>																															
			Enabled		1	Disable shortcut																															
			Enabled		1	Enable shortcut																															

## 51.13.2 INTEN

Address offset: 0x300

Enable or disable interrupt

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	USBRESET			Enable or disable interrupt for USBRESET event																																	
			Disabled	0	See <a href="#">EVENTS_USBRESET</a>																																	
			Enabled	1	Disable																																	
			Enabled	1	Enable																																	
B	RW	STARTED			Enable or disable interrupt for STARTED event																																	
			Disabled	0	See <a href="#">EVENTS_STARTED</a>																																	
			Enabled	1	Disable																																	
			Enabled	1	Enable																																	
C	RW	ENDEPIN0			Enable or disable interrupt for ENDEPIN[0] event																																	
			Disabled	0	See <a href="#">EVENTS_ENDEPIN[0]</a>																																	
			Enabled	1	Disable																																	
			Enabled	1	Enable																																	
D	RW	ENDEPIN1			Enable or disable interrupt for ENDEPIN[1] event																																	
			Disabled	0	See <a href="#">EVENTS_ENDEPIN[1]</a>																																	
			Enabled	1	Disable																																	
			Enabled	1	Enable																																	
E	RW	ENDEPIN2			Enable or disable interrupt for ENDEPIN[2] event																																	
			Disabled	0	See <a href="#">EVENTS_ENDEPIN[2]</a>																																	
			Enabled	1	Disable																																	
			Enabled	1	Enable																																	
F	RW	ENDEPIN3			Enable or disable interrupt for ENDEPIN[3] event																																	

Page 628

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id				Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																	
Reset 0x00000000				0 0																																	
Id	RW	Field	Value Id	Value	Description																																
S	RW	ENDEPOUT6	Enabled	1	Enable																																
			Enable or disable interrupt for ENDEPOUT[6] event																																		
			See <a href="#">EVENTS_ENDEPOUT[6]</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
T	RW	ENDEPOUT7	Enabled	1	Enable																																
			Enable or disable interrupt for ENDEPOUT[7] event																																		
			See <a href="#">EVENTS_ENDEPOUT[7]</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
U	RW	ENDISOOUT	Enabled	1	Enable																																
			Enable or disable interrupt for ENDISOOUT event																																		
			See <a href="#">EVENTS_ENDISOOUT</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
V	RW	SOF	Enabled	1	Enable																																
			Enable or disable interrupt for SOF event																																		
			See <a href="#">EVENTS_SOF</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
W	RW	USBEVENT	Enabled	1	Enable																																
			Enable or disable interrupt for USBEVENT event																																		
			See <a href="#">EVENTS_USBEVENT</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
X	RW	EPOSETUP	Enabled	1	Enable																																
			Enable or disable interrupt for EPOSETUP event																																		
			See <a href="#">EVENTS_EPOSETUP</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
Y	RW	EPDATA	Enabled	1	Enable																																
			Enable or disable interrupt for EPDATA event																																		
			See <a href="#">EVENTS_EPDATA</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																
			Disabled	0	Disable																																
Z	RW	ACCESSFAULT	Enabled	1	Enable																																
			Enable or disable interrupt for ACCESSFAULT event																																		
			See <a href="#">EVENTS_ACCESSFAULT</a>																																		
			Disabled	0	Disable																																
			Enabled	1	Enable																																

### 51.13.3 INTENSET

Address offset: 0x304

Enable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	USBRESET			Write '1' to Enable interrupt for USBRESET event																														
					See <a href="#">EVENTS_USBRESET</a>																														
			Set	1	Enable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	STARTED			Write '1' to Enable interrupt for STARTED event																														
					See <a href="#">EVENTS_STARTED</a>																														
			Set	1	Enable																														

Page 630

Page 631

Bit number		31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id																		Z	Y	X	W	V	U	T	S	R	Q	P	O	N	M	L	K	J	I	H	G	F	E	D	C	B	A	
Reset 0x00000000		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																																						
W	RW	USBEVENT				Write '1' to Enable interrupt for USBEVENT event																																						
						See <a href="#">EVENTS_USBEVENT</a>																																						
			Set		1	Enable																																						
			Disabled		0	Read: Disabled																																						
			Enabled		1	Read: Enabled																																						
X	RW	EPOSETUP				Write '1' to Enable interrupt for EPOSETUP event																																						
						See <a href="#">EVENTS_EPOSETUP</a>																																						
			Set		1	Enable																																						
			Disabled		0	Read: Disabled																																						
			Enabled		1	Read: Enabled																																						
Y	RW	EPDATA				Write '1' to Enable interrupt for EPDATA event																																						
						See <a href="#">EVENTS_EPDATA</a>																																						
			Set		1	Enable																																						
			Disabled		0	Read: Disabled																																						
			Enabled		1	Read: Enabled																																						
Z	RW	ACCESSFAULT				Write '1' to Enable interrupt for ACCESSFAULT event																																						
						See <a href="#">EVENTS_ACCESSFAULT</a>																																						
			Set		1	Enable																																						
			Disabled		0	Read: Disabled																																						
			Enabled		1	Read: Enabled																																						

## 51.13.4 INTENCLR

Address offset: 0x308

Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	USBRESET			Write '1' to Disable interrupt for USBRESET event																														
					See <a href="#">EVENTS_USBRESET</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
B	RW	STARTED			Write '1' to Disable interrupt for STARTED event																														
					See <a href="#">EVENTS_STARTED</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
C	RW	ENDEPIN0			Write '1' to Disable interrupt for ENDEPIN[0] event																														
					See <a href="#">EVENTS_ENDEPIN[0]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
D	RW	ENDEPIN1			Write '1' to Disable interrupt for ENDEPIN[1] event																														
					See <a href="#">EVENTS_ENDEPIN[1]</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														
E	RW	ENDEPIN2			Write '1' to Disable interrupt for ENDEPIN[2] event																														
					See <a href="#">EVENTS_ENDEPIN[2]</a>																														



Page 633

Page 634

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					Z Y X W V U T S R Q P O N M L K J I H G F E D C B A																																	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
			Enabled		1	Read: Enabled																																
Z	RW	ACCESSFAULT				Write '1' to Disable interrupt for ACCESSFAULT event																																
						See <a href="#">EVENTS_ACCESSFAULT</a>																																
			Clear		1	Disable																																
			Disabled		0	Read: Disabled																																
			Enabled		1	Read: Enabled																																

### 51.13.5 EVENTCAUSE

Address offset: 0x400

Details on event that caused the USBEVENT event

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				E C B A																															
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ISOOUTCRC				CRC error was detected on isochronous OUT endpoint 8. Write '1' to clear.																													
			NotDetected	0		No error detected																													
			Detected	1		Error detected																													
B	RW	SUSPEND				Signals that the USB lines have been seen idle long enough for the device to enter suspend. Write '1' to clear.																													
			NotDetected	0		Suspend not detected																													
			Detected	1		Suspend detected																													
C	RW	RESUME				Signals that a RESUME condition (K state or activity restart) has been detected on the USB lines. Write '1' to clear.																													
			NotDetected	0		Resume not detected																													
			Detected	1		Resume detected																													
E	RW	READY				Wrapper has re-initialized SFRs to the proper values. MAC is ready for normal operation. Write '1' to clear.																													
			NotDetected	0		USBEVENT was not issued due to USBD peripheral ready																													
			Ready	1		USB peripheral is ready																													

### 51.13.6 BUSSTATE

Address offset: 0x404

Provides the logic state of the D+ and D- lines

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id				B A																																			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value	Description																																	
A	R	DM			State of the D- line																																		
			Low	0	Low																																		
			High	1	High																																		
B	R	DP			State of the D+ line																																		
			Low	0	Low																																		
			High	1	High																																		

### 51.13.7 HALTED.EPIN[0]

Address offset: 0x420

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																												
A	R	GETSTATUS			IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.																												
			NotHalted	0	Endpoint is not halted																												
			Halted	1	Endpoint is halted																												

### 51.13.8 HALTED.EPIN[1]

Address offset: 0x424

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																											
A	R	GETSTATUS			IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.																											
			NotHalted	0	Endpoint is not halted																											
			Halted	1	Endpoint is halted																											

### 51.13.9 HALTED.EPIN[2]

Address offset: 0x428

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	R	GETSTATUS			IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.																															
			NotHalted	0	Endpoint is not halted																															
			Halted	1	Endpoint is halted																															

### 51.13.10 HALTED.EPIN[3]

Address offset: 0x42C

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value Id	Value	Description																										
A	R	GETSTATUS			IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.																										
			NotHalted	0	Endpoint is not halted																										
			Halted	1	Endpoint is halted																										

### 51.13.11 HALTED.EPIN[4]

Address offset: 0x430

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	R	GETSTATUS				IN endpoint halted status. Can be used as is as response to a																																
						GetStatus() request to endpoint.																																
			NotHalted	0		Endpoint is not halted																																
			Halted	1		Endpoint is halted																																

### 51.13.12 HALTED.EPIN[5]

Address offset: 0x434

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
A	R	GETSTATUS				IN endpoint halted status. Can be used as is as response to a																																
						GetStatus() request to endpoint.																																
			NotHalted	0		Endpoint is not halted																																
			Halted	1		Endpoint is halted																																

### 51.13.13 HALTED.EPIN[6]

Address offset: 0x438

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	R	GETSTATUS				IN endpoint halted status. Can be used as is as response to a																																
						GetStatus() request to endpoint.																																
			NotHalted	0		Endpoint is not halted																																
			Halted	1		Endpoint is halted																																

### 51.13.14 HALTED.EPIN[7]

Address offset: 0x43C

IN endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																																
A	R	GETSTATUS				IN endpoint halted status. Can be used as is as response to a																																
						GetStatus() request to endpoint.																																
			NotHalted	0		Endpoint is not halted																																
			Halted	1		Endpoint is halted																																

### 51.13.15 HALTED.EPOUT[0]

Address offset: 0x444

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																			A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																														
A	R	GETSTATUS				OUT endpoint halted status. Can be used as is as response to a																														
			NotHalted	0		GetStatus() request to endpoint.																														
			Halted	1		Endpoint is not halted																														
						Endpoint is halted																														

### 51.13.16 HALTED.EPOUT[1]

Address offset: 0x448

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																															
A	R	GETSTATUS					OUT endpoint halted status. Can be used as is as response to a																															
							GetStatus() request to endpoint.																															
			NotHalted	0			Endpoint is not halted																															
			Halted	1			Endpoint is halted																															

### 51.13.17 HALTED.EPOUT[2]

Address offset: 0x44C

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
A	R	GETSTATUS			OUT endpoint halted status. Can be used as is as response to a																																	
					GetStatus() request to endpoint.																																	
			NotHalted	0	Endpoint is not halted																																	
			Halted	1	Endpoint is halted																																	

### 51.13.18 HALTED.EPOUT[3]

Address offset: 0x450

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																															
A	R	GETSTATUS					OUT endpoint halted status. Can be used as is as response to a																															
							GetStatus() request to endpoint.																															
			NotHalted	0			Endpoint is not halted																															
			Halted	1			Endpoint is halted																															

### 51.13.19 HALTED.EPOUT[4]

Address offset: 0x454

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	GETSTATUS				OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.																													
			NotHalted	0		Endpoint is not halted																													
			Halted	1		Endpoint is halted																													

### 51.13.20 HALTED.EPOUT[5]

Address offset: 0x458

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
A	R	GETSTATUS				OUT endpoint halted status. Can be used as is as response to a																																
			NotHalted	0		GetStatus() request to endpoint.																																
			Halted	1		Endpoint is not halted																																
						Endpoint is halted																																

### 51.13.21 HALTED.EPOUT[6]

Address offset: 0x45C

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																		
A	R	GETSTATUS			OUT endpoint halted status. Can be used as is as response to a																																		
			NotHalted	0	GetStatus() request to endpoint.																																		
			Halted	1	Endpoint is not halted																																		
					Endpoint is halted																																		

### 51.13.22 HALTED.EPOUT[7]

Address offset: 0x460

OUT endpoint halted status. Can be used as is as response to a GetStatus() request to endpoint.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value	Id	Value	Description																																
A	R	GETSTATUS				OUT endpoint halted status. Can be used as is as response to a																																
			NotHalted	0		GetStatus() request to endpoint.																																
			Halted	1		Endpoint is not halted																																
						Endpoint is halted																																

### 51.13.23 EPSTATUS

Address offset: 0x468

Provides information on which endpoint's EasyDMA registers have been captured

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id					R Q P O N M L K J														I H G F E D C B A																			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value Id	Value	Description																																	
A	RW	EPIN0			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
B	RW	EPIN1			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
C	RW	EPIN2			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
D	RW	EPIN3			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
E	RW	EPIN4			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
F	RW	EPIN5			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
G	RW	EPIN6			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
H	RW	EPIN7			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
I	RW	EPIN8			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
J	RW	EPOUT0			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
K	RW	EPOUT1			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
L	RW	EPOUT2			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
M	RW	EPOUT3			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
N	RW	EPOUT4			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
O	RW	EPOUT5			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
P	RW	EPOUT6			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
Q	RW	EPOUT7			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	
R	RW	EPOUT8			Endpoint's EasyDMA registers captured state. Write '1' to clear.																																	
			NoData	0	EasyDMA registers have not been captured for this endpoint																																	
			DataDone	1	EasyDMA registers have been captured for this endpoint																																	



## 51.13.24 EPDATASTATUS

Address offset: 0x46C

Provides information on which endpoint(s) an acknowledged data transfer has occurred (EPDATA event)

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0								
Id					N														M	L	K	J	I	H	G														F	E	D	C	B	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0						
Id	RW	Field	Value Id	Value	Description																																							
A	RW	EPIN1			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
B	RW	EPIN2			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
C	RW	EPIN3			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
D	RW	EPIN4			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
E	RW	EPIN5			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
F	RW	EPIN6			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
G	RW	EPIN7			Acknowledged data transfer on this IN endpoint. Write '1' to clear.																																							
			NotDone	0	No acknowledged data transfer on this endpoint																																							
			DataDone	1	Acknowledged data transfer on this endpoint has occurred																																							
H	RW	EPOUT1			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							
			NotStarted	0	No acknowledged data transfer on this endpoint																																							
			Started	1	Acknowledged data transfer on this endpoint has occurred																																							
I	RW	EPOUT2			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							
			NotStarted	0	No acknowledged data transfer on this endpoint																																							
			Started	1	Acknowledged data transfer on this endpoint has occurred																																							
J	RW	EPOUT3			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							
			NotStarted	0	No acknowledged data transfer on this endpoint																																							
			Started	1	Acknowledged data transfer on this endpoint has occurred																																							
K	RW	EPOUT4			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							
			NotStarted	0	No acknowledged data transfer on this endpoint																																							
			Started	1	Acknowledged data transfer on this endpoint has occurred																																							
L	RW	EPOUT5			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							
			NotStarted	0	No acknowledged data transfer on this endpoint																																							
			Started	1	Acknowledged data transfer on this endpoint has occurred																																							
M	RW	EPOUT6			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																							

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																							
Id																				N M L K J I H																				G F E D C B A			
Reset 0x00000000				0 0 0 0 0 0 0 0								0 0 0 0 0 0 0 0								0 0 0 0 0 0 0 0								0 0 0 0 0 0 0 0															
Id	RW	Field	Value	Id	Value		Description																																				
			NotStarted	0	No acknowledged data transfer on this endpoint																																						
			Started	1	Acknowledged data transfer on this endpoint has occurred																																						
N	RW	EPOUT7			Acknowledged data transfer on this OUT endpoint. Write '1' to clear.																																						
			NotStarted	0	No acknowledged data transfer on this endpoint																																						
			Started	1	Acknowledged data transfer on this endpoint has occurred																																						

### 51.13.25 USBADDR

Address offset: 0x470

Device USB address

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	ADDR				Device USB address																													

### 51.13.26 BMREQUESTTYPE

Address offset: 0x480

SETUP data, byte 0, bmRequestType

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																																	C	B	B	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0					
Id	RW	Field	Value Id	Value	Description																																				
A	R	RECIPIENT			Data transfer type																																				
			Device	0	Device																																				
			Interface	1	Interface																																				
			Endpoint	2	Endpoint																																				
			Other	3	Other																																				
B	R	TYPE			Data transfer type																																				
			Standard	0	Standard																																				
			Class	1	Class																																				
			Vendor	2	Vendor																																				
C	R	DIRECTION			Data transfer direction																																				
			HostToDevice	0	Host-to-device																																				
			DeviceToHost	1	Device-to-host																																				

### 51.13.27 BREQUEST

Address offset: 0x484

SETUP data, byte 1, bRequest

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																												A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>			<b>Value</b>			<b>Description</b>																										
A	R	BREQUEST						SETUP data, byte 1, bRequest. Values provides for standard requests only, user must implement Class and Vendor values.																												
			STD_GET_STATUS			0	Standard request GET_STATUS																													
			STD_CLEAR_FEATURE			1	Standard request CLEAR_FEATURE																													
			STD_SET_FEATURE			3	Standard request SET_FEATURE																													

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
			STD_SET_ADDRESS	5	Standard request SET_ADDRESS																														
			STD_GET_DESCRIPTOR	6	Standard request GET_DESCRIPTOR																														
			STD_SET_DESCRIPTOR	7	Standard request SET_DESCRIPTOR																														
			STD_GET_CONFIGURATION	8	Standard request GET_CONFIGURATION																														
			STD_SET_CONFIGURATION	9	Standard request SET_CONFIGURATION																														
			STD_GET_INTERFACE	10	Standard request GET_INTERFACE																														
			STD_SET_INTERFACE	11	Standard request SET_INTERFACE																														
			STD_SYNC_FRAME	12	Standard request SYNC_FRAME																														

### 51.13.28 WVALUEL

Address offset: 0x488

SETUP data, byte 2, LSB of wValue

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value																								Description							
A	R	WVALUEL																										SETUP data, byte 2, LSB of wValue							

### 51.13.29 WVALUEH

Address offset: 0x48C

SETUP data, byte 3, MSB of wValue

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value																								Description							
A	R	WVALUEH																										SETUP data, byte 3, MSB of wValue							

### 51.13.30 WINDEXL

Address offset: 0x490

SETUP data, byte 4, LSB of wIndex

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id				A A A A A A A A																														
Reset 0x00000000				0 0																														
Id	RW	Field	Value Id	Value	Description																													
A	R	WINDEXL			SETUP data, byte 4, LSB of wIndex																													

### 51.13.31 WINDEXH

Address offset: 0x494

SETUP data, byte 5, MSB of wIndex

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																												A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value																Description															
A	R	WINDEXH																		SETUP data, byte 5, MSB of wIndex															

### 51.13.32 WLENGTHL

Address offset: 0x498

### SETUP data, byte 6, LSB of wLength

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 51.13.33 WLENGTHH

Address offset: 0x49C

### SETUP data, byte 7, MSB of wLength

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0					
Id																												A					A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value Id	Value		Description																																		
A	R	WLENGTHH				SETUP data, byte 7, MSB of wLength																																		

### 51.13.34 SIZE.EPOUT[0]

Address offset: 0x4A0

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 51.13.35 SIZE.EPOUT[1]

Address offset: 0x4A4

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																												A					A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value Id	Value	Description																																		
A	RW	SIZE			Amount of bytes received last in the data stage of this OUT endpoint																																		

### 51.13.36 SIZE.EPOUT[2]

Address offset: 0x4A8

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 51.13.37 SIZE.EPOUT[3]

Address offset: 0x4AC

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id																													A A A A A A A A							
Reset 0x00000000					0 0																															
Id	RW	Field	Value Id		Value				Description																											
A	RW	SIZE							Amount of bytes received last in the data stage of this OUT endpoint																											

### 51.13.38 SIZE.EPOUT[4]

Address offset: 0x4B0

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																							
Id																																					A A A A A A A A							
Reset 0x00000000					0 0																																							
Id	RW	Field	Value Id		Value																Description																							
A	RW	SIZE																			Amount of bytes received last in the data stage of this OUT endpoint																							

### 51.13.39 SIZE.EPOUT[5]

Address offset: 0x4B4

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																							
Id																																					A A A A A A A A							
Reset 0x00000000					0 0																																							
Id	RW	Field	Value Id		Value																Description																							
A	RW	SIZE																			Amount of bytes received last in the data stage of this OUT endpoint																							

### 51.13.40 SIZE.EPOUT[6]

Address offset: 0x4B8

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number					31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																							
Id																																					A A A A A A A A							
Reset 0x00000000					0 0																																							
Id	RW	Field	Value Id		Value																Description																							
A	RW	SIZE																			Amount of bytes received last in the data stage of this OUT endpoint																							

### 51.13.41 SIZE.EPOUT[7]

Address offset: 0x4BC

Amount of bytes received last in the data stage of this OUT endpoint

Write to any value to accept further OUT traffic on this endpoint, and overwrite the intermediate buffer.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	SIZE				Amount of bytes received last in the data stage of this OUT endpoint																													

## 51.13.42 SIZE.ISOOUT

Address offset: 0x4C0

Amount of bytes received last on this iso OUT data endpoint

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					B								A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field		Value	Id	Value		Description																															
A	RW	SIZE						Amount of bytes received last on this iso OUT data endpoint																															
B	RW	ZERO						Zero-length data packet received																															
				Normal		0	No zero-length data received, use value in SIZE																																
				ZeroData		1	Zero-length data received, ignore value in SIZE																																

## 51.13.43 ENABLE

Address offset: 0x500

Enable USB

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	ENABLE				Enable USB																													
			Disabled		0	USB peripheral is disabled																													
			Enabled		1	USB peripheral is enabled																													

## 51.13.44 USBPULLUP

Address offset: 0x504

Control of the USB pull-up

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	CONNECT				Control of the USB pull-up on the D+ line																													
			Disabled		0	Pull-up is disconnected																													
			Enabled		1	Pull-up is connected to D+																													

## 51.13.45 DPDMVALUE

Address offset: 0x508

State at which the DPDMDRIVE task will force D+ and D-. The DPDMNODRIVE task reverts the control of the lines to MAC IP (no forcing).

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																																	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	STATE				State at which the DPDMMDRIVE task will force D+ and D-																															
			Resume	1		D+ forced low, D- forced high (K state) for a timing pre-set in hardware (50 us or 5 ms, depending on bus state)																															
			J	2		D+ forced high, D- forced low (J state)																															
			K	4		D+ forced low, D- forced high (K state)																															

### 51.13.46 DTOGGLE

Address offset: 0x50C

Data toggle control and status.

Write this register first with VALUE=Nop to select the endpoint; then read it to get the status from VALUE, or write it again with VALUE=Data0 or Data1.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																													C	C	B					A	A	A
Reset 0x00000100					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																
A	RW	EP				Select bulk endpoint number																																
B	RW	IO				Selects IN or OUT endpoint																																
			Out	0		Selects OUT endpoint																																
			In	1		Selects IN endpoint																																
C	RW	VALUE				Data toggle value																																
			Nop	0		No action on data toggle when writing the register with this value																																
			Data0	1		Data toggle is DATA0 on endpoint set by EP and IO																																
			Data1	2		Data toggle is DATA1 on endpoint set by EP and IO																																

### 51.13.47 EPINEN

Address offset: 0x510

Endpoint IN enable

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													I	H	G	F	E	D	C	B	A
Reset 0x00000001					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>	<b>Description</b>																															
A	RW	IN0				Enable IN endpoint 0																															
			Disable	0		Disable endpoint IN 0 (no response to IN tokens)																															
			Enable	1		Enable endpoint IN 0 (response to IN tokens)																															
B	RW	IN1				Enable IN endpoint 1																															
			Disable	0		Disable endpoint IN 1 (no response to IN tokens)																															
			Enable	1		Enable endpoint IN 1 (response to IN tokens)																															
C	RW	IN2				Enable IN endpoint 2																															
			Disable	0		Disable endpoint IN 2 (no response to IN tokens)																															
			Enable	1		Enable endpoint IN 2 (response to IN tokens)																															
D	RW	IN3				Enable IN endpoint 3																															
			Disable	0		Disable endpoint IN 3 (no response to IN tokens)																															
			Enable	1		Enable endpoint IN 3 (response to IN tokens)																															
E	RW	IN4				Enable IN endpoint 4																															
			Disable	0		Disable endpoint IN 4 (no response to IN tokens)																															
			Enable	1		Enable endpoint IN 4 (response to IN tokens)																															
F	RW	IN5				Enable IN endpoint 5																															
			Disable	0		Disable endpoint IN 5 (no response to IN tokens)																															

## 51.13.48 EPOUTEN

Endpoint OUT enable

## 51.13.49 EPSTALL

## STALL endpoints



### 51.13.50 ISOSPLIT

Controls the split of ISO buffers

### 51.13.51 FRAMECNTR

Returns the current value of the start of frame counter

## 51.13.52 ISOINCONFIG

Controls the response of the ISO IN endpoint to an IN token when no data is ready to be sent

### 51.13.53 EPIN[0].PTR

## Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																													

### 51.13.54 EPIN[0].MAXCNT

Address offset: 0x604

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																															
A	RW	MAXCNT		[64..0]	Maximum number of bytes to transfer																															

### 51.13.55 EPIN[0].AMOUNT

Address offset: 0x608

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Id																																A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0				
Id	RW	Field	Value	Id	Value		Description																																
A	R	AMOUNT					Number of bytes transferred in the last transaction																																

### 51.13.56 EPIN[1].PTR

Address offset: 0x614

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>				<b>Description</b>																											
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																											

### 51.13.57 EPIN[1].MAXCNT

Address offset: 0x618

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																														A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>	<b>Value</b>	<b>Description</b>																																	
A	RW	MAXCNT		[64..0]	Maximum number of bytes to transfer																																	

### 51.13.58 EPIN[1].AMOUNT

Address offset: 0x61C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																														A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	R	AMOUNT			Number of bytes transferred in the last transaction																														

### 51.13.59 EPIN[2].PTR

Address offset: 0x628

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																														

### 51.13.60 EPIN[2].MAXCNT

Address offset: 0x62C

Maximum number of bytes to transfer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																															

### 51.13.61 EPIN[2].AMOUNT

Address offset: 0x630

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.62 EPIN[3].PTR

Address offset: 0x63C

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																														

### 51.13.63 EPIN[3].MAXCNT

Address offset: 0x640

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.64 EPIN[3].AMOUNT

Address offset: 0x644

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.65 EPIN[4].PTR

Address offset: 0x650

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																																

### 51.13.66 EPIN[4].MAXCNT

Address offset: 0x654

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.67 EPIN[4].AMOUNT

Address offset: 0x658

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.68 EPIN[5].PTR

Address offset: 0x664

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																												

### 51.13.69 EPIN[5].MAXCNT

Address offset: 0x668

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.70 EPIN[5].AMOUNT

Address offset: 0x66C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.71 EPIN[6].PTR

Address offset: 0x678

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																												

### 51.13.72 EPIN[6].MAXCNT

Address offset: 0x67C

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.73 EPIN[6].AMOUNT

Address offset: 0x680

Number of bytes transferred in the last transaction

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field		Value	Id	Value		Description																													
A	R	AMOUNT						Number of bytes transferred in the last transaction																													

### 51.13.74 EPIN[7].PTR

Address offset: 0x68C

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																														

### 51.13.75 EPIN[7].MAXCNT

Address offset: 0x690

Maximum number of bytes to transfer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0																						
Id																													A					A					A					A					A									
Reset 0x00000000					0																								0					0					0					0					0					0				
Id	RW	Field	Value		Id	Value		Description																																																		
A	RW	MAXCNT				[64..0]		Maximum number of bytes to transfer																																																		

### 51.13.76 EPIN[7].AMOUNT

Address offset: 0x694

Number of bytes transferred in the last transaction

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	R	AMOUNT					Number of bytes transferred in the last transaction																													

### 51.13.77 ISOIN.PTR

Address offset: 0x6A0

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																																	

### 51.13.78 ISOIN.MAXCNT

Address offset: 0x6A4

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 51.13.79 ISOIN.AMOUNT

Address offset: 0x6A8

Number of bytes transferred in the last transaction

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																													A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field		Value	Id	Value		Description																															
A	R	AMOUNT				Number of bytes transferred in the last transaction																																	

### 51.13.80 EPOUT[0].PTR

Address offset: 0x700

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																														

### 51.13.81 EPOUT[0].MAXCNT

Address offset: 0x704

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.82 EPOUT[0].AMOUNT

Address offset: 0x708

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.83 EPOUT[1].PTR

Address offset: 0x714

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																												

### 51.13.84 EPOUT[1].MAXCNT

Address offset: 0x718

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.85 EPOUT[1].AMOUNT

Address offset: 0x71C

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.86 EPOUT[2].PTR

Address offset: 0x728

Data pointer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	PTR																														
Data pointer. Accepts any address in Data RAM.																																

### 51.13.87 EPOUT[2].MAXCNT

Address offset: 0x72C

Maximum number of bytes to transfer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																											A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	MAXCNT																														
Maximum number of bytes to transfer																																

### 51.13.88 EPOUT[2].AMOUNT

Address offset: 0x730

Number of bytes transferred in the last transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																											A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	R	AMOUNT																														
Number of bytes transferred in the last transaction																																

### 51.13.89 EPOUT[3].PTR

Address offset: 0x73C

Data pointer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	PTR																														
Data pointer. Accepts any address in Data RAM.																																

### 51.13.90 EPOUT[3].MAXCNT

Address offset: 0x740

Maximum number of bytes to transfer

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																											A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	RW	MAXCNT																														
Maximum number of bytes to transfer																																

### 51.13.91 EPOUT[3].AMOUNT

Address offset: 0x744

Number of bytes transferred in the last transaction

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																											A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field																														
A	R	AMOUNT																														
Number of bytes transferred in the last transaction																																



### 51.13.92 EPOUT[4].PTR

Address offset: 0x750

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value</b>	<b>Id</b>	<b>Value</b>		<b>Description</b>																													
A	RW	PTR					Data pointer. Accepts any address in Data RAM.																													

### 51.13.93 EPOUT[4].MAXCNT

Address offset: 0x754

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																														A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.94 EPOUT[4].AMOUNT

Address offset: 0x758

Number of bytes transferred in the last transaction

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																															A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																															
A	R	AMOUNT				Number of bytes transferred in the last transaction																															

### 51.13.95 EPOUT[5].PTR

Address offset: 0x764

Data pointer

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A			
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																																	

### 51.13.96 EPOUT[5].MAXCNT

Address offset: 0x768

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																														A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	MAXCNT			[64..0]	Maximum number of bytes to transfer																													

### 51.13.97 EPOUT[5].AMOUNT

Address offset: 0x76C

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																														A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value		Description																															
A	R	AMOUNT				Number of bytes transferred in the last transaction																															

### 51.13.98 EPOUT[6].PTR

Address offset: 0x778

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																											

### 51.13.99 EPOUT[6].MAXCNT

Address offset: 0x77C

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																													A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	MAXCNT		[64..0]	Maximum number of bytes to transfer																															

### 51.13.100 EPOUT[6].AMOUNT

Address offset: 0x780

Number of bytes transferred in the last transaction

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id																														A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	R	AMOUNT			Number of bytes transferred in the last transaction																															

### 51.13.101 EPOUT[7].PTR

Address offset: 0x78C

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value				Description																											
A	RW	PTR						Data pointer. Accepts any address in Data RAM.																											

### 51.13.102 EPOUT[7].MAXCNT

Address offset: 0x790

Maximum number of bytes to transfer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id																														A	A	A	A	A	A	A	
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value				Description																													
A	RW	MAXCNT		[64..0]				Maximum number of bytes to transfer																													

### 51.13.103 EPOUT[7].AMOUNT

Address offset: 0x794

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A A A A A A A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value	Id	Value	Description																													
A	R	AMOUNT				Number of bytes transferred in the last transaction																													

### 51.13.104 ISOOUT.PTR

Address offset: 0x7A0

Data pointer

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																													
A	RW	PTR				Data pointer. Accepts any address in Data RAM.																													

### 51.13.105 ISOOUT.MAXCNT

Address offset: 0x7A4

Maximum number of bytes to transfer

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

### 51.13.106 ISOOUT.AMOUNT

Address offset: 0x7A8

Number of bytes transferred in the last transaction

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A A																															

## 51.14 Electrical specification

### 51.14.1 USB Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
$I_{\text{USB,ACTIVE,VBUS}}$	Current from $V_{\text{BUS}}$ supply, USB active, excluding current through pull-up and $I_{\text{USB,QUIES}}$				mA
$I_{\text{USB,SUSPEND,VBUS}}$	Current from $V_{\text{BUS}}$ supply, USB suspended, excluding current through pull-up				$\mu\text{A}$
$I_{\text{USB,ACTIVE,VDD}}$	Current from $V_{\text{DD}}$ supply, USB active, including 48 MHz clock, excluding DMA accesses				mA
$I_{\text{USB,SUSPEND,VDD}}$	Current from $V_{\text{DD}}$ supply, USB suspended				$\mu\text{A}$
$R_{\text{USB,PU,ACTIVE}}$	Value of pull-up on D+, bus active (upstream device transmitting)	1425	2300	3090	$\Omega$
$R_{\text{USB,PU,IDLE}}$	Value of pull-up on D+, bus idle	900	1200	1575	$\Omega$

Symbol	Description	Min.	Typ.	Max.	Units
$t_{\text{USB,DETRST}}$	Minimum duration of an SE0 state to be detected as a USB reset condition				$\mu\text{s}$
$f_{\text{USB,CLK}}$	Frequency of local clock, USB active		48		MHz
$f_{\text{USB,TOL}}$	Accuracy of local clock, USB active <sup>40</sup>			$\pm 1000$	ppm
$T_{\text{USB,JITTER}}$	Jitter on USB local clock, USB active			$\pm 1$	ns
$t_{\text{USB,RSMREC}}$	Hardware Resume Recovery Time (includes local clock startup time) <sup>41</sup>				ms
$t_{\text{USB,SUSPEND}}$	Time of bus inactivity detected as USB suspend				ms
$t_{\text{USB,RSTREC}}$	Hardware Reset Recovery Time (includes local clock startup time) <sup>42</sup>				ms
$t_{\text{USB,DRIVEK}}$	Duration of driving resume upstream (using the automated Resume function in the DPDMVALUE register)				ms
$t_{\text{USB,FDRATE}}$	Full-speed data rate				Mb/s
$t_{\text{SOF,EVENT}}$	Time from USB start of frame to EVENTS_SOF sent				$\mu\text{s}$
$t_{\text{EN2RDY}}$	Time from ENABLE=Enabled to READY event sent				$\mu\text{s}$

<sup>40</sup> The local clock can be stopped during USB suspend

<sup>41</sup> This is a contributor to the  $T_{\text{RSMRCY}}$  time as defined in USB specification chapter 7

<sup>42</sup> This is a contributor to the  $T_{\text{RSTRCY}}$  time as defined in USB specification chapter 7

## 52 QSPI — Quad serial peripheral interface

The QSPI peripheral provides support for communicating with an external flash memory device using SPI.

Listed here are the main features for the QSPI peripheral:

- Single/dual/quad SPI input/output
- 2–32 MHz configurable clock frequency
- Single-word read/write access from/to external flash
- EasyDMA for block read and write transfers
- Execute in place (XIP) for executing program directly from external flash
- 8 MHz XIP execution speed for 16 bit instruction fetches and 4 MHz execution speed for 32 bit instruction fetches

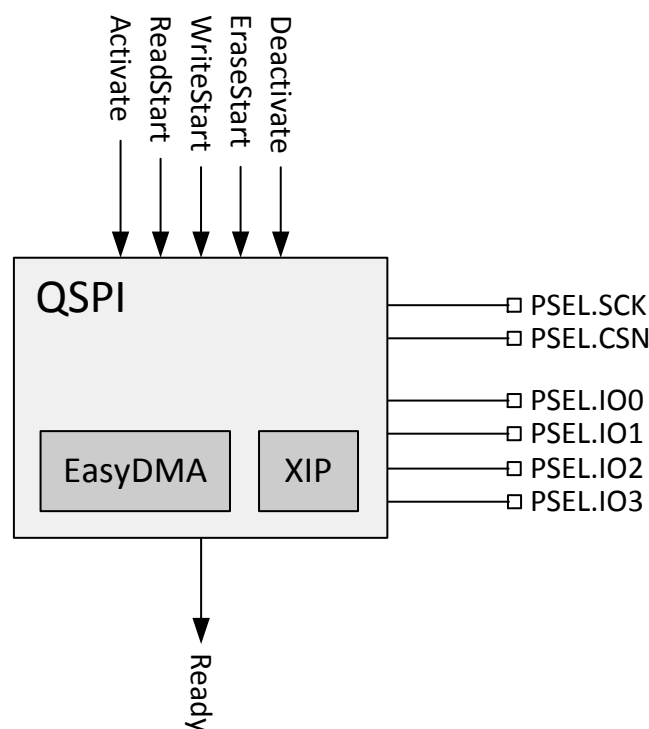


Figure 185: Block diagram

### 52.1 Configuring peripheral

Before any data can be transferred to or from the external flash memory, the peripheral needs to be configured.

1. Select input/output pins in [PSEL.SCK](#) on page 672, [PSEL.CSN](#) on page 672, [PSEL.IO0](#) on page 673, [PSEL.IO1](#) on page 673, [PSEL.IO2](#) on page 673, and [PSEL.IO3](#) on page 673. See [Reference circuitry](#) on page 686 for the recommended pins.
2. To ensure stable operation, set the GPIO drive strength to “high drive”. See the [GPIO — General purpose input/output](#) on page 155 chapter for details on how to configure GPIO drive strength.
3. Configure the interface towards the external flash memory using [IFCONFIG0](#) on page 674, [IFCONFIG1](#) on page 674, and [ADDRCONF](#) on page 675.
4. Enable the QSPI peripheral and acquire I/O pins using [ENABLE](#) on page 670.
5. Activate the external flash memory interface using the ACTIVATE task. The READY event will be generated when the interface has been activated and the external flash memory is ready for access.

**Important:** If the [IFCONFIG0](#) on page 674 register is configured to use the quad mode, the external flash device also needs to be set in the quad mode before any data transfers can take place.

This can be done by sending custom instructions to the external flash device, as described in [Sending custom instructions](#) on page 663.

## 52.2 Write operation

A write operation to the external flash is configured using the [WRITE.DST](#) on page 671, [WRITE.SRC](#) on page 671, and [WRITE.CNT](#) on page 671 registers and started using the WRITESTART task.

The READY event is generated when the transfer is complete.

The QSPI peripheral automatically takes care of splitting DMA transfers into page writes.

## 52.3 Read operation

A read operation from the external flash is configured using the [READ.SRC](#) on page 671, [READ.DST](#) on page 671, and [READ.CNT](#) on page 671 registers and started using the READSTART task.

The READY event is generated when the transfer is complete.

## 52.4 Erase operation

Erase of pages/blocks of the external flash is configured using the [ERASE.PTR](#) on page 672 and [ERASE.LEN](#) on page 672 registers and started using the ERASESTART task.

The READY event is generated when the erase operation has been started.

Note that in this case the READY event will not indicate that the erase operation of the flash has been completed, but it only signals that the erase operation has been started. The actual status of the erase operation can normally be read from the external flash using a custom instruction, see [Sending custom instructions](#) on page 663.

## 52.5 Execute in place

Execute in place (XIP) allows the CPU to execute program code directly from the external flash.

After the external flash has been configured, the CPU can execute code from the external flash by accessing the XIP memory region. See the figure below and [Memory map](#) on page 21 for details.

When accessing the XIP memory region, the start address of this XIP memory region will map to the address [XIPOFFSET](#) on page 674 of the external flash.

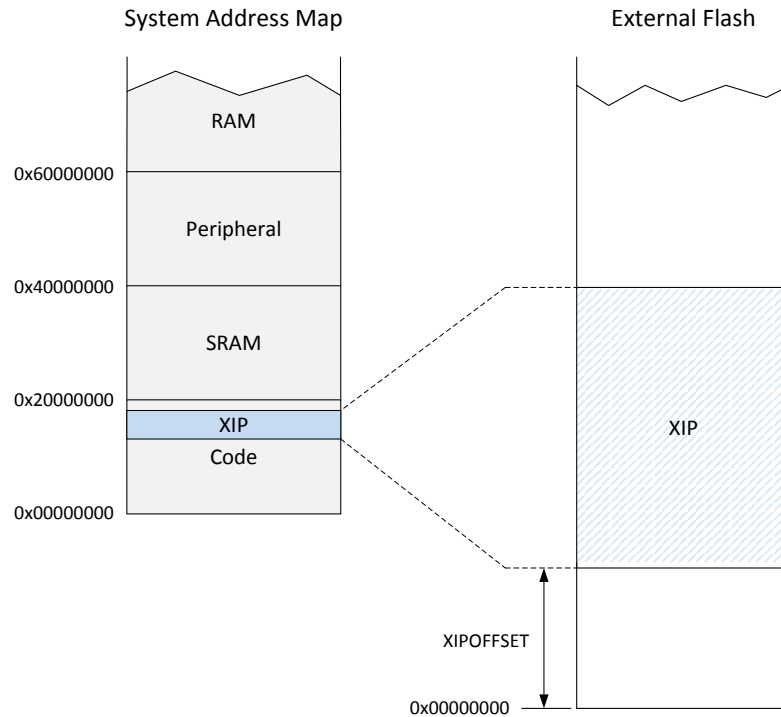


Figure 186: XIP memory map

## 52.6 Sending custom instructions

Custom instructions can be sent to the external flash using the [CINSTRCONF](#) on page 676, [CINSTRDAT0](#) on page 676, and [CINSTRDAT1](#) on page 677 registers. It is possible to send an instruction consisting of a one-byte opcode and up to 8 bytes of additional data and to read its response.

A custom instruction is prepared by first writing the data to be sent to [CINSTRDAT0](#) on page 676 and [CINSTRDAT1](#) on page 677 before writing the opcode and other configurations to the [CINSTRCONF](#) on page 676 register.

The custom instruction is sent when the [CINSTRCONF](#) on page 676 register is written and it is always sent on a single data line SPI interface.

The READY event will be generated when the custom instruction has been sent.

After a custom instruction has been sent, the [CINSTRDAT0](#) on page 676 and [CINSTRDAT1](#) on page 677 will contain the response bytes from the custom instruction.

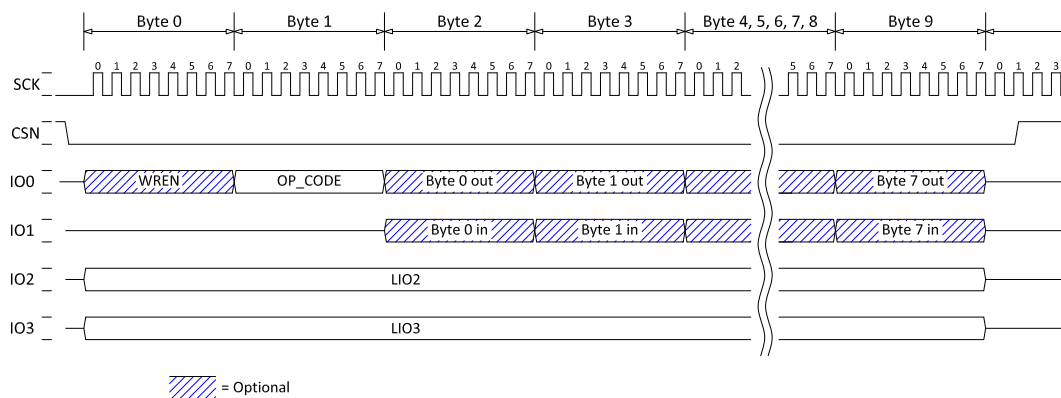


Figure 187: Sending custom instruction

## 52.7 Deep power-down mode

The external flash memory can be put in deep power-down mode (DPM) to minimize its current consumption when there is no need to access the memory.

DPM is enabled in the [IFCONFIG0](#) on page 674 register and configured in the [DPMDUR](#) on page 675 register. The DPM status of the external memory can be read in the [STATUS](#) on page 675 register. The DPMDUR register has to be configured according to the external flash specification to get the information in the STATUS register and the timing of the READY event correct.

Entering/exiting DPM is controlled using the [IFCONFIG1](#) on page 674 register.


## 52.8 Instruction set

The table below shows the instruction set being used by the QSPI peripheral when communicating with an external flash device.

**Table 130: Instruction set**

Instruction	Opcode	Description
WREN	0x06	Write enable
RDSR	0x05	Read status register
WRSR	0x01	Write status register
FASTREAD	0x0B	Read bytes at higher speed
READ2O	0x3B	Dual-read output
READ2IO	0xBB	Dual-read input/output
READ4O	0x6B	Quad-read output
READ4IO	0xEB	Quad-read input/output
PP	0x02	Page program
PP2O	0xA2	Dual-page program output
PP4O	0x32	Quad-page program output
PP4IO	0x38	Quad-page program input/output
SE	0x20	Sector erase
BE	0xD8	Block erase
CE	0xC7	Chip erase
DP	0xB9	Enter deep power-down mode
DPE	0xAB	Exit deep power-down mode
EN4B	Specified in the <a href="#">ADDRCONF</a> on page 675 register	Enable 32 bit address mode

## 52.9 Interface description

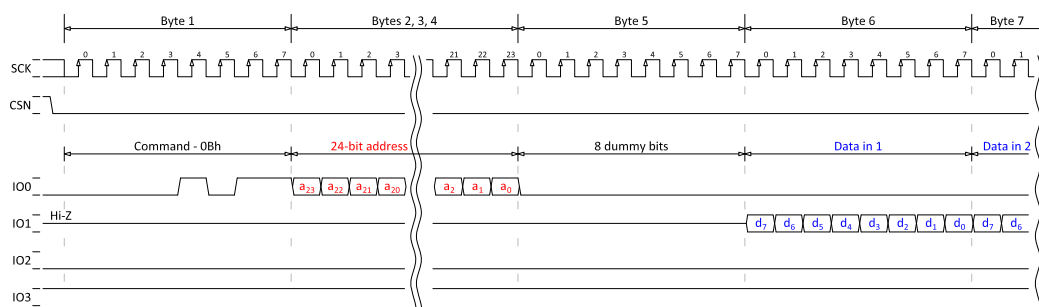

**Figure 188: 24-bit FASTREAD, SPI MODE = MODE0**



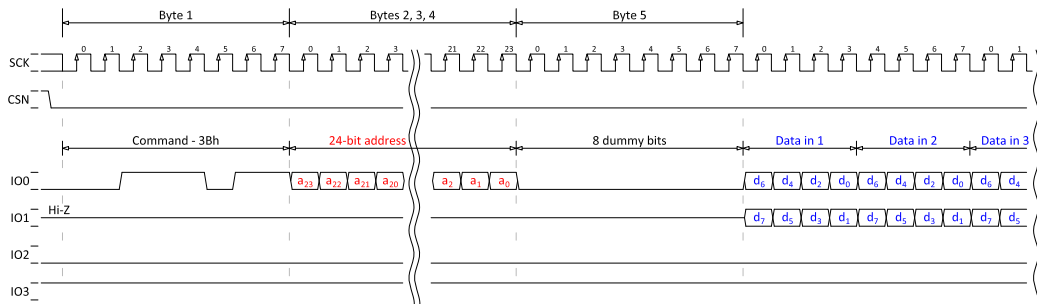


Figure 189: 24-bit READ2O (dual-read output), SPI MODE = MODE0

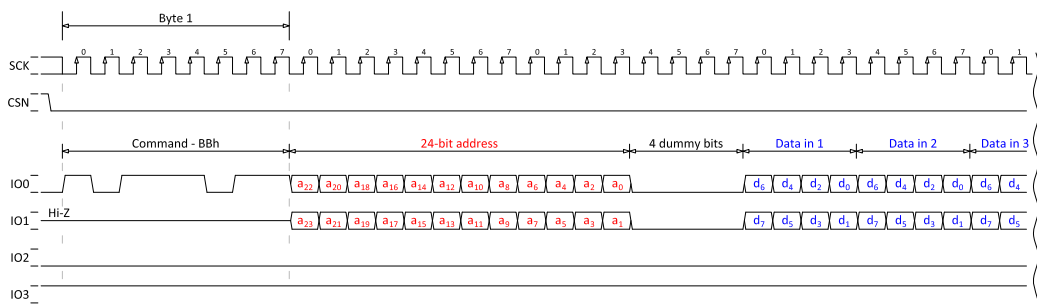


Figure 190: 24-bit READ2IO (dual read input/output), SPI MODE = MODE0

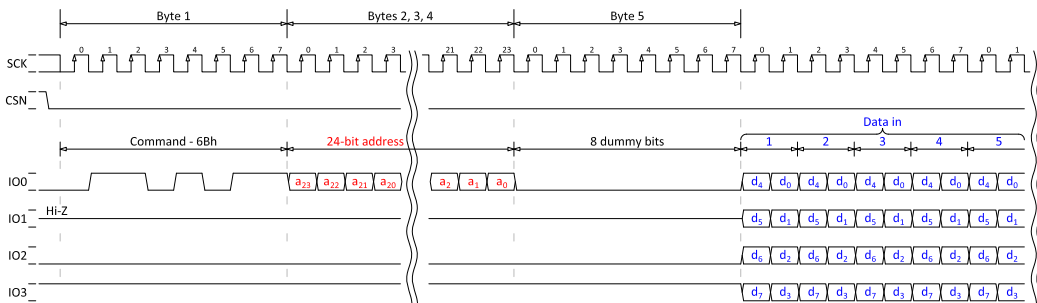


Figure 191: 24-bit READ4O (quad-read output), SPI MODE = MODE0

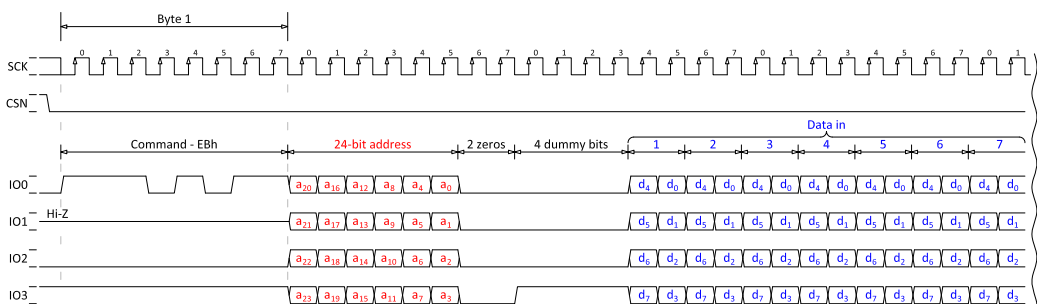


Figure 192: 24-bit READ4IO (quad-read input/output), SPI MODE = MODE0

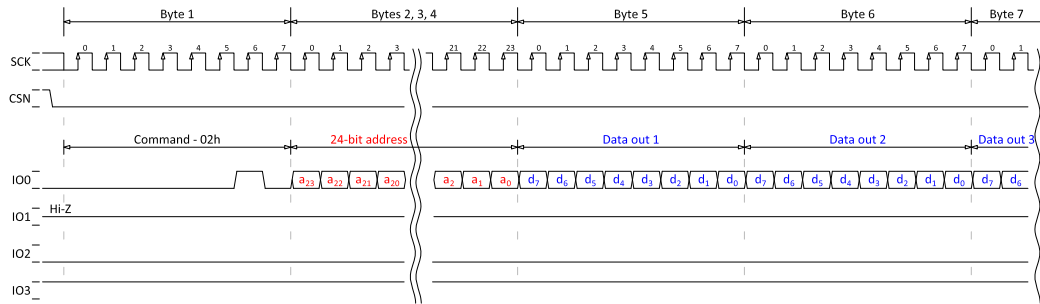


Figure 193: 24-bit PP (page program), SPI MODE = MODE0

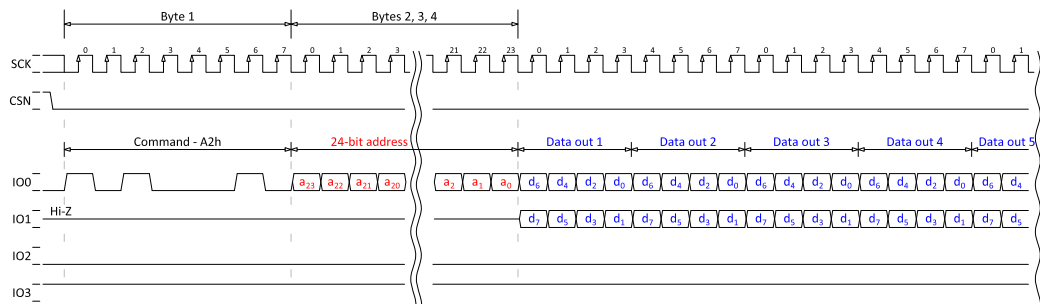


Figure 194: 24-bit PP2O (dual-page program output), SPI MODE = MODE0

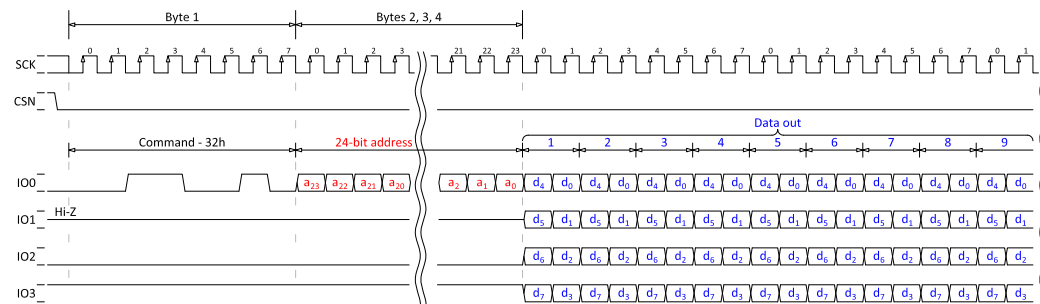


Figure 195: 24-bit PP4O (quad page program output), SPI MODE = MODE0

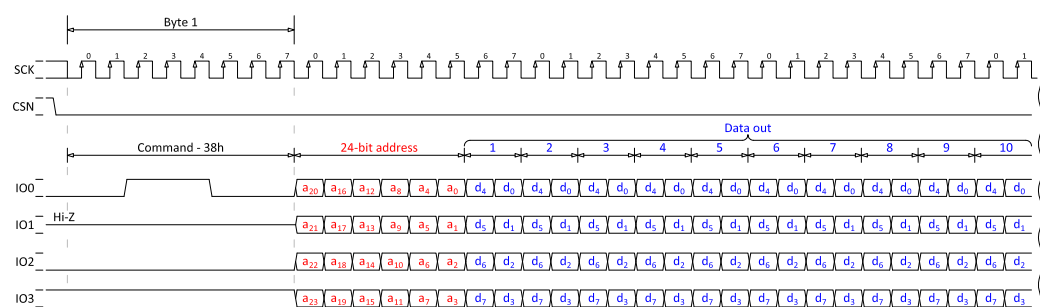


Figure 196: 24-bit PP4IO (quad page program input/output), SPI MODE = MODE0

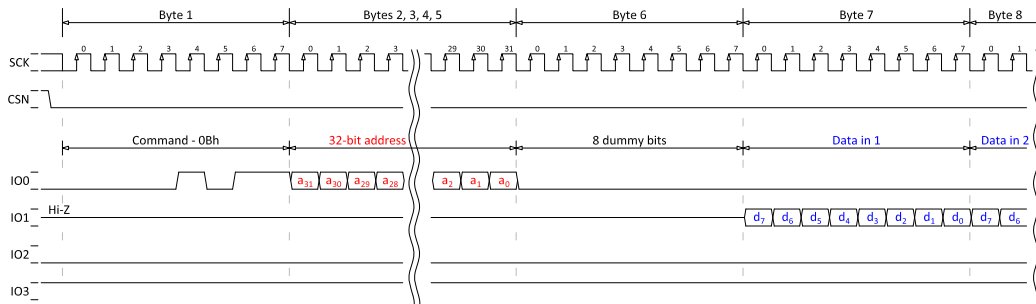


Figure 197: 32-bit FASTREAD, SPI MODE = MODE0

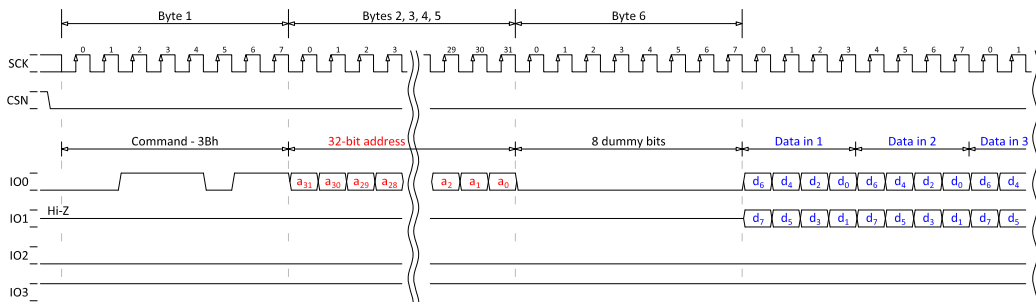


Figure 198: 32-bit READ2O (dual-read output), SPI MODE = MODE0

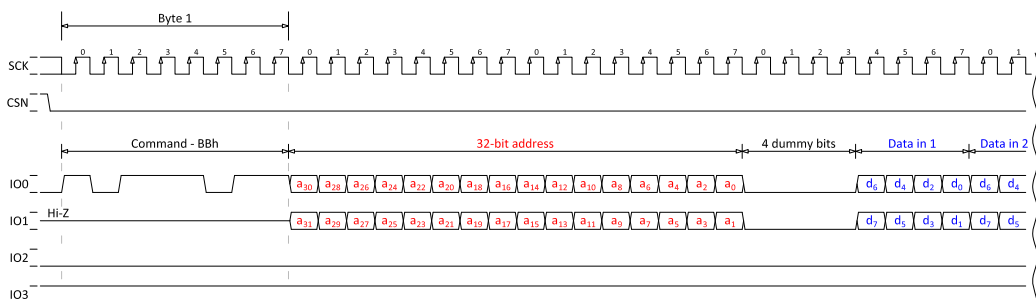


Figure 199: 32-bit READ2IO (dual read input/output), SPI MODE = MODE0

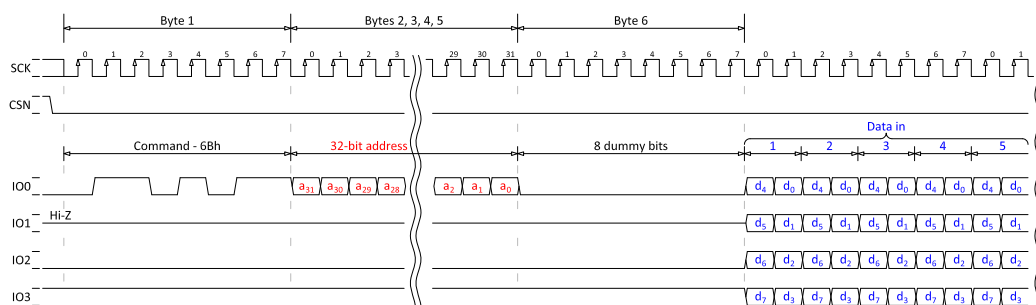


Figure 200: 32-bit READ4O (quad-read output), SPI MODE = MODE0

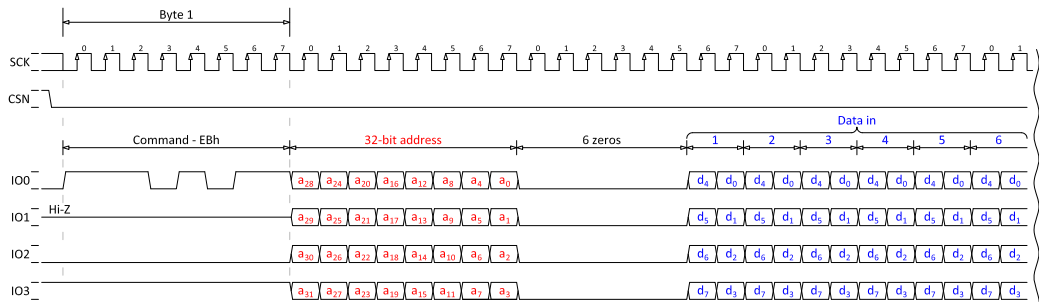


Figure 201: 32-bit READ4IO (quad-read input/output), SPI MODE = MODE0

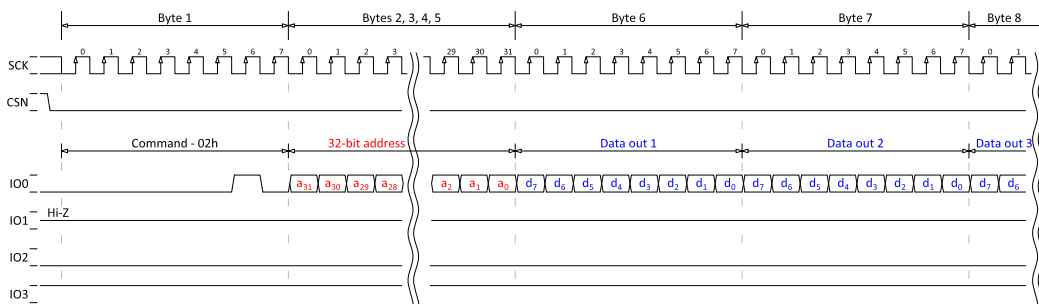


Figure 202: 32-bit PP (page program), SPI MODE = MODE0

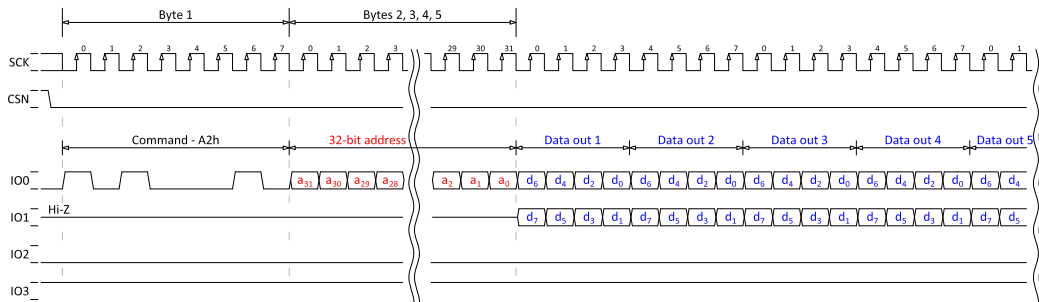


Figure 203: 32-bit PP2O (dual-page program output), SPI MODE = MODE0

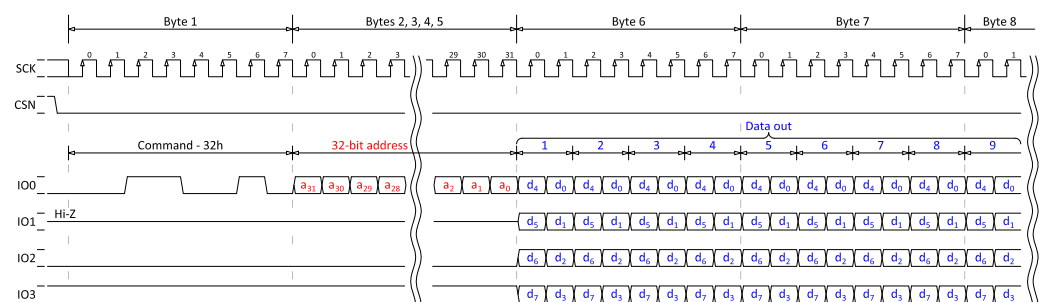


Figure 204: 32-bit PP4O (quad-page program output), SPI MODE = MODE0

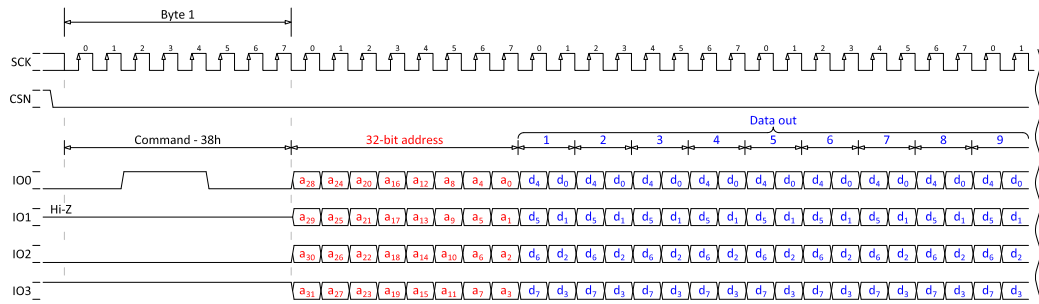


Figure 205: 32-bit PP4IO (quad page program input/output), SPI MODE = MODE0

## 52.10 Registers

Table 131: Instances

Base address	Peripheral	Instance	Description	Configuration
0x40029000	QSPI	QSPI	External memory interface	

Table 132: Register Overview

Register	Offset	Description
TASKS_ACTIVATE	0x000	Activate QSPI interface
TASKS_READSTART	0x004	Start transfer from external flash memory to internal RAM
TASKS_WRITESTART	0x008	Start transfer from internal RAM to external flash memory
TASKS_ERASESTART	0x00C	Start external flash memory erase operation
EVENTS_READY	0x100	QSPI peripheral is ready. This event will be generated as a response to any QSPI task.
INTEN	0x300	Enable or disable interrupt
INTENSET	0x304	Enable interrupt
INTENCLR	0x308	Disable interrupt
ENABLE	0x500	Enable QSPI peripheral and acquire the pins selected in PSELn registers
READ.SRC	0x504	Flash memory source address
READ.DST	0x508	RAM destination address
READ.CNT	0x50C	Read transfer length
WRITE.DST	0x510	Flash destination address
WRITE.SRC	0x514	RAM source address
WRITE.CNT	0x518	Write transfer length
ERASE.PTR	0x51C	Start address of flash block to be erased
ERASE.LEN	0x520	Size of block to be erased.
PSEL.SCK	0x524	Pin select for serial clock SCK
PSEL.CSN	0x528	Pin select for chip select signal CSN.
PSEL.IO0	0x530	Pin select for serial data MOSI/IO0.
PSEL.IO1	0x534	Pin select for serial data MISO/IO1.
PSEL.IO2	0x538	Pin select for serial data IO2.
PSEL.IO3	0x53C	Pin select for serial data IO3.
XIPOFFSET	0x540	Address offset into the external memory for Execute in Place operation.
IFCONFIG0	0x544	Interface configuration.
IFCONFIG1	0x600	Interface configuration.
STATUS	0x604	Status register.
DPMDUR	0x614	Set the duration required to enter/exit deep power-down mode (DPM).
ADDRCONF	0x624	Extended address configuration.
CINSTRCONF	0x634	Custom instruction configuration register.
CINSTRDAT0	0x638	Custom instruction data register 0.
CINSTRDAT1	0x63C	Custom instruction data register 1.
IFTIMING	0x640	SPI interface timing.

### 52.10.1 INTEN

Address offset: 0x300

## Enable or disable interrupt

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A																															
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
<b>Id</b>	<b>RW</b>	<b>Field</b>	<b>Value Id</b>		<b>Value</b>		<b>Description</b>																									
A	RW	READY					Enable or disable interrupt for READY event																									
							See <a href="#">EVENTS_READY</a>																									
			Disabled		0		Disable																									
			Enabled		1		Enable																									

## 52.10.2 INTENSET

Address offset: 0x304

### Enable interrupt

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id				A																																
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Id	RW	Field	Value Id	Value	Description																															
A	RW	READY			Write '1' to Enable interrupt for READY event																															
					See <a href="#">EVENTS_READY</a>																															
		Set	1	1	Enable																															
		Disabled	0	0	Read: Disabled																															
		Enabled	1	1	Read: Enabled																															

### 52.10.3 INTENCLR

Address offset: 0x308

### Disable interrupt

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				A																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	READY			Write '1' to Disable interrupt for READY event																														
					See <a href="#">EVENTS_READY</a>																														
			Clear	1	Disable																														
			Disabled	0	Read: Disabled																														
			Enabled	1	Read: Enabled																														

### 52.10.4 ENABLE

Address offset: 0x500

### Enable QSPI peripheral and acquire the pins selected in PSELn registers

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																																	
Id																																				A	
Reset 0x00000000				0 0																																	
Id	RW	Field	Value	Id	Value																																Description
A	RW	ENABLE																																			Enable or disable QSPI
			Disabled	0																																	Disable QSPI
			Enabled	1																																	Enable QSPI

### 52.10.5 READ.SRC

Address offset: 0x504

Flash memory source address

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value					Description																										
A	RW	SRC								Word-aligned flash memory source address.																										

### 52.10.6 READ.DST

Address offset: 0x508

RAM destination address

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	DST				Word-aligned RAM destination address.																										

### 52.10.7 READ.CNT

Address offset: 0x50C

Read transfer length

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	CNT				Read transfer length in number of bytes. The length must be a multiple of 4 bytes.																														

### 52.10.8 WRITE.DST

Address offset: 0x510

Flash destination address

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	DST				Word-aligned flash destination address.																										

### 52.10.9 WRITE.SRC

Address offset: 0x514

RAM source address

Bit number	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																										
A	RW	SRC				Word-aligned RAM source address.																										

### 52.10.10 WRITE.CNT

Address offset: 0x518

Write transfer length

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0			
Id																					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Id	RW	Field	Value	Id	Value	Description																																	
A	RW	CNT				Write transfer length in number of bytes. The length must be a multiple of 4 bytes.																																	

### 52.10.11 ERASE.PTR

Address offset: 0x51C

Start address of flash block to be erased

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value		Id	Value		Description																												
A	RW	PTR						Word-aligned start address of block to be erased.																												

### 52.10.12 ERASE.LEN

Address offset: 0x520

Size of block to be erased.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																																	A	A		
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	LEN				LEN																														
			4KB		0	Erase 4 kB block (flash command 0x20)																														
			64KB		1	Erase 64 kB block (flash command 0xD8)																														
			All		2	Erase all (flash command 0xC7)																														

### 52.10.13 PSEL.SCK

Address offset: 0x524

Pin select for serial clock SCK

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0							
Id					C																																		B	A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1						
Id	RW	Field	Value	Id	Value	Description																																					
A	RW	PIN			[0..31]	Pin number																																					
B	RW	PORT			[0..1]	Port number																																					
C	RW	CONNECT				Connection																																					
			Disconnected		1	Disconnect																																					
			Connected		0	Connect																																					

### 52.10.14 PSEL.CSN

Address offset: 0x528

Pin select for chip select signal CSN.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0											
Id					C																								B															A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1										
Id	RW	Field	Value	Id	Value		Description																																								
A	RW	PIN			[0..31]		Pin number																																								
B	RW	PORT			[0..1]		Port number																																								
C	RW	CONNECT					Connection																																								



Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0														
Id				C																										B				A				A				A							
Reset 0xFFFFFFFF				1																										1				1				1				1				1			
Id	RW	Field	Value Id	Value										Description																																			
			Disconnected	1										Disconnect																																			
			Connected	0										Connect																																			

### 52.10.15 PSEL.IO0

Address offset: 0x530

Pin select for serial data MOSI/IO0.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																										B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value	Description																														
A	RW	PIN		[0..31]	Pin number																														
B	RW	PORT		[0..1]	Port number																														
C	RW	CONNECT			Connection																														
			Disconnected	1	Disconnect																														
			Connected	0	Connect																														

### 52.10.16 PSEL.IO1

Address offset: 0x534

Pin select for serial data MISO/IO1.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																										B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PIN		[0..31]		Pin number																													
B	RW	PORT		[0..1]		Port number																													
C	RW	CONNECT				Connection																													
			Disconnected	1		Disconnect																													
			Connected	0		Connect																													

### 52.10.17 PSEL.IO2

Address offset: 0x538

Pin select for serial data IO2.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				C																										B	A	A	A	A	A
Reset 0xFFFFFFFF				1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value Id	Value		Description																													
A	RW	PIN		[0..31]		Pin number																													
B	RW	PORT		[0..1]		Port number																													
C	RW	CONNECT				Connection																													
			Disconnected	1		Disconnect																													
			Connected	0		Connect																													

### 52.10.18 PSEL.IO3

Address offset: 0x53C

Pin select for serial data IO3.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					C																								B				A	A	A	A
Reset 0xFFFFFFFF					1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Id	RW	Field	Value	Id	Value	Description																														
A	RW	PIN			[0..31]	Pin number																														
B	RW	PORT			[0..1]	Port number																														
C	RW	CONNECT				Connection																														
			Disconnected		1	Disconnect																														
			Connected		0	Connect																														

## 52.10.19 XIPOFFSET

Address offset: 0x540

Address offset into the external memory for Execute in Place operation.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id					A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value		Description																													
A	RW	XIPOFFSET					Address offset into the external memory for Execute in Place operation. Value must be a multiple of 4.																													

## 52.10.20 IFCONFIG0

Address offset: 0x544

Interface configuration.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																													D	C	B	B	B	A	A	A
Reset 0x00000000					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value	Id	Value	Description																														
A	RW	READOC				Configure number of data lines and opcode used for reading.																														
			FASTREAD	0	Single data line SPI. FAST_READ (opcode 0x0B).																															
			READ2O	1	Dual data line SPI. READ2O (opcode 0x3B).																															
			READ2IO	2	Dual data line SPI. READ2IO (opcode 0xBB).																															
			READ4O	3	Quad data line SPI. READ4O (opcode 0x6B).																															
			READ4IO	4	Quad data line SPI. READ4IO (opcode 0xEB).																															
B	RW	WRITEOC				Configure number of data lines and opcode used for writing.																														
			PP	0	Single data line SPI. PP (opcode 0x02).																															
			PP2O	1	Dual data line SPI. PP2O (opcode 0xA2).																															
			PP4O	2	Quad data line SPI. PP4O (opcode 0x32).																															
			PP4IO	3	Quad data line SPI. PP4IO (opcode 0x38).																															
C	RW	ADDRMODE				Addressing mode.																														
			24BIT	0	24-bit addressing.																															
			32BIT	1	32-bit addressing.																															
D	RW	DPMENABLE				Enable deep power-down mode (DPM) feature.																														
			Disable	0	Disable DPM feature.																															
			Enable	1	Enable DPM feature.																															

## 52.10.21 IFCONFIG1

Address offset: 0x600

Interface configuration.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				G G G G E D A																															
Reset 0x00040480				0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 1 0 0 1 0 0 0 0 0 0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	SCKDELAY		[0..255]	Minimum amount of time that the CSN pin must stay high before it can go low again. Value is specified in number of 16 MHz periods (62.5 ns).																														
D	RW	DPMEN			Enter/exit deep power-down mode (DPM) for external flash memory.																														
			Exit	0	Exit DPM.																														
			Enter	1	Enter DPM.																														
E	RW	SPIMODE			Select SPI mode.																														
			MODE0	0	Mode 0: Data are captured on the clock rising edge and data is output on a falling edge. Base level of clock is 0 (CPOL=0, CPHA=0).																														
			MODE3	1	Mode 3: Data are captured on the clock falling edge and data is output on a rising edge. Base level of clock is 1 (CPOL=1, CPHA=1).																														
G	RW	SCKFREQ		[0..15]	SCK frequency is given as 32 MHz / (SCKFREQ + 1).																														

## 52.10.22 STATUS

Address offset: 0x604

Status register.

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				F F F F F F F F D C																															
Reset 0x00000000				0 0																															
Id	RW	Field	Value Id	Value	Description																														
C	R	DPM			Deep power-down mode (DPM) status of external flash.																														
			Disabled	0	External flash is not in DPM.																														
			Enabled	1	External flash is in DPM.																														
D	R	READY			Ready status.																														
			READY	1	QSPI peripheral is ready. It is allowed to trigger new tasks, writing custom instructions or enter/exit DPM.																														
			BUSY	0	QSPI peripheral is busy. It is not allowed to trigger any new tasks, writing custom instructions or enter/exit DPM.																														
F	R	SREG			Value of external flash device Status Register. When the external flash has two bytes status register this field includes the value of the low byte.																														

## 52.10.23 DPMDUR

Address offset: 0x614

Set the duration required to enter/exit deep power-down mode (DPM).

Bit number				31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																															
Id				B B B B B B B B B B B B B B B B A A A A A A A A A A A A A A A A																															
Reset 0xFFFFFFFF				1 1																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	ENTER		[0..0xFFFF]	Duration needed by external flash to enter DPM. Duration is given as ENTER * 256 * 62.5 ns.																														
B	RW	EXIT		[0..0xFFFF]	Duration needed by external flash to exit DPM. Duration is given as EXIT * 256 * 62.5 ns.																														

## 52.10.24 ADDRCONF

Address offset: 0x624

## Extended address configuration.

Bit number					31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Id										F	E	D	D	C	C	C	C	C	C	C	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	
Reset 0x000000B7					0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	0	1	1	1
Id	RW	Field	Value Id	Value	Description																																
A	RW	OPCODE		[0xFF..0]	Opcode that enters the 32-bit addressing mode.																																
B	RW	BYTE0		[0xFF..0]	Byte 0 following opcode.																																
C	RW	BYTE1		[0xFF..0]	Byte 1 following byte 0.																																
D	RW	MODE			Extended addressing mode.																																
			NoInstr	0	Do not send any instruction.																																
			Opcode	1	Send opcode.																																
			OpByte0	2	Send opcode, byte0.																																
			All	3	Send opcode, byte0, byte1.																																
E	RW	WIPWAIT			Wait for write complete before sending command.																																
			Disable	0	No wait.																																
			Enable	1	Wait.																																
F	RW	WREN			Send WREN (write enable opcode 0x06) before instruction.																																
			Disable	0	Do not send WREN.																																
			Enable	1	Send WREN.																																

## 52.10.25 CINSTRCONF

Address offset: 0x634

Custom instruction configuration register.

A new custom instruction is sent every time this register is written. The READY event will be generated when the custom instruction has been sent.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				F E D C B B B B A A A A A A A A																															
Reset 0x00002000				0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																															
Id	RW	Field	Value Id	Value	Description																														
A	RW	OPCODE		[0..255]	Opcode of Custom instruction.																														
B	RW	LENGTH			Length of custom instruction in number of bytes.																														
			1B	1	Send opcode only.																														
			2B	2	Send opcode, CINSTRDAT0.BYTE0.																														
			3B	3	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT0.BYTE1.																														
			4B	4	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT0.BYTE2.																														
			5B	5	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT0.BYTE3.																														
			6B	6	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT1.BYTE4.																														
			7B	7	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT1.BYTE5.																														
			8B	8	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT1.BYTE6.																														
9B	9	Send opcode, CINSTRDAT0.BYTE0 -> CINSTRDAT1.BYTE7.																																	
C	RW	LIO2		[0..1]	Level of the IO2 pin (if connected) during transmission of custom instruction.																														
D	RW	LIO3		[0..1]	Level of the IO3 pin (if connected) during transmission of custom instruction.																														
E	RW	WIPWAIT	Disable	0	No wait.																														
			Enable	1	Wait.																														
F	RW	WREN	Disable	0	Do not send WREN.																														
			Enable	1	Send WREN.																														

### 52.10.26 CINSTRDAT0

Address offset: 0x638

Custom instruction data register 0.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id				D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A
Reset 0x00000000				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
A	RW	BYTE0		[0..0xFF]	Data byte 0																														
B	RW	BYTE1		[0..0xFF]	Data byte 1																														
C	RW	BYTE2		[0..0xFF]	Data byte 2																														
D	RW	BYTE3		[0..0xFF]	Data byte 3																														

## 52.10.27 CINSTRDAT1

Address offset: 0x63C

Custom instruction data register 1.

Bit number									31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
Id									D	D	D	D	D	D	D	D	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A		
Reset 0x00000000									0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Id	RW	Field	Value Id			Value			Description																																	
A	RW	BYTE4				[0..0xFF]			Data byte 4																																	
B	RW	BYTE5				[0..0xFF]			Data byte 5																																	
C	RW	BYTE6				[0..0xFF]			Data byte 6																																	
D	RW	BYTE7				[0..0xFF]			Data byte 7																																	

## 52.10.28 IFTIMING

Address offset: 0x640

SPI interface timing.

Bit number				31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Id																										C	C	C							
Reset 0x00000300				0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0	0
Id	RW	Field	Value Id	Value	Description																														
C	RW	RXDELAY		[7..0]	Timing related to sampling of the input serial data. The value of RXDELAY specifies the number of 64 MHz cycles (15.625 ns) delay from the the rising edge of the SPI Clock (SCK) until the input serial data is sampled. As en example, if set to 0 the input serial data is sampled on the rising edge of SCK.																														

## 52.11 Electrical specification

### 52.11.1 Current consumption

Symbol	Description	Min.	Typ.	Max.	Units
$I_{QSPI,IDLE}$	Idle current (enabled, but not activated).				$\mu A$
$I_{QSPI,ACTIVE}$	Idle current (activated, but not transferring data).				$\mu A$
$I_{QSPI,DATA}$	Run current (activated and transferring data to/from external Flash at 32 MHz clock frequency).				$\mu A$


### 52.11.2 Timing specification

Symbol	Description	Min.	Typ.	Max.	Units
$F_{QSPI,CLK}$	SCK frequency			32	MHz
$DC_{QSPI,CLK}$	SCK duty cycle				%
$F_{QSPI,XIP,16}$	XIP fetch frequency for 16 bit instructions.			8	MHz
$F_{QSPI,XIP,32}$	XIP fetch frequency for 32 bit instructions.			4	MHz
$t_{IO,OUT,VALID}$	Time from SCK falling until new data valid.				ns
$t_{IO,OUT,INVALID}$	Time from SCK falling until previous data invalid.				ns



## 53 CRYPTOCELL — ARM TrustZone CryptoCell 310

ARM® TrustZone® CryptoCell 310 (CRYPTOCELL) is a security subsystem which provides Root of Trust (RoT) and cryptographic services for a device. CryptoCell services are available to the application through a software library API, not a hardware register interface.

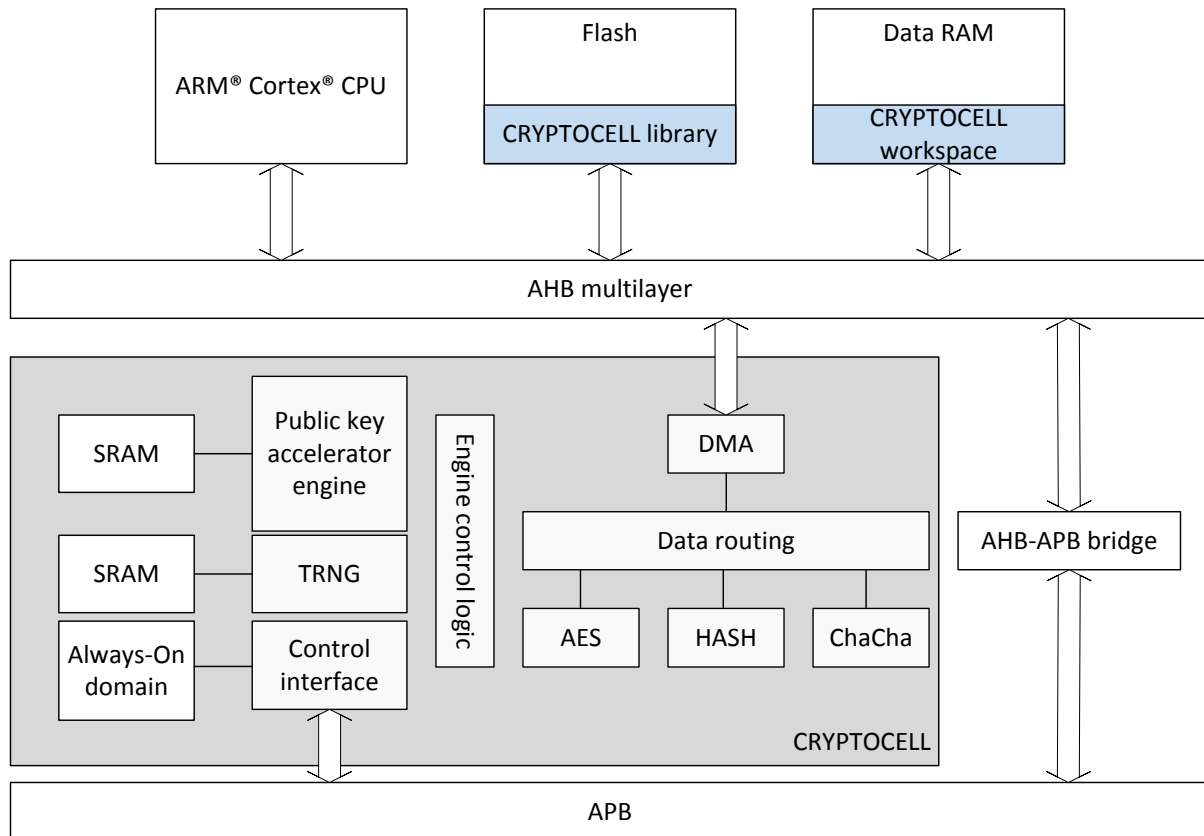

**Figure 206: Block diagram for CRYPTOCELL**

The following cryptographic features are provided:

- FIPS-140-2 certified True random number generator (TRNG)
- RSA asymmetric encryption
  - Up to 2048 bit key size
  - PKCS#1 v2.1/v1.5
  - Optional CRT support
- Elliptic curve cryptography (ECC)
  - NIST FIPS 186-4 recommended curves using pseudo-random parameters, up to 521 bits:
    - Prime field: P-192, P-224, P-256, P-384, P-521
  - SEC 2 recommended curves using pseudo-random parameters, up to 521 bits:
    - Prime field: P-160, P-192, P-224, P-256, P-384, P-521
  - Koblitz curves using fixed parameters, up to 256 bits:
    - Prime field: P-160, P-192, P-224, P-256
  - Edwards/Montgomery curves:
    - Ed25519, Curve25519
  - ECDH/ECDSA support
- Secure remote password protocol (SRP)

- Up to 3072 bit operations
- Hashing functions
  - SHA-1, SHA-2 up to 256 bit size
  - Keyed-hash message authentication code (HMAC)
- AES symmetric encryption
  - General purpose AES engine (encrypt/decrypt, sign/verify)
  - 128 bit key size
  - Supported encryption modes: ECB, CBC, CMAC/CBC-MAC, CTR, CCM/CCM\*
- ChaCha20/Poly1305 symmetric encryption
  - Supported key size: 128 and 256 bits
  - Authenticated encryption with associated data (AEAD) mode

## 53.1 Standards

ARM® TrustZone® CryptoCell 310 (CRYPTOCELL) supports a number of cryptography standards.

**Table 133: CryptoCell cryptography standards**

Algorithm family	Identification code	Document name
TRNG	NIST 800-90B <sup>43</sup>	Recommendation for the entropy sources used for random bit generation
	AIS-31	Functionality classes and evaluation methodology for physical random number generators
PRNG	NIST 800-90A	Recommendation for random number generation using deterministic random bit generators
Stream cipher	Chacha	"ChaCha, a variant of Salsa20", Daniel J. Bernstein, January 28th 2008
MAC	Poly1305	"The Poly1305-AES message-authentication code", Daniel J. Bernstein
"Cryptography in NaCl", Daniel J. Bernstein		
Key agreement	SRP	"The Secure Remote Password Protocol", Thomas Wu
AES	FIPS-197	Advanced Encryption Standard
	NIST SP 800-38A	Recommendation for block cipher modes of operation - methods and techniques
	NIST SP 800-38B	Recommendation for block cipher modes of operation: The CMAC mode for authentication
	NIST SP 800-38C	Recommendation for block cipher modes of operation: The CCM mode for authentication and confidentiality
	ISO/IEC 9797-1	AES CBC-MAC per ISO/IEC 9797-1 MAC algorithm 1
Hash	IEEE 802.15.4-2011	Low-Rate Wireless Personal Area Networks, Annex B.4: Specification of generic CCM* mode of operation
	FIPS 180-3	Secure Hash Standard (SHA1, SHA-224, SHA-256, SHA-512)
	RFC2104	HMAC: Keyed-hashing for message authentication
RSA	PKCS#1	RSA cryptography standard v1.5/v2.1
Diffie-Hellman	ANS X9.42	Agreement of symmetric keys using discrete logarithm cryptography
	PKCS#3	Diffie-Hellman key agreement standard
ECC	ANS X9.63	Public Key cryptography for the financial services industry, key agreement and key transport using Elliptic Curve Cryptography
	IEEE 1363	Standard specifications for public key cryptography
	ANS X9.62	Public key cryptography for the financial services industry, the Elliptic Curve Digital Signature Algorithm (ECDSA)
	Ed25519	Edwards-curve, "High-speed high-security signatures", Daniel J. Bernstein, Niels Duif, Tanja Lange, Peter Schwabe, and Bo-Yin Yang
	Curve25519	Montgomery curve, "Curve25519: new Diffie-Hellman speed records", Daniel J. Bernstein
	FIPS 186-4	Digital Signature Standard (DSS)
	NIST SP 800-56A rev. 2	Recommendation for Pair-Wise Key Establishment Schemes Using Discrete Logarithm Cryptography
General	FIPS 140-2	Security requirements for cryptographic modules

## 53.2 Control interface

Power and clock are by default gated off from the CryptoCell subsystem and must be enabled prior to using the CryptoCell firmware. Device specific secrets are retained in the Always-On (AO) power domain, even when the CryptoCell is disabled.

**Important:** CryptoCell provides support for performing internal clock gating in order to optimize the power consumption based on the operation modes. This internal clock management is handled transparently by the CryptoCell firmware, but in order to minimize the power consumption it is highly recommended to also manually disable CryptoCell when not in use.

<sup>43</sup> This standard is still marked as draft.



## 53.2.1 Registers

**Table 134: Instances**

Base address	Peripheral	Instance	Description	Configuration
0x5002A000	CRYPTOCELL	CRYPTOCELL	CryptoCell subsystem control interface	

**Table 135: Register Overview**

Register	Offset	Description
<a href="#">ENABLE</a>	0x500	Control power and clock for ARM CryptoCell subsystem

### ENABLE

Address offset: 0x500

Control power and clock for ARM CryptoCell subsystem

Bit number	31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0																														
Id	A																														
Reset 0x00000000	0 0																														
Id	RW	Field	Value Id	Value	Description																										
A	RW	ENABLE			Enable or disable the CryptoCell subsystem																										
			Disabled	0	CryptoCell subsystem disabled																										
			Enabled	1	CryptoCell subsystem enabled																										
When enabled the CryptoCell subsystem can be initialized and controlled through the CryptoCell firmware API																															

## 53.2.2 Electrical specification

### CryptoCell 310 Electrical Specification

Symbol	Description	Min.	Typ.	Max.	Units
I <sub>CC310,DISABLED</sub>	CryptoCell subsystem disabled. Regulator = DC/DC, VDD = 3 V.		1.5		μA
I <sub>CC310,IDLE</sub>	CryptoCell subsystem enabled. Regulator = DC/DC, VDD = 3 V.		0.8		mA

## 54 Mechanical specifications

The mechanical specifications for the packages show the dimensions in millimeters.

### 54.1 AQFN73 7 x 7 mm package

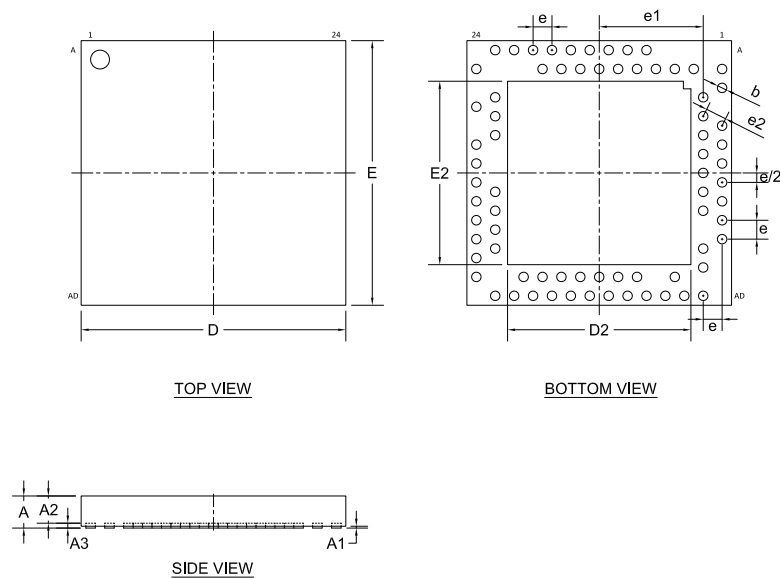


Figure 207: AQFN73 7 x 7 mm package

Table 136: AQFN73 dimensions in millimeters

Package	A	A1	A2	A3	b	D, E	D2, E2	e	e1	e2	
AQFN73 (7x7)		0.02			0.20		4.75				Min.
		0.05	0.675	0.13	0.25	7.00	4.85	0.5	2.75	0.559	Nom.
	0.85	0.08			0.30		4.95				Max.

## 55 Ordering information

This chapter contains information on IC marking, ordering codes, and container sizes.

### 55.1 Package marking

The nRF52840 SoC package is marked as shown in the figure below.

N	5	2	8	4	0
<P	P>	<V	V>	<H>	<P>
<Y	Y>	<W	W>	<L	L>

Figure 208: Package marking

### 55.2 Box labels

Here are the box labels used for the nRF52840.

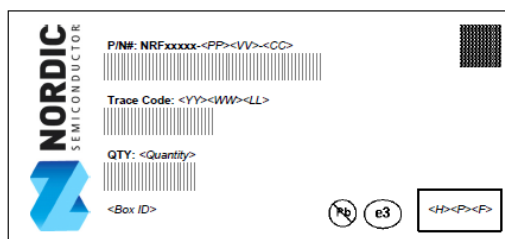


Figure 209: Inner box label

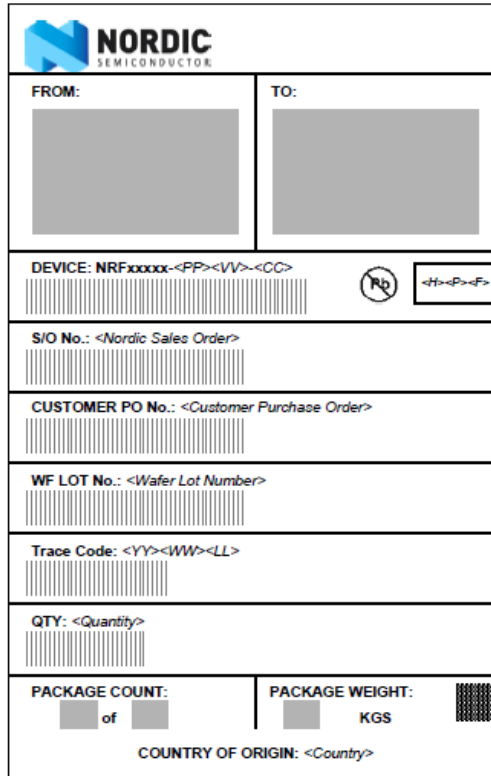


Figure 210: Outer box label

## 55.3 Order code

Here are the nRF52840 order codes and definitions.

n	R	F	5	2	8	4	0	-	<P	P>	<V	V>	-	<C	C>
---	---	---	---	---	---	---	---	---	----	----	----	----	---	----	----

Figure 211: Order code

Table 137: Abbreviations

Abbreviation	Definition and implemented codes
N52/nRF52	nRF52 series product
840	Part code
<PP>	Package variant code
<VV>	Function variant code
<H>-<P>-<F>	Build code
	H - Hardware version code
	P - Production configuration code (production site, etc.)
	F - Firmware version code (only visible on shipping container label)
<YY>-<WW>-<LL>	Tracking code
	YY - Year code
	WW - Assembly week number
	LL - Wafer lot code
<CC>	Container code

## 55.4 Code ranges and values

Defined here are the nRF52840 code ranges and values.

Table 138: Package variant codes

<PP>	Package	Size (mm)	Pin/Ball count	Pitch (mm)
QI	AQFN	7 x 7	73	0.5

**Table 139: Function variant codes**

<VV>	Flash (kB)	RAM (kB)
AA	1024	256

**Table 140: Hardware version codes**

<H>	Description
[A . . Z]	Hardware version/revision identifier (incremental)

**Table 141: Production configuration codes**

<P>	Description
[0 . . 9]	Production device identifier (incremental)
[A . . Z]	Engineering device identifier (incremental)

**Table 142: Production version codes**

<F>	Description
[A . . N, P . . Z]	Version of preprogrammed firmware
[0]	Delivered without preprogrammed firmware

**Table 143: Year codes**

<YY>	Description
[16 . . 99]	Production year: 2016 to 2099

**Table 144: Week codes**

<WW>	Description
[1 . . 52]	Week of production

**Table 145: Lot codes**

<LL>	Description
[AA . . ZZ]	Wafer production lot identifier

**Table 146: Container codes**

<CC>	Description
R7	7" Reel
R	13" Reel
T	Tray

## 55.5 Product options

Defined here are the nRF52840 product options.

**Table 147: nRF52840 order codes**

Order code	MOQ <sup>44</sup>	Comment
nRF52840-QIAA-R7	800	Availability to be announced.
nRF52840-QIAA-R	3000	
nRF52840-QIAA-T	260	

**Table 148: Development tools order code**

Order code	Description
nRF52840-PREVIEW-DK	nRF52840 Preview Development Kit

## 56 Reference circuitry

To ensure good RF performance when designing PCBs, it is highly recommended to use the PCB layouts and component values provided by Nordic Semiconductor.

Documentation for the different package reference circuits, including Altium Designer files, PCB layout files, and PCB production files can be downloaded from [www.nordicsemi.com](http://www.nordicsemi.com).

In this section there are 6 reference circuits to show the components and component values to support on-chip features in a design.

**Important:** This is not a complete list of configurations, but all required circuitry is shown for further configurations.

Some general guidance is summarized here:

- Power can not be supplied to VDD and VDDH at the same time.
- External supply from VDD is only available when power is supplied to VDDH. External supply is annotated with the VEXT net name.
- When supplying power from a USB source only, VBUS must be connected to VDDH if USB is to be used.
- Components required for DC/DC function are only needed if DC/DC mode is enabled for that regulator.
- NFC can be used in any configuration.
- USB can be used in any configuration as long as VBUS is supplied by the USB host.

**Table 149: Circuit configurations**

Config no.	Supply configuration VDDH	VDD	Features that can be enabled for each configuration example				
			EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
<a href="#">Config. 1</a>	USB (VDDH = VBUS)	N/A	Yes	No	No	Yes	No
<a href="#">Config. 2</a>	Battery/Ext. regulator	N/A	Yes	No	No	Yes	No
<a href="#">Config. 3</a>	N/A	Battery/Ext. regulator	No	No	No	Yes	No
<a href="#">Config. 4</a>	Battery/Ext. regulator	N/A	Yes	Yes	Yes	Yes	No
<a href="#">Config. 5</a>	N/A	Battery/Ext. regulator	No	No	Yes	Yes	Yes
<a href="#">Config. 6</a>	N/A	Battery/Ext. regulator	No	No	No	No	No

### 56.1 Circuit configuration no. 1

**Table 150: Configuration summary for circuit configuration no. 1**

Config no.	Supply configuration VDDH	VDD	Enabled features				
			EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
Config. 1	USB (VDDH = VBUS)	N/A	Yes	No	No	Yes	No

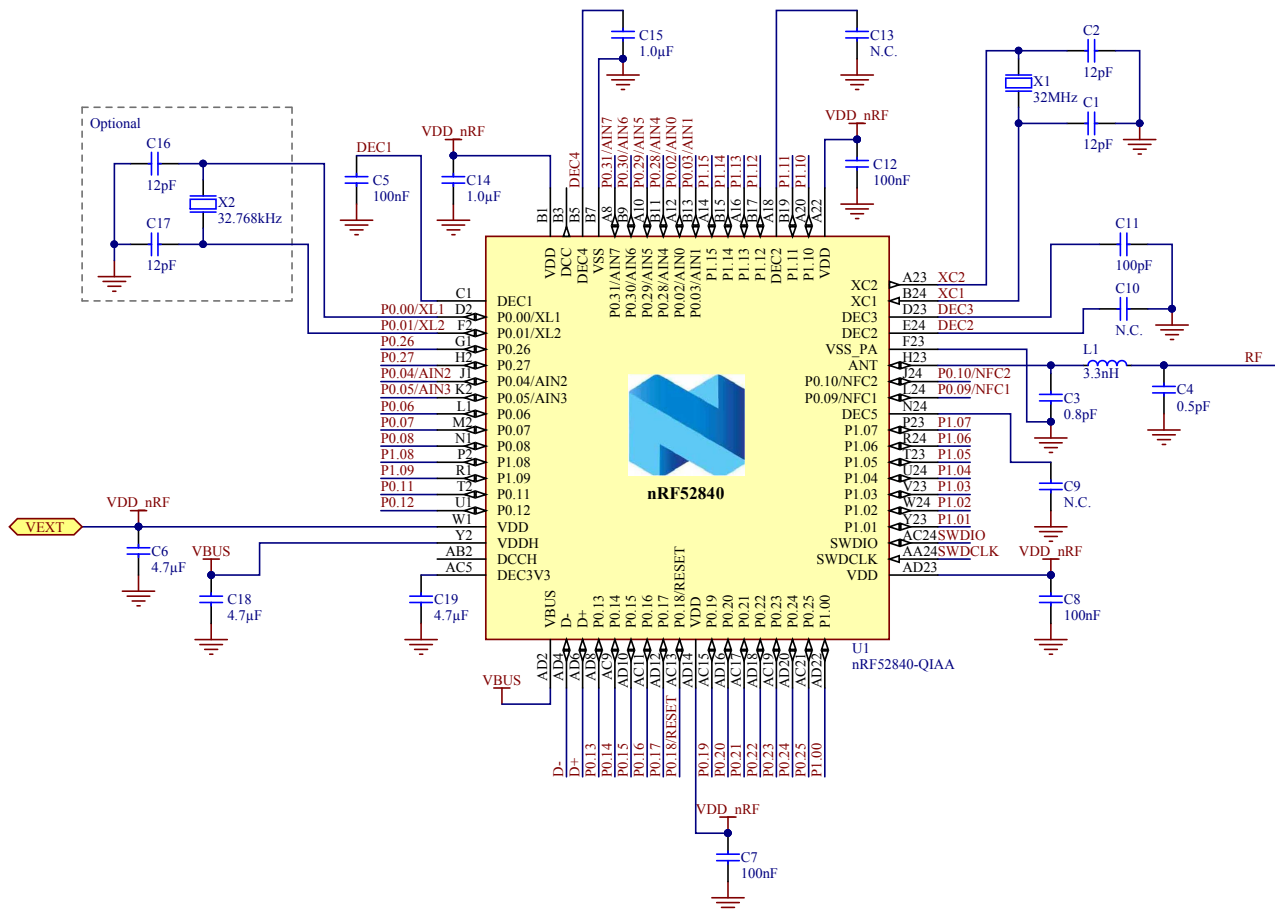


Figure 212: Circuit configuration no. 1 schematic

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).

Table 151: Bill of material for circuit configuration no. 1

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6, C19	4.7 µF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 µF	Capacitor, X7R, ±10%	0603
C18	4.7 µF	Capacitor, X7S, ±10%	0603
L1	3.3 nH	High frequency chip inductor ±5%	0402
U1	nRF52840-Q1AA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL_3215

## 56.2 Circuit configuration no. 2

Table 152: Configuration summary for circuit configuration no. 2

Config no.	Supply configuration	VDD	Enabled features				
	VDDH		EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
Config. 2	Battery/Ext. regulator	N/A	Yes	No	No	Yes	No

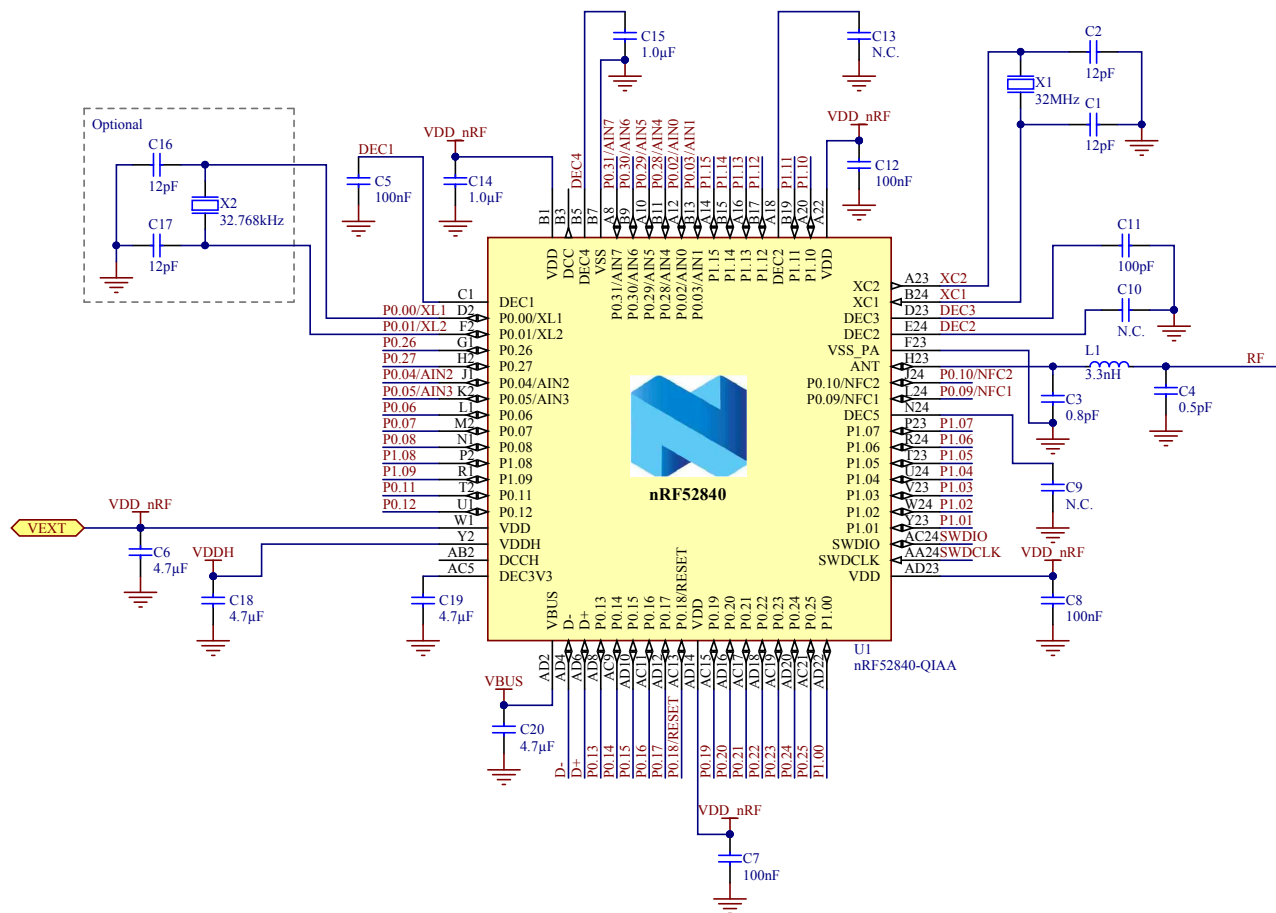


Figure 213: Circuit configuration no. 2 schematic

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).

Table 153: Bill of material for circuit configuration no. 2

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6, C19	4.7 µF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 µF	Capacitor, X7R, ±10%	0603
C18, C20	4.7 µF	Capacitor, X7S, ±10%	0603
L1	3.3 nH	High frequency chip inductor ±5%	0402
U1	nRF52840-Q1AA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL_3215

## 56.3 Circuit configuration no. 3

Table 154: Configuration summary for circuit configuration no. 3

Config no.	Supply configuration		Enabled features				
	VDDH	VDD	EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
Config. 3	N/A	Battery/Ext. regulator	No	No	No	Yes	No



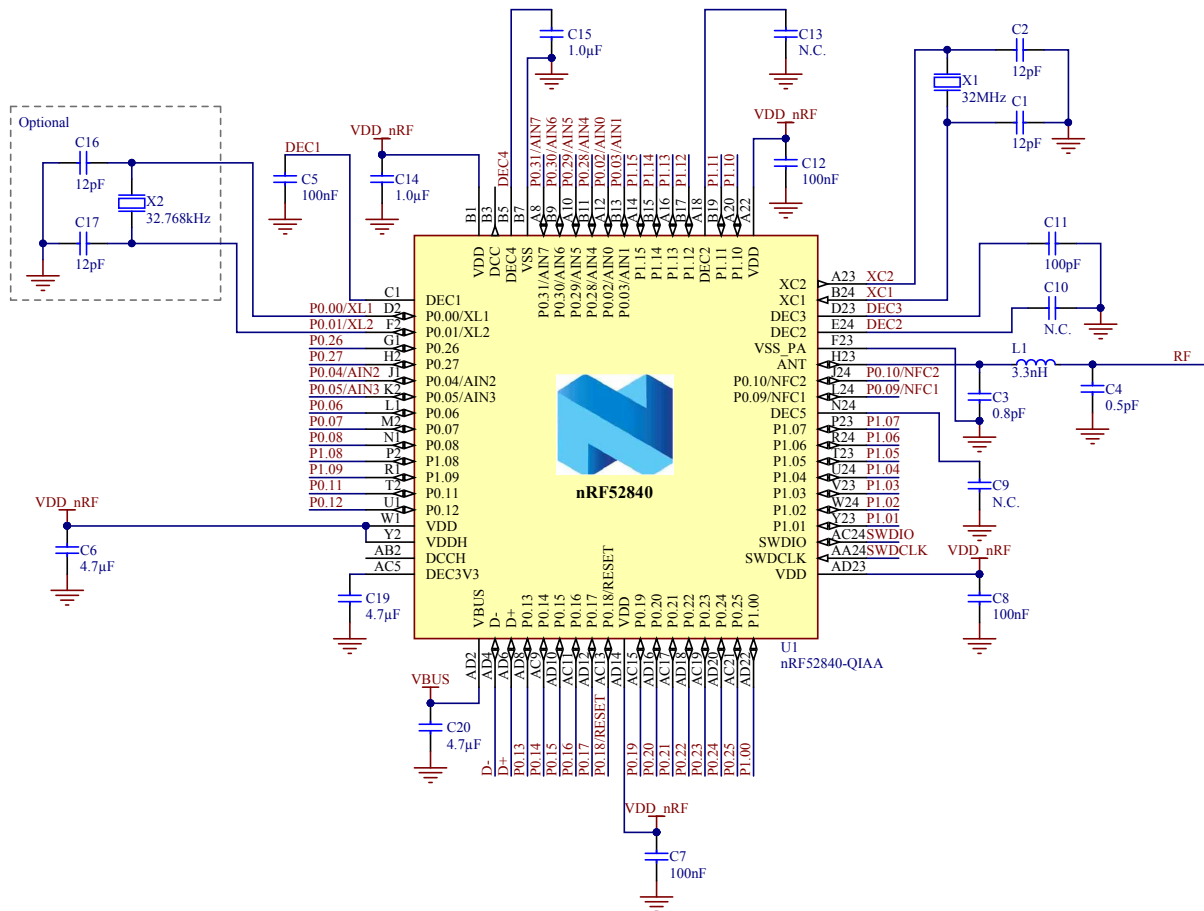


Figure 214: Circuit configuration no. 3 schematic

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).


Table 155: Bill of material for circuit configuration no. 3

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6, C19	4.7 µF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 µF	Capacitor, X7R, ±10%	0603
C20	4.7 µF	Capacitor, X7S, ±10%	0603
L1	3.3 nH	High frequency chip inductor ±5%	0402
U1	nRF52840-Q1AA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL_3215

## 56.4 Circuit configuration no. 4

Table 156: Configuration summary for circuit configuration no. 4

Config no.	Supply configuration	VDD	Enabled features	EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
Config. 4	Battery/Ext. regulator	N/A	Yes	Yes	Yes	Yes	Yes	No

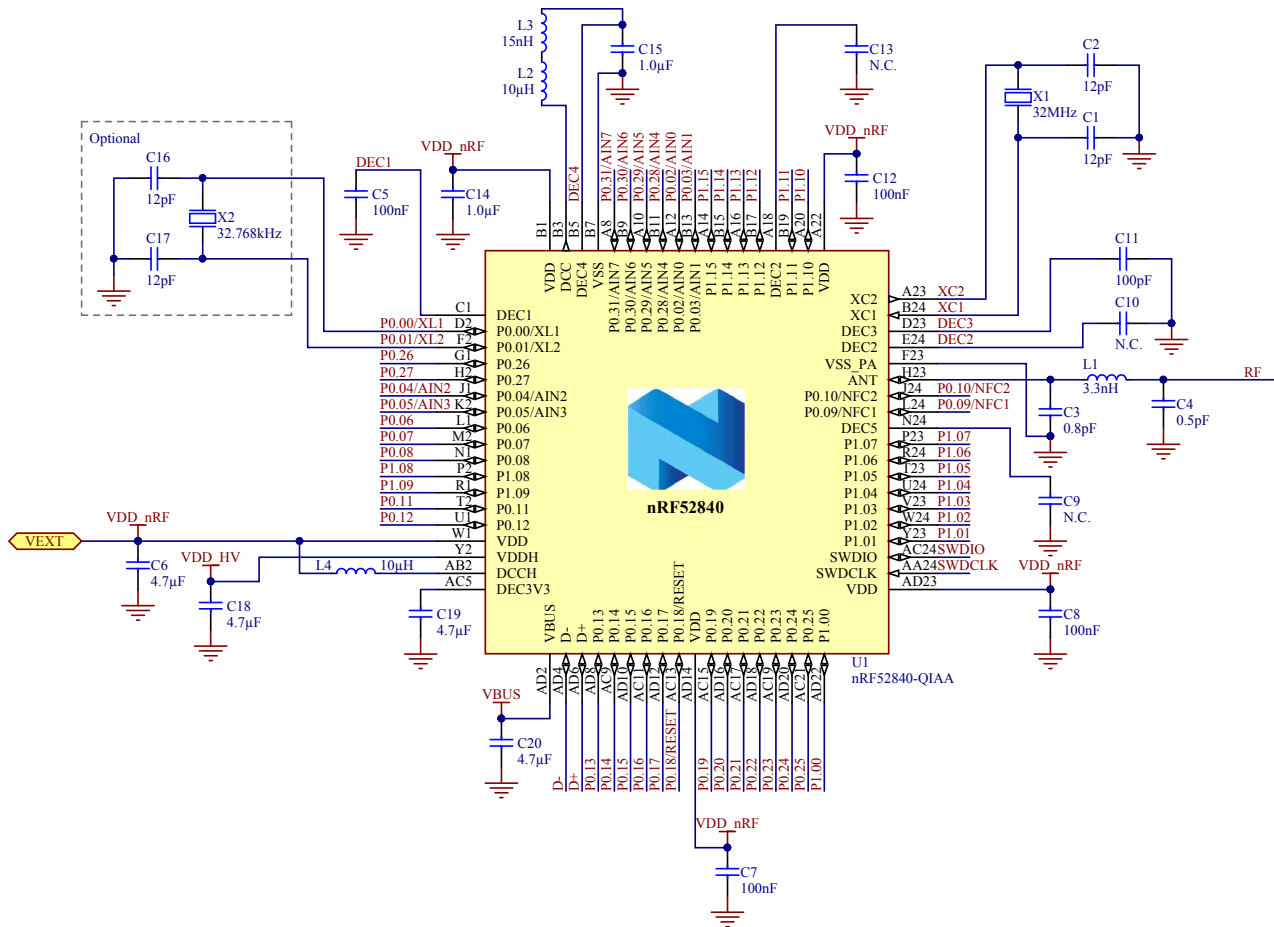

**Figure 215: Circuit configuration no. 4 schematic**

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).

**Table 157: Bill of material for circuit configuration no. 4**

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6, C19	4.7 µF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 µF	Capacitor, X7R, ±10%	0603
C18, C20	4.7 µF	Capacitor, X7S, ±10%	0603
L1	3.3 nH	High frequency chip inductor ±5%	0402
L2	10 µH	Chip inductor, IDC min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
L4	10 µH	Chip inductor, IDC min = 80 mA, ±10%	0603
U1	nRF52840-QIAA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL 3215

### 56.5 Circuit configuration no. 5

**Table 158: Configuration summary for circuit configuration no. 5**

Config no.	Supply configuration		Enabled features				
	VDDH	VDD	EXTSUPPLY	DCDCEN0	DCDCEN1	USB	NFC
Config. 5	N/A	Battery/Ext. regulator	No	No	Yes	Yes	Yes

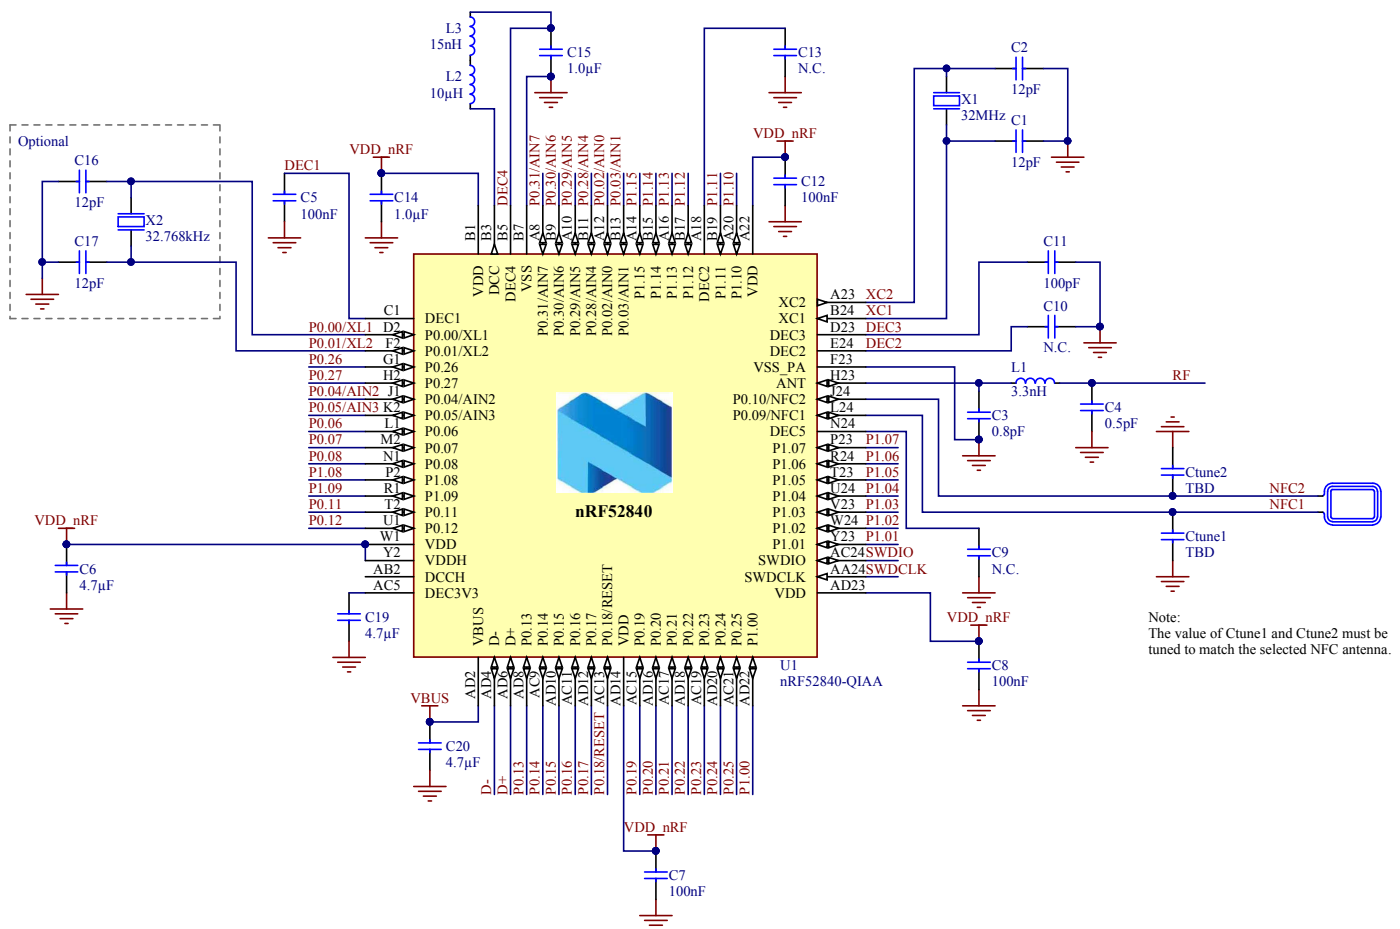


Figure 216: Circuit configuration no. 5 schematic

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).

Table 159: Bill of material for circuit configuration no. 5

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6, C19	4.7 µF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 µF	Capacitor, X7R, ±10%	0603
C20	4.7 µF	Capacitor, X7S, ±10%	0603
C <sub>tune1</sub> , C <sub>tune2</sub>	TBD	Capacitor, NP0, ±5%	0402
L1	3.3 nH	High frequency chip inductor ±5%	0402
L2	10 µH	Chip inductor, IDC min = 50 mA, ±20%	0603
L3	15 nH	High frequency chip inductor ±10%	0402
U1	nRF52840-QIAA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL_3215

## 56.6 Circuit configuration no. 6

Table 160: Configuration summary for circuit configuration no. 6

Config no.	Supply configuration VDDH	VDD	Enabled features EXTSUPPLY	D CDCEN0	D CDCEN1	USB	NFC
Config. 6	N/A	Battery/Ext. regulator	No	No	No	No	No

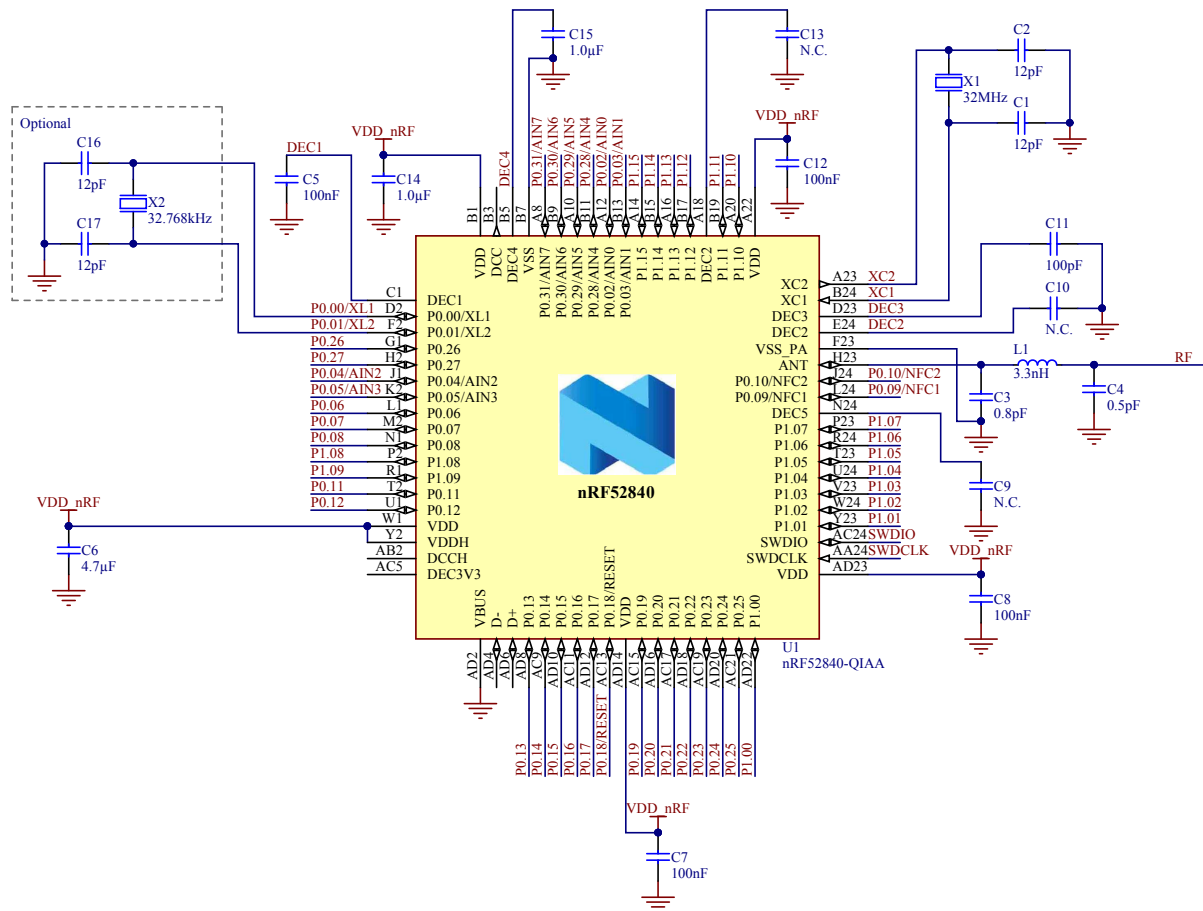


Figure 217: Circuit configuration no. 6 schematic

**Important:** For PCB reference layouts, see the Reference Layout section on the Downloads tab for the nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).

Table 161: Bill of material for circuit configuration no. 6

Designator	Value	Description	Footprint
C1, C2, C16, C17	12 pF	Capacitor, NP0, ±2%	0402
C3	0.8 pF	Capacitor, NP0, ±5%	0402
C4	0.5 pF	Capacitor, NP0, ±10%	0402
C5, C7, C8, C12	100 nF	Capacitor, X7R, ±10%	0402
C6	4.7 μF	Capacitor, X7R, ±10%	0603
C9, C10, C13	N.C.	Not mounted	0402
C11	100 pF	Capacitor, NP0, ±5%	0402
C14, C15	1.0 μF	Capacitor, X7R, ±10%	0603
L1	3.3 nH	High frequency chip inductor ±5%	0402
U1	nRF52840-QIAA	Multi-protocol Bluetooth low energy, IEEE 802.15.4, ANT, and 2.4 GHz proprietary system-on-chip	AQFN-73
X1	32 MHz	Crystal SMD 2016, 32 MHz, Cl=8 pF, Total Tol: ±40 ppm	XTAL_2016
X2	32.768 kHz	Crystal SMD 3215, 32.768 kHz, Cl=9 pF, Total Tol: ±50 ppm	XTAL_3215

## 56.7 PCB guidelines

A well designed PCB is necessary to achieve good RF performance. A poor layout can lead to loss in performance or functionality.

A qualified RF layout for the IC and its surrounding components, including matching networks, can be downloaded from [www.nordicsemi.com](http://www.nordicsemi.com).

To ensure optimal performance it is essential that you follow the schematics- and layout references closely. Especially in the case of the antenna matching circuitry (components between device pin ANT and the antenna), any changes to the layout can change the behavior, resulting in degradation of RF performance

or a need to change component values. All the reference circuits are designed for use with a 50 ohm single-ended antenna.

A PCB with a minimum of two layers, including a ground plane, is recommended for optimal RF performance. On PCBs with more than two layers, put a keep-out area on the inner layers directly below the antenna matching circuitry (components between device pin ANT and the antenna) to reduce the stray capacitances that influence RF performance.

A matching network is needed between the RF pin ANT and the antenna, to match the antenna impedance (normally 50 ohm) to the optimum RF load impedance for the chip. For optimum performance, the impedance for the matching network should be set as described in the recommended AQFN73 package reference circuitry from [Circuit configuration no. 1](#) on page 686.

The DC supply voltage should be decoupled as close as possible to the VDD pins with high performance RF capacitors. See the schematics for recommended decoupling capacitor values. The supply voltage for the chip should be filtered and routed separately from the supply voltages of any digital circuitry.

Long power supply lines on the PCB should be avoided. All device grounds, VDD connections, and VDD bypass capacitors must be connected as close as possible to the IC. For a PCB with a topside RF ground plane, the VSS pins should be connected directly to the ground plane. For a PCB with a bottom ground plane, the best technique is to have via holes as close as possible to the VSS pads. A minimum of one via hole should be used for each VSS pin.

Fast switching digital signals should not be routed close to the crystal or the power supply lines. Capacitive loading of fast switching digital output lines should be minimized in order to avoid radio interference.

## 56.8 PCB layout example

The PCB layout shown below is a reference layout for the AQFN package with internal LDO setup and VBUS supply.

**Important:** Pay attention to how the capacitor C3 is grounded. It is not directly connected to the ground plane, but grounded via VSS\_PA pin F23. This is done to create additional filtering of harmonic components.

For all available reference layouts, see the Reference Layout section on the Downloads tab for nRF52840 on [www.nordicsemi.com](http://www.nordicsemi.com).



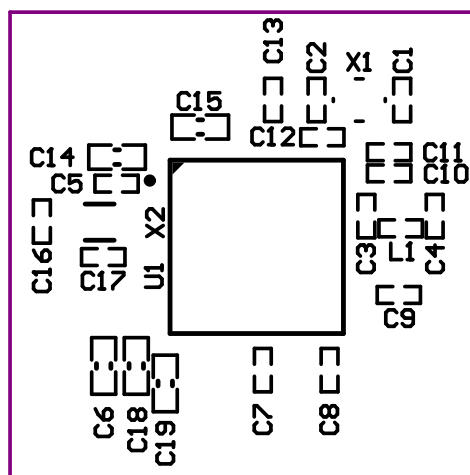



Figure 218: Top silk layer

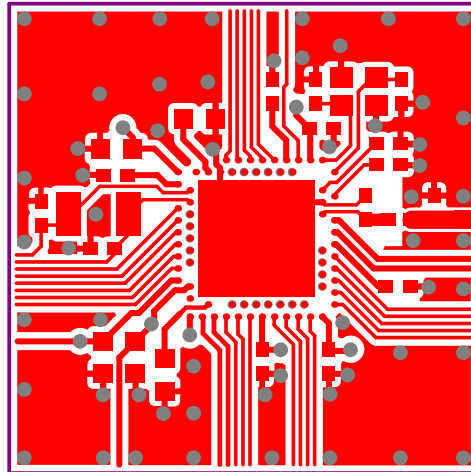


**Figure 219: Top layer**

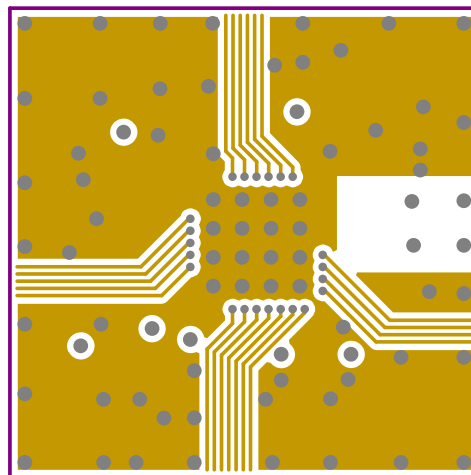

**Figure 220: Mid layer 1**

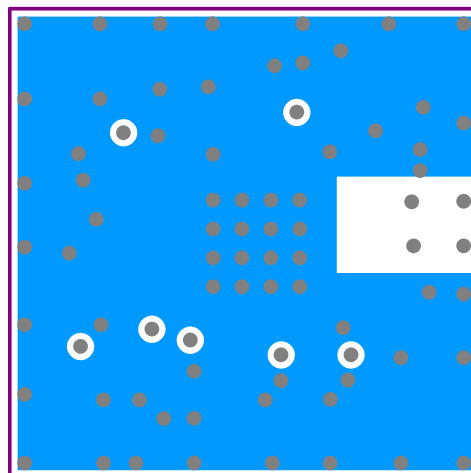

**Figure 221: Mid layer 2**

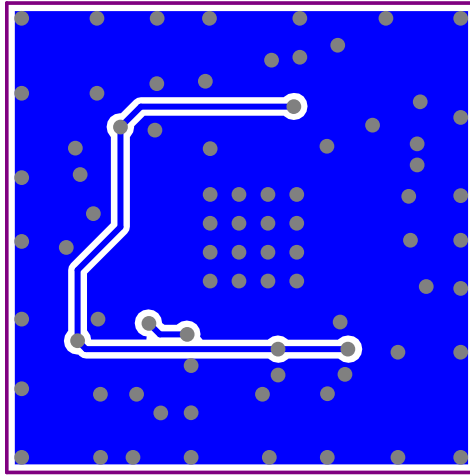

**Figure 222: Bottom layer**

**Important:** No components in bottom layer.


## 57 Liability disclaimer

Nordic Semiconductor ASA reserves the right to make changes without further notice to the product to improve reliability, function or design. Nordic Semiconductor ASA does not assume any liability arising out of the application or use of any product or circuits described herein.

### 57.1 RoHS and REACH statement

Nordic Semiconductor products meet the requirements of Directive 2002/95/EC of the European Parliament and of the Council on the Restriction of Hazardous Substances (RoHS) and the requirements of the REACH regulation (EC 1907/2006) on Registration, Evaluation, Authorization and Restriction of Chemicals.

The SVHC (Substances of Very High Concern) candidate list is continually being updated. Complete hazardous substance reports, material composition reports and latest version of Nordic's REACH statement can be found on our website .

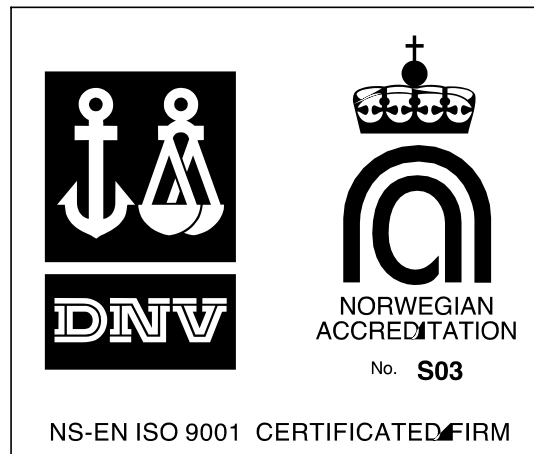

### 57.2 Life support applications

Nordic Semiconductor products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury.

Nordic Semiconductor ASA customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Nordic Semiconductor ASA for any damages resulting from such improper use or sale.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nordic Semiconductor:

[nRF52840-PDK](#) [nRF52840-QIAA-R7](#) [nRF52840-QIAA-T](#) [nRF52840-QIAA-R](#) [nRF52840-DK](#) [nRF52840-CKAA-R](#)