

FPA250 Thick Film Power Resistors **ARCOL**

Due to a Non-Inductive design these elements are ideally suited for high frequency and pulse load applications.

- Non Inductive Performance for HF Applications
- Power Applications 100W to 250W
- Very Good Power/Volume Ratio
- RoHS Compliant




Characteristics

Power rating:	250W (heatsink at 50°C)	Partial discharge:	≤10pC / 5000Vac
Resistance range:	From 1R to 2M E6 Series	Typical inductance:	40nH typical
Tolerance (Code):	Standard J (±5%) and K (±10%) Also available F (±1%) on request	Parallel capacitance:	40pF
Temperature coefficient:	100ppm/°C	Capacitance/Mass:	≤120pF
Max working voltage:	5000Vac	Overload:	4Pn x 10 sec
Working temperature range:	-55°C to +155°C	Thermal resistance:	0.15°C/W
Dielectric strength:	7000Vac	Heatsink flatness:	0.05mm max
Insulation resistance:	≥ 10Gohm at 500V	Heatsink surface finish:	6.3 μm max
Creepage distance:	42mm min	Thermal grease:	Required
Air gap distance:	14mm	Max torque for contacts:	2Nm (static)
		Max torque for mounting:	1.8Nm (static)

Ordering Procedure

Standard Resistor Specify Series, Watts, Ohmic Value, Tolerance Code
e.g.: FPA250 10R J

Derating Curve

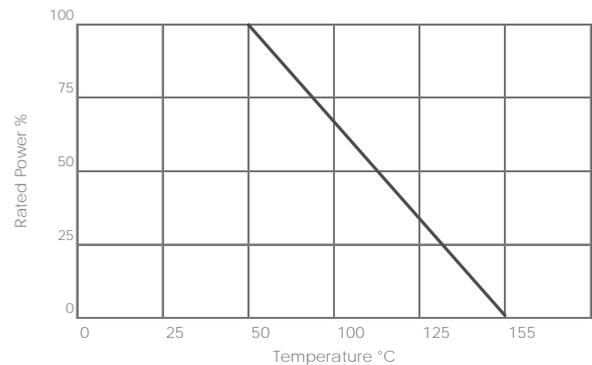

ARCOL UK Limited,
Threemilestone Ind. Estate,
Truro, Cornwall, TR4 9LG, UK.
T +44 (0) 1872 277431
F +44 (0) 1872 222002
E sales@arcolresistors.com

www.arcolresistors.com

The information contained herein does not form part of a contract and is subject to change without notice. Arcol operate a policy of continual product development, therefore, specifications may change.

It is the responsibility of the customer to ensure that the component selected from our range is suitable for the intended application. If in doubt please ask Arcol.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ohmite:

[FPA250 10K J](#) [FPA250 470R J](#) [FPA250 50R J](#) [FPA250 3R3 J](#) [FPA250 4R J](#) [FPA250 10R J](#) [FPA250 1R J](#)
[FPA250 4R7 J](#) [FPA250 330R J](#) [FPA250 1KR J](#) [FPA250 22R J](#) [FPA250 2R2 J](#) [FPA250 5R J](#) [FPA250 100R J](#)
[FPA250 47R J](#) [FPA250- 8R0 J](#) [FPA250 82R J](#) [FPA250 68RJ](#) [FPA 250 47K J](#) [FPA250 50K J](#)