OMRON

Switch Mode Power Supply S8JX-P (300/600-W Models)

S8JX-P Series with EMI ClassB and Power Factor Correction is newly added to S8JX Series.

- Limits for harmonic current emissions (conforms to EN61000-3-2)
- Conforms to ÉMI EN55011 Class B
- Applicable to input free voltage: 100 to 240 VAC
- Extended DC input voltage range: 80 to 370 VDC
 * DC input is not subject to EC directives and safety standards.
- Easy mounting: Front-mounting bracket type and DIN-Rail mounting type are included
 - as standard with the product.
- Safety standards
- UL508/60950-1, cUL CSA C22.2 No.107.1, cUR CSA C22.2 No.60950-1
- EN50178 (=VDE0160) Over voltage category III EN60950-1 (=VDE0805 Teil1)
- High capacity application-covered functions are included as standard with the product.
- Alarm detection function, Remote control function, Remote sensing function

Refer to Safety Precautions on page 13.





c 🖤 us c 🎗 us 🖄 🤇 E

For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Model Number Structure

Model Number Legend

Note: Not all combinations are possible. Refer to List of Models in Ordering Information on page 2.



2. Output Voltage

- 05: 5V
- 12: 12 V
- 24: 24 V
- 48: 48 V
- 3. Configuration/mounting (covered type)
 - C: Front-mounting
 - CD: DIN Rail-mounting
 - N: Without mounting bracket

Note: Estimates can be provided for coatings and other specifications that are not given in the datasheet. Ask your OMRON representative for details.

S8JX-P

Ordering Information

List of Models

Note: For details on normal stock models, contact your nearest OMRON representative.

DIN Rail-mounting



Configuration	Input voltage	Power ratings	Output voltage (VDC)	Output current	Built-in fan	Model
Covered Power	100 to 240 VAC (free) (80 to 370 VDC *)	300 W	5 V	60 A	Yes	S8JX-P30005CD
			12 V	27 A		S8JX-P30012CD
			24 V	14 A peak current 16.5 A (200 VAC)		S8JX-P30024CD
			48 V	7 A		S8JX-P30048CD
Supplies			5 V	120 A		S8JX-P60005CD
			12 V	53 A		S8JX-P60012CD
		600 W	24 V	27 A peak current 31 A (200 VAC)		S8JX-P60024CD
				48 V	13 A	

* The range for compliance with EC Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).

Front-mounting



Configuration	Input voltage	Power ratings	Output voltage (VDC)	Output current	Built-in fan	Front- mounting bracket	Model
		300 W	5 V	60 A			S8JX-P30005C
			12 V	27 A			S8JX-P30012C
			24 V	14 A peak current 16.5 A (200 VAC)			S8JX-P30024C
			48 V	7 A	Ī	Brovidad	S8JX-P30048C
			5 V	120 A	Ī	Provided	S8JX-P60005C
			12 V	53 A	Ī		S8JX-P60012C
			24 V	27 A peak current 31 A (200 VAC)	Yes -		S8JX-P60024C
Covered Power	100 to 240 VAC (free)		48 V	13 A			S8JX-P60048C
Supplies	(80 to 370 VDC *)		5 V	60 A		No	S8JX-P30005N
			12 V	27 A			S8JX-P30012N
			24 V	14 A peak current 16.5 A (200 VAC)			S8JX-P30024N
			48 V	7 A	Ī		S8JX-P30048N
		600 W	5 V	120 A		NO	S8JX-P60005N
			12 V	53 A			S8JX-P60012N
			24 V	27 A peak current 31 A (200 VAC)			S8JX-P60024N
			48 V	13 A			S8JX-P60048N

* The range for compliance with EC Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).

Ratings, Characteristics, and Functions


		Input specification	100 to 24	0 V input			
Item		Power ratings *1	300 W	600 W			
		5 V models	75% min.	76% min.			
Efficiency		12 V models	77% min.	76% min.			
24		24 V models	79% min.	78% min.			
		48 V models	78% min.	79% min.			
	Voltage *2		100 to 240 VAC (allowable range: 85 to 264 VAC, 80 to 370 VDC *8)				
Frequency *2			50/60 Hz (47 to 63 Hz)				
	Current *3	100 V input	4.5 A max. 8.7 A max.				
		200 V input	2.2 A max. 4.3 A max.				
nput	Power factor		0.9 min.				
	Harmonic current emis		Conforms to EN61000-3-2				
	Leakage current *3	100 V input	0.5 mA max.				
,	-	200 V input	1 mA max.				
	Inrush current (for a	100 V input	17.5 A max.				
	cold start at 25°C) *3	200 V input	35 A max.				
,	Voltage adjustment rar	1ge *5	-10% to 15% (with V. ADJ) (5 V, 48 V mode	els: ±10%)			
	Ripple *3		3% (p-p) max. (5 V) *12 2% (p-p) max. (12 V) *12 2% (p-p) max. (24 V or 48 V types)				
Output *4	Input variation influence	e	0.4% max.				
	Load variation influence	e	0.8% max. (0 to 100% load, rated input volta	age)			
1	Temperature variation	influence	0.05%/°C max.				
1	Startup time		1,000 ms max.				
Ì	Hold time *3		20 ms min.				
	Overload protection *6	3	105% to 160% of rated load current, voltage	drop, intermittent, automatic reset.			
1	Overvoltage protection	ı *7	Yes				
Over	Overheat protection		Yes				
	Parallel operation		Yes (up to 5 Power Supplies)				
Additional functions	Series operation		Yes (For up to two Power Supplies; external diodes required.)				
lunctions	Remote sensing		Supported				
Remote control			Supported				
1	Alarm detection indication		Yes (color: red)				
1	Alarm output		Provided, open-collector output, 30 VDC ma	ax, 50 mA max.			
	Ambient operating tem	perature	Refer to the derating curve in Engineering Dat	a on page 6 (with no icing or condensation).			
	Storage temperature		-25 to 75° C (with no icing or condensation)				
	Ambient operating hun	nidity	25% to 85% (Storage humidity: 25% to 90%				
	Dielectric strength		3.0 kVAC for 1 min. (between all inputs and 2.0 kVAC for 1 min. (between all inputs and 1.0 kVAC for 1 min. (between all outputs and 100 VAC for 1 min. (between all outputs and 500 VAC for 1 min. (between all outputs and	PE terminals; detection current: 20 mA) d PE terminals; detection current: 100 mA d RC terminals; detection current: 100 mA			
	Insulation resistance		100 $M\Omega$ min. (between all outputs and all in	puts/PE terminals) at 500 VDC			
i	Vibration resistance		10 to 55 Hz, 0.375-mm single amplitude for	2 h each in X, Y, and Z directions			
	Shock resistance		150 m/s ² , 3 times each in $\pm X$, $\pm Y$, $\pm Z$ direction	ons *10			
			Yes (Color: Green)				
	Output indicator		res (Color. Green)				
		Conducted Emissions *3	Conforms to EN 55011 Group 1 Class B and	d based on FCC Class B *11			
	Output indicator EMI	Conducted Emissions *3 Radiated Emissions	, ,				
Other		Radiated Emissions Electrostatic Discharge	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2				
Other		Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3				
Other	EMI	Radiated Emissions Electrostatic Discharge	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4				
Other		Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4 Conforms to EN61000-4-5				
Other	EMI	Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge Conducted Disturbance	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4 Conforms to EN61000-4-5 Conforms to EN61000-4-6				
Other	EMI	Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4 Conforms to EN61000-4-5 Conforms to EN61000-4-6 Conforms to EN61000-4-11				
Other	EMI	Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge Conducted Disturbance	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4 Conforms to EN61000-4-5 Conforms to EN61000-4-6				
Other	EMI	Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge Conducted Disturbance Voltage Dips/Short Interruptions	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-3 Conforms to EN61000-4-5 Conforms to EN61000-4-6 Conforms to EN61000-4-11 UL UR: UL 508 (Recognition) *13 UL Listed: UL508 (Listing) *14 UL UR: UL 60950-1 (Recognition) cUR: CSA C22.2 No.107.1, CSA C22.2 No. EN/VDE: EN50178 (= VDE 0160) Over volta EN 60950-1 (= VDE 0805 Teil 1)	1 60950-1 age category III,			
Other	EMI	Radiated Emissions Electrostatic Discharge Radiated Electromagnetic Field Electrical Fast Transient/Burst Surge Conducted Disturbance Voltage Dips/Short Interruptions	Conforms to EN 55011 Group 1 Class B and Conforms to EN 55011 Group 1 Class B *1 Conforms to EN61000-4-2 Conforms to EN61000-4-3 Conforms to EN61000-4-4 Conforms to EN61000-4-5 Conforms to EN61000-4-5 Conforms to EN61000-4-11 UL UR: UL 508 (Recognition) *13 UL Listed: UL508 (Listing) *14 UL UR: UL 60950-1 (Recognition) cUR: CSA C22.2 No.107.1, CSA C22.2 No. EN/VDE: EN50178 (= VDE 0160) Over volta	1 60950-1 age category III,			

- *1. When a load is connected that has a built-in DC-DC converter, the overload protection may operate at startup and the Power Supply may not start. Refer to Overload Protection on page 7.
- *2. Do not use an Inverter output for the Power Supply. Inverters with an output frequency of 50/60 Hz are available, but the rise in the internal temperature of the Power Supply may result in ignition or burning.
- ***3.** Rated input voltage: 100 or 200 VAC at 100% load.
- *4. Output characteristics: Specified at power supply output terminals.
- *5. If the output voltage adjuster (V. ADJ) is turned, the voltage will increase by more than the allowable voltage range. When adjusting the output voltage, confirm the actual output voltage from the Power Supply and be sure that load is not damaged.
- *6. For details, refer to Overload Protection on page 7.
- *7. To reset the protection, turn OFF the input power for three minutes or longer and then turn it back ON.
- *8. The range for compliance with EC Directives and safety standards (UL, EN, etc.) is 100 to 240 VAC (85 to 264 VAC).
- *9. The weight is of the type without a mounting bracket.
- *10.S8JX-P600 CD: 100 m/s2
- ***11.**The noise value will vary depending on wiring methods and other characteristics.
- 300-W/600-W models conform to Class B with an aluminum plate set under the product.
- For the 300-W 5V and 600-W 5V and 12V models, insert a noise filter (TDK-Lambda RSEN-2016) in the input line.
- *12.Measurement method conform to RC-9131A of the JEITA standards. For details, refer to Ripple Noise Voltage on page 14.
- *13.Applicable to the 300-W/600-W 5V and 12V models
- *14. Applicable to the 300-W/600-W 24V and 48V models


Connections

Block Diagrams

S8JX-P300 (300 W)

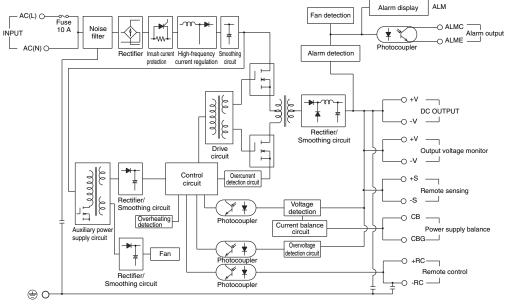



S8JX-P600 (600 W)

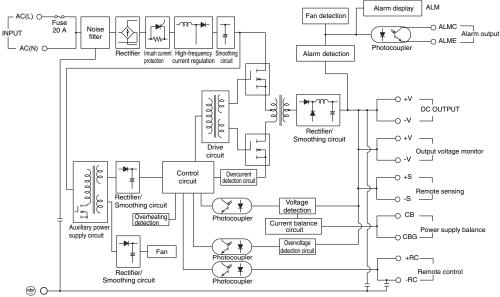


Construction and Nomenclature

Nomenclature







		_
No.	Name	Function
1	Input Terminals (L), (N)	Connect the input lines to these terminals. *1
2	Protective Earth Terminal (PE) (😑)	Connect the ground line to these termi- nals. *2
3	DC Output Terminals (-V), (+V)	Connect the load lines to these terminals.
4	Output Indicator (DC ON: Green)	Lights green while a direct current (DC) output is ON.
5	Output Voltage Adjuster (V. ADJ)	It is possible to increase or decrease the output voltage.
6	Alarm indicator (ALM: Red)	This lamp lights up at the time of output voltage deterioration or fan stoppage, and in standby mode by remote control function.
7	Signal output connector *3	 Output voltage monitor terminal (+V) Remote sensing terminal (+S) Output voltage monitor terminal (-V) Remote sensing terminal (-S) Current balance terminal (CB) Current balance ground terminal (CBG) Remote control terminal (+RC) Remote control terminal (-RC) (Not connected) (Not connected) (Not connected) Alarm detection output terminal (ALME) (Cellector side) Alarm detection output terminal (ALME) (Emitter side)

*1. The fuse is located on the (L) side. Ensure that the (L) side is set to (+). *2. This is a PE (Protective Earth) terminal defined in safety standards and must be grounded.

*3. Signal input/output connectors are included as standard and implemented in the CN1 before shipment.


In this connector, the circuits of 1-2, 3-4, and 7-8 are shorted. Removal of the connector may deteriorate the output stability and accuracy, so be sure to perform the connection of +S and -S terminals. Never connect a load to the output voltage monitor terminal (+V, -V).

Reference Values

Reliability (MTBF)	300 W: 160,000 hrs 600 W: 150,000 hrs
Definition	MTBF stands for Mean Time Between Failures, which is calculated according to the probability of accidental device failures, and indicates reliability of devices. Therefore, it does not necessarily represent a life of the product.
Life expectancy	10 yrs. min.
Definition	The life expectancy indicates average operating hours under the ambient temperature of 40°C and a load rate of 50%. Normally this is determined by the life expectancy of the built-in aluminum electrolytic capacitor.


Engineering Data

Derating Curves (Standard Mounting)




Note: 1. Internal parts may occasionally deteriorate or be damaged. Internal parts may occasionally deteriorate or be damaged. Do not use the Power Supply in areas outside the derating curve (i.e., the area shown by shading ① in the above graph).
 The ambient temperature is defined at a location 50 mm forward from the center of the front surface of the product.
 (For Customers using 300-/600-W type for a DC Input) Reduce the load calculated with the above derating curve by at locat the following coefficients

- by at least the following coefficients.



Standard Mounting

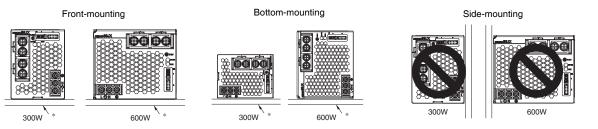

Note: 1. Improper mounting will interfere with heat dissipation and may occasionally result in deterioration or damage of internal parts. Use the standard mounting method only.

2. When mounting the Power Supply, mounting it to a metal plate (*) is recommended.


3. Do not cover the air holes (provided at fan mounted side and the opposite side) to have enough air-cooling.

Remote sensing function

Use this function when it is desirable to automatically compensate for voltage drops in the load line.

The remote sensing function is operated by connecting +S terminal (2 pin on CN) to +side of the load terminal and -S terminal (4 pin on CN) to -side of the load terminal.

When the remote sensing function is not used, using a connector provided as standard enables the connection between +S and +V terminals (1 pin on CN) and between -S and -V terminals (3 pin on CN) respectively.




Note: 1. Use a two-core shield wire for connection line (*1).

- 2. If the voltage drop on a load line (*2) is large, the output voltage of the power supply may rise by the voltage drop amount and activate the overvoltage protection. Therefore, be sure to use as thick a wire as possible.
- 3. The voltage drop in the load line must be 0.3 V or less.
- 4. If the load line is long, be sure to use an electrolytic capacitor between the load terminals. As the used electrolytic capacitor may be heated by ripple current due to the connected load, be sure to use an electrolytic capacitor having an allowable ripple current exceeding the used ripple current.
- 5. Opening status of +S and -S terminals may deteriorate the output stability and accuracy. Therefore, be sure to connect S and -S terminals.
- 6. Remove a connector provided as standard and prepare a harness separately.

Remote control function

This function is to turn ON/OFF the output by an external signal using +RC terminal (7 pin on CN) and -RC terminal (8 pin on CN) while input voltage remains applied. To use this function, connect a switch or a transistor to +RC and -RC terminals.

When not in use, use the standard supplied connector to short-circuit +RC and -RC terminals.



Level	Output voltage	Built-in fan
Short or L (0-0.8 V)	ON	Rotation
Open or H (2.4-12 V)	OFF	Stop

Max. applied voltage: 12 V max., Counter voltage: -1 V max., Sink current: 3.5 mA

- Note: 1. If counter voltage is applied to remote control terminals, output voltage cannot be turned ON/OFF.

 - Please remember this when wiring. Use a twist wire or a two-core shield wire for connection line. 3. Remote control circuit is disconnected from input and output circuits.
 - 4. Remove a connector provided as standard and prepare a harness separately.

Alarm detection function

When output voltage drops due to overcurrent protection, overvoltage protection, or overheat protection in operation or input voltage drop, when the built-in fan stops, or when the Power Supply goes standby by remote control, the alarm indicator (LED: red) lights up to indicate the output voltage trouble. In addition, the transistor outputs that outside.

Transistor output: 30 VDC max., 50 mA max.

Residual voltage when the function is ON: 2 V max., leakage current when the function is OFF: 0.1 mA max.

Detection voltage: approximately 80% of the output voltage setting value

When trouble is detected, the transistor output is turned OFF (nonconductive pins 11-12 on CN) and the LED (red) lights up.




- Note: 1. The alarm detection function monitors the voltage at the Power Supply output end. To check an accurate voltage, measure a voltage at the load end.
 - 2. Remove the standard supplied connector and prepare a connector separately.

Overload Protection

The Power Supply is provided with an overload protection function that protects the power supply from possible damage by overcurrent. When the output current rises above 105% to 160% min. of the rated current, the protection function is triggered, decreasing the output voltage. When the output current falls within the rated range, the overload protection function is automatically cleared.

- Note: 1. When a load is connected that has a built-in DC-DC converter, the overload protection may operate at startup and the power supply may not start.
 - 2. Internal parts may occasionally deteriorate or be damaged if a short-circuited or overcurrent state continues during operation.
 - 3. Internal parts may possibly deteriorate or be damaged if the Power Supply is used for applications with frequent inrush current or overloading at the load end. Do not use the Power Supply for such applications.


(Reference value)



Overvoltage Protection

Consider the possibility of an overvoltage and design the system so that the load will not be subjected to an excessive voltage even if the feedback circuit in the Power Supply fails. When an excessive voltage that is approximately 130% of the rated voltage or more is output, the output voltage is shut OFF, preventing damage to the load due to overvoltage and simultaneously the alarm indicator will be lit. Reset the input power by turning it OFF for at least three minute and then turning it back ON again.

(Reference value)



Note: Do not turn ON the power again until the cause of the overvoltage has been removed.

Output peak current (300-W 24V, 600-W 24V Models)

The following conditions should be satisfied for the peak current value.

• t1 \leq 10 s • lp \leq rated peak current • lave \leq rated current Duty= $\frac{t1}{t1+t2} \times 100 \ [\%] \leq 35\% \ (180 \text{ to } 240 \text{ VAC})$ [A]

Note: 1. Do not hold peak load current over 10 seconds. In addition, you should not use duty cycle under conditions beyond above figure.

It may cause damage in its power supply.


- 2. Please derate peak load current depending on ambient temperature and mounting orientation.
- Please keep the average current of peak load cycle from becoming more than the rated value.

Overheat Protection

If the internal temperature rises excessively as a result of fan failure or any other reason, the overheat protection circuit will be triggered to shut OFF the output voltage.

The alarm indicator lights at the same time. Reset the input power by turning it OFF for at least three minutes and then turning it back ON again.

Inrush Current, Startup Time, Output Hold Time




Note: A maximum startup time of 1,000 ms is required. Construct a system configuration that considers the startup time of other devices.

(Unit: mm)


Dimensions

Front-mounting Models


S8JX-P300 C (300 W)

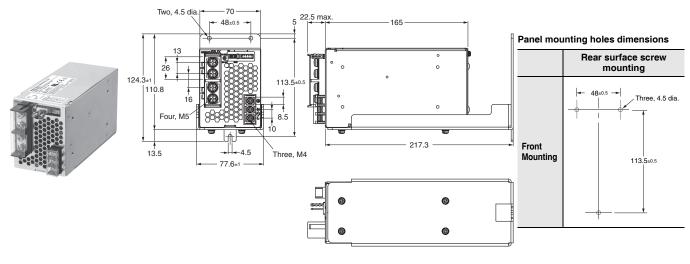


S8JX-P300 N (300 W)

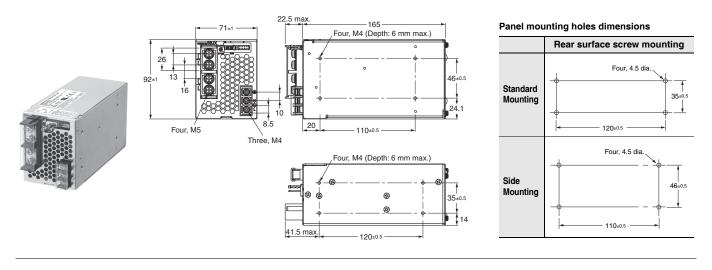

S8JX-P

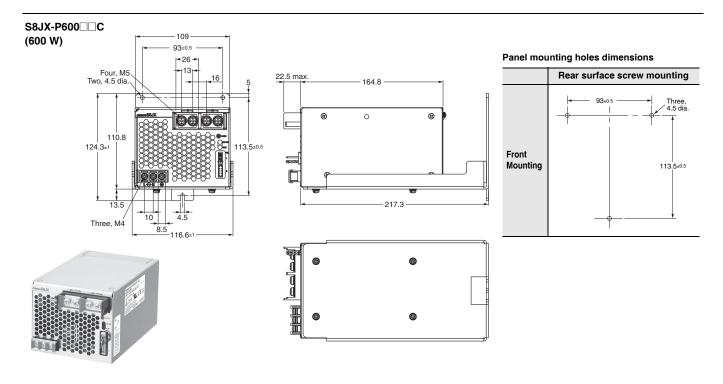


S8JX-P600 N (600 W)

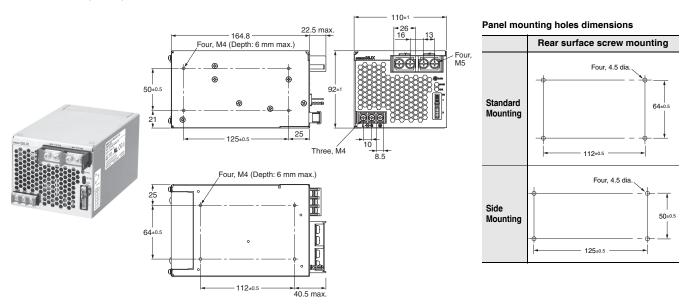


DIN Rail-mounting Models

S8JX-P300 CD (300 W)



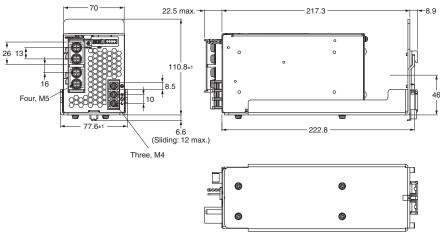


Note: Use a metal DIN Rail when mounting a 300-W model to a DIN Rail.

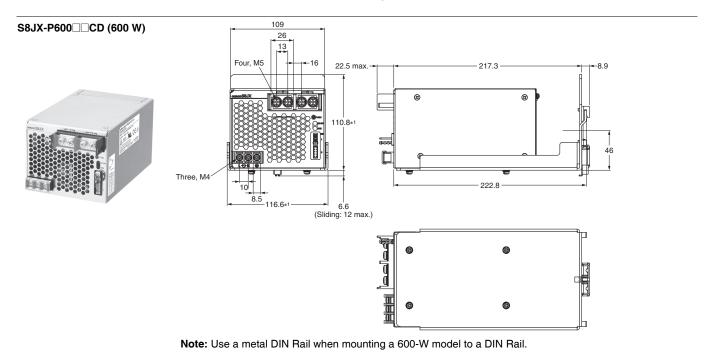

S8JX-P

DIN Rail (Order Separately)

End Plate



Note: 1. Use a metal DIN Rail when mounting the S8JX-P to a DIN Rail.
2. If the Unit may be subjected to sliding to either side, attach an End Plate (model PFP-M) on each side of the Unit.

Terminal Cover (Order Separately)

Terminal Cover model	Applicable Power Supply and applicable location	
S82Y-JX-C4P1	S8JX-P 300 W output side	
S82Y-JX-C5P1	S8JX-P 300 W input side	

Replacement Fan (sold separately)

Product	Model
Replacement fan unit for 300-W models	S82Y-JXP30FAN
Replacement fan unit for 600-W models	S82Y-JXP60FAN

Safety Precautions

Refer to Safety Precautions for All Power Supplies.

Minor electric shock, fire, or Product failure may occasionally occur. Do not disassemble, modify, or repair the Product to touch the interior of the Product.

Minor burns may occasionally occur. Do not touch the Product while power is being supplied or immediately after power is turned OFF.



Fire may occasionally occur. Tighten terminal screws to the specified torque.

M4:1.13 N·m.

(The DC output terminal of S8JX-G15005 and S8JX-P15005:1.56 N·m.) M5:2.25 N·m.

Minor injury due to electric shock may occasionally occur. Do not touch the terminals while power is being supplied. Always close the terminal cover after wiring.



Minor electric shock, fire, or Product failure may occasionally occur. Do not allow any pieces of metal or conductors or any clippings or cuttings resulting from installation work to enter the Product.


Precautions for Safe Use

Mounting


- Take adequate measures to ensure proper heat dissipation to increase the long-term reliability of the Product.
- The 300 W, 600 W models of S8JX-P series are designed to radiate heat by means of forced air-flow. Do not cover the air holes (provided at fan mounted side and the opposite side) to have enough air-cooling.
- The screws must not protrude beyond the following values inside the Power Supply when screw holes provided on the chassis are used.

300 W or 600 W of S8JX-P series: 6 mm

- Mounting screw tightening torque (recommended value) : 0.54 N-m.
- Front mounting is possible using provided mounting bracket.When cutting out holes for mounting, make sure that cuttings do
- not enter the interior of the Products. • Improper mounting will interfere with heat dissipation and may
- occasionally result in deterioration or damage of internal parts. Use the standard mounting method only.
- The internal parts may occasionally deteriorate and be broken due to adverse heat radiation. Do not loosen the screw on the side face of the main body.
- When mounting two or more Power Supplies side-by-side, allow at least 15 mm for S8JX-P series spacing between them.
- Provide a space of at least 50 mm back and forth for S8JX-P series when mounting 300-W and 600-W models as well.
- Use the metal plate as the mounting panel.







*1. Convection of air

*2. Use a metal plate as the mounting surface.

Wiring

- Connect the ground completely. A protective earthing terminal stipulated in safety standards is used. Electric shock or malfunction may occur if the ground is not connected completely.
- Minor fire may possibly occur. Ensure that input and output terminals are wired correctly.
- Do not apply more than 75 N force to the terminal block when tightening it.
- Be sure to remove the sheet covering the Product for machining before power-ON so that it does not interfere with heat dissipation.
- Use the following material for the wires to be connected to the S8JX to prevent smoking or ignition caused by abnormal loads.

Recommended Wire Type

S8JX-P series	Input side	AWG12 to AWG20 (a cross section of 0.517 to 3.309 mm ²) UL-certified temperature of at least 60°C or 60/75°C
300 W, 600 W	Output side	AWG6 to AWG20 (a cross section of 0.517 to 13.30 mm ²) UL-certified temperature of at least 60° C or $60/75^{\circ}$ C

* The rated current for the output terminals on the S8JX-P300 and S8JX-P600 is 60A for each terminal. Use two terminals together if the current flow is higher than the rated terminal current.

Method of Manufacturing Connector Harness for Signal I/O

For S8JX-P Series 300-/600-W models, PHD connectors manufactured by JST Mfg. Co., Ltd. should be used.

Connector used	S12B-PHDSS	Manufactured
Housing	PHDR-12VS	by JST Mfg. Co., Ltd.
Terminal	SPHD-001T-P0.5 or BPHD-001T-P0.5	,

To ensure correct wiring, the following points should be borne in mind when manufacturing the connector. It is recommended that the JST Mfg. Co., Ltd. catalog be read for further details.

- Electric cable size AWG26 to AWG22 should be used.
- The electric cable sheath stripping length should be approximately 2.3 mm.
- Dedicated tool YC (Manufactured by JST Mfg. Co., Ltd.) should be used for crimping of terminals and wiring.
- Although UL1007 (Twisted wire) and other equivalent twisted wires can be used for electric cables, UL1061 with a small outer sheath shape and equivalent twisted wires should be used for AWG22.
- When accommodating crimped terminal wiring in the housing, insert the wiring as far as possible to the back of the housing in a single movement and check for an audible click. In addition, check that wiring inserted in the housing is properly locked in place.

Installation Environment

- Do not use the Power Supply in locations subject to shocks or vibrations. In particular, install the Power Supply as far away as possible from contactors or other devices that are a vibration source.
- Install the Power Supply well away from any sources of strong, high-frequency noise and surge.

Ambient Operating and Storage Environments

- Store the Power Supply at a temperature of –25 to 75°C for S8JX- P series and a humidity of 25% to 90%.
- The Internal parts may occasionally deteriorate or be damaged. Do not use the Power Supply outside the derating range (i.e., the area shown by shading ① in the derating curve diagram on page 6.)
- Use the Power Supply at a humidity of 25% to 85%.
- Do not use the Power Supply in locations subject to direct sunlight.
- Do not use locations where liquids, foreign matter, or corrosive gases may enter the interior of the Product.

Overload Protection

- Internal parts may possibly deteriorate or be damaged if a shortcircuited, overload or peak load state continues during operation.
- Internal parts may possibly deteriorate or be damaged if the Power Supply is used for applications with frequent inrush current or overloading at the load end. Do not use the Power Supply for such applications.

Charging a Battery


When connecting a battery at the load, connect an overcurrent limiting circuit and overvoltage protection circuit.

Output Voltage Adjuster (V.ADJ)

- The output voltage adjuster (V.ADJ) may possibly be damaged if it is turned with unnecessary force. Do not turn the adjuster with excessive force.
- After completing output voltage adjustment, be sure that the output capacity or output current does not exceed the rated output capacity or rated output current.

Ripple Noise Voltage (S8JX-P Series 300 W 5 V and 600 W 5 V or 12 V Models)


The specified standard for the ripple voltage noise was measured with a measurement circuit that is based on JEITA standard RC-9131A.



DIN Rail-mounting

To mount the Power Supply to a DIN Rail, pull down the rail stopper until you hear it clicks open, hook portion (A) of the Power Supply onto the DIN Rail, press the Power Supply in direction (B), and then push up the rail stopper to lock the Power Supply in place.

To dismount the Power Supply, pull down portion (C) with a flat-blade screwdriver and pull out the Power Supply.



Series Operation

Two power supplies can be connected in series. The (\pm) voltage output can be accomplished with two Power Supplies.

Output Voltage (±) Series Operation Correct Correct AC (L AC (L 0 AC (N AC (N AC (L) AC (L) 0 -0 С AC (N AC (N _\/ 0 0

Note: 1. If the load is short-circuited, a reverse voltage will be generated inside the Power Supply. If this occurs the Power Supply may possibly deteriorate or be damaged. Always connect a diode as shown in the figure. Select a diode having the following ratings.


Туре	Schottky Barrier diode
Dielectric strength (VRRM)	Twice the rated output voltage or above
Forward current (IF)	Twice the rated output current or above

2. Although Products having different specifications can be connected in series, the current flowing through the load must not exceed the smaller rated output current.

Parallel Operation


Connecting CB terminal (5 pin on CN) and CBG terminal (6 pin on CN) enables the current balancing function and that allows the parallel operation at 80% or less of the total output capacity. Up to five Power Supplies can be connected.

- Use 2-conductor shielded cable as a connection wire (*1).
- Adjust the output voltage difference of each Power Supply to 100 mV or less or 1% or less of the rated output voltage, whichever is smaller, using the output voltage adjuster (V. ADJ).
 During parallel operation, load current may be biased to one side, resulting in damage to internal components.
- Parallel operation is used to increase static capacity. The output voltage may drop with sudden load fluctuations.
- There may be steps in the rising waveform of the output voltage during parallel operation.
- Remove the standard supplied connector and prepare a connector separately.



Backup operation

Backup operation is possible. (Requires an external diode.)



The same model should be used for power supplies A and B.

- Type: Schottky Barrier diode
- Withstand voltage (VRRM): Equivalent to or higher than the rated power supply output voltage
- Forward current (IF): Double the rated power supply output current or higher
- The output voltages of power supplies A and B output should be set higher only by a value equivalent to the drop in diode D₁ and D₂ forward voltages (V_F).

In addition, since power loss occurs resulting from power supply output current ($Iou\tau$) × diode forward voltage (VF), the diode should be cooled to ensure that its temperature is kept at the value indicated in the catalog or lower.

- Since power loss occurs due to load power and the diode, care should be exercised to ensure that the rated power (Rated output voltage × rated output current) for one power supply is not exceeded.
- For backup operation, do not connect the CB and CBG terminals on S8JX-P-series 300-W or 600-W models.

In Case There Is No Output Voltage

There is a possibility that functions such as over-current protection, over-voltage protection or overheating protection are functioning. In addition, other possible causes include stoppage of the built-in fan and the remote control function (OFF). Please check the following 5 points and, if there is still no output voltage, contact your OMRON sales representative.

Method of Checking Over-current Protection

 Check (after removing load line) whether or not the load is in overcurrent status (including short circuits).

Method of Checking Over-voltage Protection

- Switch off the input power supply, and switch back on after at least 3 minutes have elapsed.
- Check whether or not the +S and -S terminals are open.

Method of Check Overheating Protection

• Switch off the input power supply and switch back on after allowing sufficient time for cooling.

Checking for Built-in Fan Stoppage

• Check whether or not the built-in fan has stopped. The fan is a replaceable component.


Checking the Remote Control Function

• Check whether or not the +RC and -RC terminals are in open status. Carry out the regulated connections.

Fan Replacement

- Please contact your OMRON sales representative regarding fan replacement. Fans will be replaced at cost. In addition, a replacement fan unit (Model S82Y-JXP FAN) is available. Please use the curve below as a guideline for the timing of fan replacement.
- Fan replacements made by the customer fall outside the scope of safety standards.

Replacement should be implemented as shown below.



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

In the interest of product improvement, specifications are subject to change without notice.



OMRON AUTOMATION AMERICAS HEADQUARTERS • Chicago, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE México DF • 52.55.59.01.43.00 • 01-800-226-6766 • mela@omron.com

OMRON ELECTRONICS DE MEXICO • SALES OFFICE Apodaca, N.L. • 52.81.11.56.99.20 • 01-800-226-6766 • mela@omron.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br OMRON ARGENTINA • SALES OFFICE Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES 54.11.4783.5300

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • +31 (0) 23 568 13 00 • www.industrial.omron.eu

Authorized Distributor:

Controllers & I/O

- Machine Automation Controllers (MAC)
 Motion Controllers
- Programmable Logic Controllers (PLC)
 Temperature Controllers
 Remote I/O

Robotics

Industrial Robots
 Mobile Robots

Operator Interfaces

• Human Machine Interface (HMI)

Motion & Drives

- Machine Automation Controllers (MAC)
 Motion Controllers
 Servo Systems
- Frequency Inverters

Vision, Measurement & Identification

Vision Sensors & Systems
 Measurement Sensors
 Auto Identification Systems

Sensing

- Photoelectric Sensors Fiber-Optic Sensors Proximity Sensors
- Rotary Encoders
 Ultrasonic Sensors

Safety

- Safety Light Curtains
 Safety Laser Scanners
 Programmable Safety Systems
- Safety Mats and Edges
 Safety Door Switches
 Emergency Stop Devices
- Safety Switches & Operator Controls Safety Monitoring/Force-guided Relays

Control Components

- Power Supplies
 Timers
 Counters
 Programmable Relays
- Digital Panel Meters
 Monitoring Products

Switches & Relays

Limit Switches • Pushbutton Switches • Electromechanical Relays
 Solid State Relays

Software

Programming & Configuration • Runtime

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

S8JX-P05024C S8JX-P30024CD S8JX-P30024C S8JX-P60024C S8JX-P60024CD S8JX-P30024N