
UNCONTROLLED DOCUMENT

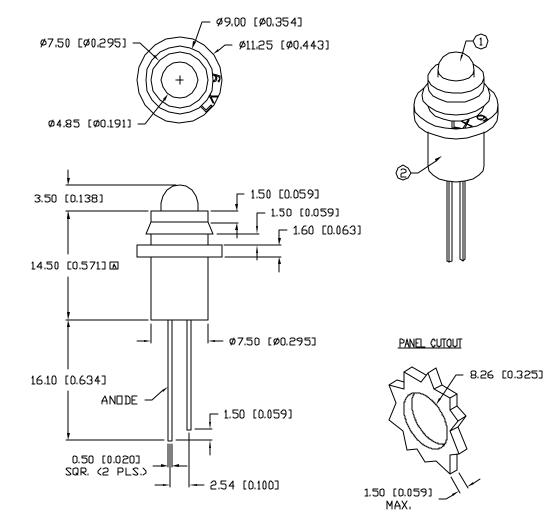

PART NUMBER				
SSI-LXH9ID				
REV.	E.C.N. NUMBER AND REVISION COMMENTS	D٨	ATE	
А	E.C.N. #10427.	5.1	5.98	
В	E.C.N. #10BRDR、& REDRAWN IN 3D、	1.8	3.02	
FLECTRO	-OPTICAL CHARACTERISTICS [4=25°C]7=20mA			

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
		075			
PEAK WAVELENGTH		635		nm	
FORWARD VOLTAGE		2.0	2.5	٧f	
REVERSE VOLTAGE	5.0			Vr	lr=100µA
AXIAL INTENSITY		40		med	l f = 20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIFF	FUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	°Ċ
SOLDERING TEMP.	+ 260	. C
2.0mm FROM BODY		3 SEC. MAX
* t<10هرS		

NOTES:

1. SSL-LX509F3ID, RED LED. 2. SSH-LXH9 BLACK RUBBER HOUSING.

UNCONTROLLED DOCUMENT *UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN= +0.00 -0.00 WAX.= +0.00							
REV.	PART NUMBER	<u>confidential information</u> The information contaned in this document is the property of Lumex NG, except as specifically authorized in writing by Lumex	LUM	E X IPAL	E. HELEN ROAD	-6976 B	
В	SSI-LXH9ID	Inc., the holder of this document shall keep all information contaned herein confidential and shall protect same in whole or in part from disclosure and dissemnation to all throp parties.	Ve Tane Ebracis To Ma	US	NE; +1.847.359.2 WEB: www.lumex.c WEB: www.lumex.c	com	
	T-5mm 635nm RED LED PANEL INDICATOR,	<u>Reliability note</u> Our nany years of experience data accumulation indicate that	DRAWN BY:	CHECKED BY:	APPROVED BY: DA		
	RED DIFFUSED LENS.	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. Please pay attention to your soldering process.	BC			AGE: 1 OF 1 CALE: N/A	

T

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSI-LXH9ID