

Smallest book-style EMC/RFI Filter for Inverter and Power Drive Systems




- Standard and high performance EMC solution
- Footprint space-saving book-style housing
- Solid safety connector blocks
- Standard attenuation performance FN 3287
- High attenuation performance FN 3288
- HV versions for 690 VAC applications
- HVIT- and IT versions for IT distribution networks
- Versions with low leakage current



Performance indicators

Attenuation performance

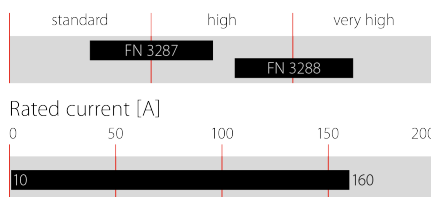

Technical specifications

Maximum continuous operating voltage	3x 530/305 VAC (FN 3287, FN 3288) 3x 530 VAC (FN 3288 IT) 3x 760/440 VAC (FN 3288 HV) 3x 760 VAC (FN 3288 HVIT)
Rated currents	10 to 160 A @50°C
Operating frequency	DC to 60 Hz
High potential test voltage	P -> E 2260 VDC for 2 s (FN 3287, FN 3288) P -> E 2900 VDC for 2 s (FN 3288 IT) P -> P 2280 VDC for 2 s (FN 3287, FN 3288, FN 3288 IT) P -> E 2650 VDC for 2 s (FN 3288 HV) P -> E 3530 VDC for 2 s (FN 3288 HMIT) P -> P 3270 VDC for 2 s (FN 3288 HV)
Pollution degree	2 acc. IEC 60664-1
Protection category	IP 20 acc. to IEC 60529
Overload capability	6x rated current for 1 sec, once per hour 1.5x rated current for 1 minute, once per hour
Temperature range (operation and storage)	-40°C to +100°C (with current derating >50°C)
Climatic class	-40/100/21 acc. to IEC 60068-1
Vibration and shock	3M4 (operation); 2M2 (transport) acc. to IEC 60721-3-3; IEC 60721-3-2
Flammability according to	UL 94 V-0
Compliance with insulation requirement	> 1 MOhm acc. to IEC 60204-1
Design corresponding to	UL 60939-3, IEC 60939-3
MTBF	> 200,000 hours
Overvoltage category	II acc. IEC 60664-1

Approvals



600 VAC


Features and benefits

- FN 3287 and FN 3288 series of filters provides state-of-the-art EMI attenuation based on an innovative filter topology. They help to ensure compliance with Class C2 or even C1 limits.
- The slim book-style shape allows a convenient and space-saving installation next to inverters, converters or motor drives.
- The compact FN3287 and FN3288 filter from 10 to 160A are designed for the most diverse applications worldwide, including machinery and machine tools.
- FN 3288 HV filters up to 160 A are applicable for 690 VAC distribution networks.
- FN 3288IT and FN 3288HVIT filters up to 160 A meet the special requirements for IT distribution networks.
- Low leakage current filter versions help to fulfill tough requirements (e.g. 0.1 mA) in respect of leakage current limitation.

Typical applications

- Three-phase variable speed drives and power drive systems (PDS)
- Machine tool and machinery equipment
- IT power distribution networks (FN 3288IT and FN 3288 HVIT)
- General energy conversion devices (inverters, converters)
- Process automation equipment
- Three-phase power supplies
- Low-leakage current requirements

Typical electrical schematic

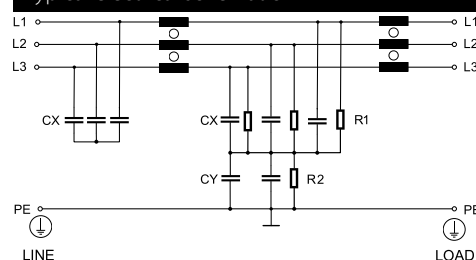

Note: IT and HVIT versions without discharge resistor to ground.

Filter selection table

Filter	Rated current @ 50°C (40°C) [A]	Typical drive power rating** [kW]	Leakage current*** @ 530 VAC/50 Hz [mA]								Power loss @ 25°C [W]	Terminal Type	Weight [kg]	Frame
			C35	C34	C33	C28	C27	C26	C21	C17				
*C..														
Standard performance:														
FN 3287-10-44-C..-R65	10 (11)	5.5				3.7		2.2	0.4		7.5	-44	0.7	Q
FN 3287-16-44-C..-R65	16 (17)	7.5			4.3			2.4	0.4		9.5	-44	0.8	R
FN 3287-20-33-C..-R65	20 (22)	11			4.9			2.5	0.4		10.0	-33	0.9	S
FN 3287-25-33-C..-R65	25 (27)	15			4.9			2.5	0.4		11.4	-33	1.0	S
FN 3287-40-33-C..-R65	40 (44)	22			4.9			2.5	0.4		22.6	-33	1.5	T
FN 3287-50-53-C..-R65	50 (55)	30			4.9			2.5	0.4		25.5	-53	2.1	U
FN 3287-63-53-C..-R65	63 (69)	37			4.9			2.5	0.4		32.1	-53	2.2	U
FN 3287-80-34-C..-R65	80 (88)	45			5.6			2.7	0.4		32.6	-34	3.4	F
FN 3287-100-35-C..-R65	100 (110)	55			5.6			2.7	0.4		33.0	-35	4.2	G
FN 3287-125-35-C..-R65	125 (137)	75			5.6			2.7	0.4		37.5	-35	4.6	G
FN 3287-160-40-C..-R65	160 (175)	90			5.6			2.7	0.4		38.4	-40	6.0	H
High performance:														
FN 3288-10-44-C..-R65	10 (11)	5.5		5.9				2.5	0.4	0.1	7.1	-44	0.8	A
FN 3288-16-44-C..-R65	16 (17)	7.5	6.0					2.5	0.4	0.1	10.5	-44	1.0	B
FN 3288-20-33-C..-R65	20 (22)	11	6.0					2.5	0.4	0.1	10.7	-33	1.2	C
FN 3288-25-33-C..-R65	25 (27)	15	6.0					2.5	0.4	0.1	17.8	-33	1.2	C
FN 3288-40-33-C..-R65	40 (44)	22	6.0				3.5		0.4	0.1	21.6	-33	1.8	D
FN 3288-50-53-C..-R65	50 (55)	30	6.6					2.6	0.4	0.1	29.3	-53	2.5	E
FN 3288-63-53-C..-R65	63 (69)	37	6.6					2.6	0.4	0.1	34.5	-53	2.7	E
FN 3288-80-34-C..-R65	80 (88)	45	7.1					2.7	0.4	0.1	28.8	-34	4.3	F
FN 3288-100-35-C..-R65	100 (110)	55	7.1					2.7	0.4	0.1	36.0	-35	5.1	G
FN 3288-125-35-C..-R65	125 (137)	75	7.1					2.7	0.4	0.1	42.2	-35	5.0	G
FN 3288-160-40-C..-R65	160 (175)	90	7.1					2.7	0.4	0.1	46.1	-40	6.6	H
HP for IT power networks****:														
FN 3288IT-10-44-C..-R60	10 (11)	5.5		5.9							6.2	-44	1.1	I
FN 3288IT-16-44-C..-R60	16 (17)	7.5		5.9							9.7	-44	1.3	J
FN 3288IT-20-33-C..-R60	20 (22)	11		5.9							13.2	-33	1.6	K
FN 3288IT-25-33-C..-R60	25 (27)	15		5.9							15.6	-33	1.6	K
FN 3288IT-40-33-C..-R60	40 (44)	22		5.9							18.7	-33	2.8	L
FN 3288IT-50-53-C..-R60	50 (55)	30		6.5							24.0	-53	2.8	M
FN 3288IT-63-53-C..-R60	63 (69)	37		6.5							29.8	-53	2.9	M
FN 3288IT-80-34-C..-R60	80 (88)	45		7.0							28.8	-34	4.6	N
FN 3288IT-100-35-C..-R60	100 (110)	55		7.0							33.0	-35	5.4	O
FN 3288IT-125-35-C..-R60	125 (137)	75		7.0							42.2	-35	5.3	O
FN 3288IT-160-40-C..-R60	160 (175)	90		7.0							46.1	-40	6.9	P

* Replace C.. with corresponding listed C35, C34, C33, C28, C27, C26, C21 or C17.

** Typical power rating at 400 VAC for FN 3287 and FN 3288 with cos phi=0.85. The exact value depends upon the efficiency of the drive, the motor and the entire application.

*** Standardized calculated leakage current acc. IEC 60939 under normal operating conditions (FN 3287, FN 3288 and FN 3288 IT at 530 VAC).

**** These filters may be operated in IT system as long as the operation conditions and possible short circuit/fault (earth connection of one conductor) occurs between the supply (line side) and the filter. The filters are not designed for short circuit/faults occurring between converter and motor.

Filter selection table

Filter	Rated current @ 50°C (40°C) [A]	Typical drive power rating** [kW]	Leakage current*** @ 760 VAC/50 Hz								Power loss @ 25°C [W]	Input/output Connections	Weight [kg]	Frame
			[mA]											
			C44	C43	C42	C36	C34	C26	C25	C24				
* C..														
High voltage versions:														
FN 3288HV-10-44-C...-R65	10 (11)	10					8.4			1.8	7.0	-44	1.2	I
FN 3288HV-16-44-C...-R65	16 (17)	16					8.4		2.5		10.8	-44	1.5	J
FN 3288HV-20-33-C...-R65	20 (22)	20				10.9			2.5		12.6	-33	1.8	K
FN 3288HV-25-33-C...-R65	25 (27)	25				10.9			2.5		14.6	-33	1.9	K
FN 3288HV-40-33-C...-R65	40 (44)	40				12.4			2.6		19.2	-33	2.9	L
FN 3288HV-50-53-C...-R65	50 (55)	50				12.4			2.6		26.3	-53	3.3	M
FN 3288HV-63-53-C...-R65	63 (69)	64				12.4			2.6		33.3	-53	3.5	M
FN 3288HV-80-34-C...-R65	80 (88)	80				12.4			2.6		28.8	-34	4.9	N
FN 3288HV-100-35-C...-R65	100 (110)	100				12.4			2.6		33.0	-35	5.8	O
FN 3288HV-125-35-C...-R65	125 (137)	125				12.4			2.6		42.0	-35	5.9	O
FN 3288HV-160-40-C...-R65	160 (175)	160				12.4			2.6		46.1	-40	7.2	P
HV for IT power networks****:														
FN 3288HVIT-10-44-C...-R60	10 (11)	10			4.6			3.6			7.0	-44	1.2	I
FN 3288HVIT-16-44-C...-R60	16 (17)	16		6.8				3.7			10.8	-44	1.5	J
FN 3288HVIT-20-33-C...-R60	20 (22)	20		6.8				3.7			12.6	-33	1.8	K
FN 3288HVIT-25-33-C...-R60	25 (27)	25		6.8				3.7			14.6	-33	1.9	K
FN 3288HVIT-40-33-C...-R60	40 (44)	40		6.8				3.7			19.2	-33	2.9	L
FN 3288HVIT-50-53-C...-R60	50 (55)	50		6.8				3.7			26.3	-53	3.3	M
FN 3288HVIT-63-53-C...-R60	63 (69)	64		6.8				3.7			33.3	-53	3.5	M
FN 3288HVIT-80-34-C...-R60	80 (88)	80		6.8				3.7			28.8	-34	4.9	N
FN 3288HVIT-100-35-C...-R60	100 (110)	100		6.8				3.7			33.0	-35	5.8	O
FN 3288HVIT-125-35-C...-R60	125 (137)	125	5.9					3.7			42.2	-35	5.9	O
FN 3288HVIT-160-40-C...-R60	160 (175)	160		6.8				3.7			46.1	-40	7.2	P

* Replace C.. with corresponding listed C44, C43, C42, C36, C34, C26, C25 or C24.

** Typical power rating (400 VAC for FN 3287 and FN 3288 / 690 VAC for FN 3288 HV and FN 3288 HVIT) with cos phi=0.85. The exact value depends upon the efficiency of the drive, the motor and the entire application.

*** Standardized calculated leakage current acc. IEC 60939 under normal operating conditions (FN 3288 HV and FN 3288 HVIT at 760 VAC).


****These filters may be operated in IT system as long as the operation conditions and possible short circuit/fault (earth connection of one conductor) occurs between the supply (line side) and the filter. The filters are not designed for short circuit/faults occurring between converter and motor.

Typical filter attenuation – FN 3287 standard performance


(FN 3287 standard performance version with standard leakage current)

Per CISPR 17: symmetrical 50 Ω /50 Ω -> Differential Mode (DM); asymmetrical 50 Ω /50 Ω -> Common Mode (CM)


FN 3287-10-44-C28-R65

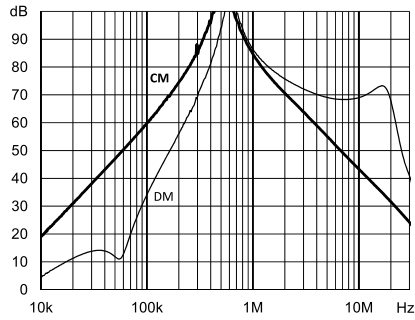


FN 3287-16-44-C33-R65

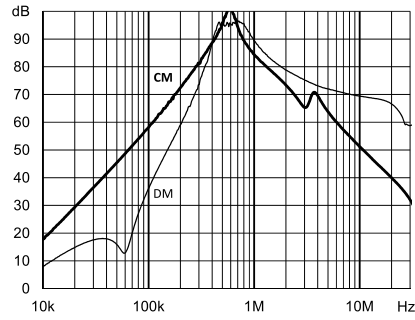


FN 3287-20-33-C33-R65

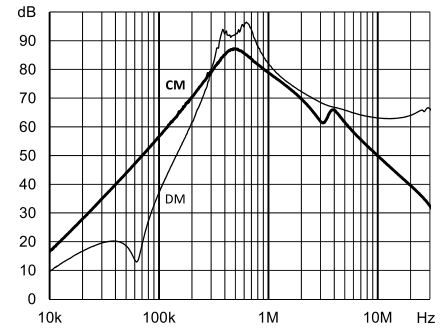


FN 3287-25-33-C33-R65

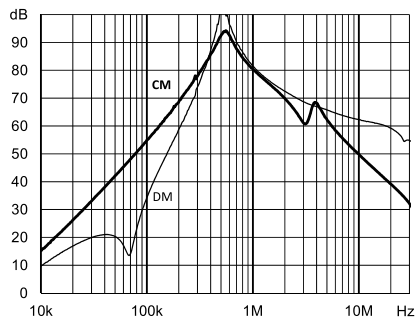


FN 3287-40-33-C33-R65

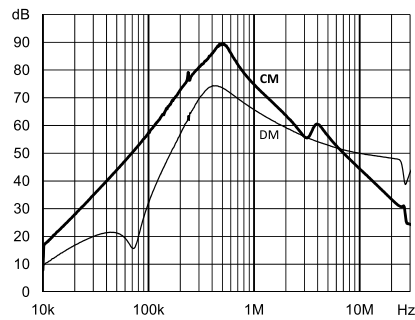


FN 3287-50-53-C33-R65

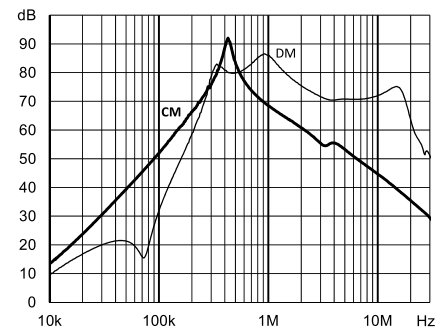


FN 3287-63-53-C33-R65

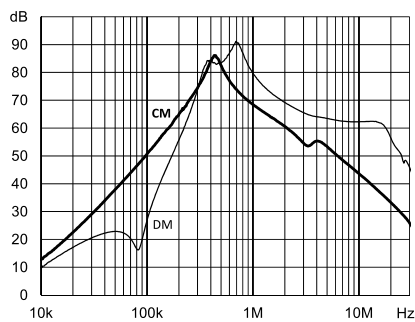


FN 3287-80-34-C33-R65

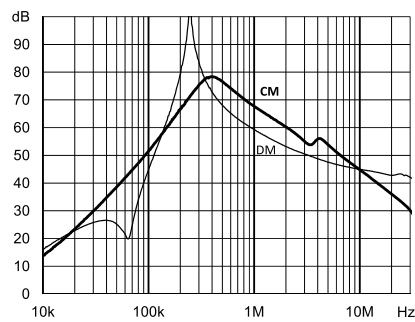


FN 3287-100-35-C33-R65

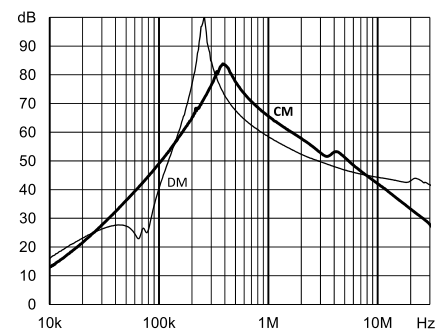

FN 3287-125-35-C33-R65

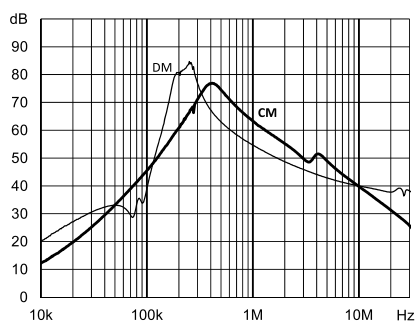

FN 3287-160-40-C33-R65

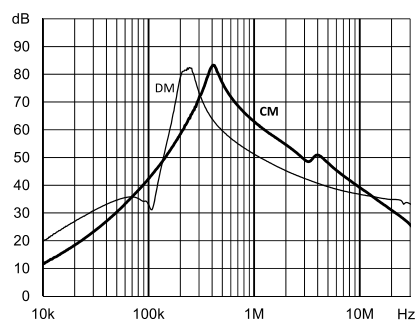


Typical filter attenuation – FN 3288 high performance


(FN 3288 high performance version with standard leakage current)

Per CISPR 17: symmetrical 50 Ω /50 Ω -> Differential Mode (DM); asymmetrical 50 Ω /50 Ω -> Common Mode (CM)


FN 3288-10-44-C34-R65

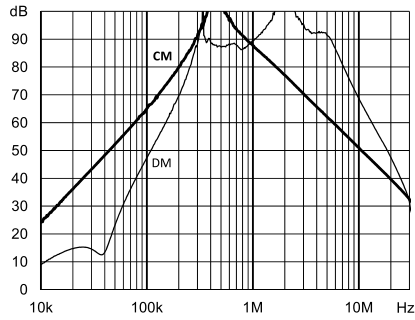


FN 3288-16-44-C35-R65

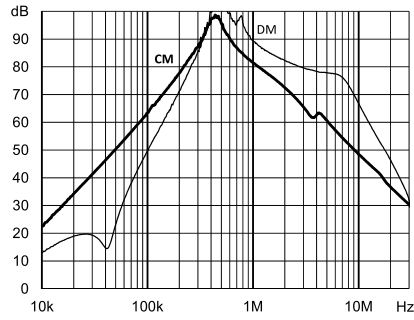


FN 3288-20-33-C35-R65

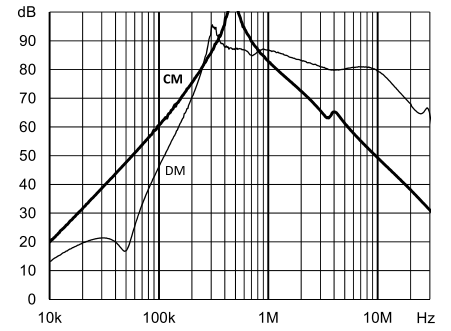


FN 3288-25-33-C35-R65

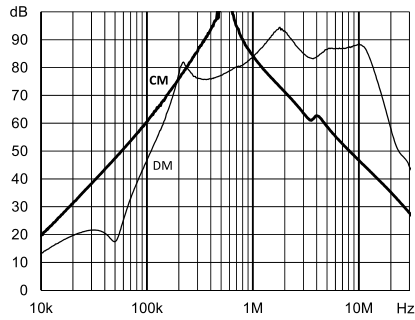


FN 3288-40-33-C35-R65

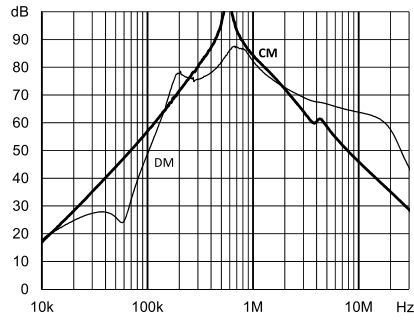


FN 3288-50-53-C35-R65

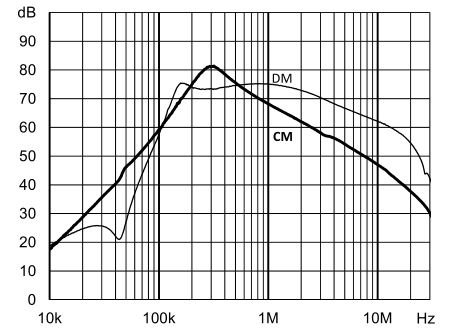


FN 3288-63-53-C35-R65

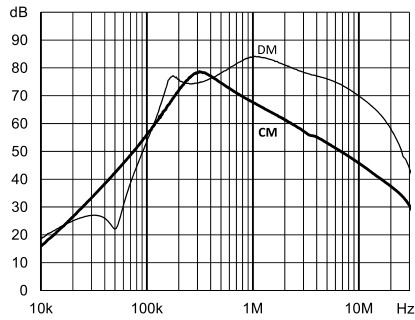


FN 3288-80-34-C35-R65

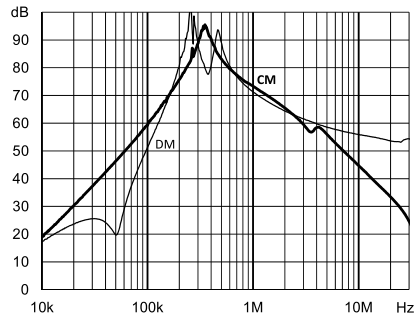


FN 3288-100-35-C35-R65

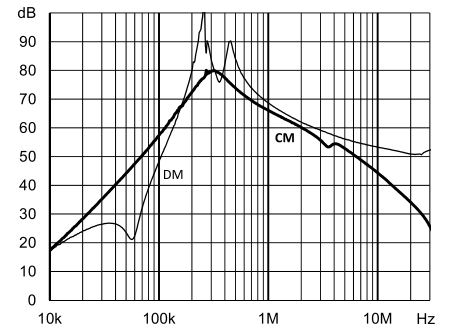

FN 3288-125-35-C35-R65

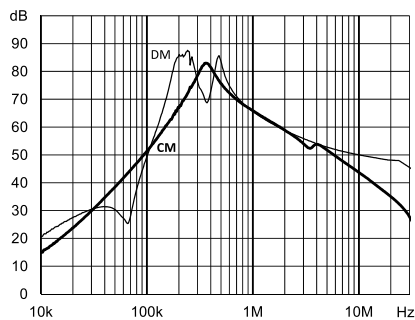


FN 3288-160-40-C35-R65

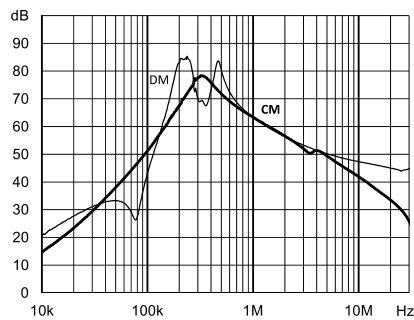


Typical filter attenuation – FN 3288 low leakage current version

Per CISPR 17: symmetrical 50 Ω /50 Ω -> Differential Mode (DM); asymmetrical 50 Ω /50 Ω -> Common Mode (CM)


FN 3288-10-44-C21-R65

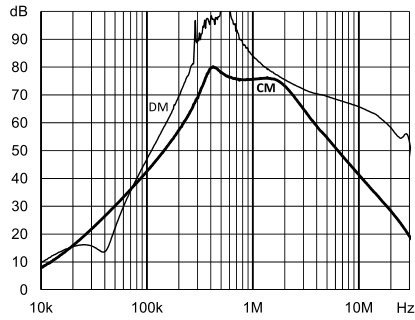


FN 3288-16-44-C21-R65

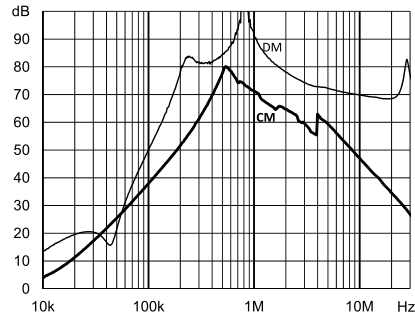


FN 3288-20-33-C21-R65

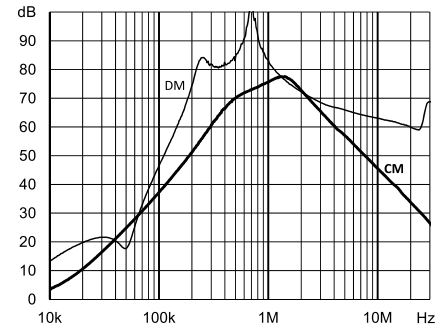


FN 3288-25-33-C21-R65

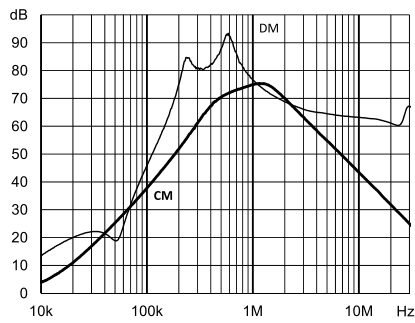


FN 3288-40-33-C21-R65

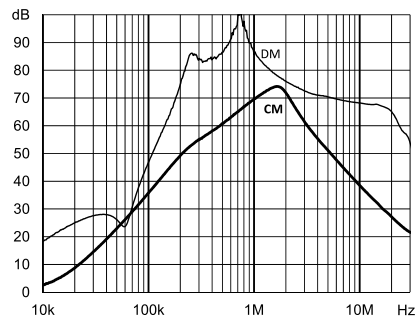


FN 3288-50-53-C21-R65

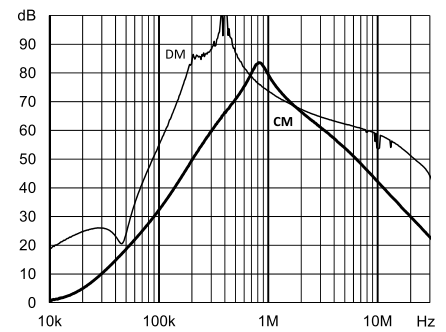


FN 3288-63-53-C21-R65

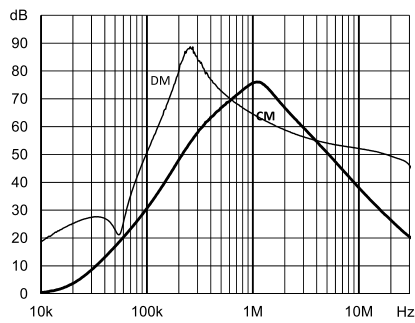


FN 3288-80-34-C21-R65

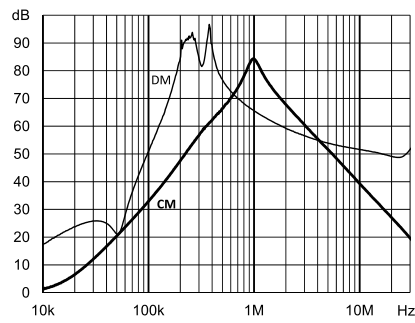


FN 3288-100-35-C21-R65

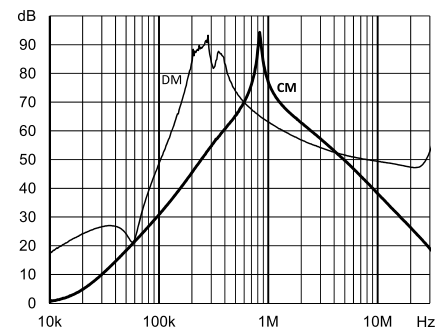

FN 3288-125-35-C21-R65

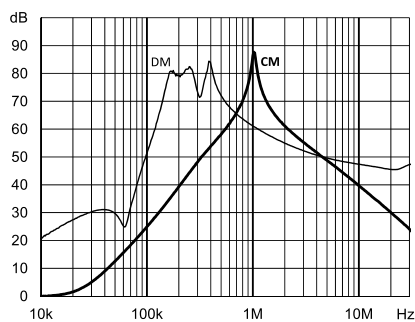


FN 3288-160-40-C21-R65

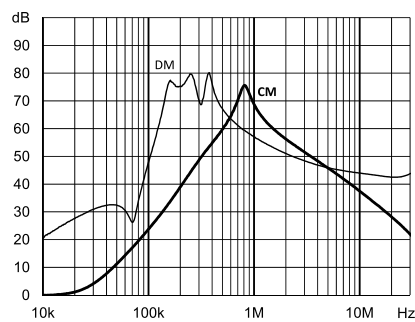

Mechanical data

Frame A to U

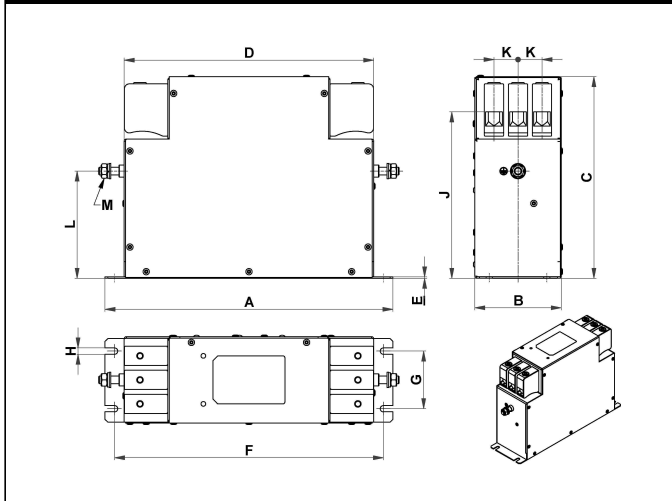

Dimensions*

Frame	A	B	C	D	E	F	G	H	J+/-2	K	L+/-1	M**
A	185	40	120	157	0.8	175	20	4.5	102	11	76	M5
B	195	45	140	164	0.8	180	25	5.4	122	11	93	M5
C	210	45	145	174	0.8	195	25	5.4	126	13	96	M5
D	235	50	168	207	1.0	220	30	5.4	149	13	115	M6
E	255	65	180	226	1.0	240	45	5.4	156	16	120	M6
F	290	80	205	250	1.2	270	50	6.5	172	22	110	M6
G	300	90	210	260	1.5	280	60	6.5	173	25	112	M8
H	310	100	225	270	1.5	290	70	6.5	183	28	110	M10
I	230	50	132	203	0.8	220	30	4.5	114	12.5	88	M5
J	230	55	159	198	0.8	215	35	5.4	141	13	112	M5
K	245	55	167	212	0.8	230	35	5.4	148	13	118	M5
L	265	60	191	237	1.0	250	40	5.4	172	13	135	M6
M	265	70	194	237	1.0	250	50	5.4	170	16	133	M6
N	310	95	220	270	1.2	290	65	6.5	187	22	125	M6
O	320	95	230	280	1.5	300	65	6.5	192	25	127	M8
P	330	100	240	290	1.5	310	70	6.5	198	30	127	M10
Q	180	40	112	153	0.8	170	20	4.5	94	11	68	M5
R	200	45	120	170	0.8	185	25	5.4	102	11	76	M5
S	205	45	132	173	0.8	190	25	5.4	113	13	83	M5
T	215	50	147	185	1.0	200	30	5.4	128	13	95	M6
U	220	65	180	186	1.0	205	45	5.4	156	16	120	M6

* All dimensions in mm. For dimensions without stated tolerances: ISO 2768-m/EN 22768-m

** Earth screw torque: M5 2.0-2.2 Nm; M6 3.5-4.0 Nm; M8 8.0-9.0 Nm; M10 15-17 Nm

Filter input/output connector cross sections

	-44	-33	-53	-34	-35	-40
Solid wire	0.5-10 mm ²	0.5-16 mm ²	0.5-16 mm ²	6-35 mm ²	10-50 mm ²	25-95 mm ²
Flex wire	0.5-6 mm ²	0.5-10 mm ²	0.5-16 mm ²	6-25 mm ²	16-50 mm ²	25-95 mm ²
Flex wire AWG	AWG 20-8	AWG 22-6	AWG 20-4	AWG 6-2	AWG 6-1/0	AWG 0-4/0
Recommended torque	1.0-1.2 Nm	1.5-1.8 Nm	2.0-2.3 Nm	4.0-4.5 Nm	7.0-8.0 Nm	17-20 Nm

Please visit www.schaffner.com to find more details on filter connectors.



Headquarters, global innovation and development

Switzerland

Schaffner Group

Industrie Nord
Nordstrasse 11e
4542 Luterbach
T +41 32 681 66 26
info@schaffner.com



Sales and application centers

China

Schaffner EMC Ltd. Shanghai

T20-3 C, No 565 Chuangye Road,
Pudong district
201201 Shanghai
T +86 21 3813 9500
cschina@schaffner.com
www.schaffner.com.cn

Finland

Schaffner Oy

Sauvonrinne 19 H
08500 Lohja
T +358 10 567 2855
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.

16-20 Rue Louis Rameau
95875 Bezons
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH

Schoemperlenstrasse 12B
76185 Karlsruhe
T +49 721 56910
F +49 721 569110
germanysales@schaffner.com

India

Schaffner India Pvt. Ltd

REGUS WORLD TRADE CENTRE
WTC, 22nd Floor Unit No 2238, Brigade
Gateway Campus, 26/1, Dr. Rajkumar Road
Malleshwaram (W)
560055 Bangalore
T +91 80 67935355
indiasales@schaffner.com

Italy

Schaffner EMC S.r.l.

Via Ticino, 30
20900 Monza (MB)
T +39 039 21 41 070
italysales@schaffner.com

Japan

Schaffner EMC K.K.

Taiju-Seimei Sangenjaya Bldg.
1-32-12, Kamiuma, Setagaya-ku
154-0011 Tokyo
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
www.schaffner.jp

Singapore

Schaffner EMC Pte Ltd.

#05-09, Kg Ubi Ind. Estate
408705 Singapore
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España

Calle Caléndula 93, Miniparc III, Edificio E
El Soto de Moraleja, Alcobendas
28109 Madrid
T +34 917 912 900
F +34 917 912 901
spainsales@schaffner.com

Sweden

Schaffner EMC AB

Östermalmstorg 1
114 42 Stockholm
T +46 8 5050 2425
swedensales@schaffner.com
www.schaffner.com

Switzerland

Schaffner EMV AG

Industrie Nord
Nordstrasse 11e
4542 Luterbach
T +41 32 681 66 26
switzerlandsales@schaffner.com

Taiwan R.O.C.

Schaffner EMV Ltd.

20 Floor-2, No 97, Section 1, XinTai 5th Road
22175 XiZhi District New Taipei City 22175
T +886 2 2697 5500
F +886 2 2697 5533
taiwansales@schaffner.com
www.schaffner.com.tw

Thailand

Schaffner EMC Co. Ltd.

Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang
Amphur Muang P.O. Box 14
51000 Lamphun
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

United Kingdom

Schaffner Ltd.

5 Ashville Way, Molly Millars Lane
Wokingham
RG41 2PL Berkshire
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com

USA

Schaffner EMC Inc.

52 Mayfield Avenue
Edison, New Jersey
T +1 732 225 9533
F +1 732 225 4789
usasales@schaffner.com
www.schaffnerusa.com

Schaffner North America

6722 Thirlane Road
24019 Roanoke, Virginia
T +1 276 228 7943
F +1 276 228 7953

Schaffner North America

823 Fairview Road
24382 Wytheville, Virginia
T +1 276 228 7943
F +1 276 228 7258

To find your local partner within Schaffner's global network: www.schaffner.com

© 2018 Schaffner Group

The content of this document has been carefully checked and understood. However, neither Schaffner nor its subsidiaries assume any liability whatsoever for any errors or inaccuracies of this document and the consequences thereof. Published specifications are subject to change without notice. Product suitability for any area of application must ultimately be determined by the customer. In all cases, products must never be operated outside their published specifications. Schaffner does not guarantee the availability of all published products. This disclaimer shall be governed by substantive Swiss law and resulting disputes shall be settled by the courts at the place of business of Schaffner Holding AG. Latest publications and a complete disclaimer can be downloaded from the Schaffner website. All trademarks recognized.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schaffner:

[FN3287-50-53-C21-R65](#) [FN3288HVIT-20-33-C26-R60](#) [FN3288HVIT-16-44-C26-R60](#) [FN3288-50-53-C21-R65](#)
[FN3288-80-34-C17-R65](#) [FN3288-80-34-C21-R65](#) [FN3288HVIT-125-35-C26-R60](#) [FN3288HV-80-34-C25-R65](#) [FN3288-](#)
[10-44-C21-R65](#) [FN3287-125-35-C21-R65](#) [FN3288-125-35-C17-R65](#) [FN3288-160-40-C17-R65](#) [FN3288-63-53-C17-](#)
[R65](#) [FN3287-40-33-C21-R65](#) [FN3288-100-35-C17-R65](#) [FN3288HVIT-40-33-C26-R60](#) [FN3288HV-20-33-C25-R65](#)
[FN3288HVIT-80-34-C26-R60](#) [FN3288HV-125-35-C25-R65](#) [FN3288-40-33-C21-R65](#) [FN3288-25-33-C17-R65](#) [FN3288-](#)
[25-33-C21-R65](#) [FN3288HV-100-35-C25-R65](#) [FN3288HVIT-100-35-C26-R60](#) [FN3287-100-35-C21-R65](#) [FN3287-20-](#)
[33-C21-R65](#) [FN3288HV-63-53-C25-R65](#) [FN3288HVIT-160-40-C26-R60](#) [FN3287-10-44-C21-R65](#) [FN3288HVIT-25-33-](#)
[C26-R60](#) [FN3287-25-33-C21-R65](#) [FN3287-160-40-C21-R65](#) [FN3288-63-53-C21-R65](#) [FN3288-20-33-C21-R65](#)
[FN3287-16-44-C21-R65](#) [FN3288-160-40-C21-R65](#) [FN3288HV-50-53-C25-R65](#) [FN3288-16-44-C21-R65](#) [FN3288HV-](#)
[16-44-C25-R65](#) [FN3287-63-53-C21-R65](#) [FN3288HVIT-63-53-C26-R60](#) [FN3288-50-53-C17-R65](#) [FN3288-20-33-C17-](#)
[R65](#) [FN3288-16-44-C17-R65](#) [FN3288HV-25-33-C25-R65](#) [FN3288-40-33-C17-R65](#) [FN3288HV-40-33-C25-R65](#)
[FN3288HV-160-40-C25-R65](#) [FN3288-125-35-C21-R65](#) [FN3288HVIT-10-44-C26-R60](#) [FN3288-100-35-C21-R65](#)
[FN3288HV-10-44-C24-R65](#) [FN3287-80-34-C21-R65](#) [FN3288HVIT-50-53-C26-R60](#) [FN3288-10-44-C17-R65](#)