

OPTIONAL TERMINALS
FOR PUSH ON OR
SOLDER CONNECTIONS
(.032 X .250) [0.8 X 6.4]

(4) STANDOFFS TAPPED
1/4-28 X .38 [9.5] DEEP
FOR MOUNTING BOLTS



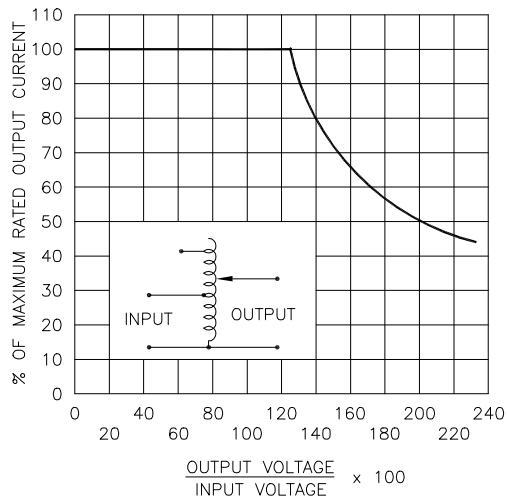


FIGURE A
MAXIMUM OUTPUT CURRENT OF ANY
DUAL INPUT VOLTAGE OR VOLTAGE DOUBLER
UNIT OPERATED AT LOWER INPUT VOLTAGE.

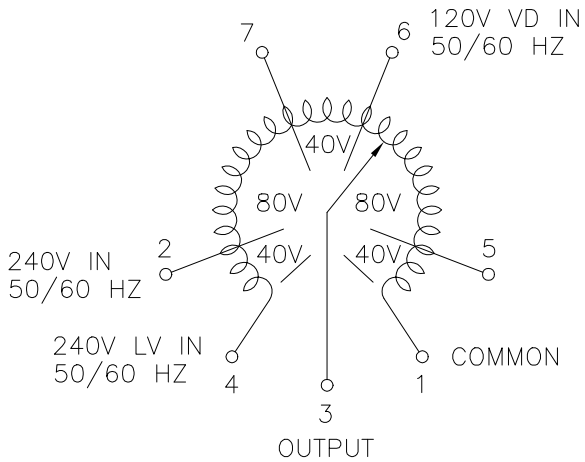


SCHEMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED



MOTOR CIRCUIT
120V, 50/60 HZ
* ROTATION AS VIEWED
FROM MOTOR END
MOTOR SPEED: SEE CHART

SPEED (SECONDS)	MODEL NUMBER	DIM "A"
5	5M1020B	10.56 [268.2]
15	15M1020B	10.56 [268.2]
30	30M1020B	10.95 [278.1]
60	60M1020B	10.95 [278.1]

SPECIFICATIONS															
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS							
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +							
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT				
SINGLE PHASE	240	50/60	0-240	3.5	0.84	5.0	1.20	CW	1-4	——	4-3				
									CCW	1-4	——	1-3			
			0-280	3.5	0.98	——	——		CW	4-5	——	4-3			
									CCW	1-2	——	1-3			
	120	50/60	0-280	3.5#	0.42 [§]	——	——	CW	4-7	——	4-3				
									CCW	1-6	——	1-3			
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			TITL:			SPEC. CONTROL DRAWING MOTORIZED VARIABLE XFMR MODEL: M1020B									
.XX .000 .06 .XXX .005		HOLES .002		DRAFT 1°								1-1/2°		UNITS IN [mm]	
MATERIAL:		ALL DIMENSIONS APPLY AFTER PLATING													
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.			DRAWN BY		DATE		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE		
			S.A. SMITH		9/23/97										
			CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO.		DWG. SIZE		DWG. NO.		
							16.75		83008		D		031-2410		
			ENGINEER		DATE		SCALE 1=1		SHEET 1 OF 1						

MAXIMUM OUTPUT CURRENT IN OUTPUT VOLTAGE RANGE FROM 0 TO 25% ABOVE LINE VOLTAGE. AT HIGHER OUTPUT VOLTAGES, THE OUTPUT CURRENT MUST BE REDUCED ACCORDING TO THE DERATING CURVE FIGURE A.

§ MAXIMUM KVA AT MAXIMUM OUTPUT VOLTAGE AND CORRESPONDING DERATED OUTPUT CURRENT. MAXIMUM KVA FOR LOWER VOLTAGES MAY BE CALCULATED FROM DERATING CURVE FIGURE A.

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM BASE END.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Staco:

M1020B