



SCHEMATIC
VIEW FROM BASE END
FUSE RECOMMENDED BUT NOT SUPPLIED

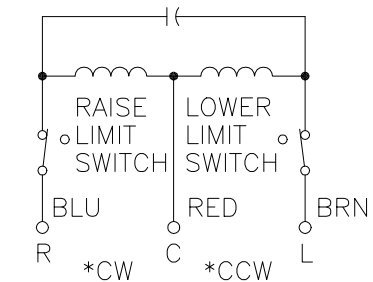

MOTOR CIRCUIT
120V, 50/60 HZ
* ROTATION AS VIEWED FROM MOTOR END
MOTOR SPEED: SEE CHART

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM BASE END.

SPEED (SECONDS)	MODEL NUMBER
5	5M1220BCT
15	15M1220BCT
30	30M1220BCT
60	60M1220BCT

SPECIFICATIONS																	
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS									
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +									
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT						
SINGLE PHASE	240	60	0-240	5.0	1.20	7.0	1.68	CW	1-4	—	4-3						
								CCW	1-4	—	1-3						
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±			UNITS		SPEC. CONTROL DRAWING MOTORIZED VARIABLE XFMR. MODEL: M1220BCT												
DECIMALS .XX .005			IN [mm]														
ANGLES 1°			DRAFT 1-1/2°														
MATERIAL :			ALL DIMENSIONS APPLY AFTER PLATING														
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.				DRAWN BY		DATE		FIRST USED ON		DO NOT SCALE DWG.		CUSTOMER APPROVAL		DATE			
				S.A. SMITH		9/26/97											
				CHECKER		DATE		WEIGHT APPROX.		CODE IDENT. NO.		DWG. SIZE		DWG. NO.			
								16.75 LBS		83008		D		031-3460			
				ENGINEER		DATE		SCALE 1=1		SHEET 1 OF 1							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Staco:

M1220BCT