


Automotive multiple power supply IC

Datasheet - production data



Features

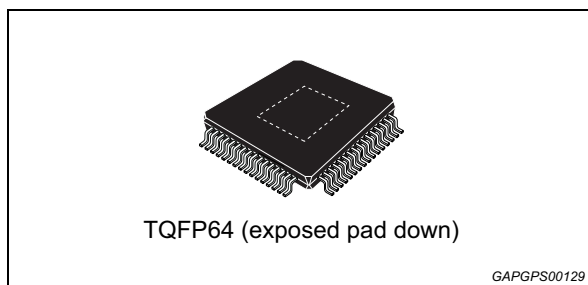

- AEC-Q100 qualified
- Full ISO26262 compliant, ASIL-D systems ready
- Integrated boost regulator, 9 V, 300 mA, 2 MHz (opt. populated diode & inductor) for deep cranking pulse (Stop&Start) & weak battery conditions
- Integrated buck pre-regulator, 6.5 V / 7.2 V, 1 A, 465 kHz
- Integrated LDO, 5 V, 250 mA for μ C I/O and ADC supply
- Integrated configurable LDO, 3.3 V / 5 V, 100 mA for μ C I/O supply
- Configurable and programmable regulator with external FET, 0.8 V to 5 V for μ C core supply
 - up to 1 A in buck configuration
 - up to 750 mA in linear configuration
- Spread spectrum approach to reduce EMC emissions
- Four channels configurable remote sensor interface
 - wheel speed sensor protocol
 - tracking regulator supply (3.3 V - 5 V)
 - reverse battery protection and integrated digital decoding
- High-side pre-drivers for fail safe (On/off control) and for motor pump (PWM control)
- SPI communication bus
- Configurable 3.3 V / 5 V I/O level
- Configurable and programmable double watchdog (Q&A WD and time-windowed WD)
- Double voltage reference for regulated rail reference and monitoring
- Configurable Fail-Safe Functionality (Mode / Safe Delay)
- Fail-Safe Output (FSN)
- Wake-up input
- Low-side general purpose output with programmable PWM control
- Integrated 10-bits ADC with system diagnostics
- Discrete analog inputs for integrated ADC measurement (3 ch.)
- Voltage monitoring UV/OV on all regulated rails
- Temperature monitoring and thermal shutdown
- Operating voltage: VBATP: 4.5 V to 19 V with boost; 6 V to 19 V without boost
- Ambient temperature range: -40 °C to 135 °C
- Package: TQFP64EP (10x10x1mm)

Table 1. Device summary

| Order code | Package | Packing |
|------------|--|---------|
| L9396 | TQFP64 10 x 10 x 1 mm (exposed pad down) | Tube |

Contents

| | | |
|----------|---|-----------|
| 1 | Description | 8 |
| 2 | Overall description | 9 |
| 2.1 | Block diagram | 9 |
| 2.2 | Pins description | 10 |
| 2.3 | Absolute maximum ratings | 13 |
| 2.4 | Operating range | 16 |
| 3 | Power supply | 18 |
| 3.1 | Battery range | 18 |
| 3.2 | Boost regulator | 19 |
| 3.3 | Internal supply | 21 |
| 3.4 | Wake-up input | 22 |
| 3.5 | Charge pump | 23 |
| 3.6 | VPREREG buck regulator | 24 |
| 3.7 | VCORE regulator | 27 |
| 3.8 | VCC5 regulator | 32 |
| 3.9 | VCC regulator | 33 |
| 3.10 | Protected battery switch | 34 |
| 3.11 | Power up and power down sequences | 35 |
| 4 | Pre-drivers | 37 |
| 4.1 | Fail safe pre-driver | 37 |
| 4.2 | Pump motor pre-driver | 38 |
| 4.3 | Pump motor diagnostics | 38 |
| 5 | Remote sensor interface | 43 |
| 5.1 | Active wheel speed sensor | 43 |
| 5.1.1 | Wheel speed data register formats | 46 |
| 5.1.2 | Testmode | 46 |
| 5.1.3 | Wheel Speed SPI Registers | 46 |
| 5.2 | Tracking regulation | 58 |

| | | |
|----------|---|------------|
| 5.3 | Remote sensor interface fault protection | 58 |
| 5.4 | Electrical characteristics | 59 |
| 6 | General purpose output (GPO) driver | 62 |
| 7 | System functional safety implementations | 64 |
| 7.1 | General functional safety implementations | 64 |
| 7.2 | System monitoring and reset handling | 64 |
| 7.2.1 | Analog to Digital algorithmic converter | 64 |
| 7.2.2 | Voltage measurement | 65 |
| 7.2.3 | Reset output | 68 |
| 7.2.4 | Oscillator | 69 |
| 7.3 | Fault output | 70 |
| 7.4 | Watchdog control | 71 |
| 7.4.1 | Watchdog (WD1) | 72 |
| 7.4.2 | Second Watchdog (WD2) | 83 |
| 7.4.3 | Watchdog Timer Disable Input (WDTDIS) | 84 |
| 7.5 | Fail safe output | 85 |
| 7.6 | Temperature sensor | 87 |
| 7.7 | Over temperature protection | 87 |
| 7.8 | Bist | 87 |
| 7.8.1 | Logic Bist | 87 |
| 7.8.2 | Analog Bist | 88 |
| 7.8.3 | OTP check | 88 |
| 8 | Serial Peripheral Communication | 89 |
| 8.1 | CRC Field Details | 89 |
| 8.2 | SPI frame | 89 |
| 8.3 | SPI registers | 91 |
| 8.4 | SPI parameters | 102 |
| 8.4.1 | DC Electrical Parameters | 102 |
| 8.4.2 | AC electrical parameters | 103 |
| 9 | Package information | 104 |
| 9.1 | TQFP64 (10x10x1 mm exp. pad down) package information | 104 |
| 9.2 | TQFP64 (10x10x1 mm exp. pad down) marking information | 107 |

| | | |
|-----------|-------------------------------|------------|
| 10 | Revision history | 108 |
|-----------|-------------------------------|------------|

List of tables

| | | |
|-----------|---|----|
| Table 1. | Device summary | 1 |
| Table 2. | Pins description | 10 |
| Table 3. | Pin absolute maximum ratings | 13 |
| Table 4. | Pin operating range | 16 |
| Table 5. | Configuration and control DC specifications | 18 |
| Table 6. | Boost regulator electrical characteristics | 20 |
| Table 7. | Internal supply electrical characteristics | 22 |
| Table 8. | Wake-up input electrical characteristics | 23 |
| Table 9. | Charge pump electrical characteristics | 24 |
| Table 10. | VPREREG buck regulator | 25 |
| Table 11. | Vcore configuration | 28 |
| Table 12. | VCORE regulator electrical characteristics | 28 |
| Table 13. | VCC5 regulator electrical characteristics | 32 |
| Table 14. | VCC regulator electrical characteristics | 33 |
| Table 15. | Protected battery switch electrical characteristics | 34 |
| Table 16. | Power up and power down | 36 |
| Table 17. | Fail Safe pre-driver electrical characteristics | 37 |
| Table 18. | Logical operation definition | 38 |
| Table 19. | Pump motor diagnostics electrical characteristics | 40 |
| Table 20. | WSS_TEST register | 46 |
| Table 21. | WSS_TEST register bit description | 47 |
| Table 22. | RS_CFG_0_1 register | 47 |
| Table 23. | RS_CFG_0_1 register bit description | 47 |
| Table 24. | RS_CFG_2_3 register | 49 |
| Table 25. | RS_CFG_2_3 register bit description | 49 |
| Table 26. | RS_CTRL register | 51 |
| Table 27. | RS_CTRL register bit description | 51 |
| Table 28. | RS_AUX_CFG register | 52 |
| Table 29. | RS_AUX_CFG register bit description | 52 |
| Table 30. | RS_DATA_RSDR_0-3 registers | 53 |
| Table 31. | RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 0] | 53 |
| Table 32. | RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 1] | 54 |
| Table 33. | RS_DATA_RSDR_4-7 registers | 56 |
| Table 34. | RS_DATA_RSDR_4-7 registers bit description | 56 |
| Table 35. | RS_DATA_RSDR_8-11 registers | 57 |
| Table 36. | RS_DATA_RSDR_8-11 registers bit description | 57 |
| Table 37. | RS_DATA_RSDR_12 register | 57 |
| Table 38. | RS_DATA_RSDR_12 register bit description | 57 |
| Table 39. | RSU_STATUS register | 58 |
| Table 40. | RSU_STATUS register bit description | 58 |
| Table 41. | WSS configuration | 59 |
| Table 42. | Tracking regulation configuration | 60 |
| Table 43. | Assignment matrix configured via SPI | 62 |
| Table 44. | GPO electrical characteristics | 62 |
| Table 45. | Analog to digital converter | 65 |
| Table 46. | Conversion time | 66 |
| Table 47. | Divider ratios vary by measurement are summarized by function | 66 |
| Table 48. | Voltage measurement electrical characteristics | 67 |

| | | |
|-----------|---|-----|
| Table 49. | Reset electrical characteristics | 69 |
| Table 50. | Oscillator electrical characteristics | 70 |
| Table 51. | Masking bits and fault sources | 71 |
| Table 52. | Fault characteristics | 71 |
| Table 53. | Description of the timing parameter | 73 |
| Table 54. | WD2 characteristics | 84 |
| Table 55. | WDTDIS characteristics | 85 |
| Table 56. | Masking bits and fault sources | 85 |
| Table 57. | Fail safe output | 86 |
| Table 58. | Temperature sensor | 87 |
| Table 59. | Logic Bist | 88 |
| Table 60. | Registers summary | 92 |
| Table 61. | DC electrical characteristics | 102 |
| Table 62. | SPI timing characteristics | 103 |
| Table 63. | TQFP64 (10x10x1 mm exp. pad down) package mechanical data | 105 |
| Table 64. | Document revision history | 108 |

List of figures

| | | |
|------------|--|-----|
| Figure 1. | Block diagram | 9 |
| Figure 2. | Pins connection diagram (top view) | 10 |
| Figure 3. | Boost regulator block diagram | 19 |
| Figure 4. | Charge pump block diagram. | 23 |
| Figure 5. | VCORE configuration diagram (buck regulator - top, linear regulator - bottom). | 27 |
| Figure 6. | Power up sequence from wake up input. | 35 |
| Figure 7. | Power down sequence from wake up input | 36 |
| Figure 8. | Standstill operation diagram | 44 |
| Figure 9. | Wheel speed sensor protocol types | 45 |
| Figure 10. | ADC conversion time | 65 |
| Figure 11. | Reset input logic diagram | 68 |
| Figure 12. | Reset output logic diagram | 69 |
| Figure 13. | WD1 block diagram | 72 |
| Figure 14. | Mono-directional timing check evolution | 72 |
| Figure 15. | Bidirectional timing check evolution | 73 |
| Figure 16. | Timing State evolution depending on WD_TO_RST_EN and WD_REQ_CHECK_EN | 74 |
| Figure 17. | WD1 state machine | 75 |
| Figure 18. | WD1_RESET & DRIVERS ENABLE versus WD_CNT value. | 76 |
| Figure 19. | Seed generation algorithm block diagram | 77 |
| Figure 20. | Seed selection and elaboration flow | 77 |
| Figure 21. | Answer check generation algorithm block diagram | 77 |
| Figure 22. | WD2 timing diagram | 83 |
| Figure 23. | WD2 diagram | 84 |
| Figure 24. | GSW[8..0] bits. | 90 |
| Figure 25. | SPI timing diagram | 103 |
| Figure 26. | TQFP64 (10x10x1 mm exp. pad down) package outline | 104 |
| Figure 27. | TQFP64 (10x10x1 mm exp. pad down) marking information | 107 |

1 Description

The L9396 is an integrated power management System Basis Chip targeting a large spectrum of automotive electronics applications, in particular ABS, EPS and Transmission, compatible with single (12 V) battery system.

It combines a switched mode power supply for pre-regulation along with 3 independent integrated linear regulators and a powerful configurable regulator for μ C supply that can operate either in buck or linear mode with an external FET.

The device also integrates a 4-channel flexible interface for Wheel Speed Sensor or tracking regulation, 2 configurable pre-drivers for fail safe and motor pump, 1 configurable general purpose outputs, wake-up detection circuitry, advanced fail-safe functionality, watchdog control and system monitoring.

The boost regulator (optionally enabled) is intended to sustain cold cranking pulses, stop & start and weak battery conditions, while the buck pre-regulator drastically improves the power efficiency and CO2 emissions.


Different combinations enable to supply the system microcontroller and external peripheral loads and sensors with wide current ranges and adjustable voltage levels.

In addition, the L9396 provides enhanced system standby functionalities.

2 Overall description

2.1 Block diagram

Figure 1. Block diagram

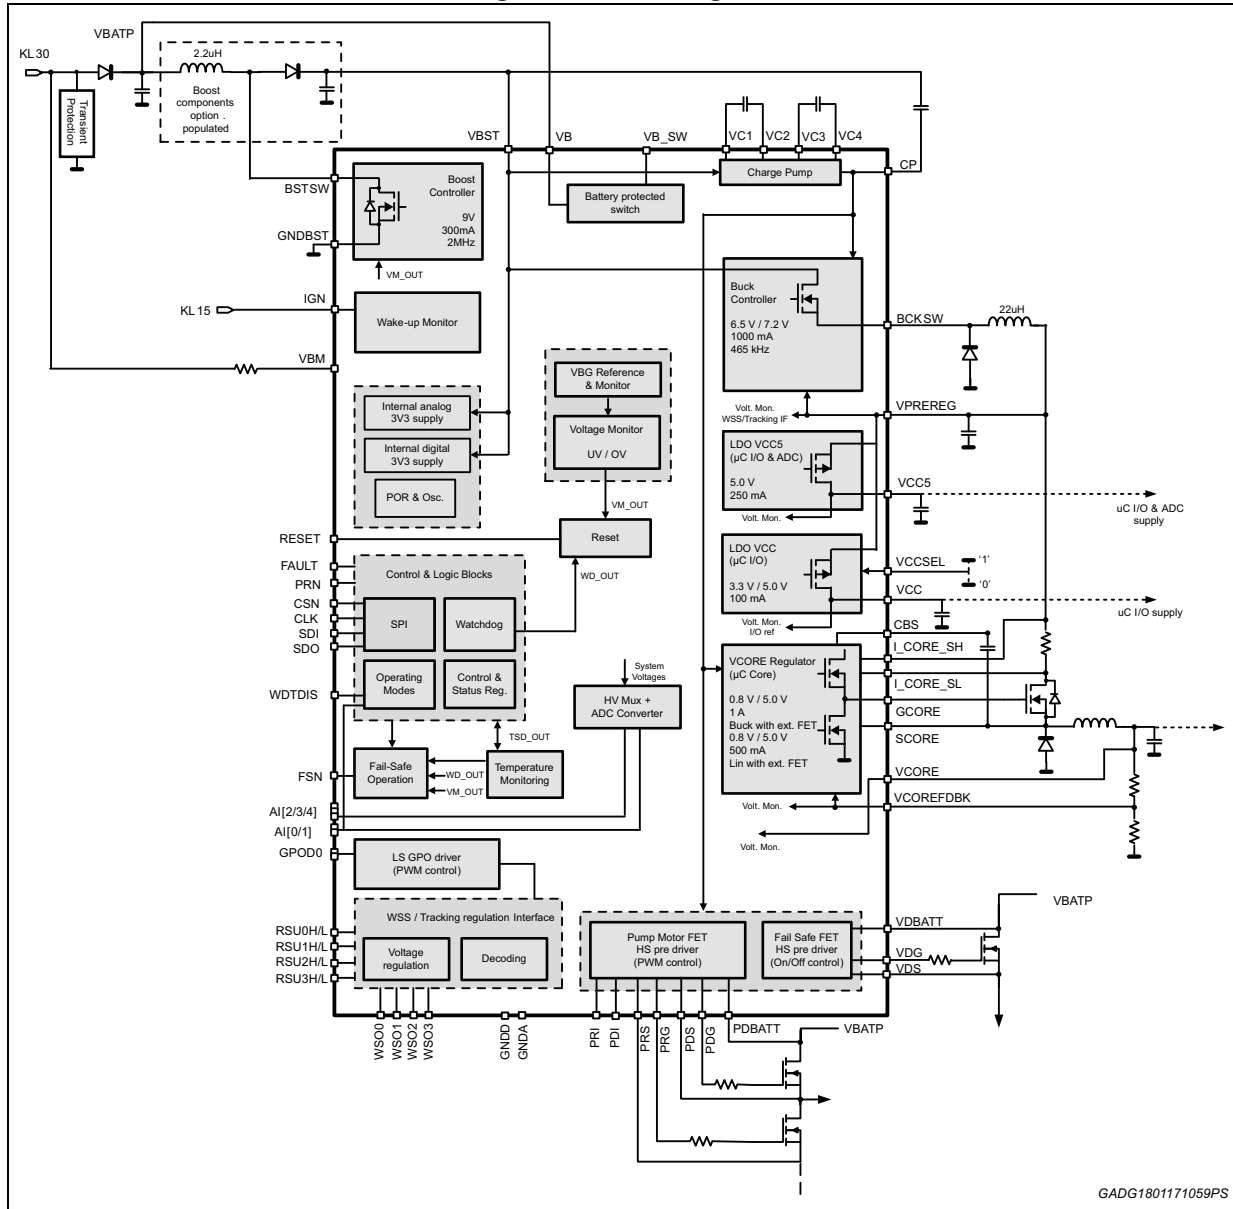

2.2 Pins description

Figure 2. Pins connection diagram (top view)

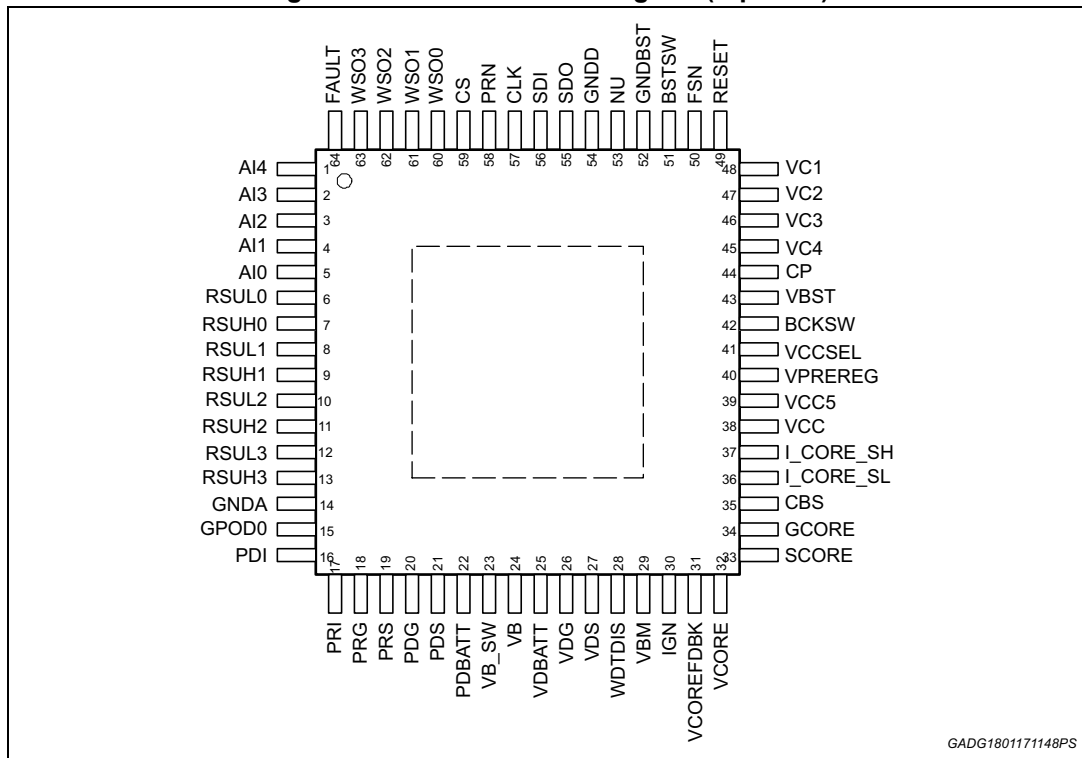


Table 2. Pins description

| Pin | Name | Description | Pin type | |
|-----|-------|----------------------------------|----------|--------|
| 1 | AI4 | Analog input to ADC converter | I | Local |
| 2 | AI3 | Analog input to ADC converter | I | Local |
| 3 | AI2 | Analog input to ADC converter | I | Local |
| 4 | AI1 | Input 1 to select VCORE function | I | Local |
| 5 | AI0 | Input 0 to select VCORE function | I | Local |
| 6 | RSUL0 | WSS ground return | I/O | Global |
| 7 | RSUH0 | WSS / tracking regulated output | I/O | Global |
| 8 | RSUL1 | WSS ground return | I/O | Global |
| 9 | RSUH1 | WSS / tracking regulated output | I/O | Global |
| 10 | RSUL2 | WSS ground return | I/O | Global |
| 11 | RSUH2 | WSS output | I/O | Global |
| 12 | RSUL3 | WSS ground return | I/O | Global |
| 13 | RSUH3 | WSS output | I/O | Global |
| 14 | GNDA | Analog ground | Supply | Local |
| 15 | GPOD0 | GPO driver drain terminal | I/O | Global |

Table 2. Pins description (continued)

| Pin | Name | Description | Pin type | |
|-----|-----------|---|----------|--------|
| 16 | PDI | Motor Pump HS FET control pin | I | Local |
| 17 | PRI | Motor Pump recirculation FET control pin | I | Local |
| 18 | PRG | Motor Pump recirculation FET gate control | O | Local |
| 19 | PRS | Motor Pump recirculation FET source pin | I | Local |
| 20 | PDG | Motor Pump HS FET gate control | O | Local |
| 21 | PDS | Motor Pump HS FET source pin | I | Local |
| 22 | PDBATT | Battery sense for Motor Pump FET pre-driver | I | Global |
| 23 | VB_SW | Battery protected output | I/O | Local |
| 24 | VB | Battery line input | Supply | Global |
| 25 | VDBATT | Battery sense for Fail Safe FET pre-driver | I | Global |
| 26 | VDG | Fail Safe FET gate control | O | Local |
| 27 | VDS | Fail Safe FET source pin | I | Local |
| 28 | WDTDIS | Watchdog disable | I | Local |
| 29 | VBM | Battery sense | I | Local |
| 30 | IGN | Wake up pin for battery connection | I | Global |
| 31 | VCOREFDBK | VCORE voltage feedback | I | Local |
| 32 | VCORE | µC core voltage supply | I | Local |
| 33 | SCORE | Source pin for VCORE regulator external FET | I/O | Local |
| 34 | GCORE | Gate control for VCORE regulator external FET | I/O | Local |
| 35 | CBS | VCORE bootstrap capacitor | I/O | Local |
| 36 | I_CORE_SL | Shunt input for current sensing on VCORE regulator | I | Local |
| 37 | I_CORE_SH | Shunt input for current sensing on VCORE regulator | I | Local |
| 38 | VCC | 3.3 V / 5 V µC I/O supply | Supply | Local |
| 39 | VCC5 | 5 V µC I/O and ADC supply | O | Local |
| 40 | VPREREG | Pre-regulator output | Supply | Local |
| 41 | VCCSEL | Voltage selection for VCC regulator | I | Local |
| 42 | BCKSW | Switched pre-regulator output | I/O | Local |
| 43 | VBST | Device battery line input or boost regulated output | Supply | Global |
| 44 | CP | Charge pump output | Supply | Local |
| 45 | VC4 | Charge pump 2 nd cap high terminal | I/O | Local |
| 46 | VC3 | Charge pump 2 nd cap low terminal | I/O | Local |
| 47 | VC2 | Charge pump 1 st cap high terminal | I/O | Local |
| 48 | VC1 | Charge pump 1 st cap low terminal | I/O | Local |
| 49 | RESET | Reset output pin | O | Local |
| 50 | FSN | Fail safe negated digital output | O | Local |

Table 2. Pins description (continued)

| Pin | Name | Description | Pin type | |
|-----|--------|--|----------|-------|
| | | | | |
| 51 | BSTSW | Switched boost regulator output | I/O | Local |
| 52 | GNDBST | Boost regulator ground | Supply | Local |
| 53 | NU | Not used. To be connected to ground voltage. | I | Local |
| 54 | GNDD | Digital Ground | Supply | Local |
| 55 | SDO | SPI data digital output | O | Local |
| 56 | SDI | SPI data digital input | I | Local |
| 57 | CLK | SPI clock | I | Local |
| 58 | PRN | MCU clock signal | I/O | Local |
| 59 | CS | Chip select digital input | I | Local |
| 60 | WSO0 | WSS pass-through output | O | Local |
| 61 | WSO1 | WSS pass-through output | O | Local |
| 62 | WSO2 | WSS pass-through output | O | Local |
| 63 | WSO3 | WSS pass-through output | O | Local |
| 64 | FAULT | General fault output | O | Local |

2.3 Absolute maximum ratings

Within the maximum ratings, no damage to the component shall occur. Exposure to absolute maximum rated conditions for extended periods may affect device reliability.

All maximum ratings can occur at the same time.

All analog and digital voltages are related to the potential at substrate ground GNDA.

Table 3. Pin absolute maximum ratings

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|---------------------|-----------|-----------|----------|-----|-----------------|------|
| Power Supply | | | | | | |
| ABS_VB | - | - | -0.3 | - | 40 | V |
| ABS_VBST | - | - | -0.3 | - | 40 | V |
| ABS_VBM | - | - | -0.3 | - | 40 | V |
| ABS_VB_SW | - | - | -18 | - | 40 | V |
| ABS_BSTSW | - | - | -0.3 | - | 40 | V |
| ABS_VPREREG | - | - | -0.3 | - | 40 | V |
| ABS_I_CORE_SH | - | - | -0.3 | - | 40 | V |
| ABS_I_CORE_SL | - | - | -0.3 | - | 40 | V |
| ABS_BCKSW | - | - | -1 | - | 40 | V |
| ABS_SCORE | - | - | -1 | - | 40 | V |
| ABS_VC4 | - | - | VBST-0.6 | - | VBST+13 ≤ 51 | V |
| ABS_VC2 | - | - | VBST-0.3 | - | VBST+13 ≤ 51 | V |
| ABS_CP | - | - | VBST-0.3 | - | VBST+13 ≤ 51 | V |
| ABS_VC1 | - | - | -0.3 | - | 40 | V |
| ABS_VC3 | - | - | -0.3 | - | 40 | V |
| ABS_CBS | - | - | -0.3 | - | SCORE+ 20≤40 | V |
| ABS_GCORE | - | - | -0.3 | - | SCORE+ 20≤40 | V |
| ABS_NU | - | - | -0.3 | - | 4.6 | V |
| ABS_VCC5 | - | - | -0.3 | - | 40 | V |
| ABS_VCC | - | - | -0.3 | - | 40 | V |
| ABS_VCOREFDBK | - | - | -0.3 | - | 40 | V |
| ABS_VCORE | - | - | -0.3 | - | 40 | V |
| ABS_VCCSEL | - | - | -0.3 | - | 40 | V |
| ABS_IGN | - | - | -0.3 | - | 40 | V |
| ABS_GNDA | - | - | -0.3 | - | 0.3 | V |
| ABS_GNDD | - | - | -0.3 | - | 0.3 | V |
| ABS_GNDBST | - | - | -0.3 | - | 0.3 | V |

Table 3. Pin absolute maximum ratings (continued)

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|-------------------|-----------|---------------------------------|------|-----|-----------|------|
| Interfaces | | | | | | |
| ABS_VDBATT | - | - | -18 | - | 40 | V |
| ABS_PDBATT | - | - | -18 | - | 40 | V |
| ABS_VDG | - | IC in sleep mode (IGN low) | -0.3 | - | VDS+12≤51 | V |
| | - | IC in operative mode (IGN high) | -18 | - | VDS+12≤51 | V |
| ABS_PDG | - | IC in sleep mode (IGN low) | -0.3 | - | PDS+12≤51 | V |
| | - | IC in operative mode (IGN high) | -18 | - | PDS+12≤51 | V |
| ABS_PRG | - | IC in sleep mode (IGN low) | -0.3 | - | PRS+12≤51 | V |
| | - | IC in operative mode (IGN high) | -18 | - | PRS+12≤51 | V |
| ABS_VDS | - | IC in sleep mode (IGN low) | -0.3 | - | 40 | V |
| | - | IC in operative mode (IGN high) | -18 | - | 40 | V |
| ABS_PDS | - | IC in sleep mode (IGN low) | -0.3 | - | 40 | V |
| | - | IC in operative mode (IGN high) | -18 | - | 40 | V |
| ABS_PRS | - | IC in sleep mode (IGN low) | -0.3 | - | 40 | V |
| | - | IC in operative mode (IGN high) | -18 | - | 40 | V |

Table 3. Pin absolute maximum ratings (continued)

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|---|-----------|-----------|------|-----|-------|------|
| ABS_WDTDIS | - | - | -0.3 | - | 7 | V |
| ABS_AI0 | - | - | -0.3 | - | 40 | V |
| ABS_AI1 | - | - | -0.3 | - | 40 | V |
| ABS_AI2 | - | - | -0.3 | - | 40 | V |
| ABS_AI3 | - | - | -0.3 | - | 40 | V |
| ABS_AI4 | - | - | -0.3 | - | 40 | V |
| ABS_FSN | - | - | -0.3 | - | 40 | V |
| ABS_FAULT | - | - | -0.3 | - | 40 | V |
| ABS_PRN | - | - | -0.3 | - | 40 | V |
| ABS_RESET | - | - | -0.3 | - | 40 | V |
| ABS_WSO0 | - | - | -0.3 | - | 40 | V |
| ABS_WSO1 | - | - | -0.3 | - | 40 | V |
| ABS_WSO2 | - | - | -0.3 | - | 40 | V |
| ABS_WSO3 | - | - | -0.3 | - | 40 | V |
| ABS_CS | - | - | -0.3 | - | 40 | V |
| ABS_CLK | - | - | -0.3 | - | 40 | V |
| ABS_SDI | - | - | -0.3 | - | 40 | V |
| ABS_SDO | - | - | -0.3 | - | 40 | V |
| ABS_PRI | - | - | -0.3 | - | 40 | V |
| ABS_PDI | - | - | -0.3 | - | 40 | V |
| ABS_GPOD0 | - | - | -18 | - | 40 | V |
| ABS_RSUH0 | - | - | -18 | - | 40 | V |
| ABS_RSUH1 | - | - | -18 | - | 40 | V |
| ABS_RSUH2 | - | - | -18 | - | 40 | V |
| ABS_RSUH3 | - | - | -18 | - | 40 | V |
| ABS_RSUL0 | - | - | -18 | - | 40 | V |
| ABS_RSUL1 | - | - | -18 | - | 40 | V |
| ABS_RSUL2 | - | - | -18 | - | 40 | V |
| ABS_RSUL3 | - | - | -18 | - | 40 | V |
| ESD requirements | | | | | | |
| ESD according to the Human Body Model (HBM), Q100-002 for global pins; (100pF/1.5kΩ) | - | - | - | - | ±4000 | V |
| ESD according to the Human Body Model (HBM), Q100-002 for all other pins; (100pF/1,5kΩ) | - | - | - | - | ±2000 | V |

Table 3. Pin absolute maximum ratings (continued)

| Symbol | Parameter | Condition | Min | Typ | Max | Unit |
|---|--|--|-----|-----|------|------|
| ESD according to the Charged Device Model (CDM), Q100-011 Corner pins | - | - | - | - | ±750 | V |
| ESD according to the Charged Device Model (CDM), Q100-011 Non-corner pins | - | - | - | - | ±500 | V |
| Temperature requirements | | | | | | |
| T_a | - | - | -40 | - | 135 | °C |
| $T_{storage}$ | - | - | -55 | - | 150 | °C |
| T_j | - | - | -40 | - | 175 | °C |
| $R_{th\ j-a}$ | Thermal resistance junction to ambient | With 2s2p PCB std Jedec. Natural convection. Standard Jedec best JESD51-7 | - | 26 | - | °C/W |
| $R_{th\ j-c}$ | Thermal resistance junction to case | Bottom cold plate in contact with package bottom case (e-pad side). JESD51 best practice guidelines. | - | - | 2.9 | °C/W |

2.4 Operating range

Within the operating ratings the part operates as specified and without parameter deviations. Once taken beyond the operative ratings and returned back within, the part will recover with no damage or degradation.

Additional supply voltage and temperature conditions are given separately at the beginning of each specification table.

Table 4. Pin operating range

| Pin name | Condition | Min | Max | Unit |
|--------------------------------------|-----------|------|-----|------|
| Power supply | | | | |
| VB, VBST, VBM | - | -0.1 | 19 | V |
| VB_SW | - | -1 | 19 | V |
| BSTSW, VPREREG, I_CORE_SH, I_CORE_SL | - | -0.1 | 19 | V |

Table 4. Pin operating range (continued)

| Pin name | Condition | Min | Max | Unit |
|--|---------------------------------|----------|---------|------|
| BCKSW, SCORE | - | -1 | 19 | V |
| VC4 | - | VBST-0.6 | VBST+10 | V |
| VC2, CP | - | VBST-0.3 | VBST+10 | V |
| VC1, VC3 | - | -0.1 | 19 | V |
| CBS, GCORE | - | -0.1 | SCORE+8 | V |
| VCC5, VCC, VCOREFDBK, VCORE | - | -0.1 | 5.5 | V |
| VCCSEL, IGN | - | -0.1 | 19 | V |
| GND _A , GND _D , GND _{BST} , <u>NU</u> | - | -0.1 | 0.1 | V |
| Interfaces | | | | |
| VDBATT, PDBATT | - | -0.1 | 19 | V |
| VDG | IC in sleep mode (IGN low) | -0.3 | VDS+10 | V |
| | IC in operative mode (IGN high) | -7 | VDS+10 | V |
| PDG | IC in sleep mode (IGN low) | -0.3 | PDS+10 | V |
| | IC in operative mode (IGN high) | -7 | PDS+10 | V |
| PRG | IC in sleep mode (IGN low) | -0.3 | PRS+10 | V |
| | IC in operative mode (IGN high) | -7 | PRS+10 | V |
| VDS, PDS, PRS | IC in sleep mode (IGN low) | -0.3 | 19 | V |
| | IC in operative mode (IGN high) | -7 | 19 | V |
| WDTDIS | - | -0.1 | 5.5 | V |
| AI[0..4] | - | -0.1 | 19 | V |
| FSN, FAULT, PRN, RESET, WSO[0..3] | - | -0.1 | 5.5 | V |
| CS, CLK, SDI, SDO, PRI, PDI | - | -0.1 | 5.5 | V |
| RSUH/L[0..3], GPOD0 | - | -0.1 | 19 | V |

3 Power supply

3.1 Battery range

The device operates on 12 V system. Transient operation for these systems can reach 40 V maximum. Particular care is to be taken in PCB manufacturing to keep thermal dissipation to a reasonable level.

All electrical characteristics are valid for the following conditions unless otherwise noted:

$$-40\text{ °C} \leq T_j \leq +175\text{ °C}.$$

Table 5. Configuration and control DC specifications

| Symbol | Parameter | Conditions / Comments | Min | Typ | Max | Unit |
|-------------------------|--|-----------------------|------------------------|-----|-----|------|
| VBATP _{NOV_OB} | Normal Operating Voltage without boost | Design Info | 6 | 13 | 19 | V |
| VBATP _{NOV_WB} | Normal Operating Voltage with boost | Design Info | 4.5 (6 to start-up) | - | 19 | V |

3.2 Boost regulator


The boost regulator can be enabled or disabled via SPI depending on the needs of the application with respect to the operating battery level. It features an integrated power stage and operates at 2 MHz to allow the use of external low cost 2.2 μH inductor. The current capability should be enough to grant full I/O pin supply and minimal μC operation.

When not used, BSTSW pin can be connected to ground and VBST directly to the protected battery line. The device enables or keeps disabled the boost converter at start-up depending on the external circuitry: if BSTSW pin is shorted to ground, the boost is disabled at power up and kept disabled; in case the BSTSW experiences a high voltage at power up, given by battery connection through the inductor, the boost is enabled. This condition is reported via SPI with bit BOOST_KEPT_OFF of SUPPLY_CONTROL_2 register (it means that boost has been kept off and will not operate).

Boost converter diagnostics include under voltage, reported via SPI and FAULT pin (if the regulator is enabled). The integrated FET featuring the boost switch is protected against short to battery by means of a thermal shutdown circuit. When thermal fault is detected the FET is switched off and latched in this state until the related fault flag is read. In case of loss of ground the FET is switched off and automatically reactivated as soon as ground connection is restored. Over-voltage protection from load-dump and inductive flyback is provided via an active clamp and a disable circuitry. A dedicated circuitry is implemented to keep the boost off at start-up till the voltage difference between VB and VBST pins is lower than BST_DISABLETH in order to reduce in-rush current and diagnose VBST pin loss condition or diode loss. An SPI bit is present to report output of this comparator (bit BOOST_READY of SUPPLY_CONTROL_2 register goes high when $\text{VBST} \geq \text{VB} - \text{BST_DISABLETH}$).

State of boost regulator is reported via SPI bit BOOST_ON_FLAG in register SUPPLY_CONTROL_2. In case boost is disabled due to diagnostic or battery voltage above output regulation voltage this bit is cleared to 0.

Figure 3. Boost regulator block diagram

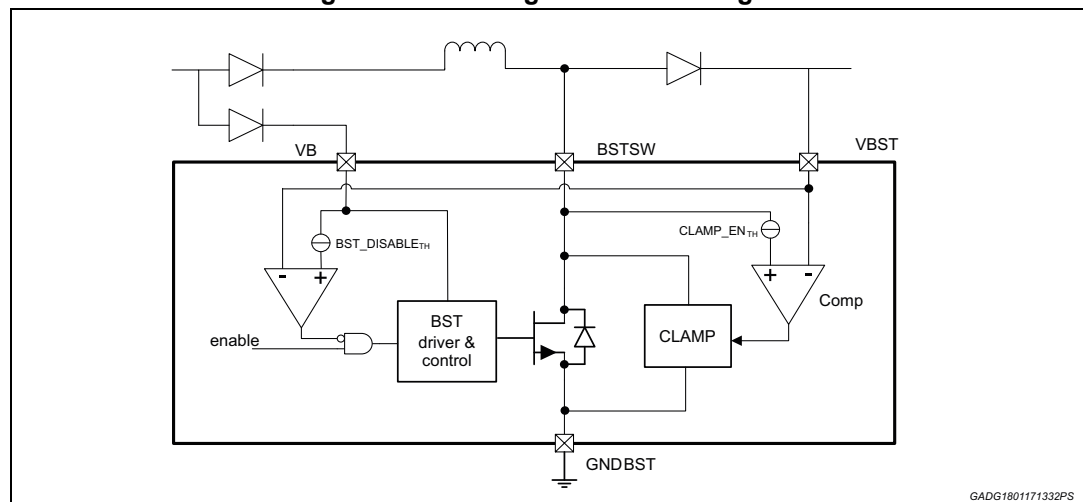

All electrical characteristics are valid for the following conditions unless otherwise noted:
 $-40\text{ }^{\circ}\text{C} \leq T_j \leq +175\text{ }^{\circ}\text{C}$; $4.5\text{ V} \leq \text{VBATP} \leq 19\text{ V}$

Table 6. Boost regulator electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------------------|--|--|------|-----|-----|---------------|
| VBST_{NOV} | Normal Operating Voltage at VBST | Design Info With boost, VBST is more than minimum boost output ($> 6\text{ V}$); Without boost, VBST is shorted to VBATP | 6 | 13 | 19 | V |
| $\text{VBST}_{\text{UV_UP}}$ | VBST under voltage release threshold | VBST rising. VBST under-voltage release leads to charge pump switch on | 6.5 | - | 7.1 | V |
| $\text{VBST}_{\text{UV_DN}}$ | VBST under voltage detection threshold | VBST falling. VBST under-voltage detection leads to charge pump shut down. | 5.6 | - | 6 | V |
| $t_{\text{fit_VBST_UV}}$ | Under voltage filter time | - | - | 12 | - | μs |
| VBST | Boost Output Voltage | Across all line and load (steady state) | 8.55 | - | 9.6 | V |
| $I_{\text{O_BST}}$ | Boost Output Current | Excluding current on analog and digital 3.3V | 20 | - | 300 | mA |
| $dV_{\text{SR_ac}}$ | Line Transient Response | All line, load; $dt = 100\text{ }\mu\text{s}$ | -8% | - | 8% | % |
| $dV_{\text{LR_ac}}$ | Load Transient Response | All line, load; $dt = 100\text{ }\mu\text{s}$ | -8% | - | 8% | % |
| L_{BST} | Output Inductance | 2.2 μH nominal tolerance $\pm 30\%$ Design Information | 1.6 | - | 2.8 | μH |
| R_{LBST} | Output Inductance Impedance | Design Information | - | - | 0.1 | Ω |
| C_{BST} | Output Bulk Capacitance | Design Information | 1.76 | - | - | μF |
| R_{BST} | Bulk Capacitor ESR | Design Information | - | - | 0.1 | Ω |
| C_{BSTF} | Output Filter Capacitance | Min 100 nF nominal Design Information | 80 | - | - | nF |
| I_{OC} | Over Current Detection | - | 1.2 | - | 2 | A |
| R_{DSon} | Switch R_{DSon} | - | - | - | 0.8 | Ω |

Table 6. Boost regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------------|--|--|-----|------------------------|-----|------|
| V_{BSTSW} | BSTSW Voltage Clamp | Active when not in load dump ($V_{BLOADDUMP}$) | 30 | - | 36 | V |
| $BST_DISABLE_{TH}$ | Voltage difference between VB and VBST to deactivate the Boost regulator | $VB - VBST$ | 1.6 | - | 2.6 | V |
| $CLAMP_EN_{TH}$ | Voltage difference between BSTSW and VBST to activate the Boost CLAMP | $BSTSW - VBST$ | 1.5 | - | 4.5 | V |
| f_{BSTSW} | Operating Frequency | - | - | $f_{OSCINT}/8.5(1.88)$ | - | MHz |
| t_{BSTSW} | BSTSW Transition Time | $VB = 4.5 V$, $I_{O_BST} = 300 mA$ | 8 | - | 50 | ns |
| T_{JSDBST} | Thermal Shutdown | - | 175 | - | 200 | °C |
| T_{HYS_TSDBST} | Thermal Shutdown hysteresis | - | 5 | - | 15 | °C |
| $I_{BSTSW_LO_OFF}$ | BSTSW current consumption when BOOST is OFF | $BSTSW - VBST < 1.5V$ | 3 | - | 20 | μA |
| $I_{BSTSW_HI_OFF}$ | BSTSW current consumption when BOOST is OFF | $BSTSW - VBST > 4.5V$ | 30 | - | 70 | μA |
| $V_{TH_BST_KEEP_OFF}$ | Voltage threshold to deactivate the Boost regulator when not used | - | 0.5 | - | 1 | V |

3.3 Internal supply

The internal analog and digital part is supplied by the supply voltage VBST through integrated voltage regulators. The generated voltage is monitored. In case of under/over-voltage, the device performs a power on reset (POR).

An undervoltage condition on VBST will lead to an internal reset of the IC. Above this undervoltage threshold, full functionality is granted.

The device integrates two separated instances of Bandgap voltage regulators; one of these bandgaps is used as voltage reference for the internal regulators, while the other one is used for monitoring the voltage levels.

GNDD ground line is protected against ground loss scenarios. In case GNDD line would be at least $GNDD_{OPEN}$ above the reference ground line GNDA, a POR is asserted.

GNDD is used for digital logic and charge pump while GNDA is used for analog blocks. GNDBST is used for boost regulator only.

The device returns to normal operation with full functionality as soon as the POR is released.

Table 7. Internal supply electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------------|---|------------|------|-----|------|------|
| GNDD _{OPEN} | GNDD threshold | GNDx = 0 | 180 | 300 | 420 | mV |
| T _{FLT_GNDD_OPEN} | GNDD Open deglitch filter time | - | - | 10 | - | μs |
| GNDBST _{OPEN} | GNDBST threshold | GNDx=0 | 200 | 300 | 400 | mV |
| GNDBST _{PU} | GNDBST pull-up current | Boost OFF | 50 | - | 200 | μA |
| T _{FLT_GNDBST_OPEN} | GNDBST Open deglitch filter time | - | 7.5 | - | 11 | μs |
| VDD | VDD Output Voltage | - | 3.15 | 3.3 | 3.4 | V |
| VDD _{OV} | VDD Over-voltage threshold | - | 3.47 | - | 3.7 | V |
| VDD _{UV} | VDD Under-voltage threshold | - | 2.7 | - | 2.9 | V |
| T _{FLT_VDD_OV_UV} | VDD Over-voltage / Under-voltage deglitch filter time | - | - | 10 | - | μs |
| VINTA | VINTA Output Voltage | - | 3.2 | 3.3 | 3.4 | V |
| VINTA _{OV} | VINTA Over-voltage threshold | - | 3.47 | - | 3.7 | V |
| VINTA _{UV} | VINTA Under-voltage threshold | - | 2.95 | - | 3.13 | V |
| T _{FLT_VINTA_OV_UV} | VINTA Over-voltage / Under-voltage deglitch filter time | - | - | 10 | - | μs |

3.4 Wake-up input

The input pin IGN can be used as a wake up source connection. In case the voltage on IGN pin raises above WAKE_{high_th} for an interval longer than WAKE_{flt_up}, the device wakes up. The device moves to sleep in case IGN falls below WAKE_{high_th} - WAKE_{hys} for an interval longer than WAKE_{flt_down}. This input can be connected to ignition battery switches or transceiver inhibit outputs. A filter time is implemented to reject spurious glitches. The filter time is started when the input signal exceeds the specified threshold.

All electrical characteristics are valid for the following conditions unless otherwise noted:

-40 °C ≤ T_j ≤ +175 °C; 4.5 V ≤ VBATP ≤ 19 V.

Table 8. Wake-up input electrical characteristics


| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------|-------------------------------------|--|-----|-----|-----|------------|
| VB_{stby_cur} | Battery standby current consumption | VBATP = 19 V Wake disable Sum of leakage currents from BSTSW, VBST, VB and VBM | - | - | 30 | μA |
| $WAKE_{high_th}$ | Wake-up high voltage threshold | - | 3.5 | - | - | V |
| $WAKE_{low_th}$ | Wake-up low voltage threshold | - | - | - | 1.5 | V |
| $WAKE_{hys}$ | Wake-up voltage hysteresis | - | 0.5 | - | 1.5 | V |
| $WAKE_{pd}$ | Wake-up pull down | IGN = 14 V | 300 | - | 900 | k Ω |
| $WAKE_{flt_up}$ | Wake up ON deglitch | - | - | 10 | - | μs |
| $WAKE_{flt_down}$ | Wake up OFF deglitch | - | - | 10 | - | μs |
| KA_period | Keep-alive period | - | - | 200 | - | ms |

3.5 Charge pump

A two-stage charge pump is integrated to supply the high voltage circuit in the VPREREG and VCORE regulators and in the pump motor and fail safe pre-drivers.

The charge pump is supplied by the rail connected to VBST pin. External charging capacitors are used to achieve a high current capability.

Figure 4. Charge pump block diagram

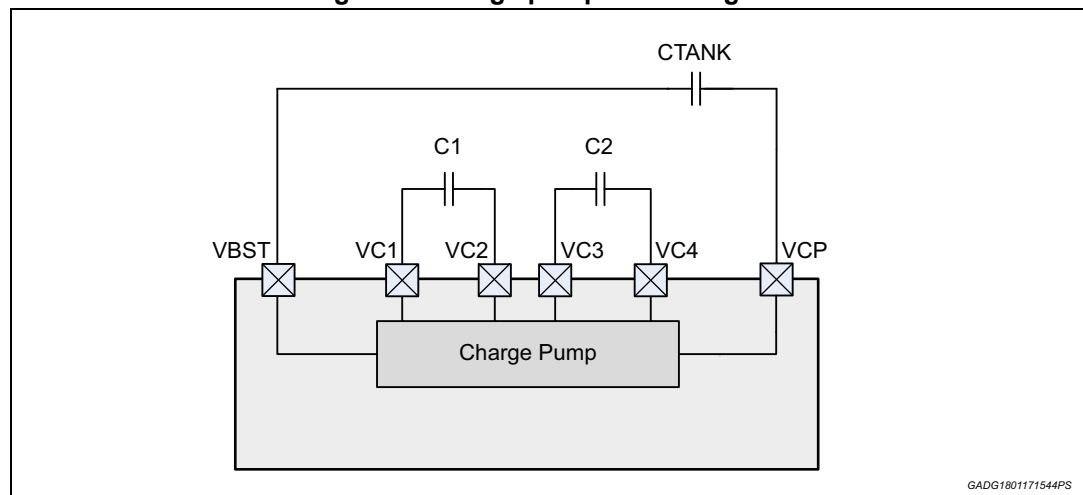

It features a current limitation protection when either C1 or C2 is being charged up. The charge pump is protected against over temperature with dedicated thermal sensor. In standby mode the charge pump is disabled.

In case the CP output voltage remains too low for longer than t_{fCP} the CP LOW bit is latched, which leads to shutdown of VPREREG, pump motor driver and fail safe driver. In turn, under voltage of VPREREG leads to shutdown of VCC, VCC5 and VCORE regulators.

A second undervoltage threshold is present (V_{CPLOW2}) with a higher value. It can be used together with PDG turn-on threshold voltage to detect that low charge pump voltage is responsible for low PDG ON voltage.

Table 9. Charge pump electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------|--|----------------------------------|-----------|------------------------|-----------|--------------|
| V_{CP_5V6} | Charge pump output voltage | VBST > 5.6 V Iload_ext = 8 mA | VBST+7.0 | - | VBST+11 | V |
| V_{CP_8V} | Charge pump output voltage | VBST > 8V Iload_ext=10mA | VBST+8.9 | - | VBST+11 | V |
| V_{CP_8V55} | Charge pump output voltage | VBST > 8.55V Iload_ext=1mA | VBST+9.1 | - | VBST+11 | V |
| I_{CP_5V6} | Charge pump output current | VBST > 5.6V | - | - | 8 | mA |
| I_{CP_8V} | Charge pump output current | VBST > 8V | - | - | 10 | mA |
| f_{CP} | Charge pump frequency | - | - | $f_{OSCINT}/34(0.470)$ | - | MHz |
| V_{CPLOW} | Charge pump low voltage threshold | - | VBST+5.6 | VBST+6 | VBST+6.8 | V |
| V_{CPLOW2} | Charge pump second low voltage threshold | - | VBST+7.85 | VBST+8.35 | VBST+8.85 | V |
| t_{fCP} | Low voltage filter time | - | - | 10 | - | μ s |
| C_{TANK} | Output capacitor | Design Info | - | 220 | - | nF |
| C_{CP1}, C_{CP2} | Switching capacitor | Design Info | - | 68 | - | nF |
| T_{JSDCP} | Thermal Shutdown | - | 175 | - | 200 | $^{\circ}$ C |
| T_{HYS_TSDCP} | Thermal Shutdown hysteresis | - | 5 | - | 15 | $^{\circ}$ C |

3.6 VPREREG buck regulator

The integrated buck regulator provides a reduced voltage supply to the remaining regulators and to the WSS / tracking interface. Its default output level 6.5 V can be further increased to 7.2 V via register of BUCK VOLTAGE SELECTION in SPI.

This regulator is protected against short circuits and over temperature with dedicated thermal sensor, and an over/under voltage monitor is implemented. VPREREG itself is not shut down in case of over/under voltage at its output. VPREREG itself is not shut down in case of overcurrent, only in case of over temperature the regulator is switched off.

This regulator is not protected against diode loss and the IC may be irreparably damaged due to diode loss.

Under voltage of VPREREG (VPREREG_UV) leads to shutdown of VCC, VCC5 and VCORE regulators.

All electrical characteristics are valid for the following conditions unless otherwise noted:
 $-40\text{ °C} \leq T_j \leq +175\text{ °C}$; $6 \leq V_{BST} \leq 19\text{ V}$.

Table 10. VPREREG buck regulator

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------|-----------------------------|--|-----------------------|----------------------------|------------------------|---------------|
| V_{PREREG_H} | Output Voltage | $V_{BST} > 8.2\text{ V}$ | 6.984 | 7.2 | 7.416 | V |
| V_{PREREG_L} | Output Voltage | $V_{BST} > 7.5\text{ V}$ | 6.305 | 6.5 | 6.695 | V |
| V_{PREREG_UV} | Under voltage threshold | - | 5.05 | 5.21 | 5.32 | V |
| $t_{fit_VPREREG_UV}$ | Under voltage filter time | - | - | 12 | - | μs |
| V_{PREREG_OV} | Over voltage threshold | - | $V_{PREREG_X} + 5\%$ | - | $V_{PREREG_X} + 10\%$ | V |
| $t_{fit_VPREREG_OV}$ | Over voltage filter time | - | - | 12 | - | μs |
| $I_{VPREREG_HI}$ | Output load current | $\text{SYS_CONFIG_1}[9]=1$ | 0.01 | - | 1 | A |
| $I_{VPREREG_LO}$ | Output load current | $\text{SYS_CONFIG_1}[9]=0$ (default) | 0.01 | - | 0.5 | A |
| $L_{VPREREG}$ | Buck inductor | - | 17.6 | 22 | 26.4 | μH |
| $C_{VPREREG}$ | Output capacitor | - | 14.3 | 22 | 29.7 | μF |
| dV_{SR_ac} | Line Transient Response | All line, load; $dt = 10\text{ }\mu\text{s}$ $V_{BST} > V_{PREREG}(\text{Typ}) + 3\text{V}$ | -8% | - | 8% | % |
| dV_{LR_ac} | Load Transient Response | All line, load; $dt = 10\text{ }\mu\text{s}$ $V_{BST} > V_{PREREG}(\text{Typ}) + 3\text{V}$ | -8% | - | 8% | % |
| $I_{OC_VPREREG_HI}$ | High Over current detection | $\text{SYS_CONFIG_1}[9]=1$ | 1.8 | - | 3 | A |
| $I_{OC_VPREREG_LO}$ | Low Over current detection | $\text{SYS_CONFIG_1}[9]=0$ (default) | 0.9 | - | 1.6 | A |
| - | High side t_{on} | - | - | - | 40 | ns |
| - | High side t_{off} | - | - | - | 40 | ns |
| $F_{V_preregsw}$ | Operating Frequency | - | - | $f_{OSCINT}/34$ (0.470) | - | MHz |
| R_{DSon} | High side R_{ds_ON} | $T_j = 25\text{ °C}$ | - | - | 0.4 | Ω |
| | | $T_j = 175\text{ °C}$ | - | - | 0.44 | Ω |
| $t_{softstart}$ | Softstart time | From 10% to 90% of nominal output voltage | 130 | - | 390 | μs |


Table 10. VPREREG buck regulator (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------------|-----------------------------|------------|-----|-----|-----|------|
| $T_{JSDVPRE}$ | Thermal Shutdown | - | 175 | - | 200 | °C |
| $T_{HYS_TSDVPRE}$ | Thermal Shutdown hysteresis | - | 5 | - | 15 | °C |

3.7 VCORE regulator

This regulator provides the supply to the μC core. The flexible approach with the external voltage divider allows the rail to be regulated from 0.8 V to 5 V. It can also be configured either as a buck controller or as a linear controller, driving an external FET in both cases.

Figure 5. VCORE configuration diagram (buck regulator - top, linear regulator - bottom)

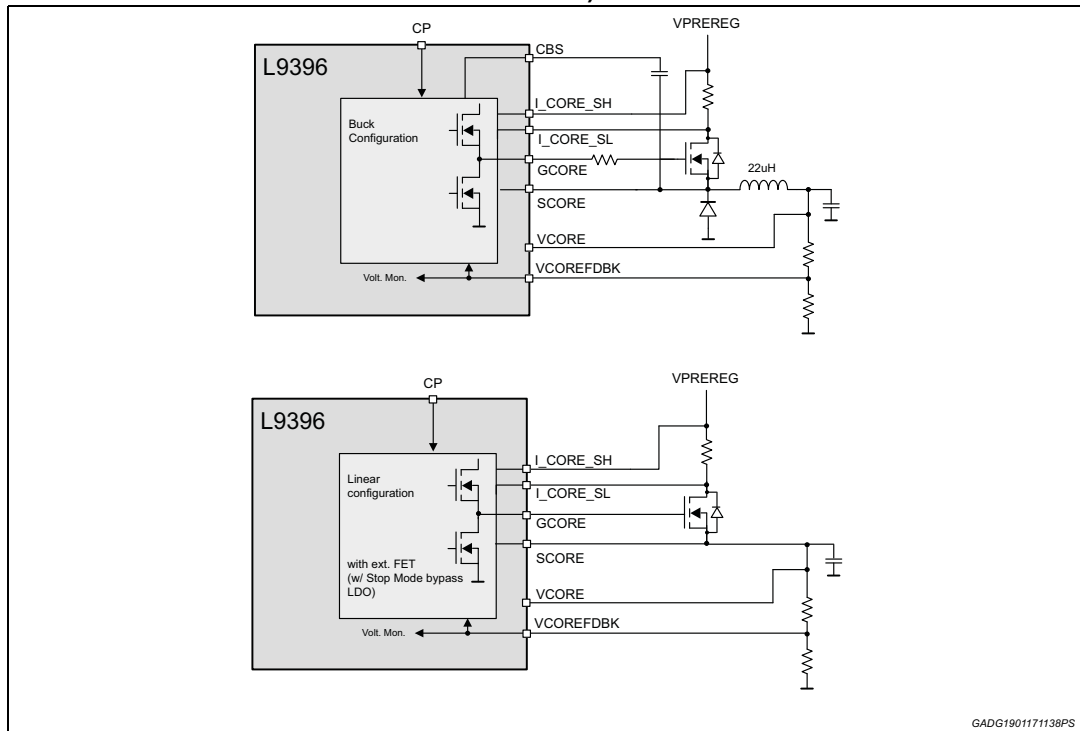

Typically 2.2 Ω resistor is to be inserted between GCORE pin and gate of the external FET for buck configuration. For buck configuration, the source of the external FET should be connected to the SCORE pin, and the output tank capacitor should be connected to the VCORE pin. For linear configuration, the output tank capacitor should be connected with the source of the external FET and the SCORE pin, while VCORE pin could be left either floating, tied to ground or still connected to VCORE to allow ADC internal measurement.

The VCORE regulator has over and under voltage detections and the VCORE is not shut down in case of over or under voltage. It is also protected against short to ground by monitoring regulation loop for VCORE buck or over current for VCORE linear. When short to ground is detected and lasts more than the filter time of $t_{flt_oc_vcore}$, the vcore is shut down and the restart is automatic in $t_{flt_restart}$. No thermal protection is implemented for VCORE because the power MOS is external.

Both VPREREG and VCORE regulators could be disabled by connecting I_CORE_SH pin to ground or leaving it open. In this case, VPREREG pin should be connected to VBST pin.

Moreover two pins (AI0 and AI1) are used to configure additional features of VCORE regulator. It's possible to disable only VCORE regulator leaving VPREREG enabled. It's possible to change the monitor of regulated voltage (monitor on VCORE pin or monitor on VCOREFDBK pin). All the possibilities are listed in the following table.

Table 11. Vcore configuration

| AI0 | AI1 | I_CORE_SH | VCORE state | VPREREG state | VCORE monitor |
|------------|------------|-----------|-------------|---------------|-------------------------------|
| Low | Low | High | Enabled | Enabled | VCORE_UV_L, VCORE_OV_L |
| Low | High | High | Enabled | Enabled | VCORE_UV_H, VCORE_OV_H |
| High | Low | High | Enabled | Enabled | VCOREFDBK_UV, VCOREFDBK_OV |
| High | High | High | Disabled | Enabled | Disabled |
| Don't care | Don't care | Low | Disabled | Disabled | Disabled |

The state of configuration pins (AI0, AI1 and I_CORE_SH) is latched at power up when VPREREG voltage exceeds the V_{PREREG_UV} threshold and stays latched until next POR event.

Microcontroller can monitor the voltage of AI0 and AI1 pins using embedded ADC converter and latched configuration is available via SPI bits.

All electrical characteristics are valid for the following conditions unless otherwise noted:

$$-40\text{ }^{\circ}\text{C} \leq T_j \leq +175\text{ }^{\circ}\text{C}; V_{PREREG_L}(\text{Min}) \leq V_{PREREG} \leq V_{PREREG_H}(\text{Max}).$$

Table 12. VCORE regulator electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------------|-----------------------------------|---|-----------------|-----|-----------------|------|
| R _{SH_HI_CURR} | Shunt resistor high current | - | 99 | 100 | 101 | mΩ |
| R _{SH_LO_CURR} | Shunt resistor low current | Only in linear mode | 327 | 330 | 333 | mΩ |
| VCORE_FDBK_RES | Feedback resistor range | - | 10 | - | 100 | kΩ |
| VCOREFDBK_UV | Undervoltage threshold | Excluding external voltage divider accuracy | VCOREFDBK - 10% | - | VCOREFDBK - 5% | V |
| VCOREFDBK_OV | Overvoltage threshold | Excluding external voltage divider accuracy | VCOREFDBK + 5% | - | VCOREFDBK + 10% | V |
| VCORE_UV_L | VCORE low Undervoltage threshold | - | 2.97 | - | 3.135 | V |
| VCORE_OV_L | VCORE low Overvoltage threshold | - | 3.465 | - | 3.63 | V |
| VCORE_UV_H | VCORE high Undervoltage threshold | - | 4.5 | - | 4.75 | V |

Table 12. VCORE regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------------------------------|-----------------------------------|---|-------|-----|------|---------|
| VCORE_OV_H | VCORE high Overvoltage threshold | - | 5.25 | - | 5.5 | V |
| $t_{fit_VCORE_VCOREFDBK_UVOV}$ | Under/overvoltage filter time | - | - | 12 | - | μ s |
| VICORESH_IH | I_CORE_SH input high voltage | - | 1.75 | - | - | V |
| VICORESH_IL | I_CORE_SH input low voltage | - | - | - | 0.75 | V |
| VICORESH_lhys | I_CORE_SH input hysteresis | - | 100 | - | 1000 | mV |
| l _{pd_ICORESH_L} | I_CORE_SH input Pull down current | VCORE linear mode, I_CORE_SH=3.3V | 5 | - | 20 | μ A |
| l _{pd_ICORESH_B} | I_CORE_SH input Pull down current | VCORE buck mode, I_CORE_SH=3.3V | 100 | - | 300 | μ A |
| V_AI0_IH | AI0 input high voltage | - | 1.75 | - | - | V |
| V_AI0_IL | AI0 input low voltage | - | - | - | 0.75 | V |
| V_AI0_lhys | AI0 input hysteresis | - | 100 | - | 1000 | mV |
| l _{pd_AI0} | AI0 input Pull down current | AI0=3.3V | 10 | - | 100 | μ A |
| V_AI1_IH | AI1 input high voltage | - | 1.75 | - | - | V |
| V_AI1_IL | AI1 input low voltage | - | - | - | 0.75 | V |
| V_AI1_lhys | AI1 input hysteresis | - | 100 | - | 1000 | mV |
| l _{pd_AI1} | AI1 input Pull down current | AI1 = 3.3 V | 10 | - | 100 | μ A |
| $t_{softstart}$ | Softstart time | From 10% to 90% of nominal output voltage | 240 | - | 720 | μ s |
| Buck configuration | | | | | | |
| VCORE | Output voltage | Nominal 0.8V to 5V Excluding external voltage divider accuracy | 0.776 | - | 5.15 | V |
| I _{VCORE} | Output load current | R _{SH_HI_CURR} | 0.01 | - | 1 | A |
| C _{VCORE} | Output capacitor | VCORE > 1.2 V | -35% | 22 | +35% | μ F |
| C _{VCORE} | Output capacitor | VCORE ≤ 1.2V | -35% | 47 | +35% | μ F |

Table 12. V_{CORE} regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|---|--|---------|---------------------------------|---------|------|
| L _{V_{CORE}} | Buck inductor | V _{CORE} > 1.2 V | -20% | 22 | +20% | μH |
| L _{V_{CORE}} | Buck inductor | V _{CORE} ≤ 1.2 V | -20% | 12 | +20% | μH |
| R _{L_{V_{CORE}}} | Buck inductor resistance | - | - | - | 105 | mΩ |
| C _{FET} | External FET gate charge | - | - | - | 30 | nC |
| C _{BS} | Bootstrap capacitor | - | - | 100 | - | nF |
| V _{COREFDBK} | Feedback voltage | Excluding external voltage divider accuracy | 0.8 -3% | - | 0.8 +3% | V |
| dV _{SR_ac} | Line Transient Response | All line, load; dt = 10 μs | -8% | - | 8% | % |
| dV _{LR_ac} | Load Transient Response | All line, load; dt = 10 μs | -8% | - | 8% | % |
| V _{CORE} ripple | Ripple voltage | - | -20 | - | +20 | mV |
| I _{OC_V_{CORE}_BUCK} | Over current detection | R _{SH_HI_CURR} | 1.6 | - | 2.6 | A |
| R _{dson_hs} | High side on resistance | - | - | - | 28 | Ω |
| R _{dson_ls} | Low side on resistance | - | - | - | 8.3 | Ω |
| t _{flt_oc_vcore} | Shut down filter time for short to ground | Filter time starts to count from when current in power MOS is more than I _{O_LIM} | 85 | 100 | 115 | μs |
| t _{flt_restart} | restart filter time for short to ground | Filter time starts to count from when core buck is disabled | 1.7 | 2 | 2.3 | ms |
| Sw_fr | Switching frequency | - | - | f _{OSCINT} /34 (0.470) | - | MHz |
| PSRR | Power supply rejection ratio | V _{PREREG} = 6.5 V, V _{noise} = 1 V _{pp} f _{noise} = 20 kHz, C _{V_{CORE}} = 22 μF L _{V_{CORE}} = 22 μH | 40 | - | - | dB |

Table 12. VCORE regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---|---|---|-----------|-----|------------|------|
| Linear configuration | | | | | | |
| V _{CORE} | Output voltage | Nominal 0.8 V to 5 V Excluding external voltage divider accuracy | 0.78 | - | 5.125 | V |
| I _{V_{CORE}_HI} | Output load current high | R _{SH_HI_CURR} | 0.07 | - | 0.75 | A |
| I _{V_{CORE}_LO} | Output load current low | R _{SH_LO_CURR} | 0.07 | - | 0.25 | A |
| C _{V_{CORE}} | Output capacitor | - | 5 | - | 40 | μF |
| R _{C_{V_{CORE}}} | Output capacitor ESR | - | 0.01 | - | 0.1 | Ω |
| C _{V_{CORE}_EMI} | Drain output stability capacitor | - | 0.1 | - | - | μF |
| C _{FET} | External FET gate charge | - | - | - | 50 | nC |
| V _{COREFDBK} | Feedback voltage | Excluding external voltage divider accuracy | 0.8 -2.5% | - | 0.8 + 2.5% | V |
| dV _{SR_ac} | Line Transient Response | All line, load; dt = 10 μs | -5% | - | 5% | % |
| dV _{LR_ac} | Load Transient Response | All line, load; dt = 10 μs | -5% | - | 5% | % |
| G _{CORE_pd} | Gate internal pull down | Not tested, guaranteed by design. | 100 | - | - | kΩ |
| G _{CORE_Vclamp} | Gate voltage clamp | - | 8 | - | 12 | V |
| I _{COREL_HI_lim} | High Current limitation | - | 0.8 | - | 1.6 | A |
| I _{COREL_HI_OC} | High Overcurrent threshold | - | 0.8 | - | 1.6 | A |
| I _{COREL_LO_lim} | Low Current limitation | - | 0.26 | - | 0.48 | A |
| I _{COREL_LO_OC} | Low Overcurrent threshold | - | 0.26 | - | 0.48 | A |
| t _{flt_oc_vcore} | Shut down filter time for short to ground | Filter time starts to count from when current in power MOS is more than I _{COREL_limx} | 85 | 100 | 115 | μs |

Table 12. VCORE regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------------|---|--|-----|-----|-----|------|
| tftt_restart | restart filter time for short to ground | Filter time starts to count from when core buck is disabled | 1.7 | 2 | 2.3 | ms |
| PSRR | Power supply rejection ratio | VPREREG = 6.5V, V _{noise} = 1V _{pp} f _{noise} = 20 kHz, C _{VCORE} = 22μF L _{VCORE} = 22μH | 40 | - | - | dB |

3.8 VCC5 regulator

This regulator provides a fixed 5V rail to supply μC I/Os and ADC. The VCC5 regulator has over and under voltage detections and is also protected against short circuits and over temperature with shared thermal sensor with VCC regulator.

All electrical characteristics are valid for the following conditions unless otherwise noted:

$-40\text{ °C} \leq T_j \leq +175\text{ °C}$; $V_{PREREG_L}(\text{Min}) \leq V_{PREREG} \leq V_{PREREG_H}(\text{Max})$.

Table 13. VCC5 regulator electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|----------------------------|-------------------------------|--|------------|-----|------------|------|
| VCC5 | Regulated output voltage | $0\text{mA} \leq I_{VCC5} \leq 250\text{mA}$ | 4.88 | 5 | 5.12 | V |
| VCC5_UV | Undervoltage threshold | - | VCC5 - 10% | - | VCC5 - 5% | V |
| VCC5_OV | Overvoltage threshold | - | VCC5 + 5% | - | VCC5 + 10% | V |
| t _{fit_VCC5_UVOV} | Under/overvoltage filter time | - | - | 12 | - | μs |
| I _{VCC5} | Output load current | - | 0 | - | 250 | mA |
| C _{VCC5} | Output capacitor | - | 2.2 | 4.7 | 20 | μF |
| C _{VCC5 ESR} | Output capacitor ESR | - | 0.01 | - | 0.1 | Ω |
| dV _{SR_ac} | Line Transient Response | All line, load; dt = 10 μs | -5% | - | 5% | % |
| dV _{LR_ac} | Load Transient Response | All line, load; dt = 10 μs | -5% | - | 5% | % |
| R _{DSon} | High side R _{ds_ON} | - | - | - | 4 | Ω |
| VCC5_cur lim | Current limitation | - | 300 | - | 600 | mA |
| VCC5_oc | Overcurrent threshold | - | 300 | - | 600 | mA |
| VCC5_ilim_oc_delta | Delta_Ilim_Oc | VCC5_cur_lim - VCC5_oc | 0.1 | - | 100 | mA |

Table 13. VCC5 regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---------------------------|-----------------------------|---|-----|-----|------|--------------------|
| $t_{\text{softstart}}$ | Softstart time | From 10% to 90% of nominal output voltage | 345 | - | 1035 | μs |
| T_{JSDVCCx} | Thermal Shutdown | - | 175 | - | 200 | $^{\circ}\text{C}$ |
| $T_{\text{HYS_TSDVCCx}}$ | Thermal Shutdown hysteresis | - | 5 | - | 15 | $^{\circ}\text{C}$ |

3.9 VCC regulator

This regulator provides a dedicated rail to supply μC I/Os. It can be configured via VCCSEL pin to output either 3.3 V or 5 V. The VCC regulator has over and under voltage detections and is also protected against short to ground and over temperature with shared thermal sensor with VCC5.

The state of VCCSEL pin is latched at power up when VPREREG voltage exceeds the VPREREG_UV threshold and stays latched until next POR event.

All electrical characteristics are valid for the following conditions unless otherwise noted:

$-40\text{ }^{\circ}\text{C} \leq T_j \leq +175\text{ }^{\circ}\text{C}$; $V_{\text{PREREG_L}}(\text{Min}) \leq V_{\text{PREREG}} \leq V_{\text{PREREG_H}}(\text{Max})$.

Table 14. VCC regulator electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------------------------|--------------------------------|---|---------------------------|-----|---------------------------|---------------|
| VCC_L | Regulated output voltage | $0\text{mA} \leq I_{\text{VCC}} \leq 100\text{mA}$; VCCSEL = '0' | 3.220 | 3.3 | 3.380 | V |
| VCC_H | Regulated output voltage | $V_{\text{PREREG}} \geq 6\text{V}$, $0\text{mA} \leq I_{\text{VCC}} \leq 100\text{mA}$; VCCSEL = '1' | 4.88 | 5 | 5.12 | V |
| VCCSEL_IH | VCCSEL input high voltage | - | 1.75 | - | - | V |
| VCCSEL_IL | VCCSEL input low voltage | - | - | - | 0.75 | V |
| VCCSEL_Ihys | VCCSEL input hysteresis | - | 100 | - | 1000 | mV |
| Ipd_VCCSEL | VCCSEL input Pull down current | VCCSEL=3.3V | 1 | - | 10 | μA |
| VCC_UV | Undervoltage threshold | - | $V_{\text{CC_x}} - 10\%$ | - | $V_{\text{CC_x}} - 5\%$ | V |
| VCC_OV | Overvoltage threshold | - | $V_{\text{CC_x}} + 5\%$ | - | $V_{\text{CC_x}} + 10\%$ | V |
| $t_{\text{fit_VCC_UVOV}}$ | Under/overvoltage filter time | - | - | 12 | - | μs |
| I_{VCC} | Output load current | - | 0 | - | 100 | mA |
| C_{VCC} | Output capacitor | - | 2.2 | 4.7 | 20 | μF |

Table 14. VCC regulator electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------|-------------------------|---|------|-----|------|----------|
| $C_{VCC\ ESR}$ | Output capacitor ESR | - | 0.01 | - | 0.1 | Ω |
| dV_{SR_ac} | Line transient response | All line, load; dt = 10 μ s | -5% | - | 5% | % |
| dV_{LR_ac} | Load transient response | All line, load; dt = 10 μ s | -5% | - | 5% | % |
| R_{DSon} | High side Rds_ON | - | - | - | 12 | Ω |
| VCC_cur lim | Current limitation | - | 125 | - | 240 | mA |
| VCC_oc | Overcurrent threshold | - | 125 | - | 240 | mA |
| VCC_ilim_oc_delta | Delta_lim_Oc | VCC_cur_lim – VCC_oc | 0.1 | - | 100 | mA |
| $t_{softstart}$ | Softstart time | From 10% to 90% of nominal output voltage | 345 | - | 1035 | μ s |

3.10 Protected battery switch

The device provides a fully protected switched battery output VB_SW, always active when the device is not in stand-by mode and WD1 is correctly served. This functionality can be used as further battery supply, e.g. for external sensors requiring battery level, or as a pull-up voltage rail.

The output can be disabled through SPI. Should the VB_SW diagnostics detect an over current condition, the output is turned off and the over current SPI fault is set. Once an over-current condition is detected, the output can only be re-enabled through SPI command, when the fault disappears, writing the bit PROTECTED BATTERY SWITCH COMMAND at 1 after the related OVER CURRENT flag is cleared on read.

All electrical characteristics are valid for the following conditions unless otherwise noted:

$-40\text{ }^{\circ}\text{C} \leq T_j \leq +175\text{ }^{\circ}\text{C}$; $4.5 \leq V_B = V_{BATP} \leq 19\text{ V}$.

Table 15. Protected battery switch electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------|----------------------|--|-----|-----|-----|-------|
| - | Saturation voltage | $V_B - V_{B_SW}$ @ max. current | - | - | 0.5 | V |
| - | Operating current | - | - | - | 150 | mA |
| VB_SW_oc | Overcurrent shutdown | - | 165 | - | 250 | mA |
| VB_SW_cur lim | Current limitation | - | 165 | - | 250 | mA |
| VB_SW_ilim_oc_delta | Delta_lim_Oc | $V_{B_SW_cur_lim} -$ $V_{B_SW_oc}$ | 0.1 | - | 20 | mA |


Table 15. Protected battery switch electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-------------------|---------------------------|------------|-----|-----|-----|-------|
| - | Shutdown delay time | - | 90 | - | 110 | μs |
| I _{leak} | Off state leakage current | VB_SW off | -1 | - | 1 | μA |

3.11 Power up and power down sequences

Wake-up signal turns on the device and initiates the regulator power up sequence as in the figure below.

Figure 6. Power up sequence from wake up input

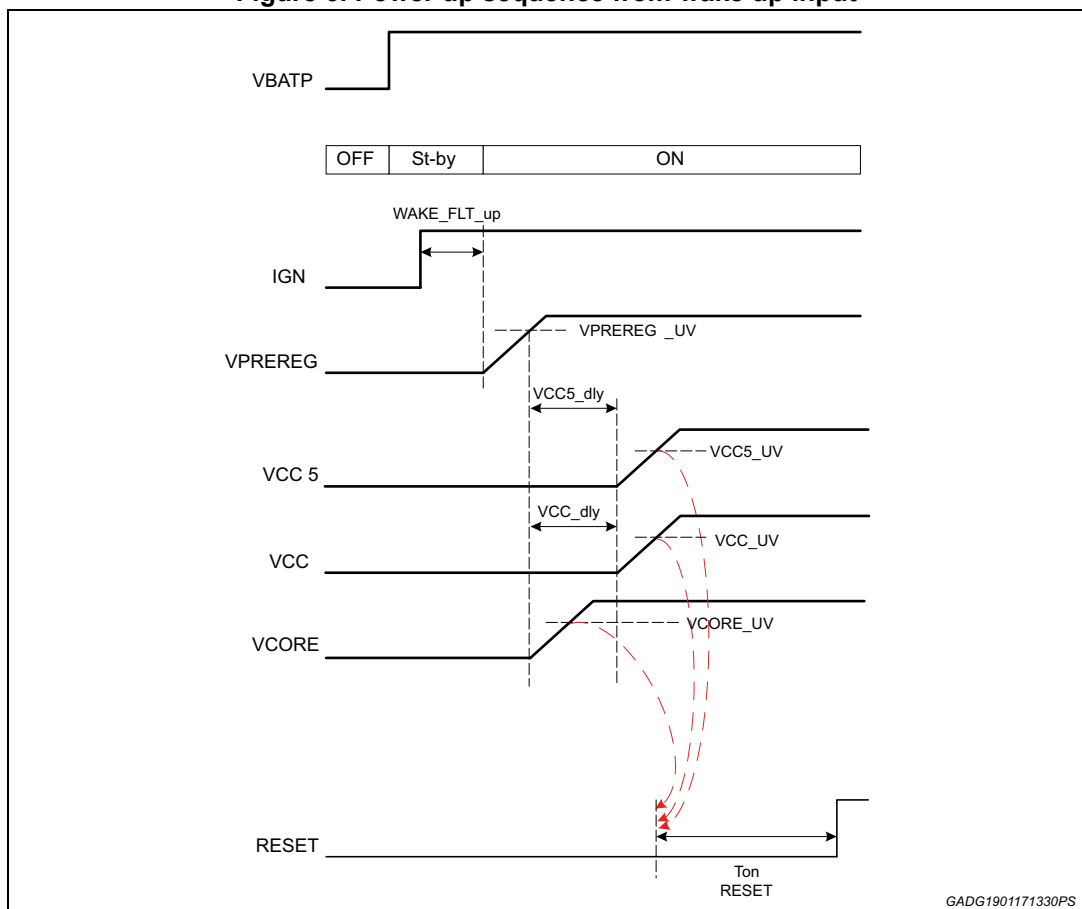

The device provides three different possibilities to stay in ON state:

- a persistent high signal on IGN pin,
- the setting of the POWERHOLD bit through SPI,
- the refreshing of the KEEPALIVE bit through SPI within a specified time frame.

At each transition H->L on the wake-up pin the device enters the keep-alive mode for one keep-alive period (KA_{period}).

If the device receives an SPI command to set the POWERHOLD bit within the first keep-alive period the device remains awake. Similarly, if the device receives an SPI command to refresh the KEEPALIVE bit within the first keep-alive period the device remains awake. Once the KEEPALIVE bit is refreshed a new KA_period starts and so forth. To stay on the keep-alive bit should be refreshed at each KA_period.

Should the KA_period elapse without any of the above 3 conditions, the device exits the keep-alive mode and enters in power down.

The power down sequence depends on the keep alive choice being done.

In the following figure, the power down sequence related to a H->L transition on the wake-up input pin without SPI conditioning is shown.

Figure 7. Power down sequence from wake up input

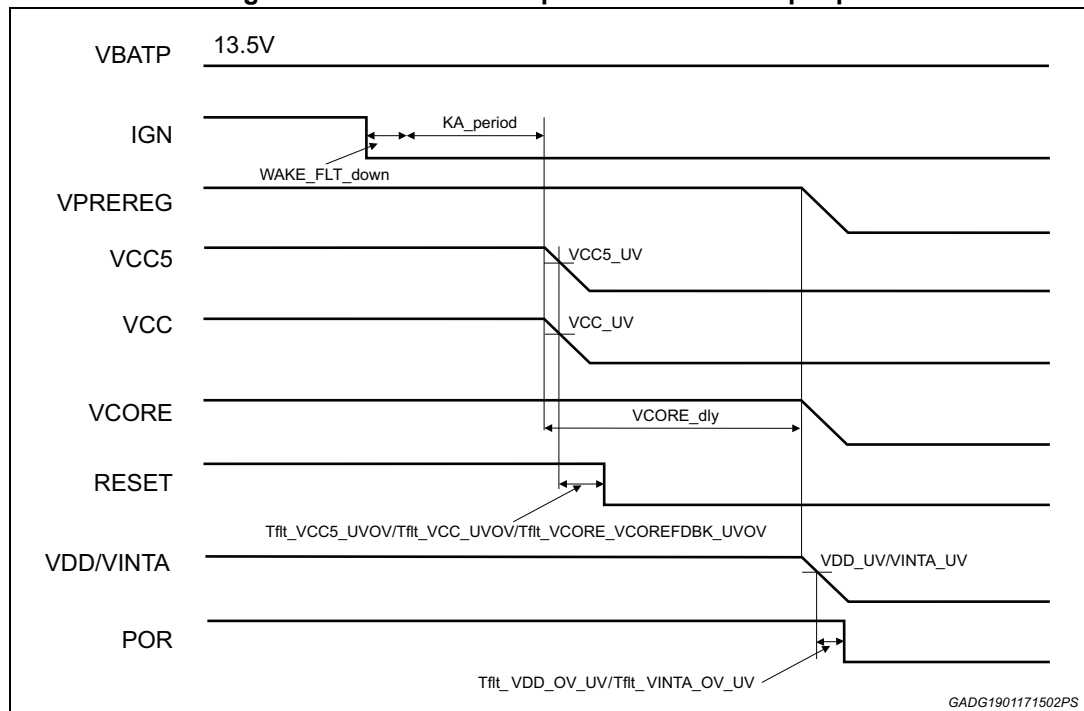


Table 16. Power up and power down

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|---------------------------|---|-----|-----|-----|-------|
| VCC5_dly | VCC5 delay at power-up | From VPREREG_UV to VCC5 start | - | 200 | - | µs |
| VCC_dly | VCC delay at power-up | From VPREREG_UV to VCC start | - | 200 | - | µs |
| VCORE_dly | VCORE delay at power-down | From end of KA_period to VCORE switch off | - | 200 | - | µs |
| Ton_RESET | RESET hold time | From regulators in range to RESET High | 11 | 12 | 13 | ms |

4 Pre-drivers

4.1 Fail safe pre-driver

The device integrates a pre-driver of an external FET for fail safe purposes. It can be used as a HS pre-driver in case the external FET is used as a switch. The device controls the fail safe pre-driver in On/Off via SPI. The function remains active while no internal voltage faults or watchdog faults are detected.

This pre-driver implements a monitor against over current thanks to the diagnostics on drain-source monitoring of the external FET (in case of overcurrent SPI bit 15 of DRV_CONTROL_1 register goes high). If charge pump level goes below the disable voltage, the pre-driver is turned off. When the level returns above the disable voltage, the pre-driver returns to normal operation.

Table 17. Fail Safe pre-driver electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------|---|-----------------------------------|------|-----|------|-------|
| VDG_ON | VDG On voltage | (VDG-VDS)@-0.1mA | 5.2 | - | 12 | V |
| VDG_OFF | VDG Off voltage | (VDG-VDS)@0.1 mA | - | - | 1 | V |
| Rpd_VDG_VDS | Pull down resistor at VDG-VDS | - | 130 | - | 270 | kΩ |
| VDG_Isource | VDG current source | V(VDG)=V(VDS) V(CP)- V(VDG)=2V | 0.2 | 1 | 2 | mA |
| VDG_Isink | VDG current sink | V(VDG)-V(VDS)=1V | 1 | 5 | 9 | mA |
| QFS_turn-on_00 | QFS turn-on threshold voltage | V(VDBATT) – V(VDS) VDS_TH='00' | 0.25 | - | 0.75 | V |
| QFS_turn-on_01 | QFS turn-on threshold voltage | V(VDBATT) – V(VDS) VDS_TH='01' | 0.75 | - | 1.25 | V |
| QFS_turn-on_10 | QFS turn-on threshold voltage | V(VDBATT) – V(VDS) VDS_TH='10' | 1.25 | - | 1.8 | V |
| QFS_turn-on_11 | QFS turn-on threshold voltage | V(VDBATT) – V(VDS) VDS_TH='11' | 1.75 | - | 2.4 | V |
| IVDBATT_ds | VDBATT leakage current for drain-source monitor | FAIL SAFE DRIVER ENABLE=0 | 7 | - | 67 | μA |
| t _{QFS_ON} | Filter time of QFS turn-on | guaranteed by scan | - | 12 | - | μs |

4.2 Pump motor pre-driver

The device can drive a pump motor through this pre-driver for external FETs. It provides pre-driver circuitry for the motor high-side FET and the motor recirculation FET.

The PDG gate drive signal is referenced to PDS, and the pre-driver pair shall be able to float below the logic ground voltage, while keeping full on/off control on the external FET. This is required to prevent the FET from being partially turned on in the case of a ground offset between ECU and motor ground, or in case of loss of ECU ground.

Similarly, the PRG gate drive signal shall be referenced to PRS, and the pre-driver pair shall be able to float below the logic ground voltage, while keeping full on/off control on the external recirculation FET.

The motor FET pre-drivers shall be controlled by logic level input pins PDI and PRI, with logical operation defined as:

Table 18. Logical operation definition

| PDI | PRI | PDG | PRG | High-side FET | Recirculation FET |
|-----|-----|-----|-----|---------------|-------------------|
| L | L | L | L | OFF | OFF |
| H | L | H | L | ON | OFF |
| L | H | L | H | OFF | ON |
| H | H | H | L | ON | OFF |

The state of the PDI and PRI pins can be observed via SPI.

The device is able to generate software selectable dead time between PDG and PRG transitions, to prevent cross-conduction on the external FETs.

In order to enable either PDG or PRG the following conditions must be met:

- the watchdog reset must not be asserted,
- the Enable Motor FET Driver SPI bit must be set,
- no device faults preventing PDG or PRG operation must be present.

When disabled, PDG and PRG are driven to their low states.

4.3 Pump motor diagnostics

To enable MCU diagnostics, the device provides an internal pull-up current (IPDS) on PDS and the PDS voltage can be read by the ADC and available over SPI.

After PDG is turned on, the device monitors the rising differential voltage between PDG and PDS. If the differential voltage does not exceed the PDG turn-on voltage threshold within the PDG switching time, the device disables the PDG pre-driver and sets the PDG Turn-On Fault SPI bit. The device automatically re-enables the PDG pre-driver on the next rising PDI edge.

After PDG is turned off, the device monitors the falling differential voltage between PDG and PDS. If the differential voltage does not drop below the PDG turn-off voltage threshold within the PDG switching time, the device disables both the PDG and PRG pre-drivers, sets the PDG Turn-Off Fault SPI bit and clears the Enable Motor FET Driver SPI bit. The PDG and

PRG pre-drivers remain disabled until the Enable Motor FET Driver SPI bit is re-set over SPI. The PDG Turn-On/off Fault SPI bits are latched until read.

In case the negative flyback voltage on PDS drops below the open flyback voltage threshold for longer than the open flyback debounce time after PDG is turned off, the device disables both the PDG and PRG pre-drivers, sets the Open Flyback Fault SPI bit and clears the Enable Motor FET Driver SPI bit. The PDG and PRG pre-drivers remain disabled until the Enable Motor FET Driver SPI bit is re-set over SPI. The Open Flyback Fault SPI bit is latched until read.

After PDG is turned on, the device monitors the falling differential voltage between PDBATT and PDS. If the differential voltage does not drop below the QPD turn-on voltage threshold within the QPD switching time, the device disables the PDG pre-driver and sets the QPD Turn-On Fault SPI bit. The device automatically re-enables the PDG pre-driver on the next rising PDI edge. The QPD Turn-On Fault SPI bit is latched until read.

After PDG is turned off, the device monitors the falling PDS voltage. If the voltage does not drop below the QPD turn-off voltage threshold within the QPD switching time, the device disables both the PDG and PRG pre-drivers, sets the QPD Turn-Off Fault SPI bit and clears the Enable Motor FET Driver SPI bit. The PDG and PRG pre-drivers remain disabled until the Enable Motor FET Driver SPI bit is re-set over SPI. The QPD Turn-Off Fault SPI bit is latched until read.

After PRG is turned on, the device monitors the rising differential voltage between PRG and PRS. If the differential voltage does not exceed the PRG turn-on voltage threshold within the PRG switching time, the device sets the PRG Turn-On Fault SPI bit. The device continues to drive the current limited PRG pin. The PRG Turn-On Fault SPI bit is latched until read.

After PRG is turned off, the device monitors the falling differential voltage between PRG and PRS. If the differential voltage does not drop below the PRG turn-off voltage threshold within the PRG switching time, the device disables both the PDG and PRG pre-drivers, sets the PRG Turn-Off Fault SPI bit and clears the Enable Motor FET Driver SPI bit. The PDG and PRG pre-drivers remain disabled until the Enable Motor FET Driver SPI bit is re-set over SPI. The PRG Turn-On Fault SPI bit is latched until read.

All the OFF diagnostic comparators (PDG_OFF, open flyback, QPD_OFF, PRG_OFF) are active during the entire OFF state until FETs are switched on. Output of comparators is masked when Enable Motor FET Driver SPI bit is low while is not masked when Enable bit is high and FETs are in off state. There is no masking of OFF diagnostic when there is transition of Enable Motor FET Driver SPI bit from low to high. Masking time is only applied during the transitions of FETs gate command.

In case of a device ground loss while the motor is enabled, the device disables both external FETs. These FETs remain disabled until the device returns to the active mode.

If battery level goes below the disable voltage, the pre-driver is turned off after the delay disable time has elapsed. When the level returns above the disable voltage, the pre-driver returns to normal operation.

Table 19. Pump motor diagnostics electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------|---|---|------|----------------|------|------------|
| PDG_ON_5V6 | PDG On voltage | $(V(PDG)-V(PDS))@-1mA@VBST>5.6V$ assuming PDBATT=VBST | 6.8 | - | 12 | V |
| PDG_ON_8V | PDG On voltage | $(V(PDG)-V(PDS))@-10mA@VBST>8V$ assuming PDBATT=VBST | 7.8 | - | 12 | V |
| PDG_ON_8V55 | PDG On voltage | $(V(PDG)-V(PDS))@-1mA@VBST>8.55V$ assuming PDBATT=VBST | 8.9 | - | 12 | V |
| PDG_OFF | PDG Off voltage | $(V(PDG)-V(PDS))@1mA$ | - | - | 0.5 | V |
| - | PDG turn-on threshold voltage | $V(PDG) - V(PDS)$ | 5.1 | 6 | 6.8 | V |
| - | PDG turn-off threshold voltage | $V(PDG) - V(PDS)$ | 0.5 | - | 1 | V |
| Rpd_PDG_PDS | Pull down resistor at PDG-PDS | - | 130 | - | 270 | k Ω |
| - | PDG switching time | guaranteed by scan | - | 6 | - | μs |
| - | PDG filter time | guaranteed by scan | - | 3 | - | μs |
| QPD_turn-on_00 | QPD turn-on threshold voltage | $V(PDBATT) - V(PDS)$ PUMP_VDS_TH='00' | 0.25 | - | 0.75 | V |
| QPD_turn-on_01 | QPD turn-on threshold voltage | $V(PDBATT) - V(PDS)$ PUMP_VDS_TH='01' | 0.75 | - | 1.25 | V |
| QPD_turn-on_10 | QPD turn-on threshold voltage | $V(PDBATT) - V(PDS)$ PUMP_VDS_TH='10' | 1.25 | - | 1.8 | V |
| QPD_turn-on_11 | QPD turn-on threshold voltage | $V(PDBATT) - V(PDS)$ PUMP_VDS_TH='11' | 1.75 | - | 2.4 | V |
| IPDBATT_ds | PDBATT leakage current for drain-source monitor | PUMP MOTOR PRE DRIVER ENABLE=0 | 7 | - | 67 | μA |
| QPD_turn-off_th | QPD turn-off threshold voltage | $V(PDBATT) - V(PDS)$ | - | QPD_turn-on_th | - | V |
| - | QPD switching time | guaranteed by scan | - | 6 | - | μs |

Table 19. Pump motor diagnostics electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|---------------------|--------------------------------|--|------|-----|------|-------|
| - | QPD filter time | guaranteed by scan | - | 3 | - | μs |
| - | Open flyback threshold | - | -11 | - | -7.5 | V |
| - | Open flyback filter time | - | - | 3 | - | μs |
| PDG_Isource | PDG current source | $V(PDG)=V(PDS)$ $V(CP)-V(PDG) = 2 V$ | 15 | 25 | 35 | mA |
| PDG_Isink | PDG current sink | $V(PDG) - V(PDS) = 1 V$ | 15 | 25 | 35 | mA |
| PRG_ON | PRG On voltage | $(V(PRG)-V(PRS))@-$ $1 mA@VBST>5.6 V$ | 6.8 | - | 12 | V |
| PRG_OFF | PRG Off voltage | $(V(PRG)-V(PRS))@1 mA$ | - | - | 0.5 | V |
| - | PRG turn-on threshold voltage | $V(PRG)-V(PRS)$ | 5.1 | - | 6.8 | V |
| - | PRG turn-off threshold voltage | $V(PRG)-V(PRS)$ | 0.5 | - | 1 | V |
| Rpd_PRG_PRS | Pull down resistor at PRG-PRS | - | 130 | - | 270 | kΩ |
| - | PRG switching time | guaranteed by scan | - | 6 | - | μs |
| - | PRG filter time | guaranteed by scan | - | 3 | - | μs |
| PRG_Isource | PRG current source | $V(PRG)=V(PRS)$ $V(CP)-V(PRG)=2V$ | 15 | 25 | 35 | mA |
| PRG_Isink | PRG current sink | $V(PRG) - V(PRS)=1V$ | 15 | 25 | 35 | mA |
| - | PDI propagation delay | From PDI rising edge to PDG at turn-on threshold voltage | - | 2 | - | μs |
| - | PRI propagation delay | From PRI rising edge to PRG at turn-on threshold voltage | - | 2 | - | μs |
| PDI_IH | PDI input high voltage | - | 1.75 | - | - | V |
| PDI_IL | PDI input low voltage | - | - | - | 0.75 | V |
| PDI_Ihys | PDI input hysteresis | - | 100 | - | 1000 | mV |
| l _{pd_PDI} | PDI input Pull down current | PDI=3.3V | 10 | - | 100 | μA |

Table 19. Pump motor diagnostics electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|-----------------------------|--------------------------|------|------|------|-------|
| PRI_IH | PRI input high voltage | - | 1.75 | - | - | V |
| PRI_IL | PRI input low voltage | - | - | - | 0.75 | V |
| PRI_lhys | PRI input hysteresis | - | 100 | - | 1000 | mV |
| Ri_pd_PRI | PRI input Pull down current | PRI=3.3V | 10 | - | 100 | μA |
| - | Non overlap timing | Programmable in 24 steps | - | 0.25 | 6 | μs |

5 Remote sensor interface

The device contains 4 remote sensor interfaces, capable of supporting active wheel speed sensors or operating as an independent 2-channel tracking regulation supply.

The interface supply is internally connected to the VPREREG pin. The circuitry consists of a power interface delivering a dedicated output voltage on RSUHx pins. This output could be voltage regulated in case of operation as tracking supply (pins RSUH0 and RSUH1). When WSS operation is selected, the function mirrors the current flowing in the external sensor and transmits this current information to the decoder, which produces a digital value for each sensor channel. RSULx pins are used as ground returns from the sensors and current sense is carried out in low side.

Data are then output through SPI registers. Received signals can be processed to the corresponding discrete logic output pin WSO0-WSO3.

5.1 Active wheel speed sensor

The remote sensor interface circuit conditions and interprets active wheel speed sensor signals with various pulse widths and output currents. The following sensor types are supported and selected through SPI configuration:


- Standard active 2-level wheel speed sensors (7/14 mA);
- A three-level (7/14/28 mA) VDA compliant sensor with direction and air gap information ("Requirement Specification for Standardized Interface for Wheel Speed Sensor with Additional Information", Version 4.0);
- PWM encoded 2-level sensors with 2 edges per tooth (see data sheet Infineon IC TLE4942/BOSCH DF11);
- PWM encoded 2-level sensors with 1 edge per tooth (see data sheet Allegro ATS651LSH/BOSCH DF11).

Received wheel speed frames from all the above sensors are decoded into signals suitable for the microcontroller through SPI or the four WSOx output pins. For all sensors, other than the standard active 2-level sensor, additional sensor data (diagnostics, etc...) are decoded and available within SPI registers. The user may select to have all sensor data processed on WSOx pins through the microcontroller by selecting pass through mode. In pass through mode, the remote sensor interface simply conditions the incoming sensor current pulses to digital pulses, no decoding is performed.

The sensor input filter time, deglitch filter, (delay until a threshold crossing is detected) can be configured (from 8 μ s to 50 μ s). Filters can be selected individually for each channel, through the RS_CFG_x_y registers, bits [9:6].

For PWM encoded sensors with 2 edges per tooth not in pass through mode, the standstill signal can be processed directly to the WSOx output pins. This is done in the RS_CFG_x_y registers, bit [4].

Since the decoder has to measure the pulses in order to determine whether they are stand-still pulses or not, the first standstill pulse will always be seen on the WSOx output pins and the first not stand-still pulse after a stand-still period will be suppressed.

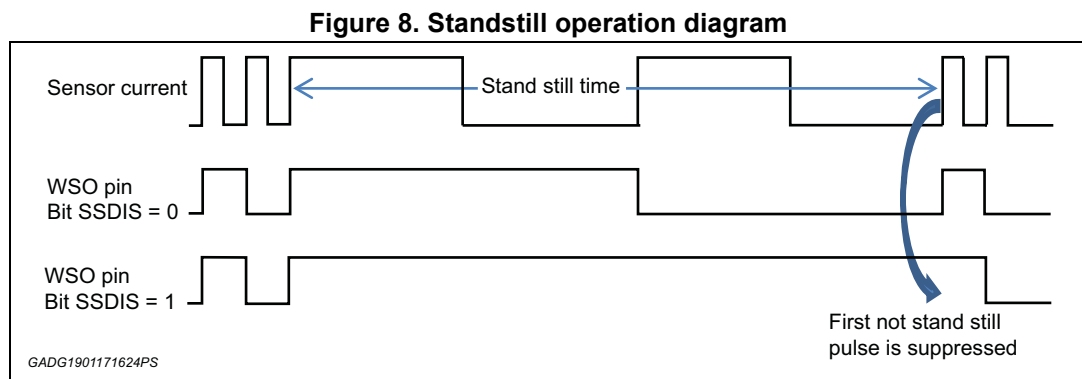


Data from the sensor are not latched: last incoming frame overwrites the previous one once validated. Faults coming from diagnostic (i.e. over current, short to ground or battery) are latched until the microcontroller reads them.

We have two different digital algorithms:

- Auto-adjusting current trip points. With this option, the IC is able to find sensor base current value (named IB0). Range of base current can be configured via SPI. The IC is also able to detect the current value of the data pulse and compute the first threshold (named lth1): $lth1 = IB0 + (\Delta lth1)/2$ where $\Delta lth1$ range is also configurable via SPI. Besides, in case of VDA selected, the IC is also able to recognize the current value of the speed pulse by computing a second threshold (named lth2): $lth2 = IB0 + \Delta lth1 + (\Delta lth2)/2$ where $\Delta lth2$ range is configurable via SPI.
- Fixed current trip points where the thresholds are set by SPI. To avoid the risk of wrong settings (inverted thresholds, thresholds outside WSI limits and similar) only the first threshold can be directly programmed while, to determine the second one, an offset vs. the first threshold must be provided. Both values, threshold and offset, can be specified through an 8-bit word (range 0x00 → 0xFF). A fixed offset of 54 (0x36) is also added to determine the actual thresholds in order to prevent any potential wrong setting out of range. Complete formulas for threshold computation are the following:
 - First threshold (typ.) = $93.75 \mu A * (54 + WSI_FIRST_TH)$
 - Second threshold rising edge (typ.) = $93.75 \mu A * (108 + WSI_FIRST_TH + WSI_OFFS_TH)$
 - Second threshold falling edge (typ.) = $93.75 \mu A * (108 + WSI_FIRST_TH + WSI_OFFS_TH) * 0.6865$
 - WSI_FIRST_TH: SPI programmable from 0x00 to 0xFF (default = 0x33)
 - WSI_OFFS_TH: SPI programmable from 0x00 to 0xFF (default = 0x34)

Figure 9. Wheel speed sensor protocol types

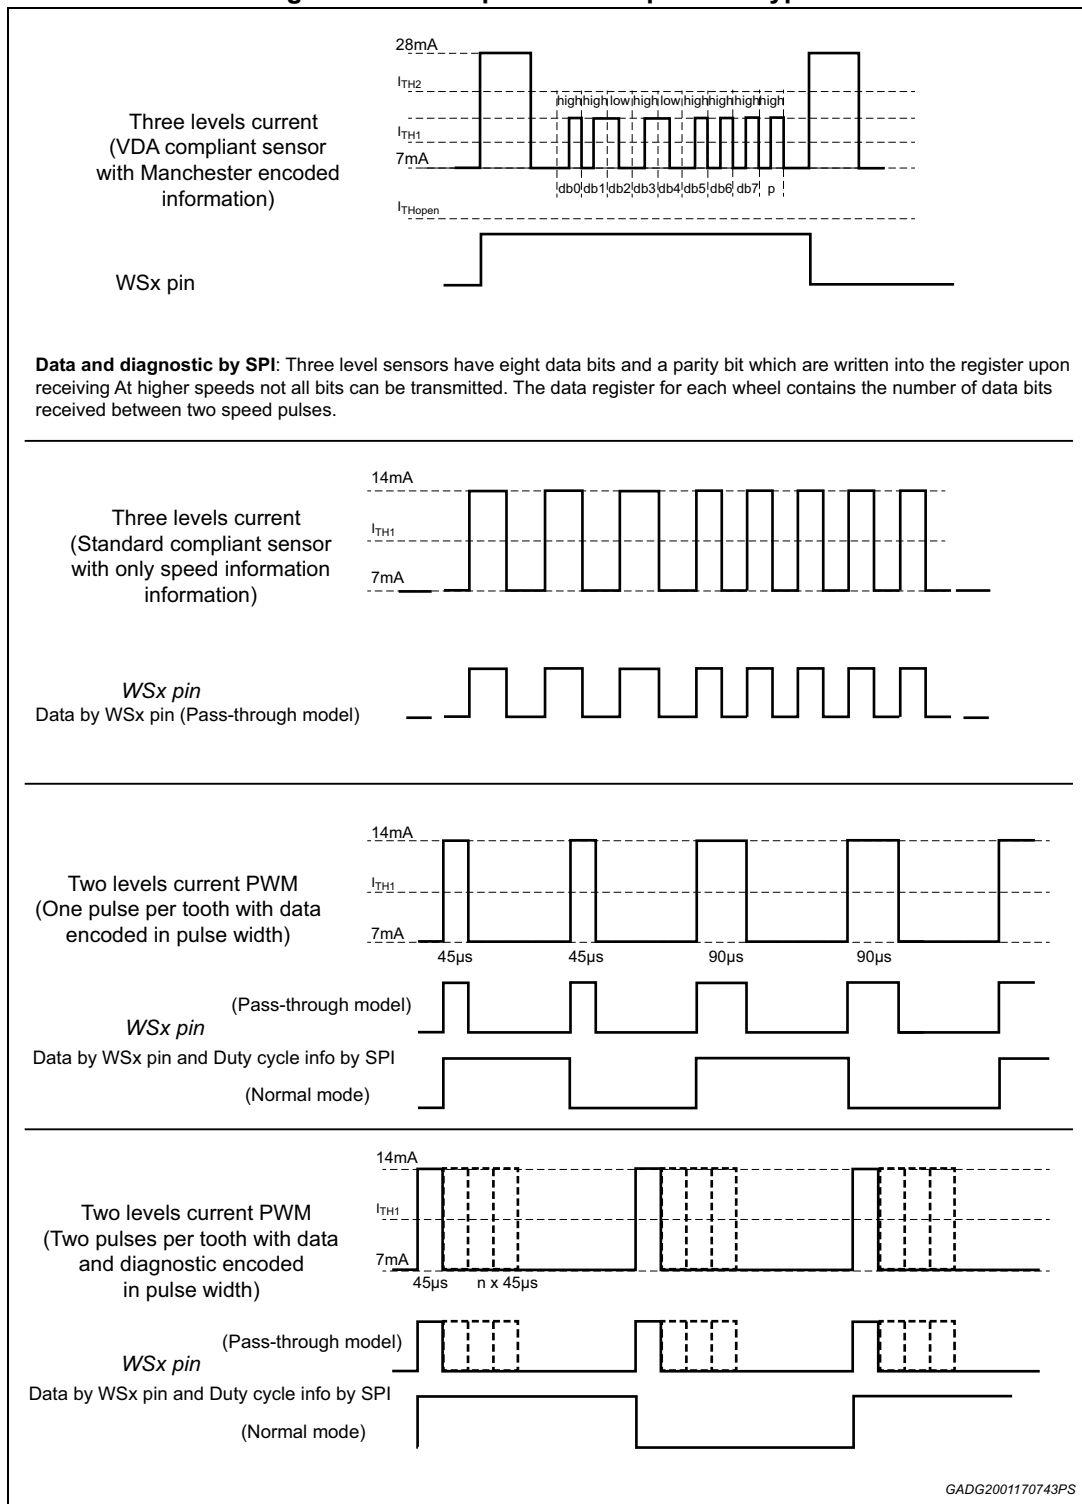

5.1.1 Wheel speed data register formats

In the wheel speed sensor interface four data registers are used (Remote Sensor Data Register RS_DATA_RSDR_0- RS_DATA_RSDR_3).

Independent data registers are defined for each wheel speed channel and their contents are determined by sensor type. Three-level VDA sensors have eight data bits and parity as shown in the table below. At fast speed not all bits may be transmitted by the sensor: the IC is able both to process normal or either truncated frames by providing together with data, a 4-bit counter to inform the microcontroller about the number of received valid bits.

For PWM encoded sensors, each pulse length is written to the sensor data register with a typical resolution of 5 μ s per bit. In case of pulse width duration equal to or higher than 1.045 ms, the standstill condition will be recognized and bit 15 in the corresponding register will be set.

The register is updated when a PWM falling edge is detected; in case of stuck-at 1 of the PWM signal the register is updated when the counter reaches the overflow value (0x1FF): in this case the standstill bit not set and the counter in overflow will signal a fault to the microcontroller.

5.1.2 Testmode

In order to test the input structures of the connected microcontroller, the device features a wheel speed test mode that allows test patterns to be applied on the four wheel speed outputs WSOx. The test mode can be entered via SPI and the test patterns can also be controlled via SPI commands. Test patterns can be composed only of static high or low signals, which can be selected via SPI. For safety reasons only one channel at a time can be switched into test mode.

In order to enable testmode it is necessary to write to '1' bit DIAG (bit 4) of register RS_CTRL. After that the bits of WSS_TEST register select the channel under test and the state of output pin.

To exit this testmode it is not sufficient to clear to '0' the DIAG bit but, before that, also bits 8:2 of WSS_TEST register (Config range field) must be changed in order not to select any of the four available outputs.

5.1.3 Wheel Speed SPI Registers

WSI test

Table 20. WSS_TEST register

| Addr | Name | Type | Bits = 9 |
|---------|----------|------|--------------------------------------|
| 0001111 | WSS_TEST | RW | Config Range= 8:2, X:1, TestBit = 0; |

WSS_TEST register stores Static Test configurator bit-field.

This register configures a static test for WSI interface. Test consists in transferring TestBit value on a selected (by Config range) WSI output.

TestBit: Test input value.

Table 21. WSS_TEST register bit description

| Data Field | Description | Reset value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 8:2 | Config range: selects one WSI output according to the following range: 1010011 => DOUT4 output; 1010101 => DOUT3 output; 1011001 => DOUT2 output; 1010110 => DOUT1 output; all others: test mode disabled | 0 | SSM_RESET LBIST |
| Bit 1 | DON'T CARE | 0 | SSM_RESET LBIST |
| Bit 0 | WSSTP: DOUTx Output Test Value 0 => Output for selected DOUTx set 'high' 1 => Output for selected DOUTx set 'low' | 0 | SSM_RESET LBIST |

WSI configuration

Table 22. RS_CFG_0_1 register

| ADDR | Name | Type | Bits = 20 |
|---------|------------|------|---|
| 0001100 | RS_CFG_0_1 | RW | Config1 Range ch1 = 19:10, Config0 Range ch0 = 9:0; |

Any WSI interface is configured by a 10-bit field according to the following format.

Table 23. RS_CFG_0_1 register bit description

| Data Field | Description | Reset value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 19:16 | WSFILT[3:0]: Wheel Speed filter time selection (500nsec per bit) If WSFILT_CONF=0: 0000 => 8 μ s ----- => 500 ns per bit 1111 => 15.5 μ s If WSFILT_CONF=1: => 30 μ s, xx11 => 50 μ s | 0010 | SSM_RESET LBIST |
| Bit 15 | WSIPTEN: Pass Through mode enable (valid only for PWM encoded sensors) 0 => Off 1 => On | 0 | SSM_RESET LBIST |

Table 23. RS_CFG_0_1 register bit description (continued)

| Data Field | Description | Reset value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 14 | SSDIS: DOUTx output disabled in case of Standstill condition (valid only for PWM encoded 2 edges sensor) 0 => DOUTx enabled during standstill 1 => DOUTx disabled during standstill | 0 | SSM_RESET LBIST |
| Bit 13 | WSI_FIX_THRESH: WSI selection of fixed or auto adaptive thresholds 0 => auto adaptive thresholds 1 => fixed thresholds | 0 | SSM_RESET LBIST |
| Bit 12 | WSFILT_CONF (see bits 16 to 19) | 0 | SSM_RESET LBIST |
| Bit 11:10 | STS: Sensor Type Selection 00 => Two level, Standard 01 => Three level, VDA 10 => PWM Encoded, 2 level, 2 edges/tooth 11 => PWM Encoded, 2 level, 1 edge/tooth | 0 | SSM_RESET LBIST |
| Bit 9:6 | WSFILT[3:0]: Wheel Speed filter time selection (500 ns per bit) If WSFILT_CONF=0: 0000 => 8 μ s ----- => 500 ns per bit 1111 => 15.5 μ s If WSFILT_CONF=1: xx00 => 8 μ s, xx01 \geq 15 μ s, xx10 => 30 μ s, xx11 \geq 50 μ s | 0010 | SSM_RESET LBIST |
| Bit 5 | WSIPTEN: Pass Through mode enable (valid only for PWM encoded sensors) 0 => Off 1 => On | 0 | SSM_RESET LBIST |
| Bit 4 | SSDIS: DOUTx output disabled in case of Standstill condition (valid only for PWM encoded 2 edges sensor) 0 => DOUTx enabled during standstill 1 => DOUTx disabled during standstill | 0 | SSM_RESET LBIST |

Table 23. RS_CFG_0_1 register bit description (continued)

| Data Field | Description | Reset value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 3 | WSI_FIX_THRESH: WSI selection of fixed or auto adaptive thresholds 0 => auto adaptive thresholds 1 => fixed thresholds | 0 | SSM_RESET LBIST |
| Bit 2 | WSFILT_CONF (see bits 6 to 9) | 0 | SSM_RESET LBIST |
| Bit 1:0 | STS: Sensor Type Selection 00 => Two level, Standard 01 => Three level, VDA 10 => PWM Encoded, 2 level, 2 edges/tooth 11 => PWM Encoded, 2 level, 1 edge/tooth | 0 | SSM_RESET LBIST |

Table 24. RS_CFG_2_3 register

| ADDR | Name | Type | Bits = 20 |
|---------|------------|------|--|
| 0001101 | RS_CFG_2_3 | RW | Config3 Range ch3= 19:10, Config2 Range ch2 = 9:0; |

Any WSI interface is configured by a 10-bit field according to the following format.

Table 25. RS_CFG_2_3 register bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 19:16 | WSFILT[3:0]: Wheel Speed filter time selection (500 ns per bit) If WSFILT_CONF=0: 0000 => 8 μ s ----- => 500 ns per bit 1111 => 15.5 μ s If WSFILT_CONF=1: xx00 => 8 μ s, xx01 =>15 μ s, xx10 => 30 μ s, xx11 => 50 μ s | 0 | SSM_RESET LBIST |
| Bit 15 | WSIPTEN: Pass Through mode enable (valid only for PWM encoded sensors) 0 => Off 1 => On | 0 | SSM_RESET LBIST |

Table 25. RS_CFG_2_3 register bit description (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 14 | SSDIS: DOUTx output disabled in case of Standstill condition (valid only for PWM encoded 2 edges sensor) 0 => DOUTx enabled during standstill 1 => DOUTx disabled during standstill | 0 | SSM_RESET LBIST |
| Bit 13 | WSI_FIX_THRESH: WSI selection of fixed or auto adaptive thresholds 0 => auto adaptive thresholds 1 => fixed thresholds | 0 | SSM_RESET LBIST |
| Bit 12 | WSFILT_CONF (see bits 16 to 19) | 0 | SSM_RESET LBIST |
| Bit 11:10 | STS: Sensor Type Selection 00 => Two level, Standard 01 => Three level, VDA 10 => PWM Encoded, 2 level, 2 edges/tooth 11 => PWM Encoded, 2 level, 1 edge/tooth | 0 | SSM_RESET LBIST |
| Bit 9:6 | WSFILT[3:0]: Wheel Speed filter time selection (500 ns per bit) If WSFILT_CONF=0: 0000 => 8 μ s ----- => 500 ns per bit 1111 => 15.5 μ s If WSFILT_CONF=1: xx00 => 8 μ s, xx01 =>15 μ s, xx10 => 30 μ s, xx11 => 50 μ s | 0 | SSM_RESET LBIST |
| Bit 5 | WSIPTEN: Pass Through mode enable (valid only for PWM encoded sensors) 0 => Off 1 => On | 0 | SSM_RESET LBIST |
| Bit 4 | SSDIS: DOUTx output disabled in case of Standstill condition (valid only for PWM encoded 2 edges sensor) 0 => DOUTx enabled during standstill 1 => DOUTx disabled during standstill | 0 | SSM_RESET LBIST |

Table 25. RS_CFG_2_3 register bit description (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 3 | WSI_FIX_THRESH: WSI selection of fixed or auto adaptive thresholds 0 => auto adaptive thresholds 1 => fixed thresholds | 0 | SSM_RESET LBIST |
| Bit 2 | WSFILT_CONF (see bits 6 to 9) | 0 | SSM_RESET LBIST |
| Bit 1:0 | STS: Sensor Type Selection 00 => Two level, Standard 01 => Three level, VDA 10 => PWM Encoded, 2 level, 2 edges/tooth 11 => PWM Encoded, 2 level, 1 edge/tooth | 0 | SSM_RESET LBIST |

Table 26. RS_CTRL register

| ADDR | NAME | TYPE | BITS = 10 |
|---------|---------|------|---|
| 0001011 | RS_CTRL | RW | 9: WSS_EN_SAT_FLAGS, 8: WSS_READ_CURRENT, 5: INIT, 4:DIAG, 3:0 WSIENA |

WSICTRL register stores Remote sensor control field.

Bits 3 down to 0 of this register are used to enable WSS interfaces. These bits can be written only when INIT bit (bit 5) of this register is '1'. When INIT is cleared to 0, also bits 3 down to 0 are cleared to 0. Enable/Disable state of interfaces is maintained and it can be monitored by reading back RS_DATA_RSDR registers.

Bits 8 and 9 of this register can be changed only when INIT bit is '1'. When INIT is cleared to '0' these bits maintain their values.

Table 27. RS_CTRL register bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 9 | WSS EN SAT FLAGS: Allow to read WSS current saturation flags available in RS_DATA_RSDR_12 0 => disable flags 1 => enable flags | 0 | SSM_RESET LBIST |
| Bit 8 | WSS READ CURRENT: Allow to read instantaneous converted current in bit [9:0] of RS_DATA_RSDR_4/5/6/7 0 => reading base current 1 => reading instantaneous current | 0 | SSM_RESET LBIST |

Table 27. RS_CTRL register bit description (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 5 | INIT: Allow access to RS_CFG_x registers, RS_CTRL register bits 3 down to 0 and RS_AUX_CFG register. 0 => Off 1 => On | 0 | SSM_RESET LBIST |
| Bit 4 | DIAG: Allow access to WSS test reg 0 => Off 1 => On | 0 | SSM_RESET LBIST |
| Bit 3:0 | CHxEN: Channel x Output enable, updated by Reset Event or SPI write 0 => Off 1 => On | 0 | SSM_RESET LBIST |

Table 28. RS_AUX_CFG register

| Addr | Name | Type | Bits = 20 |
|---------|------------|------|---|
| 0001110 | RS_AUX_CFG | RW | Offset Thr Range= 19:10, Lo Thr Range = 9:0 |

RS_AUX_CFG register stores WSI Thresholds for fixed current trip-point method.

Table 29. RS_AUX_CFG register bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 19:18 | SECOND_RANGE_SEL: (valid only for adaptive thresholds): 00 => $\Delta I_{th2_{MIN}} = 12.5 \text{ mA}$, $\Delta I_{th2_{MAX}} = 15.5 \text{ mA}$; 01 => $\Delta I_{th2_{MIN}} = 11.0 \text{ mA}$, $\Delta I_{th2_{MAX}} = 17.0 \text{ mA}$; 10 => $\Delta I_{th2_{MIN}} = 9.5 \text{ mA}$, $\Delta I_{th2_{MAX}} = 18.5 \text{ mA}$; 11 => $\Delta I_{th2_{MIN}} = 8.0 \text{ mA}$, $\Delta I_{th2_{MAX}} = 20.0 \text{ mA}$; | 01 | SSM_RESET LBIST |
| Bit 17:10 | WSI_OFFSETS_TH[7:0]: In case of fixed thresholds this represents offset from low threshold to calculate the high threshold (see formula in Section 4.1). In case of adaptive thresholds this is the offset to calculate maximum value of base current IB0: $IB0_{MAX} = IB0_{MIN} + OFFSET_IB0$. In both cases LSB=93.75 μA typ. | 0x34 | SSM_RESET LBIST |

Table 29. RS_AUX_CFG register bit description (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 9:8 | FIRST_RANGE_SEL (valid only for adaptive thresholds): 00 ==> $\Delta I_{th1_MIN}=6.25mA$, $\Delta I_{th1_MAX}=7.75mA$; 01 ==> $\Delta I_{th1_MIN}=5.5mA$, $\Delta I_{th1_MAX}=8.5mA$; 10 ==> $\Delta I_{th1_MIN}=4.75mA$, $\Delta I_{th1_MAX}=9.25mA$; 11 ==> $\Delta I_{th1_MIN}=4.0mA$, $\Delta I_{th1_MAX}=10.0mA$; | 01 | SSM_RESET LBIST |
| Bit 7:0 | WSI_FIRST_TH[7:0]: In case of fixed thresholds this is used to calculate low threshold (see formula in 4.1). In case of adaptive thresholds this is the minimum value of IB0 ($IB0_{MIN}$ range from 0 to 24 mA). In both cases LSB=93.75 μA typ. | 0x33 | SSM_RESET LBIST |

WSI remote sensor data/fault register

Table 30. RS_DATA_RSDR_0-3 registers

| ADDR | Name | Type | Bits = 20 |
|---------|----------------|------|-----------------|
| 0010000 | RS_DATA_RSDR_0 | RO | See description |
| 0010001 | RS_DATA_RSDR_1 | RO | See description |
| 0010010 | RS_DATA_RSDR_2 | RO | See description |
| 0010011 | RS_DATA_RSDR_3 | RO | See description |

RS_DATA_RSDR_x register stores status bits of WSS interface. Output format depends on the status of bit 15.

No Fault condition:

Table 31. RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 0]

| Data Field | Description | Reset Value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 19:17 | CRC [2:0]: CRC based on bits [16:0] Update based on bits [16:0] | - | SSM_RESET LBIST |
| Bit 16 | STDSTL: Standstill indication (only for VDA sensor or PWM 2 edges) 0 => Valid sensor signal 1 => Standstill | 0 | SSM_RESET LBIST |

Table 31. RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 0] (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 15 | FLT: Fault Status, depending on fault status the DATA bits are defined differently. Cleared when all the fault bits are 0, set when one of the fault bits is 1 0 => No fault 1 => Fault | 1 | SSM_RESET LBIST |
| Bit 14 | Latch_D0: Latched D0, set when previous message contains a '1' in bit0, cleared on read (only for VDA sensor) 0 => no prior bit0 faults 1 => prior message(s) contained bit0 fault | 0 | SSM_RESET LBIST |
| Bit 13:12 | LCID[1:0]: Logical Channel ID 00 => ch1 01 => ch2 10 => ch3 11 => ch4 | - | SSM_RESET LBIST |
| Bit 11:0 | 12-bit data from wheel speed decoder VDA Data Format: DATA[7:0] Data bits DATA[11:8] Counter bits PWM Data Format: DATA[8:0] Pulse Data bits STD Data Format: All zeros, data bits not used | 0 | SSM_RESET LBIST |

Fault condition:

Table 32. RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 1]

| Data Field | Description | Reset Value | Reset Event |
|------------|---|-------------|--------------------|
| Bit 19:17 | CRC [2:0]: CRC based on bits [16:0] Update based on bits [16:0] | - | SSM_RESET LBIST |
| Bit 16 | NOT USED | 0 | - |
| Bit 15 | FLT: Fault Status, depending on fault status the DATA bits are defined differently. Cleared when all the fault bits are 0, set when one of the fault bits is 1 0 => No fault 1 => Fault | 1 | SSM_RESET LBIST |

Table 32. RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 1] (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 14 | On/Off: Channel on/off status, cleared by Reset Event or when the channel is commanded OFF via SPI WSICTRL or when the STG bit is set or WSITEMP bit is set 0 => Off 1 => On | 0 | SSM_RESET LBIST |
| Bit 13:12 | LCID[1:0]: Logical Channel ID 00 => ch1 01 => ch2 10 => ch3 11 => ch4 | - | SSM_RESET LBIST |
| Bit 11:10 | NOT USED | 0 | - |
| Bit 9 | STG: Short to ground of RSUHx (over current condition of RSUHx) 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 8 | STB: Short to battery of RSUHx ($V_{RSUHx} > V_{PREREG} + V_{RSUHxSTB}$) 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 7 | CURRENT HI: Set when channel current measured in RSULx exceeds $I_{THVBATP}$ for a time determined by an up/down counter 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 6 | OPENDET: Open Sensor detected. Set when channel current in RSULx is below I_{THOPEN} for a time determined by an up/down counter 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 5 | WSITEMP: Overtemperature detected 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 4 | INVALID: Invalid data, set when parity error is detected (when this check is feasible), valid only for VDA sensor. 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |

Table 32. RS_DATA_RSDR_0-3 registers bit description [Bit 15 = 1] (continued)

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 3 | NODATA: No data in buffer (valid also for two level STD sensors but in this case, where data bits are not expected, this bit is high during normal communication) 0 => no fault 1 => fault | 1 | SSM_RESET LBIST |
| Bit 2 | PULSE OVERFLOW: Pulse duration counter overflow_ (available only for PWM encoded WSS) 0 => no fault 1 => fault | 0 | SSM_RESET LBIST |
| Bit 1:0 | NOT USED | 0 | SSM_RESET LBIST |

Table 33. RS_DATA_RSDR_4-7 registers

| Addr | Name | Type | Bits = 20 |
|---------|----------------|------|--------------------------------|
| 0010100 | RS_DATA_RSDR_4 | RO | For channel 0, See description |
| 0010101 | RS_DATA_RSDR_5 | RO | For channel 1, See description |
| 0010110 | RS_DATA_RSDR_6 | RO | For channel 2, See description |
| 0010111 | RS_DATA_RSDR_7 | RO | For channel 3, See description |

Table 34. RS_DATA_RSDR_4-7 registers bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|--------------------|
| Bit 19:10 | the content of this register is value of first delta (ΔI_{th1}) LSB=93.75 μ A typ. | 0x4B | SSM_RESET LBIST |
| Bit 9:0: | In case WSS_READ_CURRENT bit = 0 the content of this register is value of base current (IB0); in case WSS_READ_CURRENT bit = 1 the content of the register is value of instantaneous current in RSULx pin. In both cases LSB=93.75 μ A typ. | 0x4A | SSM_RESET LBIST |

Table 35. RS_DATA_RSDR_8-11 registers

| Addr | Name | Type | Bits = 10 |
|---------|-----------------|------|--------------------------------|
| 0011000 | RS_DATA_RSDR_8 | RO | For channel 0, See description |
| 0011001 | RS_DATA_RSDR_9 | RO | For channel 1, See description |
| 0011010 | RS_DATA_RSDR_10 | RO | For channel 2, See description |
| 0011011 | RS_DATA_RSDR_11 | RO | For channel 3, See description |

Table 36. RS_DATA_RSDR_8-11 registers bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|-------------|
| Bit 9:0: | the content of this register is value of second delta (ΔI_{th2}) LSB = 93.75 μ A typ. | 0x96 | SSM_RESET |

Table 37. RS_DATA_RSDR_12 register

| Addr | Name | Type | Bits = 12 |
|---------|-----------------|------|-----------------|
| 0011100 | RS_DATA_RSDR_12 | RO | See description |

Table 38. RS_DATA_RSDR_12 register bit description

| Data Field | Description | Reset Value | Reset Event |
|------------|--|-------------|-------------|
| Bit 11:9 | (2nd range saturation flag, 1st range saturation flag, Base current saturation flag) related to channel 3. Enabled only when WSS_EN_SAT_FLAGS (bit 9 of RSCTRL register) is 1. | 0x0 | SSM_RESET |
| Bit 8:6 | (2nd range saturation flag, 1st range saturation flag, Base current saturation flag) related to channel 2. Enabled only when WSS_EN_SAT_FLAGS (bit 9 of RSCTRL register) is 1. | 0x0 | SSM_RESET |
| Bit 5:3 | (2nd range saturation flag, 1st range saturation flag, Base current saturation flag) related to channel 1. Enabled only when WSS_EN_SAT_FLAGS (bit 9 of RSCTRL register) is 1. | 0x0 | SSM_RESET |
| Bit 2:0 | (2nd range saturation flag, 1st range saturation flag, Base current saturation flag) related to channel 0. Enabled only when WSS_EN_SAT_FLAGS (bit 9 of RSCTRL register) is 1. | 0x0 | SSM_RESET |

Table 39. RSU_STATUS register

| ADDR | NAME | TYPE | BITS = 8 |
|---------|------------|------|--|
| 0001010 | RSU_STATUS | R | LS Over Current and Short to ground Status |

Table 40. RSU_STATUS register bit description

| Data Field | Description | Reset Value | TYPE |
|------------|---|-------------|--------------------|
| Bit 7:4 | LS OVER CURRENT channels 3:0. (Active if the wss LS are ON) 0 => NO FAULT 1 => FAULT | 0 | SSM_RESET LBIST |
| Bit 3:0 | LS Short To Ground channels 3:0. (Active if the wss LS are OFF) 0 => NO FAULT 1 => FAULT | 0 | SSM_RESET LBIST |

5.2 Tracking regulation

RSUH0 and RSUH1 output pins can be configured as independent tracking regulators; this is the default configuration at start-up. Each regulator tracks the voltage reference given by the VCC (default) or VCC5 rail, depending on the user selection via SPI command. The 2 channels can be activated or deactivated independently (default state is off). Over/under voltage and over current monitoring are applied to RSU0/1 channels when in tracking regulator configuration and result bits are available via SPI.

5.3 Remote sensor interface fault protection

Each output is short circuit protected by an independent current limit and a thermal detection circuit. Current limit and overcurrent detection are present for both RSUHx and RSULx and they are independent of RSUHx and RSULx. In case RSUHx overcurrent is detected the output stage is disabled after filter time while in case of RSULx overcurrent it's not disabled. In any case if the thermal protection (shared between RSUH and RSUL) is triggered the output stage is disabled. In case the thermal warning level would not be reached, the current limitation circuitry will prevent damages on the channel, while operating the output. This fault condition does not interfere with the normal operation of the IC or with the operation of the other channels.

All RSUHx(x=0,1,2,3) are independently protected against a short to battery condition. Short to battery protection disconnects the channel from its supply rail to guarantee that no adverse condition occurs within the IC. The channel in short to battery is not shutdown by this condition. Other channels are not affected in case of short of one output pin.

The sensor interface of RSULx(x=0,1,2,3) also offers open condition (only in ON state) and short to ground detection (only in OFF state). The channel in this condition is not shutdown. If there is open circuit for RSUHx, it will be detected by open detection of corresponding RSULx if the sensor is still connected to RSULx.

The short to ground detection is implemented with a pull-up current (IRSUL_PU) and a voltage comparator (V_{STGTH}) on RSULx (x=0,1,2,3). Requirement is that external short to

ground with a resistance $\leq 7\text{ k}\Omega$ will be detected as short condition while a short with a resistance $\geq 19\text{ k}\Omega$ will not be detected. This kind of diagnostic is present only when channel is in OFF state.

The current sense is carried out in the low side through RSULx(x=0,1,2,3). The sensor interface implements either the detection of a leakage to battery or RSUHx condition, that will possibly raise the sensor current level. The channel in this condition is not shutdown.

5.4 Electrical characteristics

Table 41. WSS configuration

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------------------|---------------------------------------|---|------|------|------|----------|
| C_{RSUHx} | RSUHx load capacitance | Design Information | 6 | - | - | nF |
| C_{RSULx} | RSULx capacitance | Design Information | - | - | 30.8 | nF |
| R_{RSUx} | Output resistance | High side + low side Up to I_{LIMTH} | 4.75 | - | 30 | Ω |
| I_{BO} | Base Current | Auto-adjusting option (default value) | -9% | 7 | +9% | mA |
| I_{TH1} | 7 mA / 14 mA detection | - | -9% | 9.8 | +9% | mA |
| I_{TH2_RISE} | 14 mA / 28 mA rising edge detection | - | -9% | 19.8 | +9% | mA |
| I_{TH2_FALL} | 14 mA / 28 mA falling edge detection | - | -9% | 13.6 | +9% | mA |
| I_{THOPEN} | Open sensor detection | $V_{RSULx}=OPEN$ | 1.0 | - | 3.5 | mA |
| t_{OPEN_DET} | Open sensor detection filter time | - | 11 | - | 15 | μs |
| $I_{THVBATP}$ | Leakage to VBATP or RSUHx threshold | $V_{RSULx}=V_{RSUHx}$ | -15% | 23 | +15% | mA |
| $t_{LEAKBAT_DET}$ | Leakage to VBATP or RSUHx filter time | - | 97 | - | 110 | μs |
| $I_{LIMTHHS}$ | Output Current Limit | High side | -80 | - | -33 | mA |
| I_{OCTHHS} | Overcurrent threshold | High side | -80 | - | -31 | mA |
| $I_{LIMTHLS}$ | Output Current Limit | Low side | 35 | - | 80 | mA |
| I_{OCTHLS} | Overcurrent threshold | Low side | 35 | - | 80 | mA |
| $V_{RSUHxSTB}$ | Output Short to Battery Threshold | - | 10.0 | - | 100 | mV |
| I_{STBTH} | Static reverse current into VPREREG | $V_{RSUHx} > V_{VPREREG} + V_{RSUHxSTB}$ | 0.0 | - | 1 | mA |
| I_{RSUL_PU} | RSULx pull-up current | RSULx=OFF $0V < V_{RSULx} < V_{STGTH}$ | 80 | - | 180 | μA |

Table 41. WSS configuration (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------------------|--|--|---------|------|-------------------------------|-------|
| V _{STGTH} | LS short to ground threshold voltage | - | 1.35 | 1.65 | 1.95 | V |
| t _{STGTH} | LS short to ground detection filter time | - | 500 | - | 600 | μs |
| t _{BLNKHS} | HS diagnostics blanking time | - | 240 | - | 360 | μs |
| t _{LIMTHHS} | HS short to ground detection filter time | - | 350 | - | 650 | μs |
| V _{OH} | WSOx Output Voltage | I _{oh} = -1 mA | VCC-0.5 | - | - | V |
| V _{OL} | WSOx Output Voltage | I _{ol} = 1 mA | - | - | 0.4 | V |
| I _{LKG} | WSOx Output Leakage | Tri-state leakage | -10 | - | 10 | μA |
| t _{deglitch} | WS deglitch filter time | Configurable by SPI (4bits) | 8 | - | 15.5 | μs |
| - | Latency time between receiving sensor data @RSUHx pin and reaching V _{OH} on WSOx pin | Trigger point 80% of RSux modulated current) | - | - | 3.625 + t _{deglitch} | μs |
| - | Jitter on Latency time | - | - | - | 125 | ns |
| T _{JSD} | Thermal Shutdown | - | 175 | - | 200 | °C |
| T _{HYS_TSD} | - | - | 5 | 10 | 15 | °C |

Table 42. Tracking regulation configuration

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|----------------------------|---------------------------|--------------------|------------|------|------------|-------|
| I _{RSUH0} | RSUHx current capability | RSUH0 | 0 | - | 120 | mA |
| I _{RSUH1} | RSUHx current capability | RSUH1 | 0 | - | 120 | mA |
| C _{RSUHx} | RSUH load capacitance | Design Information | -25% | 2.2 | +25% | μF |
| R _{C_RSUHx} | Output capacitor ESR | Design Information | 0.01 | - | 1 | Ω |
| C _{RSUHx_EXT} | External sensor capacitor | Design Information | - | - | 150 | μF |
| V _{RSUHx_VCC} | Regulated output voltage | - | -20 | VCC | +20 | mV |
| V _{RSUHx_VCC_UV} | Undervoltage threshold | - | VCC - 10% | - | VCC - 5% | V |
| V _{RSUHx_VCC_OV} | Overvoltage threshold | - | VCC + 5% | - | VCC + 10% | V |
| V _{RSUHx_VCC5} | Regulated output voltage | - | -20 | VCC5 | +20 | mV |
| V _{RSUHx_VCC5_UV} | Undervoltage threshold | - | VCC5 - 10% | - | VCC5 - 5% | V |
| V _{RSUHx_VCC5_OV} | Overvoltage threshold | - | VCC5 + 5% | - | VCC5 + 10% | V |

Table 42. Tracking regulation configuration (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|----------------|-------------------------------------|---|------|-----|------|-------|
| - | Line regulation | $V(VPREREG) = 6V$ to $19V$, $I_{RSUHx} = 10mA$, $100mA$ | -10 | - | +10 | mV |
| - | Load regulation | $I_{RSUHx} = 10mA$ to $100mA$, $V(VPREREG) = 6V$, $19V$ | -10 | - | +10 | mV |
| - | Transient line regulation | $V(VPREREG) = 6V$ to $19V$, $dV/dt = 3V/\mu s$ $C_{RSUHx} = 2.2\mu F$ | -5 | - | +5 | % |
| - | Transient load regulation | $I_{RSUHx} = 10mA$ to $100mA$, $dI/dt = 100mA/\mu s$ $C_{RSUHx} = 2.2\mu F$ | -5 | - | +5 | % |
| PSRR | Power supply rejection ratio | $V(VPREREG) = 6.5V$, $V_{noise} = 1V_{pp}$ $f_{noise} = 20kHz$, $C_{RSUHx} = 2.2\mu F$ | 40 | - | - | dB |
| I_{LIMTH} | Output Current Limit | $V(RSUHx) = -2V$ | -340 | - | -140 | mA |
| I_{OCTH} | Overcurrent threshold | - | -340 | - | -140 | mA |
| $V_{RSUHxSTB}$ | Output Short to Battery Threshold | - | 10.0 | - | 100 | mV |
| I_{STBTH} | Static reverse current into VPREREG | $V_{RSUHx} > V_{VPREREG} + V_{RSUHxSTB}$ | 0.0 | - | 1 | mA |
| - | Soft start control | $I_{RSUHx} = 10mA$ $C_{RSUHx} = 2.2\mu F$ | 5 | - | 25 | V/ms |

6 General purpose output (GPO) driver

The device integrates one GPO driver operating in low-side mode. GPO driver can be used in multiple ways, depending on application needs.

Default configuration uses the GPO output interface to map the internal RSUHx signal on the GPOD0 pin. In this way, the decoded signal from the RSUHx sensor channel can be output as voltage information on the GPO output, even without intervention of the microcontroller. The following assignment matrix can be configured via SPI.

Table 43. Assignment matrix configured via SPI

| - | RSUH0 | RSUH1 | RSUH2 | RSUH3 | GPOD0_RSU_SEL |
|-------|-------|-------|-------|-------|---------------|
| GPOD0 | √ | - | - | - | 00 (default) |
| | - | √ | - | - | 01 |
| | - | - | √ | - | 10 |
| | - | - | - | √ | 11 |

GPO driver can also be configured to operate in ON-OFF mode or in PWM mode setting the desired duty cycle and frequency (128 Hz nominal) values through SPI register.

The default state of the driver is off. The driver can be activated via SPI.

The driver output structure is designed to stand -1V on its terminals and a +1V reverse voltage across source and drain. The GPO driver is protected against short circuits and thermal overload conditions. The driver is switched off if SSM_reset is asserted and the driver automatically restarts when the fault is cleared.

The device also offers an open load diagnostics while in ON state.

Table 44. GPO electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|------------------------|-----------------------------|---|-----|-----|-----|-------------|
| V_{sat} | Output saturation voltage | $V_{sat} = V_{GPOD0} - GND$; $I_{GPO0} = 70mA$ | - | - | 0.5 | V |
| I_{GPO_LIM} | Current Limit | $V_{GPOD0} - GND = 1.5V$ | 80 | - | 145 | mA |
| I_{GPO_OC} | Overcurrent | $V_{GPOD0} - GND = 1.5V$ | 80 | - | 145 | mA |
| $GPO_ilim_oc_delta$ | Delta_Ilim_Oc | $I_{GPO_LIM} - I_{GPO_OC}$ | 0.1 | - | 20 | mA |
| $I_{OpenLoad}$ | Open load current threshold | ON condition | - | - | 3 | mA |
| I_{LKG_GPODx} | GPO Output Leakage Current | $V_{battery} = V_{GPOD0} = 19V$; GPO in OFF condition | -10 | - | 10 | μA |
| $I_{reverse}$ | Reverse current | $V_{GPOD0} = -1V$ OFF condition | - | - | 1 | mA |
| T_{JSD} | Thermal Shutdown | - | 175 | - | 200 | C |
| T_{HYS_TSD} | - | All states off | 5 | 10 | 15 | $^{\circ}C$ |
| C_{GPO} | Load capacitor | Design info | 60 | 100 | 140 | nF |

Table 44. GPO electrical characteristics (continued)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|----------------------------|---------------------------------------|---|------|------|------|-----------|
| $I_{LKG_GPOdx_DEV_OFF}$ | GPO Leakage in Power-Off | $V_{GPOD0} = 19V$; $V_{BST}=0V$ | -10 | - | 10 | μA |
| dV/dt_{led_BLow} | Output Voltage Slew Rate | 30% - 70%; $R_{Load} = 273\Omega$, $C_{GPO} = 100nF$; $4.5 \leq V_{BATP} \leq 14 V$ | 0.1 | 0.25 | 0.55 | $V/\mu s$ |
| dV/dt_{led_BHigh} | Output Voltage Slew Rate | 30% - 70%; $R_{Load} = 273\Omega$, $C_{GPO} = 100nF$; $4.5 \leq V_{BATP} \leq 19 V$ | 0.01 | - | 0.55 | $V/\mu s$ |
| t_{ilim} | Current Limit Filter Time | - | 8 | - | 15 | μs |
| t_{open_load} | Open load filter time | - | - | - | 12.5 | μs |
| t_{mask} | Diagnostic mask delay after switch ON | $C_{GPO} = 100 nF$ typ; $R_{Load} = 273 \Omega$; $V_{BATP} = 14 V$ | 30 | 50 | 70 | μs |
| t_{JSDF} | Thermal Shutdown Filter Time | - | - | - | 12.5 | μs |
| f_{PWM} | PWM frequency | Programmable by SPI | 64 | - | 521 | Hz |

7 System functional safety implementations

7.1 General functional safety implementations

The device comes with a set of analog and digital design implementations:

- Double independent voltage reference;
- Oscillator clock monitoring;
- Battery monitoring;
- ECU supply voltage monitoring;
- Internal (more than 30 channels) and external (up to 7 channels) analog voltage measurements;
- Double watchdog control;
- Pump motor driver diagnostics;
- Reset output pin;
- Fault output pin;
- Fail-safe configurable output pin;
- Analog BIST on all analog voltage monitors;
- Digital BIST;
- Over temperature protection;
- Temperature sensor

7.2 System monitoring and reset handling

7.2.1 Analog to Digital algorithmic converter

The device hosts an integrated 10-bit Analog to Digital converter, running at a clock frequency of 16MHz. The ADC output is processed by a D to D converter with the following functions:


- Use of trimming bits to recover additional gain error due to resistor dividers mismatch;
- Digital low-pass filtering;
- Conversion from 12 to 10 bits.

10-bit data are filtered inside the digital section. The number of samples that are filtered vary depending on the chosen conversion. The sample number can be configured by accessing the ADC_CFG register. After low pass filter, the residual total error is +/-5 LSB. This error figure applies to the case of a precise reference voltage: the spread of reference voltage causes a proportional error in the conversion output.

The reference voltage of the ADC VREFH is set to 2.5 V and VREFL set to 0.1 V. Therefore the voltage range is 2.4 V.

The conversion time is comprised of several factors: the number of measurements loaded into the queue, the number of samples taken for any measurement, and the various settling times. An example of conversion time calculation for a full ADC request queue is reported in [Figure 10](#). The timings reported in [Figure 10](#) are nominal ones, min/max values can be obtained by considering the internal oscillator frequency variation reported in the DC characteristics section.

Figure 10. ADC conversion time

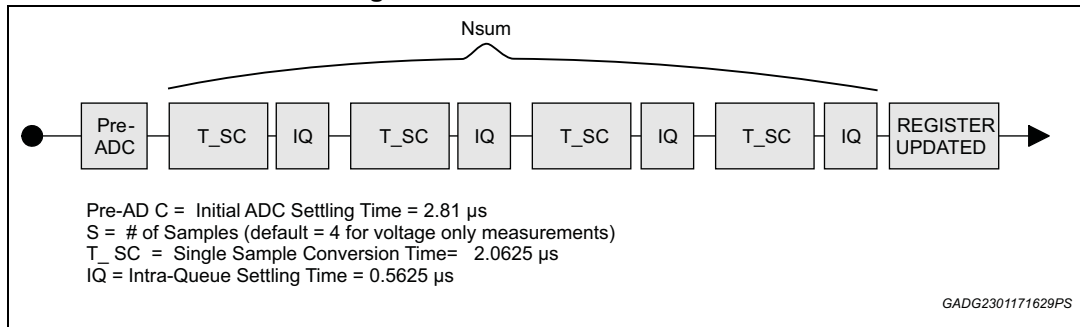

All electrical characteristics are valid for the following conditions unless otherwise noted:

$-40\text{ }^{\circ}\text{C} \leq T_j \leq +175\text{ }^{\circ}\text{C}$; $6 \leq V_{BST} \leq 19\text{ V}$

Table 45. Analog to digital converter

| Symbol | Parameter | Comments / Conditions | Min | Typ | Max | Unit |
|-------------------|--|---------------------------------------|------|-----|------|------|
| V_{ADC_RANGE} | ADC input voltage range | - | 0.1 | - | 2.5 | V |
| $V_{ADC_REF_H}$ | ADC Reference voltage | - | -3% | 2.5 | +3% | V |
| ADC_RES | ADC resolution ⁽¹⁾ | Design Info | - | 10 | - | bit |
| - | Differential non linearity error (DNL) | - | -2 | - | +2 | LSB |
| - | Integral non linearity error (INL) | - | -3.5 | - | +3.5 | LSB |
| - | Total error | Not including reference voltage error | -5 | - | +5 | LSB |
| - | Internal BG reference readout | - | 480 | 492 | 504 | LSB |
| - | Internal BG monitor readout | - | 480 | 492 | 504 | LSB |

1. LSB = (2.5 V / 1024) = 2.44 mV.

7.2.2 Voltage measurement

The device includes a 10-bit ADC converter with high voltage multiplexer stage to report any of the relevant internal voltage levels through SPI.

It further includes 3 discrete analog input pins AI2, AI3, AI4, 0.2V to 5V range, for external generic measurements.

All the channels are acquired cyclically after the SSM reset is released and the values are available on the ADC CONV REG x registers. A digital programmable filter is implemented in order to reduce the noise.

Setting the ADC CONFIG NSUM [2:0] bits in ADC_CFG register the filter will return the average values calculated on N samples acquired for each channel to be converted. The conversion time of the cycle depends on N following this table:

Table 46. Conversion time

| ADC CONFIG NSUM | N | Con. time (all channels) |
|-----------------|------------|--------------------------|
| “000” | 1 sample | 445 μs |
| “001” | 2 samples | 539 μs |
| “010” | 4 samples | 728 μs |
| “011” | 8 samples | 1106 μs |
| “100” to “111” | 16 samples | 1862 μs |

Proper scaling is necessary for various voltage measurements. The divider ratios vary by measurement and are summarized by function in the table below.

Table 47. Divider ratios vary by measurement are summarized by function

| Measurements | Divider ratio | | | | | | |
|-----------------------------|---------------|------|------|-----|-----|-----|-----|
| | 22:1 | 15:1 | 10:1 | 7:1 | 4:1 | 2:1 | 1:1 |
| CP | √ | - | - | - | - | - | - |
| VBST | - | √ | - | - | - | - | - |
| GPOD0 | - | - | √ | - | - | - | - |
| VB | - | - | √ | - | - | - | - |
| VB_SW | - | - | √ | - | - | - | - |
| VBM | - | - | √ | - | - | - | - |
| VDBATT | - | - | √ | - | - | - | - |
| VDS | - | - | √ | - | - | - | - |
| PDS | - | - | √ | - | - | - | - |
| IGN | - | - | √ | - | - | - | - |
| WDTDIS | - | - | - | √ | - | - | - |
| RSUH/L | - | - | - | - | √ | - | - |
| VPREREG | - | - | - | - | √ | - | - |
| VCC5 | - | - | - | - | √ | - | - |
| VCC | - | - | - | - | √ | - | - |
| VCORE | - | - | - | - | √ | - | - |
| SCORE | - | - | - | - | √ | - | - |
| VDD | - | - | - | - | √ | - | - |
| VINTA | - | - | - | - | √ | - | - |
| AI[0..4] | - | - | - | - | - | √ | - |
| Bandgap reference (BGR/BGM) | - | - | - | - | - | - | √ |
| Temperature sensor | - | - | - | - | - | - | √ |

Table 48. Voltage measurement electrical characteristics

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------------------------|--|---|-------|-----|------|-------|
| Ratio_1 | Divider Ratio | Guaranteed by design | - | 1 | - | V/V |
| Ratio_2 | Divider Ratio | Vinput_range_2 = 0.2 V ... 5 V | -0.8% | 2 | 0.8% | V/V |
| Ratio_4 | Divider Ratio | Vinput_range_4a = 0.4 V ... 10 V for V _{CORE} , SCORE; Vinput_range_4b = 1.5 V ... 10 V for the other | -3% | 4 | 3% | V/V |
| Ratio_7 | Divider Ratio | Vinput_range_7 = 1.5 V ... 17.5 V | -3% | 7 | 3% | V/V |
| Ratio_10 | Divider Ratio | Vinput_range_10 = 2 V ... 25 V | -3% | 10 | 3% | V/V |
| Ratio_15 | Divider Ratio | Vinput_range_15 = 5.5 V ... 35 V | -3% | 15 | 3% | V/V |
| Ratio_22 | Divider Ratio | Vinput_range_22 = 5.5 V ... 51 V | -3% | 22 | 3% | V/V |
| offset | Divider Offset | High impedance | -10 | - | 10 | mV |
| Rratio2 | Divider impedance | Multiplexer input to GNDA | 200 | - | 800 | kΩ |
| Rratio4 | Divider impedance | Multiplexer input to GNDA | 80 | - | 170 | kΩ |
| Rratio7 | Divider impedance | Multiplexer input to GNDA | 120 | - | 300 | kΩ |
| Rratio10 | Divider impedance | Multiplexer input to GNDA | 160 | - | 420 | kΩ |
| Rratio15 | Divider impedance | Multiplexer input to GNDA | 200 | - | 630 | kΩ |
| Rratio22 | Divider impedance | Multiplexer input to GNDA | 440 | - | 930 | kΩ |
| I _{leak_mux_on} | Multiplexer On-state input leakage current | For all divider ratio except Ratio_1 | - | - | 60 | μA |

Note: For more information about L9396 ADC accuracy, please locate the "L9396 ADC Conversion Error" calculator in the attachment section.


7.2.3 Reset output

RESET output pin conveys the active low reset signal generated by the device in case of over / under voltage conditions on the μ C supply rails or when a watchdog error (either from WD1 or WD2) is asserted.

It is implemented as an open drain output, therefore an external source can be connected to this output. An external 5 k Ω typ pull-up is recommended to ensure the proper functionality.

RESET output is able to operate and force output low also in standby mode only if VBST supply is present.

Figure 11. Reset input logic diagram

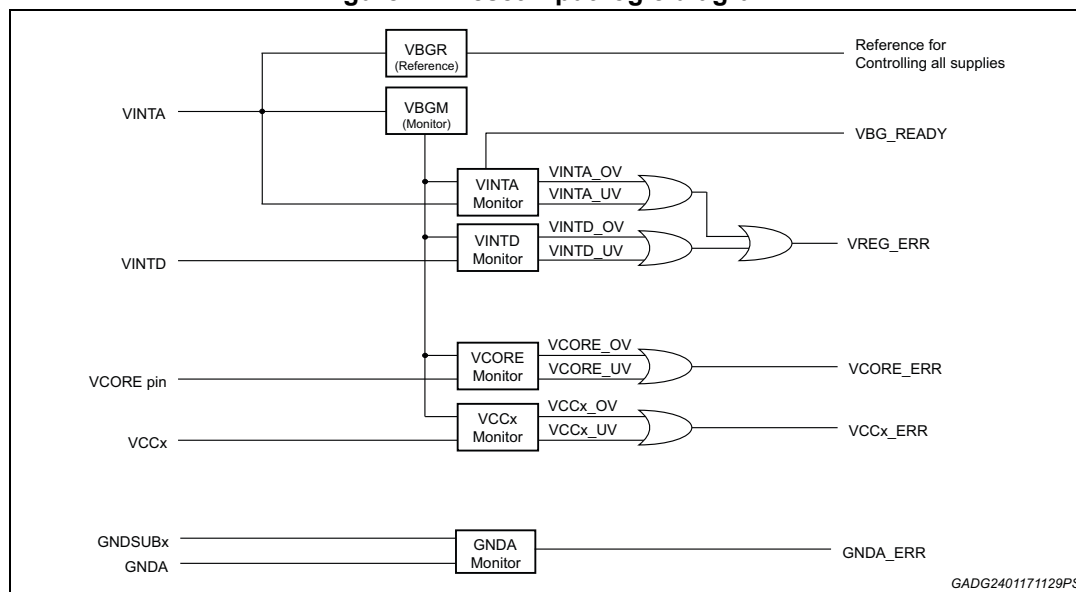

Three internal reset signals are generated by the device:


- **POR: Power On Reset** - This reset is asserted when GNDD is open or a failure is detected in the internal supplies or bandgap circuits. When active, all other resets are asserted.
- **WSM_RESET: Watchdog State Machine Reset** - This reset is generated when the POR is active or when a failure is detected in the VCCx or VCORE supply.
- **SSM_RESET: System State Machine Reset** - This reset is asserted when the POR or the WSM_RESET are active, or when a failure is detected in either Watchdog state machine.

The RESET pin is the active-low signal driven on the output pin, and is an inverted form of SSM_RESET.

The cause of a RESET activation is latched and reported into the SUPPLY CONTROL REGISTERS and cleared upon SPI reading.

The reset logic shall be controlled as shown in the diagram below:

Figure 12. Reset output logic diagram

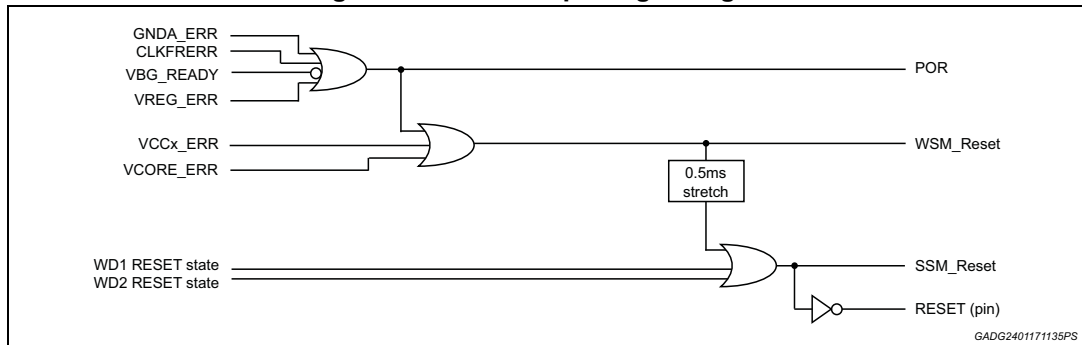

$-40^{\circ}\text{C} \leq T_j \leq 175^{\circ}\text{C}$; $3\text{ V} \leq V_{\text{CC}} \leq 5.5\text{ V}$, $5.6 \leq V_{\text{BST}} \leq 19\text{ V}$ unless otherwise specified.

Table 49. Reset electrical characteristics

| Symbol | Parameter | Conditions/Comments | Min. | Typ. | Max. | Unit |
|-----------------|---------------------------------|-------------------------------------|----------|------|------|---------------|
| V_{OL} | RESET Logic Output Low Voltage | 5 k Ω tied to VCC | - | - | 0.4 | V |
| V_{OH} | RESET Logic Output High Voltage | 5 k Ω tied to VCC | VCC-0.05 | - | - | V |
| t_r | Rise time | Load = 50 pF; 20%-80% | - | - | 1 | μs |
| t_f | Fall time | Load = 50 pF; 20%-80% | - | - | 1 | μs |
| Ileak_RESET | RESET leakage current | RESET output off 0 < RESET < VCC | -2 | - | 2 | μA |

7.2.4 Oscillator

The IC implements a clock frequency validation circuit. CLK ERR flag is the error signal reporting a problem with the integrated oscillator source. If the frequency of the integrated oscillator moves away from the desired one, the error flag is set. The check is performed by comparing the main oscillator with a secondary one; in case the frequency of the main oscillator shifts out of the specified range (in case of a stuck oscillator the CLOCK TIMEOUT ERROR is activated), the secondary oscillator source will recognize it, asserting the CLK ERROR flag.

The Clock monitor check is performed also comparing the second oscillator to the first one. The CLK ERROR flag is asserted also in case the frequency of the second oscillator shifts out of the specified range. To reduce the emissions of the main logic core and of the switching circuits in general, spread spectrum is operating on the main oscillator: the central 16 MHz frequency is varied by a triangular modulation at 125 kHz. Spread spectrum is always active and can be disabled setting the SPREAD SPECTRUM DISABLE MODE bit in the POWER_ON register.

$6\text{ V} \leq \text{VBST} \leq 19\text{ V}$; $-40\text{ }^\circ\text{C} \leq T_j \leq 175\text{ }^\circ\text{C}$ unless otherwise noted.

Table 50. Oscillator electrical characteristics

| Symbol | Parameter | Test condition | Min | Typ | Max | Unit |
|-----------------------------------|--|--------------------|------|-----|------|------|
| f_{OSCINT} | Internal Oscillator main frequency | - | 15.1 | 16 | 16.9 | MHz |
| $f_{\text{OSCINT_mod_freq}}$ | Spread spectrum modulation frequency | Guaranteed by scan | - | 125 | - | kHz |
| $f_{\text{OSCINT_mod_id_min}}$ | Spread spectrum minimum modulation index | - | -5 | - | -2 | % |
| $f_{\text{OSCINT_mod_id_max}}$ | Spread spectrum maximum modulation index | - | 2 | - | 5 | % |
| f_{OSCINT2} | Internal second oscillator frequency | - | 1.7 | 2 | 2.3 | MHz |

7.3 Fault output

The device provides a digital push-pull output. In its default configuration, the output is controlled low when the watchdogs are properly served and controlled high in case of watchdog errors. The meaning of watchdog error for WD1 is different in interrupt mode respect to warning lamp mode. In the first case it will be considered as a fault an event that causes a WD COUNTER decrease, while in the second case, the fault considered is a WD1 reset (so the most critical fault for WD1). About WD2 error, all faults will be considered, generating a reset.

This output can be used as a pre-driver for a passive warning lamp using the proper SPI Bit.

With a proper SPI configuration, FAULT output pin can act as an interrupt signal to the μC in case of:

- status change on wake-up input (IGN),
- over / under-voltage detections (see table below),
- thermal warnings (see table below).

Feedbacks can be programmed as mask-able via SPI register ADV_CONFIG (see [Table 51](#)).

In case of the above faulty conditions, with FAULT output configured in Interrupt mode, the FAULT output is driven high for $t_{\text{FAULT_ACT}}$ in case of IGN status change and Watchdogs errors, while it is driven high for other faults (OT and over/under voltage detections) until the faults disappear and $t_{\text{FAULT_ACT}}$ expires.

In case of faulty conditions, with FAULT output configured as passive warning lamp driver, the output is driven high until the faults disappear and the related flags are read.

FAULT output is enabled (exit of high impedance state) only at the end of power up cycle. This happens only when undervoltage of regulators (VPREREG, VCC, VCC5, VCORE) is no more present after power up.

After that FAULT stays enabled until power down by wake-up is triggered or undervoltage of VPREREG is generated.

Here the table of masking bits and fault sources

Table 51. Masking bits and fault sources

| | FAILSAFE / FAULT OUTPUT WD1 and WD2 FAULT MASK | FAILSAFE / FAULT OUTPUT THERMAL WARNING MASK | FAILSAFE / FAULT OUTPUT µC VOLTAGE FAULT MASK | FAILSAFE / FAULT OUTPUT BOOST FAULT MASK |
|-------------|--|--|---|--|
| WD Q/A ERR | MASKED | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP |
| WD PRUN ERR | MASKED | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP |
| BOOST OT | INTERRUPT / WARNING LAMP | MASKED | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP |
| BUCK OT | INTERRUPT / WARNING LAMP | MASKED | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP |
| CP OT | INTERRUPT / WARNING LAMP | MASKED | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP |
| VCORE UV/OV | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | MASKED | INTERRUPT / WARNING LAMP |
| VCC5 UV/OV | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | MASKED | INTERRUPT / WARNING LAMP |
| BOOST UV | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | INTERRUPT / WARNING LAMP | MASKED |
| IGN EDGE | INTERRUPT | INTERRUPT | INTERRUPT | INTERRUPT |

$40^{\circ}\text{C} \leq T_j \leq 175^{\circ}\text{C}$; $3\text{ V} \leq \text{VCC} \leq 5.5\text{ V}$, unless otherwise specified.

Table 52. Fault characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|------------------|---------------------------------|----------------------------|------------------|------|------|------|
| V_{OL} | Fault logic output low voltage | $I_{source} = 1\text{ mA}$ | - | - | 0.4 | V |
| V_{OH} | Fault logic output high voltage | $I_{sink} = 1\text{ mA}$ | $\text{VCC}-0.4$ | - | - | V |
| t_{FAULT_ACT} | Fault actuation time | - | 35 | 48 | 60 | µs |

7.4 Watchdog control


This device offers a 2-level watchdog control approach. The first control level is given by means of a query & answer watchdog (WD1). The second control level controls the PRN input pin to assert the proper frequency is delivered by the microcontroller (WD2).

7.4.1 Watchdog (WD1)

The device and the microcontroller exchange queries and answers on a defined timing base. An internal watchdog logic is implemented to inhibit load actuation such as to send reset signal, while it can disable directly these drivers through a second switch-off path:

1. Pump Motor Pre-Driver
2. GPO Driver
3. Fail Safe Pre Driver
4. VBAT Switch

Figure 13. WD1 block diagram

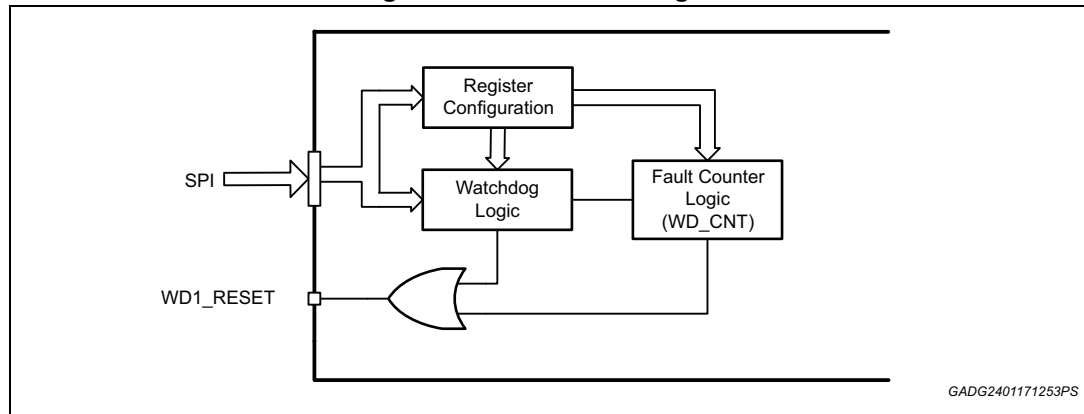

Two modes of timing checks are provided:

- Mono-directional: timing check based only on answers. Microcontroller must send queries (without timing window check) and answers on a defined time window;
- Bidirectional: timings are bidirectionally checked. L9396 must receive queries on a defined time window. Microcontroller must send answers on a defined time window.

In case time windows are not respected an error is generated.

Figure 14. Mono-directional timing check evolution

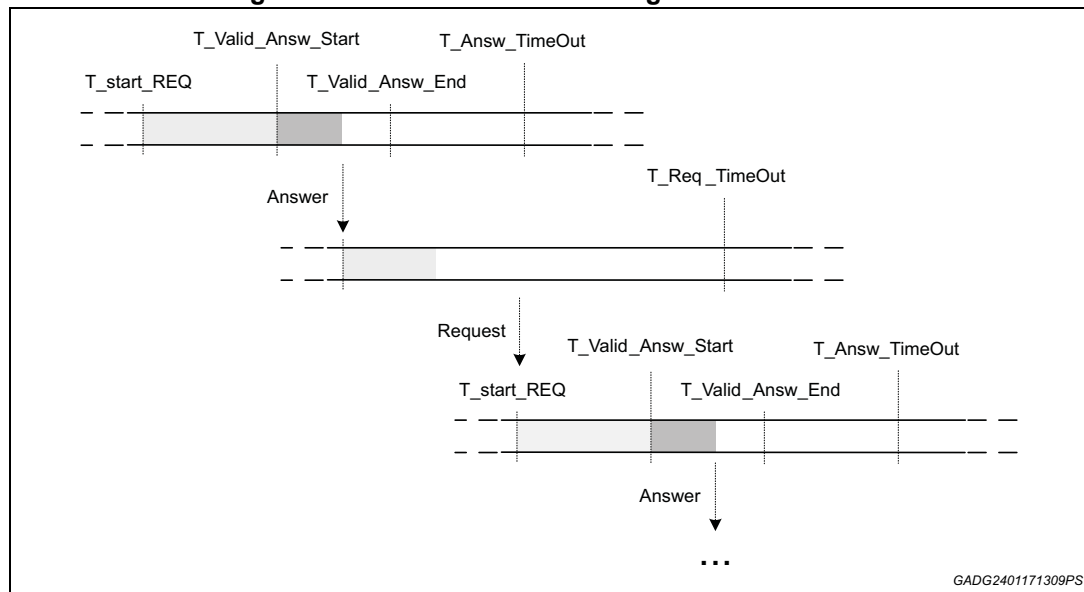


Figure 15. Bidirectional timing check evolution

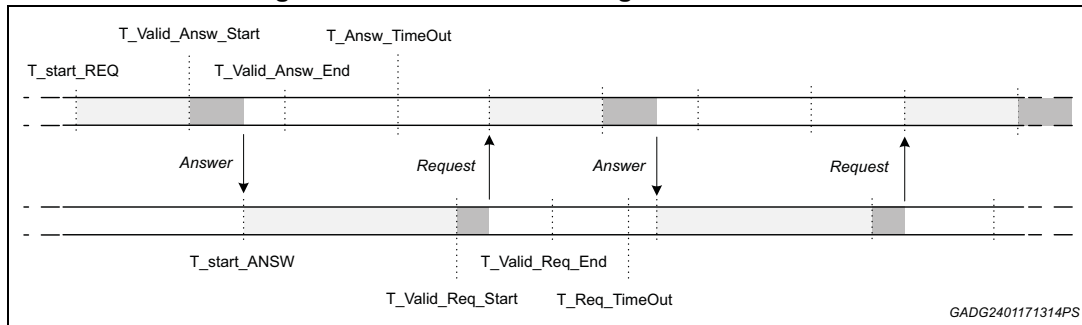


Table 53. Description of the timing parameter

| Timing parameter | Description |
|--------------------|---|
| T_start_REQ | Micro reads, through SPI register seed to be elaborated |
| T_Valid_Answ_Start | Starting time interval for Valid answers |
| T_Valid_Answ_End | Ending time interval for Valid answers |
| T_Answ_TimeOut | Time out for answer |
| T_start_ANSW | Micro sends, through SPI register answer to the IC |
| T_Valid_Req_Start | Starting time interval for next following request |
| T_Valid_Req_End | Ending time interval for next following request |
| T_Req_TimeOut | Time out for request |

Both the request and the answer must be sent on a predefined timing interval.

When the microcontroller finishes its boot procedures, it will send the first seed sending request to the device. In this moment all the timing counters will start and never stop.

In order to detect a fast event, such as two consequent SPI frames, the time base is based on the WD frequency of 250 kHz, which is obtained from the device clock period (16 MHz). The obtained clock period WD_CLK is 4 μ s. The clock used for the timing windows is a divided version of that in order to obtain a timing resolution of WD_CLK equal to 64 μ s or 256 μ s depending on the WD_CLK_DIV settings.

When the microcontroller sends the request of a new seed to the device (T_start_REQ) the WD_REQ_TMR timer starts to count. The microcontroller must send a valid answer inside the timing interval defined by the two SPI programmable parameters T_Valid_Answ_Start and T_Valid_Answ_End. In case the microcontroller sends an answer before T_Valid_Answ_Start or after T_Valid_Answ_End an error will be generated.

In case the WD_TO_RST_EN is set:

If no answer will arrive before T_Answ_TimeOut has elapsed, a WD1_RESET will be generated and the flag WD_RST_TO_Answ will be set.

When the microcontroller sends the answer to the device (T_start_ANSW) the WD_ANSW_TMR timer starts to count. Microcontroller must send a new seed request inside the timing interval defined by the two SPI programmable parameters T_Valid_Req_Start and T_Valid_Req_End. In case the Micro sends the request before T_Valid_Req_Start or after T_Valid_Req_End an error will be generated. If no request will

arrive before T_Req_TimeOut has elapsed, a WD1_RESET will be generated and the flag WD_RST_TO_Req will be set.

In case the WD_TO_RST_EN is not set:

The error event counter, WD_CNT, will be decreased and the device starts to wait again for the answer with the same timing procedure.


L9396 starts the WD evolution state machine in IDLE mode in which it is waiting for the first seed request from microcontroller through SPI. In this way the starting period is completely under the control of the microcontroller allowing to safely conclude boot procedure before starting the WD seed request/answer mechanism. During this period WD configuration registers can be programmed. The first seed request acts when a WD state machine start. After this event the WD will never stop and WD configuration registers become read only and cannot be changed. The only exception is about the T_Valid_Answ_Start and the T_Valid_Req_Start. In case one of these parameters is changed, the timing window restarts and WD_CNT will be decremented by a WD_cnt_bad_step number of steps.

WD_CNT is a 4-bit counter used to collect good and bad events provided by the microcontroller.

A good event is a Request coming in the correct timing window if a Request is expected in the FSM, or a correct Answer coming in the correct timing window when expected.


A bad event is a wrong Answer or an answer in a wrong timing window, a Request in a wrong timing window (in bidirectional mode), a timeout event, a Request when an Answer is expected or an Answer when a Read is expected.

Figure 16. Timing State evolution depending on WD_TO_RST_EN and WD_REQ_CHECK_EN

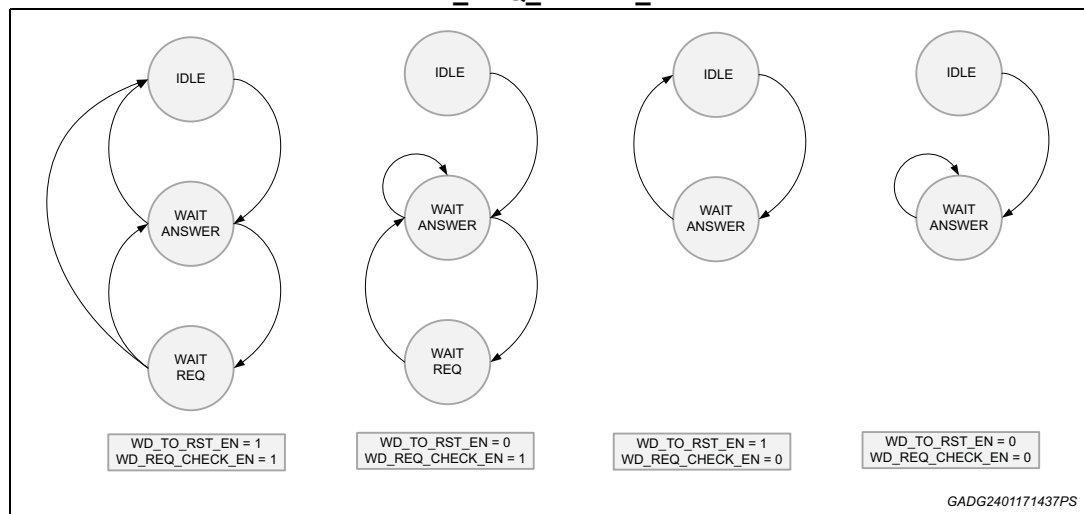

Note: Also in mono-directional mode the FSM is waiting a Query after an Answer in order to send a new seed to μ C but in this configuration the Timing check on Queries is not performed and WD_CNT is not decremented in case of request timing error except for Timeout.

Figure 17. WD1 state machine

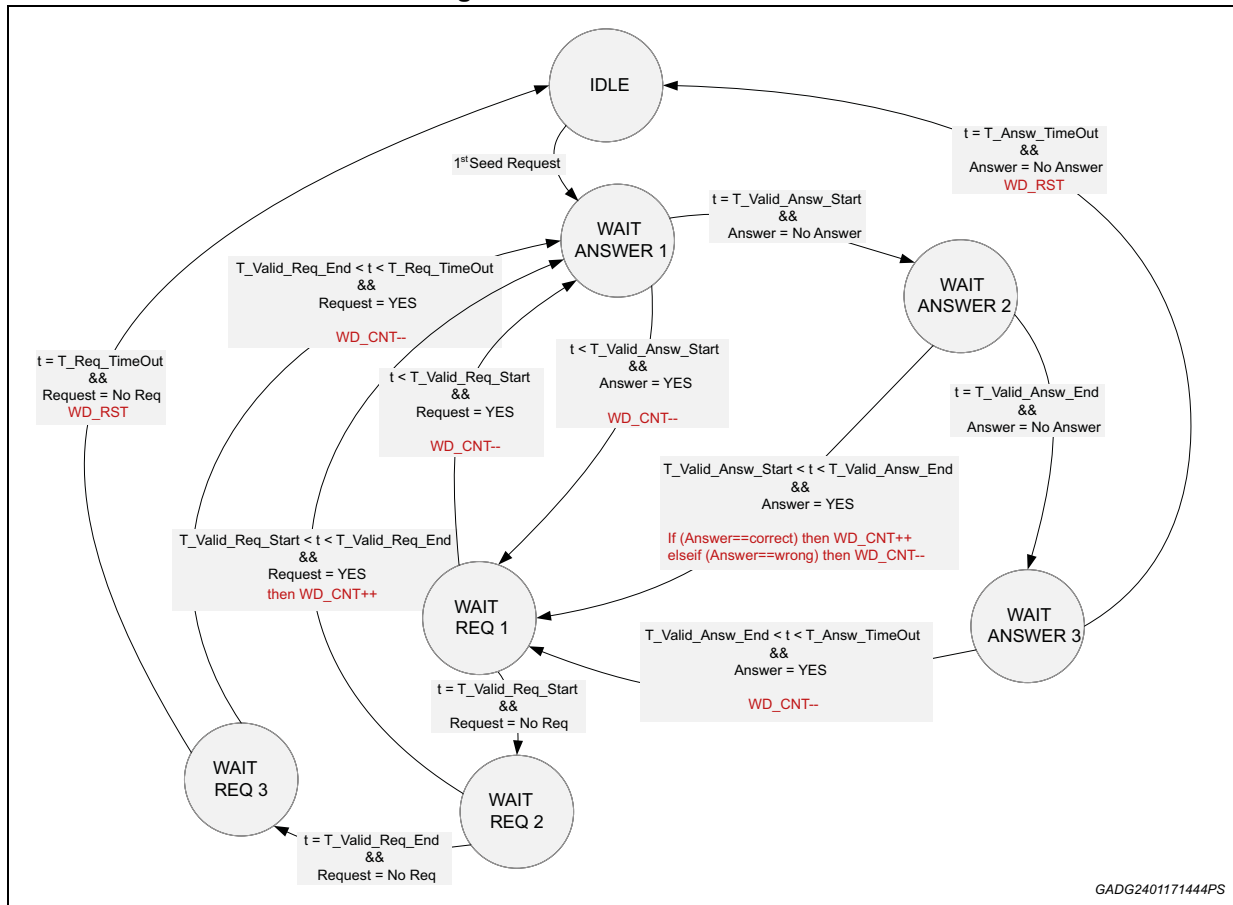

GADG2401171444PS

Depending on the value of the WD_CNT counter the device will stop the drivers, will send the WD1_RESET or will enable the drivers.

The WD_CNT will be incremented by a number of steps as defined through the SPI configurable parameter WD_cnt_good_step each time a correct answer is given in the right time interval or a Query arrives in the right time interval. In all the other cases, as defined in the WD state machine, the WD_CNT will be decremented by a number of steps as defined through the SPI configurable parameter WD_cnt_bad_step.

If WD_CNT reaches the value of zero two different behaviors are possible depending on the value of WD_RST_EN. If WD_RST_EN is set to 1 then a WD_RST will be sent by the device and the flag WD_RST_CNT will be set; else if WD_RST_EN is set to 0 then the WD_RST will not be sent by the device but the flag WD_RST_CNT will be set.


Two different thresholds are defined (both programmable through SPI): WD_th_low and WD_th_high.

If WD_CNT value is lower than WD_th_low, but greater than zero, the drivers are disabled such as any WD_RST. If WD_CNT is greater than WD_TH_LOW and lower than WD_TH_HIGH the load actuation is managed in hysteresis mode:

If drivers are ON it will be stopped only when WD_CNT becomes lower than WD_TH_LOW, while if actuation was OFF it will be performed only when WD_CNT becomes equal to WD_TH_HIGH and only when WD_CNT exceeds this threshold drivers are activated.

In this way, activation of the drivers can be performed only if the watchdog has been started and a certain number of good Request/Answer has been exchanged.

Figure 18. WD1_RESET & DRIVERS ENABLE versus WD_CNT value

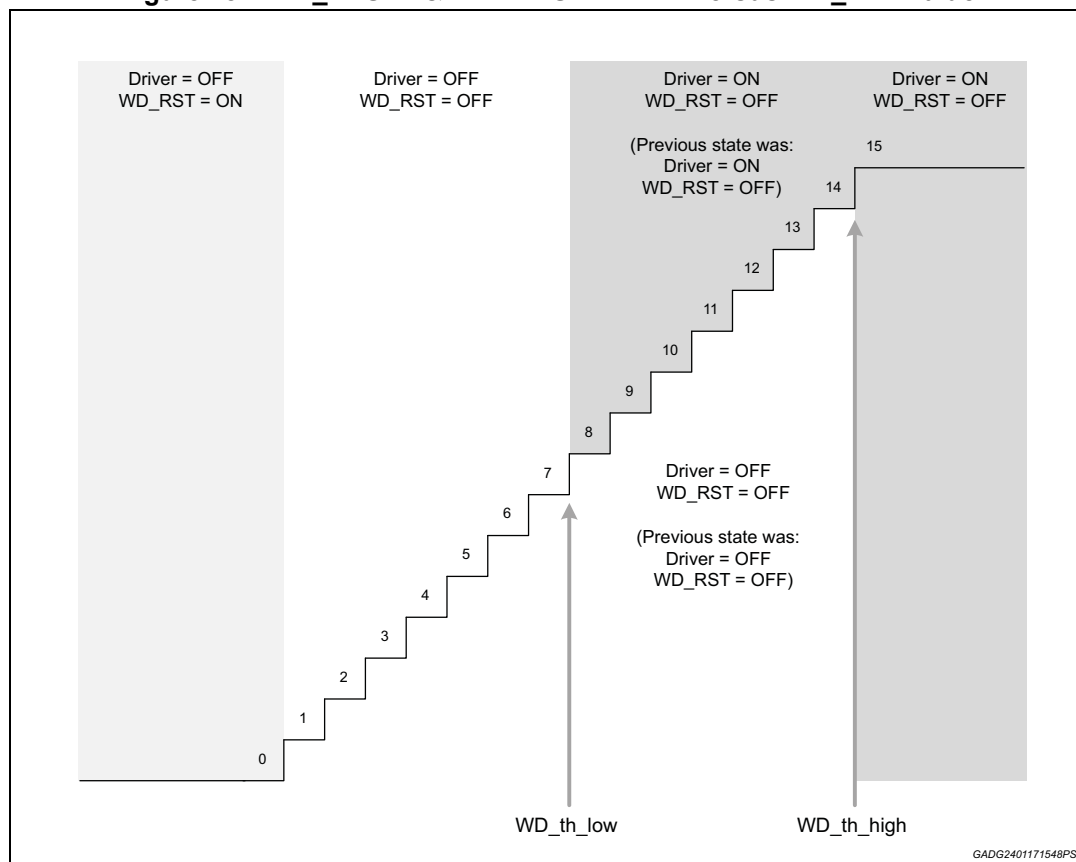


All the status information is stored into the WD_Status_reg, readable through SPI. This register will be cleaned as a consequence of each read operation. In case a WD1_RESET is sent to the microcontroller, the device restarts the WD state machine in IDLE mode waiting for the seed request from microcontroller through SPI. This is valid also in case PRUN WD sends a reset to μC. WD configuration registers are preserved, but can be modified by the microcontroller before the WD mechanism has started. In the same way, also the status register, WD_Status_reg, is preserved and can be read through SPI.

Two cases of unexpected errors have been identified:

- If a request of a new seed arrives to the device before the previous answer is received, the device will serve the new request, sending the old seed decreasing the value of WD_CNT by the amount WD_cnt_bad_step.
- If an answer arrives to the device before a new request and after another answer, the device will ignore this answer but it will decrease the value of WD_CNT by the amount WD_cnt_bad_step.

Seeds are 8-bit long words generated by a 7-bit LFSR pseudo-random algorithm. A new seed is sent into SPI word (WD_Seed) each time a new seed request (T_start_REQ) is sent to the device (if the last answer was correct).

Figure 19. Seed generation algorithm block diagram

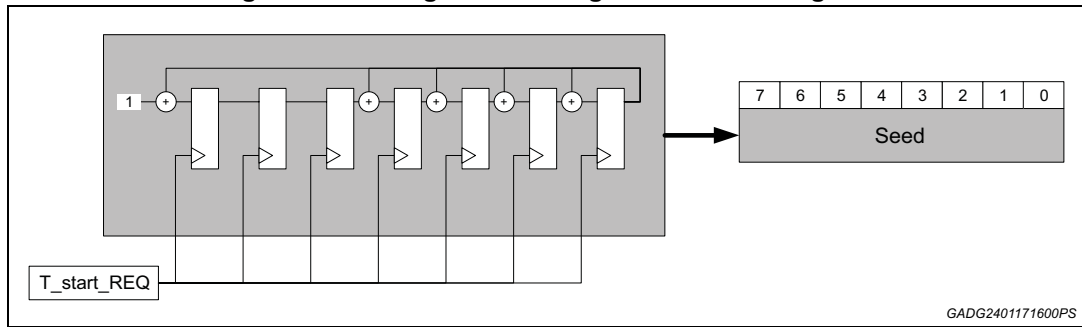

Seed is generated by the LFSR algorithm in Figure above. In particular the algorithm generates a 7-bit length word, while the seed has 8 bits including a zero as MSB. In this way the seeds are always positive. A new seed will be stored onto the WD_Seed only in case of a correct answer received. In case of an error, the same seed will be available into the WD_Seed until a correct answer will be received.

Figure 20. Seed selection and elaboration flow


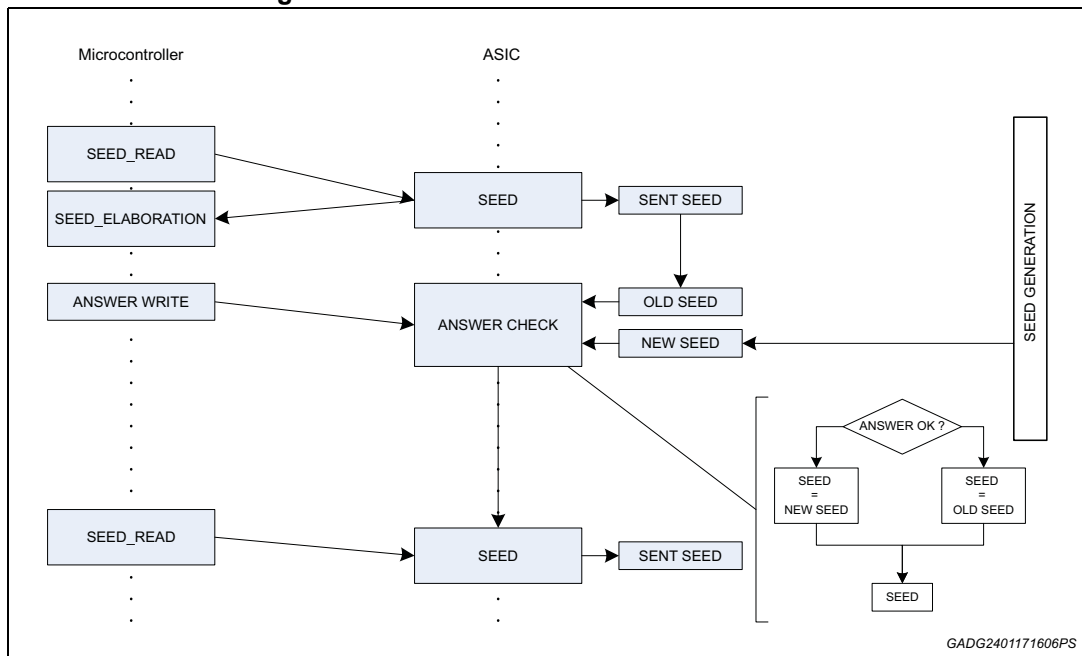


Figure 21. Answer check generation algorithm block diagram

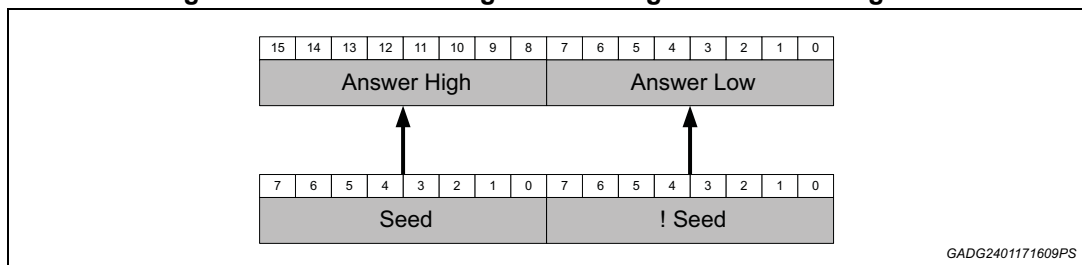

The answer is a 16-bit long word checked against a 16-bit word composed by two bytes, Answer_Low and Answer_High, generated from the sent seed. Answer_Low is the logical 2's complement of the seed, while Answer_High is a replica of the seed being sent.

WD Seed

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|------|----|----|----|-----|---|---|---|---|---|---|---|---|---|
| | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| R | Addr | | | | | | | | Reserved | | | | | | | | | | Seed | | | | CRC | | | | | | | | | |

| SPI parameter | Size (bits) | default | Description |
|---------------|-------------|---------|---|
| Seed | 8 | - | Current value of the Seed sent to the Micro to be used for the Answer elaboration |

Note: WD Seed and WD Answer will be into the same SPI register. When a Read operation will be performed a new seed will be sent and the read will be treated as a new Seed request. When an Answer write will not be treated as a new Seed request and the seed related to that answer will be sent back.

WD Answer

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------|----|----|----|----|----|----|----|----------|----|----|----|-------------|----|----|----|------------|----|----|----|-----|----|---|---|---|---|---|---|---|---|---|---|
| | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| W | Addr | | | | | | | | Reserved | | | | Answer High | | | | Answer Low | | | | CRC | | | | | | | | | | | |

| SPI parameter | Size (bits) | default | Description |
|---------------|-------------|---------|---------------------------|
| Answer Low | 8 | - | Lower part of the answer |
| Answer High | 8 | - | Higher part of the answer |

Note: WD Seed and WD Answer will be onto the same SPI register. When a Read operation will be performed a new seed will be sent and the read will be treated as a new Seed request. When an Answer write will not be treated as a new Seed request and the seed related to that answer will be sent back.

WD Answer Timing

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------|----|----|----|----|----|----|----|----|----------------------|----|----|----|----|----|------------------------|----|----|----|----|----|--------------------|---|---|---|---|---|-----|---|---|---|---|
| | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| W | Addr | | | | | | | | - | T_Answ_TimeOut_Delta | | | | | | T_Valid_Answ_End_Delta | | | | | | T_Valid_Answ_Start | | | | | | CRC | | | | |

| SPI parameter | Size (bits) | default | Description |
|------------------------|-------------|---------|---|
| T_Valid_Answ_Start | 8 | 0xFF | Start of the timing window inside which answers must be received. Absolute value. Time = T_Valid_Answ_Start * WD_clk |
| T_Valid_Answ_End_Delta | 6 | 0x30 | End of the timing window inside which answers must be received. The value specified is an incremental time starting from T_Valid_Answ_Start. Time = (T_Valid_Answ_Start + T_Valid_Answ_End_Delta) * WD_clk |
| T_Answ_TimeOut_Delta | 6 | 0x00 | End of the period for answers acceptance. Once reached, the WD1_RESET signal will be sent independently of the Error status (WD_CNT). The value specified is an incremental time starting from T_Valid_Answ_Start and T_Valid_Answ_End_Delta. Time = (T_Valid_Answ_Start + T_Valid_Answ_End_Delta + T_Answ_TimeOut_Delta) * WD_clk |

SPI parameters are programmable only before the WD mechanism starts. After the first seed request, these parameters can be only read.

A WD1_RESET event does not clear programmed parameters; default values are applied only as a consequence of a WSM RESET.

WD Request Timing

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------|----|----|----|----|----|----|----|----|---------------------|----|----|----|----|----|-----------------------|----|----|----|----|----|-------------------|---|---|---|---|---|-----|---|---|---|---|
| | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| W | Addr | | | | | | | | - | T_Req_TimeOut_Delta | | | | | | T_Valid_Req_End_Delta | | | | | | T_Valid_Req_Start | | | | | | CRC | | | | |

| SPI parameter | Size (bits) | default | Description |
|-----------------------|-------------|---------|---|
| T_Valid_Req_Start | 8 | 0xFF | Start of the timing window inside which requests must be received. Absolute value. Time = T_Valid_Req_Start * WD_clk |
| T_Valid_Req_End_Delta | 6 | 0x30 | End of the timing window inside which requests must be received. The value specified is an incremental time starting from T_Valid_Req_Start. Time = (T_Valid_Req_Start + T_Valid_Req_End_Delta) * WD_clk |
| T_Req_TimeOut_Delta | 6 | 0x00 | End of the period for requests acceptance. Once reached, the WD1_RESET signal will be sent independently of the Error status (WD_CNT). The value specified is an incremental time starting from T_Valid_Req_Start and T_Valid_Req_End_Delta. Time = (T_Valid_Req_Start + T_Valid_Req_End_Delta + T_Req_TimeOut_Delta) * WD_clk |

SPI parameters are programmable only before the WD mechanism starts. After the first seed request, these parameters can be only read.

A WD1_RESET event does not clear programmed parameters; default values are applied only as a consequence of a WSM_RESET.

WD Counter Setup

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|------|----|----|----|----|----|----|----|----|-----------|-----------------|--------------|------------|----|-----------|------------|------------------|-----------------|-----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| | 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| W | Addr | | | | | | | | - | WD_RST_EN | WD_REQ_CHECK_EN | WD_TO_RST_EN | WD_CLK_DIV | - | WD_Th_Low | WD_Th_High | WD_cnt_good_step | WD_cnt_bad_step | CRC | | | | | | | | | | | | | |

| SPI parameter | Size (bits) | default | Description |
|------------------|-------------|---------|--|
| WD_RST_EN | 1 | 1 | Enable for the WD_RST signal. 0: WD_RST signal not sent 1: WD_RST signal sent in case of failure |
| WD_REQ_CHECK_EN | 1 | 0 | Enable for the Request timing checking. 0: Request timing check not performed 1: Request timing check performed |
| WD_TO_RST_EN | 1 | 0 | Enable for the RST after Timeout generation. 0: RST not generated after a TO event 1: RST generated after a TO event |
| WD_CLK_DIV | 1 | 0 | Frequency Clock division setup. 0: clock not divided (64 μ s) 1: clock divided by (256 μ s) |
| WD_Th_Low | 4 | 7 | Threshold level to inhibit the drivers. If WD_CNT is lower than the threshold no drivers are activated. WD_Th_Low must be lower than WD_Th_High and minimum 1. |
| WD_Th_High | 4 | 15 | Threshold level to start the actuation. If WD_CNT is lower than the threshold actuation will be performed depending on the previous state as shown in Figure 18 . WD_Th_High must be higher than WD_Th_Low. |
| WD_cnt_good_step | 3 | 1 | Number of incremental steps for WD_CNT as consequence of a good event |
| WD_cnt_bad_step | 3 | 3 | Number of incremental steps for WD_CNT as consequence of an error |

SPI parameters are programmable only before the WD mechanism starts. After the first seed request, these parameters can be only read.

A WD1_RESET event does not clear programmed parameters; default values are applied only as a consequence of a WSM_RESET.

WD Status register

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----|------|----|----|----|----|----|----|----------|----|----|----|--------------------|----|------------|---------------|----------------|-------------|--------------|-------------|--------------|---------------|--------------|---|---|---|-----|---|---|---|---|---|
| 31 | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| W | Addr | | | | | | | Reserved | | | - | WD_RST_Event_Value | - | WD_RST_Cnt | WD_RST_TO_Req | WD_RST_TO_Answ | WD_Late_Req | WD_Early_Req | WD_Bad_Answ | WD_Late_Answ | WD_Early_Answ | WD_Cnt_Value | | | | CRC | | | | | |

| SPI parameter | Size (bits) | default | Description |
|----------------|-------------|---------|---|
| WD_Cnt_Value | 4 | 7 | Current value of the WD counter |
| WD_Early_Answ | 1 | 0 | Flag set if the last answer has been sent too early related to the programmed timing parameters. 0: Ok 1: Answer sent before T_Valid_Answ_Start time |
| WD_Late_Answ | 1 | 0 | Flag set if the last answer has been sent too late related to the programmed timing parameters. 0: Ok 1: Answer sent after T_Valid_Answ_End time |
| WD_Bad_Answ | 1 | 0 | Flag set if the last answer has been sent inside the right timing window (between T_Valid_Answ_Start and T_Valid_Answ_End time) but it isn't the expected answer. 0: Ok 1: Wrong answer |
| WD_Early_Req | 1 | 0 | Flag set if the last request has been sent too early related to the programmed timing parameters. 0: Ok 1: Request sent before T_Valid_Req_Start time |
| WD_Late_Req | 1 | 0 | Flag set if the last request has been sent too late related to the programmed timing parameters. 0: Ok 1: Request sent after T_Valid_Req_End time |
| WD_RST_TO_Answ | 1 | 0 | Flag set if the WD1_RESET signal has been sent because Answer time out elapsed. 0: Ok 1: WD1_RESET because T_Answ_Timeout elapsed |
| WD_RST_TO_Req | 1 | 0 | Flag set if the WD1_RESET signal has been sent because Request time out elapsed. 0: Ok 1: WD1_RESET because T_Req_Timeout elapsed |

| SPI parameter | Size (bits) | default | Description |
|--------------------|-------------|---------|--|
| WD_RST_Cnt | 1 | 0 | Flag set if the WD1_RESET signal has been sent because error counter reached zero. 0: Ok 1: WD1_RESET because WD_CNT reached the value of zero |
| WD_RST_Event_Value | 4 | 0 | Current value of the WD_RST event already sent |

Except the WD_Cnt_Value and WD_RST_Event_Value fields, this register is automatically cleared once read.

A WD1_RESET event does not clear programmed parameters; default values are applied only as a consequence of a WSM_RESET.


7.4.2 Second Watchdog (WD2)

When PRN signal input via PRN pin is not in the range of certain frequency, RESET is asserted. The watchdog logic detects the only rising edge of PRN signal on PRN pin.

When RESET is deasserted (or at WDTDIS deasserting) the WD2 is in IDLE state for at least TWAIT in order to wait the Microcontroller's logic bist end; after TWAIT the WD2 works normally.

When PRN signal stops for at least Toff, RESET pin generates low signal for a time equal to TRL (equal to Ton_RESET). This signal returns to high after TRL and for a time defined as TRH. If PRN signal is still not a proper one, the RESET signal returns low for TRL and then back high, repeating the above sequence.

Figure 22. WD2 timing diagram

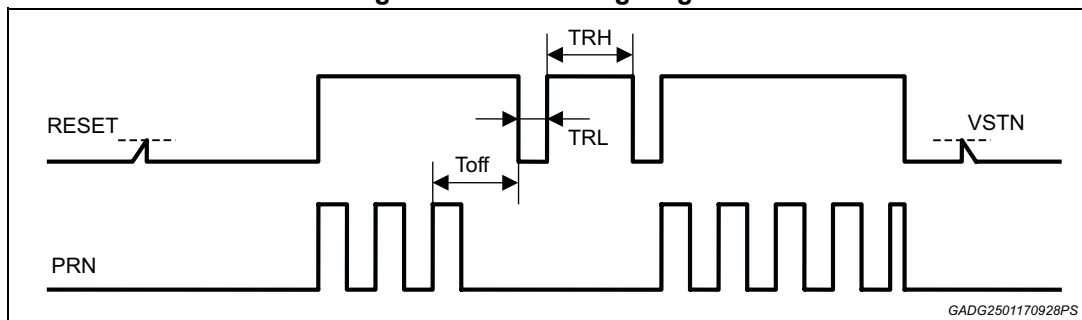


PRN frequency error is detected if the frequency is higher than 1 kHz and is not detected if the frequency is lower than 750 Hz. In other words, when the interval between PRN rising edges is less than 1 ms, watchdog detects PRN over frequency and does not clear WDT counter. If this condition continues during t_{off} , RESET pin drives low.

Table 54. WD2 characteristics

| Symbol | Parameter | Test condition | Min | Typ | Max | Unit |
|----------------------|---|--------------------------|-----|-----|------|------|
| FWD _{valid} | WD2 Frequency valid range | ADV_CONFIG[14,13] = '00' | 91 | - | 750 | Hz |
| | | ADV_CONFIG[14,13] = '01' | | - | 1500 | |
| | | ADV_CONFIG[14,13] = '10' | 46 | - | 750 | |
| | | ADV_CONFIG[14,13] = '11' | | - | 1500 | |
| T _{off} | WD2 timeout reset time | ADV_CONFIG[14] = '0' | 11 | - | 16.5 | ms |
| | | ADV_CONFIG[14] = '1' | 22 | - | 33 | |
| TRH | RESET re-engagement time between two consecutive assertion events | | 200 | - | - | ms |
| TWAIT | WD2 quiescent time at power-up | | 200 | - | - | ms |

Figure 23. WD2 diagram

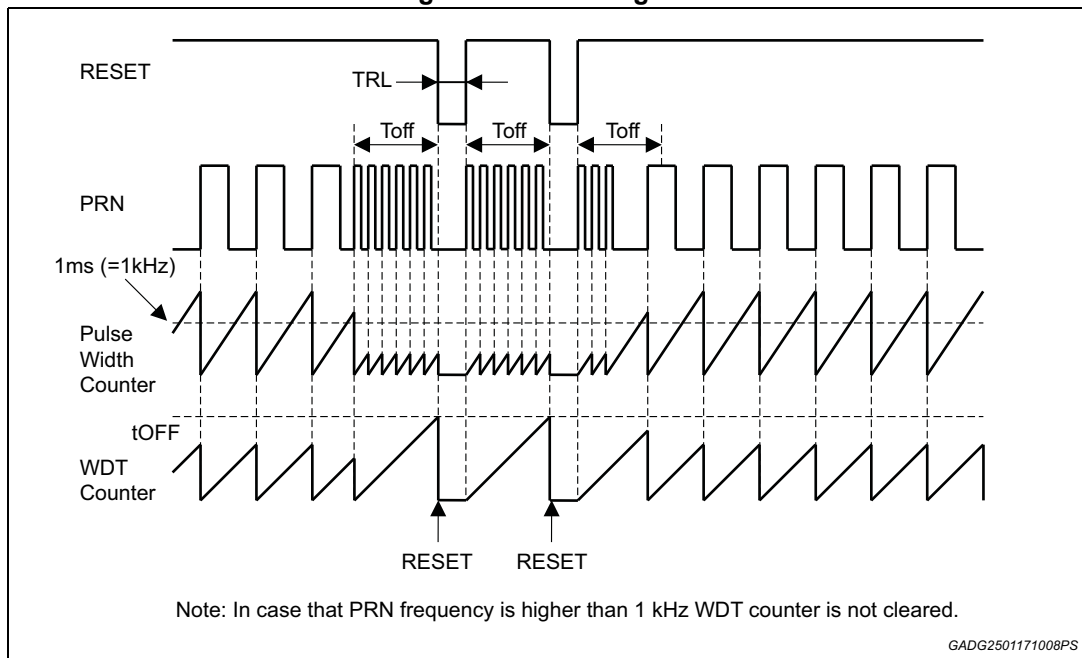

7.4.3 Watchdog Timer Disable Input (WDTDIS)

When controlled to a voltage higher than V_{IH_WDTDIS}, this pin is used to disable the WD2 timer. It implements a passive pulldown to ensure the voltage level would not interrupt the WD control in case of open connection. The state of this pin can be read by SPI because it is acquired by an internal A2D converter. When WDTDIS pin is asserted, the watchdog timer is disabled, the timer is reset to its starting value and no faults are generated. When the watchdog timer is disabled, WD_2_RESET_FLAG bit is set to '0'.

-40°C ≤ T_j ≤ 175°C; 3 V ≤ V_{CC} ≤ 5.5 V, unless otherwise specified.

Table 55. WDTDIS characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|---------------------------------|---------------|------|------|------|------|
| V _{IL_WDTDIS} | WDTDIS Logic Input Low Voltage | - | - | - | 0.75 | V |
| V _{IH_WDTDIS} | WDTDIS Logic Input High Voltage | - | 1.75 | - | - | V |
| V _{hysteresis} | WDTDIS Input hysteresis Voltage | - | 0.1 | - | 1 | V |
| WDTDIS PD | WDTDIS pull-down | WDTDIS = 3.3V | 10 | - | 100 | μA |

7.5 Fail safe output

L9396 provides the active low FSN output to let the system know the device enters the fail safe state. It means that the device has left its functional operating range due to:

- weak supply conditions or supply over/under voltage detections (see the table below for the signals monitored),
- thermal shutdown (see the table below),
- wrong SPI communications or wrong watchdog operation.

During fail-safe conditions, corresponding failure bits are set until the faults disappear and the flags are read. When the device enters a fail-safe condition, it remains in this state until both the following criteria are met:

- the failure condition disappears,
- the microcontroller performs a SPI reading on the failure bit(s).

The FSN output is intended to control functional safety logic through a redundant path (since the μC is not operational anymore) for up to ASIL-D applications.

The functional safety path is intended to control the applications loads in order to either maintain the functionality in a degraded mode or deactivate the loads. It is fault tolerant (programmed from 1 to 8 failures before activation) and has a programmable delay; all this can be programmed via SPI interface. To exit the fail-safe mode a specific SPI access on the original failure(s) has to be performed when the application recovers in order to clear the flags and fail safe fault tolerant counter.

FSN output is enabled (can be driven low) only at the end of power up cycle. This happens only when undervoltage of regulators (VPREREG, VCC, VCC5, VCORE) is no more present after power up.

After that FSN stays enabled until power down by wake-up is triggered or undervoltage of VPREREG is generated.

Here the table of masking bits and fault sources.

Table 56. Masking bits and fault sources

| | FAILSAFE / FAULT OUTPUT WD1 and WD2 FAULT MASK | FAILSAFE / FAULT OUTPUT THERMAL WARNING MASK | FAILSAFE / FAULT OUTPUT μC VOLTAGE FAULT MASK | FAILSAFE / FAULT OUTPUT BOOST FAULT MASK |
|-------------|--|--|---|--|
| WD Q/A ERR | MASKED | FAILSAFE FAULT | FAILSAFE FAULT | FAILSAFE FAULT |
| WD PRUN ERR | MASKED | FAILSAFE FAULT | FAILSAFE FAULT | FAILSAFE FAULT |

Table 56. Masking bits and fault sources (continued)

| | FAILSAFE / FAULT OUTPUT WD1 and WD2 FAULT MASK | FAILSAFE / FAULT OUTPUT THERMAL WARNING MASK | FAILSAFE / FAULT OUTPUT μ C VOLTAGE FAULT MASK | FAILSAFE / FAULT OUTPUT BOOST FAULT MASK |
|-------------|--|--|--|--|
| BOOST OT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT | FAILSAFE FAULT |
| BUCK OT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT | FAILSAFE FAULT |
| VCC OT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT | FAILSAFE FAULT |
| CP OT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT | FAILSAFE FAULT |
| VCC UV/OV | FAILSAFE FAULT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT |
| VCORE UV/OV | FAILSAFE FAULT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT |
| VCC5 UV/OV | FAILSAFE FAULT | FAILSAFE FAULT | MASKED | FAILSAFE FAULT |
| SPI ERROR | FAILSAFE FAULT | FAILSAFE FAULT | FAILSAFE FAULT | FAILSAFE FAULT |

Table 57. Fail safe output

| Symbol | Parameter | Conditions/Comments | Min. | Typ. | Max. | Unit |
|-----------------|----------------------------------|--|--------------|------|------|---------|
| V_{OL} | FSN Logic Output Low Voltage | 5 k Ω tied to VCC | - | - | 0.4 | V |
| V_{OH} | FSN Logic Output High Voltage | 5 k Ω tied to VCC | VCC- 0.05 | - | - | V |
| t_r | Rise time | Load = 50 pF; 20%-80% | - | - | 1 | μ s |
| t_f | Fall time | Load = 50 pF; 20%-80% | - | - | 1 | μ s |
| I_{leak_FSN} | FSN leakage current | FSN output off 0 < FSN < VCC | -2 | - | 2 | μ A |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=000 | | 0 | | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=001 | 0 | - | 2 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=010 | 2 | - | 4 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=011 | 6 | - | 8 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=100 | 8 | - | 10 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=101 | 28 | - | 30 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=110 | 48 | - | 50 | mS |
| TFSN_DELAY | FSN digital assertion delay | Guaranteed by scan, ADV_CONFIG[7:9]=111 | 98 | - | 100 | mS |

7.6 Temperature sensor

The device provides an internal analog temperature sensor. The sensor is aimed at having a reference for the average junction temperature on silicon surface. The sensor is placed far away from power dissipating stages and drivers. The output of the temperature sensor is available via SPI through ADC conversion. The formula to calculate temperature from ADC reading is the following one:

$$T(^{\circ}\text{C}) = (0.154 - 2.5 * \text{ADCdec} / (2^{10} * 4.5)) * 220 / 0.369 + 180$$

where ADCdec is ADC reading in decimal.

Table 58. Temperature sensor

| Symbol | Parameter | Conditions/Comments | Min. | Typ. | Max. | Unit |
|------------------|------------------------------|---------------------|------|------|------|------|
| T _{MON} | Monitoring temperature range | - | -40 | - | 175 | °C |
| T _{ACC} | Temperature accuracy | - | -15 | - | 15 | °C |

7.7 Over temperature protection

Device is equipped with 9 independent thermal protection circuits placed close to circuits that can experience over temperature in fault condition.

These circuits are: 4 remote sensor interfaces (WSS), GPO driver, one shared between VCC and VCC5, VPREREG, Charge Pump, Boost.

The effect of thermal protections and how to manage this kind of fault is described in the paragraphs related to those blocks.

7.8 Bist

7.8.1 Logic Bist

In order to test the correct operation of the main safety relevant digital blocks, a logic bist is implemented.

The logic bist check can be controlled via SPI using the register BIST_CTRL.

The digital blocks checked are:

1. Wheel Speed Sensor Logic
2. Driver Controllers Logic
 - a) BATTERY SWITCH
 - b) PUMP MOTOR PRE DRIVER
 - c) GPO
 - d) FAIL SAFE PRE DRIVER
3. ADC Controller Logic

If Logic BIST runs the logic under test and the SPI registers related to these digital blocks are not available and reset to its default values at Logic Bist Exit.

Microcontroller can activate Logic bist setting the bit LOGIC BIST RUN = 1 in the register BIST_CTRL. After that, the Logic Under Test is in BIST mode: the sequential cells are

reconfigured as scan chains in order to be tested by an internal bist controller. Once μC sets LOGIC BIST RUN =1 it can perform a polling on BIST_CTRL register (bit 1:0) in order to read the status of Logic Bist Test.

"01" means BIST RUNNING

"10" BIST PASSED

"11" BIST FAILED

"00" BIST STOPPED

If BIST STATUS is "10" (or "11") the Logic Bist test is finished and passed (or failed).

Microcontroller can write LOGIC BIST RUN = 0 to exit from BIST mode at Logic Bist end (PASSED or FAILED) but also during the test (BIST RUNNING).

Once LOGIC BIST RUN is set from 1 to 0 the logic under test and SPI registers are reset to the default condition.

The IC does not take actions if the Logic Bist Test fails. The decision to enable/disable the drivers and WSS is however given to the μC .

Table 59. Logic Bist

| Symbol | Parameter | Conditions/Comments | Min. | Typ. | Max. | Unit |
|-------------------|--------------------------|---------------------|------|------|------|------|
| T _{BIST} | Duration of digital BIST | Design Information | 4.8 | 5.15 | 5.5 | ms |

7.8.2 Analog Bist

Analog BIST is performed periodically during normal operation on the overvoltage and undervoltage monitors of VDD, VINTA, VBST, VPREREG, VCORE, VCOREFDBK, VCC, VCC5 and Tracking regulators and open of GNDD. In case of ABIST fail, the failing comparator reports overvoltage or undervoltage or POR is asserted in case of GNDD open.

7.8.3 OTP check

In each power up cycle (POR transition from low to high) the content of internal OTP is checked. Parity bits have been implemented to monitor the change of state of the trimming bits. In case check is not completed or not passed a dedicated fault bit is set (OTP_STABLE bit of ADV_CONFIG register).

8 Serial Peripheral Communication

The SPI interface is used to configure the device, control the output and read the diagnostic and output status registers.

The SPI protocol is defined by frames of 32 bits with 3 bits of CRC (Cyclic Redundancy Check) both in input and output directions.

Every time the device sets a Clear on Read bit in one of the SPI registers (for example when an error is detected), such a bit will not be cleared until the corresponding register is read via SPI. The bit will not be reset if an SPI error occurs during the access to the register by the microcontroller or while L9396 sends the content of the register as an answer.

8.1 CRC Field Details

SPI frame (upstream/downstream) include a 3-bit CRC field. CRC field is evaluated /checked by using a three-degree poly $G3(x) = x^3+x+1$ and covers the bits 0:28 in the SPI frame.

CRC flops are initialized to 0 at the beginning of the SPI frame.

8.2 SPI frame

| | | | | | | | | | | | | | | | |
|-------------|--|--|--|--|--|--|--|--------------|--|--|--|--|--|--|--|
| Bit 0 to 15 | | | | | | | | Bit 16 to 31 | | | | | | | |
| SDI | | | | | | | | | | | | | | | |
| Frame 0 | | | | | | | | Frame 1 | | | | | | | |
| SDO | | | | | | | | | | | | | | | |
| Frame 0 | | | | | | | | Frame 1 | | | | | | | |

SDI

| FRAME 0 | | | | | | | | | | | | | | | | |
|---------|-----|---|---|---|---|---|---|---|--------------|----|----|----|----|----|----|--|
| | | | | | | | | | | | | | | | | |
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | |
| W/R | ADD | | | | | | | 0 | DATA[19..13] | | | | | | | |

| FRAME 1 | | | | | | | | | | | | | | | |
|-------------|----|----|----|----|----|----|----|----|----|----|----|-----------|----|----|----|
| | | | | | | | | | | | | | | | |
| 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| DATA[12..0] | | | | | | | | | | | | CRC[2..0] | | | |

- 0 : Write/Read
- 1...7 : Address
- 8 : '0'
- 9...28 : Data
- 29...31: CRC

SDO

| FRAME 0 | | | | | | | | | | | | | | | |
|-----------|---|---|---|---|---|---|---|---|--------------|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| GSW[8..0] | | | | | | | | | DATA[19..13] | | | | | | |

| FRAME 1 | | | | | | | | | | | | | | | |
|-------------|----|----|----|----|----|----|----|----|----|----|----|----|-----------|----|----|
| 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| DATA[12..0] | | | | | | | | | | | | | CRC[2..0] | | |

- 0...8 : SPI error
- 9...28 : Data
- 29...31: CRC

The GSW[8..0] bits are mapped as in the following figure:

Figure 24. GSW[8..0] bits

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------|-----------------|----------------|---------|---|---|---------------------|------------------|----------------|----------------|---------------|----|----|----|----|----|---------|---|---|---|---|---|---|---|-------------|---|---|----|----|----|----|----|----|
| | FRAME 0 | | | | | | | | | | | | | | | FRAME 1 | | | | | | | | | | | | | | | | |
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| MOSI | W/Rn | ADD | | | | | | | 0 | DATA | | | | | | | | | | | | | | CRC | | | | | | | | |
| MISO | SHORT FRAME ERR | LONG FRAME ERR | CRC ERR | | | CLOCK TIMEOUT ERROR | CLOCK ERROR FLAG | WSM RESET FLAG | SSM RESET FLAG | DATA [19 : 0] | | | | | | | | | | | | | | CRC [2 : 0] | | | | | | | | |

GADG2501171231PS

- 0: Short Frame Error (less than 32 bits received in the last frame)
- 1: Long Frame Error (more than 32 bits received in the last frame)
- 2: CRC Error (wrong CRC received in the last frame)
- 3:4: '00'
- 5: Clock Timeout Error (Oscillator stuck, RO)
- 6: Clock Error Flag / CLOCKFRERR (1st or 2nd oscillator with a wrong frequency, R/C)
- 7: WSM Reset Flag (R/C)
- 8: SSM Reset Flag (R/C)

8.3 SPI registers

The register table is on 10 pages containing 16 registers each. Address 3 MSBs indicate page selection, the remaining address 4 LSBs indicates the register.

Maximum word length of registers is 20 bits.

The bits **colored in gray** are called safe registers.

After the safe registers set has been written, the MCU sends a lock frame writing the lock word h-AAAAA into the write-protection register (address b-1000010).

From now on, it's mandatory to write consecutively the unlock words h-55555 (first access) and h-33333 (second access) into the write-protection register in order to write again the safe registers set.

The write-protection register echo (SDO) reports the lock-state: h-AAAAA in case of lock or h-55555 in case of unlock.

The write-protection register initial status is unlock.

The summary of the registers is defined in [Table 60](#).



Table 60. Registers summary

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|--------------|-------------------------------|------|---|----|----|--|---|----|--|----|--|--|---|---|--|---|---|--|---|---|---|---|---|--|---|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | W | R | W |
| 0000000 | 0 | 0 | RESERVED | NO OPERATION | N/A | | | | | | | | | | | | | | | | | | | | | | | |
| 0000001 | 0 | 1 | SYS_CONFIG_1 | CONFIGURATION 1 TYPE = R/W | R/W | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | |
| 0000010 | 0 | 2 | SYS_CONFIG_2 | CONFIGURATION 2 TYPE = R/W | R/W | PUMP MOTOR SWITCHING TMR 6μs=0, 12μs=1, 24μs=2, 48μs=3, 96μs=4, 192μs=5/6/7 DEFAULT = '0', RESET = SSM RESET | | | PROTECTED BATTERY SWITCH ENABLE DEFAULT = 1, RST = SSM RESET | | | GPO DRIVER RSU SEL [1:0] Range of values 0-3, WS ch 0-3 DEFAULT = 00, RST = SSM RESET | | | GPO DRIVER CONFIG [1:0] '00' WSO; '01' PWM MODE; '10' ON-OFF; '11' NOTHING DEFAULT = 0, RST = SSM RESET | | | GPO DRIVER ENABLE DEFAULT = 0, RST = SSM RESET | | | PUMP MOTOR PRE DRIVER OVERLAP TMR [4:0] (Range of values 0-23, 0.25-6μs; 24-31, 80μs) DEFAULT = 0000, RST = SSM RESET | | | | | | | |
| | | | | | | BUCK OC LIMITATION : 0=LOW, 1=HIGH DEFAULT=0, RST = POR | | | | TEMPERATURE SENSOR DISABLE DEFAULT = 0, RST = SSM RESET | | THERMAL PROT. DISABLE DEFAULT = 0, RST = SSM RESET | | | | | TRACK REGULATOR 1 SEL : 1=VCC5 - 0=VCC DEFAULT = 0, RST = SSM RESET | | TRACK REGULATOR 0 VOLTAGE SEL (1=VCC5 , 0=VCC) DEFAULT = 0, RST = SSM RESET | | TRACK REGULATOR 1 ENABLE DEFAULT = 0, RST = SSM RESET | | TRACK REGULATOR 0 ENABLE DEFAULT = 0, RST = SSM RESET | | BOOST ENABLE DEFAULT = 1, RST = SSM RESET | | BUCK VOLTAGE SELECTION : 1 = 7V2V - 0 = 6V5 DEFAULT = 0, RST = SSM RESET | |
| | | | | | | PUMP MOTOR PRE DRIVER VDS SEL [1:0] DEFAULT = 00, RST = SSM RESET | | | | PUMP MOTOR PRE DRIVER ENABLE DEFAULT = 0, RST = SSM RESET | | | | FAIL SAFE DRIVER VDS SEL [1:0] DEFAULT = 00, RST = SSM RESET | | | | FAIL SAFE DRIVER ENABLE DEFAULT = 0, RST = SSM RESET | | | | | | | | | | |

Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|------------------|---|------|------|--|----|--|---|---|----|-------------------|----|----------------------|---|----------------------|--|----------------------|---|--------------------------------------|---|----------------------|---|-----------------------|---|---|---|-------------------------|---|----------------------------|---|-------------------|---|-----------------------|---|----------------------|---|------------------------|---|---------------------|---|--------|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R |
| 0000011 | 0 | 3 | SYS_CONFIG_3 | CONFIGURATION 3 TYPE = R/W | R/W | - | - | - | - | GPO DRIVER PWM DUTY CYCLE [7:0] DUTY % = GPO DRIVER PWM DUTY CYCLE [7:0] * 100 / 255 DEFAULT=127 , RST = SSM RESET | | | | | | | | GPO DRIVER PWM PERIOD [7:0] PERIOD = 64µs * GPO DRIVER PWM PERIOD [7:0] + 1920 µs Range 0 – 214 , 521 Hz – 64Hz DEFAULT=92 , RST = SSM RESET | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0000100 | 0 | 4 | SUPPLY_CONTROL_1 | SUPPLY CONTROL 1 DEFAULT = 0 , RESET POR (masked during power up) TYPE = C/R | R | - | VCC OVER TEMPERATURE | - | VCC OVER CURRENT | - | VCC OVER VOLTAGE | - | VCC UNDER VOLTAGE | - | VCC5 OVER CURRENT | - | VCC5 OVER VOLTAGE | - | VCC5 UNDER VOLTAGE | - | VCCORE AS BUCK / 0 - VCORE AS LINEAR | - | VCORE OVER CURRENT | - | VCORE OVER VOLTAGE | - | VCORE UNDER VOLTAGE | - | VCORE OVER VOLTAGE | - | VCORE UNDER VOLTAGE | - | BUCK OVER CURRENT | - | BUCK OVER TEMPERATURE | - | BUCK OVER VOLTAGE | - | BUCK UNDER VOLTAGE | - | CP OVER TEMPERATURE | - | CP LOW |
| 0000101 | 0 | 5 | SUPPLY_CONTROL_2 | SUPPLY CONTROL 2 DEFAULT = 0 , RESET POR (masked during power up) TYPE = C/R (bits 19, 14:9, 3:0) TYPE = R/O (bits 7:6, 4) | R | - | PREREG BUCK OFF LATCHED (Read Only): 1=buck OFF; 0=buck ON | - | VCORE OFF LATCHED (Read Only): 1=VCORE OFF; 0=VCORE ON | - | VCORE MONITOR TYPE (Read Only): 1=VCORE; 0=VCOREFDB | - | CP LOW 2 | - | TRACK 1 OVER CURRENT | - | TRACK 0 OVER CURRENT | - | TRACK 1 OVER VOLTAGE | - | TRACK 1 UNDER VOLTAGE | - | TRACK 0 OVER VOLTAGE | - | TRACK 0 UNDER VOLTAGE | - | VCORE INTERNAL MONITOR VOLTAGE (Read Only) 0=3V; 1=5V | - | BOOST READY (Read Only) | - | BOOST KEPT OFF (Read Only) | - | BOOST ON FLAG | - | BOOST UNDER VOLTAGE | - | BOOST LOSS OF GROUND | - | BOOST OVER TEMPERATURE | | | | |



Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|----------------|--|------|--|----|----|----|----|----|----|----|----|--|---|---|---|--|---|---|---|---|---|---|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R |
| 0001011 | 0 | 11 | RS_CTRL | RSU CONTROL TYPE = W/R DEFAULT = 0, RESET = SSM RESET | R/W | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| 0001100 | 0 | 12 | RS_CFG_0_1 | RSU CONFIG 0 and 1 RESET = SSM RESET | R/W | WSS CONFIG ch. 1 [9:0] (see Wheel Speed Chapter) DEFAULT = 0010000000 | | | | | | | | | WSS CONFIG ch. 0 [9:0] (see Wheel Speed Chapter) DEFAULT = 0010000000 | | | | | | | | | | |
| 0001101 | 0 | 13 | RS_CFG_2_3 | RSU CONFIG 2 and 3 RESET = SSM RESET | R/W | WSS CONFIG ch. 3 [9:0] (see Wheel Speed Chapter) DEFAULT = 0010000000 | | | | | | | | | WSS CONFIG ch. 2 [9:0] (see Wheel Speed Chapter) DEFAULT = 0010000000 | | | | | | | | | | |
| 0001110 | 0 | 14 | RS_AUX_CFG | RSU AUX CONFIG DEFAULT = 0, RESET = SSM RESET | R/W | SECOND RANGE SEL DEFAULT = 01 | | | | | | | | | FIRST RANGE SEL DEFAULT = 01 | | | | | | | | | | |
| 0001111 | 0 | 15 | WSS_TEST | WSS TEST REGISTER DEFAULT = 0, RESET = SSM RESET | R/W | - | - | - | - | - | - | - | - | - | - | - | - | - | WSS TEST (8 : 0) DEFAULT = 0, RESET SSM RESET | | | | | | |
| 0010000 | 1 | 0 | RS_DATA_RSDR_0 | RS_DATA_RSDR_0 | R | WSS RS DATA ch.0 [19:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | |
| 0010001 | 1 | 1 | RS_DATA_RSDR_1 | RS_DATA_RSDR_1 | R | WSS RS DATA ch.1 [19:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | |
| 0010010 | 1 | 2 | RS_DATA_RSDR_2 | RS_DATA_RSDR_2 | R | WSS RS DATA ch.2 [19:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | |
| 0010011 | 1 | 3 | RS_DATA_RSDR_3 | RS_DATA_RSDR_3 | R | WSS RS DATA ch.3 [19:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | |



Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|-----------------|---|------|--|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---------------|--|---|---------------------------|---|---|---------------------------|---|---|---------------------------|---|---|---------------------------|--------------|----------|--------------|----------|--------------|----------|--------------|----------|--------------|----------|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | | | | | | | | | | | | |
| | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | | | | | | | | | | | | | | | | | | |
| 0010100 | 1 | 4 | RS_DATA_RSDR_4 | RS_DATA_RSDR_4 | R | WSS RS DELTA 1st PULSE ch.0 [9:0] RESET SSM RESET | | | | | | | | | | WSS RS BASE CURRENT ch.0 [9:0] when bit8 of RS_CTRL is 0 WSS INSTANTANEOUS CURRENT ch.0 [9:0] when bit8 of RS_CTRL is 1 RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0010101 | 1 | 5 | RS_DATA_RSDR_5 | RS_DATA_RSDR_5 | R | WSS RS DELTA 1st PULSE ch.1 [9:0] RESET SSM RESET | | | | | | | | | | WSS RS BASE CURRENT ch.1 [9:0] when bit8 of RS_CTRL is 0 WSS INSTANTANEOUS CURRENT ch.0 [9:0] when bit8 of RS_CTRL is 1 RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0010110 | 1 | 6 | RS_DATA_RSDR_6 | RS_DATA_RSDR_6 | R | WSS RS DELTA 1st PULSE ch.2 [9:0] RESET SSM RESET | | | | | | | | | | WSS RS BASE CURRENT ch.2 [9:0] when bit8 of RS_CTRL is 0 WSS INSTANTANEOUS CURRENT ch.0 [9:0] when bit8 of RS_CTRL is 1 RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0010111 | 1 | 7 | RS_DATA_RSDR_7 | RS_DATA_RSDR_7 | R | WSS RS DELTA 1st PULSE ch.3 [9:0] RESET SSM RESET | | | | | | | | | | WSS RS BASE CURRENT ch.3 [9:0] when bit8 of RS_CTRL is 0 WSS INSTANTANEOUS CURRENT ch.0 [9:0] when bit8 of RS_CTRL is 1 RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0011000 | 1 | 8 | RS_DATA_RSDR_8 | RS_DATA_RSDR_8 | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | WSS RS DELTA 2nd PULSE ch.0 [9:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | |
| 0011001 | 1 | 9 | RS_DATA_RSDR_9 | RS_DATA_RSDR_9 | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | WSS RS DELTA 2nd PULSE ch.1 [9:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | |
| 0011010 | 1 | 10 | RS_DATA_RSDR_10 | RS_DATA_RSDR_10 | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | WSS RS DELTA 2nd PULSE ch.2 [9:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | |
| 0011011 | 1 | 11 | RS_DATA_RSDR_11 | RS_DATA_RSDR_11 | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | WSS RS DELTA 2nd PULSE ch.3 [9:0] RESET SSM RESET | | | | | | | | | | | | | | | | | | | | | |
| 0011100 | 1 | 12 | RS_DATA_RSDR_12 | RS_DATA_RSDR_12 | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | 2 nd DELTA SATURATION FLAG ch3 | 1 st DELTA SATURATION FLAG ch3 | BASE SATURATION FLAG ch.3 | 2 nd DELTA SATURATION FLAG ch2 | 1 st DELTA SATURATION FLAG ch2 | BASE SATURATION FLAG ch.2 | 2 nd DELTA SATURATION FLAG ch1 | 1 st DELTA SATURATION FLAG ch1 | BASE SATURATION FLAG ch.1 | 2 nd DELTA SATURATION FLAG ch0 | 1 st DELTA SATURATION FLAG ch0 | BASE SATURATION FLAG ch.0 | | | | | | | | | | |
| 0011101 | 1 | 13 | - | RESERVED | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | | | |
| 0011110 | 1 | 14 | - | RESERVED | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | | | |
| 0011111 | 1 | 15 | - | RESERVED | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | | | | | | | | | | | | |
| 0100000 | 2 | 0 | WD_SEED_ANSW | TYPE R/W RESET WSM RESET see wd q&a chapter | R/W | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | ANSW HIGH (6) | ANSW HIGH (6) | ANSW HIGH (5) | ANSW HIGH (4) | ANSW HIGH (3) | ANSW HIGH (2) | ANSW HIGH (1) | ANSW HIGH (0) | ANSW LOW (6) | SEED (7) | SEED (6) | ANSW LOW (5) | SEED (5) | ANSW LOW (4) | SEED (4) | ANSW LOW (3) | SEED (3) | ANSW LOW (2) | SEED (2) | ANSW LOW (1) | SEED (1) | ANSW LOW (0) | SEED (0) |

Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|--------------------|--|------|----------------------------|----|----|----|-----------|-----------------|--------------|------------------------|-------------------------|----|---|--------------------|------------|---|---|------------|------------------|----------------|-------------|-----------------|-------------|--------------|---------------|------------------|------------------|------------------|------------------|---|----------------|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | | | | | | | | |
| | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | | | | | |
| 0100001 | 2 | 1 | WD_ANSW_TIMING | see wd q&a chapter RESET WSM RESET | R/W | T_VALID_ANSW_TIMEOUT_DELTA | | | | | | | T_VALID_ANSW_END_DELTA | | | | T_VALID_ANSW_START | | | | | | | | | | | | | | | | | |
| 0100010 | 2 | 2 | WD_REQ_TIMING | see wd q&a chapter RESET WSM RESET | R/W | T_VALID_REQ_TIMEOUT_DELTA | | | | | | | T_VALID_REQ_END_DELTA | | | | T_VALID_REQ_START | | | | | | | | | | | | | | | | | |
| 0100011 | 2 | 3 | WD_COUNTER_SETUP | RESET WSM RESET see wd q&a chapter | R/W | - | - | - | - | WD_RST_EN | WD_REQ_CHECK_EN | WD_TO_RST_EN | WD_CLK_DIV | WD_TH_LOW | | | | WD_TH_HIGH | | | | WD_CNT_GOOD_STEP | | | WD_CNT_BAD_STEP | | | | | | | | | |
| 0100100 | 2 | 4 | WD_STATUS_REGISTER | RESET WSM RESET see wd q&a chapter | R | - | - | - | - | - | - | - | - | WD_RST_EVENT_VALUE (30) | | | - | - | - | - | WD_RST_CNT | WD_RST_TO_REQ | WD_RST_TO_ANSW | WD_LATE_REQ | WD_EARLY_REQ | WD_BAD_ANSW | WD_LATE_ANSW | WD_EARLY_ANSW | WD_CNT_VALUE (3) | WD_CNT_VALUE (2) | WD_CNT_VALUE (1) | WD_CNT_VALUE (0) | | |
| 0100101 | 2 | 5 | WD2_CTRL | WD2 TYPE C/R (bit 0) DEFAULT = 0, RESET = POR | R | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | WD2 RESET FLAG |



Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|----------------|--|------|--|----|----|----|----|----|----|----|----|----|------|---|---|---|---|---|---|--|---|---|---|---|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | W | R |
| 0100110 | 2 | 6 | BIST_CTRL | BIST CONTROL TYPE R/W (bit 19) TYPE R/O (bits 1:0) RESET = POR Bits (1:0) cleared on BIST RUN = 1 | R/W | LOGIC BIST RUN (Logic bist test requires TBIST ms to complete) 1 = enable, 0 = stopped - - - - - LOGIC BIST STATUS [1:0] 00 – Default 01 – Bist Running 10 – Bist Pass 11 – Bist Fail | | | | | | | | | | | | | | | | | | | | | |
| 0100111 | 2 | 7 | IC_VERSION | IC VERSION TYPE R/O | R | - | | | | | | | | | | | | | | | | | IC VERSION [5:0] AA=000 000; AB=000 001; BA=001 000; BB=001 001; CA=010 000; CB=010 001; | | | | |
| 0101000 | 2 | 8 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101001 | 2 | 9 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101010 | 2 | 10 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101011 | 2 | 11 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101100 | 2 | 12 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101101 | 2 | 13 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101110 | 2 | 14 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0101111 | 2 | 15 | - | RESERVED | - | - | | | | | | | | | | | | | | | | | | | | | |
| 0110000 | 3 | 0 | ADC CONV RES 0 | ADC CONV RES 0 RESET SSM_RESET | R | A1 4 | | | | | | | | | | A1 3 | | | | | | | | | | | |
| 0110001 | 3 | 1 | ADC CONV RES 1 | ADC CONV RES 1 RESET SSM_RESET | R | A1 2 | | | | | | | | | | A1 1 | | | | | | | | | | | |



Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | |
|---------|---------------|--------------|-----------------|------------------------------------|------|--------------------|----|----|----|----|----|----|----|---------|----|---|---|---|---|---|---|---|---|---|---|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R |
| 0110010 | 3 | 2 | ADC CONV RES 2 | ADC CONV RES 2 RESET SSM_RESET | R | VBST | | | | | | | | AI 0 | | | | | | | | | | | |
| 0110011 | 3 | 3 | ADC CONV RES 3 | ADC CONV RES 3 RESET SSM_RESET | R | VCP | | | | | | | | GPOD0 | | | | | | | | | | | |
| 0110100 | 3 | 4 | ADC CONV RES 4 | ADC CONV RES 4 RESET SSM_RESET | R | VB | | | | | | | | VB_SW | | | | | | | | | | | |
| 0110101 | 3 | 5 | ADC CONV RES 5 | ADC CONV RES 5 RESET SSM_RESET | R | VBM | | | | | | | | VDBATT | | | | | | | | | | | |
| 0110110 | 3 | 6 | ADC CONV RES 6 | ADC CONV RES 6 RESET SSM_RESET | R | VDS | | | | | | | | PDS | | | | | | | | | | | |
| 0110111 | 3 | 7 | ADC CONV RES 7 | ADC CONV RES 7 RESET SSM_RESET | R | IGN | | | | | | | | WDTDIS | | | | | | | | | | | |
| 0111000 | 3 | 8 | ADC CONV RES 8 | ADC CONV RES 8 RESET SSM_RESET | R | TEMPERATURE SENSOR | | | | | | | | VPREREG | | | | | | | | | | | |
| 0111001 | 3 | 9 | ADC CONV RES 9 | ADC CONV RES 9 RESET SSM_RESET | R | RSUH 3 | | | | | | | | RSUH 2 | | | | | | | | | | | |
| 0111010 | 3 | 10 | ADC CONV RES 10 | ADC CONV RES 10 RESET SSM_RESET | R | RSUH 1 | | | | | | | | RSUH 0 | | | | | | | | | | | |
| 0111011 | 3 | 11 | ADC CONV RES 11 | ADC CONV RES 11 RESET SSM_RESET | R | RSUL 3 | | | | | | | | RSUL 2 | | | | | | | | | | | |
| 0111100 | 3 | 12 | ADC CONV RES 12 | ADC CONV RES 12 RESET SSM_RESET | R | RSUL 1 | | | | | | | | RSUL 0 | | | | | | | | | | | |
| 0111101 | 3 | 13 | ADC CONV RES 13 | ADC CONV RES 13 RESET SSM_RESET | R | VCC5 | | | | | | | | VCC | | | | | | | | | | | |
| 0111110 | 3 | 14 | ADC CONV RES 14 | ADC CONV RES 14 RESET SSM_RESET | R | VCORE | | | | | | | | SCORE | | | | | | | | | | | |
| 0111111 | 3 | 15 | ADC CONV RES 15 | ADC CONV RES 15 RESET SSM_RESET | R | VINTD | | | | | | | | VINTA | | | | | | | | | | | |
| 1000000 | 4 | 0 | ADC CONV RES 16 | ADC CONV RES 16 RESET SSM_RESET | R | BGR | | | | | | | | BGM | | | | | | | | | | | |



Table 60. Registers summary (continued)

| ADDRESS | | | Name | Description | Type | DATA | | | | | | | | | | | | | | | | | | | |
|---------|------------|-----------|------------------|-------------------------------|------|--|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| BIN | Page [6:4] | REG [3:0] | | | | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| | | | | | | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R | W | R |
| 1000001 | 4 | 1 | ADC_CFG | ADC CONFIG RESET SSM_RESET | R/W | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | ADC CONFIG NSUM [2:0] 000: 1 sample 001: 2 samples, 010: 4 samples (default), 011: 8 samples, 100->111: 16 samples | |
| 1000010 | 4 | 2 | WRITE_PROTECTION | SAFE REGISTER LOCK/UNLOCK | R/W | W = Lock/Unlock words, Read =Lock/Unlock status Default = Unlock, Reset = SSM_RESET | | | | | | | | | | | | | | | | | | | |

8.4 SPI parameters

8.4.1 DC Electrical Parameters

The SPI interface is composed of:

- Supply: VCC
- Inputs: SCLK, SDI, CS
- Output: SDO

-40 °C ≤ T_j ≤ 175 °C unless otherwise specified.

Table 61. DC electrical characteristics

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|-------------------------------------|---------------------------|---------|------|------|------|
| VCC | SPI Dedicated Power Supply | Application note | 3.0 | - | 5.5 | V |
| V _{IL} | PRN Logic Input Low Voltage | - | - | - | 0.75 | V |
| V _{IH} | PRN Logic Input High Voltage | - | 1.75 | - | - | V |
| V _{hysteresis} | PRN Input hysteresis Voltage | - | 0.1 | - | 1 | V |
| PRNPD | PRN pull-down | PRN= 3.3V | 10 | - | 100 | μA |
| V _{IL} | SCLK Logic Input Low Voltage | - | - | - | 0.75 | V |
| V _{IH} | SCLK Logic Input High Voltage | - | 1.75 | - | - | V |
| V _{hysteresis} | SCLK Input hysteresis Voltage | - | 0.1 | - | 1 | V |
| SCLKPD | SCLK pull-down | SCLK = 3.3V | 10 | - | 100 | μA |
| V _{IL} | SDI Logic Input Low Voltage | - | - | - | 0.75 | V |
| V _{IH} | SDI Logic Input High Voltage | - | 1.75 | - | - | V |
| V _{hysteresis} | SDI Input hysteresis Voltage | - | 0.1 | - | 1 | V |
| SDIPU | SDI pull-up | SDI = 0V | -100 | - | -10 | μA |
| V _{IL} | CS Logic Input Low Voltage | - | - | - | 0.75 | V |
| V _{IH} | CS Logic Input High Voltage | - | 1.75 | - | - | V |
| V _{hysteresis} | CS Input hysteresis Voltage | - | 0.1 | - | 1 | V |
| CSPU | CS pull-up to internal logic supply | CS = 0V | -100 | - | -10 | μA |
| V _{OL} | SDO Logic Output Low Voltage | I _{source} = 1mA | - | - | 0.4 | V |
| V _{OH} | SDO Logic Output High Voltage | I _{sink} = 1mA | VCC-0.4 | - | - | V |
| I _{leak} | SDO Tristate leakage current | CS high 0<SDO<VCC-0.1V | -3 | - | 3 | μA |

8.4.2 AC electrical parameters

Figure 25. SPI timing diagram

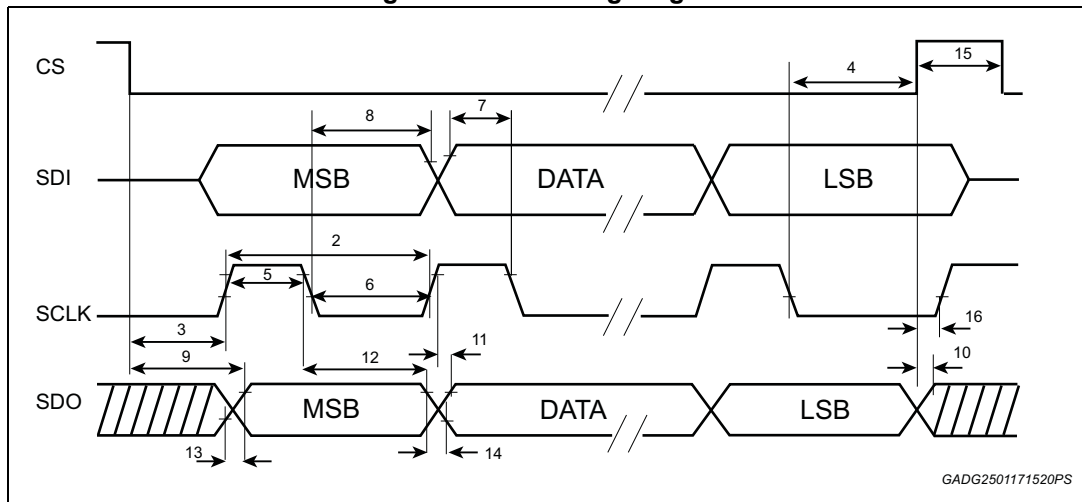


Table 62. SPI timing characteristics

| Symbol | Parameter | Test condition | Min | Typ | Max | Unit | note |
|---------|----------------------------|--------------------|-----|-----|-----|------|----------|
| fop | Transfer Frequency | Design Information | - | - | 6 | MHz | SCLK |
| tsclk | SCLK Period (2) | Design Information | 167 | - | - | ns | SCLK |
| tlead | Enable Lead Time (3) | Design Information | 750 | - | - | ns | SCLK |
| tlag | Enable Lag Time (4) | Design Information | 100 | - | - | ns | SCLK, CS |
| tsclkhs | SCLK High Time (5) | Design Information | 75 | - | - | ns | SCLK |
| tsckls | SCLK Low Time (6) | Design Information | 75 | - | - | ns | SCLK |
| tsus | SDI Input Setup Time (7) | Design Information | 30 | - | - | ns | SDI |
| ths | SDI Input Hold Time (8) | Design Information | 30 | - | - | ns | SDI |
| ta | SDO Access Time (9) | 50pF load | - | - | 100 | ns | SDO |
| tdis | SDO Disable Time (10) | 50pF load | - | - | 100 | ns | SDO |
| tv | SDO Output Valid Time (11) | 50pF load | - | - | 70 | ns | SDO |
| tho | SDO Output Hold Time (12) | 50pF load | 10 | - | - | ns | SDO |
| tr | SDO Rise Time (13) | 50pF load | - | - | 50 | ns | SDO |
| tf | SDO Fall Time (14) | 50pF load | - | - | 50 | ns | SDO |
| tcsn | CS Negated Time (15) | Design Information | 750 | - | - | ns | CS |
| tsh | SCLK Hold Time (16) | Design Information | 100 | - | - | ns | SCLK |

9 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

9.1 TQFP64 (10x10x1 mm exp. pad down) package information

Figure 26. TQFP64 (10x10x1 mm exp. pad down) package outline

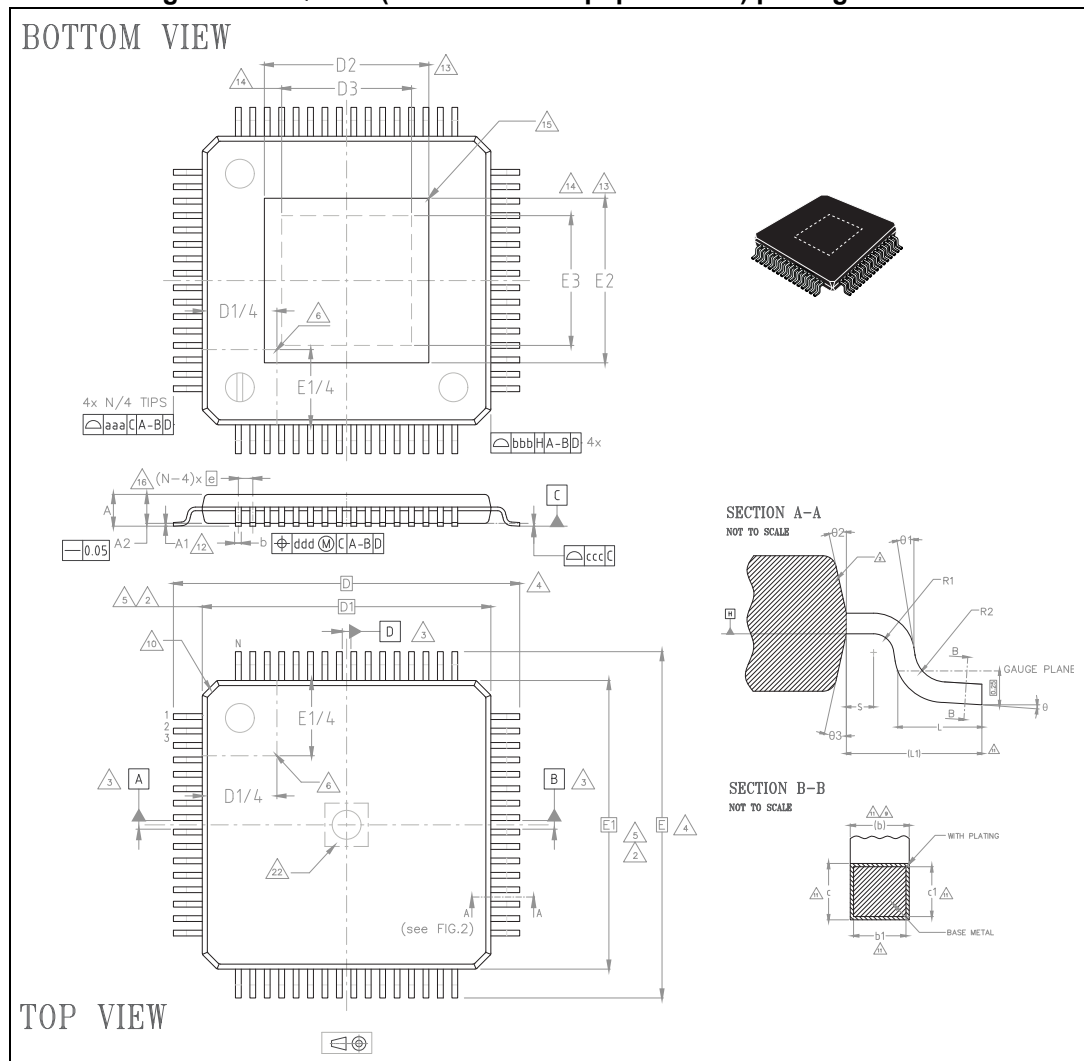


Table 63. TQFP64 (10x10x1 mm exp. pad down) package mechanical data

| Ref | Dimensions | | | | | |
|---------------------------------------|-------------|-----------|------|-----------------------|------------|--------|
| | Millimeters | | | Inches ⁽¹⁾ | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| θ | 0° | 3.5° | 6° | 0° | 3.5° | 6° |
| θ1 | 0° | - | - | 0° | - | - |
| θ2 | 11° | 12° | 13° | 11° | 12° | 13° |
| θ3 | 11° | 12° | 13° | 11° | 12° | 13° |
| A | - | - | 1.20 | - | - | 0.0472 |
| A1 | 0.05 | - | 0.15 | 0.002 | - | 0.0059 |
| A2 | 0.95 | 1.0 | 1.05 | 0.0374 | 0.0394 | 0.0413 |
| b | 0.17 | 0.22 | 0.27 | 0.0067 | 0.0079 | 0.0091 |
| b1 | 0.17 | 0.20 | 0.23 | 0.0067 | 0.0079 | 0.0091 |
| c | 0.09 | - | 0.20 | 0.0354 | - | 0.0079 |
| c1 | 0.09 | - | 0.16 | 0.0354 | - | 0.0063 |
| D | - | 12.00 BSC | - | - | 0.4724 BSC | - |
| D1 ⁽²⁾ | - | 10.00 BSC | - | - | 0.3937 BSC | - |
| D2 | VARIATION | | | | | |
| e | - | 0.50 BSC | - | - | 0.0197 BSC | - |
| E | - | 12.00 BSC | - | - | 0.4724 BSC | - |
| E1 ⁽²⁾ | - | 10.00 BSC | - | - | 0.3937 BSC | - |
| E2 | VARIATION | | | | | |
| L | 0.45 | 0.60 | 0.75 | 0.0177 | 0.0236 | 0.0295 |
| L1 | - | 1.00 REF | - | - | 0.0394 REF | - |
| N | - | 64.00 | - | - | 2.5197 | - |
| R1 | 0.08 | - | - | 0.0031 | - | - |
| R2 | 0.08 | - | 0.20 | 0.0031 | - | 0.0079 |
| S | 0.20 | - | - | 0.0079 | - | - |
| TOLERANCE OF FORM AND POSITION | | | | | | |
| aaa | - | 0.20 | - | - | 0.0079 | - |
| bbb | - | 0.20 | - | - | 0.0079 | - |
| ccc | - | 0.08 | - | - | 0.0031 | - |
| ddd | - | 0.07 | - | - | 0.0028 | - |


Table 63. TQFP64 (10x10x1 mm exp. pad down) package mechanical data (continued)

| Ref | Dimensions | | | | | |
|---------------------------------|-------------|------|------|-----------------------|--------|------|
| | Millimeters | | | Inches ⁽¹⁾ | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| VARIATIONS⁽³⁾ | | | | | | |
| Option A | | | | | | |
| D2 | - | 4.50 | - | - | 0.1772 | - |
| E2 | - | 4.50 | - | - | 0.1772 | - |
| Option B | | | | | | |
| D2 | - | 6.0 | - | - | 0.2362 | - |
| E2 | - | 6.0 | - | - | 0.2362 | - |

1. Values in inches are converted from mm and rounded to 4 decimal digits.
2. Dimensions D1 and E1 do not include mold flash or protrusions.
Allowable mold flash or protrusion is "0.25 mm" per side.
3. L9396 mounts option A: 4.5x4.5 die pad.

9.2 TQFP64 (10x10x1 mm exp. pad down) marking information

Figure 27. TQFP64 (10x10x1 mm exp. pad down) marking information

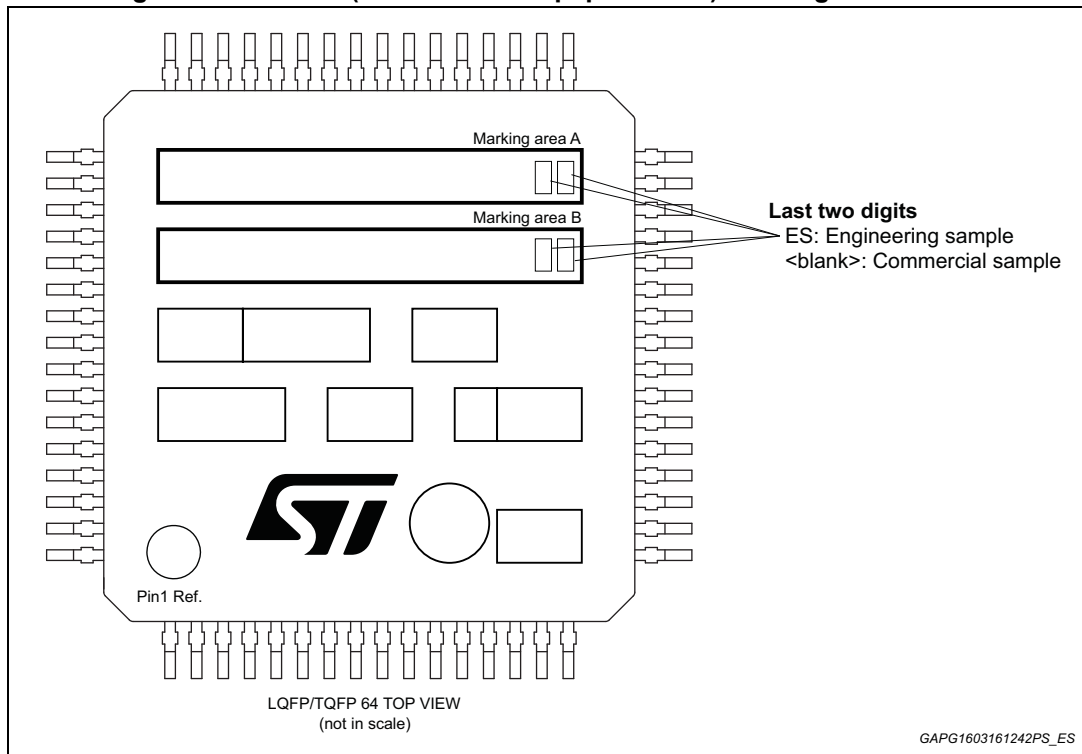

Parts marked as 'ES' are not yet qualified and therefore not approved for use in production. ST is not responsible for any consequences resulting from such use. In no event will ST be liable for the customer using any of these engineering samples in production. ST's Quality department must be contacted prior to any decision to use these engineering samples to run a qualification activity.

10 Revision history

Table 64. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 06-Apr-2018 | 1 | Initial release. |
| 27-Sep-2019 | 2 | Updated: <ul style="list-style-type: none"> – Table 5: Configuration and control DC specifications; – Table 6: Boost regulator electrical characteristics; – Table 10: VPREREG buck regulator; – Table 45: Analog to digital converter; – Table 54: WD2 characteristics; – Table 57: Fail safe output. Minor text changes. |
| 12-Nov-2020 | 3 | Updated: <ul style="list-style-type: none"> – Table 54: WD2 characteristics; – Section : Features; – Section 7.4.1: Watchdog (WD1); – Section 8.2: SPI frame (SDI and SDO FRAME1); – Section 9.1: TQFP64 (10x10x1 mm exp. pad down) package information. |
| 19-Jul-2021 | 4 | Minor text changes in Section 3.7: VCORE regulator (GCORE resistor value). |
| 01-Dec-2021 | 5 | Typo corrections. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[L9396](#)